



**FCC CFR47 PART 15 SUBPART E  
CERTIFICATION  
TEST REPORT  
FOR**

**802.11a/b/g CARDBUS CARD**

**MODEL NUMBER: AR5BCB-00062**

**FCC ID: PPD-AR5BCB-00062**

**REPORT NUMBER: O4U3043-2**

**ISSUE DATE: DECENMBER 9, 2004**

*Prepared for*  
**ATHEROS COMMUNICATIONS, INC.  
529 ALMANOR AVE.  
SUNNYVALE, CA 94085  
U.S.A.**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

**NVLAP<sup>®</sup>**  
**LAB CODE:200065-0**

Revision History

<u>Rev.</u>	<u>Revisions</u>	<u>Revised By</u>
-------------	------------------	-------------------

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>5</b>
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>6</b>
5.1. DESCRIPTION OF EUT.....	6
5.2. MAXIMUM OUTPUT POWER.....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	7
5.4. SOFTWARE.....	7
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP.....	8
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>10</b>
<b>7. LIMITS AND RESULTS .....</b>	<b>11</b>
7.1. CHANNEL TESTS FOR THE 5150 TO 5350 MHz BAND.....	11
7.1.1. EMISSION BANDWIDTH.....	11
7.1.2. PEAK POWER.....	19
7.1.3. AVERAGE POWER.....	29
7.1.4. PEAK POWER SPECTRAL DENSITY.....	30
7.1.5. PEAK EXCURSION.....	39
7.1.6. CONDUCTED SPURIOUS EMISSIONS.....	47
7.2. RADIATED EMISSIONS.....	55
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS.....	55
7.2.2. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND.....	58
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHZ.....	76
7.3. POWERLINE CONDUCTED EMISSIONS.....	80
<b>8. SETUP PHOTOS.....</b>	<b>84</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** ATHEROS COMMUNICATIONS, INC.  
529 ALMANOR AVE.  
SUNNYVALE, CA 94085  
U.S.A.

**EUT DESCRIPTION:** 802.11a/b/g CARDBUS CARD WITH TURBO MODES

**MODEL:** AR5BCB-00062

**SERIAL NUMBER:** CB62-420-36

**DATE TESTED:** NOVEMBER 30 – DECEMBER 7, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART E	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



YAN ZHENG  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

HITESH SOLANKI  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g with turbo mode transceiver Cardbus Card.

The radio module is manufactured by Atheros Communications Inc.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

5150 to 5250 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5250	802.11a	14.75	29.85
5200 - 5250	802.11a Turbo	16.81	47.97

5250 to 5350 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5250 - 5320	802.11a	16.93	49.32
5250 - 5290	802.11a Turbo	16.76	47.42

### **5.3. DESCRIPTION OF AVAILABLE ANTENNAS**

The radio utilizes two integrated TX/RX antennas for diversity, each with a maximum gain of 0 dBi.

### **5.4. SOFTWARE**

The test utility software used during testing was “ART program” rev. V5\_2\_b55.

### **5.5. WORST-CASE CONFIGURATION AND MODE**

The worst-case channel is determined as the channel with the highest output power.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	IBM	R40	FX-28550	DoC
AC Adapter	IBM	02K6657	A261766	N/A
Laptop PC	Dell	PP05L	4Y212-484643-34-T	DoC
AC Adapter	Dell	AA22850	45U092-16291-34K-	N/A
Laptop PC	Dell	PP011	52XMUL-36273-FB-1	DoC
AC Adapter	Dell	AA20031	9364U	N/A

### I/O CABLES


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	DC	Unshielded	1.8	No
2	AC	1	IEC	Unshielded	1.5	No

### TEST SETUP

The EUT is installed in a host laptop computer via a PCMCIA slot during the tests. The test software exercised the radio card.



**SETUP DIAGRAM FOR TESTS**

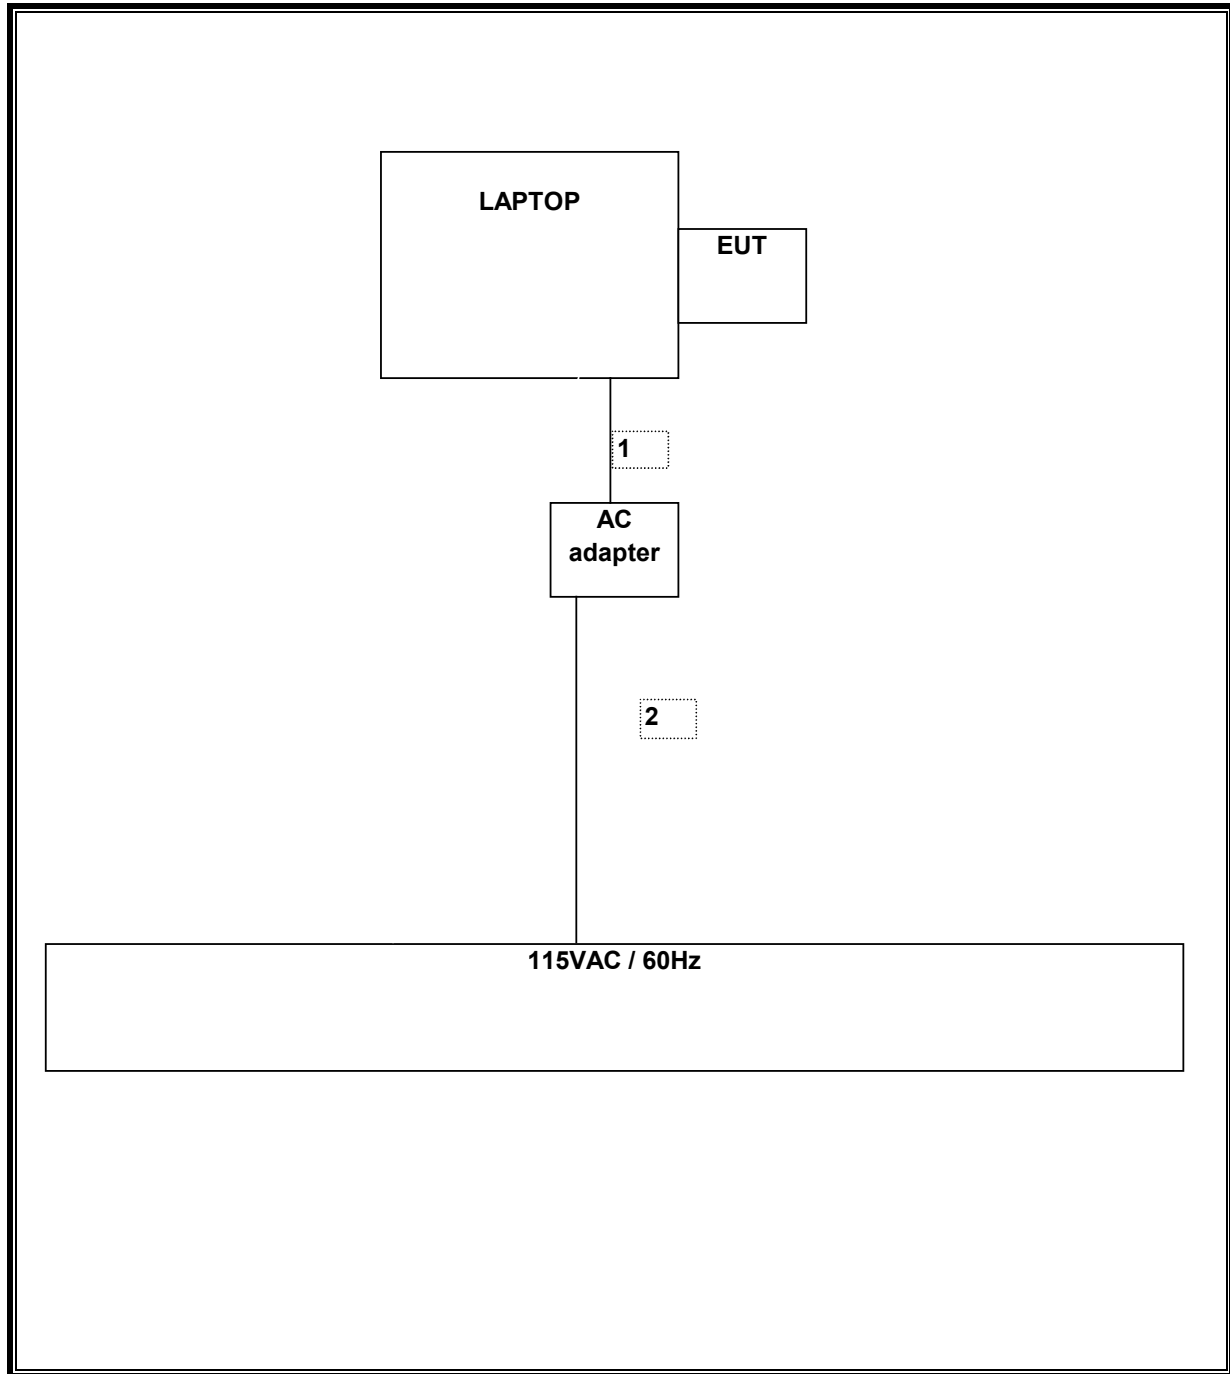

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Peak Power Meter	Agilent	E4416A	GB41291160	2/9/2006
Peak / Average Power Sensor	Agilent	E9327A	US40440755	2/10/2006
Spectrum Analyzer 20 Hz ~ 44 GHz	Agilent	E4446A	US42070220	4/1/2005
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29310	9/12/2005
Preamplifier, 1 ~ 26 GHz	Miteq	NSP2600-44	646456	8/17/2005
5.15-5.35 GHz Rejection filter	Microtronics	BRC13190	2	CNR
5.47-5.725 GHz Rejection filter	Microtronics	BRC13191	1	CNR
5.725-5.825 GHz Rejection filter	Microtronics	BRC13192	1	CNR
1.5 GHz High pass filter	Microtronics	HPM13193	3	CNR
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/2005
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2005
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/21/2005
AC Power Source, 10KVA	ACS	AFC-10K-AFC-2	J1568	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	29800	5/13/2005
AC Power Source, 8KVA	APC	AFP2-8KVA	J5061	CNR

## 7. LIMITS AND RESULTS

### 7.1. CHANNEL TESTS FOR THE 5150 TO 5350 MHz BAND

#### 7.1.1. EMISSION BANDWIDTH

##### LIMIT

§15.403 (i) Emission bandwidth. For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 26 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

##### RESULTS

No non-compliance noted:


##### 802.11a Mode


Channel	Frequency (MHz)	B (MHz)	10 Log B (dB)
Low	5180	25.38	14.04
Middle	5240	25.54	14.07
Middle	5260	25.63	14.09
High	5320	26.19	14.18


##### 802.11a Turbo Mode


Channel	Frequency (MHz)	B (MHz)	10 Log B (dB)
Low	5200	42.29	16.26
Middle	5250	42.28	16.26
High	5290	42.73	16.31

**26 dB EMISSION BANDWIDTH (802.11a MODE)**

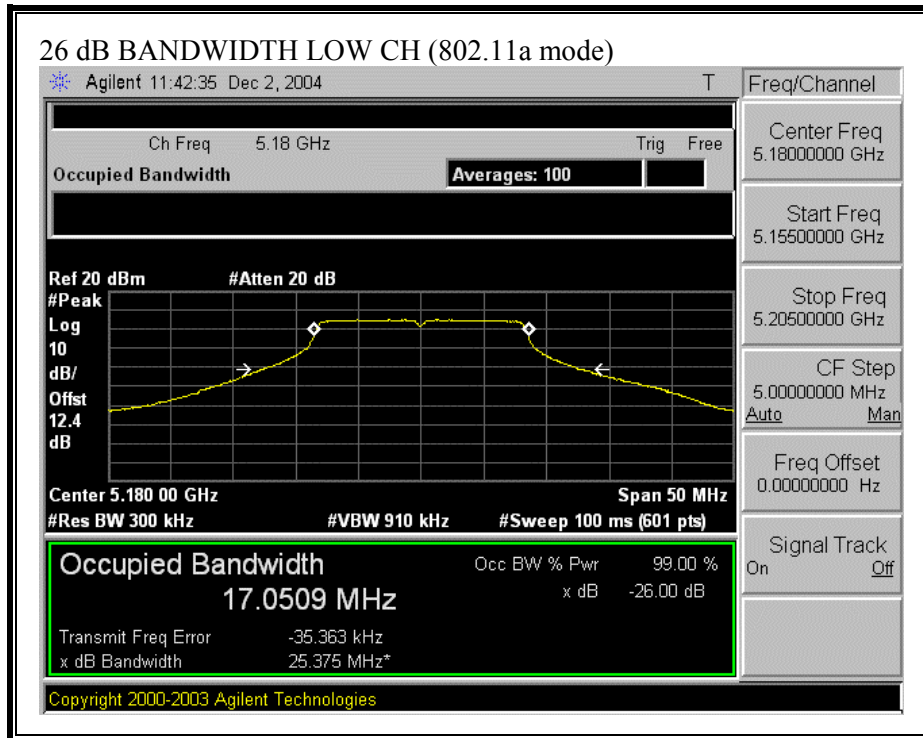


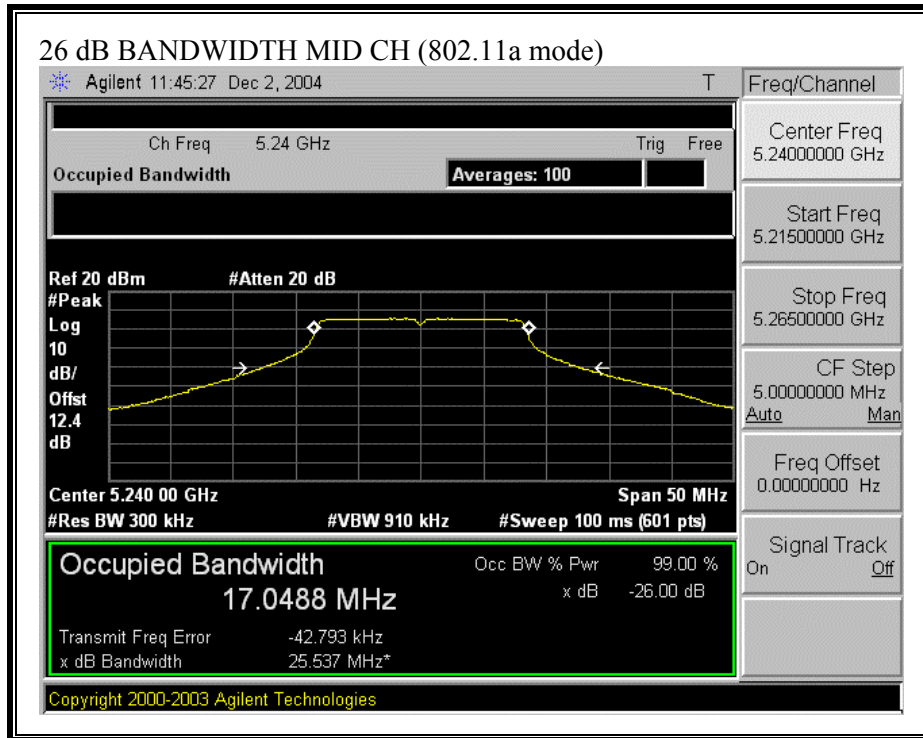

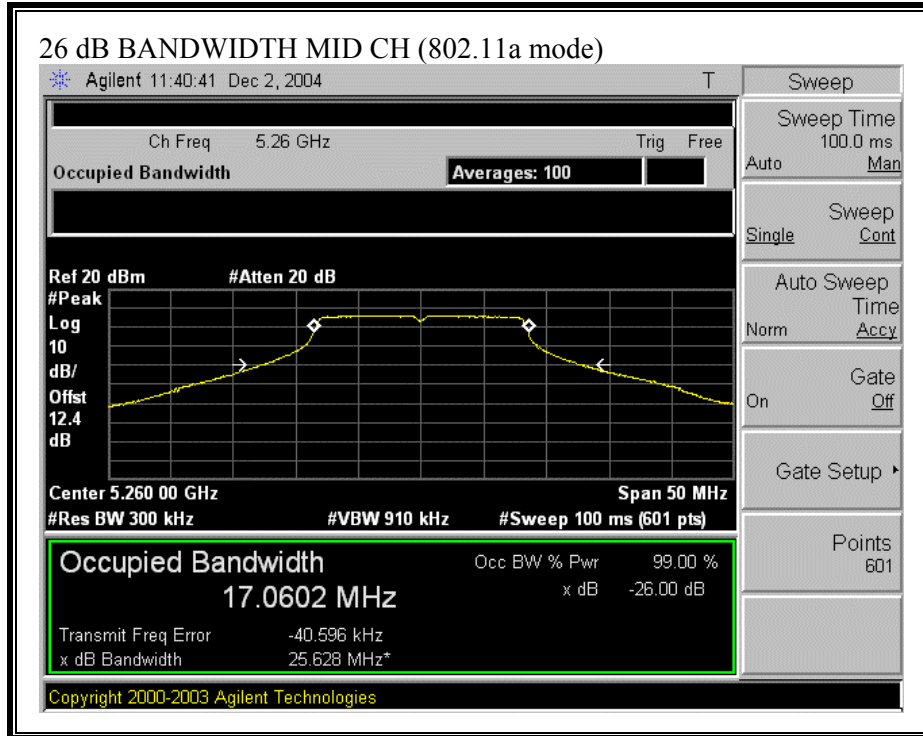


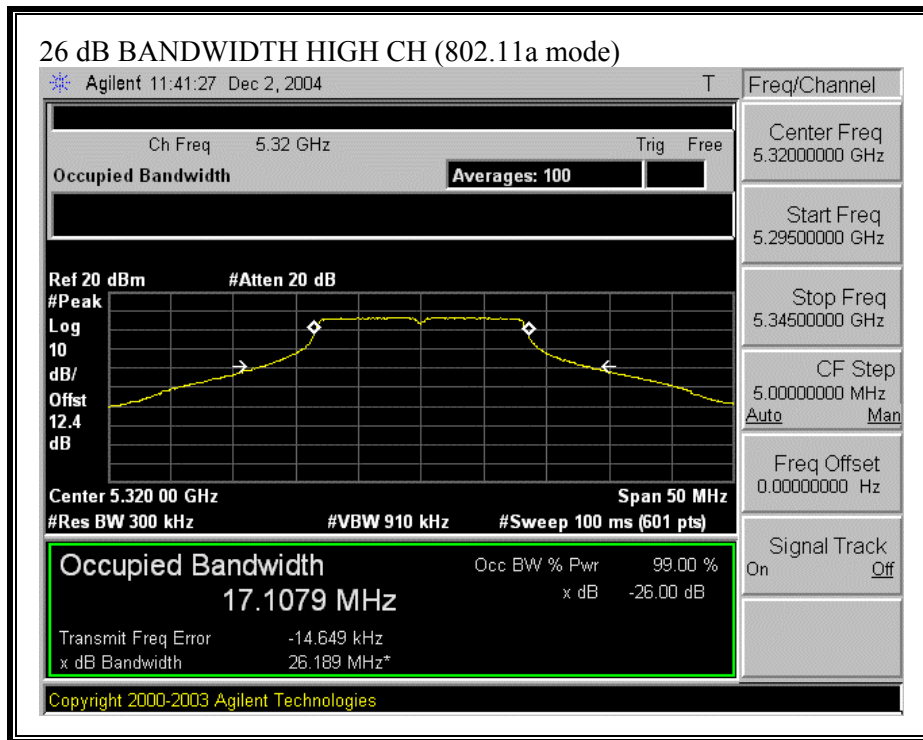


**26 dB EMISSION BANDWIDTH (802.11a TURBO MODE)**

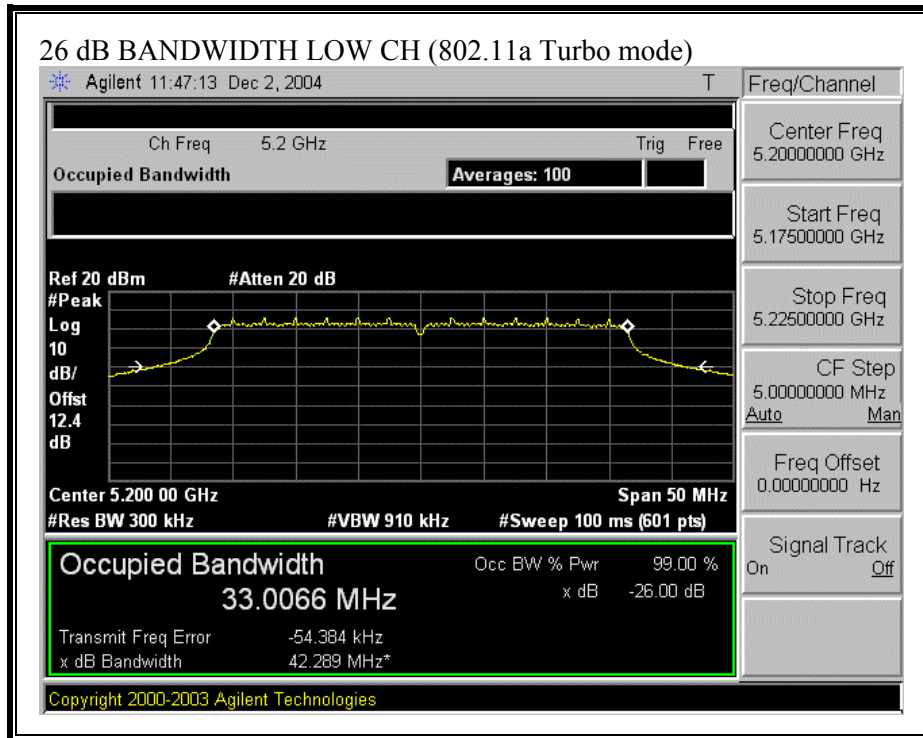



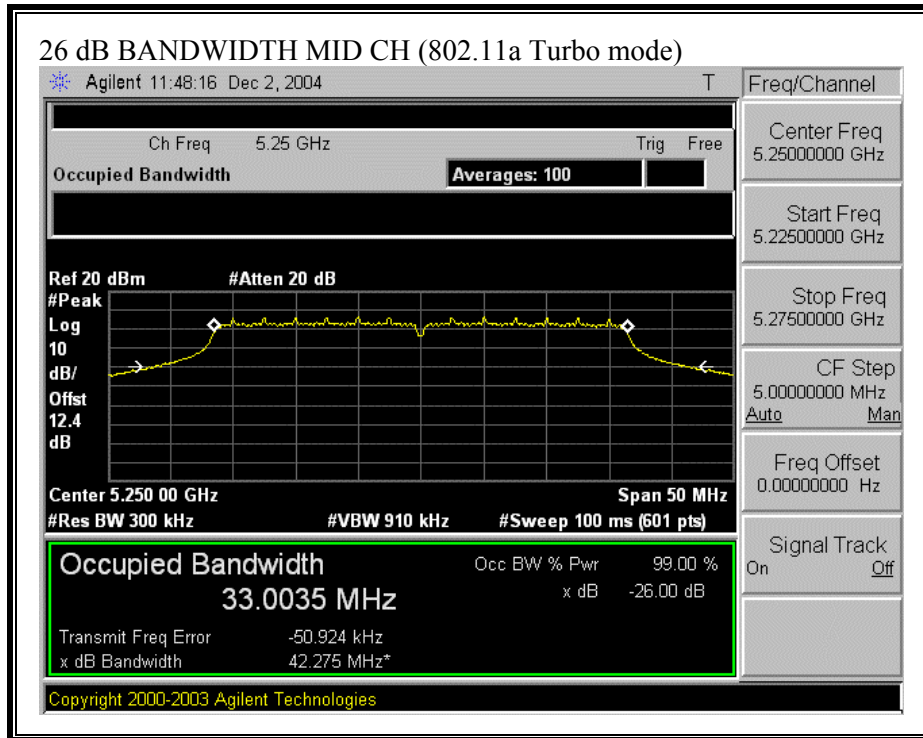

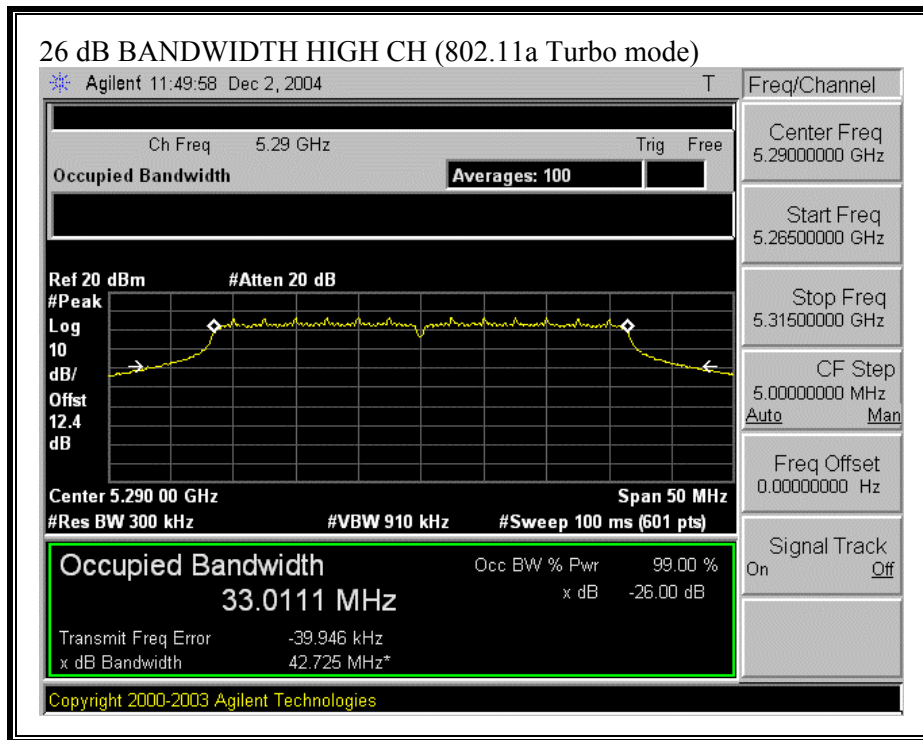

## 7.1.2. PEAK POWER

### LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or  $4 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

**LIMITS AND RESULTS**

No non-compliance noted:

Limit in 5150 to 5250 MHz Band

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5180	17	25.375	18.04	0.00	17.00
Mid	5240	17	25.537	18.07	0.00	17.00

Limit in 5250 to 5350 MHz Band

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Mid	5260	24	25.628	25.09	0.00	24.00
High	5320	24	26.189	25.18	0.00	24.00

Results

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dB)
Low	5180	14.75	17.00	-2.25
Mid	5240	14.70	17.00	-2.30
Mid	5260	16.55	24.00	-7.45
High	5320	16.93	24.00	-7.07

**LIMITS AND RESULTS FOR TURBO MODE**

Limit in 5150 to 5250 MHz Band

Turbo Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5200	17	42.289	20.26	0.00	17.00
Mid	5250	17	42.275	20.26	0.00	17.00


Limit in 5250 to 5350 MHz Band


Turbo Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
High	5290	24	42.725	27.31	0.00	24.00


Results

Turbo Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dB)
Low	5200	16.81	17.00	-0.19
Mid	5250	16.76	17.00	-0.24
High	5290	16.72	24.00	-7.28


**PEAK POWER (NORMAL MODE)**

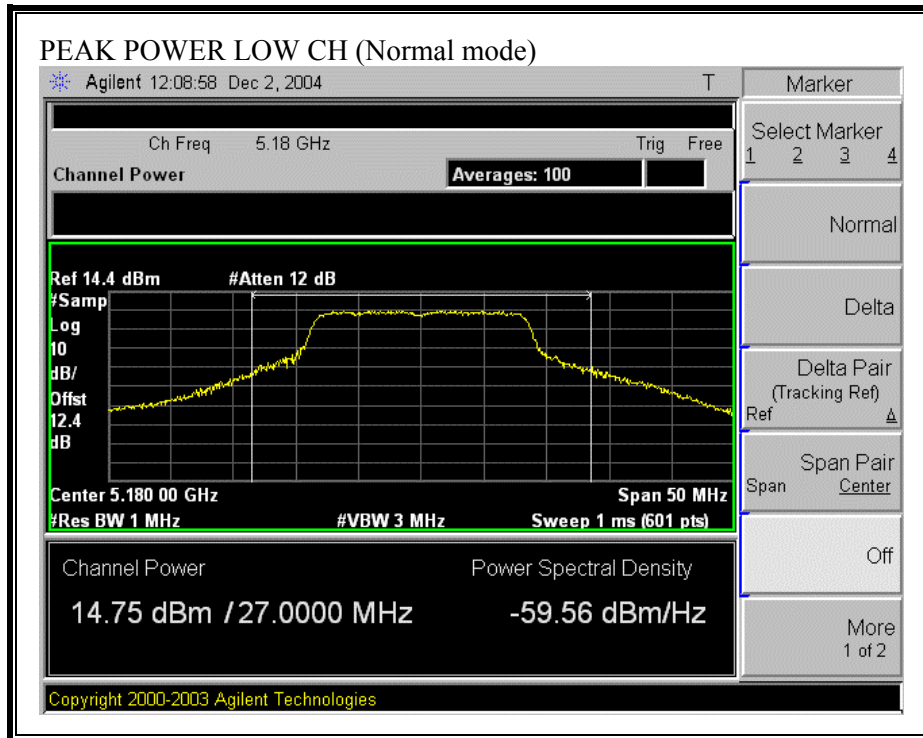

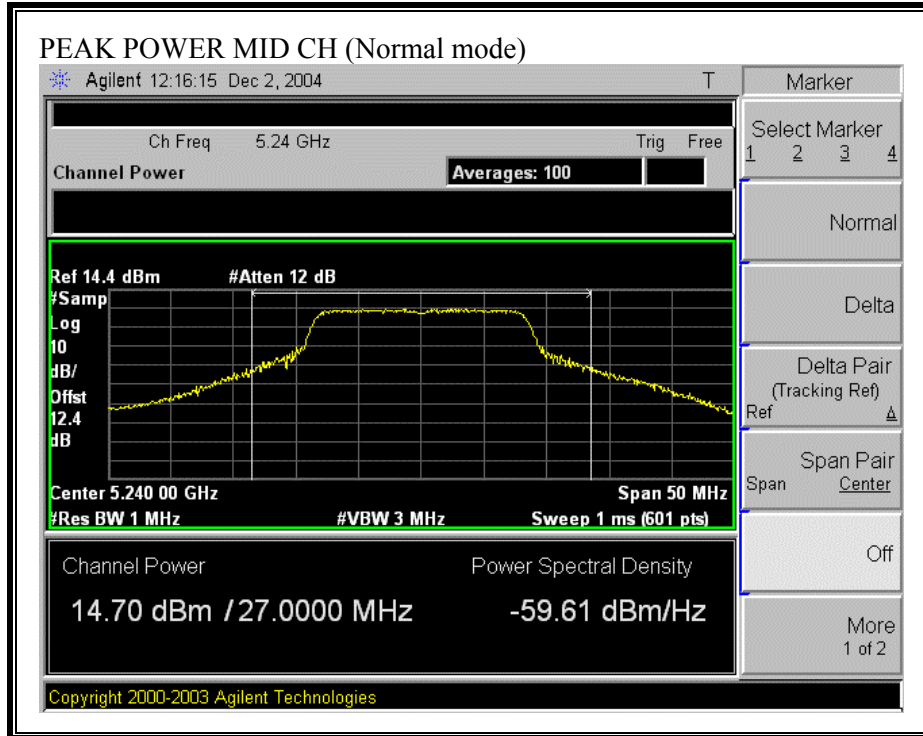


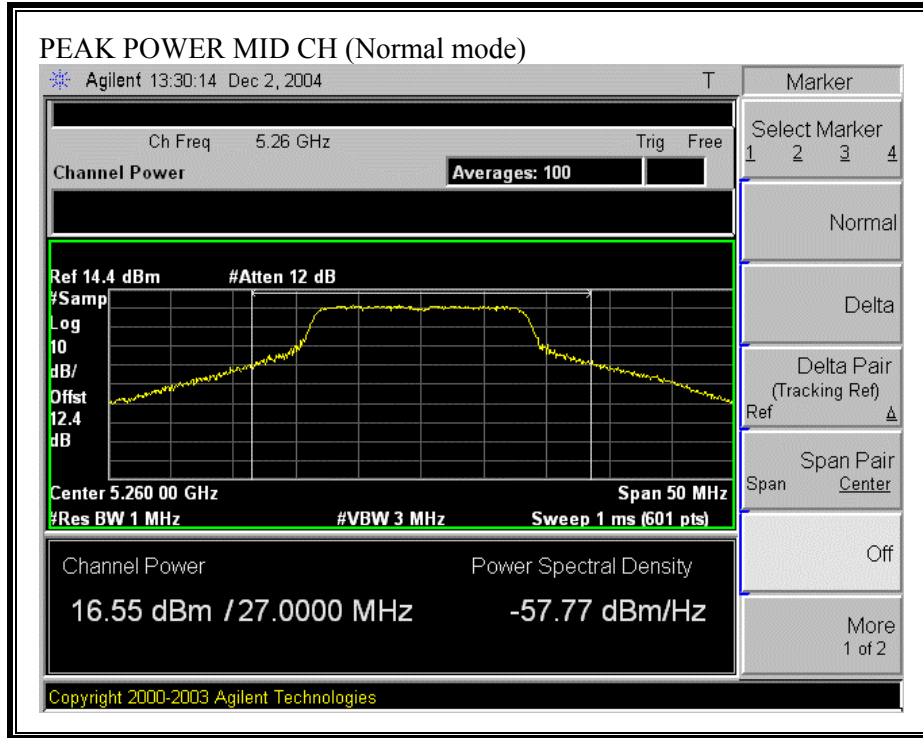





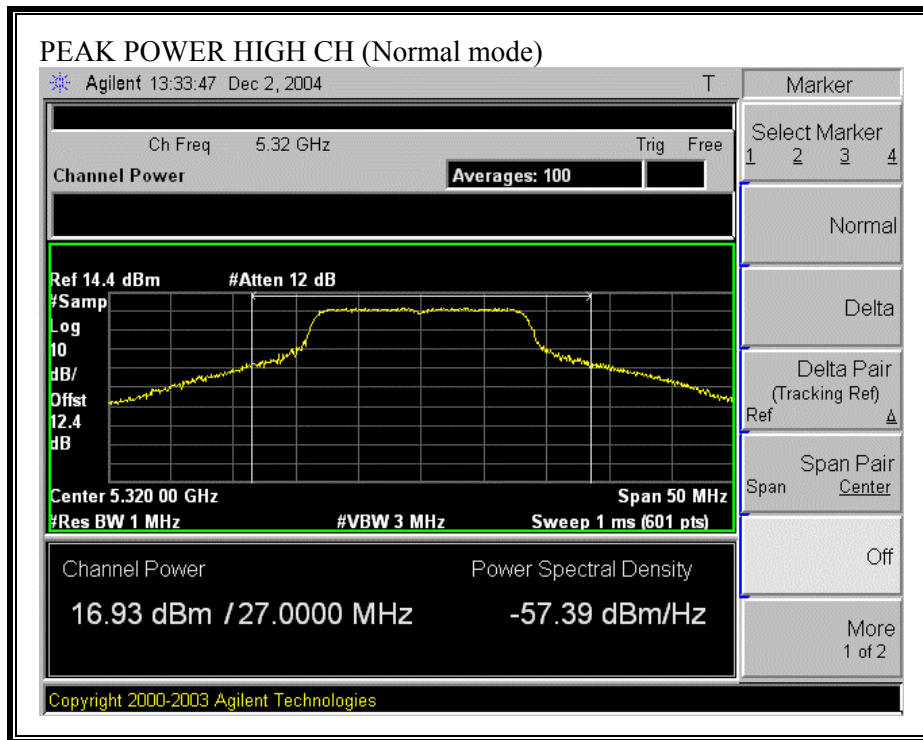

**PEAK POWER (TURBO MODE)**

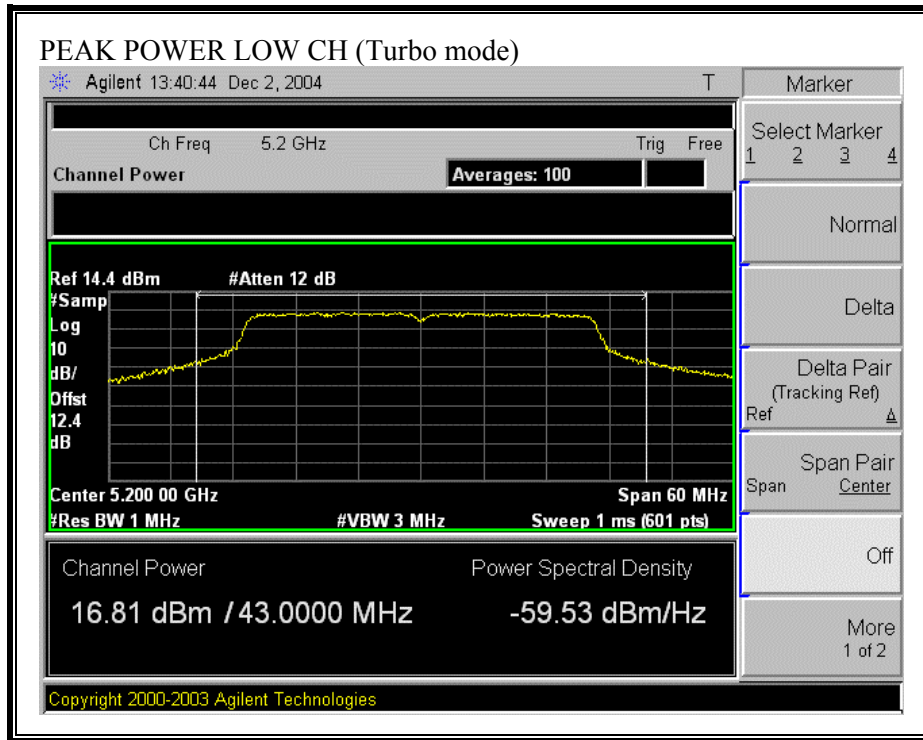

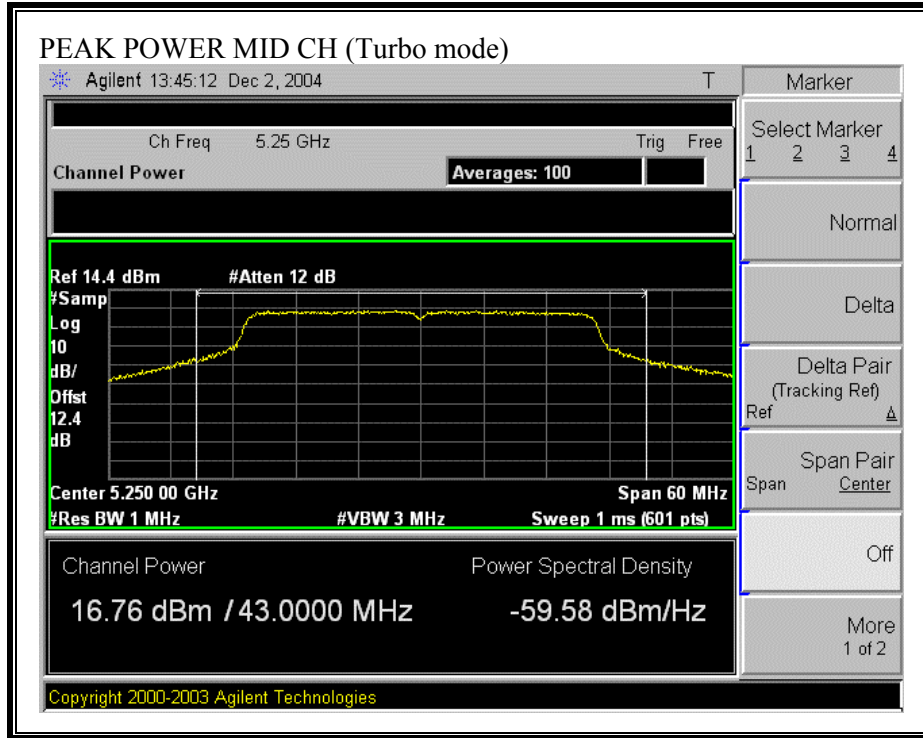

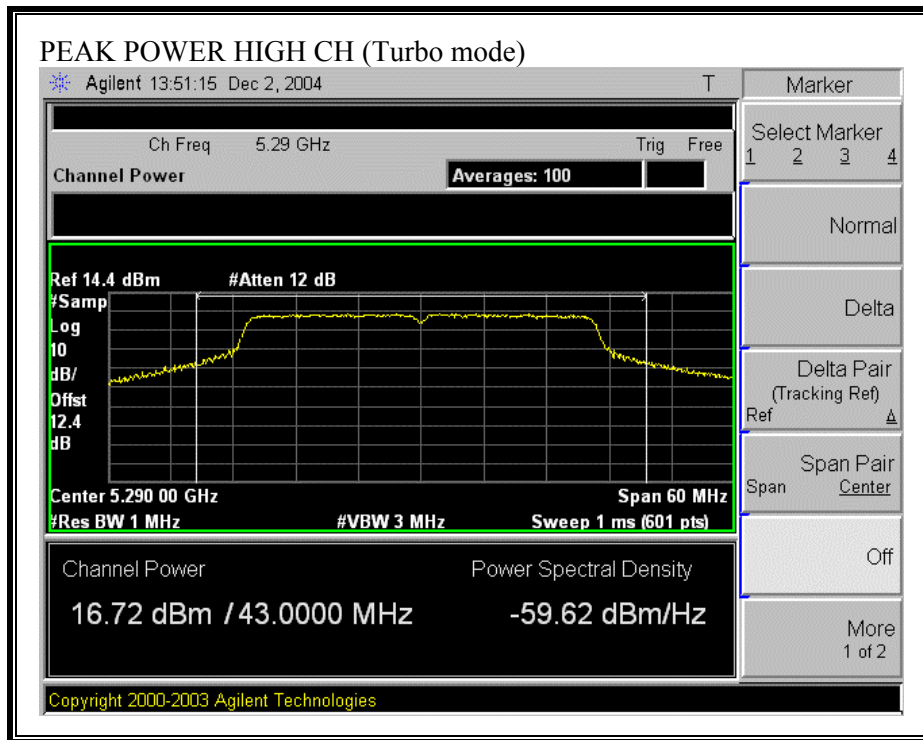

### 7.1.3. AVERAGE POWER

#### AVERAGE POWER LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

No non-compliance noted:

The cable assembly insertion loss of 12.4 dB (including 10 dB pad and 2.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### 802.11a Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5180	15.6
Middle	5240	16
Middle	5260	16.5
High	5320	17.2

#### 802.11a Turbo Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5210	17.1
Middle	5250	16.9
High	5290	17.1

## 7.1.4. PEAK POWER SPECTRAL DENSITY

### LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain = 0.0 dBi, therefore there is no reduction due to antenna gain.

### TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

**RESULTS**

No non-compliance noted:


802.11a Mode

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>PPSD (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>
Low	5180	3.97	4.00	-0.04
Mid	5240	3.77	4.00	-0.23
Mid	5260	5.51	11.00	-5.49
High	5320	6.17	11.00	-4.83


802.11a Turbo Mode


<b>Channel</b>	<b>Frequency (MHz)</b>	<b>PPSD (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>
Low	5210	3.19	4.00	-0.81
Mid	5250	3.01	4.00	-1.00
High	5290	2.84	11.00	-8.16


**PEAK POWER SPECTRAL DENSITY (802.11a MODE)**

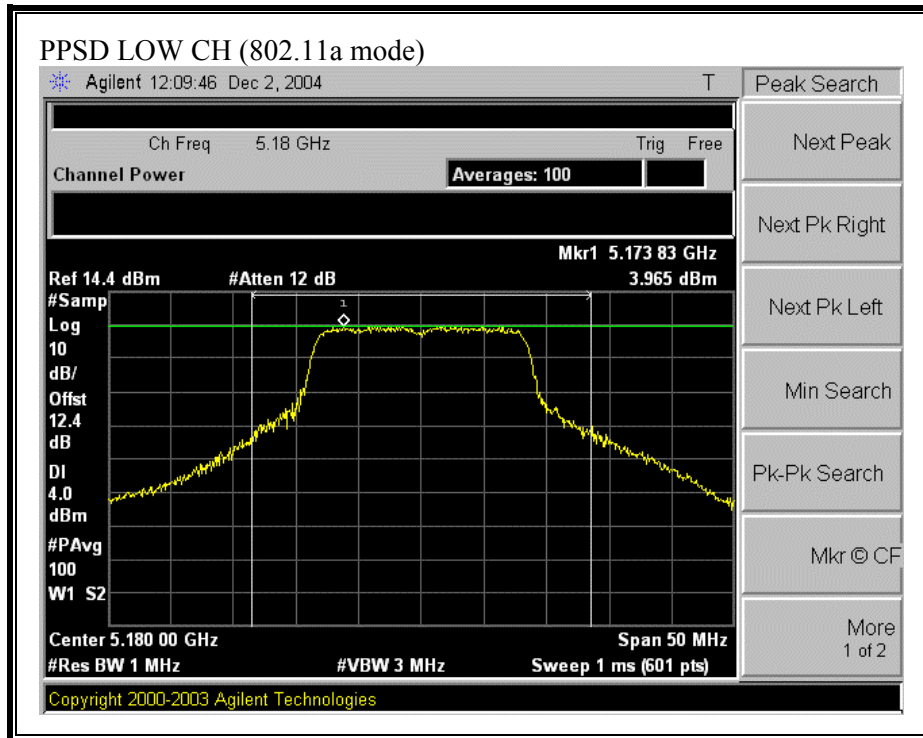




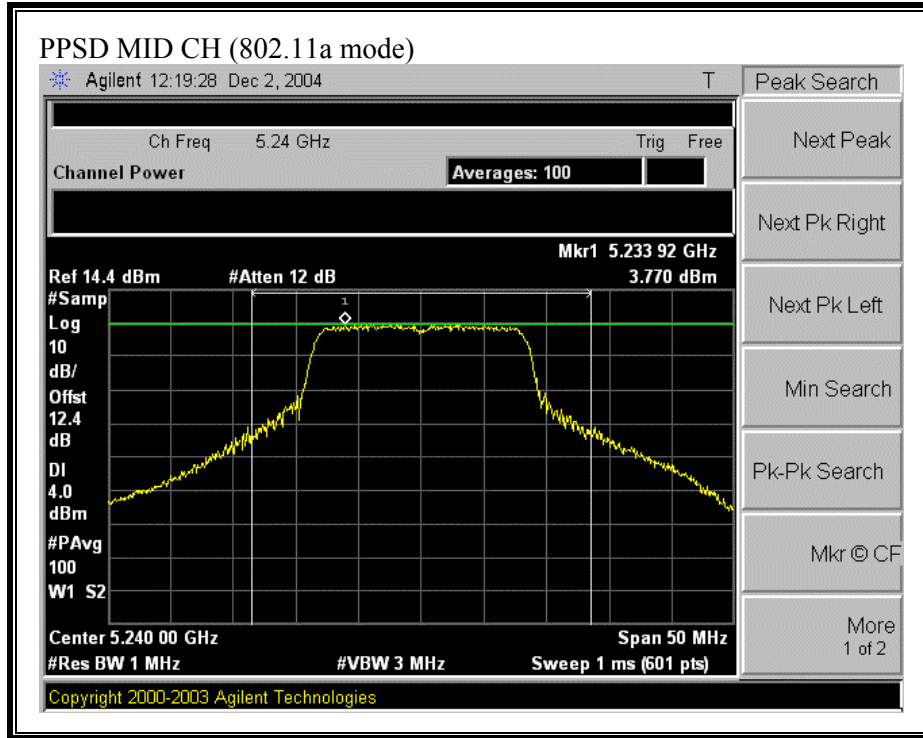


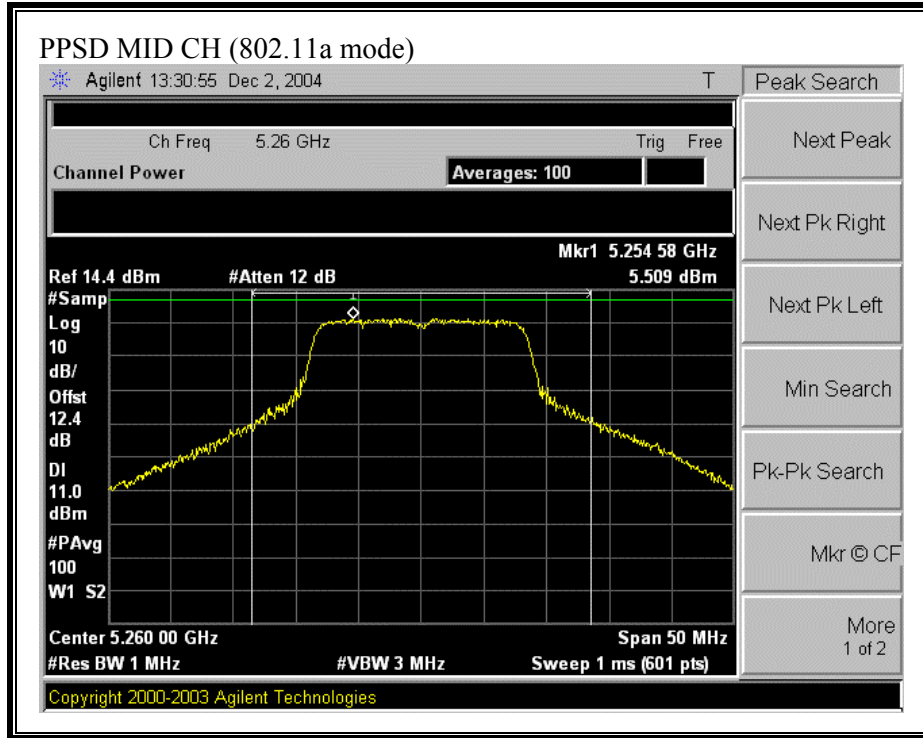


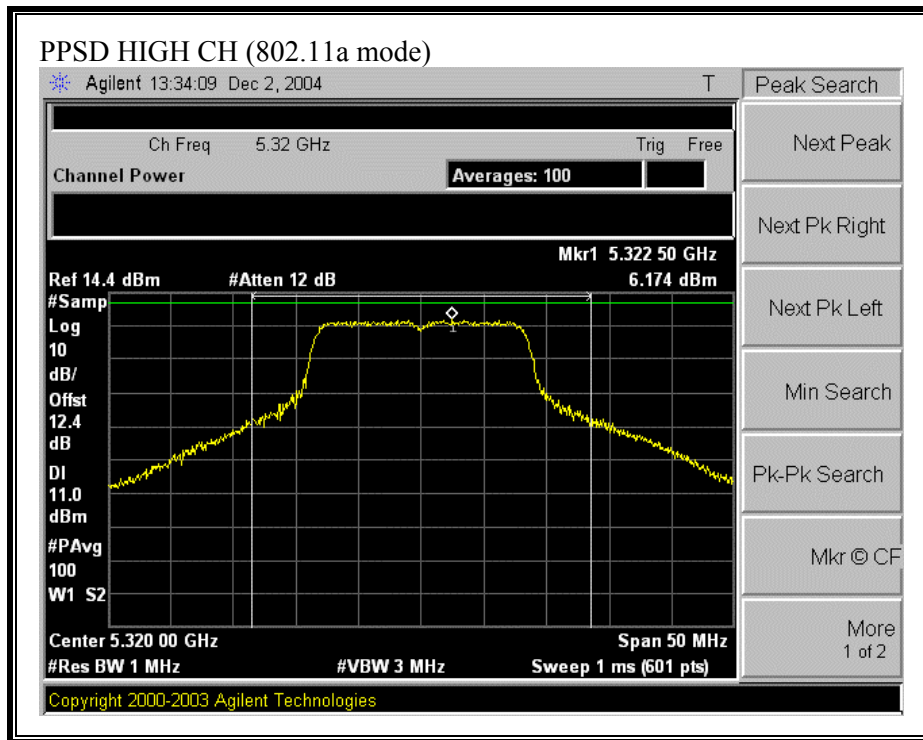

**PEAK POWER SPECTRAL DENSITY (802.11a TURBO MODE)**

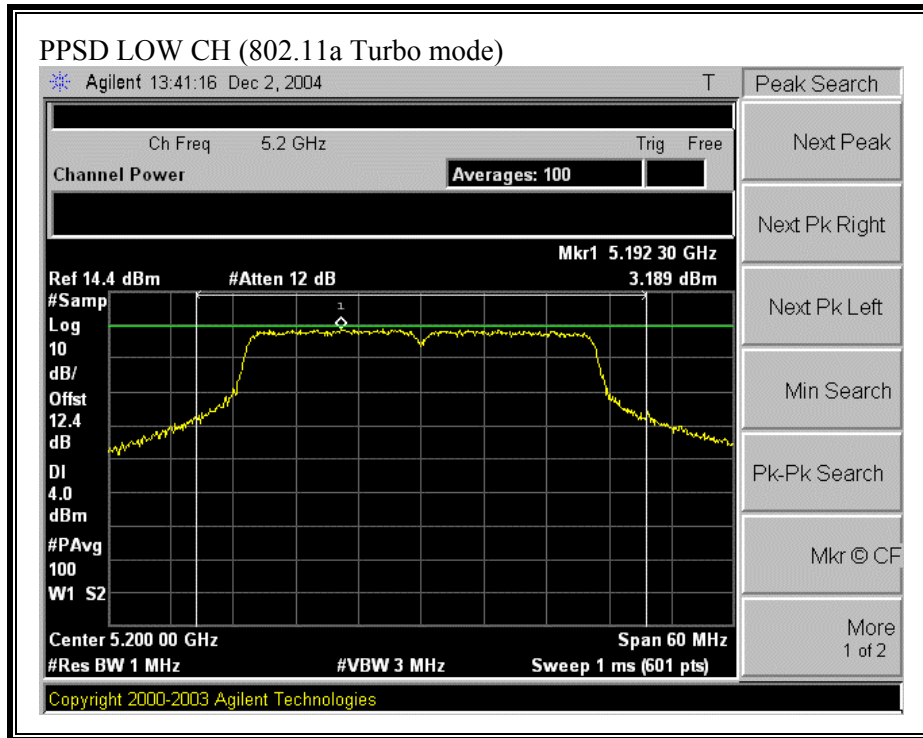

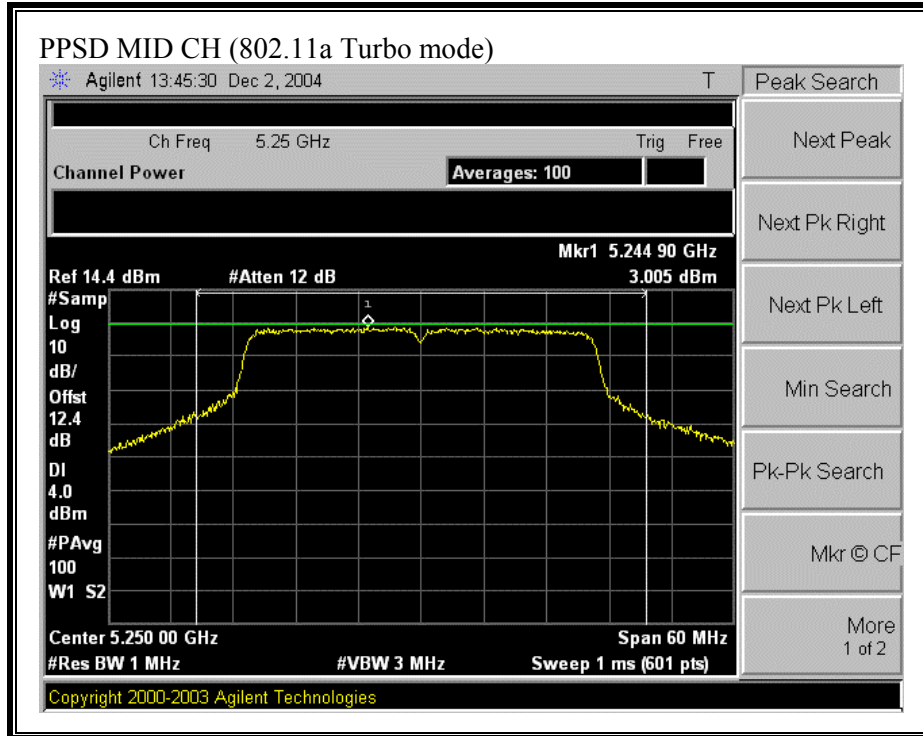

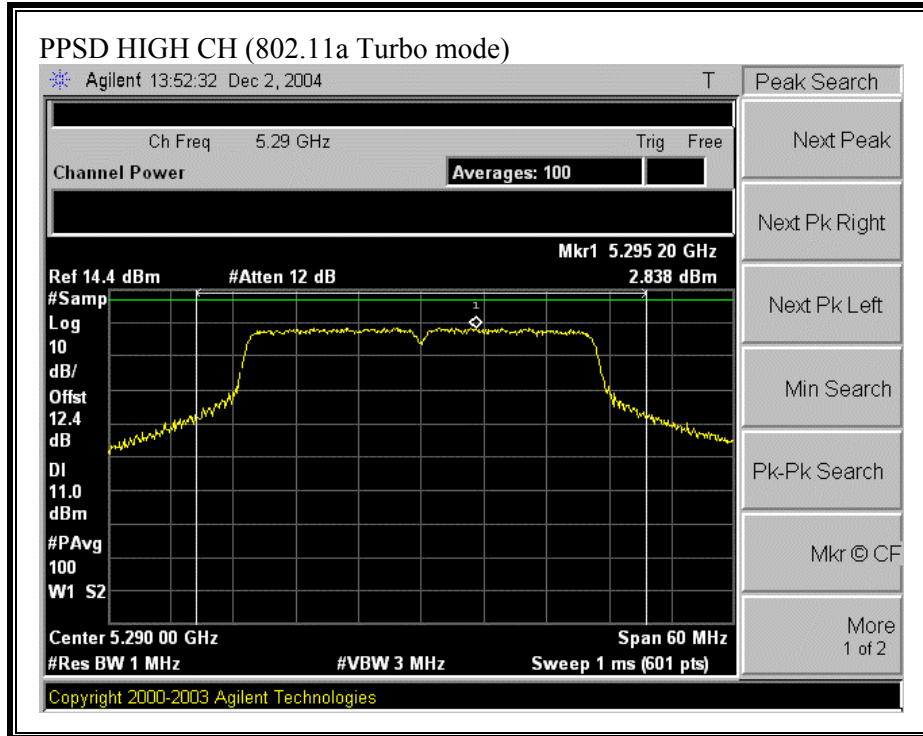

### 7.1.5. PEAK EXCURSION

#### LIMIT

§15.407 (a) (6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

#### TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

#### RESULTS

No non-compliance noted:


##### 802.11a Mode

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	7.44	13	-5.57
Middle	5240	8.66	13	-4.34
Middle	5260	7.11	13	-5.89
High	5320	7.59	13	-5.41


##### 802.11a Turbo Mode


Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5200	8.00	13	-5.00
Middle	5250	7.73	13	-5.27
High	5290	7.83	13	-5.17


**PEAK EXCURSION (802.11a MODE)**

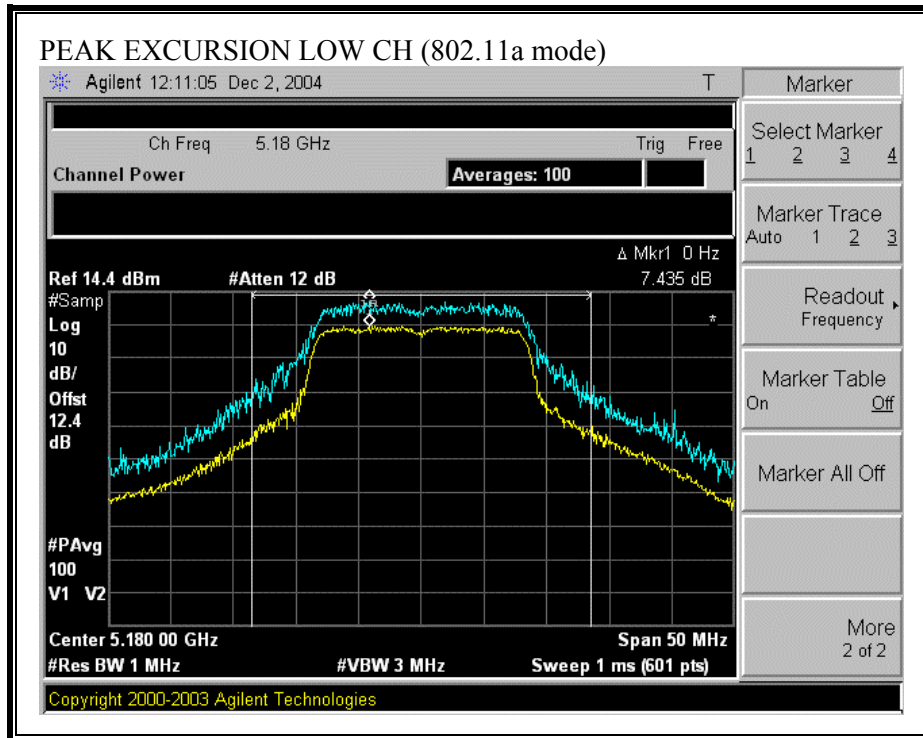




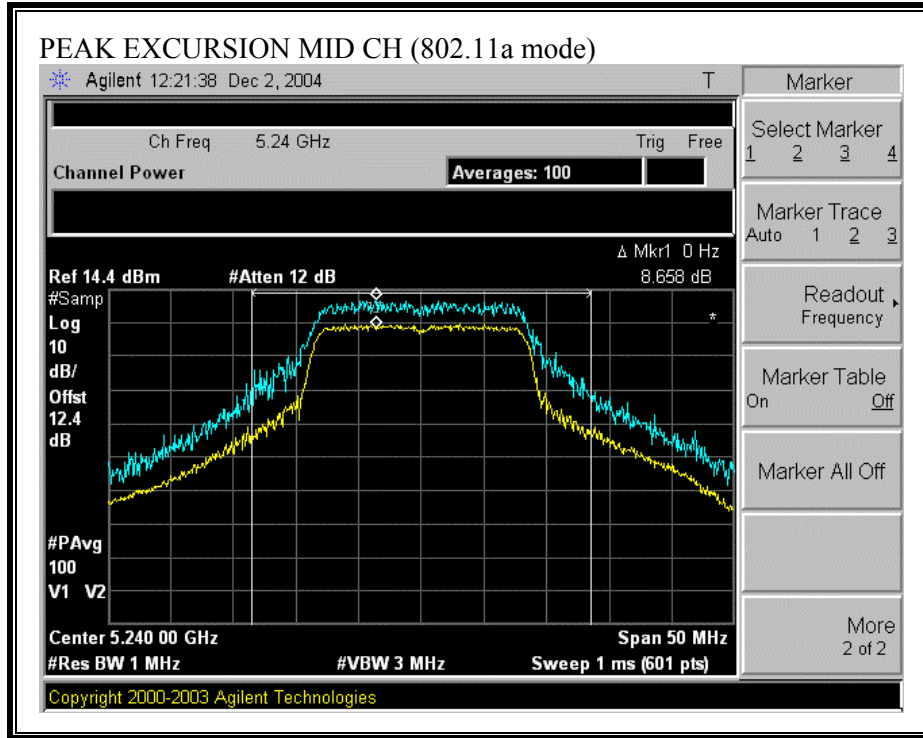


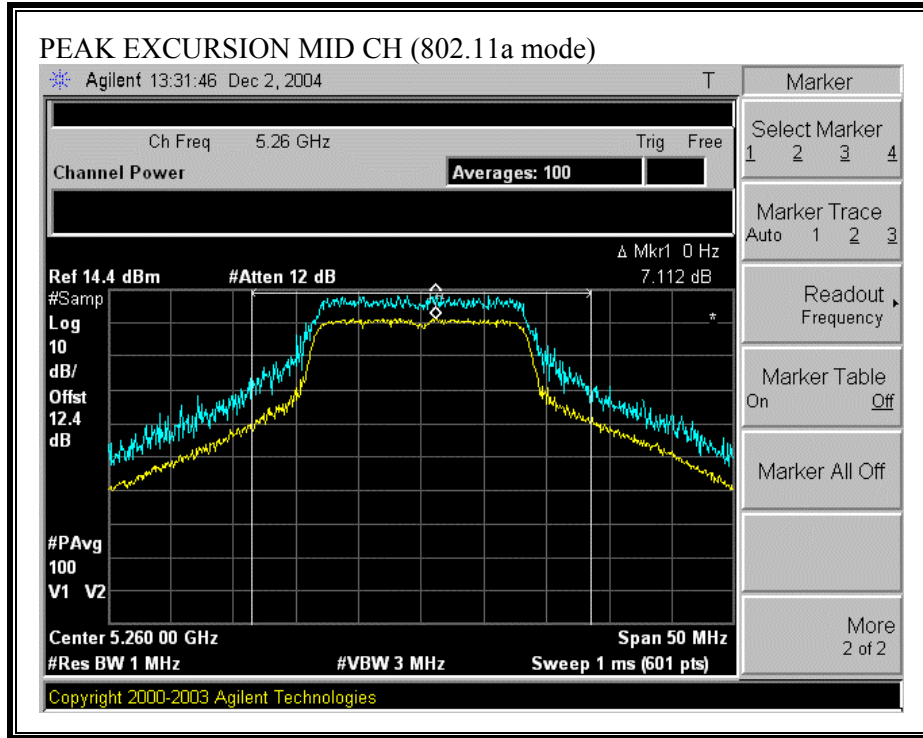


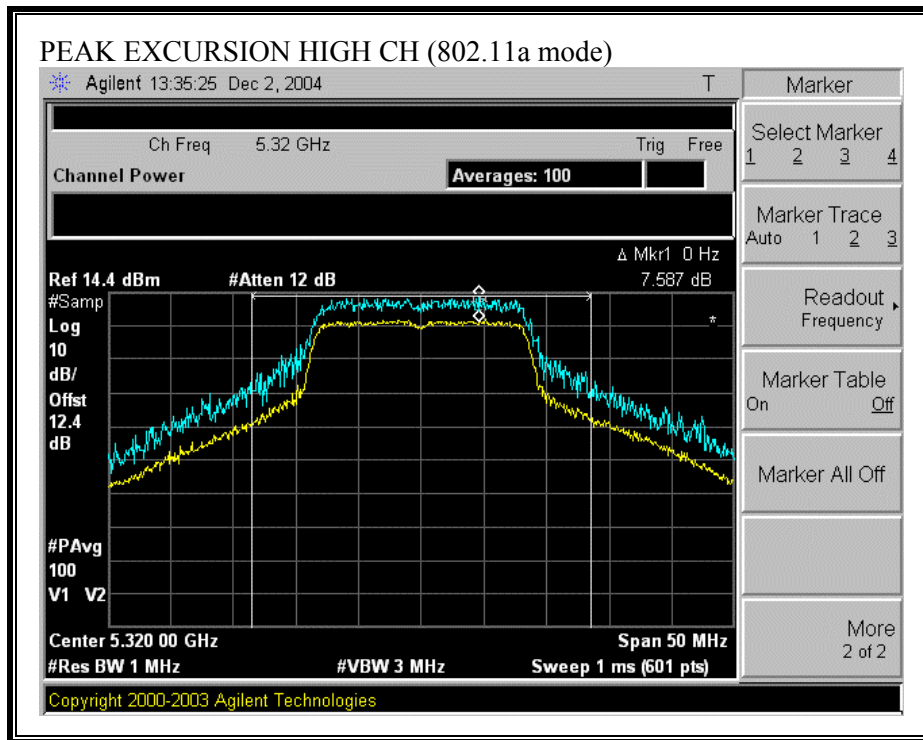

**PEAK EXCURSION (802.11a TURBO MODE)**

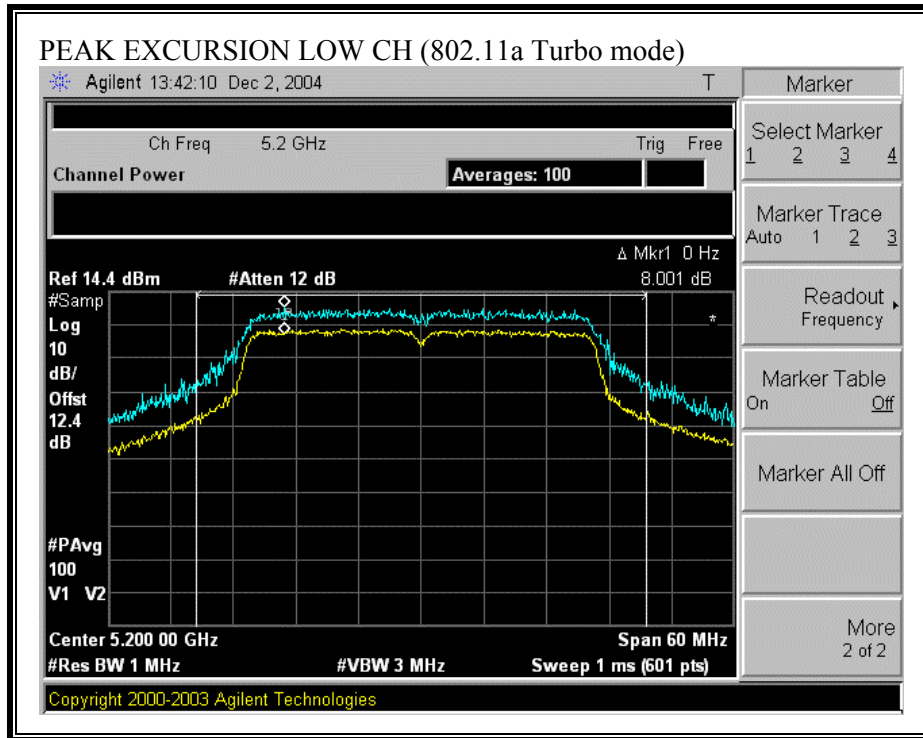

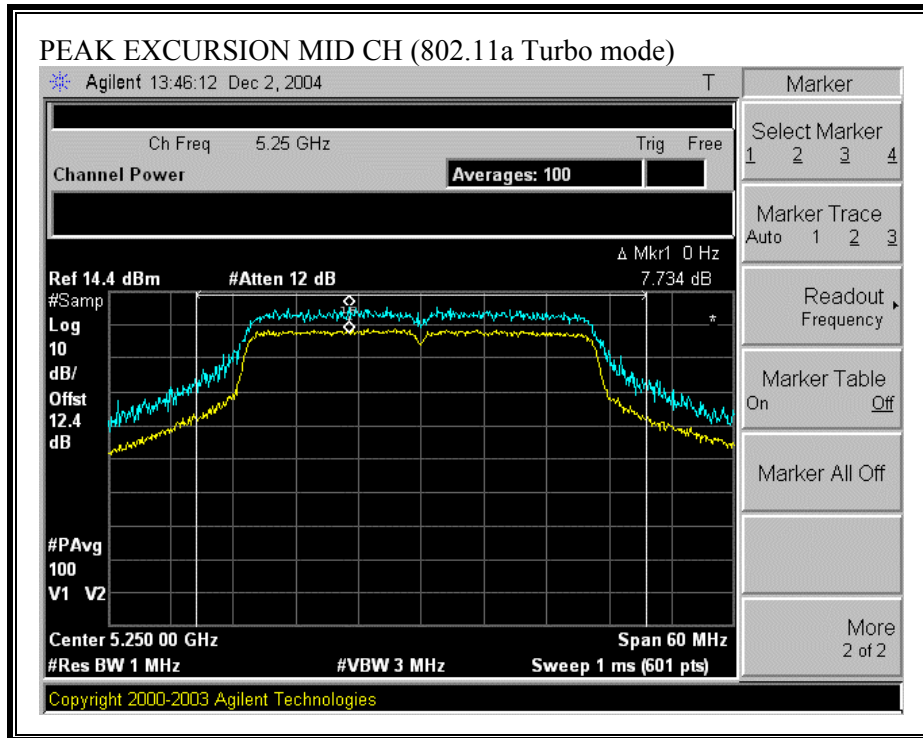

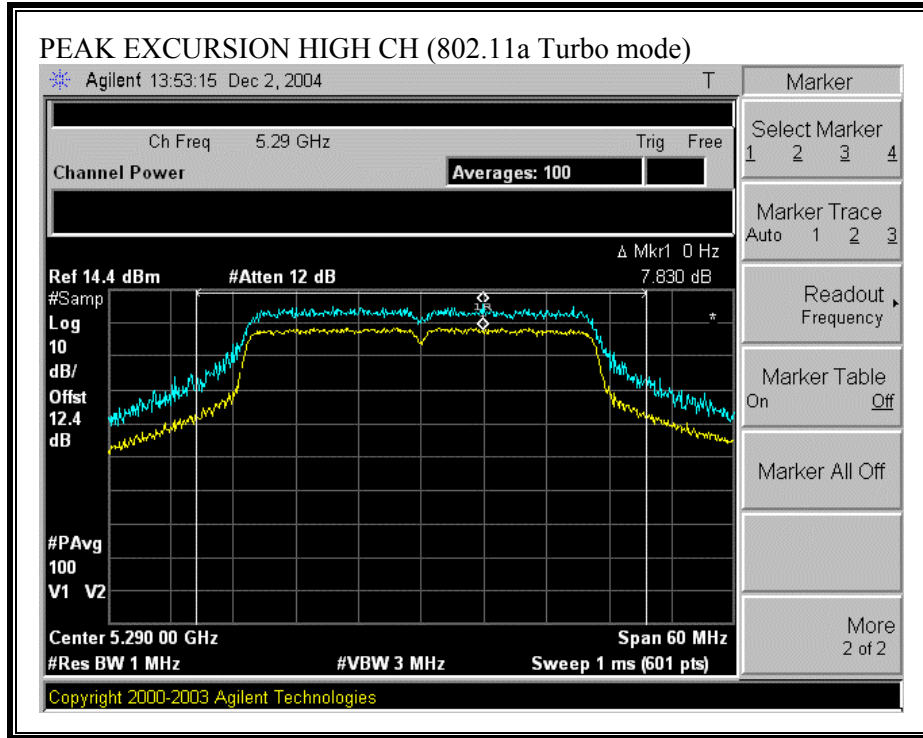

## 7.1.6. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

§15.407 (b) (1 & 2) For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm / MHz.

### TEST PROCEDURE

Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.


### RESULTS


No non-compliance noted:


**SPURIOUS EMISSIONS (802.11a MODE)**

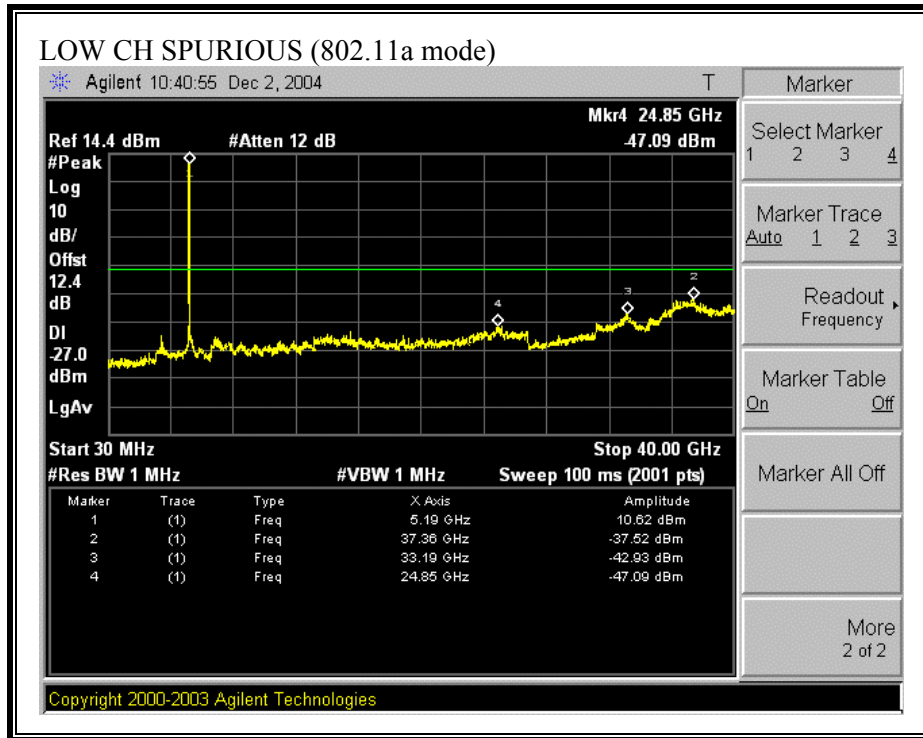




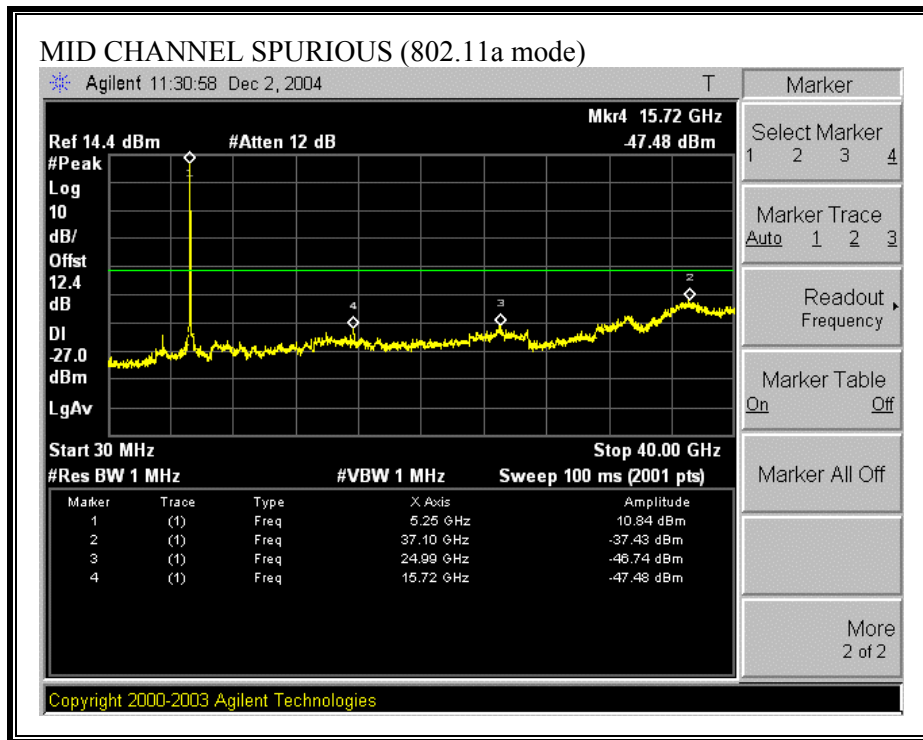


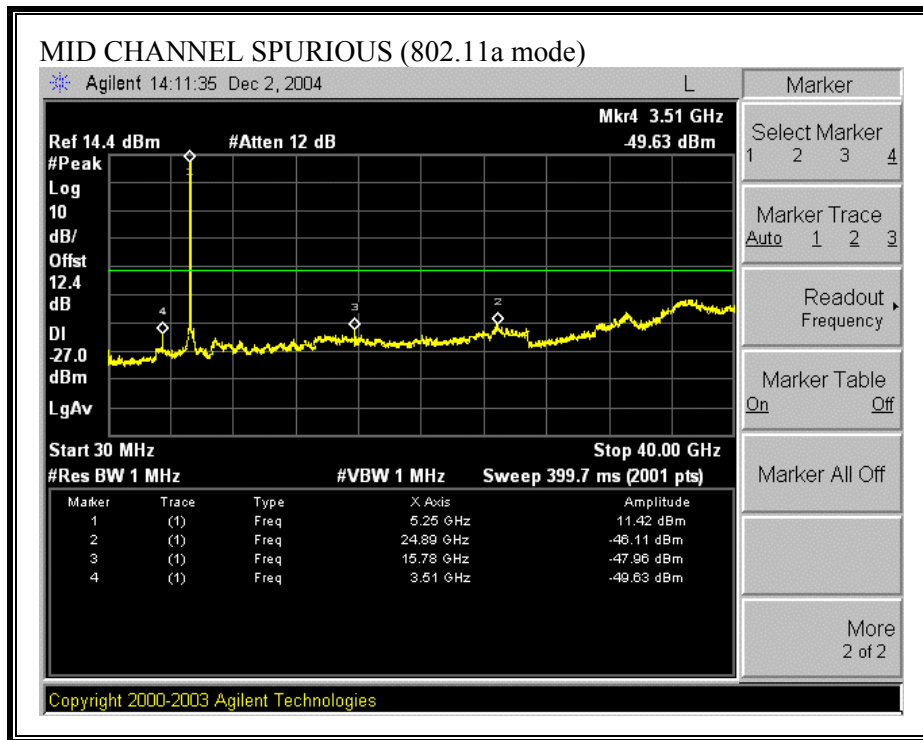


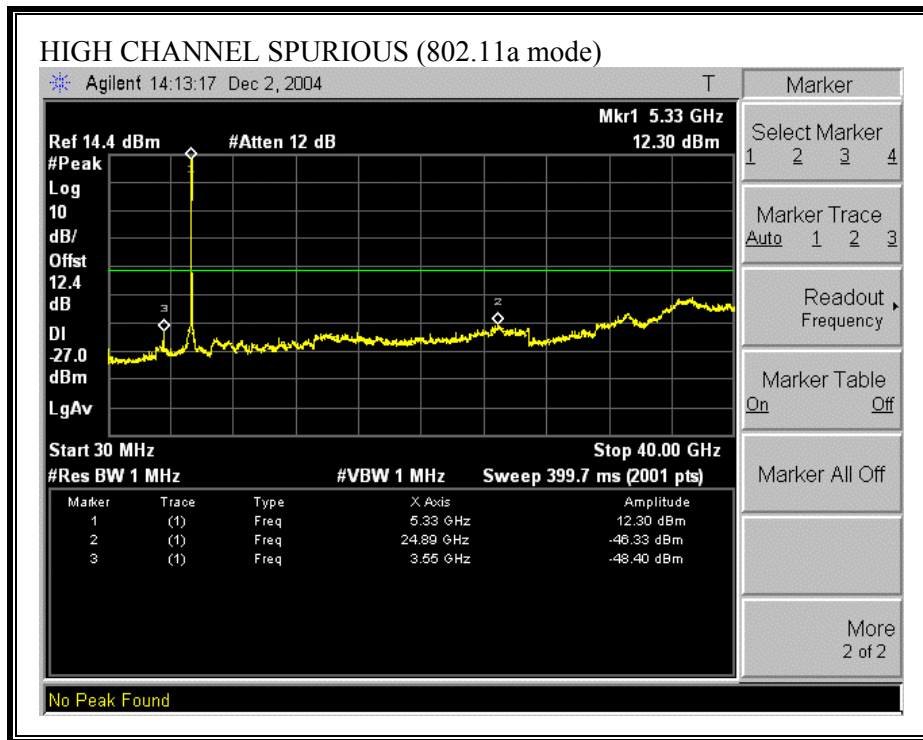

**SPURIOUS EMISSIONS (802.11a TURBO MODE)**

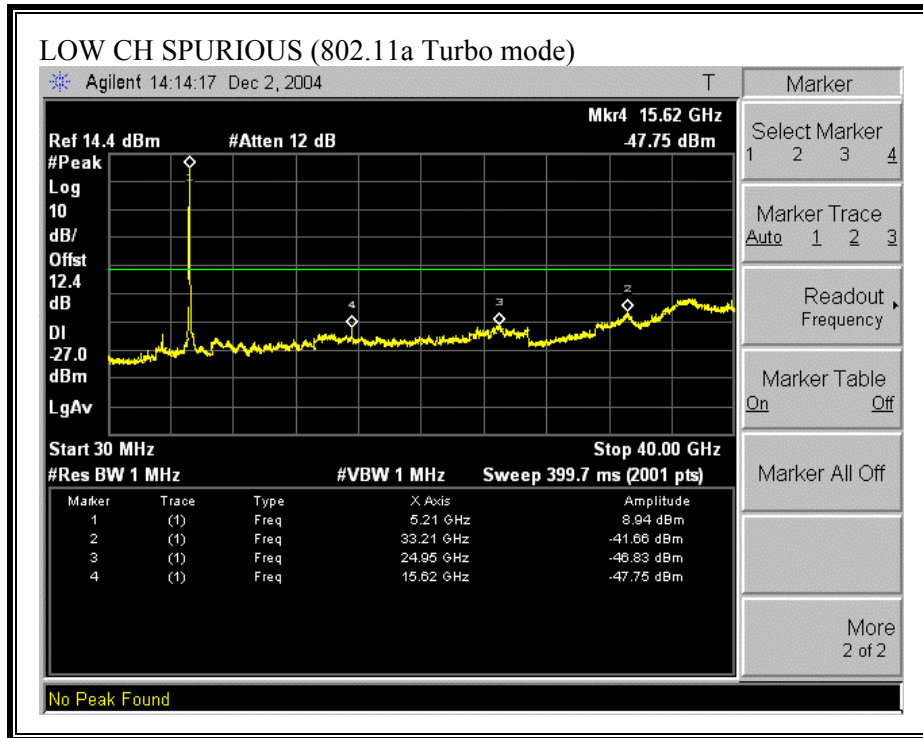

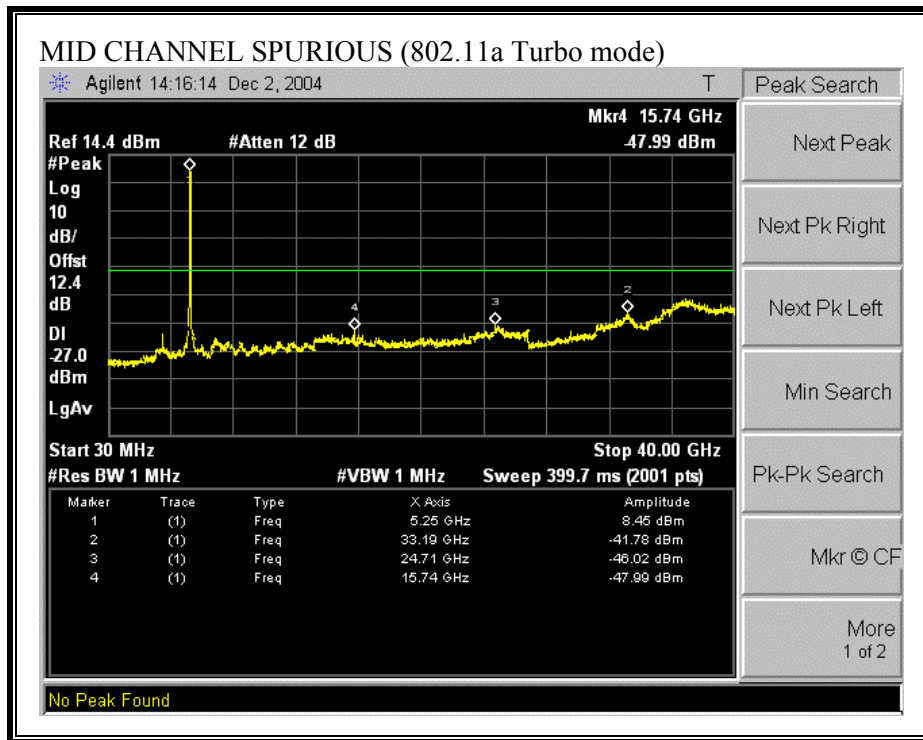

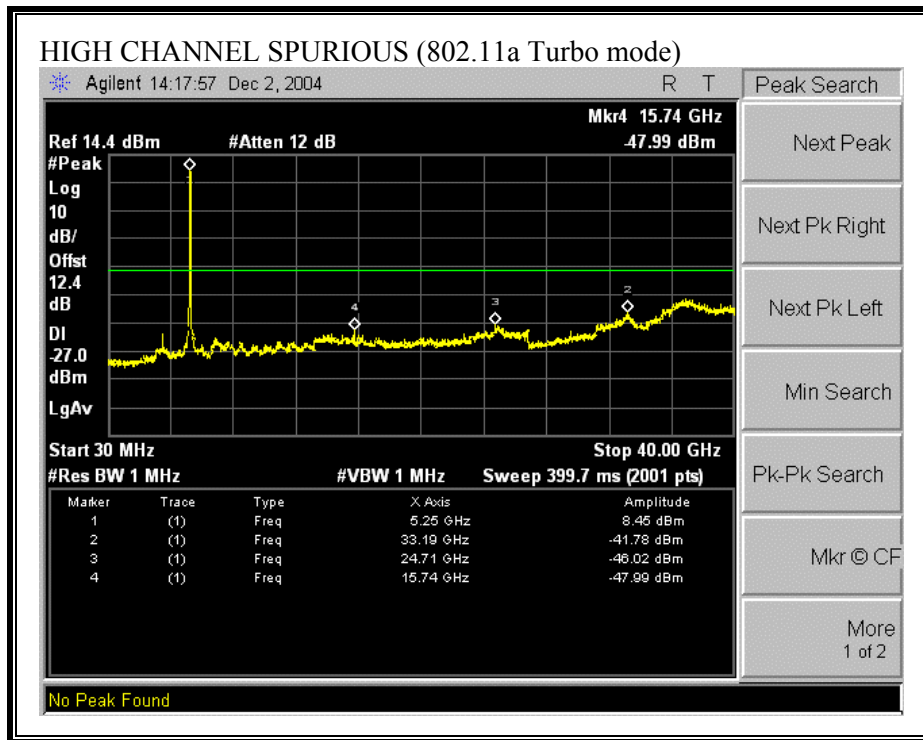

## 7.2. RADIATED EMISSIONS

### 7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.



## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


### 7.2.2. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND


#### RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, HORIZONTAL)

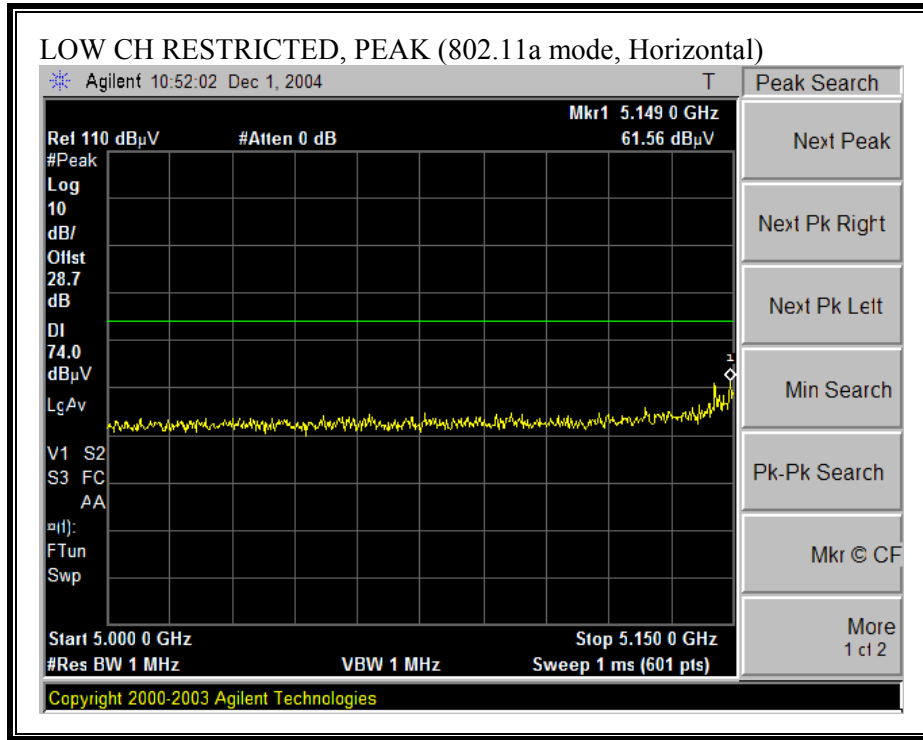

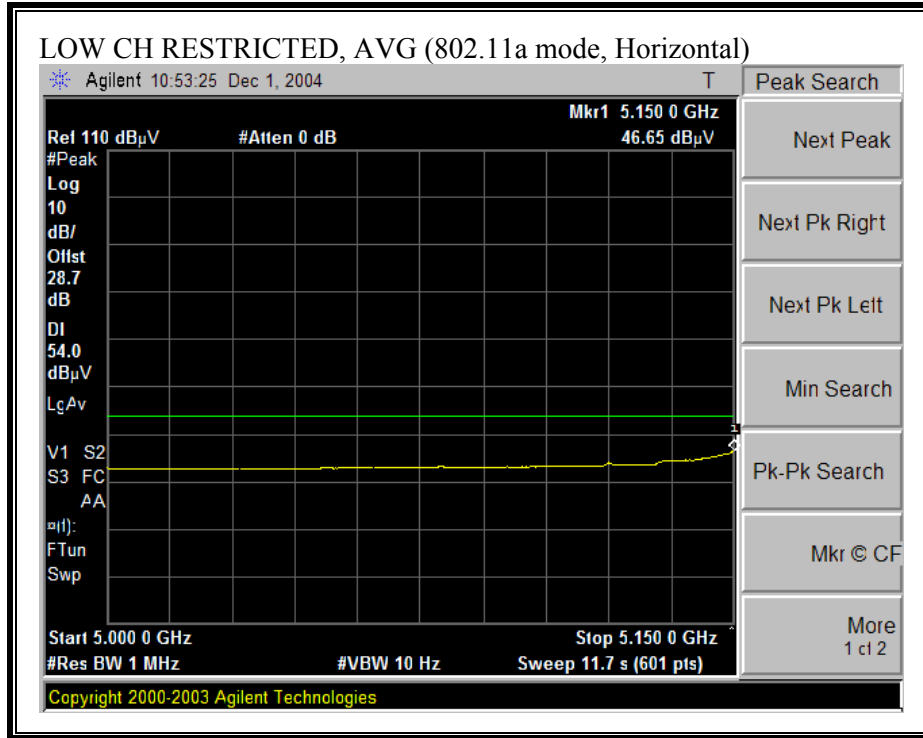



**RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, VERTICAL)**

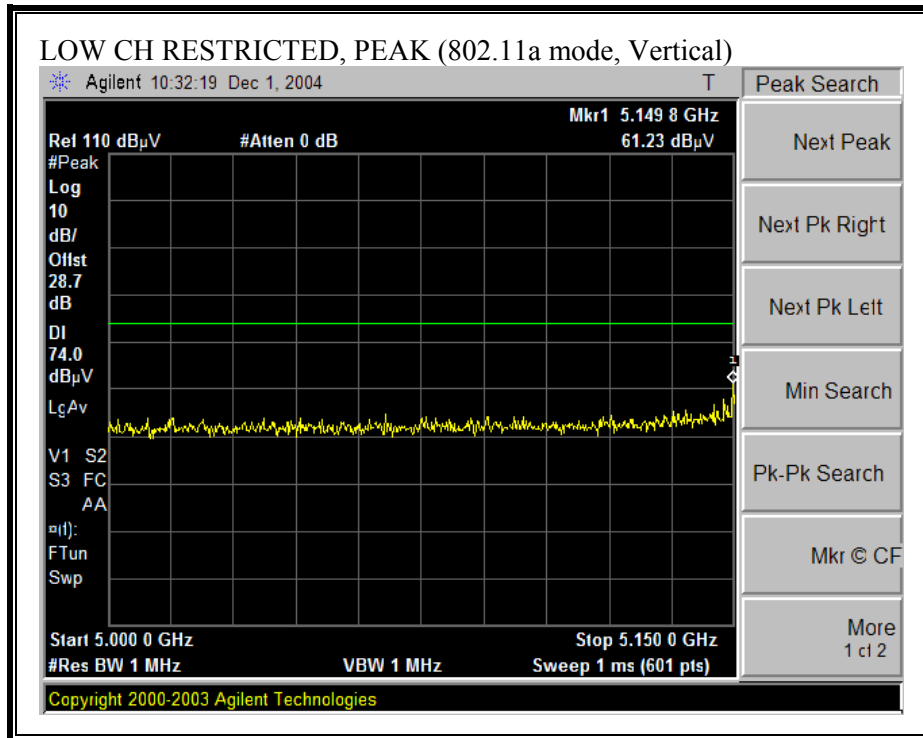

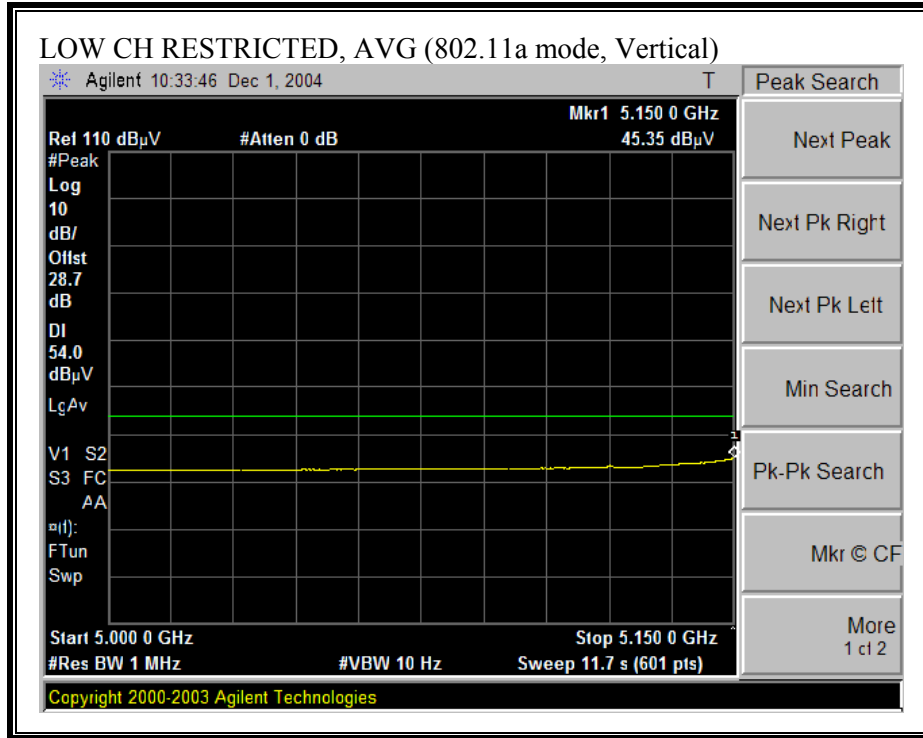


**RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, HORIZONTAL)**

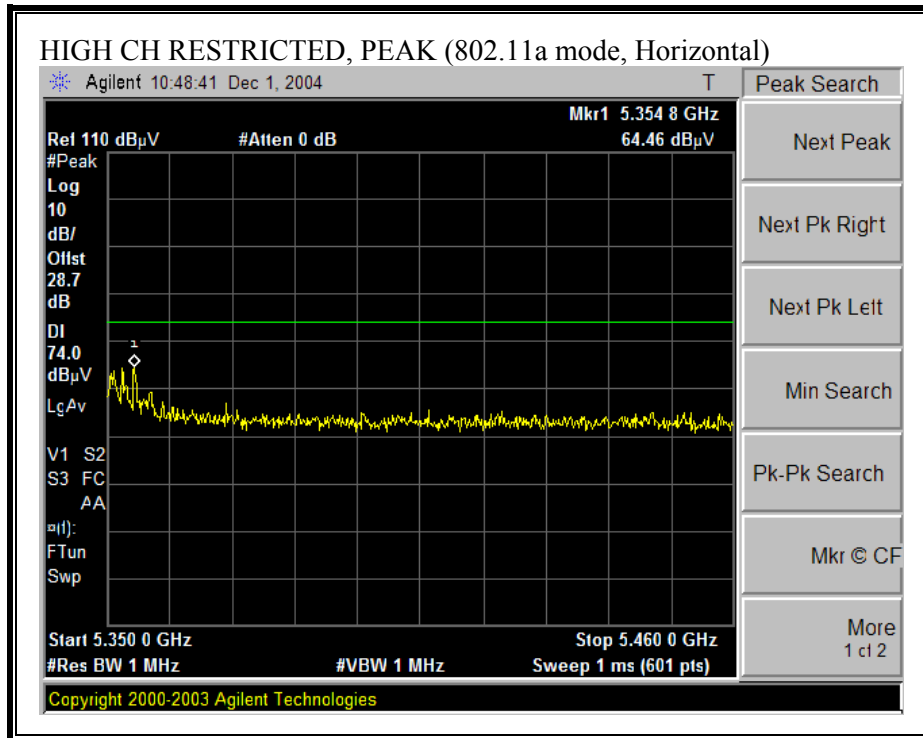


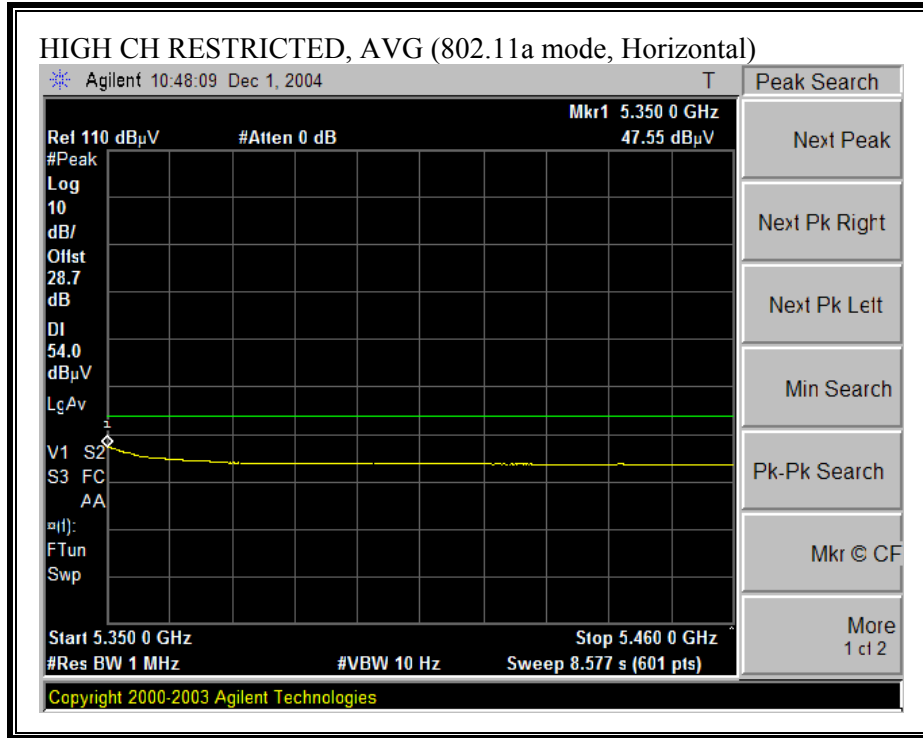

**RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, VERTICAL)**

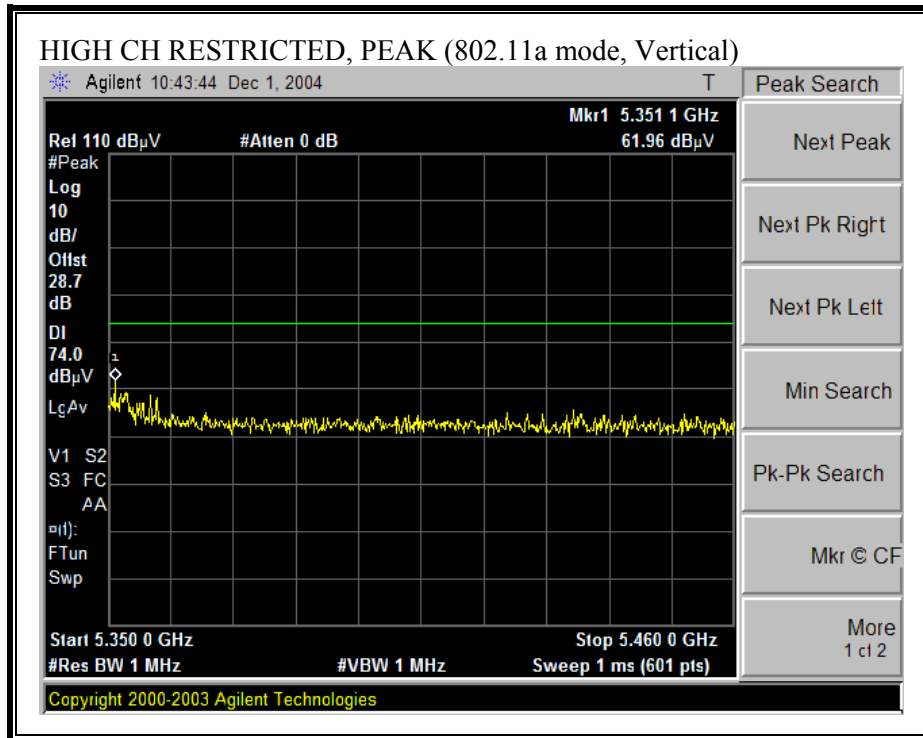



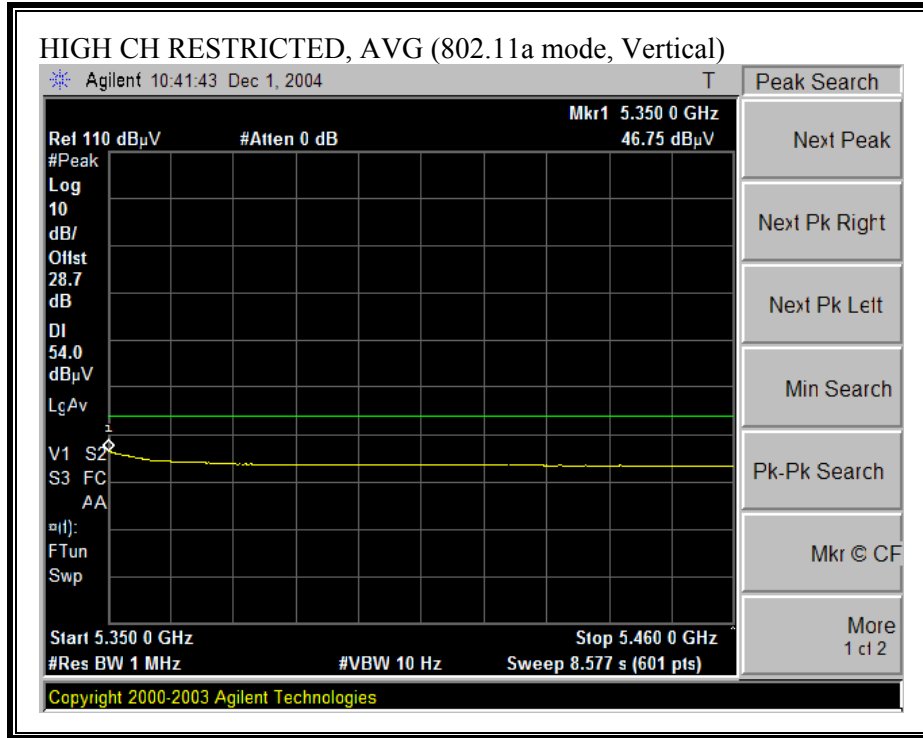

**HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)**

12/01/04 **High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

**Test Engr:** David Garcia  
**Project #:** 04U3043-1  
**Company:** Atheros  
**EUT Descrip.:** 802.11a/b/g cardbus card with turbo mode  
**EUT M/N:** AR5BCB  
**Test Target:** FCC 15.247  
**Mode Oper:** 11a 5.2 GHz band, Transmitting

**Test Equipment:**

EMCO Horn 1-18GHz T120; S/N: 29310 @3m	Pre-amplifer 1-26GHz T63 Miteq 646456	Pre-amplifer 26-40GHz	Horn > 18GHz
---	--	-----------------------	--------------

Hi Frequency Cables


2 foot cable	3 foot cable 3_David	4 foot cable	12 foot cable 12_Yan
--------------	-------------------------	--------------	-------------------------


HPF: HPF\_2.7GHz  
 Reject Filter: R\_001

**Peak Measurements**  
 RBW=VBW=1MHz  
**Average Measurements**  
 RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>5180 Channel</b>															
15.540	3.0	51.3	38.5	40.2	8.6	-37.1	0.0	1.1	64.1	51.3	74	54	-9.9	-2.7	V
15.540	3.0	50.6	35.4	40.2	8.6	-37.1	0.0	1.1	63.4	48.2	74	54	-10.6	-5.8	H
<b>5240 Channel</b>															
15.720	3.0	53.5	40.8	40.3	8.7	-37.2	0.0	1.1	66.4	53.7	74	54	-7.6	-0.3	V
15.720	3.0	49.2	36.3	40.3	8.7	-37.2	0.0	1.1	62.1	49.2	74	54	-11.9	-4.8	H
<b>5260 Channel</b>															
15.780	3.0	50.9	40.2	40.3	8.7	-37.2	0.0	1.1	63.8	53.1	74	54	-10.2	-0.9	V
15.780	3.0	47.1	36.8	40.3	8.7	-37.2	0.0	1.1	60.0	49.7	74	54	-14.0	-4.3	H
<b>5320 Channel</b>															
15.960	3.0	51.1	39.7	40.4	8.7	-37.3	0.0	1.2	64.1	52.7	74	54	-9.9	-1.3	V
15.960	3.0	47.0	36.0	40.4	8.7	-37.3	0.0	1.2	60.0	49.0	74	54	-14.0	-5.0	H
No further emissions were detected.															


**RESTRICTED BANDEDGE (802.11a TURBO MODE, LOW CHANNEL, HORIZONTAL)**

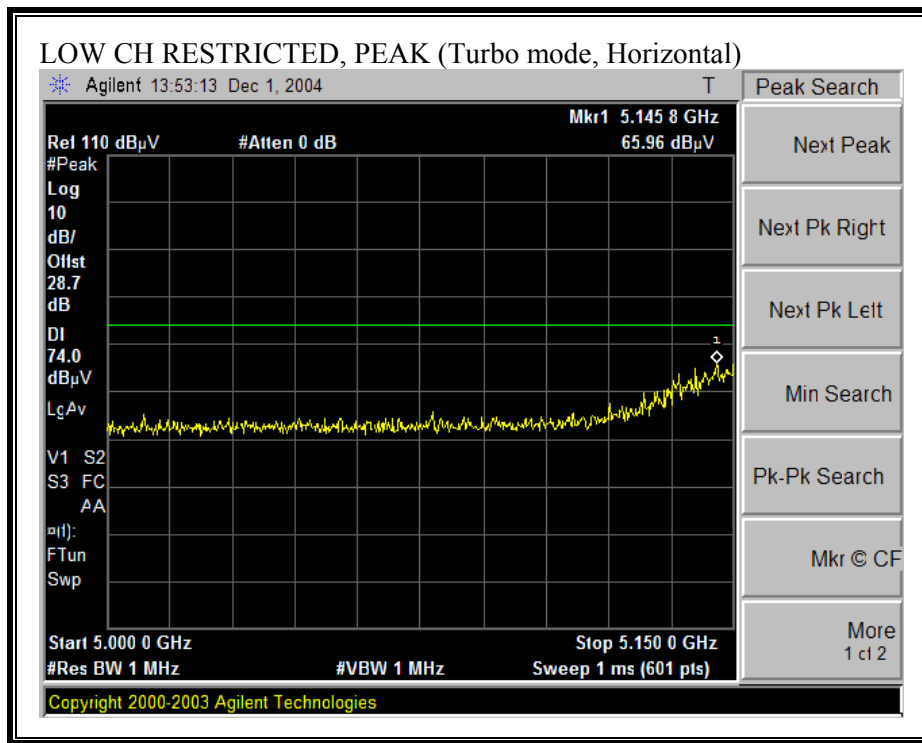

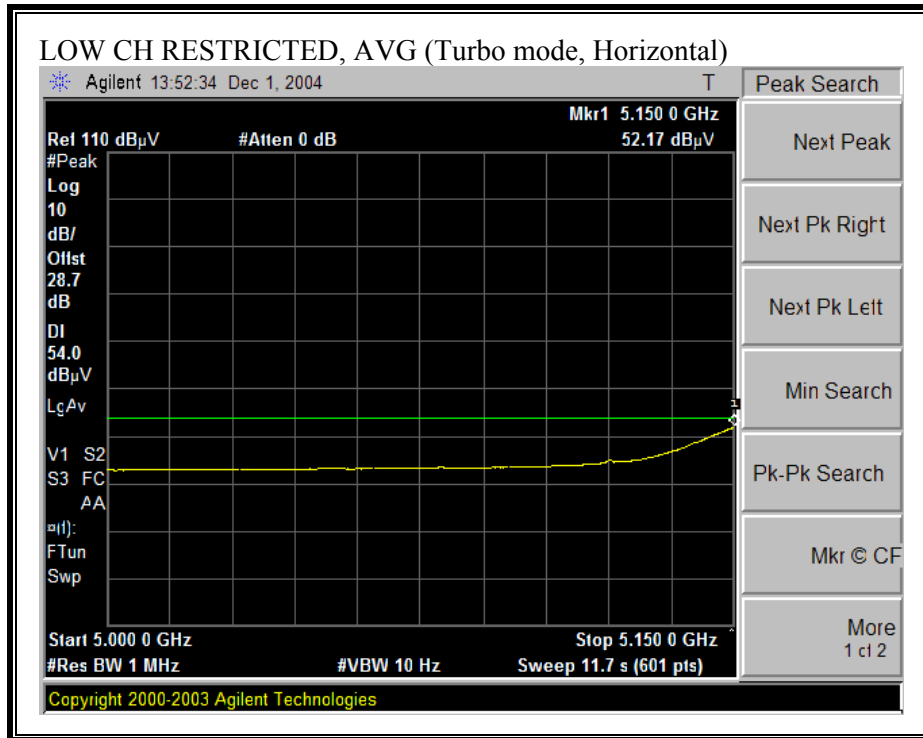



**RESTRICTED BANDEDGE (802.11a TURBO MODE, LOW CHANNEL, VERTICAL)**

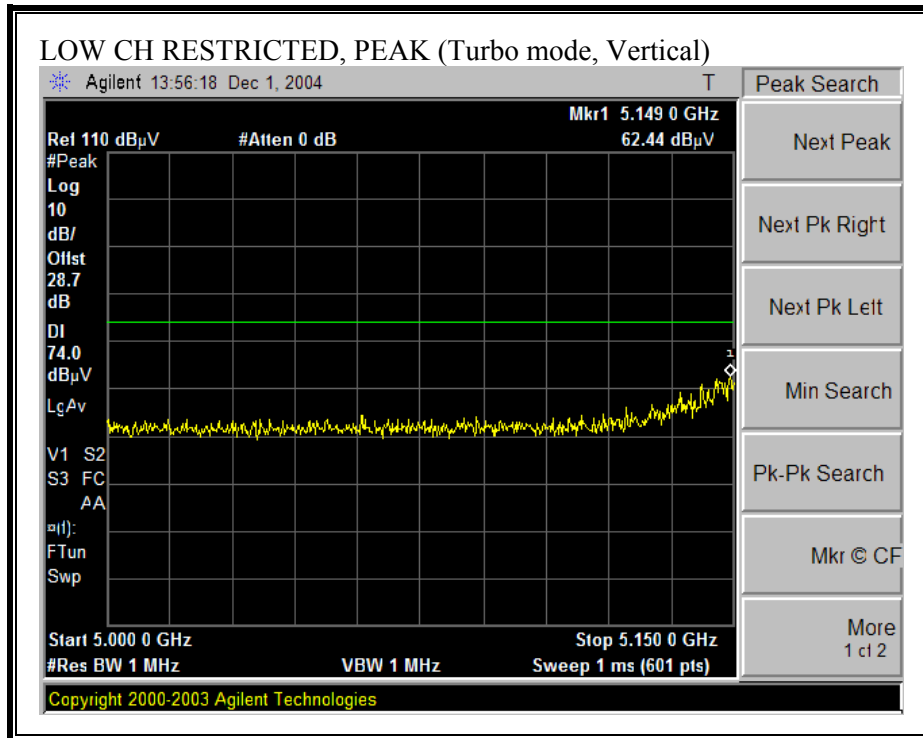

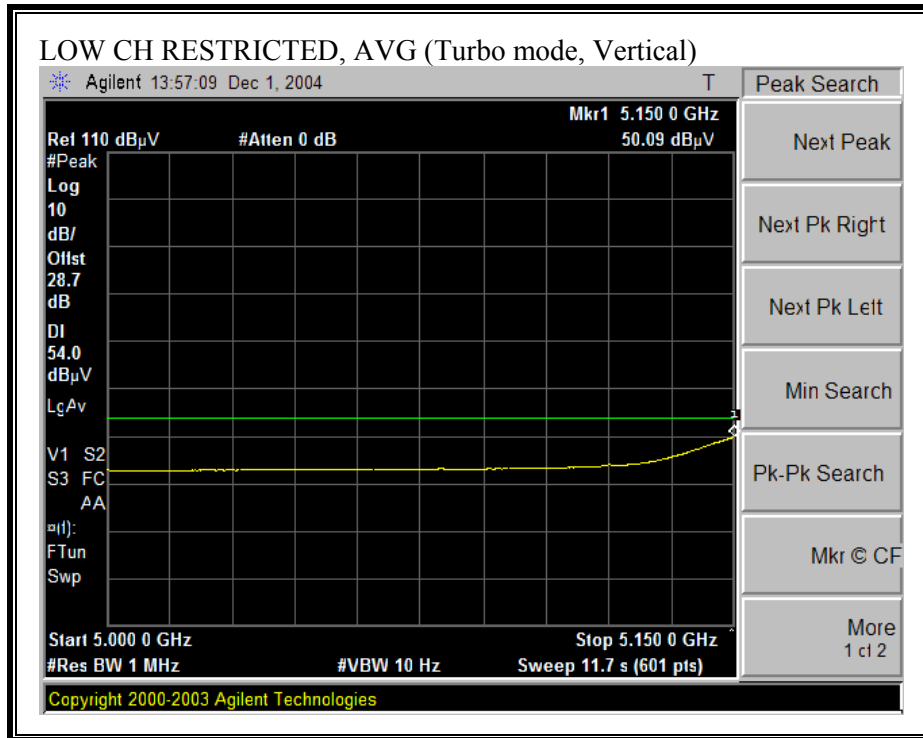


**RESTRICTED BANDEDGE (802.11a TURBO MODE, HIGH CHANNEL, HORIZONTAL)**

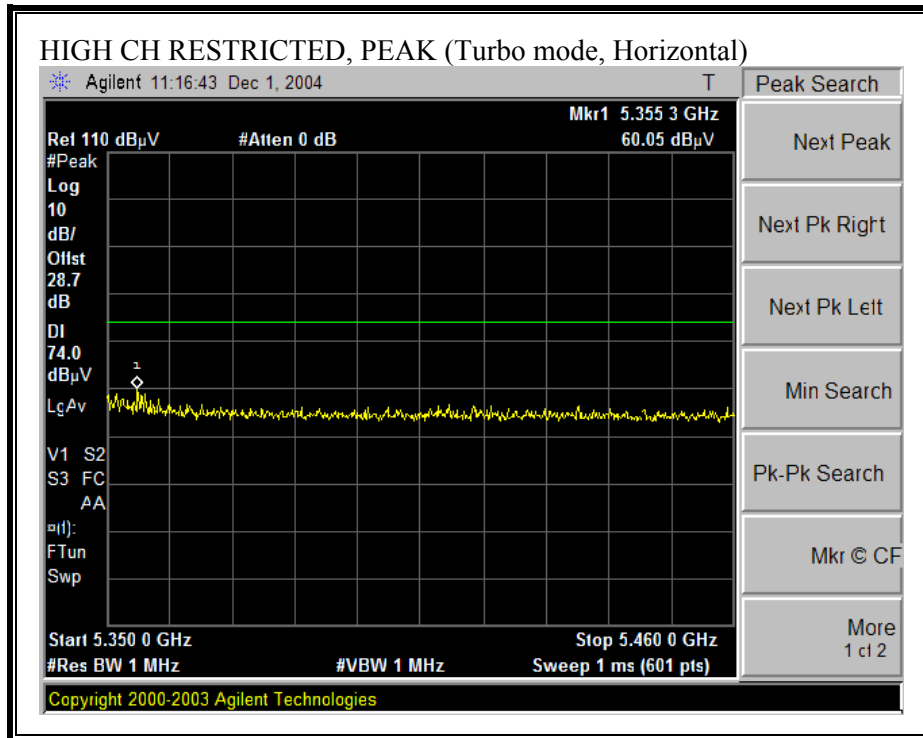


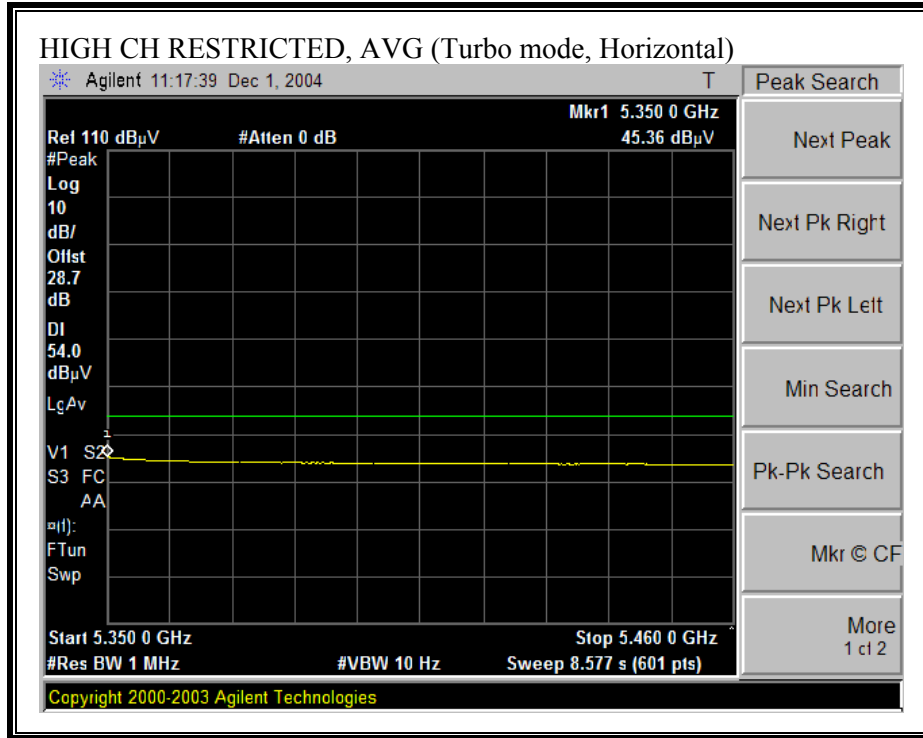



**RESTRICTED BANDEDGE (802.11a TURBO MODE, HIGH CHANNEL, VERTICAL)**

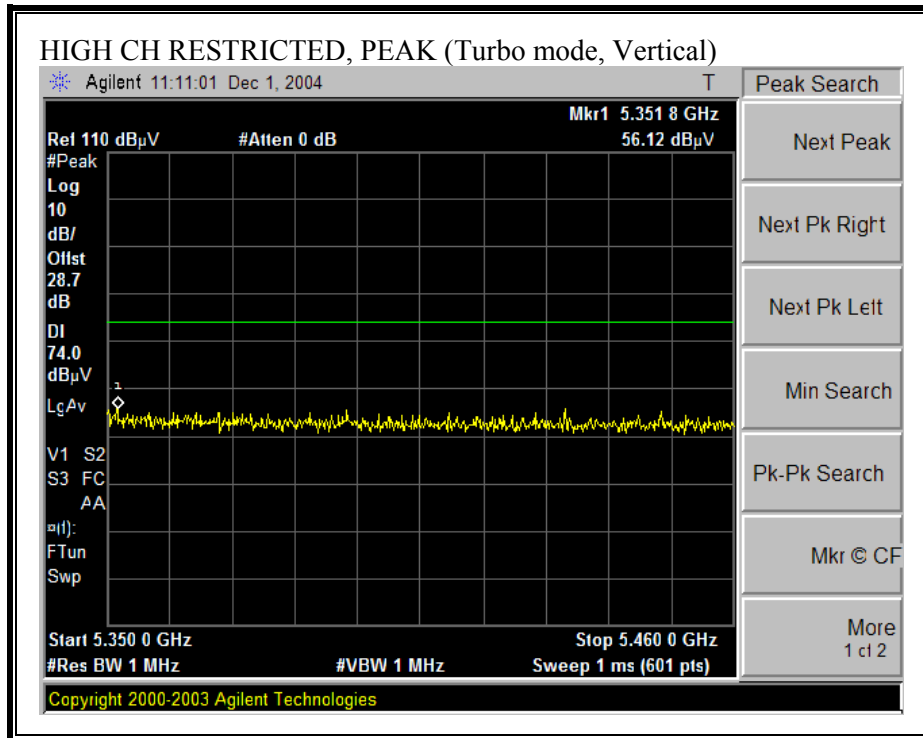

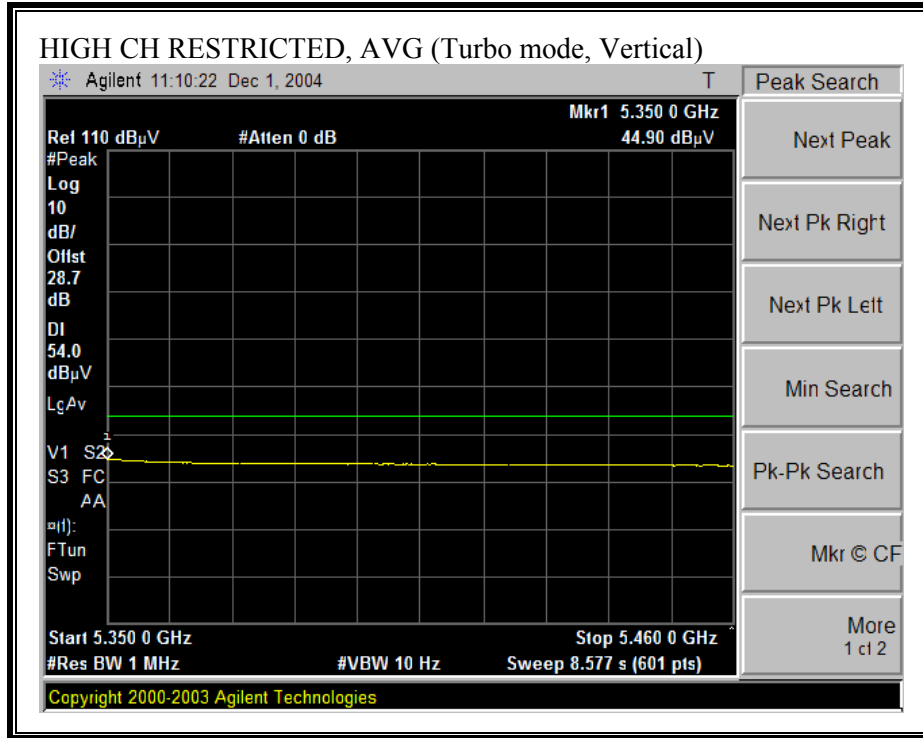

**HARMONICS AND SPURIOUS EMISSIONS (802.11a TURBO MODE)**

12/01/04 **High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

**Test Engr:** David Garcia  
**Project #:** 04U3043-1  
**Company:** Atheros  
**EUT Descrip.:** 802.11a/b/g cardbus card with turbo mode  
**EUT M/N:** AR5BCB  
**Test Target:** FCC 15.247  
**Mode Oper:** 11a 5.2 GHz band, Turbo Mode, Transmitting

**Test Equipment:**

EMCO Horn 1-18GHz T120; S/N: 29310 @3m	Pre-amplifier 1-26GHz T63 Miteq 646456	Pre-amplifier 26-40GHz	Horn > 18GHz
Hi Frequency Cables			
2 foot cable	3 foot cable 3_David	4 foot cable	12 foot cable 12_Yan
HPF HPF_2.7GHz		Reject Filter R_001	

**Peak Measurements**  
RBW=VBW=1MHz


**Average Measurements**  
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>5200 Channel</b>															
15.600	3.0	51.9	40.3	40.2	8.6	-37.2	0.0	1.1	64.7	53.1	74	54	-9.3	-0.9	V
15.600	3.0	47.4	37.1	40.2	8.6	-37.2	0.0	1.1	60.2	49.9	74	54	-13.8	-4.1	H
<b>5250 Channel</b>															
15.750	3.0	50.8	38.9	40.3	8.7	-37.2	0.0	1.1	63.7	51.8	74	54	-10.3	-2.2	V
15.750	3.0	48.8	36.5	40.3	8.7	-37.2	0.0	1.1	61.7	49.4	74	54	-12.3	-4.6	H
<b>5290 Channel</b>															
15.870	3.0	48.6	37.6	40.4	8.7	-37.3	0.0	1.1	61.5	50.5	74	54	-12.5	-3.5	V
15.870	3.0	47.5	35.6	40.4	8.7	-37.3	0.0	1.1	60.4	48.5	74	54	-13.6	-5.5	H
No further emissions were detected.															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

### 7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

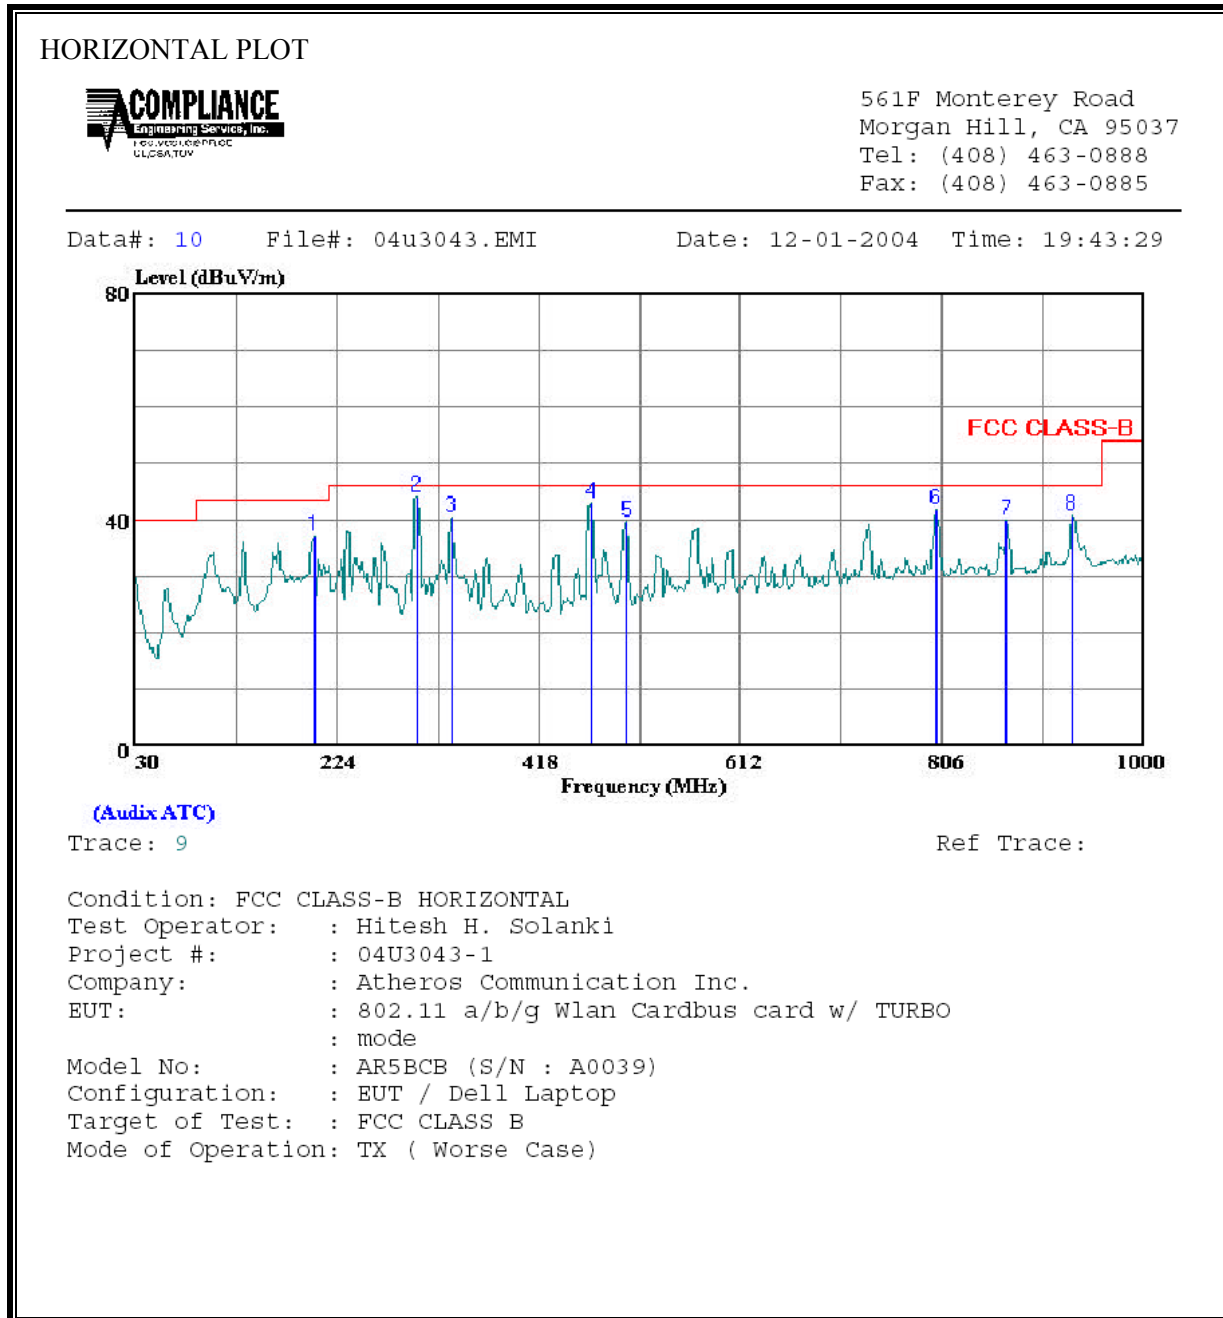

HORIZONTAL DATA

	Freq	Remark	Read Level	Level	Factor	Limit Line	Over Limit
	MHz		dBuV	dBuV/m	dB	dBuV/m	dB
1	201.690	Peak	49.89	37.17	-12.73	43.50	-6.33
2	300.630	Peak	54.32	44.02	-10.30	46.00	-1.98
3	334.580	Peak	50.30	40.52	-9.78	46.00	-5.48
4	468.440	Peak	50.26	42.84	-7.42	46.00	-3.16
5	502.390	Peak	46.54	39.69	-6.85	46.00	-6.31
6	800.180	Peak	44.06	41.71	-2.35	46.00	-4.29
7	868.080	Peak	41.19	39.75	-1.44	46.00	-6.25
8	931.130	Peak	40.99	40.80	-0.19	46.00	-5.20


**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

VERTICAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 12 File#: 04u3043.EMI Date: 12-01-2004 Time: 19:48:30

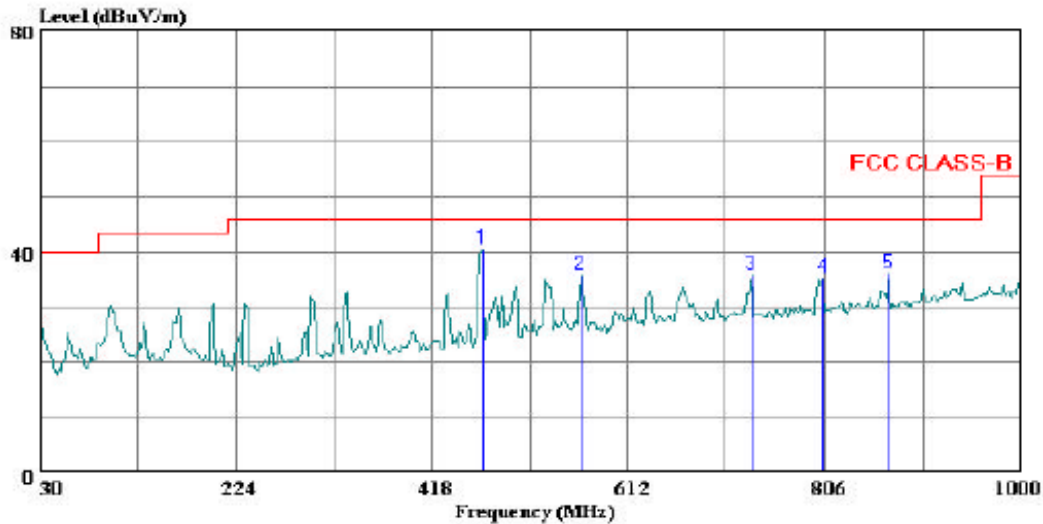

(Auxiliary ATC)

Trace: 11

Ref Trace:

Condition: FCC CLASS-B VERTICAL  
Test Operator: : Hitesh H. Solanki  
Project #: : 04U3043-1  
Company: : Atheros Communication Inc.  
EUT: : 802.11 a/b/g Wlan Cardbus card w/ TURBO  
: mode  
Model No: : AR5BCB (S/N : A0039)  
Configuration: : EUT / Dell Laptop  
Target of Test: : FCC CLASS B  
Mode of Operation: TX (Worse Case)

VERTICAL DATA

	Freq	Remark	Read Level	Level	Factor	Limit Line	Over Limit
	MHz		dBuV	dBuV/m	dB	dBuV/m	dB
1	468.440	Peak	47.94	40.52	-7.42	46.00	-5.48
2	565.440	Peak	41.85	35.80	-6.05	46.00	-10.20
3	735.190	Peak	38.84	35.67	-3.17	46.00	-10.33
4	803.090	Peak	37.36	35.07	-2.29	46.00	-10.93
5	868.080	Peak	37.56	36.12	-1.44	46.00	-9.88

### 7.3. POWERLINE CONDUCTED EMISSIONS

#### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

#### RESULTS


No non-compliance noted:



**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	IC B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	61.40	--	38.50	0.00	66.00	56.00	-4.60	-17.50	L1
0.68	37.22	--	30.53	0.00	56.00	46.00	-18.78	-15.47	L1
8.24	36.76	--	26.84	0.00	60.00	50.00	-23.24	-23.16	L1
0.15	57.38	--	39.81	0.00	66.00	56.00	-8.62	-16.19	L2
0.68	35.04	--	26.48	0.00	56.00	46.00	-20.96	-19.52	L2
7.25	21.18	--	10.02	0.00	60.00	50.00	-38.82	-39.98	L2
6 Worst Data									

**LINE 1 AND LINE 2 RESULTS**

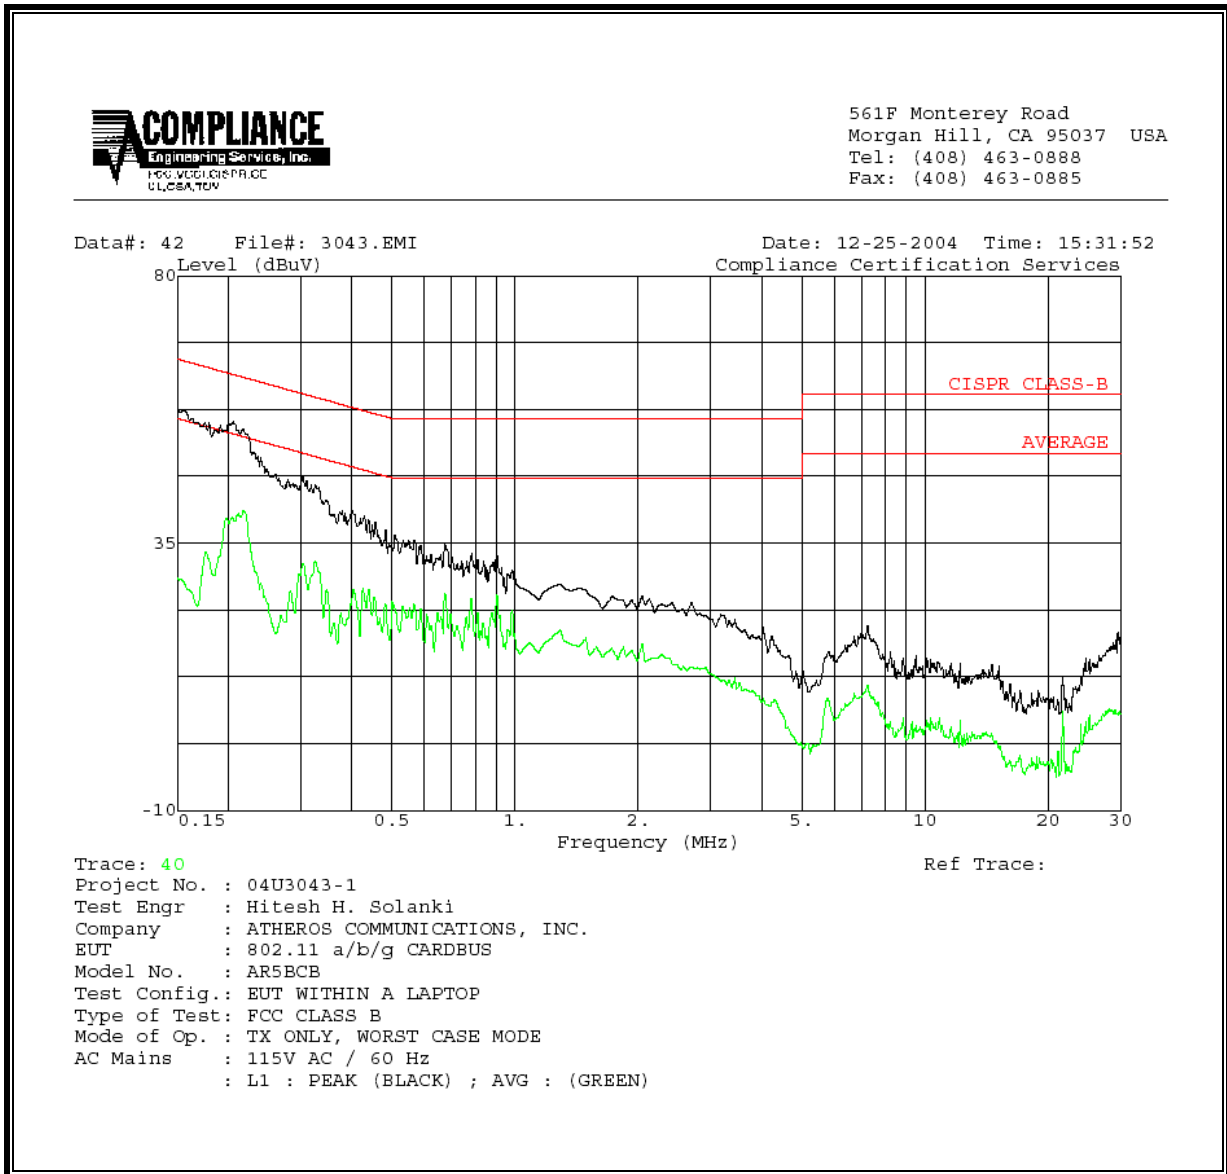

**LINE 2 RESULTS**

