



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 7
CERTIFICATION TEST REPORT**

FOR
802.11n 2X2 PCIE MINICARD TRANSCEIVER
MODEL NUMBER: AR5BHB92
FCC ID: PPD-AR5BHB92
IC: 4104A-AR5BHB92
REPORT NUMBER: 08U11571-1
ISSUE DATE: MARCH 13, 2008

Prepared for
ATHEROS COMMUNICATIONS, INC.
5480 GREAT AMERICA PARKWAY
SANTA CLARA, CA 95054, U.S.A

Prepared by
COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	03/13/08	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. SOFTWARE AND FIRMWARE	8
5.5. WORST-CASE CONFIGURATION AND MODE	9
5.6. DESCRIPTION OF TEST SETUP	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. ANTENNA PORT TEST RESULTS	13
7.1. 802.11b DUAL CHAIN LEGACY MODE IN THE 2.4 GHz BAND	13
7.1.1. 6 dB BANDWIDTH	13
7.1.2. 99% BANDWIDTH	15
7.1.3. OUTPUT POWER	16
7.1.4. AVERAGE POWER	23
7.1.5. POWER SPECTRAL DENSITY	24
7.1.6. CONDUCTED SPURIOUS EMISSIONS	28
7.2. 802.11g DUAL CHAIN LEGACY MODE IN THE 2.4 GHz BAND	35
7.2.1. 6 dB BANDWIDTH	35
7.2.2. 99% BANDWIDTH	37
7.2.3. OUTPUT POWER	38
7.2.4. AVERAGE POWER	45
7.2.5. POWER SPECTRAL DENSITY	46
7.2.6. CONDUCTED SPURIOUS EMISSIONS	50
7.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	57
7.3.1. 6 dB BANDWIDTH	57

7.3.2.	99% BANDWIDTH	59
7.3.3.	OUTPUT POWER	60
7.3.4.	AVERAGE POWER	67
7.3.5.	POWER SPECTRAL DENSITY	68
7.3.6.	CONDUCTED SPURIOUS EMISSIONS.....	72
7.4.	<i>802.11n HT40 MODE IN THE 2.4 GHz BAND</i>	79
7.4.1.	6 dB BANDWIDTH	79
7.4.2.	99% BANDWIDTH	81
7.4.3.	OUTPUT POWER	82
7.4.4.	AVERAGE POWER	89
7.4.5.	POWER SPECTRAL DENSITY	90
7.4.6.	CONDUCTED SPURIOUS EMISSIONS.....	94
7.5.	<i>802.11a MODE IN THE 5.8 GHz BAND</i>	101
7.5.1.	6 dB BANDWIDTH	101
7.5.2.	99% BANDWIDTH	103
7.5.3.	OUTPUT POWER	104
7.5.4.	AVERAGE POWER	111
7.5.5.	POWER SPECTRAL DENSITY	112
7.5.6.	CONDUCTED SPURIOUS EMISSIONS.....	116
7.6.	<i>802.11n HT20 MODE IN THE 5.8 GHz BAND</i>	123
7.6.1.	6 dB BANDWIDTH	123
7.6.2.	99% BANDWIDTH	125
7.6.3.	OUTPUT POWER	126
7.6.4.	AVERAGE POWER	133
7.6.5.	POWER SPECTRAL DENSITY	134
7.6.6.	CONDUCTED SPURIOUS EMISSIONS.....	138
7.7.	<i>802.11n HT40 MODE IN THE 5.8 GHz BAND</i>	145
7.7.1.	6 dB BANDWIDTH	145
7.7.2.	99% BANDWIDTH	147
7.7.3.	OUTPUT POWER	148
7.7.4.	AVERAGE POWER	153
7.7.5.	POWER SPECTRAL DENSITY	154
7.7.6.	CONDUCTED SPURIOUS EMISSIONS.....	157
8.	RADIATED TEST RESULTS	162

8.1.	<i>LIMITS AND PROCEDURE</i>	162
8.2.	<i>TRANSMITTER ABOVE 1 GHz</i>	164
8.2.1.	TRANSMITTER ABOVE 1 GHz FOR 802.11b MODE IN THE 2.4 GHz BAND	164
8.2.2.	TRANSMITTER ABOVE 1 GHz FOR 802.11g MODE IN THE 2.4 GHz BAND	173
8.2.3.	TRANSMITTER ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 2.4 GHz BAND	182
8.2.4.	TRANSMITTER ABOVE 1 GHz FOR 802.11n HT40 MODE IN THE 2.4 GHz BAND	191
8.2.5.	TRANSMITTER ABOVE 1 GHz FOR 802.11a MODE IN THE 5.8 GHz BAND	200
8.2.6.	TRANSMITTER ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 5.8 GHz BAND	201
8.2.7.	TRANSMITTER ABOVE 1 GHz FOR 802.11n HT40 MODE IN THE 5.8 GHz BAND	202
8.3.	<i>RECEIVER ABOVE 1 GHz</i>	203
8.4.	<i>WORST-CASE BELOW 1 GHz</i>	204
9.	AC POWER LINE CONDUCTED EMISSIONS	206
10.	MAXIMUM PERMISSIBLE EXPOSURE	210
11.	SETUP PHOTOS	214

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: ATHEROS COMMUNICATION, INC
5480 GREAT AMERICA PARKWAY
SANTA CLARA, CA 95054 USA

EUT DESCRIPTION: 802.11n 2X2 PCIE MINICARD TRANSCEIVER

MODEL: AR5BHB92

SERIAL NUMBER: HB92-031-S0830 AND HB92-031-S805

DATE TESTED: FEBRUARY 25-29, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C and Subpart E	No Non-Compliance Noted
RSS-210 Issue 7 Annex 8 and RSS-GEN Issue 2	No Non-Compliance Noted

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

CHIN PANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11n 2x2 PCIe minicard transceiver, model AR5BHB92. Two front-end module parts were evaluated; vendors are SiGe (FEM1) and Hitachi (FEM2).

The radio module is manufactured by Atheros Communications, Inc.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)	Total Power (mW)
2412 - 2462	802.11b	22.58	22.12	25.37	344.06
2412 - 2462	802.11g	26.44	26.69	29.58	907.21
2412 - 2462	802.11n HT20	26.50	26.55	29.54	898.54
2422 - 2452	802.11n HT40	21.58	22.21	24.92	310.22
5745 - 5825	802.11a	25.82	26.12	28.98	791.20
5745 - 5825	802.11n HT20	26.32	26.07	29.21	833.12
5755 - 5795	802.11n HT40	26.76	26.91	29.85	965.15

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The 2x2 configuration utilizes a set of PIFA antennas with maximum gain of 3.62 dBi from 2400 – 2483.5 MHz, 4.63 dBi from 5150 – 5350 MHz, 5.56 dBi from 5250 – 5350 MHz, 5.34 dBi from 5470 – 5725 MHz, and 4.76 dBi from 5725 - 5850 MHz.

5.4. SOFTWARE AND FIRMWARE

The test utility and driver software used during testing was Art ANWI 1.4 and Devlib Revision 0.6 Build #18 Art_11n.

5.5. WORST-CASE CONFIGURATION AND MODE

The 2x2 configuration was used for all testing in this report.

Both FEM1 and FEM2 boards were evaluated on conducted and radiated emissions tests to find the worst case.

The worst-case data rates are determined to be as follows for each mode, based on the investigations by measuring the average power, peak power and PPSD across all the data rates, bandwidths, modulations and spatial stream modes.

Thus all emissions tests were made with following data rates:

- 802.11b mode, 20 MHz Channel Bandwidth, 1 Mb/s, CCK Modulation, Spatial Stream 1.
- 802.11g mode, 20 MHz Channel Bandwidth, 9 Mb/s, OFDM Modulation, Spatial Stream 1.
- 802.11n HT20 mode, 20 MHz Channel Bandwidth, MCS0, 6.5 Mb/s, OFDM Modulation, Spatial Stream 1.
- 802.11n HT40 mode, 40 MHz Channel Bandwidth, MCS0, 13.5 Mb/s, OFDM Modulation, Spatial Stream 1.

Baseline testing demonstrated that the Power Spectral Density as measured through a combiner with both chains operating simultaneously is worst case.

For RF conducted emissions, all tests were performed on FEM2 board excepted conducted spurious to use FEM1 board.

For RF radiated emissions, all tests were performed on FEM1 boards.

For radiated emissions bandedge, both FEM1 and FEM2 boards were performed at both vertical and horizontal polarizations.

For radiated emissions TX below 1 GHz, RX spurious, and AC line conduction were performed at FEM1 board.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	IBM	ThinkPad T43	I3-BR298	DoC
AC Adapter	IBM	08k8202	11S08k8202Z1Z6LR36000	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	No
2	DC	1	DC	Un-shielded	2m	No

TEST SETUP

The EUT is installed in a host laptop computer via an extended card during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

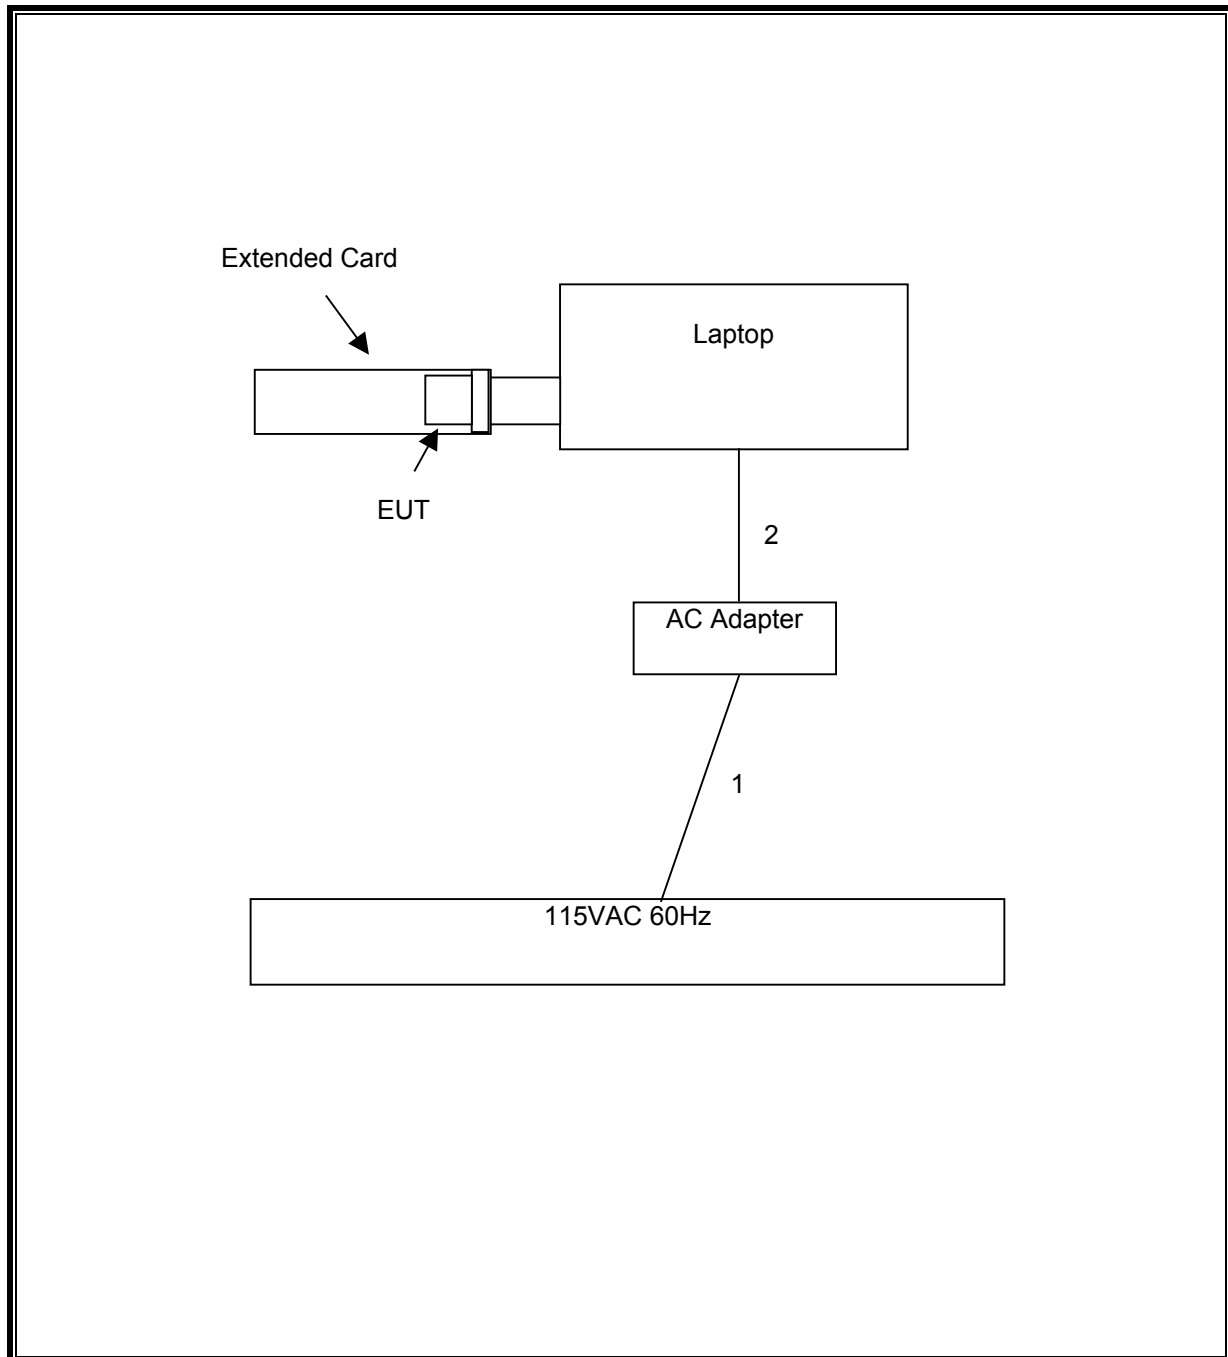

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	12/3/2007	3/3/2009
Peak Power Meter	Agilent / HP	E4416A	C00963	12/4/2007	12/4/2009
Peak / Average Power Sensor	Agilent	E9327A	C00964	12/7/2007	12/7/2009
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	9/28/2007	9/28/2008
Antenna, Horn, 18 GHz	EMCO	3115	C00945	4/15/2007	4/15/2008
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	9/27/2007	9/27/2008
Antenna, Horn, 26.5 GHz	ARA	MMH-1826/B	C00589	9/29/2007	9/29/2008
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	10/11/2007	10/11/2008
EMI Receiver, 2.9 GHz	Agilent / HP	8542E	C00957	2/6/2007	6/12/2008
RF Filter Section, 2.9 GHz	Agilent / HP	85420E	C00958	2/6/2007	6/12/2008
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	2/6/2008	8/6/2009
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	10/25/2007	10/25/2008
2.4-2.5GHz Reject Filter	Micro Tronics	BRM50702	N02685	CNR	CNR
High Pass Filter 7.6GHz	Micro Tronics	HPM13195	N02681	CNR	CNR
Reject Filter, 5.15-5.35 GHz	Micro-Tronics	BRC13190	N02679	CNR	CNR
Reject Filter, 5.47-5.725 GHz	Micro-Tronics	BRC13191	N02678	CNR	CNR
Reject Filter, 5.725-5.85 GHz	Micro-Tronics	BRC13192	N02676	CNR	CNR

7. ANTENNA PORT TEST RESULTS

7.1. 802.11b DUAL CHAIN LEGACY MODE IN THE 2.4 GHz BAND

7.1.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)	Minimum Limit (MHz)
Middle	2437	11.269	0.5

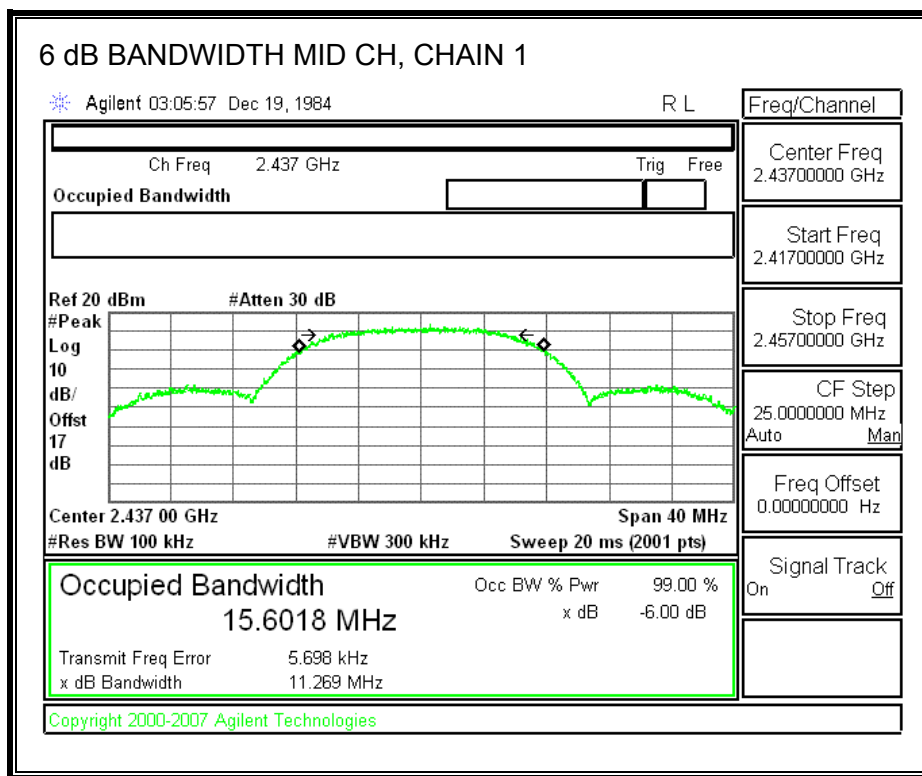

7.1.2. 99% BANDWIDTH

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)
Middle	2437	15.6778

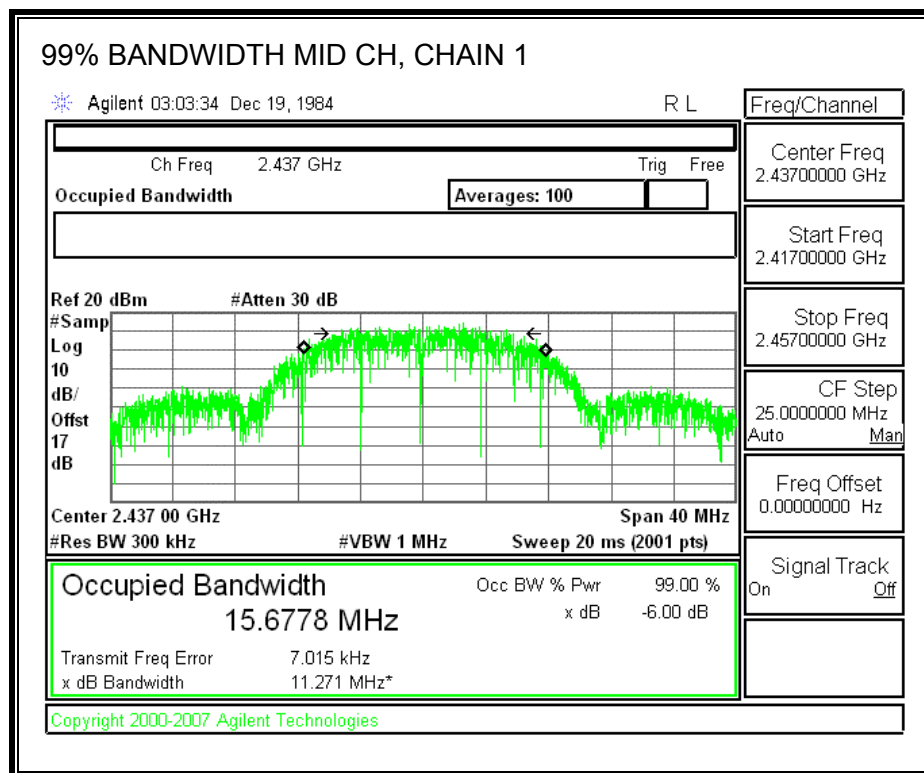

7.1.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi)
6.33

The maximum antenna gain is 6.33 dBi for P-To-M; therefore the limit is 29.67 dBm.


TEST PROCEDURE


Peak power is measured using the spectrum analyzer's internal channel power integration function. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.


RESULTS

Channel	Frequency (MHz)	Limit (dBm)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)	Margin (dB)
Low	2412	29.67	22.58	22.12	25.37	-4.30
Mid	2437	29.67	21.68	21.98	24.84	-4.83
High	2462	29.67	22.23	21.98	25.12	-4.55


CHAIN 0 OUTPUT POWER

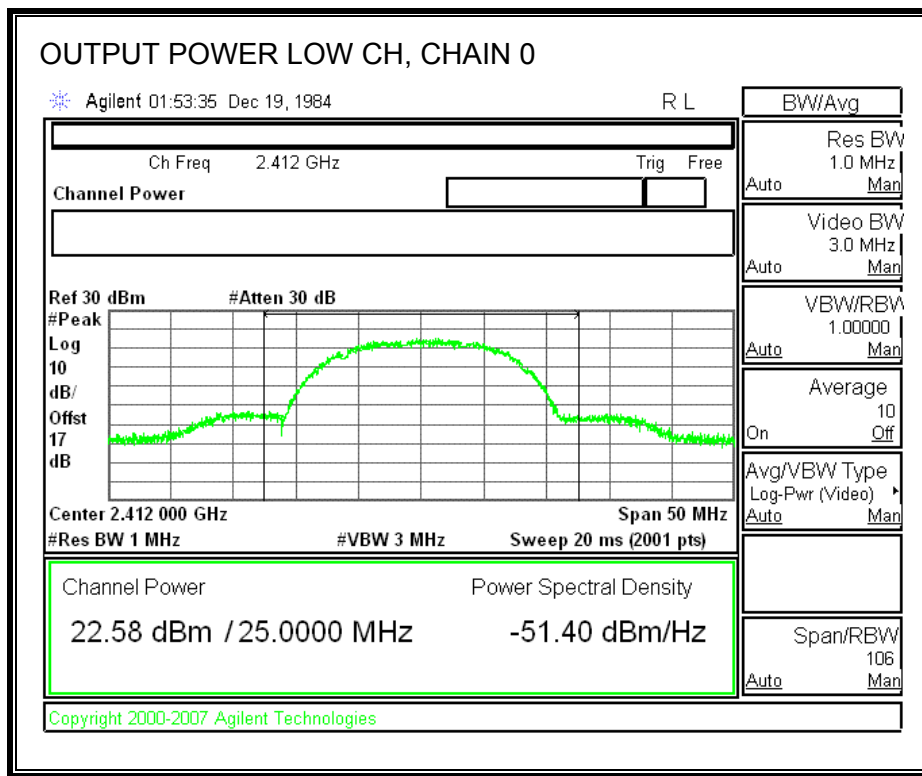


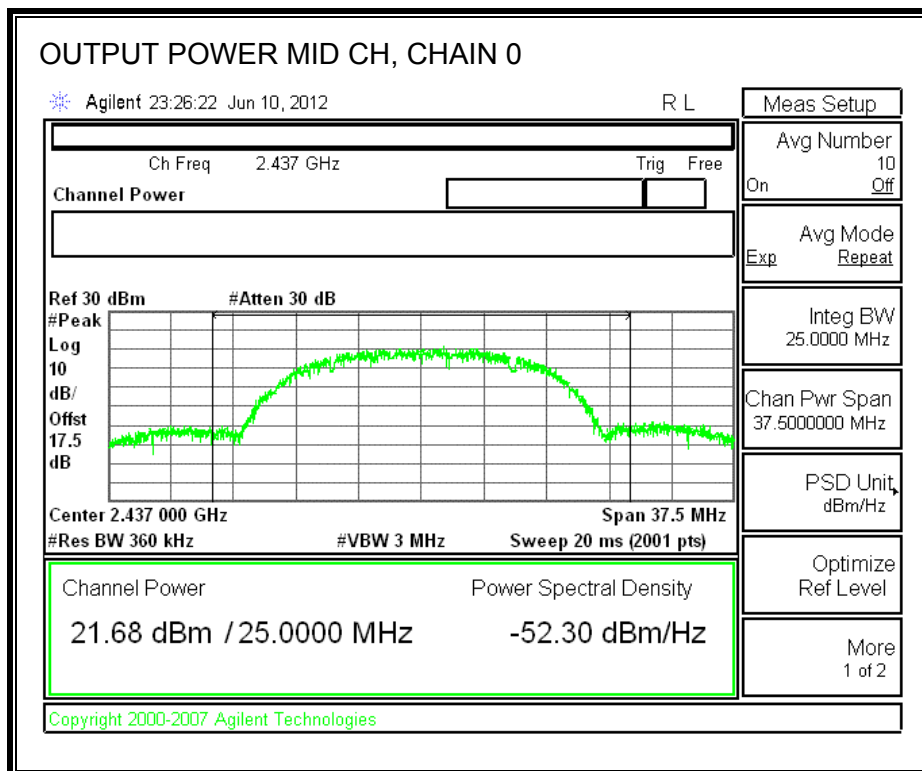


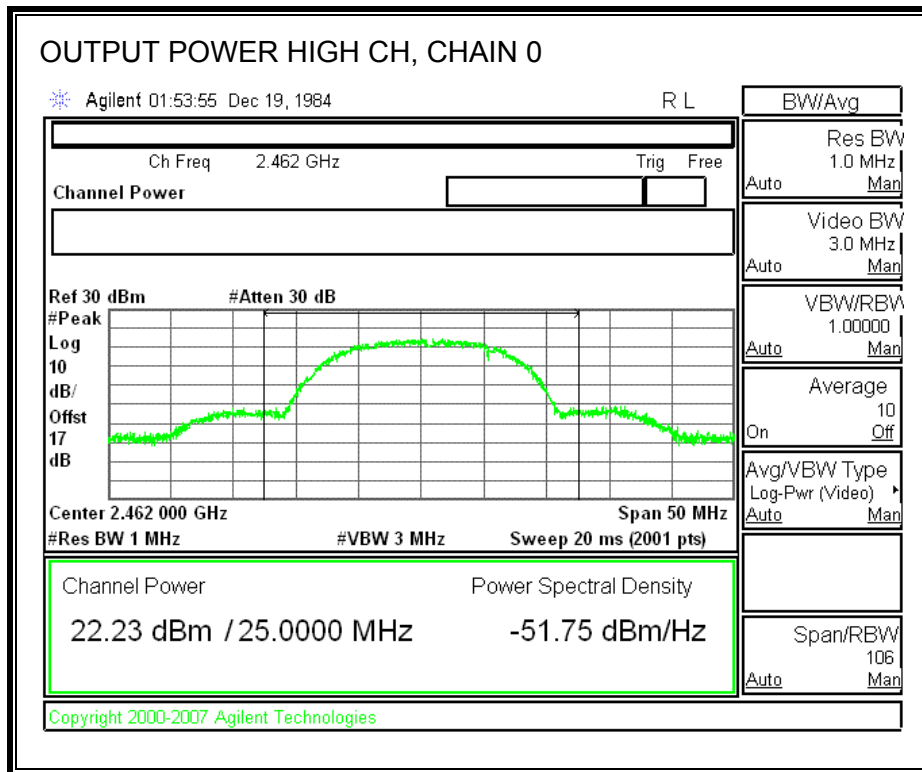

CHAIN 1 OUTPUT POWER

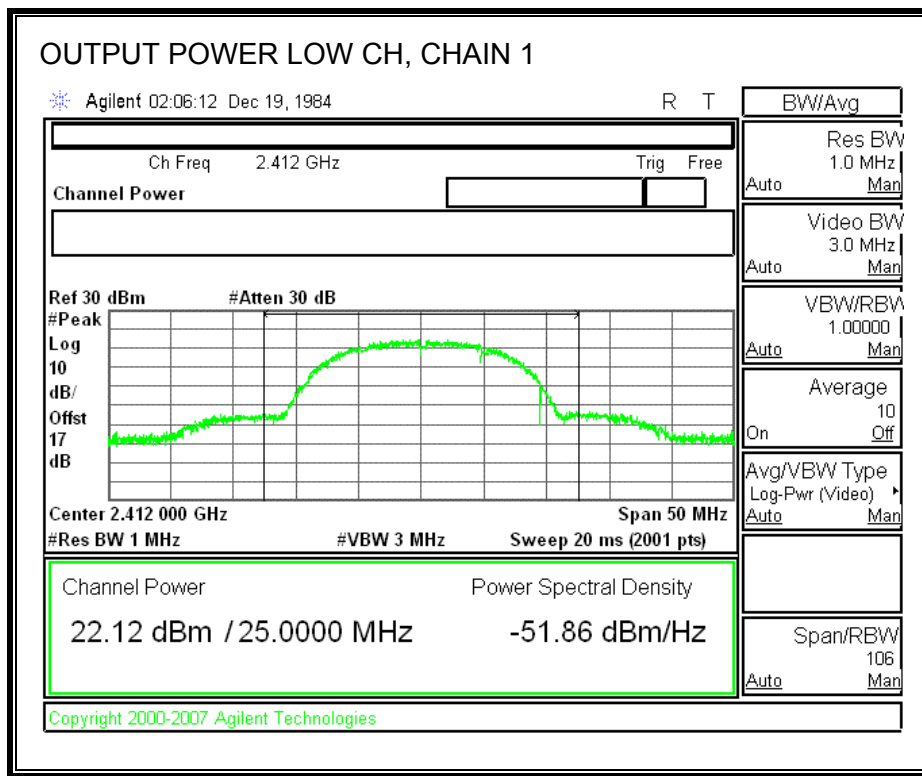

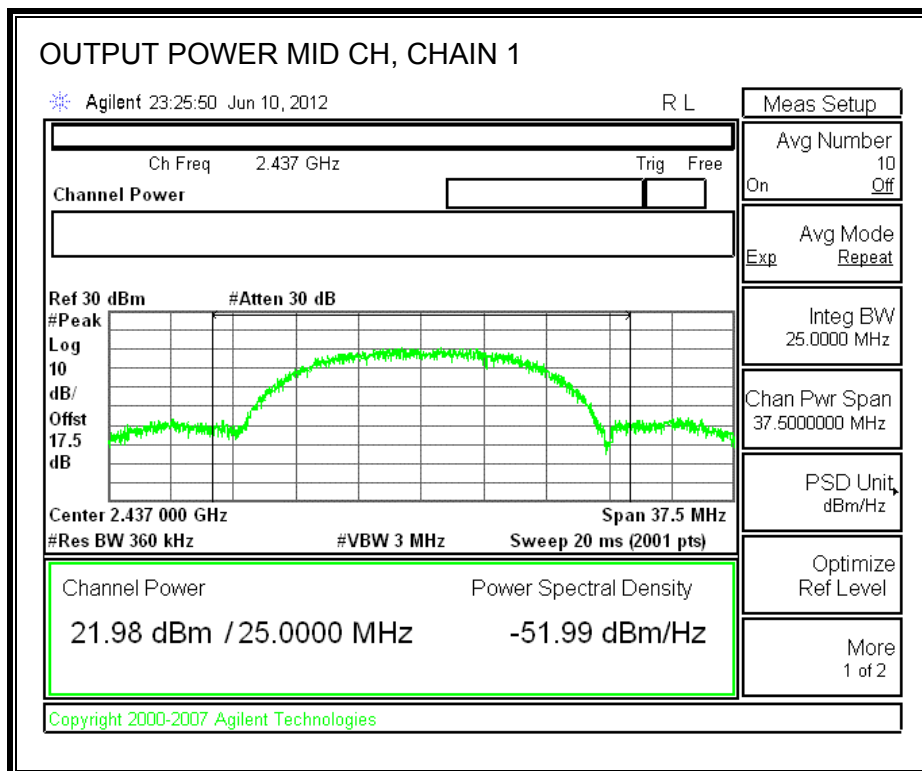

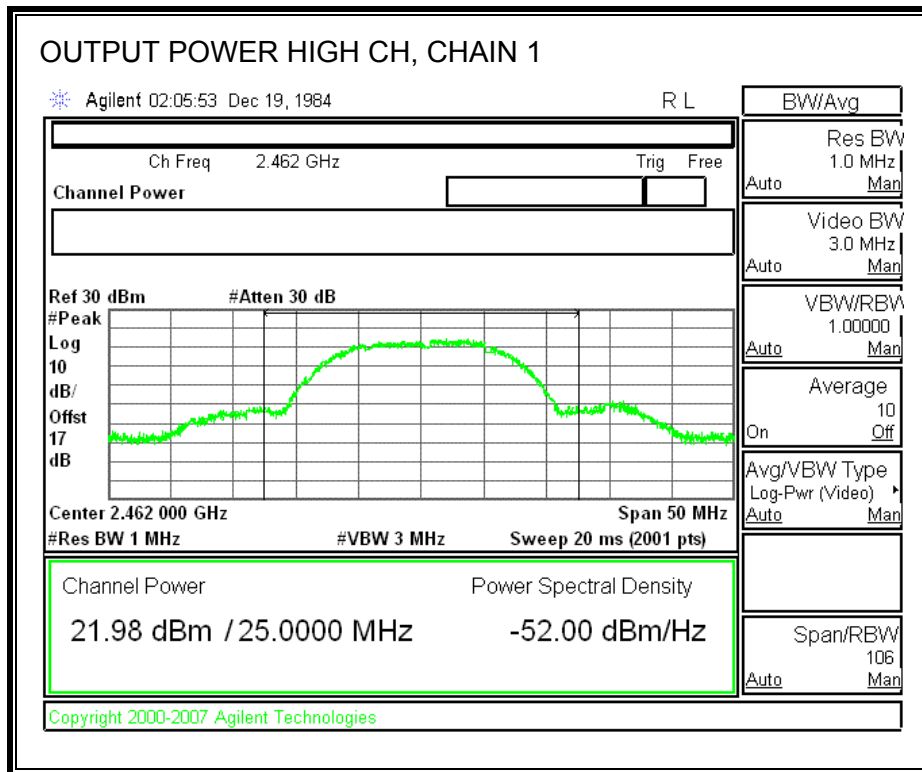

7.1.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 17 dB (including 16 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	2412	17.73	17.62	20.69
Middle	2437	16.81	17.05	19.94
High	2462	17.91	17.88	20.91

7.1.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS

Channel	Frequency (MHz)	PSD with Combiner (dBm)	Limit (dBm)	Margin (dB)
Low	2412	1.89	8	-6.11
Middle	2437	4.06	8	-3.94
High	2462	-0.20	8	-8.20

POWER SPECTRAL DENSITY, WITH COMBINER

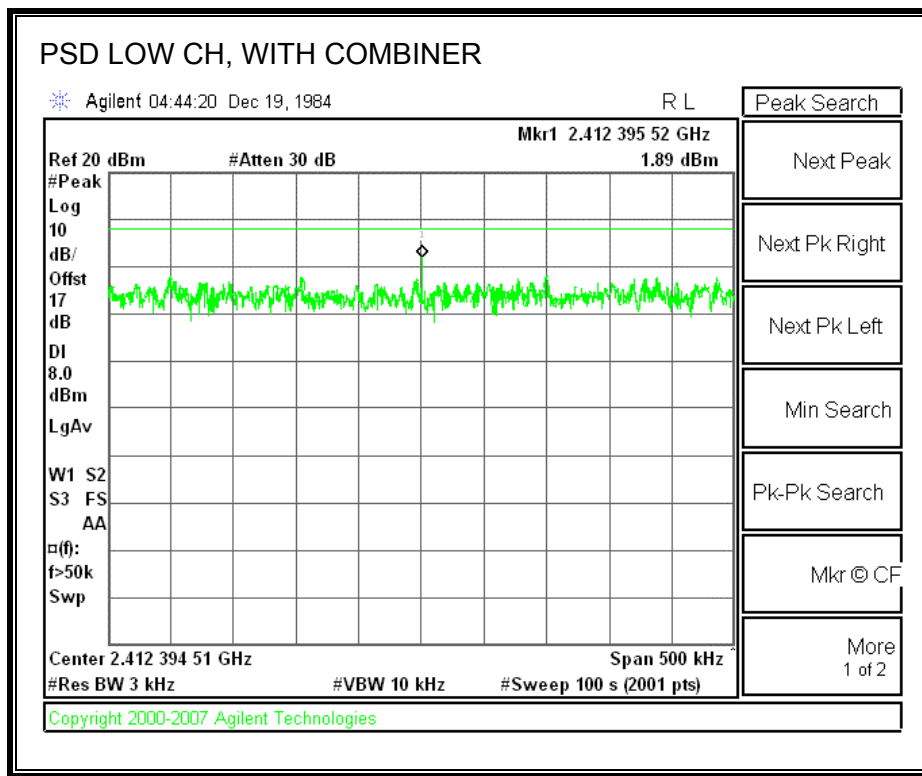

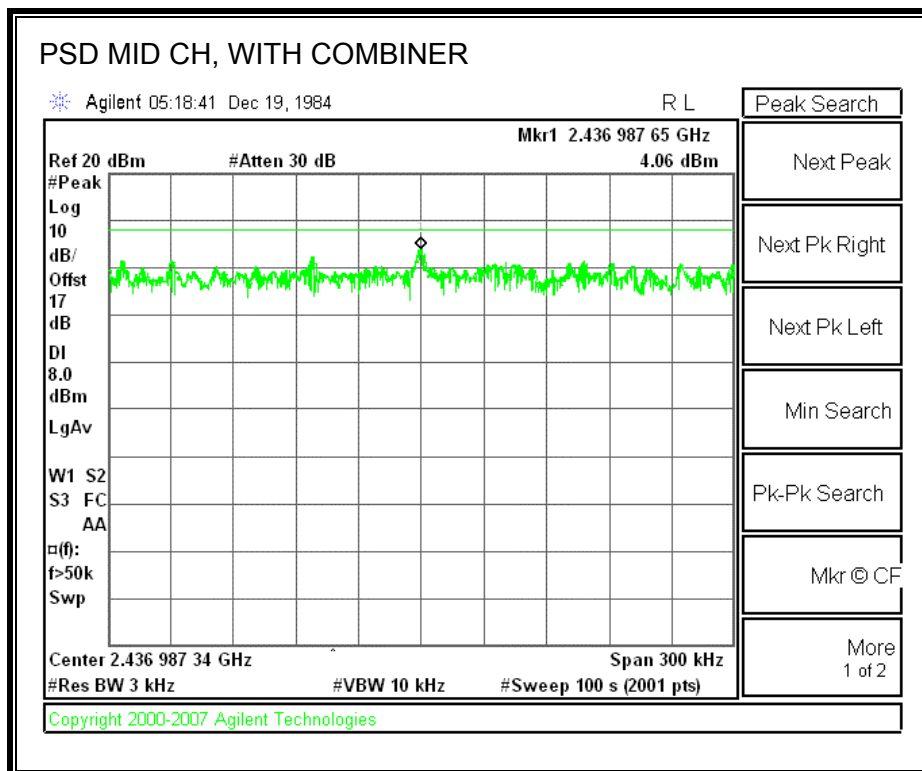

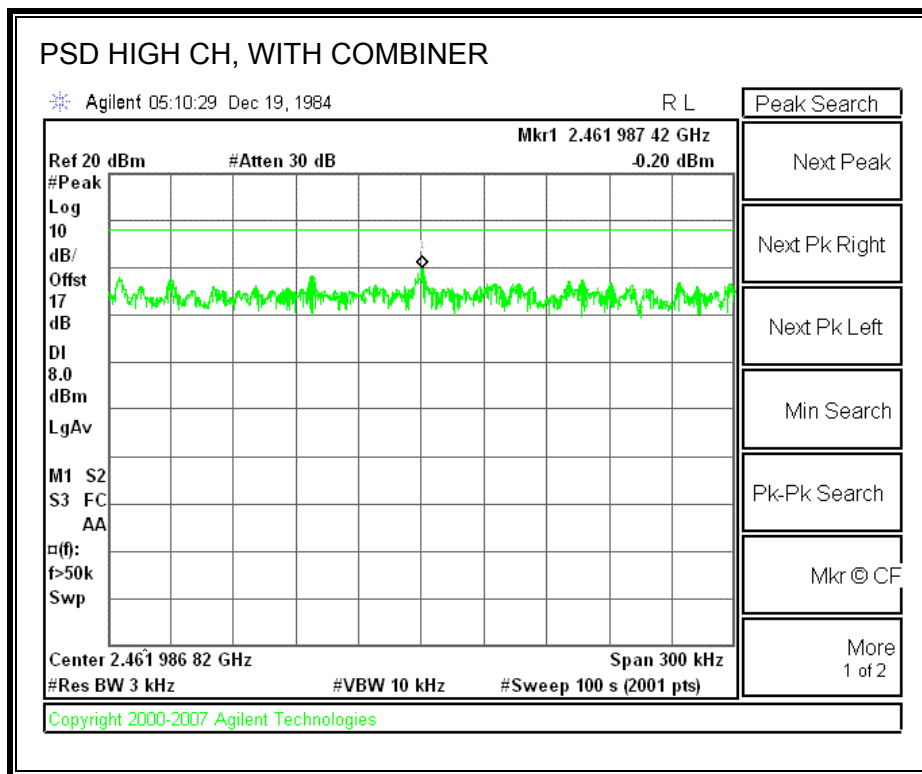

7.1.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS WITH COMBINER

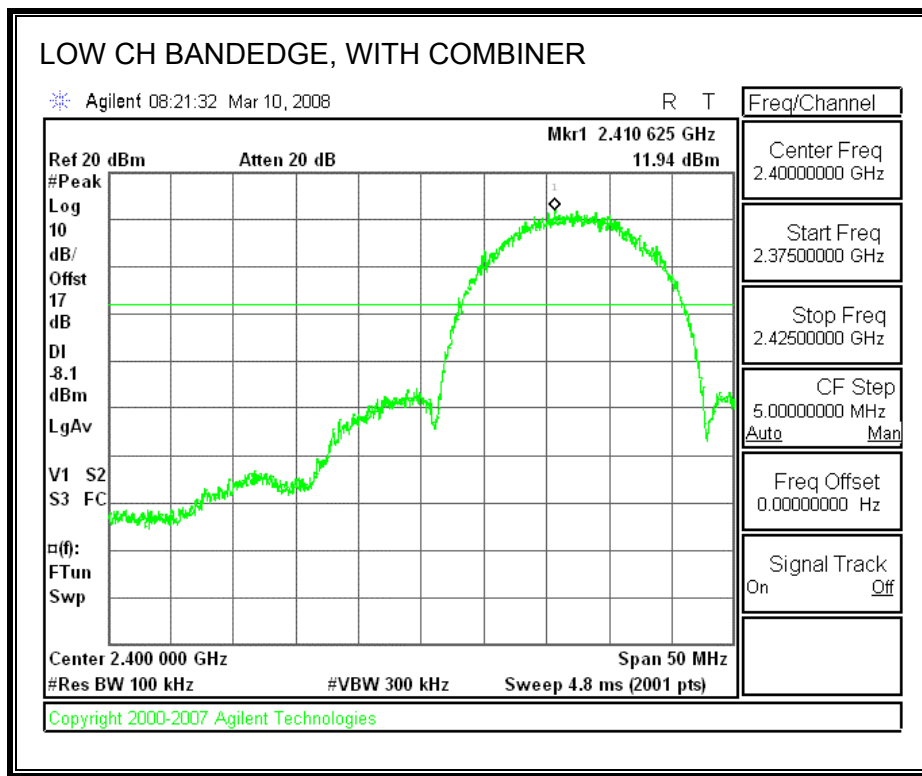


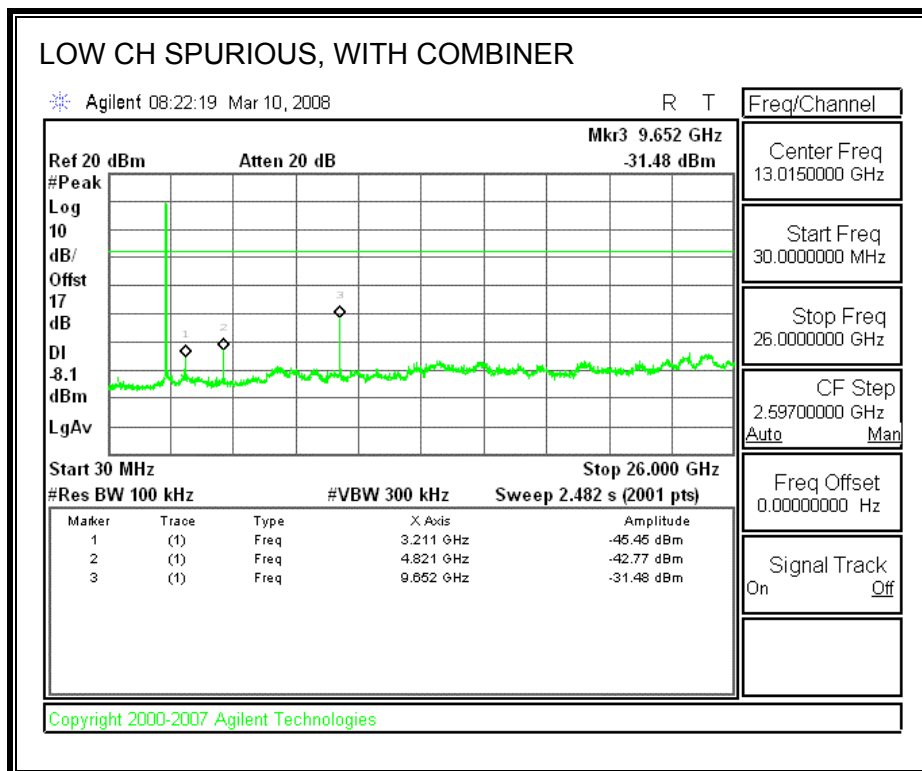

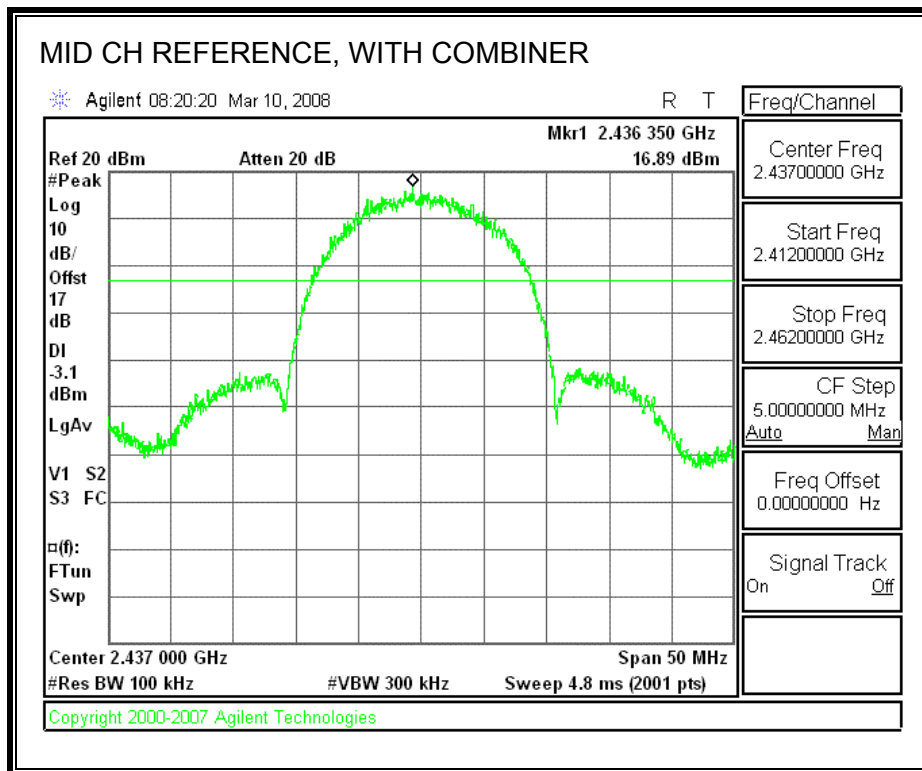

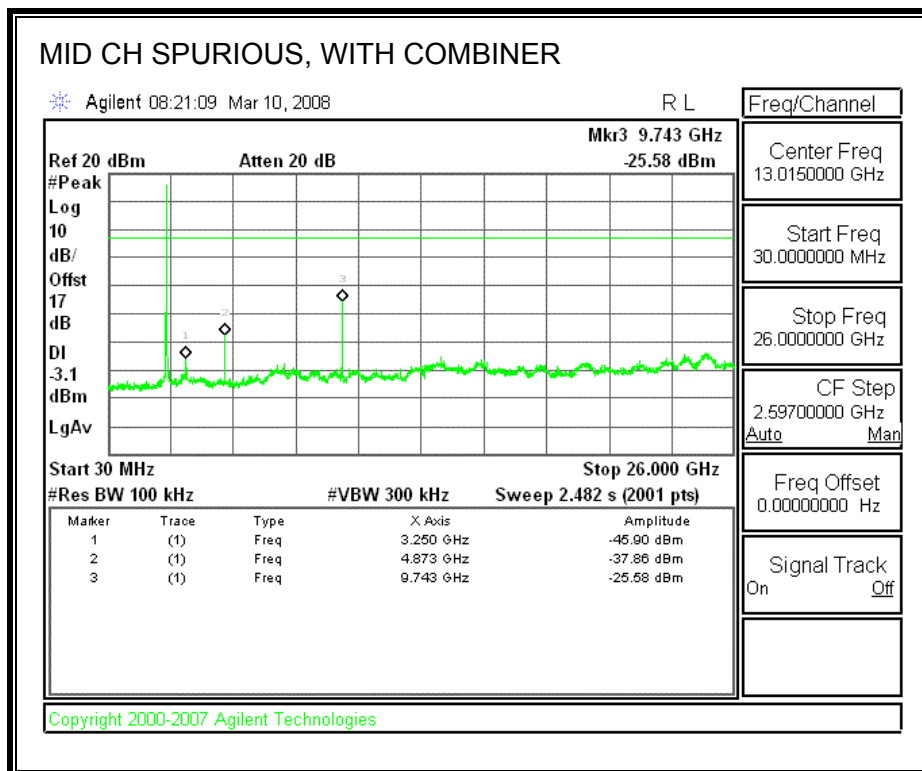

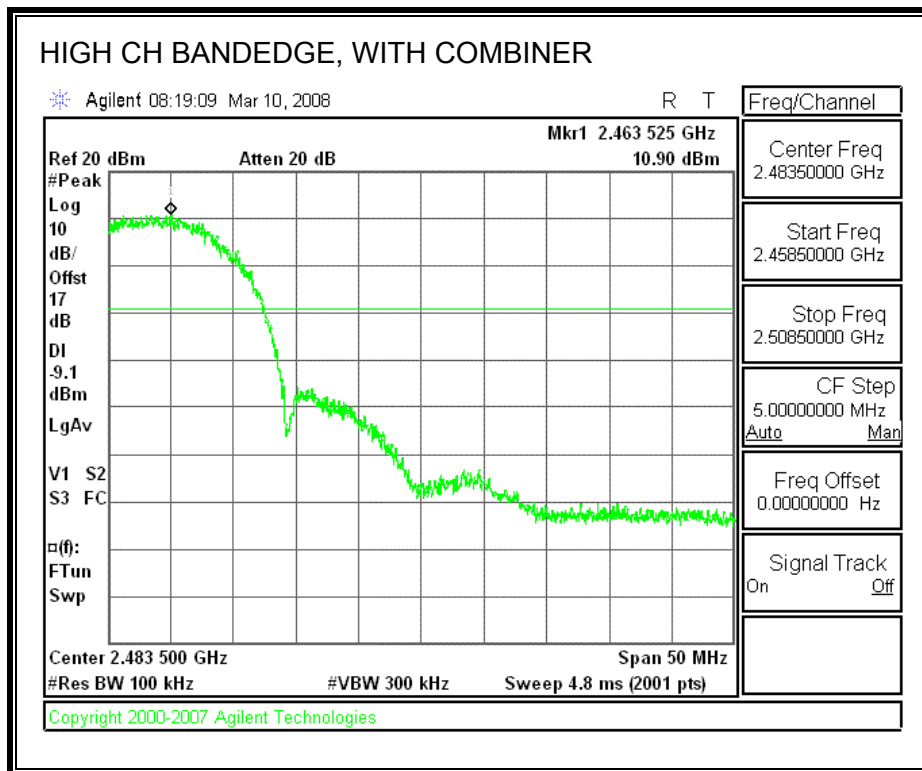

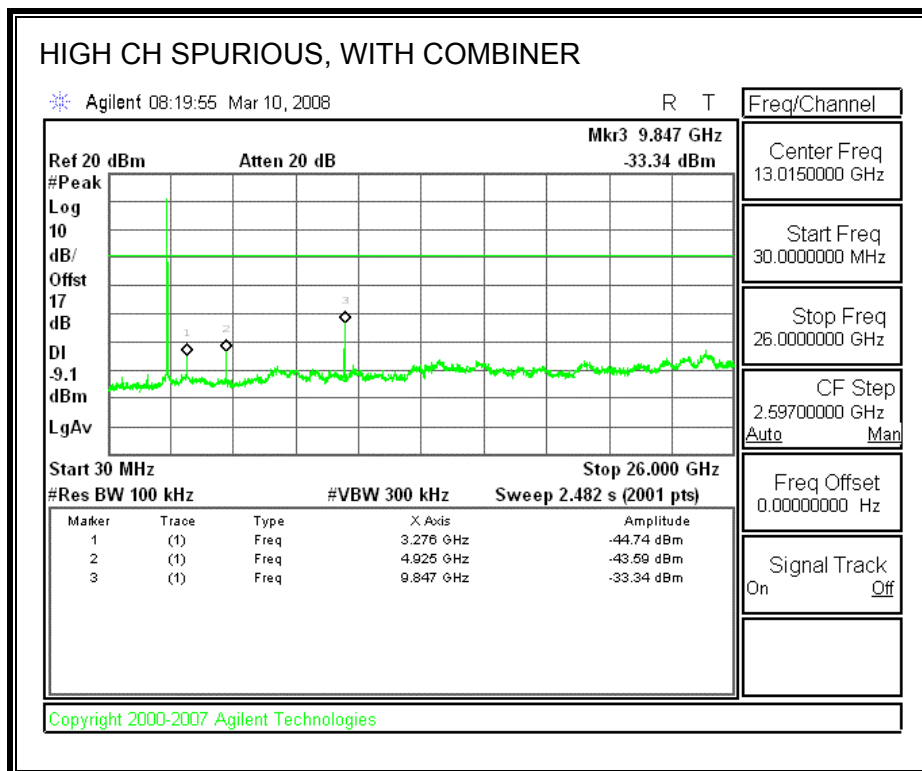

7.2. 802.11g DUAL CHAIN LEGACY MODE IN THE 2.4 GHz BAND

7.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)	Minimum Limit (MHz)
Middle	2437	16.362	0.5

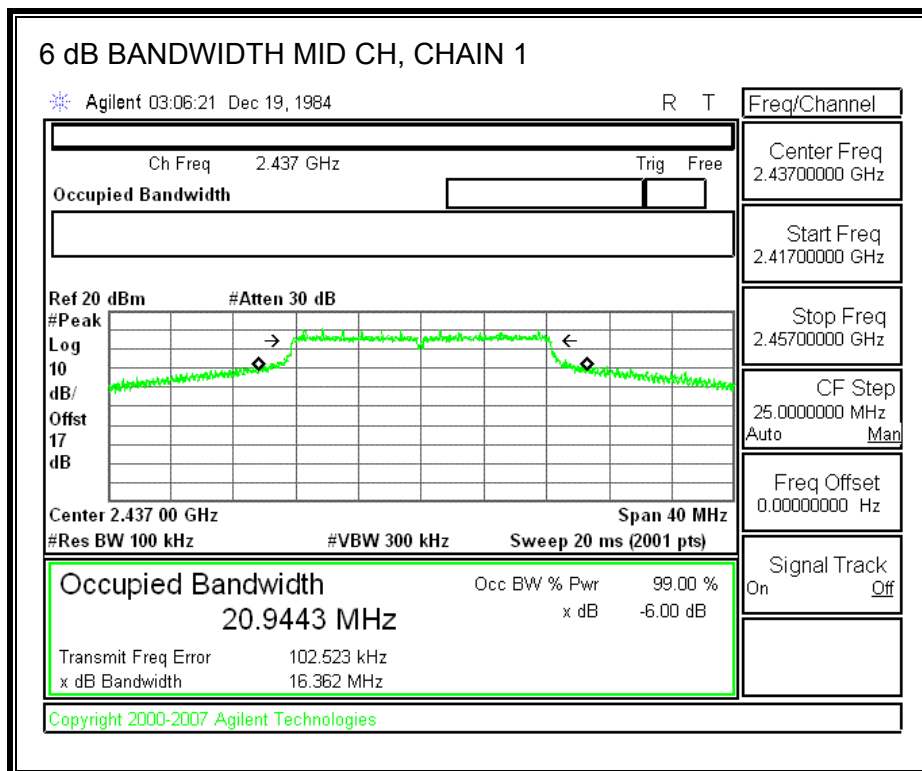

7.2.2. 99% BANDWIDTH

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)
Middle	2437	17.1795

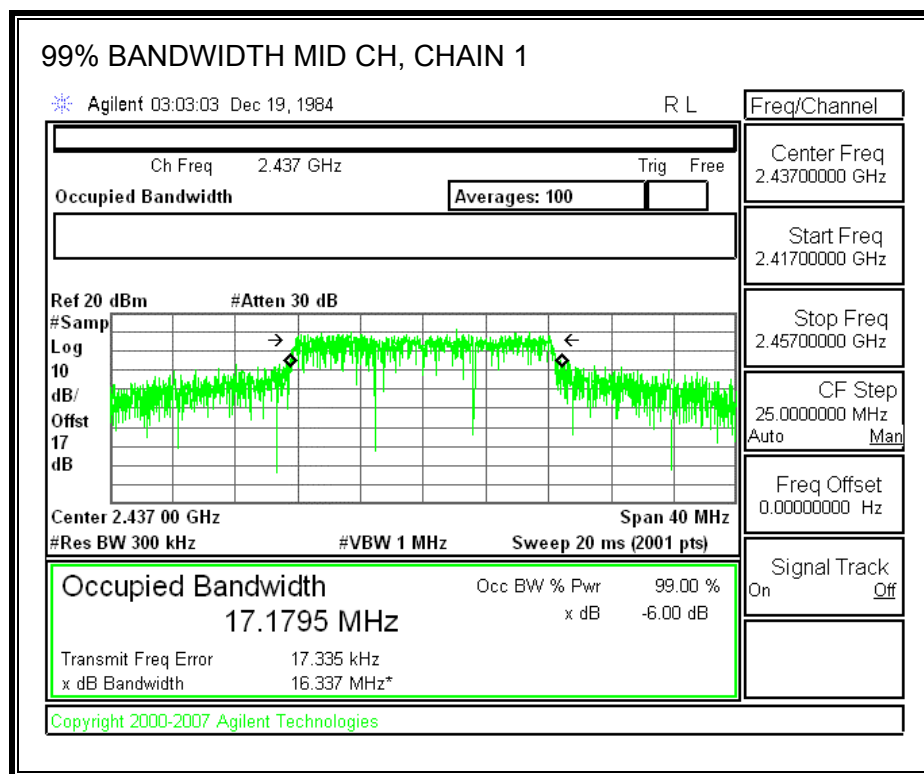

7.2.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi)
6.33

The maximum antenna gain is 6.33 dBi for P-To-M; therefore the limit is 29.67 dBm.


TEST PROCEDURE


Peak power is measured using the spectrum analyzer's internal channel power integration function. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.


RESULTS

Channel	Frequency (MHz)	Limit (dBm)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)	Margin (dB)
Low	2412	29.67	21.83	20.43	24.20	-5.47
Mid	2437	29.67	26.44	26.69	29.58	-0.09
High	2462	29.67	21.01	21.11	24.07	-5.60


CHAIN 0 OUTPUT POWER

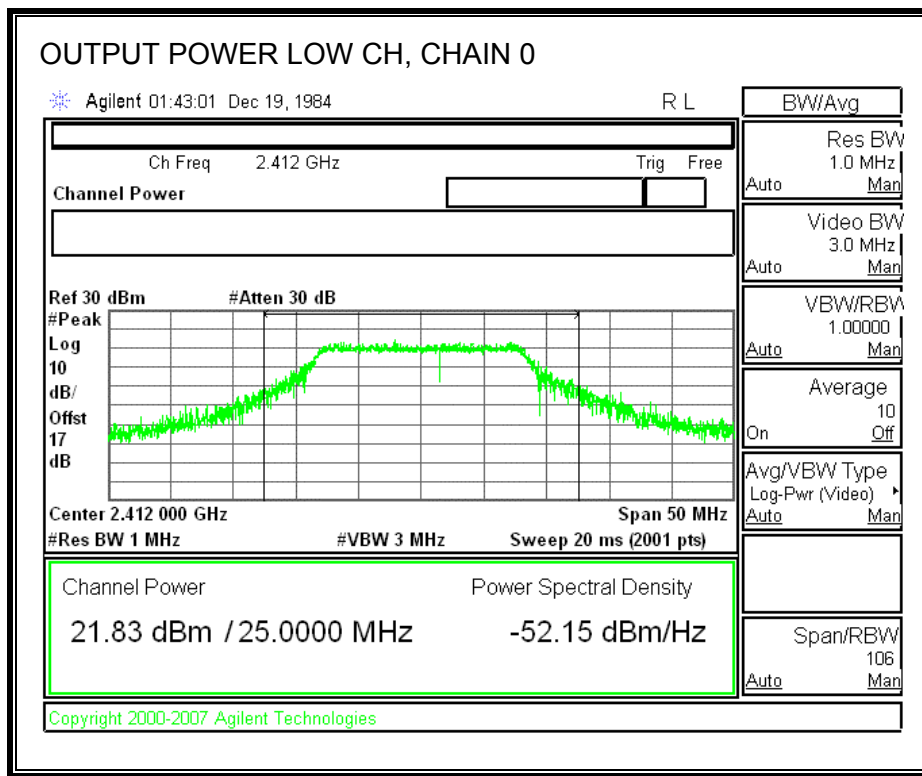


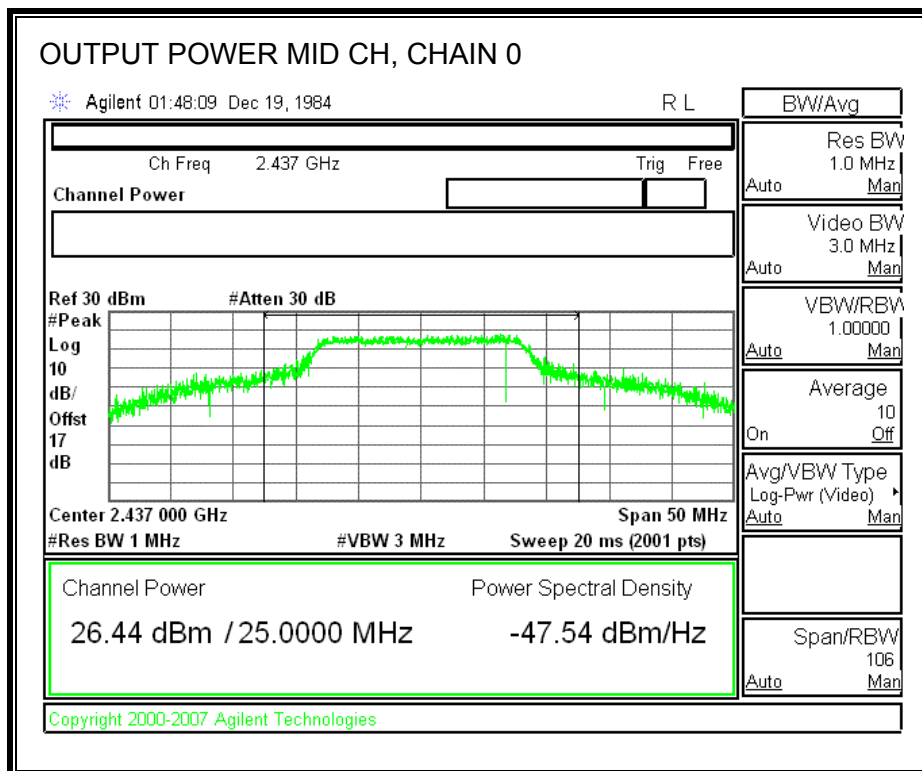


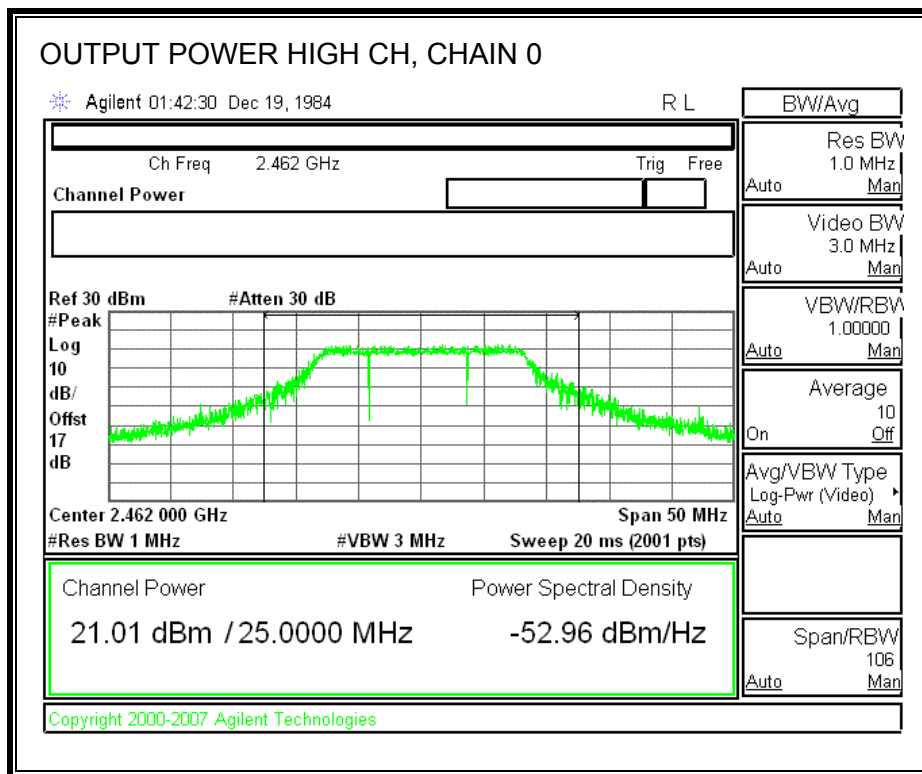

CHAIN 1 OUTPUT POWER

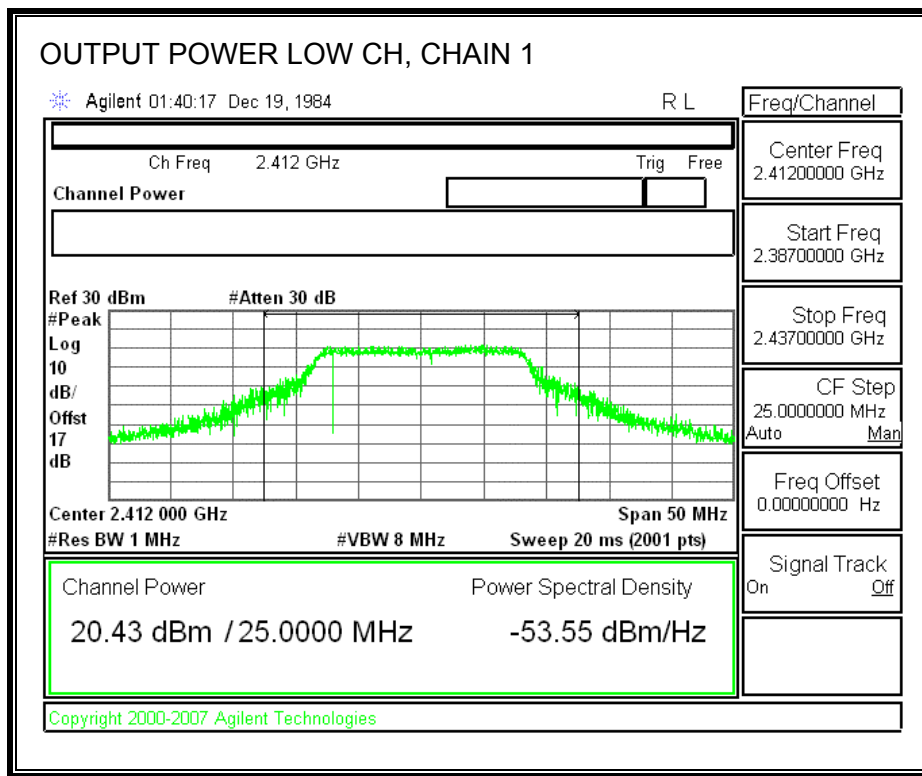

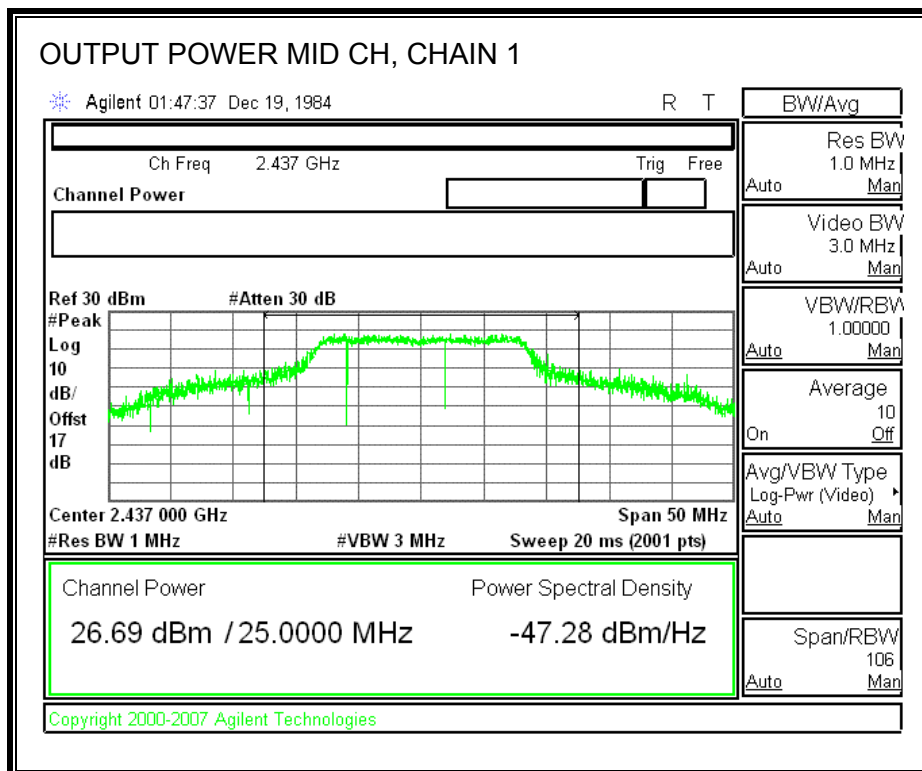

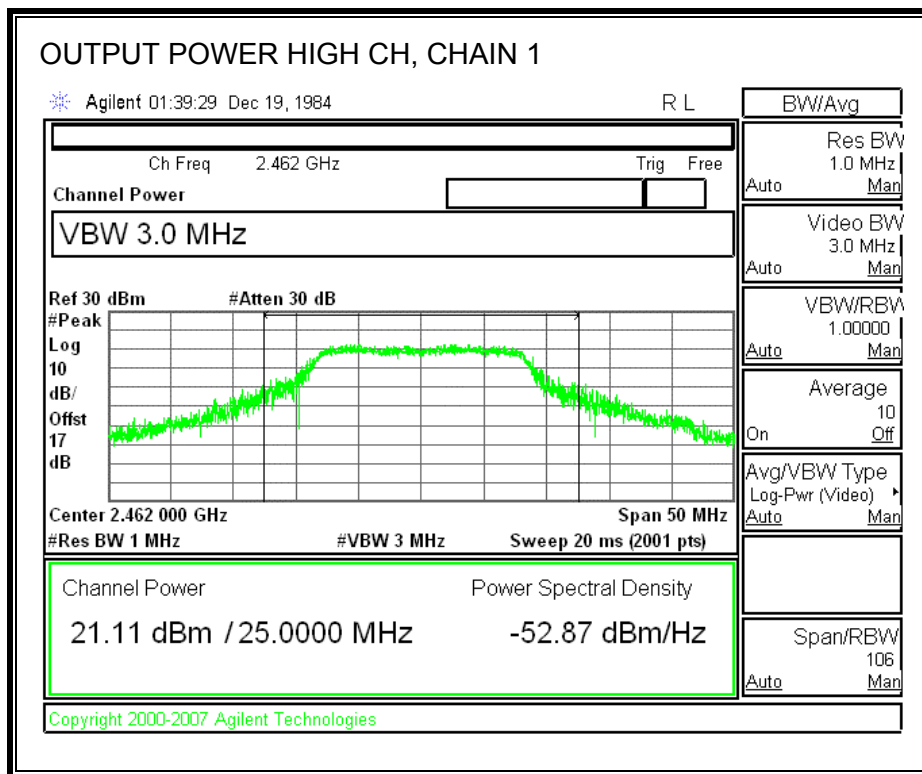

7.2.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 17 dB (including 16 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	2412	16.27	15.23	18.79
Middle	2437	21.29	21.35	24.33
High	2462	15.83	15.91	18.88

7.2.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS

Channel	Frequency (MHz)	PSD with Combiner (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-0.70	8	-8.70
Middle	2437	3.98	8	-4.02
High	2462	-1.79	8	-9.79

POWER SPECTRAL DENSITY, WITH COMBINER

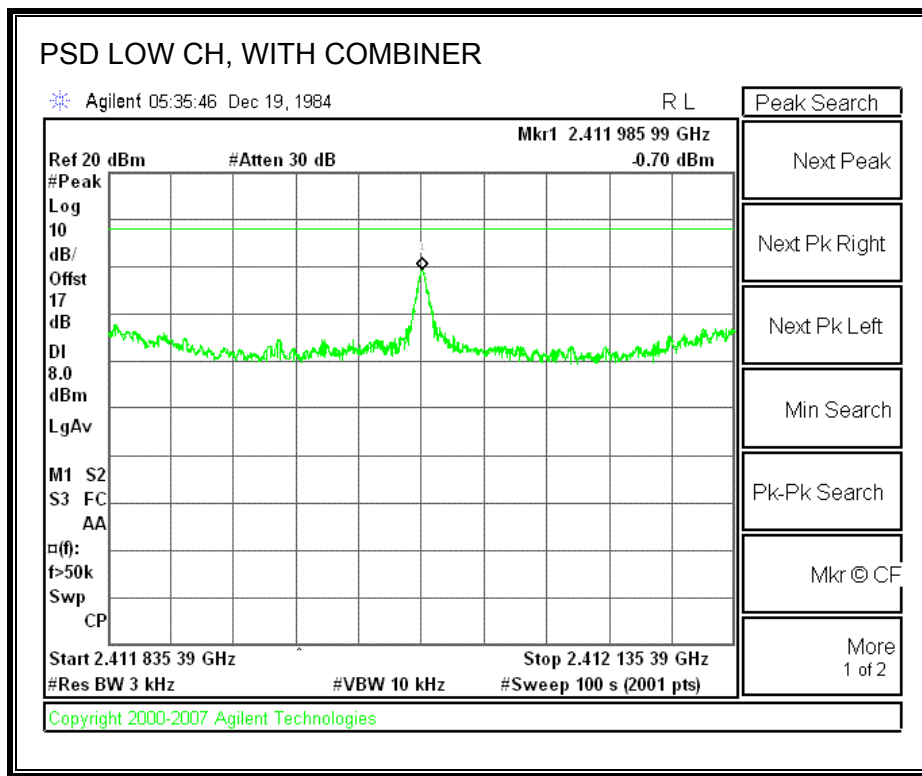

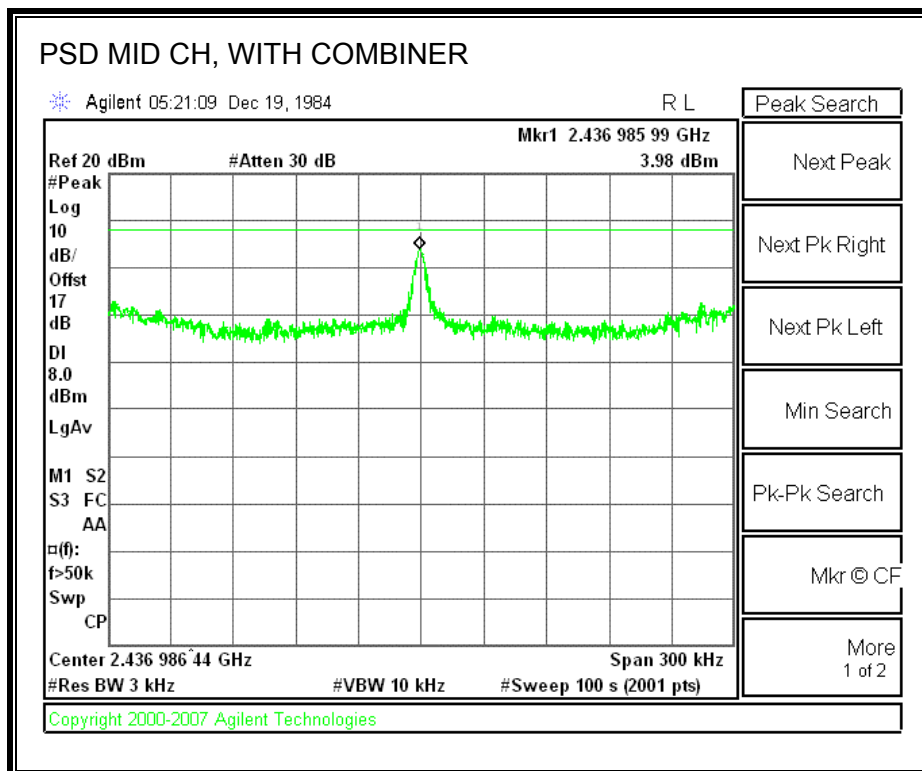

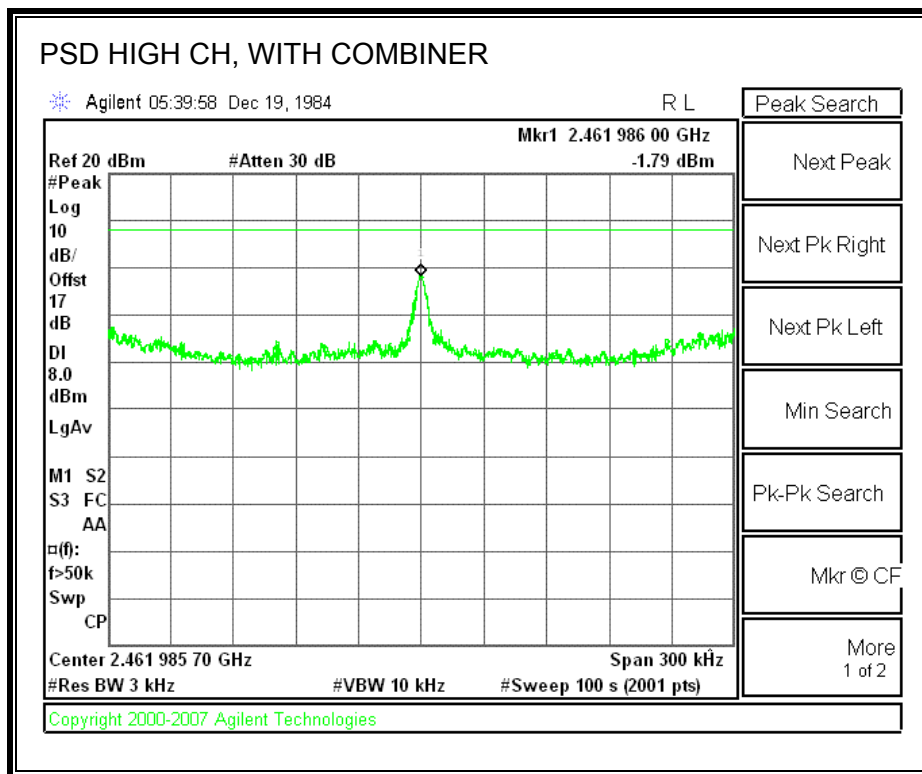

7.2.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS WITH COMBINER

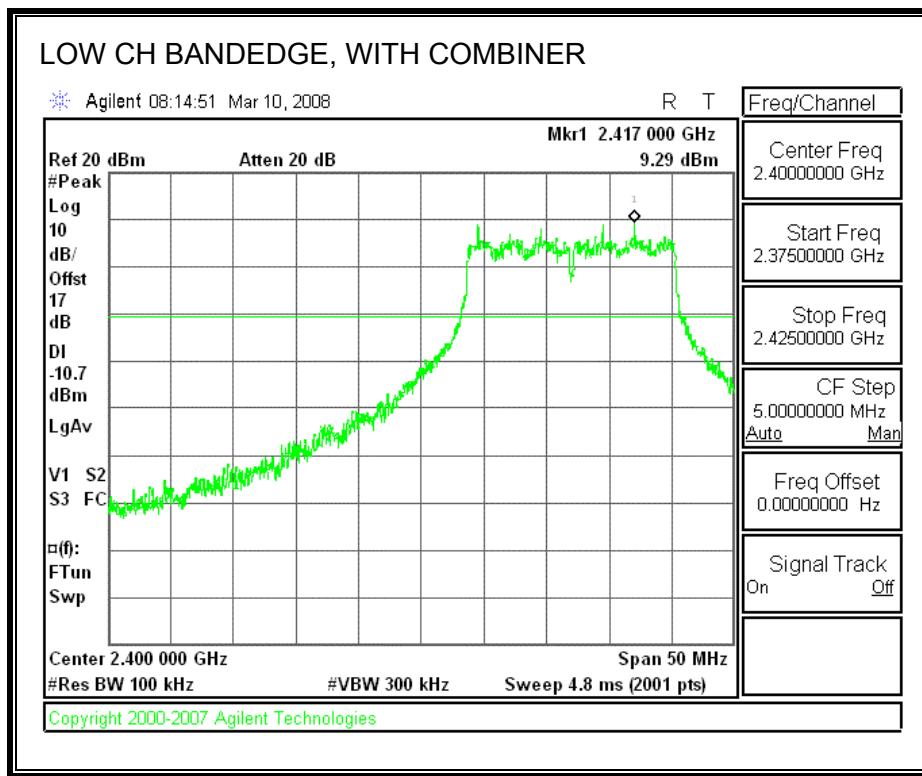


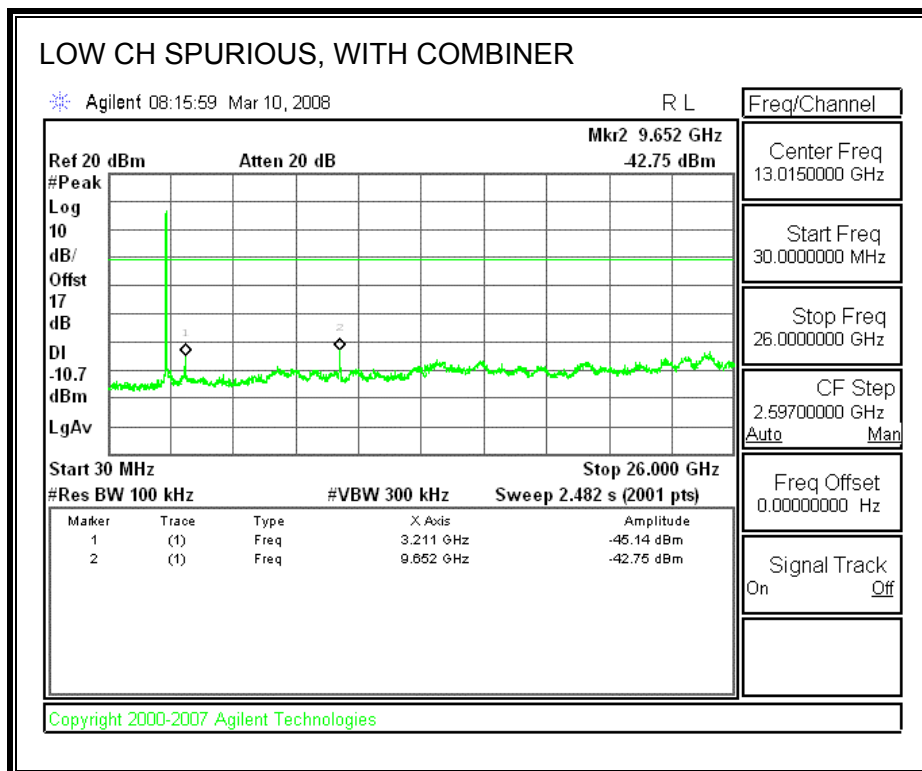

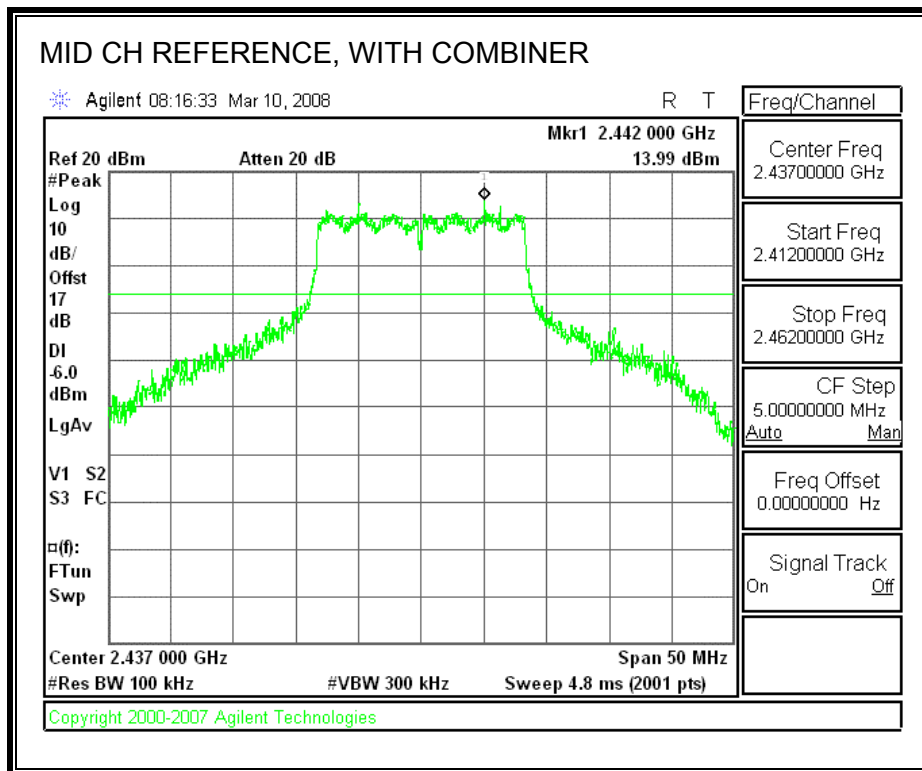

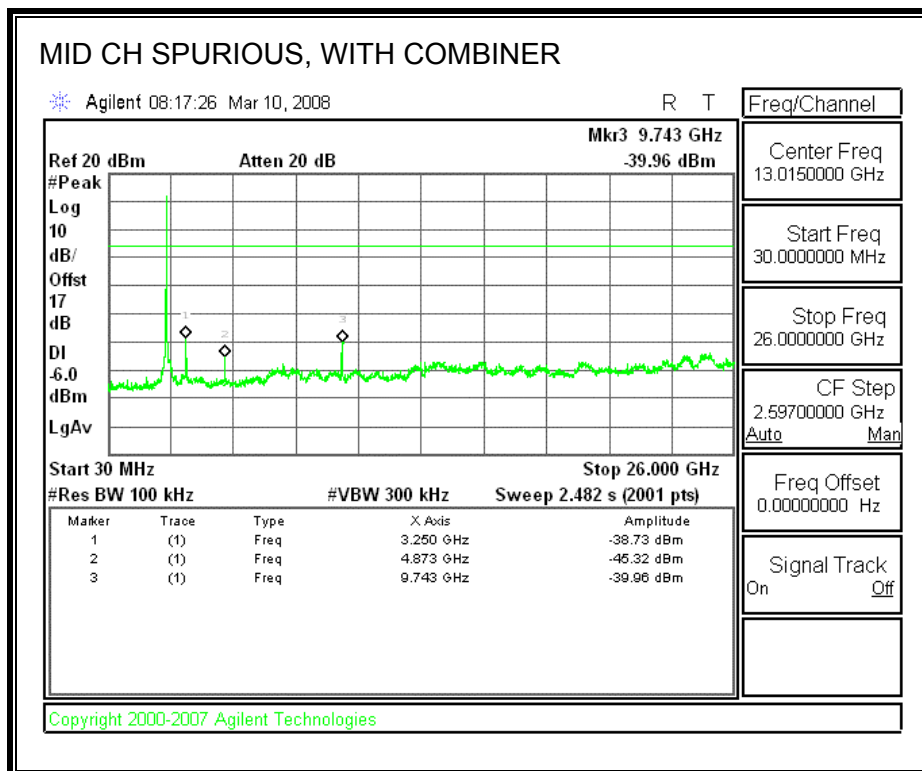

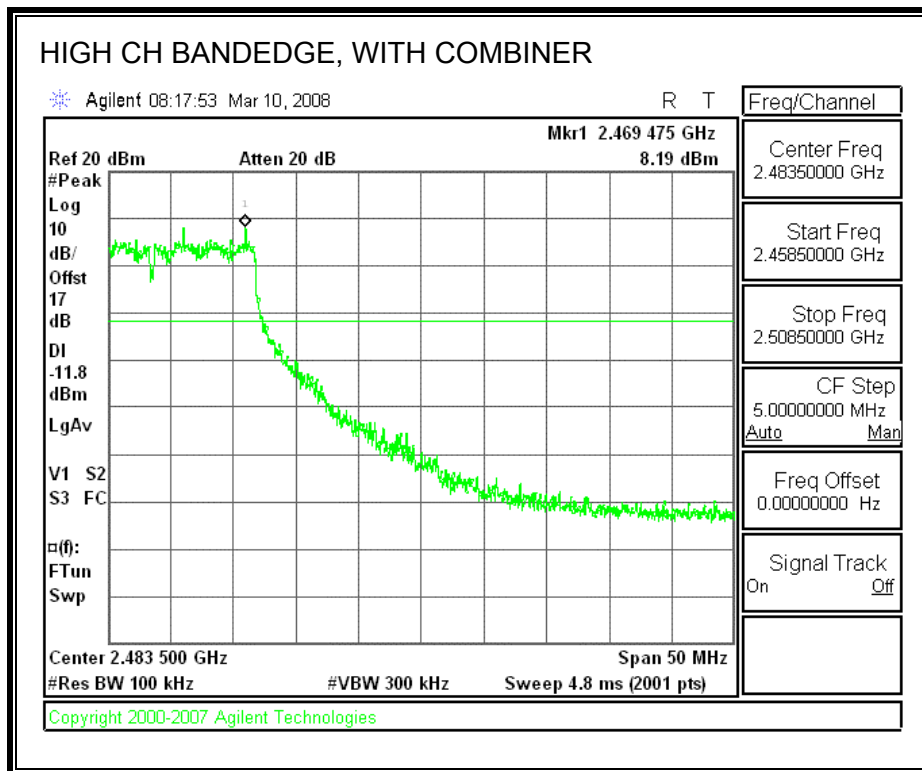

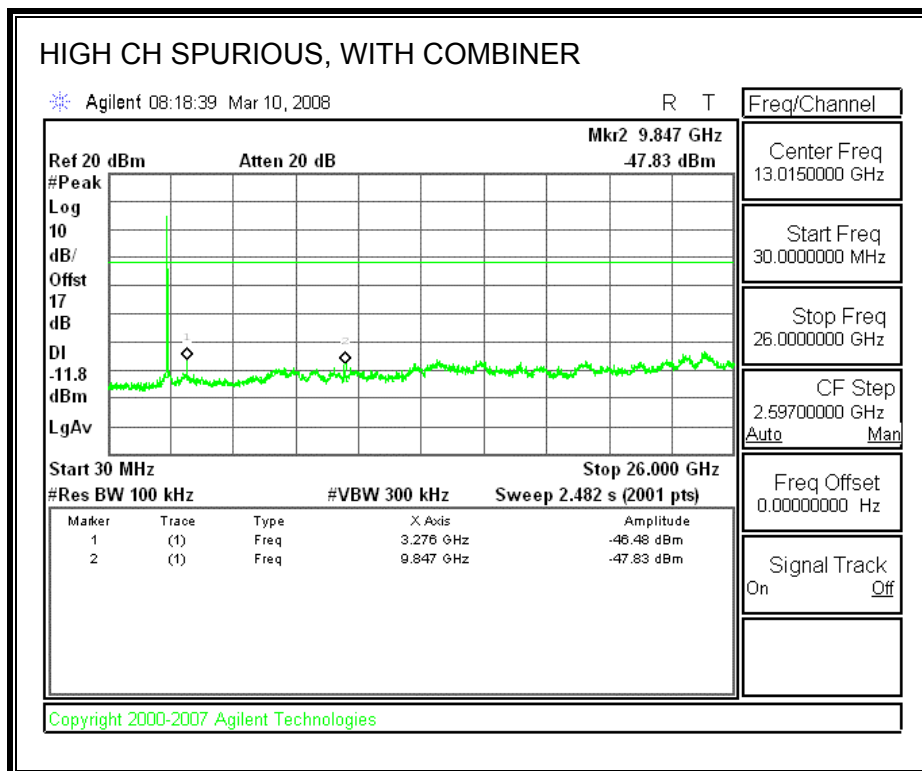

7.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

7.3.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)	Minimum Limit (MHz)
Middle	2437	17.592	0.5

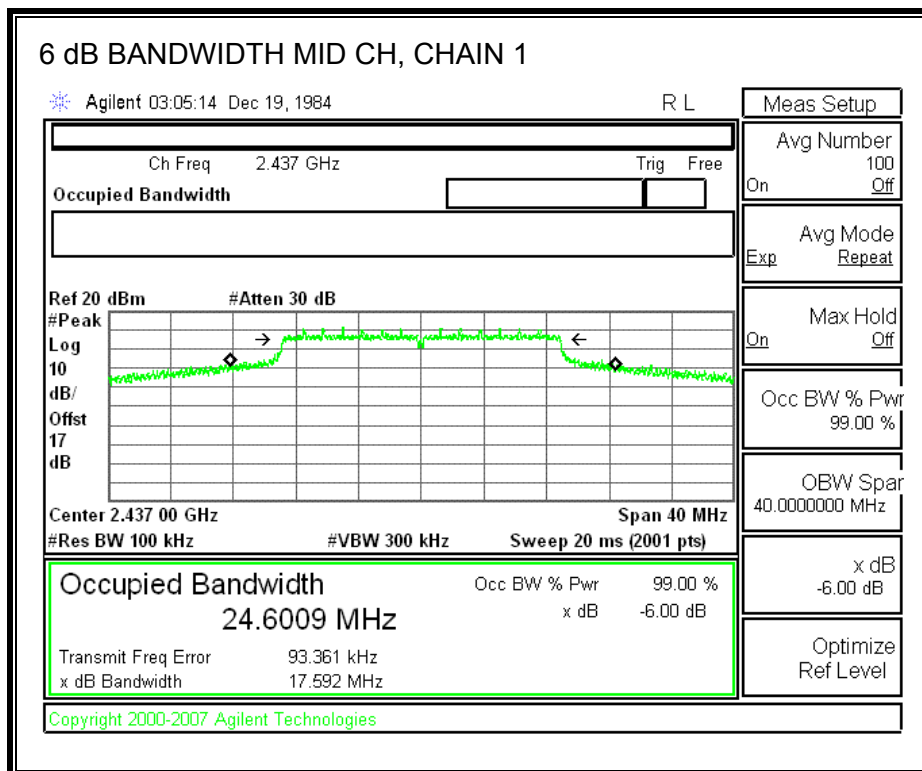

7.3.2. 99% BANDWIDTH

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)
Middle	2437	19.9332

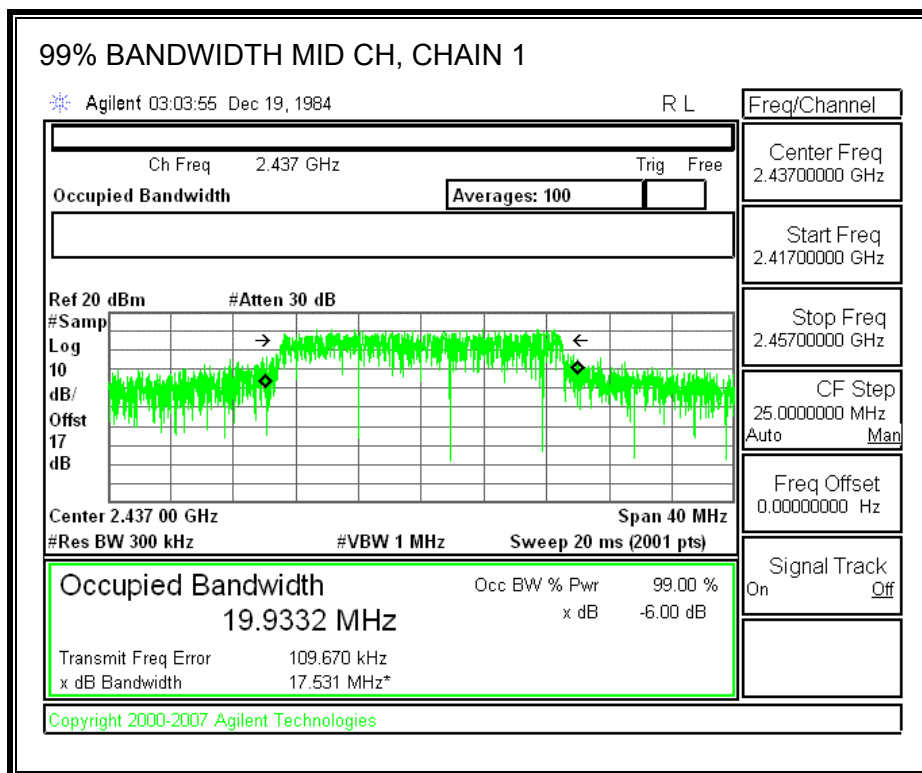

7.3.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


Peak power is measured using the spectrum analyzer's internal channel power integration function. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.


RESULTS

Channel	Frequency (MHz)	Limit (dBm)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)	Margin (dB)
Low	2412	30.00	20.64	19.79	23.25	-6.75
Mid	2437	30.00	26.50	26.55	29.54	-0.46
High	2462	30.00	18.43	18.72	21.59	-8.41


CHAIN 0 OUTPUT POWER

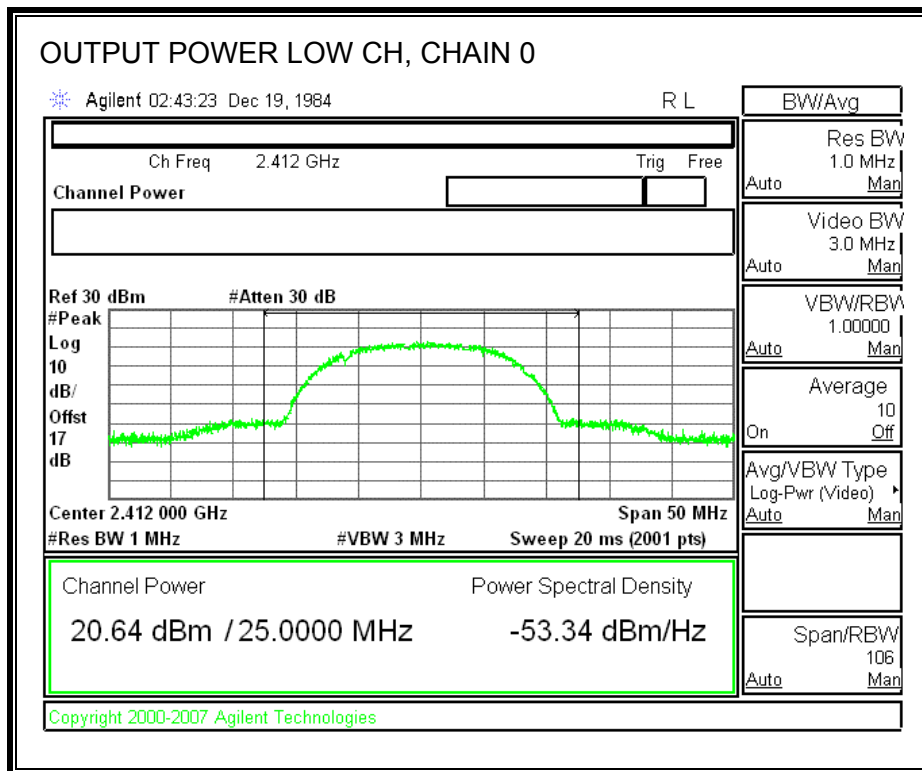


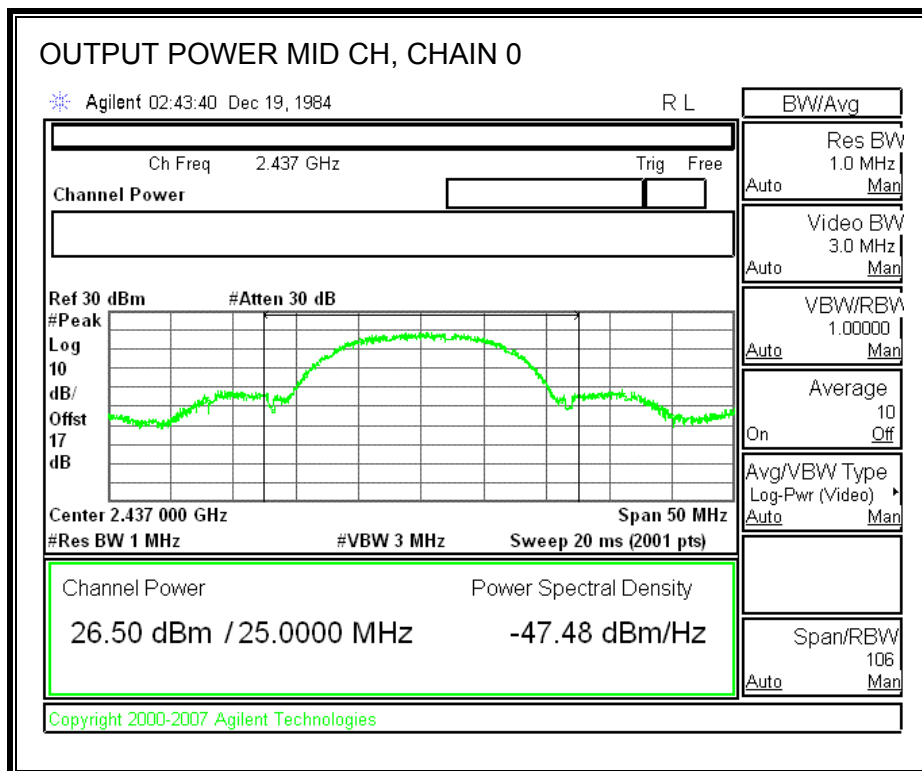


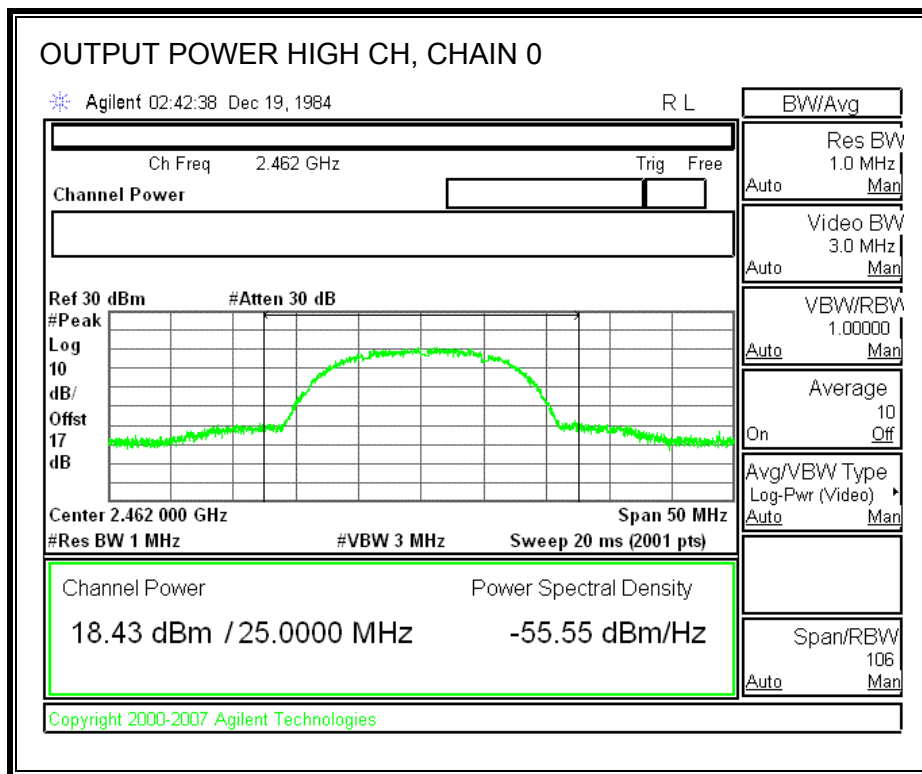

CHAIN 1 OUTPUT POWER

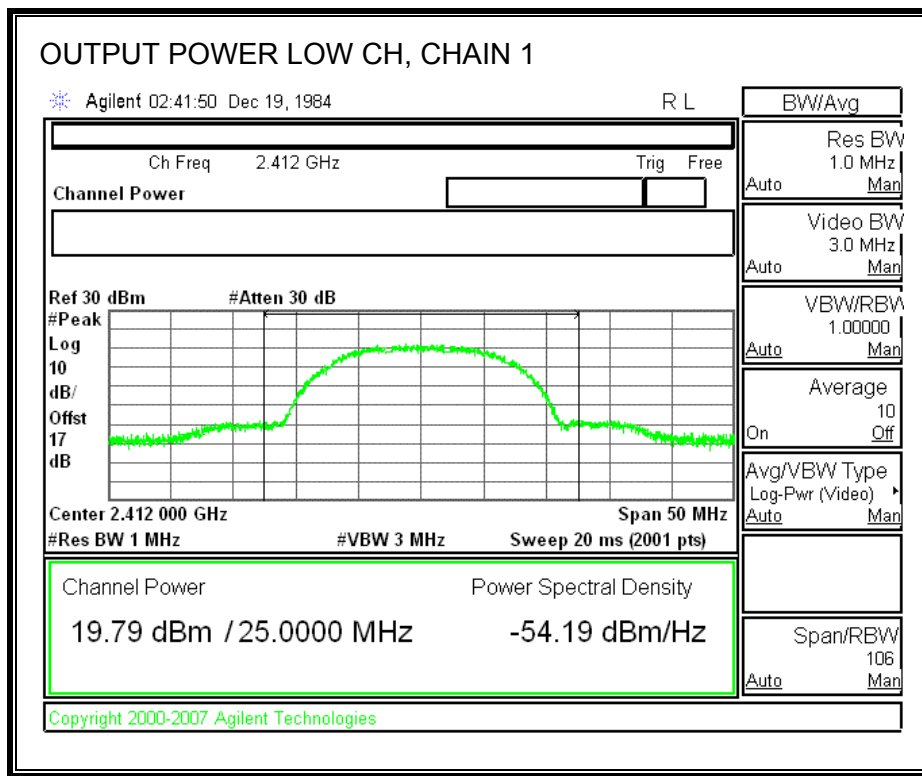

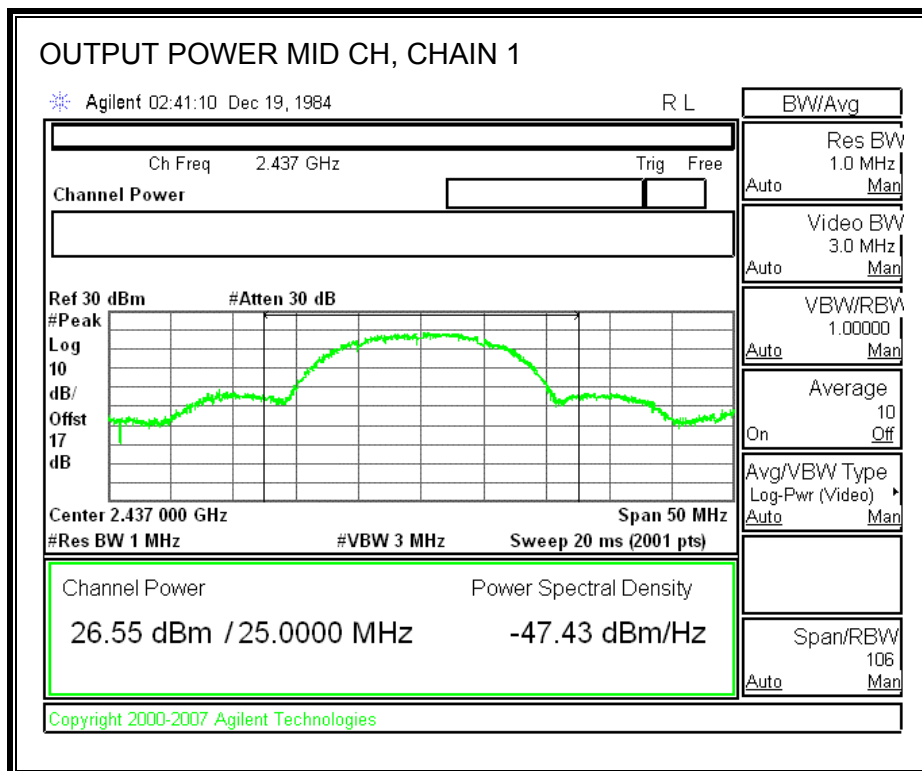

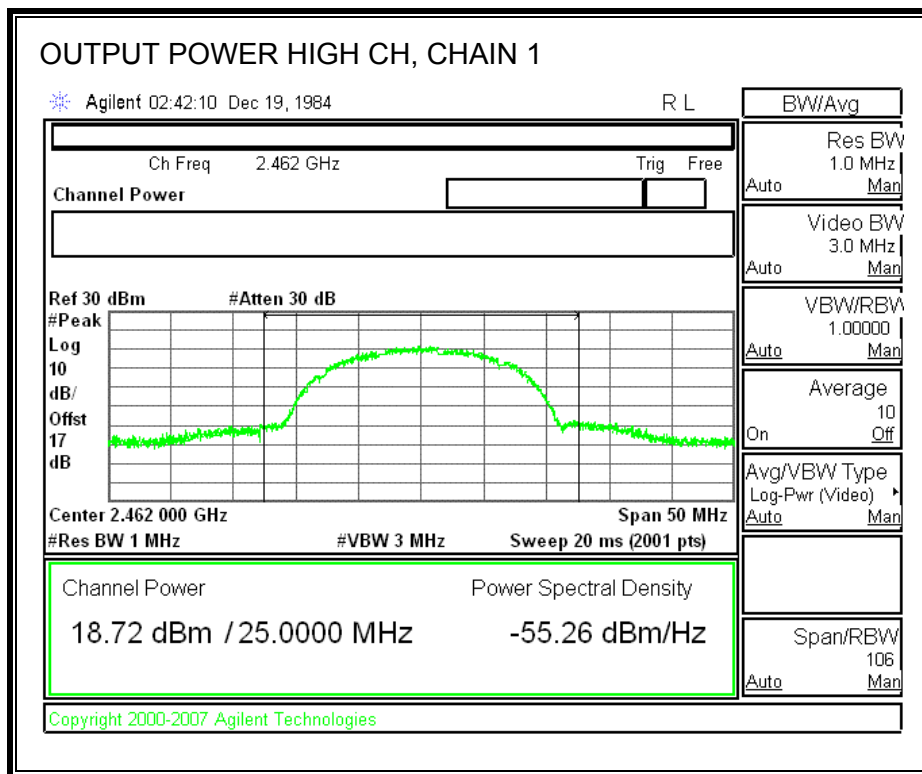

7.3.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 17 dB (including 16 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	2412	15.99	15.47	18.75
Middle	2437	21.96	22.01	25.00
High	2462	14.09	14.11	17.11

7.3.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS

Channel	Frequency (MHz)	PSD with Combiner (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-0.16	8	-8.16
Middle	2437	6.39	8	-1.61
High	2462	-0.59	8	-8.59

POWER SPECTRAL DENSITY, WITH COMBINER

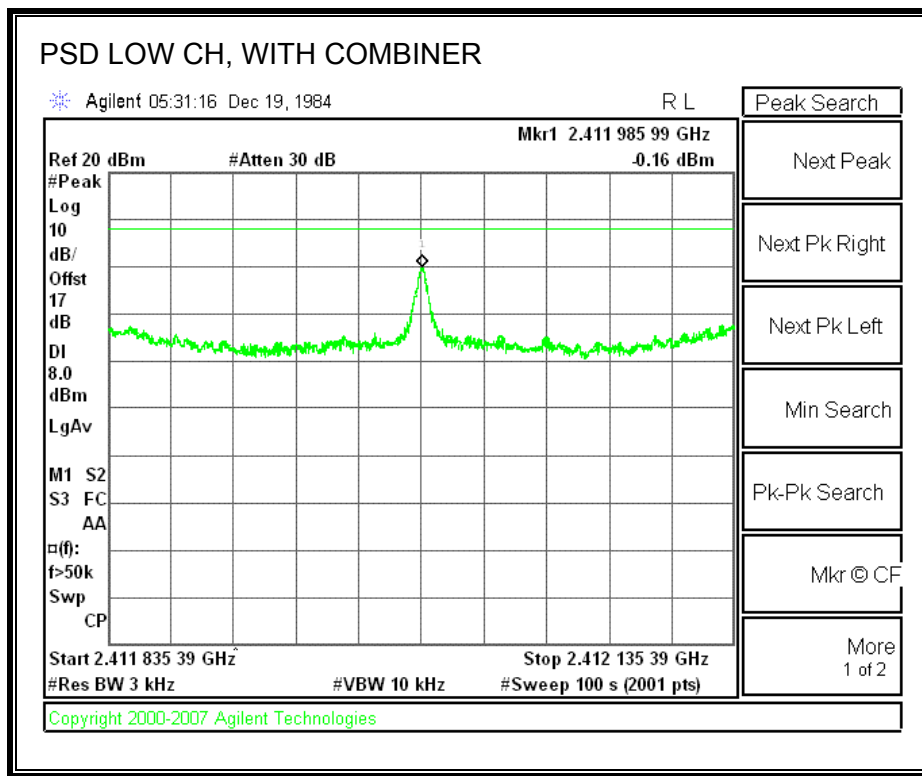

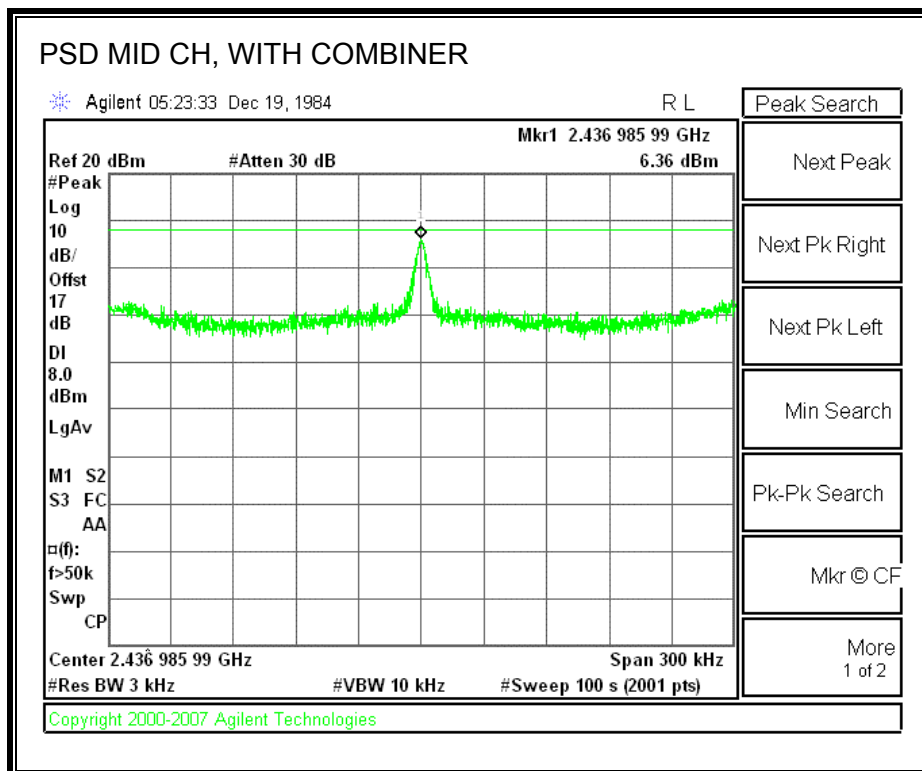

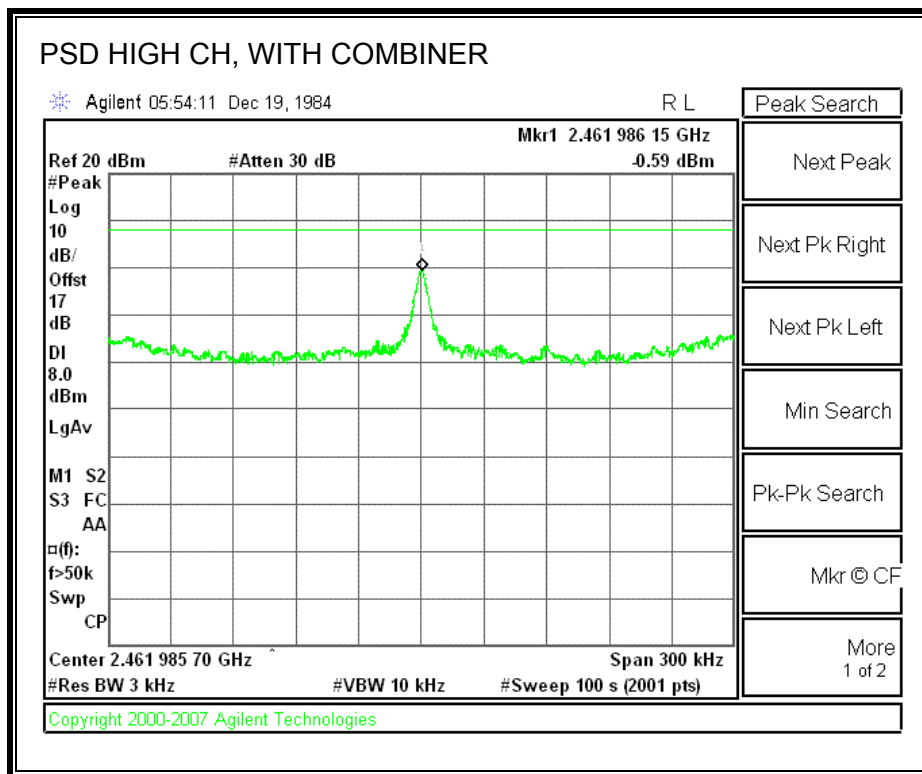

7.3.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS WITH COMBINER

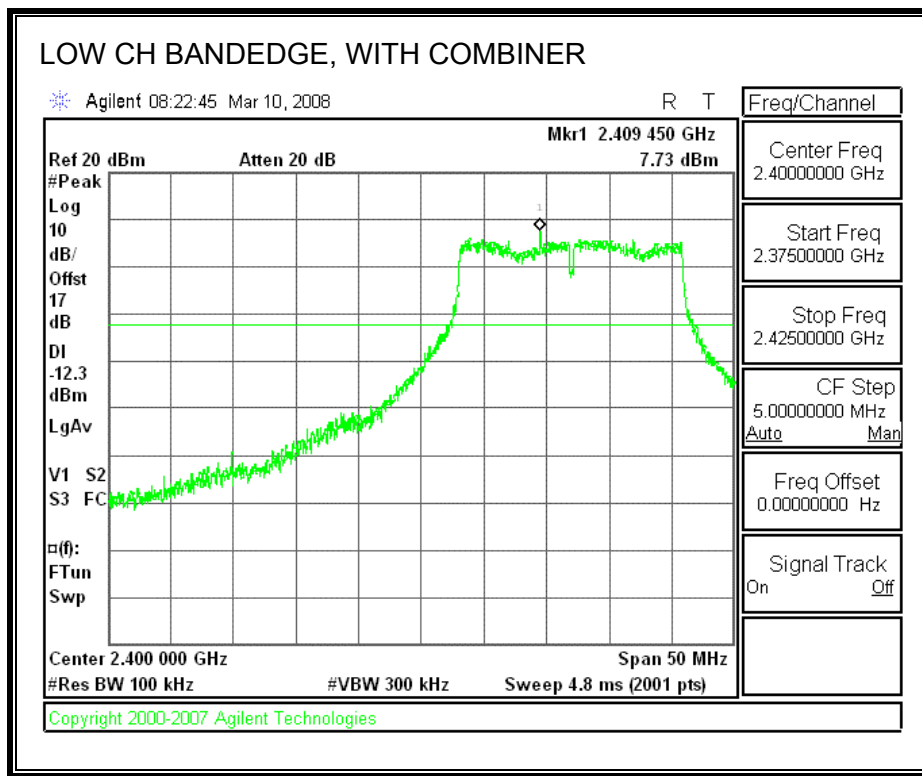


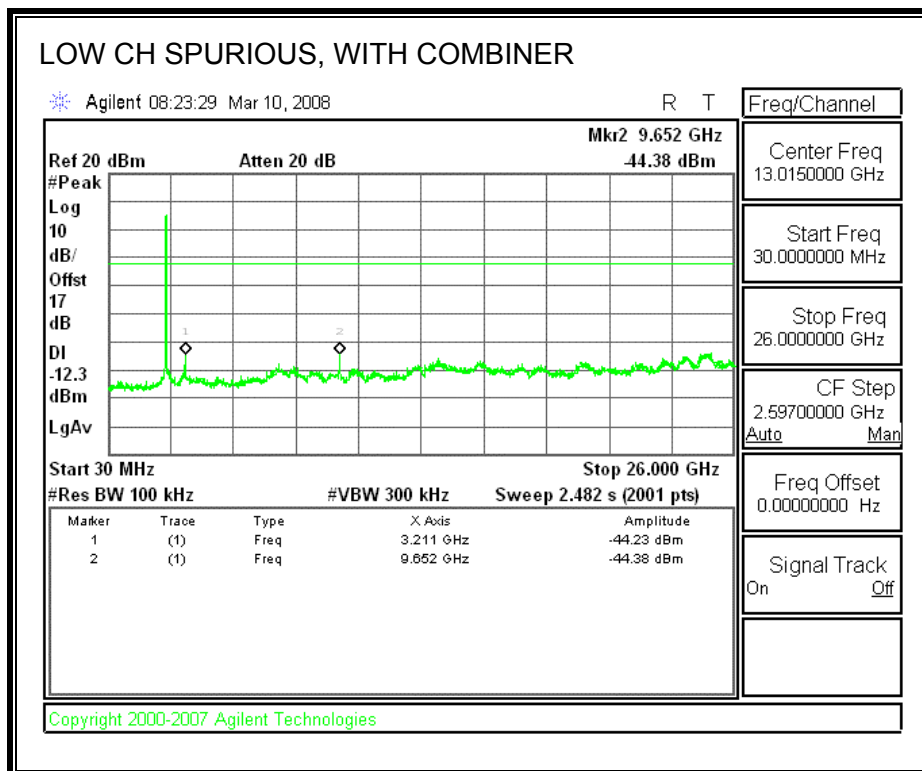

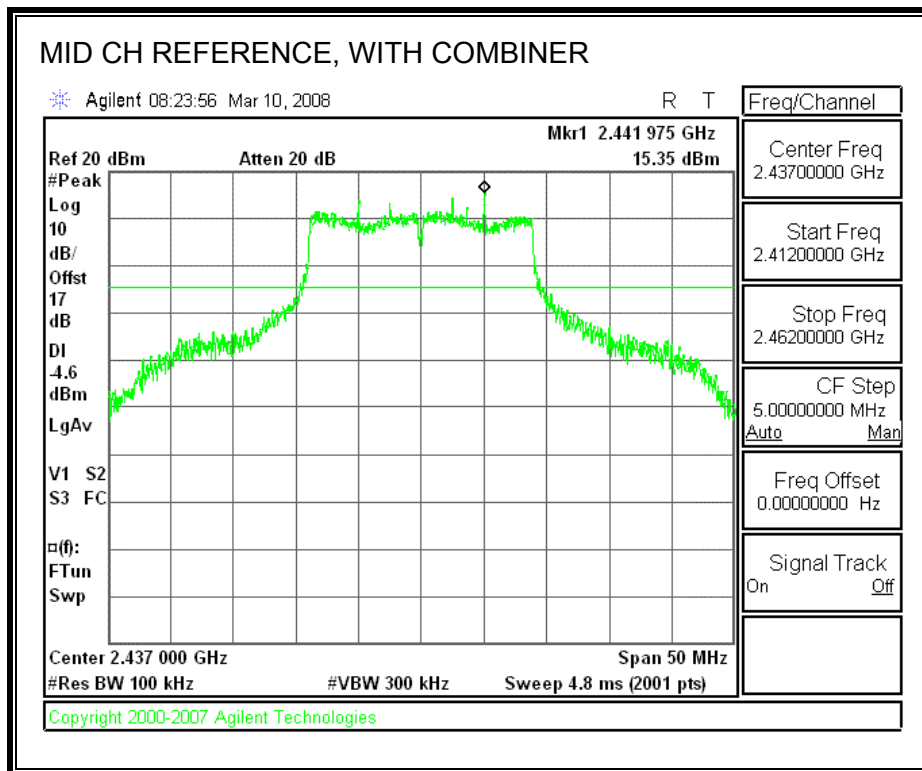

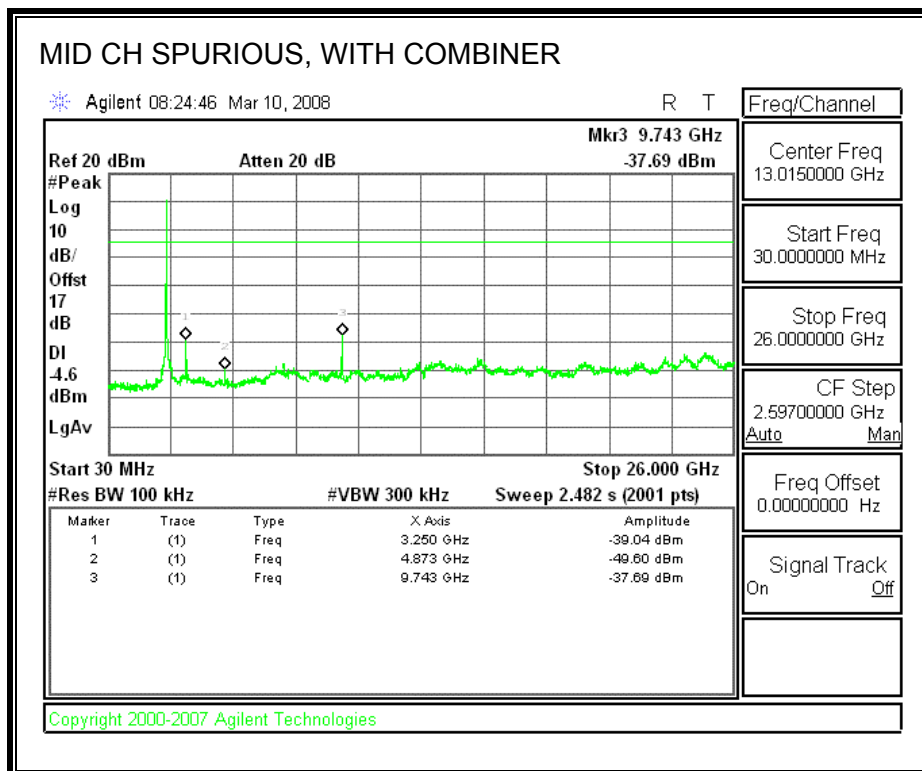

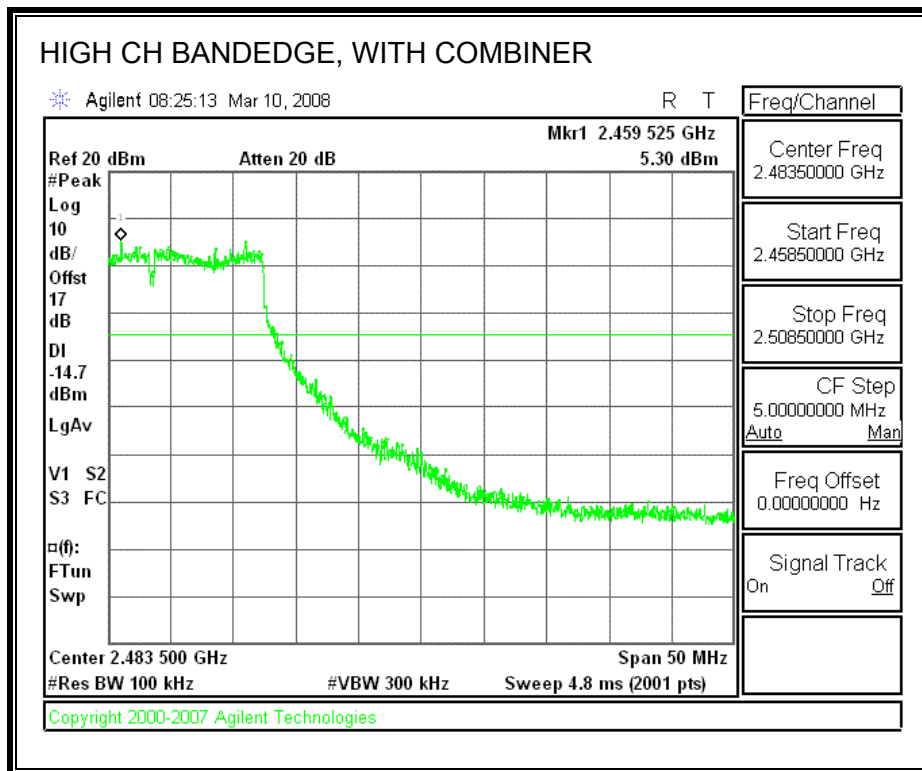

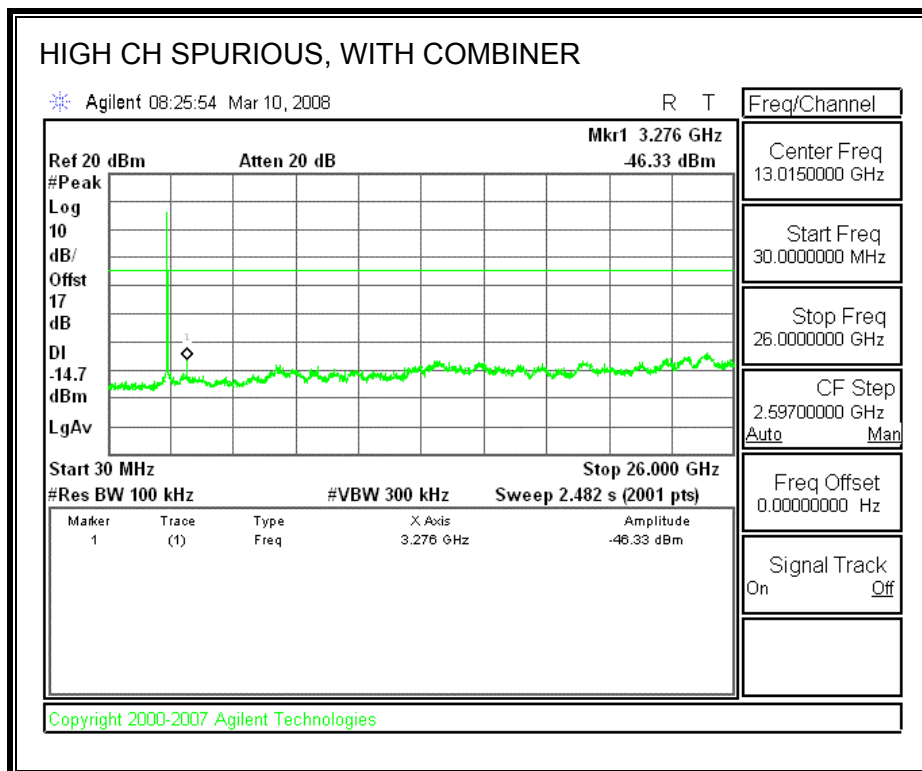

7.4. 802.11n HT40 MODE IN THE 2.4 GHz BAND

7.4.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)	Minimum Limit (MHz)
Middle	2437	36.342	0.5

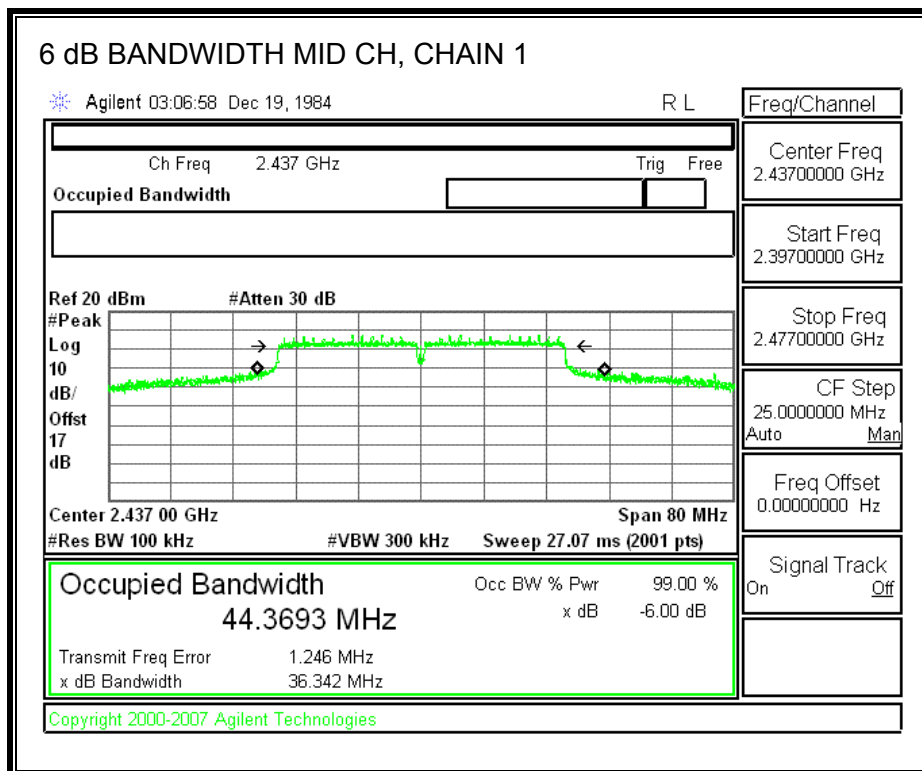

7.4.2. 99% BANDWIDTH

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)
Middle	2437	37.9132

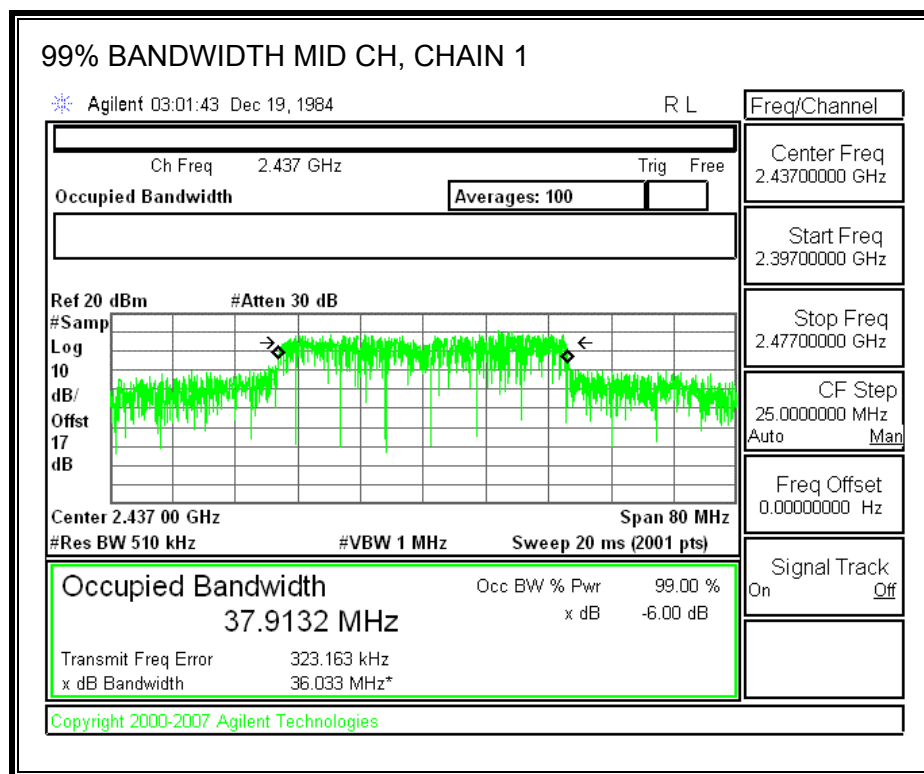

7.4.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


Peak power is measured using the spectrum analyzer's internal channel power integration function. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.


RESULTS

Channel	Frequency (MHz)	Limit (dBm)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)	Margin (dB)
Low	2422	30.00	17.87	17.69	20.79	-9.21
Mid	2437	30.00	21.58	22.21	24.92	-5.08
High	2452	30.00	17.82	17.93	20.89	-9.11


CHAIN 0 OUTPUT POWER

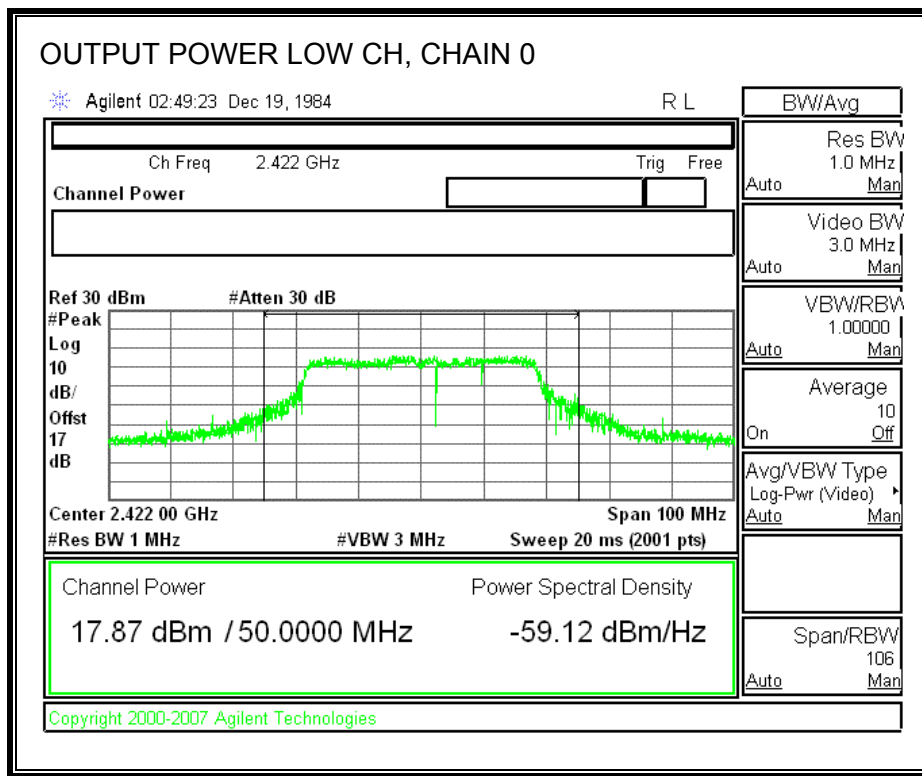


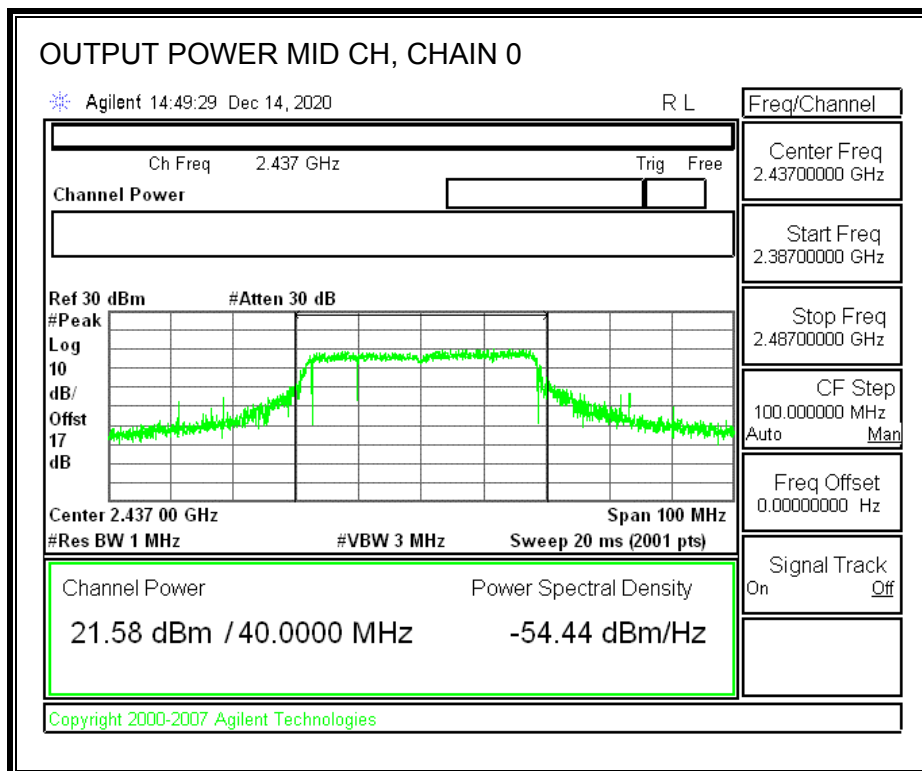


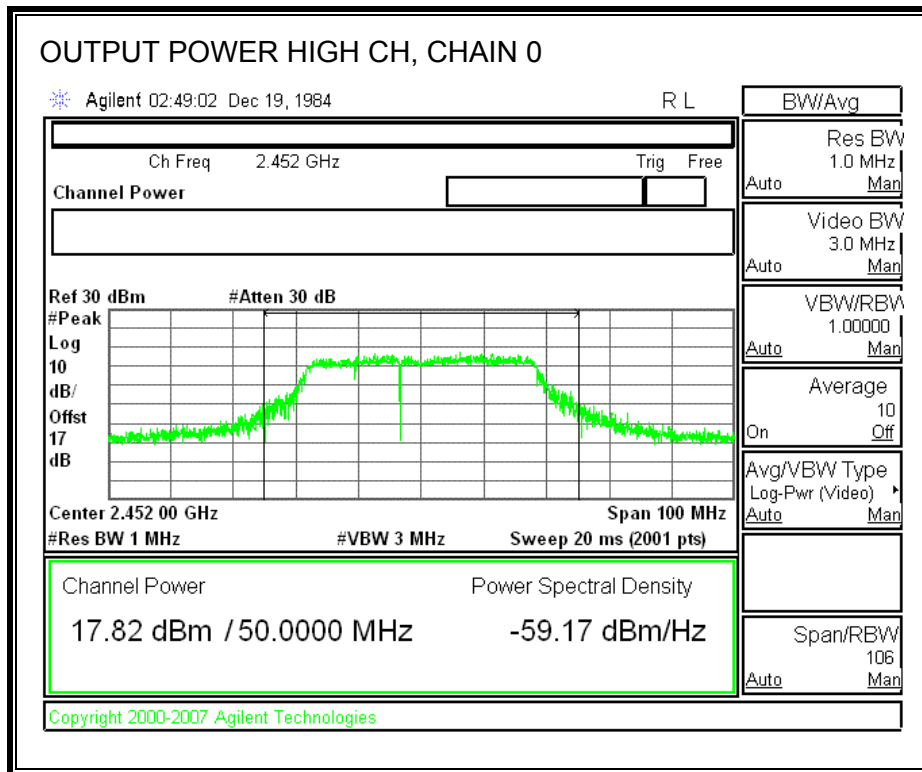

CHAIN 1 OUTPUT POWER

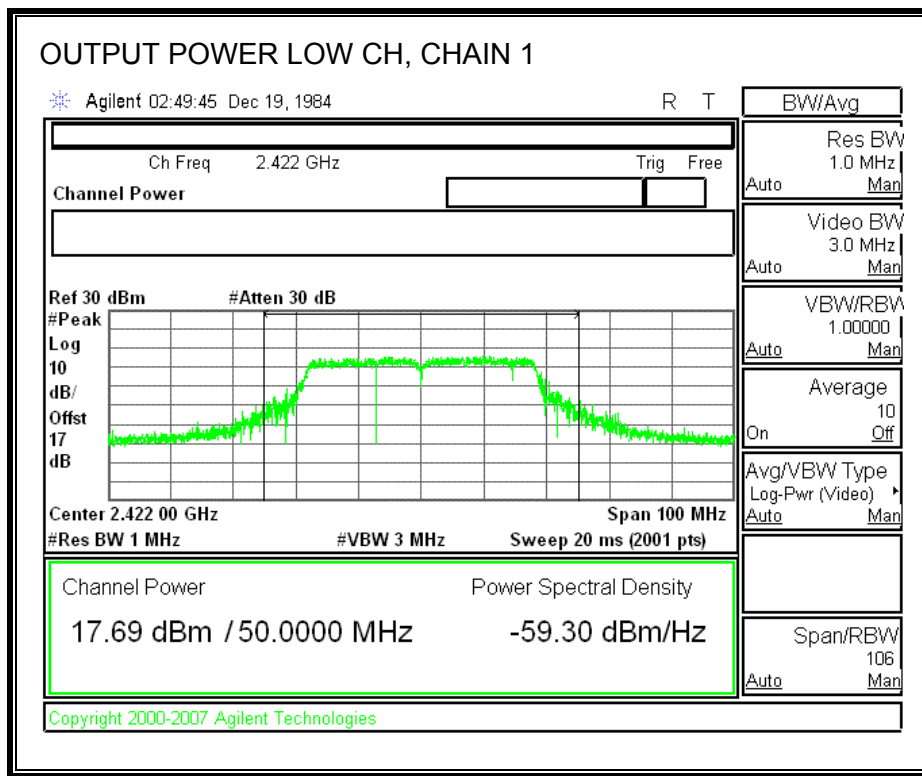

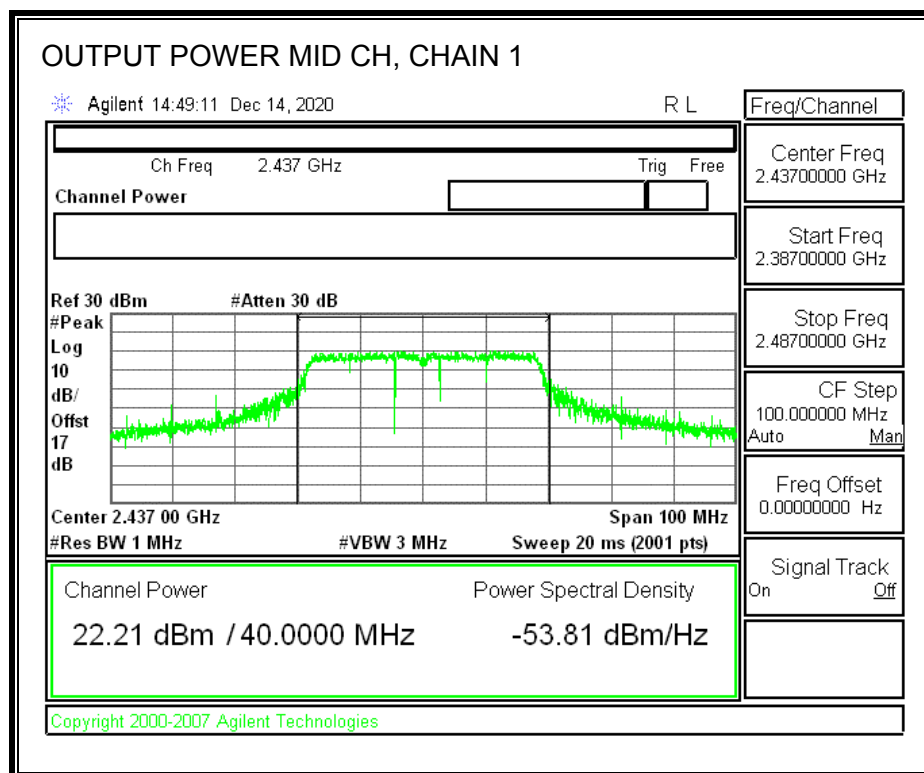

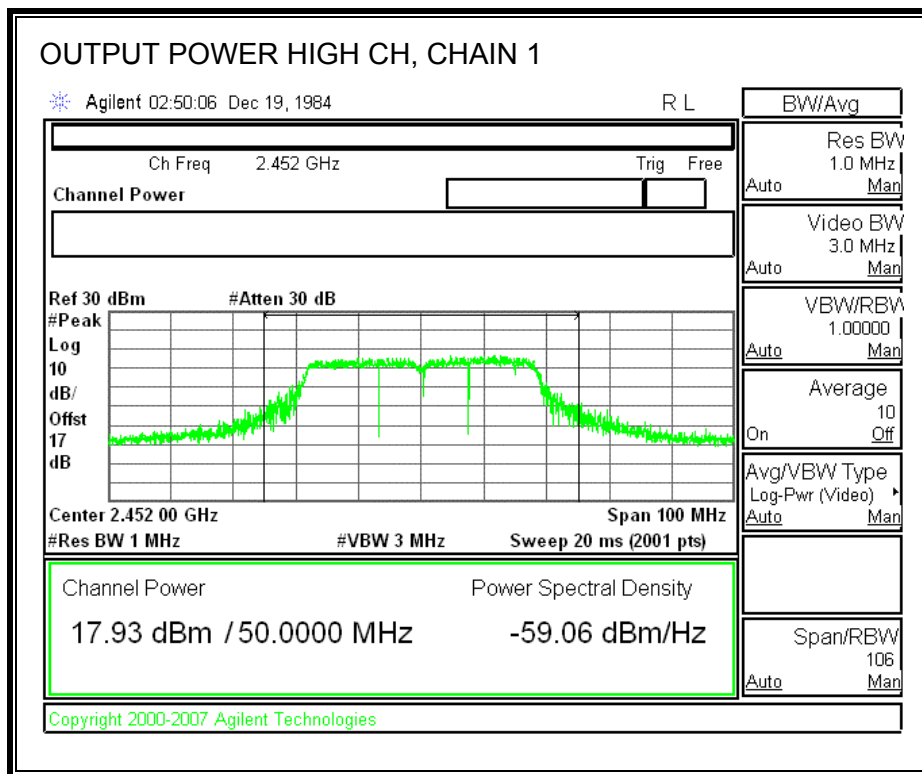

7.4.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 17 dB (including 16 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	2422	12.49	12.23	15.37
Middle	2437	16.15	16.91	19.56
High	2452	12.76	12.80	15.79

7.4.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS

Channel	Frequency (MHz)	PSD with Combiner (dBm)	Limit (dBm)	Margin (dB)
Low	2422	-3.51	8	-11.51
Middle	2437	3.55	8	-4.45
High	2452	-2.40	8	-10.40

POWER SPECTRAL DENSITY, WITH COMBINER

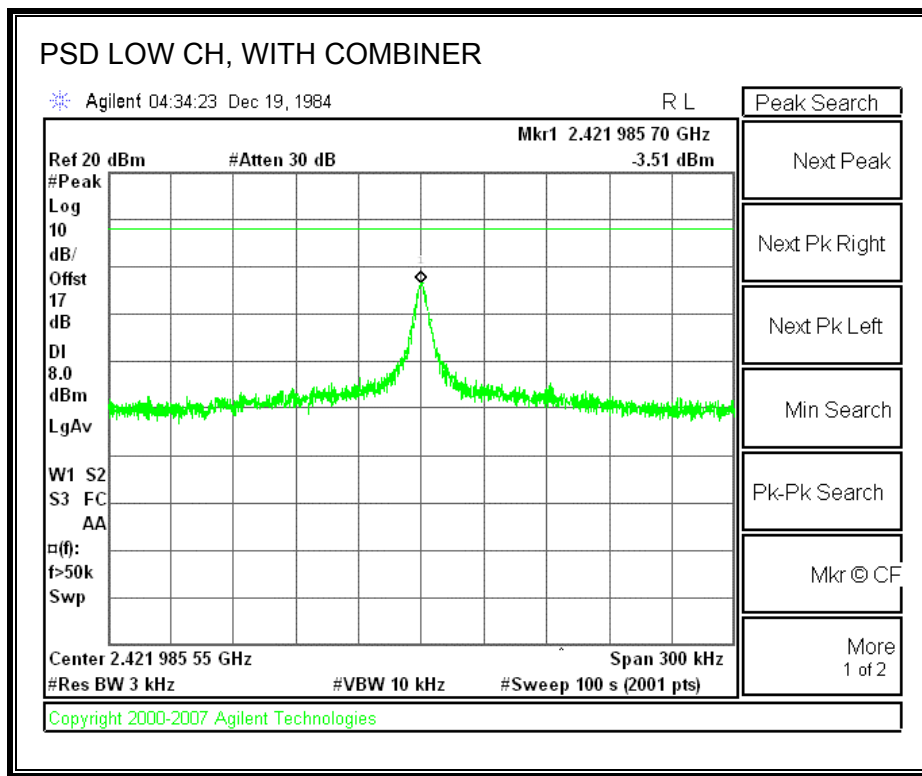

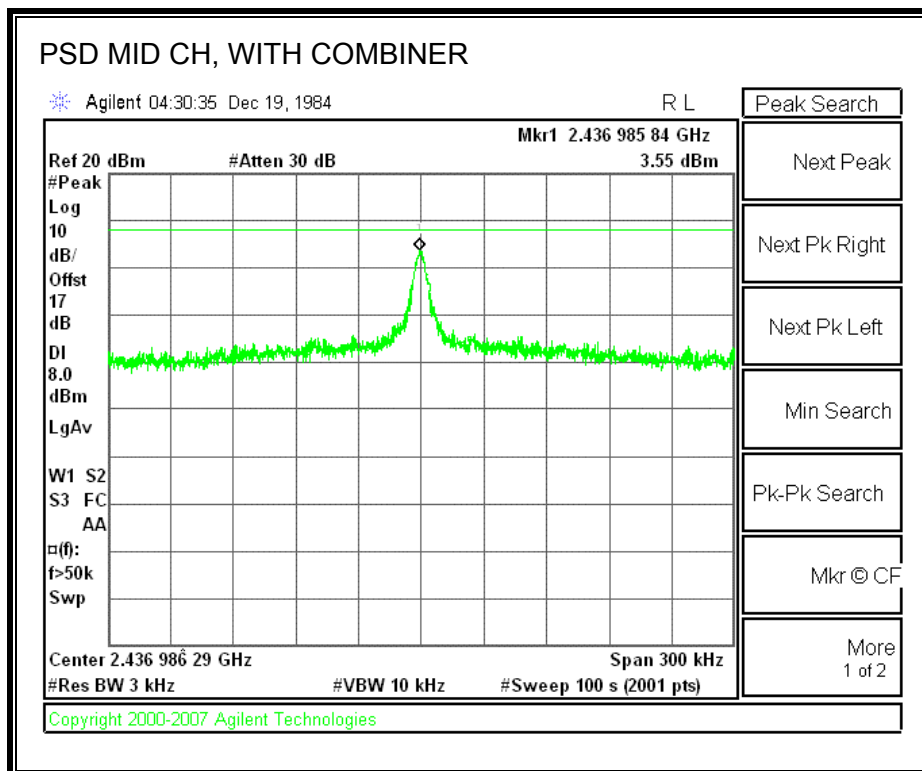

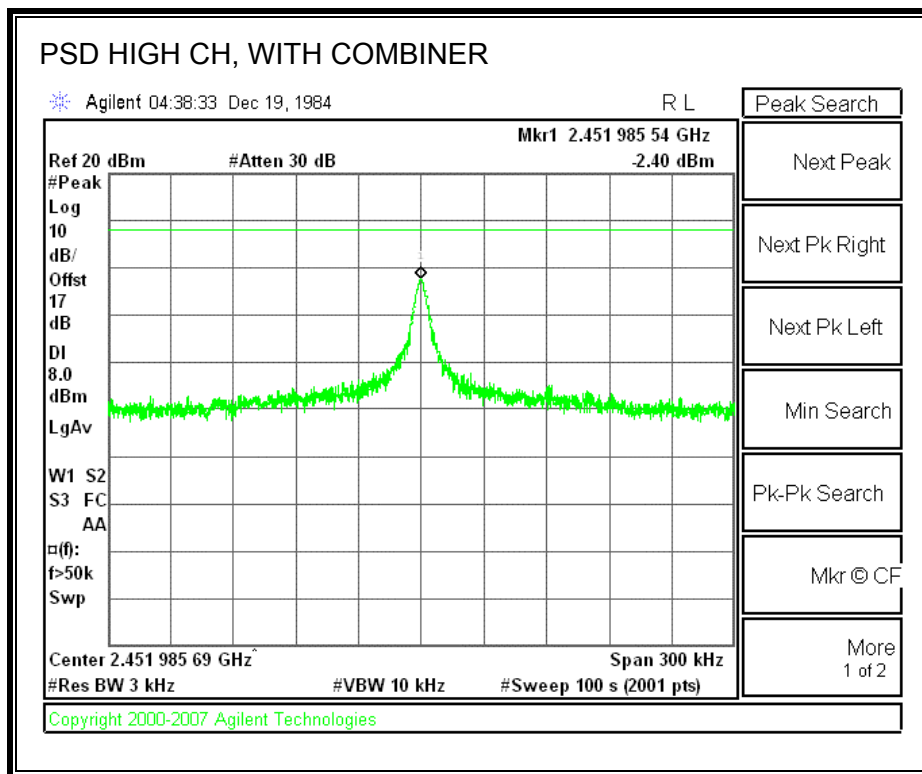

7.4.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS WITH COMBINER

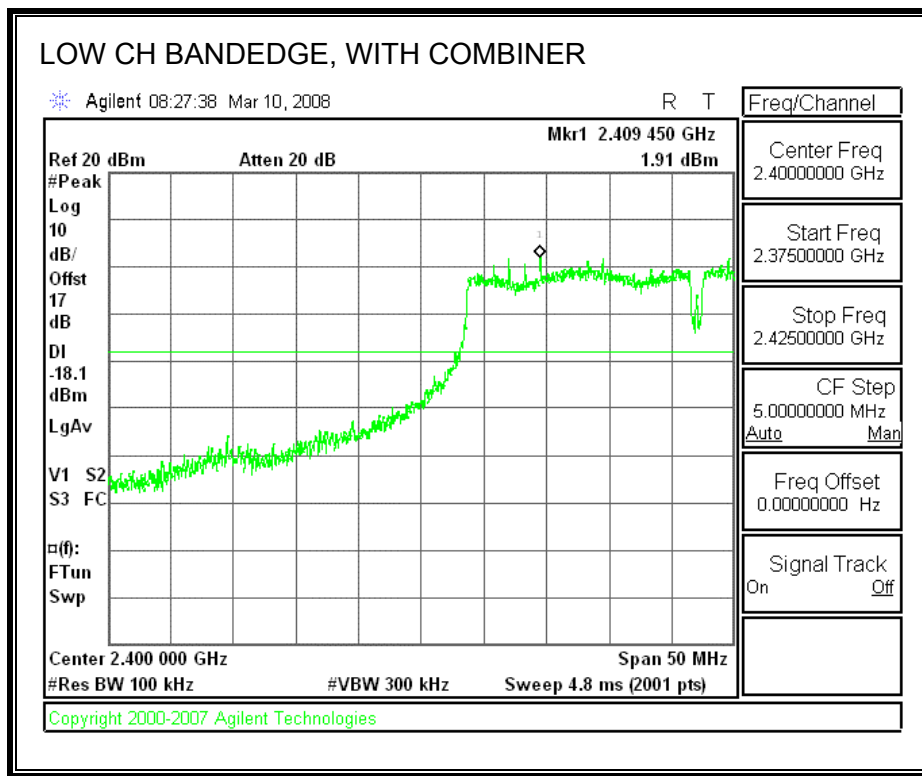


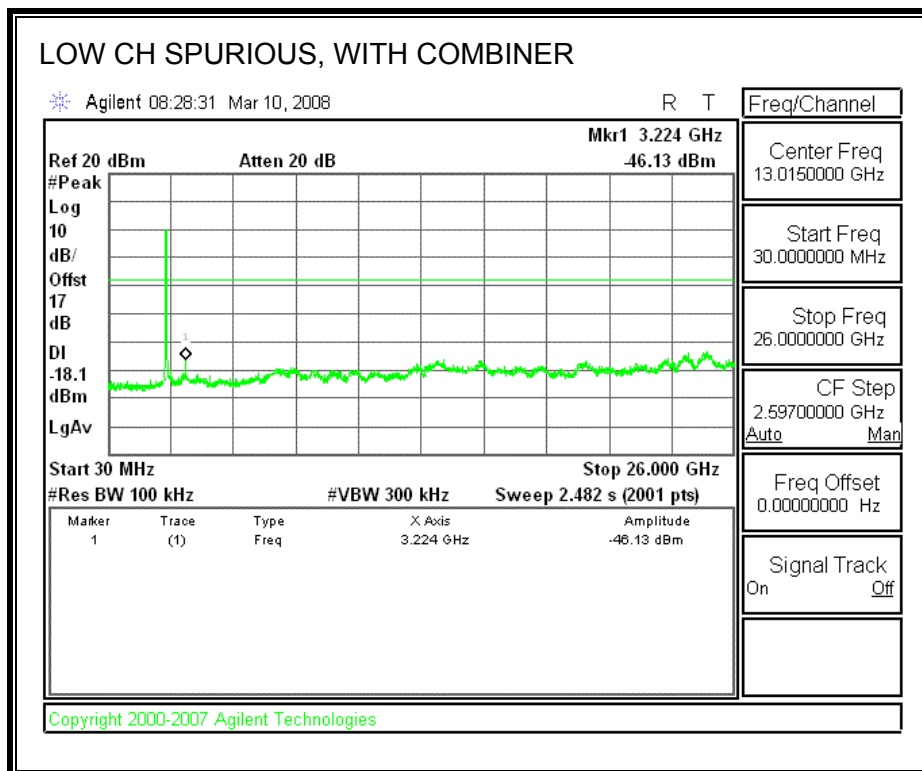

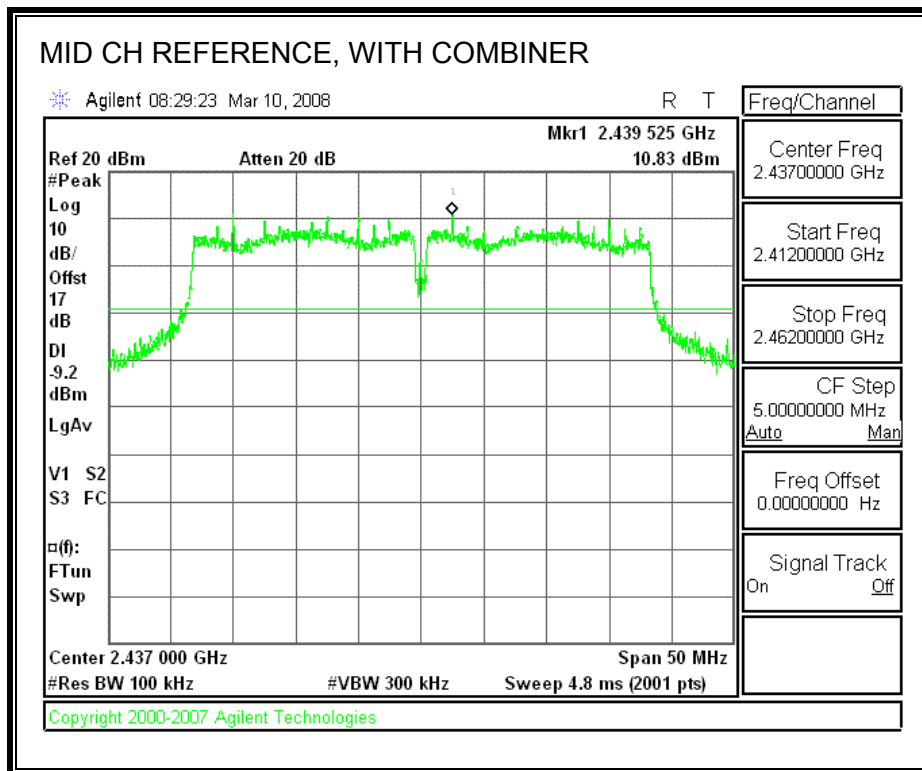

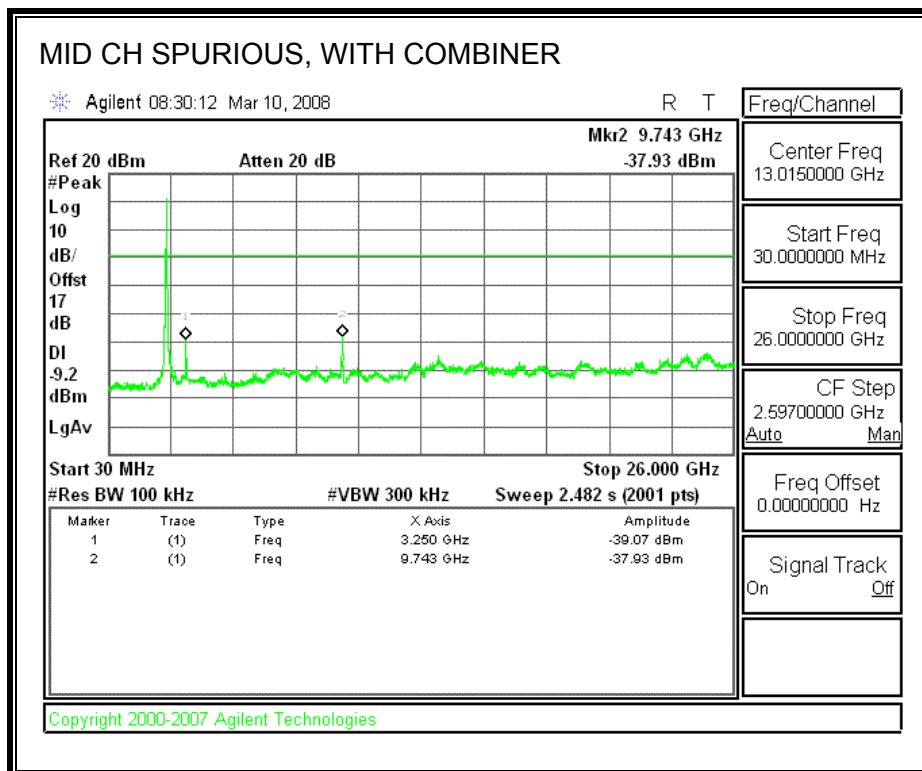

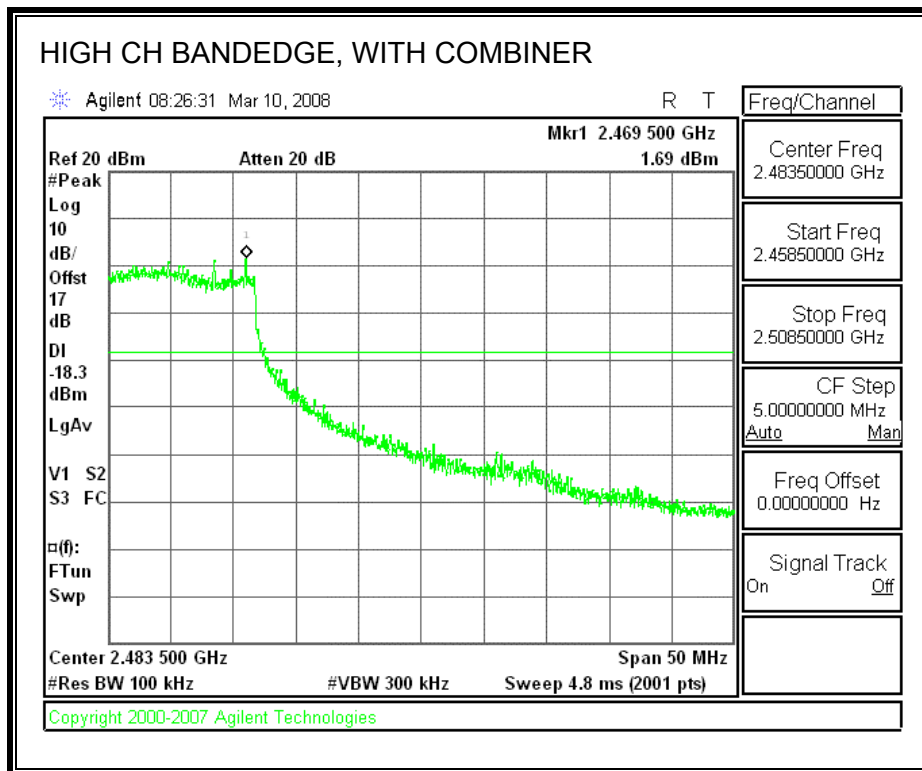

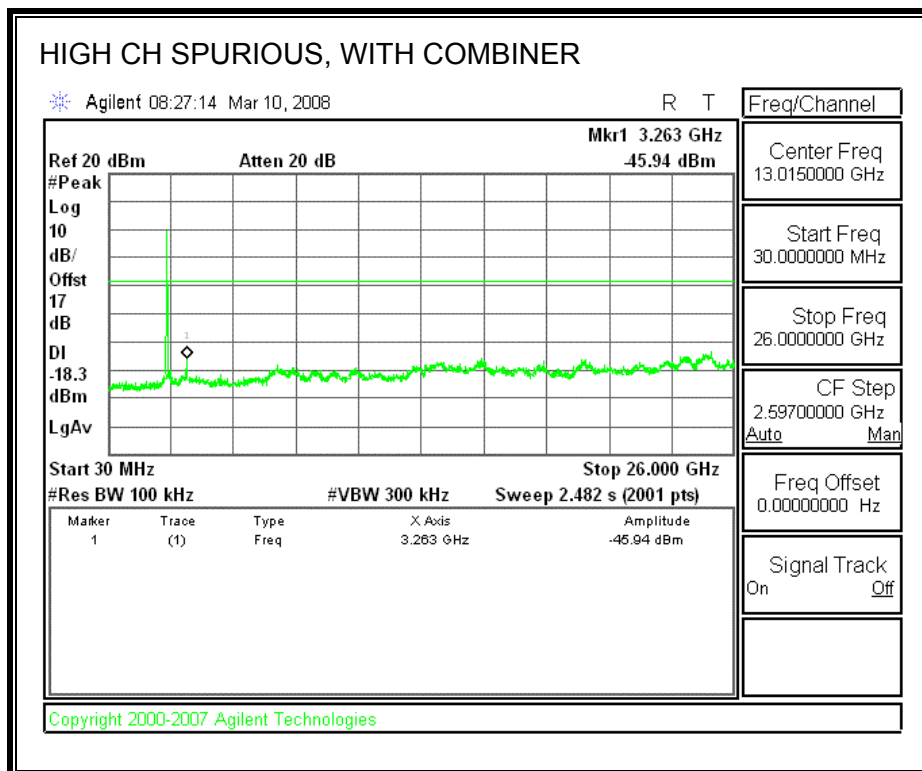

7.5. 802.11a MODE IN THE 5.8 GHz BAND

7.5.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)	Minimum Limit (MHz)
Middle	5785	16.426	0.5

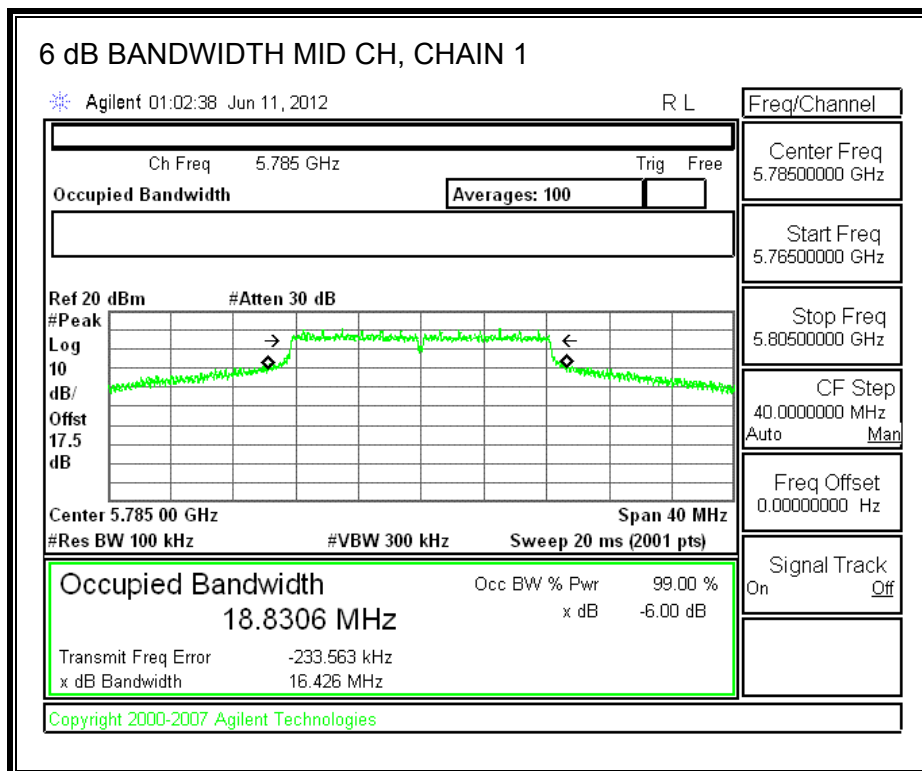

7.5.2. 99% BANDWIDTH

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)
Middle	5785	17.539

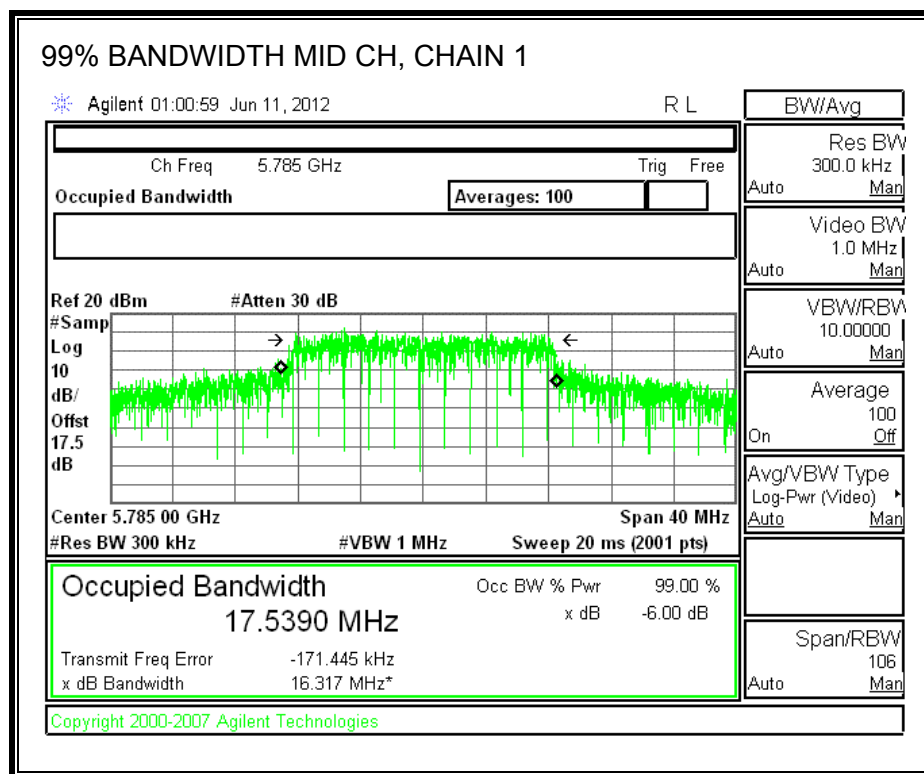

7.5.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

Effective Legacy Gain (dBi)
6.76

The maximum antenna gain is 6.76 dBi for P-To-M; therefore the limit is 29.24 dBm.


TEST PROCEDURE


Peak power is measured using the spectrum analyzer's internal channel power integration function. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.


RESULTS

Channel	Frequency (MHz)	Limit (dBm)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)	Margin (dB)
Low	5745	29.24	25.78	25.92	28.86	-0.38
Mid	5785	29.24	25.81	25.93	28.88	-0.36
High	5825	29.24	25.82	26.12	28.98	-0.26


CHAIN 0 OUTPUT POWER

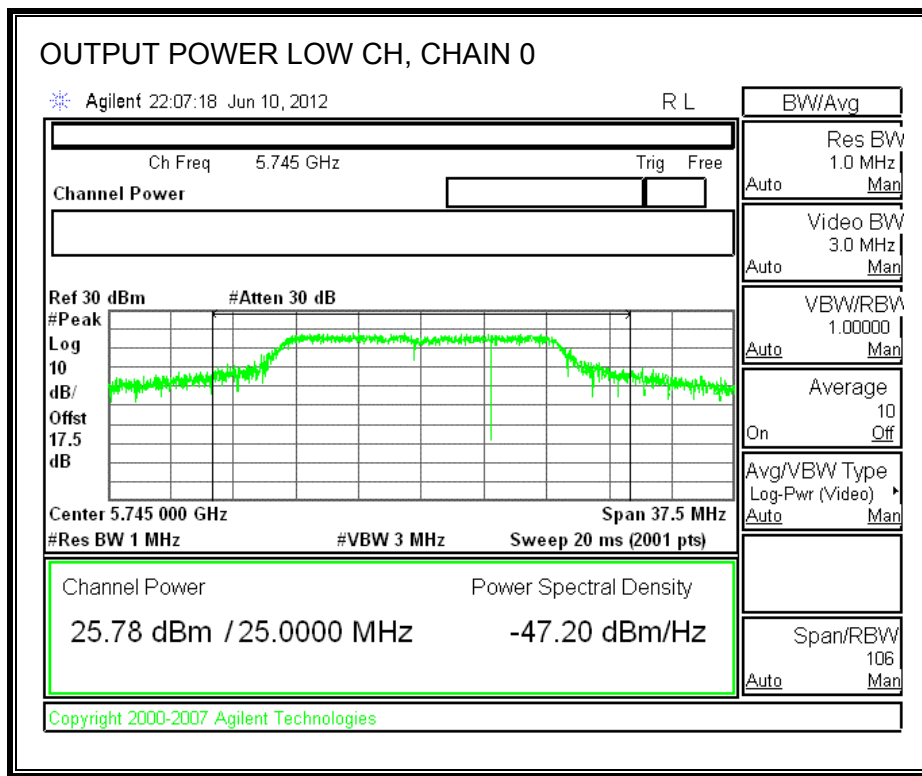


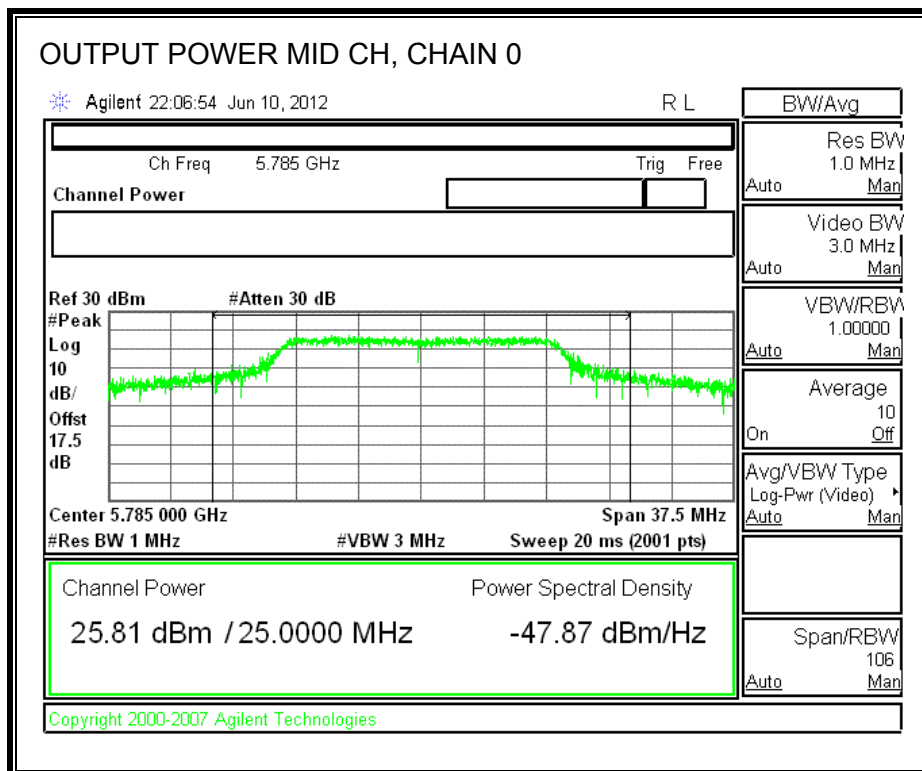


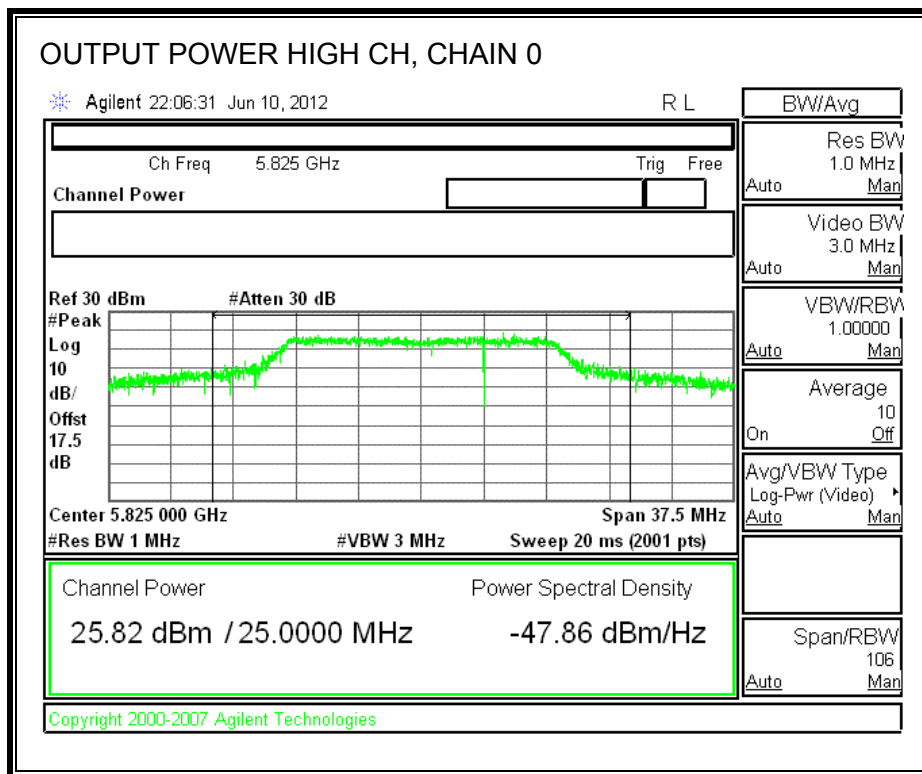

CHAIN 1 OUTPUT POWER

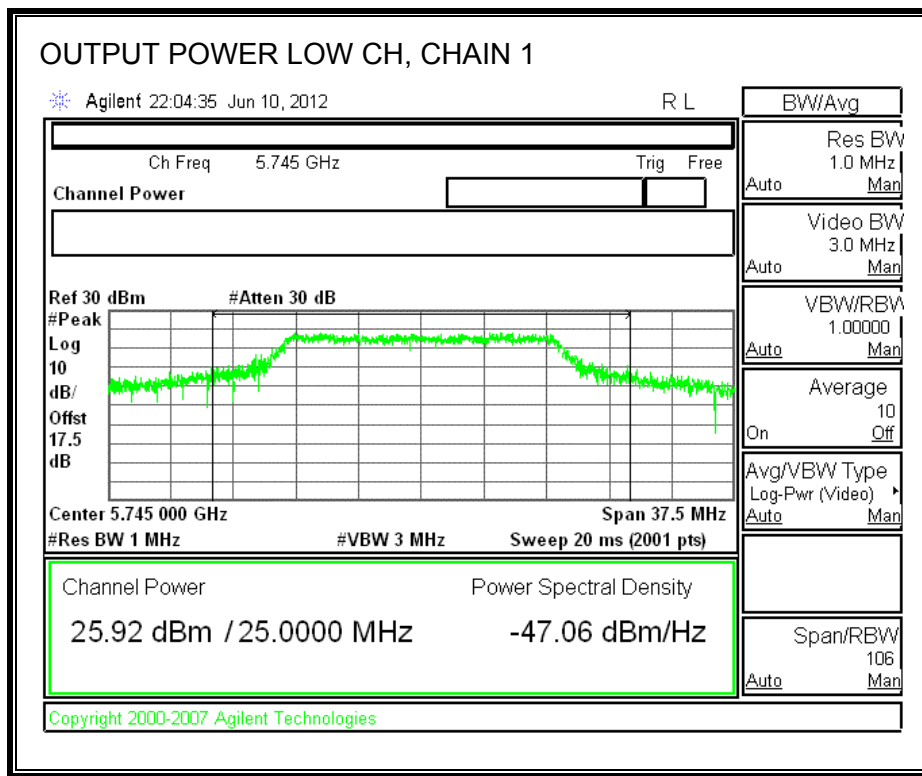

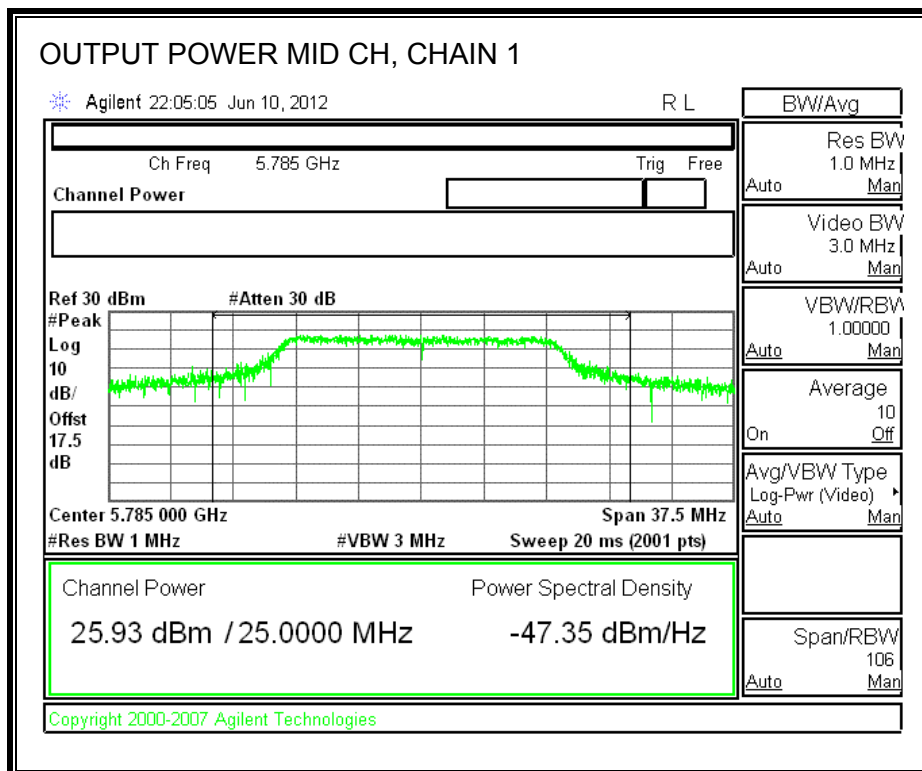

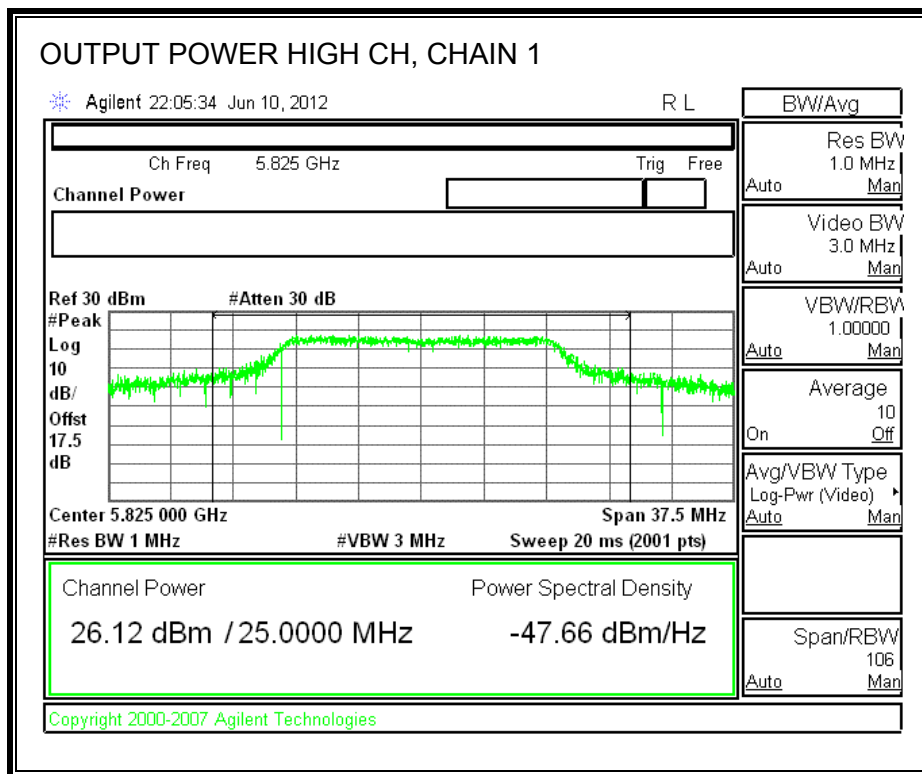

7.5.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 17.5 dB (including 16 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5745	19.58	19.71	22.66
Middle	5785	19.20	19.57	22.40
High	5825	19.03	19.21	22.13

7.5.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS:

Channel	Frequency (MHz)	PSD with Combiner (dBm)	Limit (dBm)	Margin (dB)
Low	5745	2.05	8	-5.95
Middle	5785	3.80	8	-4.20
High	5825	0.64	8	-7.36

POWER SPECTRAL DENSITY, WITH COMBINER

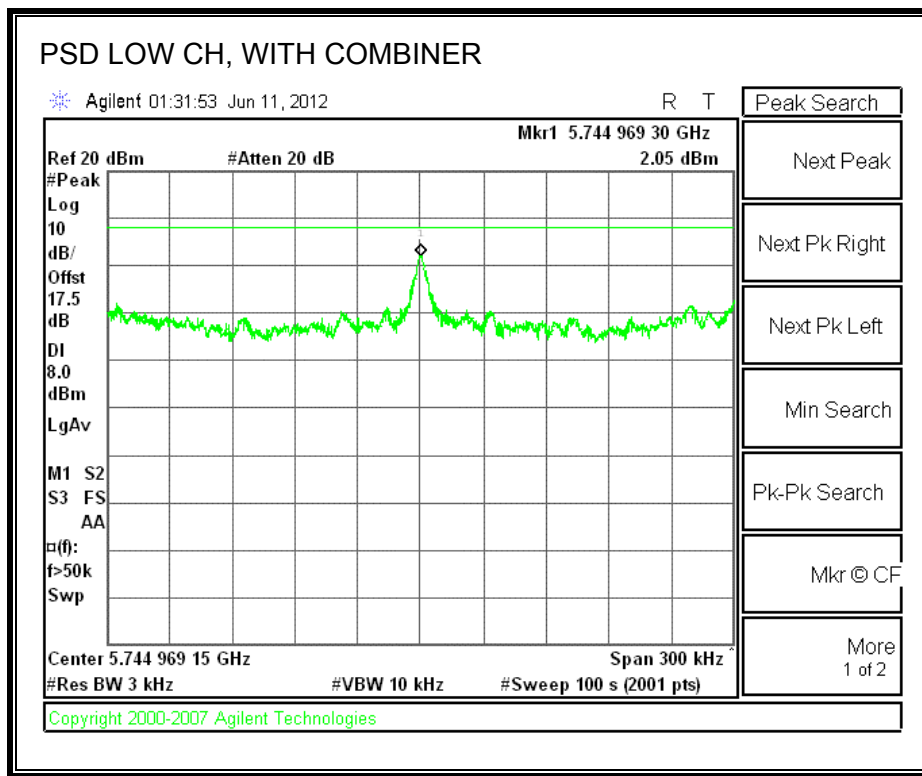

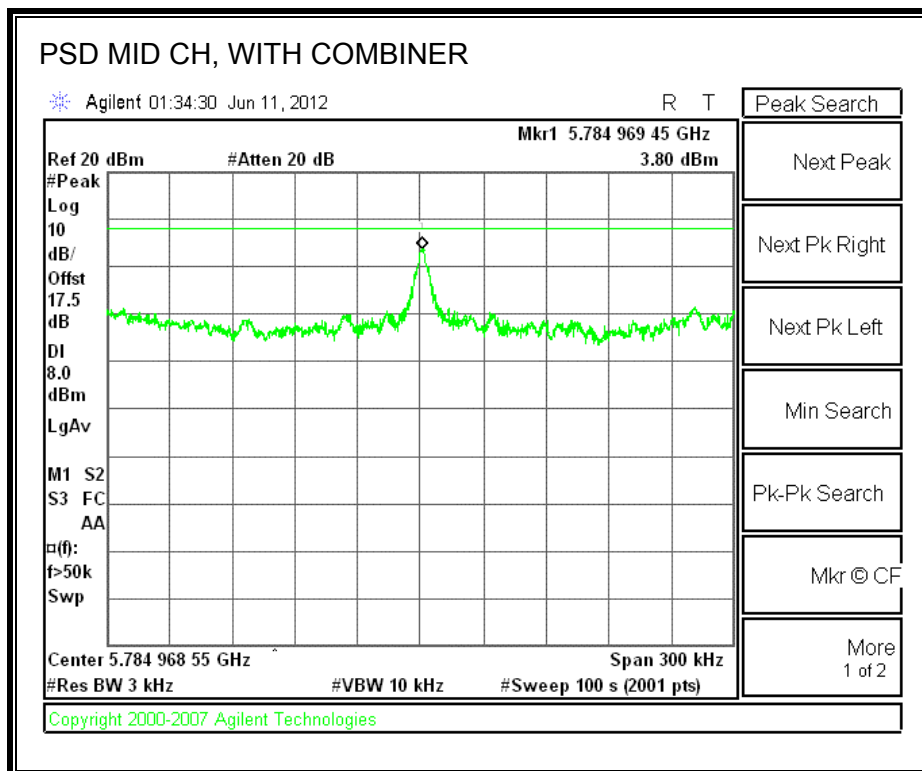

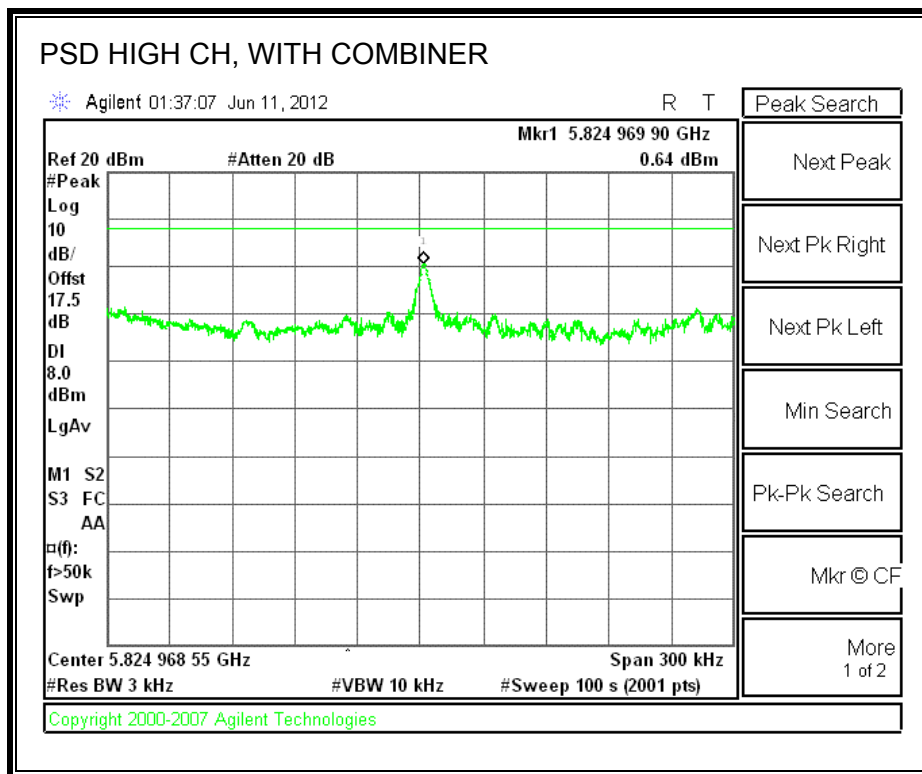

7.5.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS WITH COMBINER

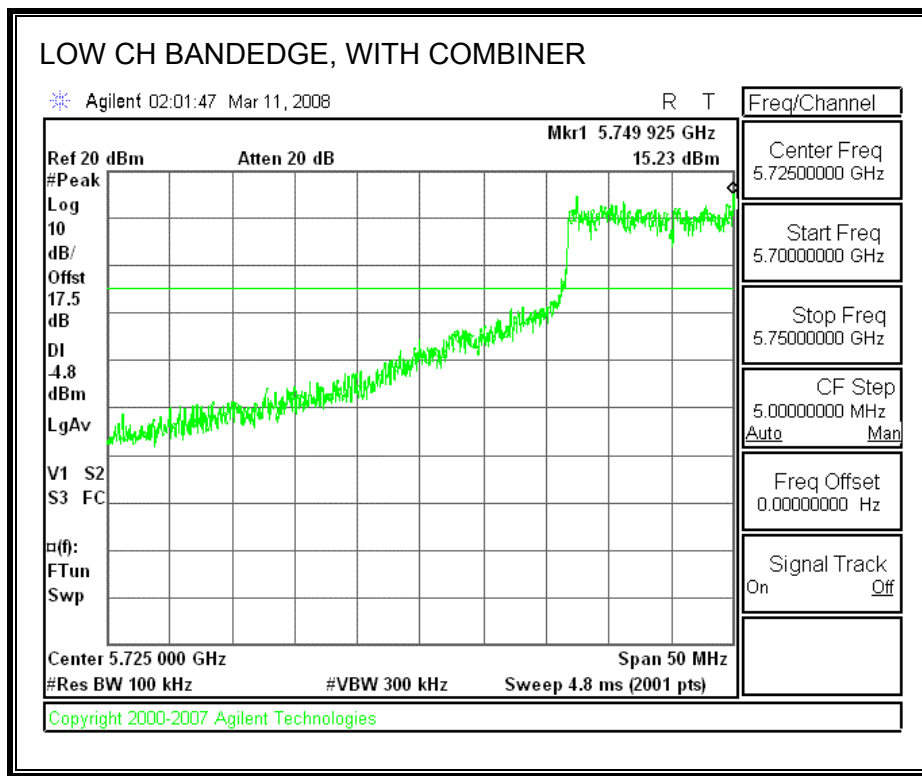


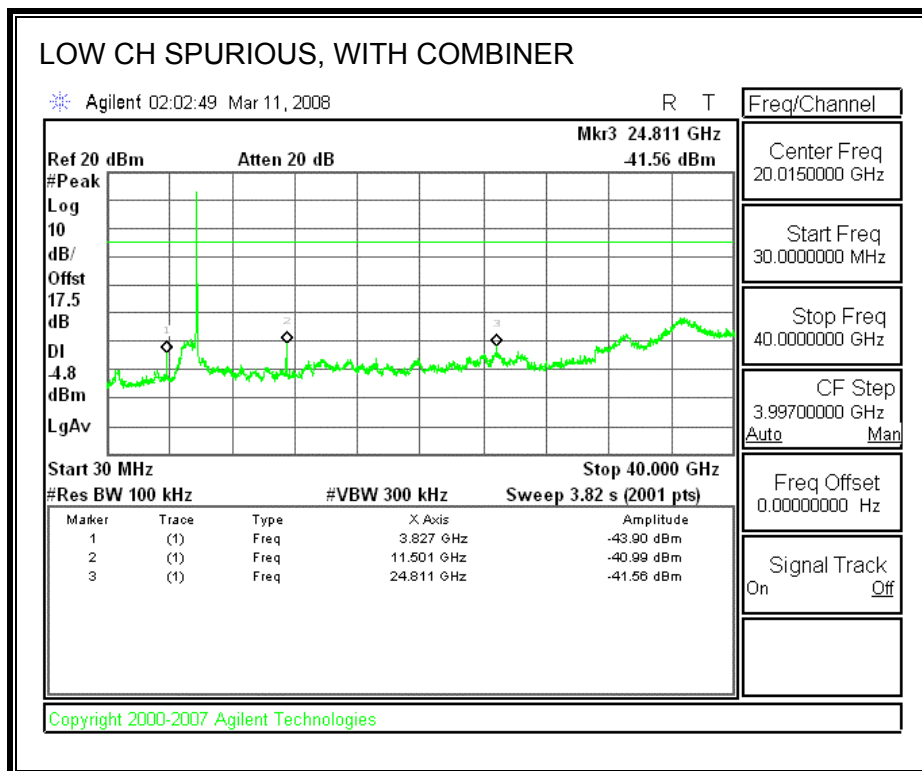

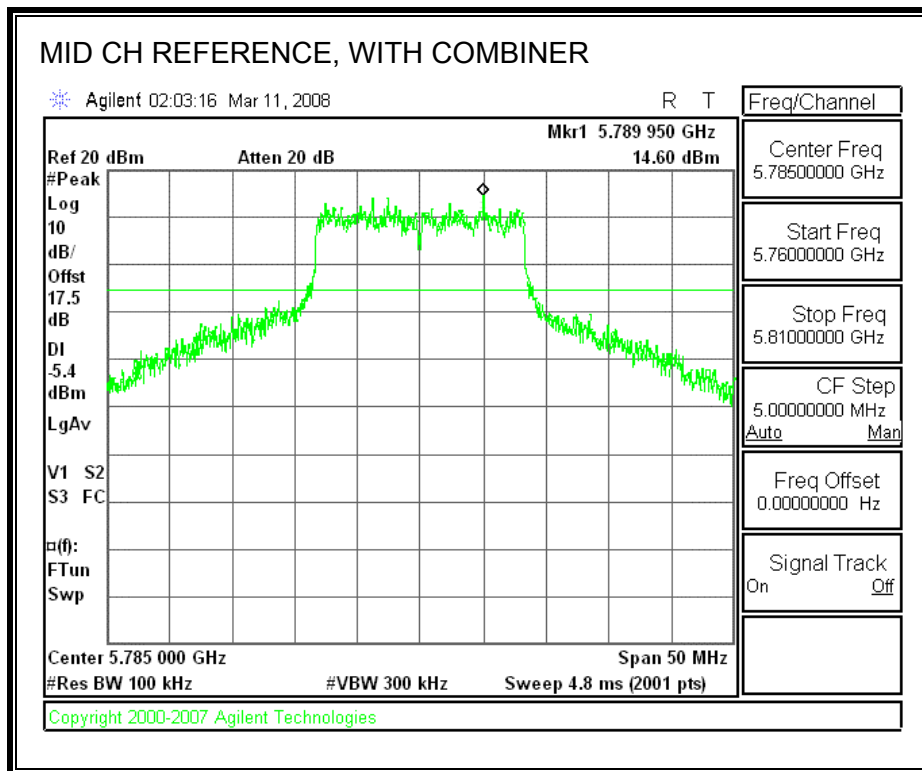

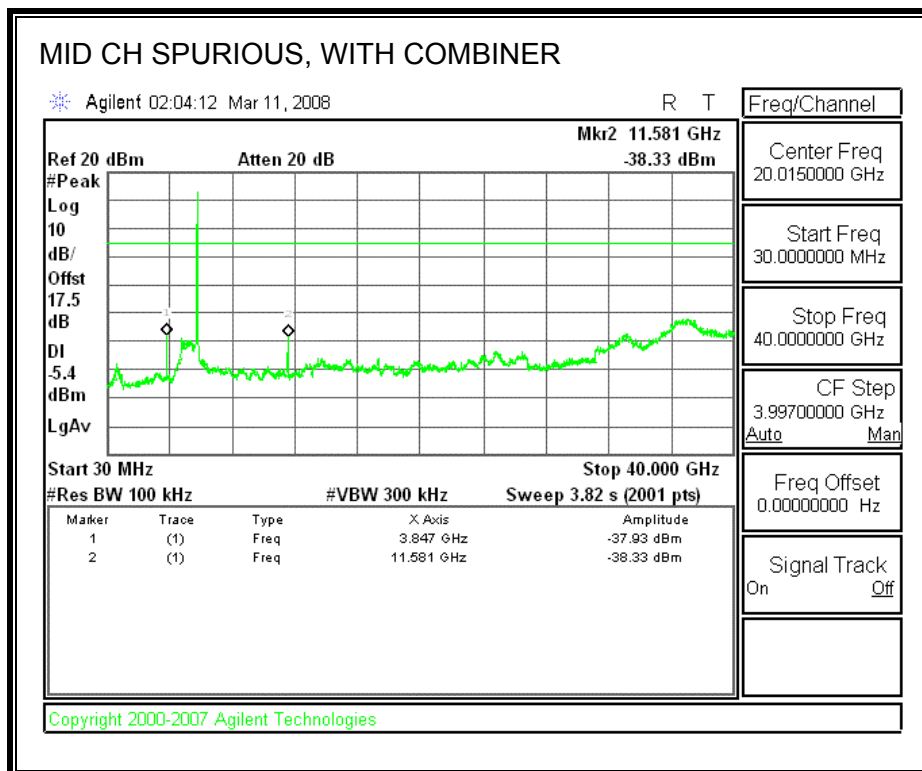

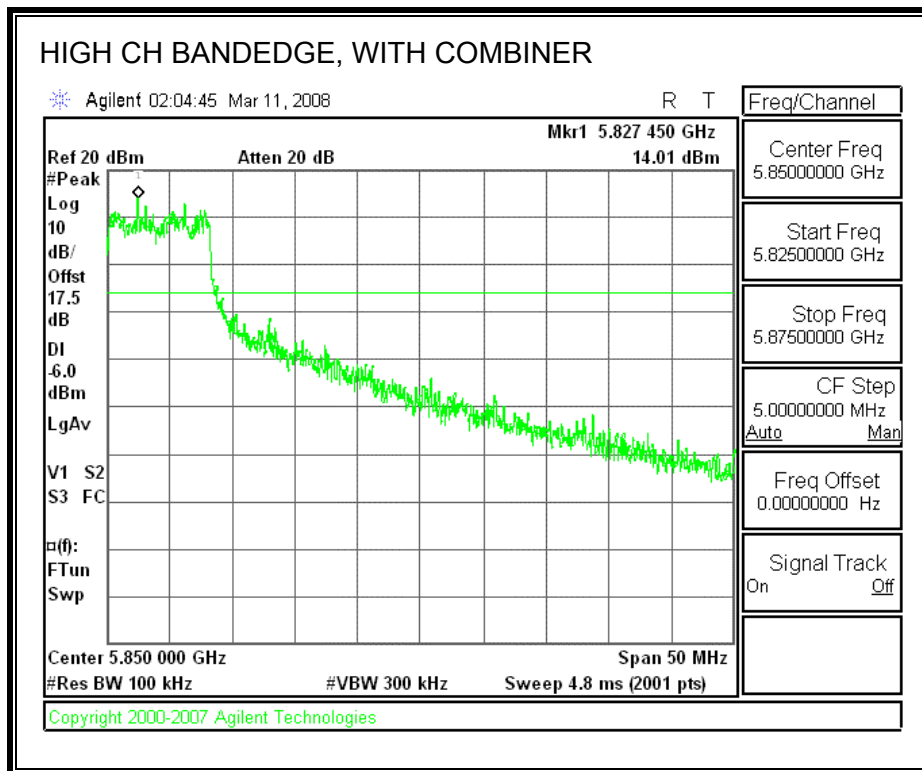

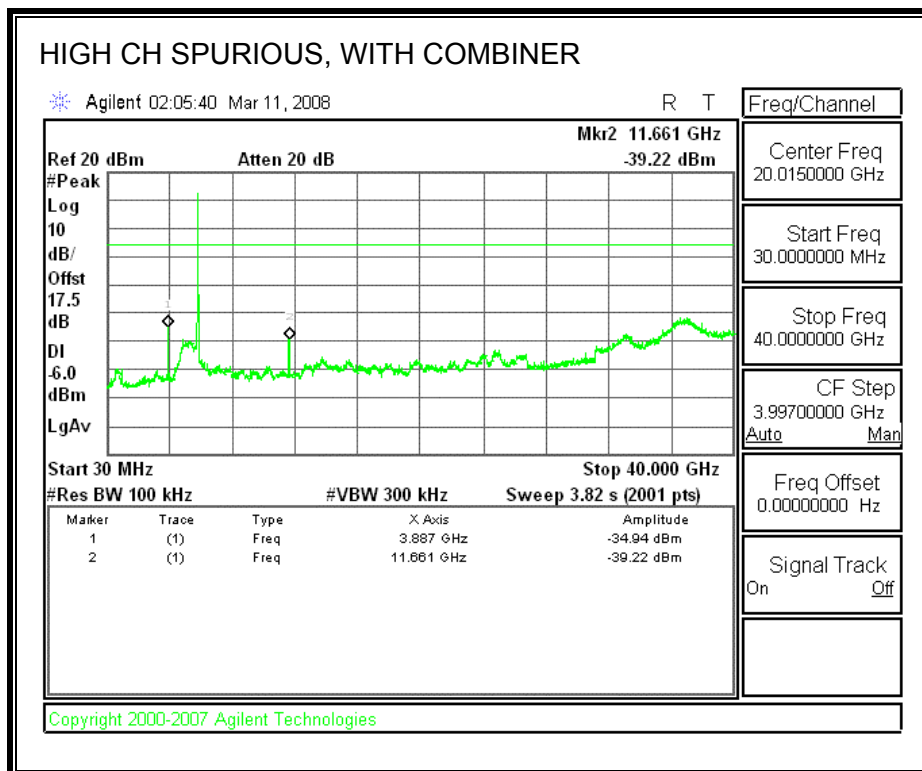

7.6. 802.11n HT20 MODE IN THE 5.8 GHz BAND

7.6.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)	Minimum Limit (MHz)
Middle	5785	17.571	0.5

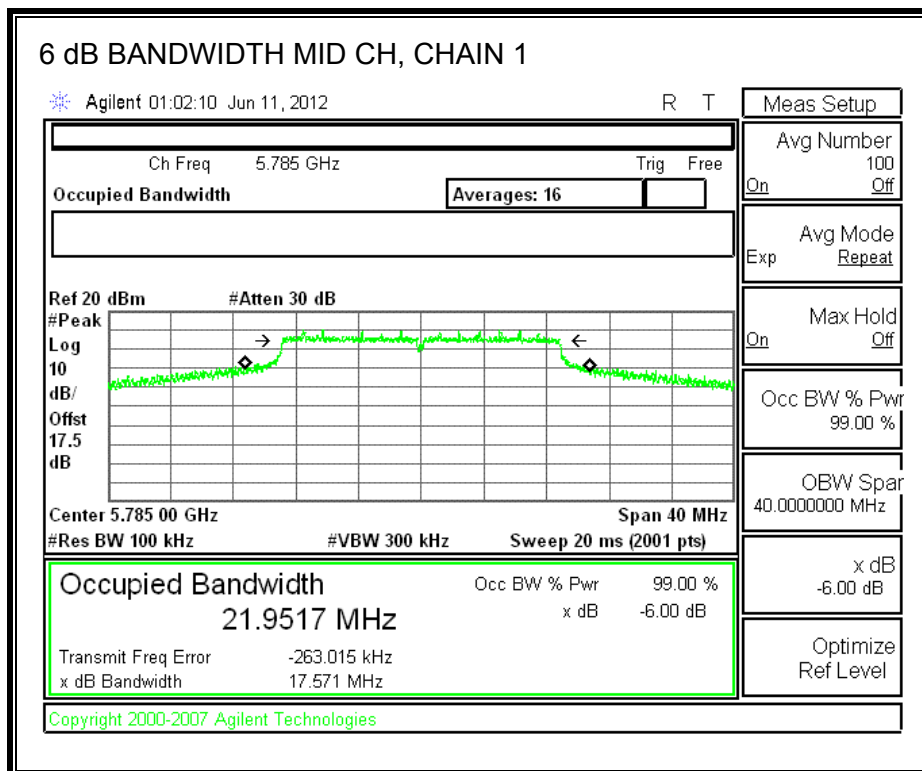

7.6.2. 99% BANDWIDTH

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)
Middle	5785	18.5121

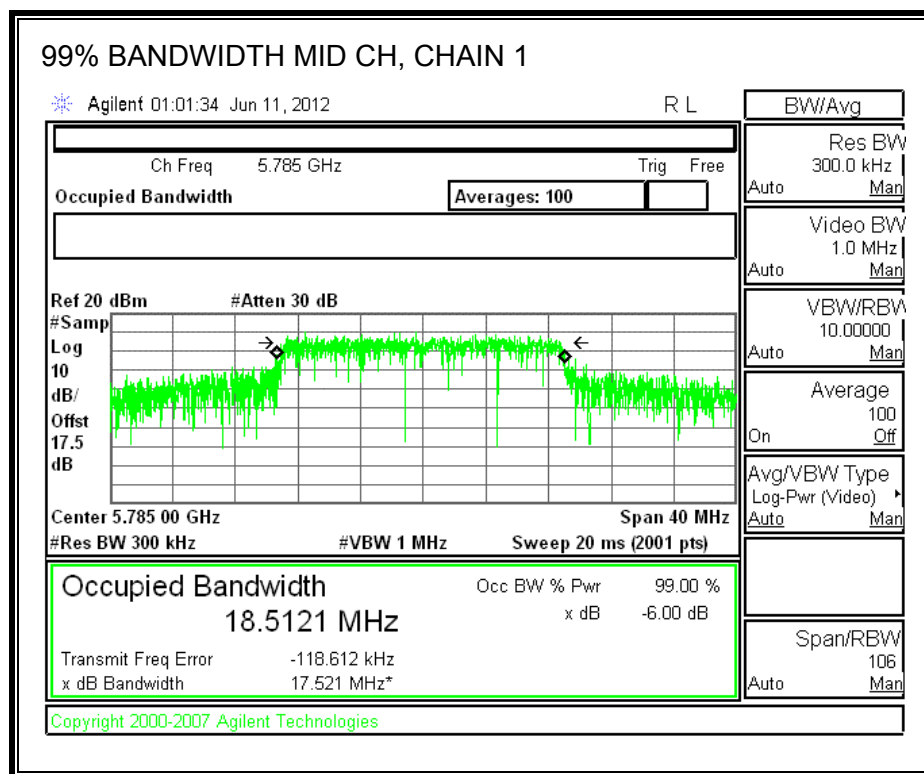

7.6.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


Peak power is measured using the spectrum analyzer's internal channel power integration function. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.


RESULTS

Channel	Frequency (MHz)	Limit (dBm)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)	Margin (dB)
Low	5745	30.00	26.32	26.07	29.21	-0.79
Mid	5785	30.00	25.86	26.15	29.02	-0.98
High	5825	30.00	25.88	26.17	29.04	-0.96


CHAIN 0 OUTPUT POWER

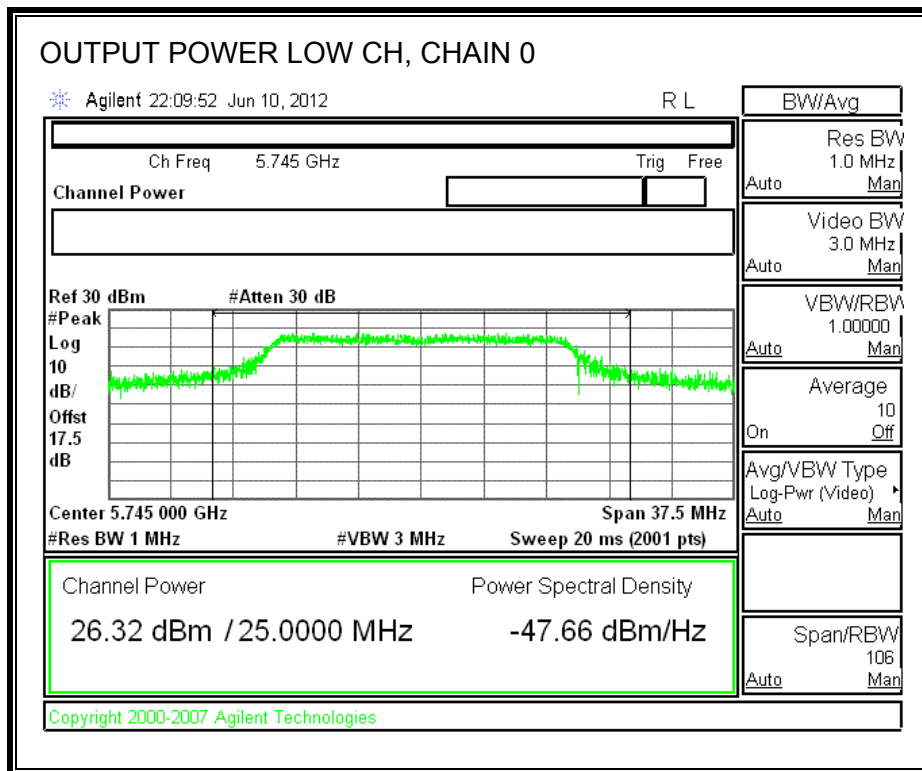


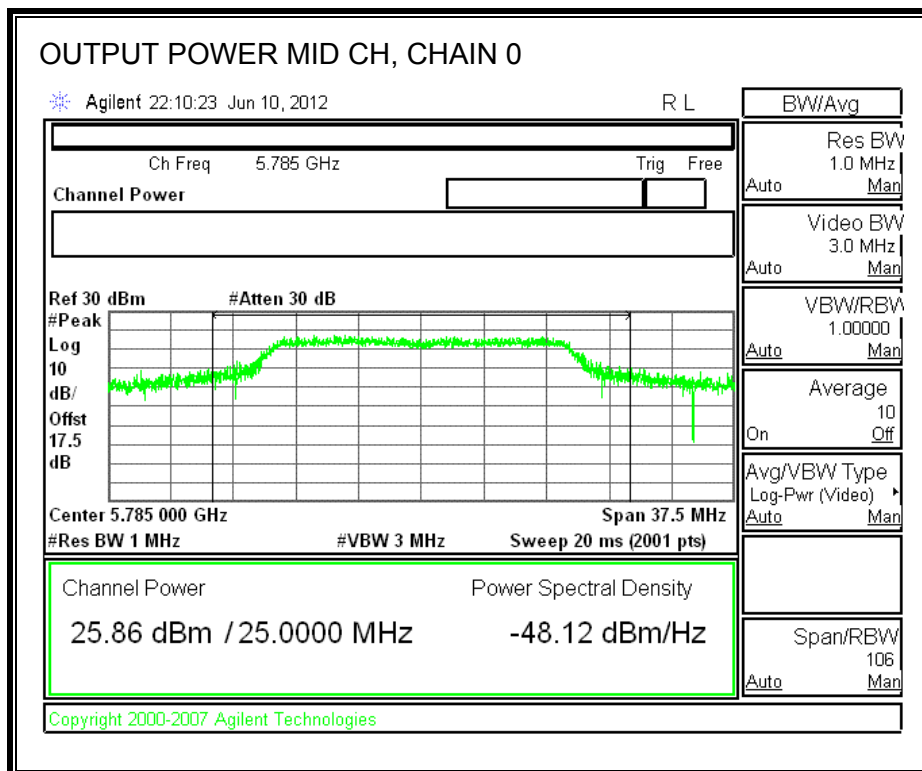


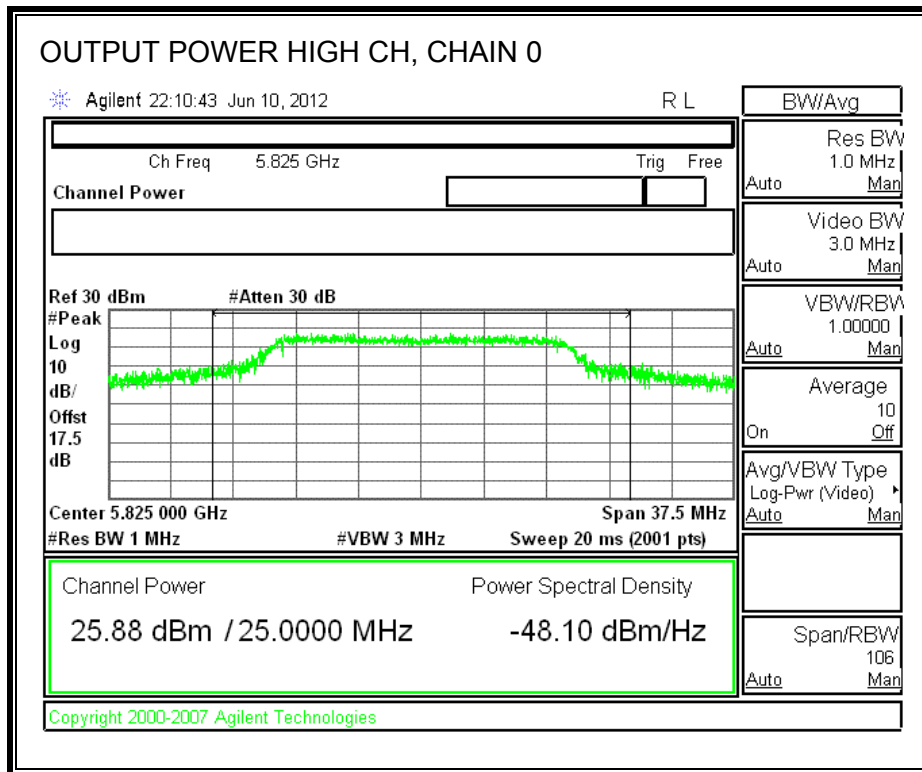

CHAIN 1 OUTPUT POWER

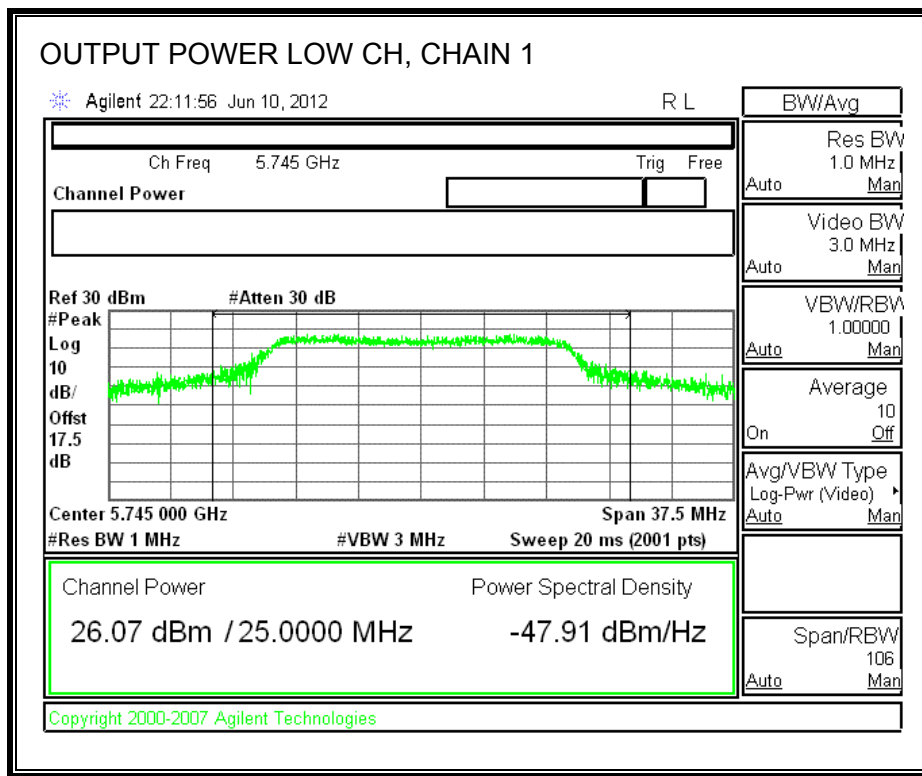

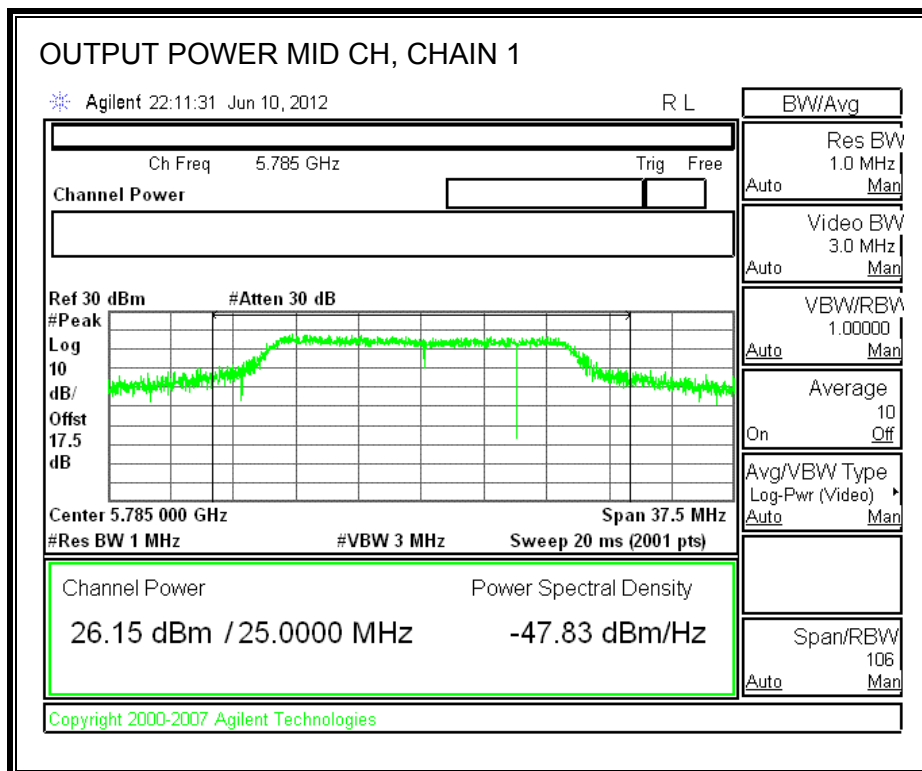

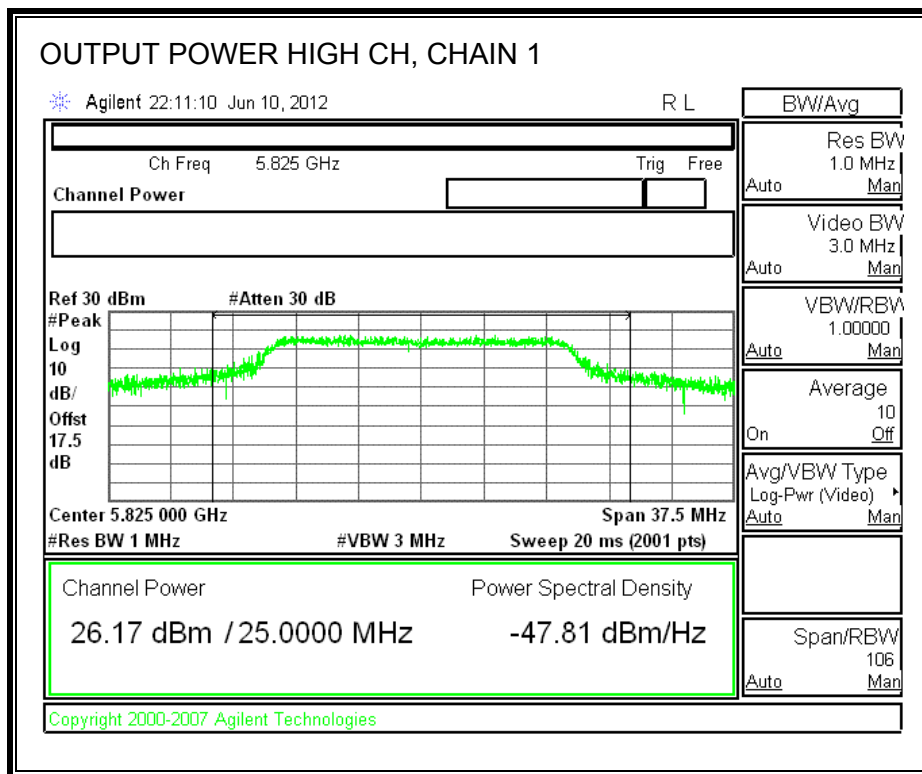

7.6.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 17.5 dB (including 16 dB pad and 1.5 dB cable) entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5745	19.73	19.72	22.74
Middle	5785	19.35	19.54	22.46
High	5825	18.99	19.39	22.20

7.6.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS:

Channel	Frequency (MHz)	PSD with Combiner (dBm)	Limit (dBm)	Margin (dB)
Low	5745	2.93	8	-5.07
Middle	5785	4.89	8	-3.11
High	5825	2.40	8	-5.60

POWER SPECTRAL DENSITY, WITH COMBINER

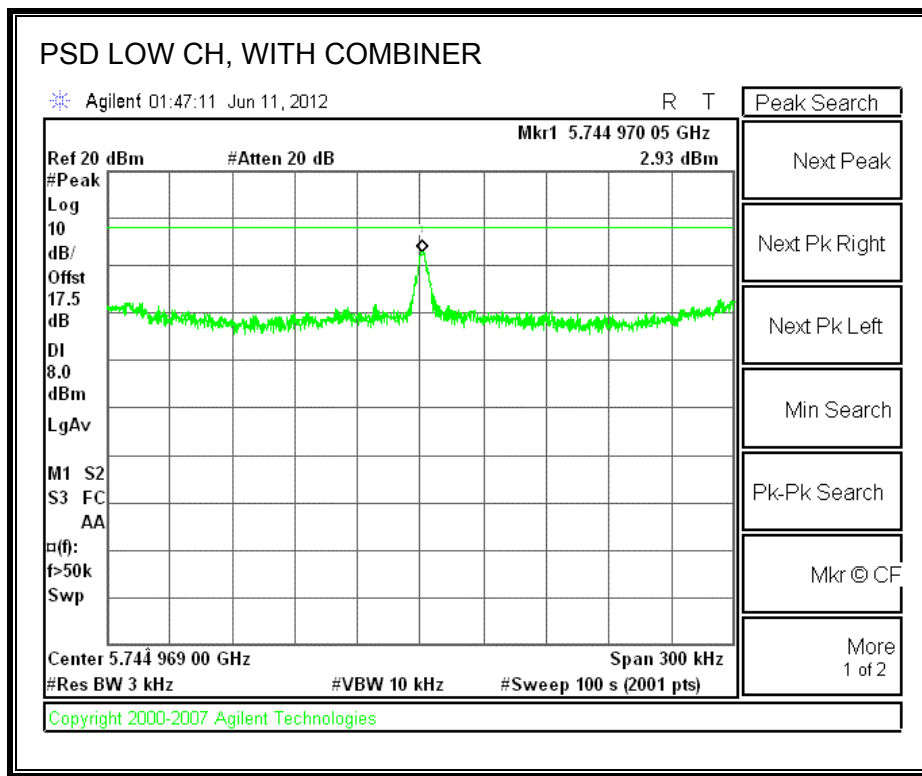

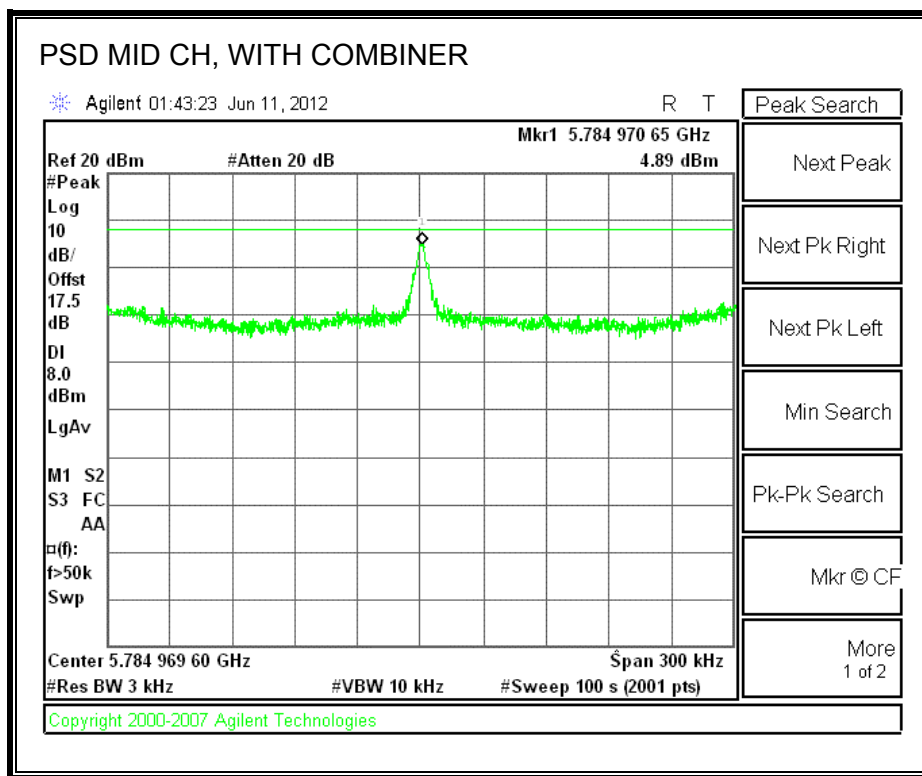

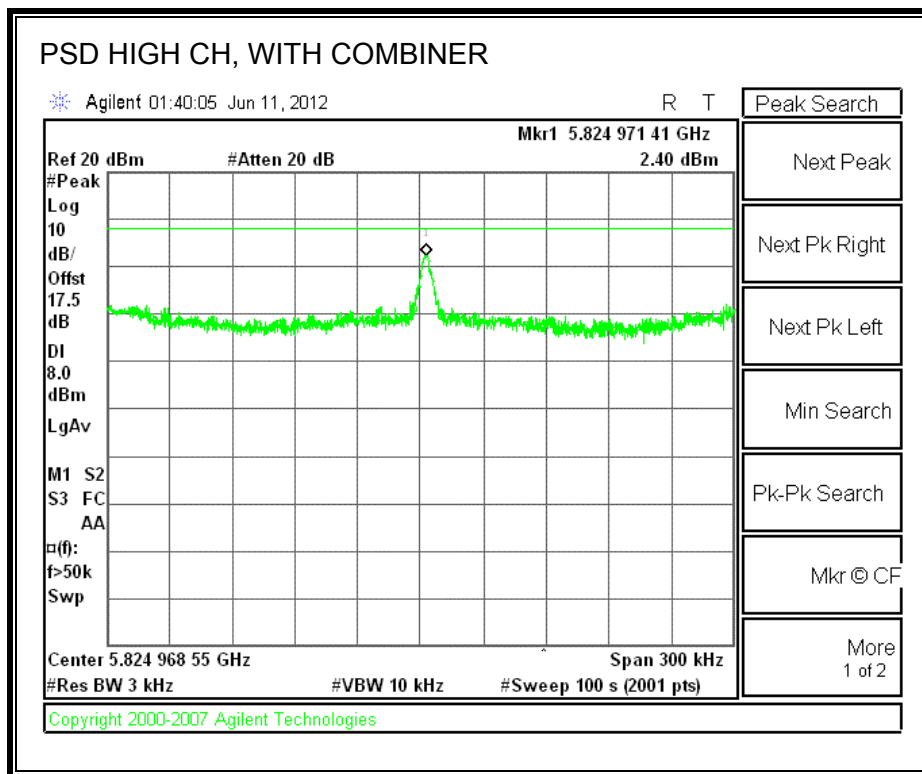

7.6.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS WITH COMBINER

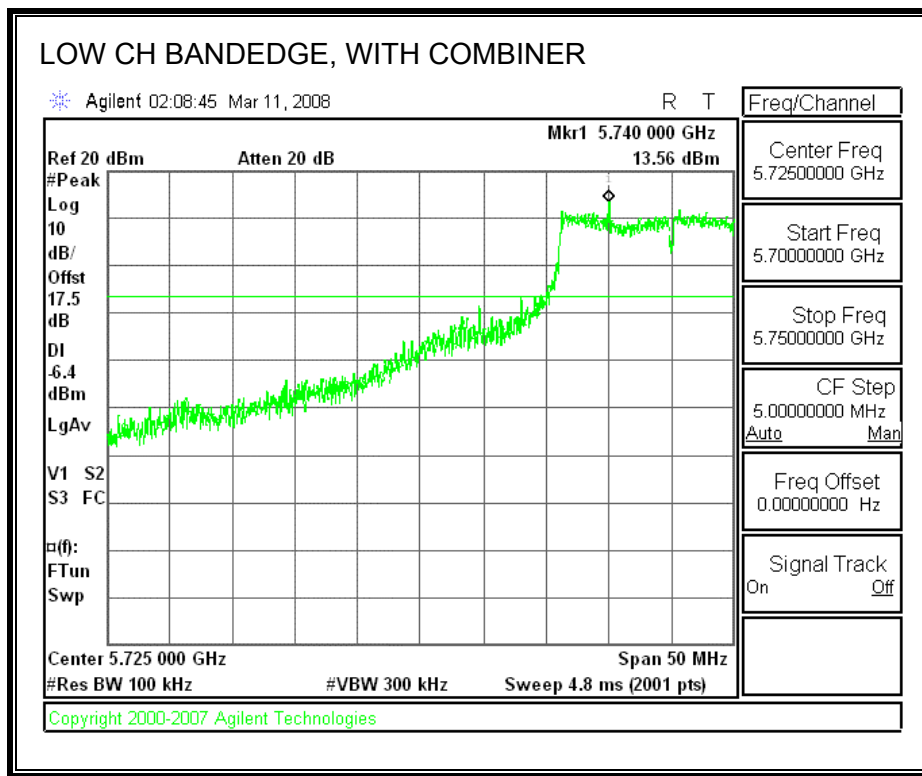


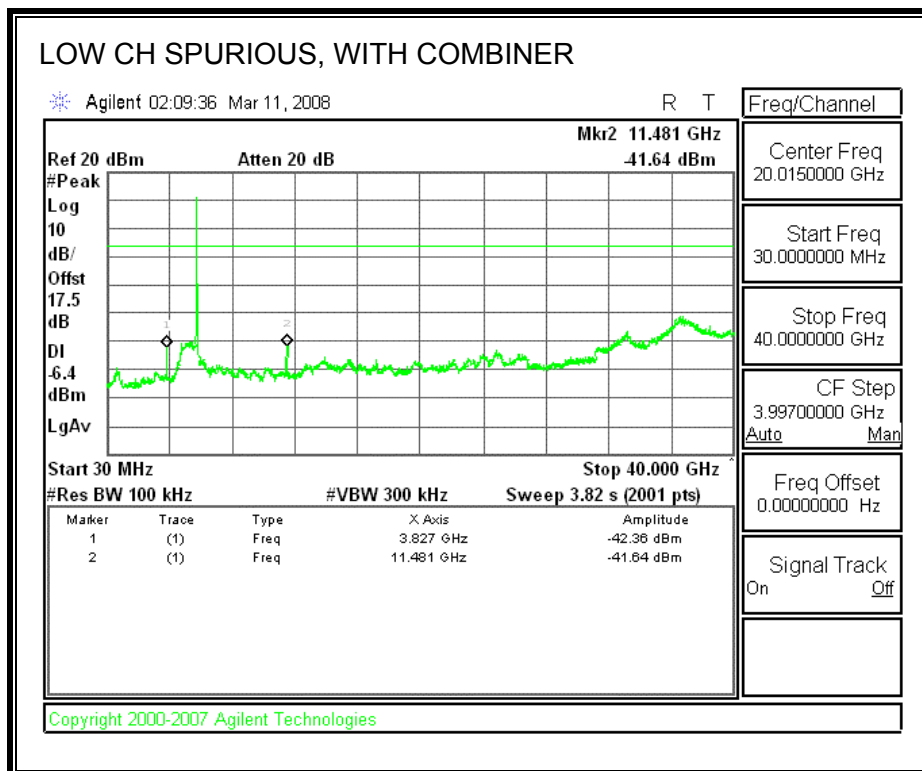

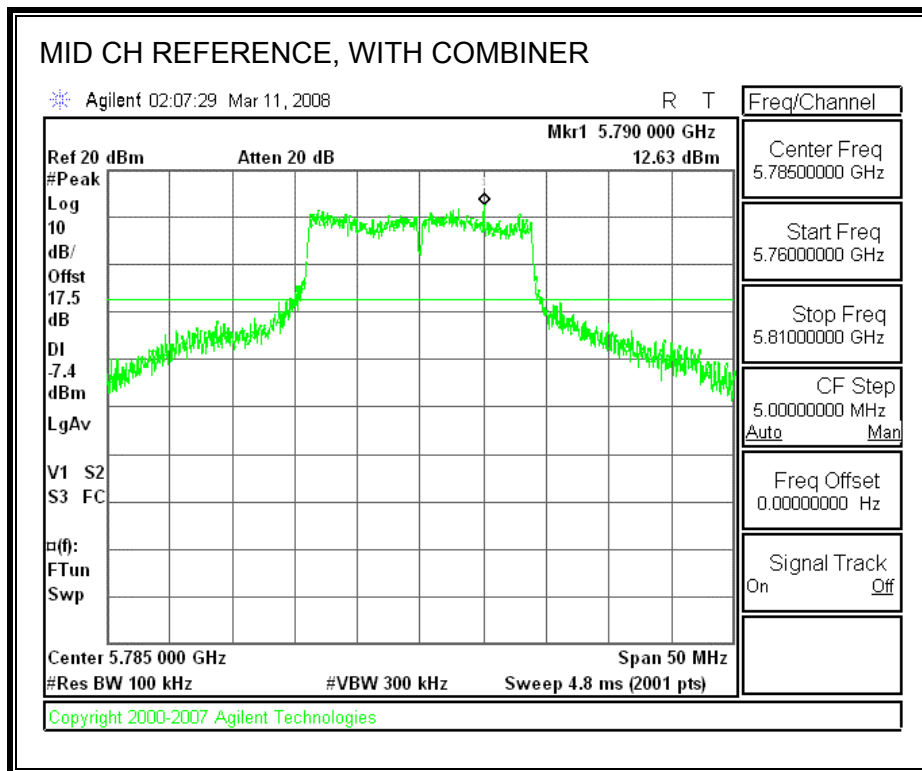

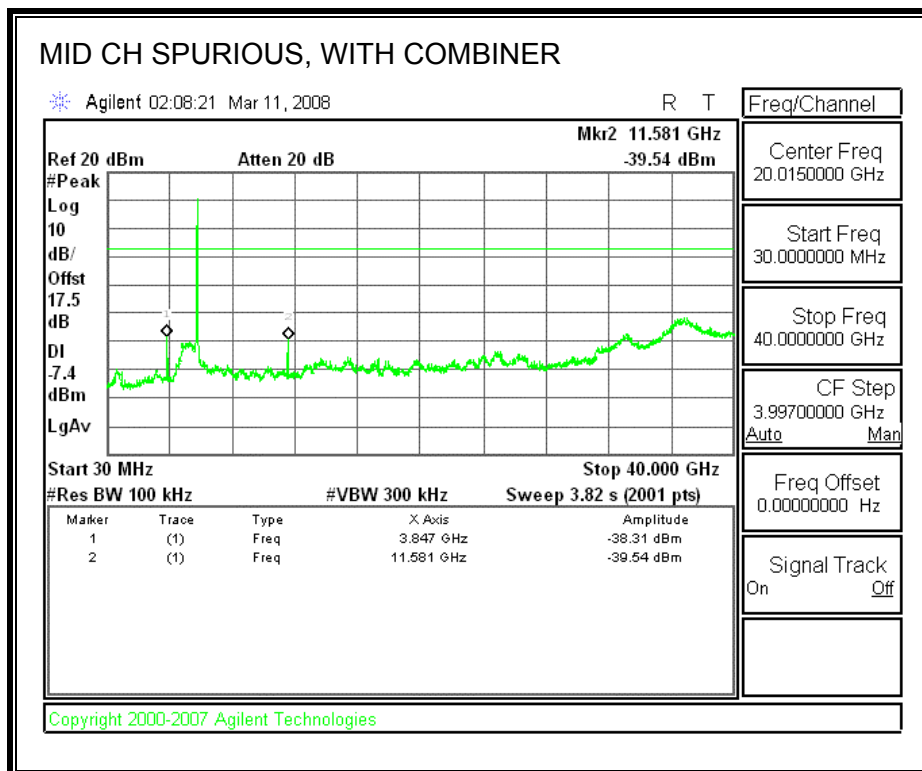

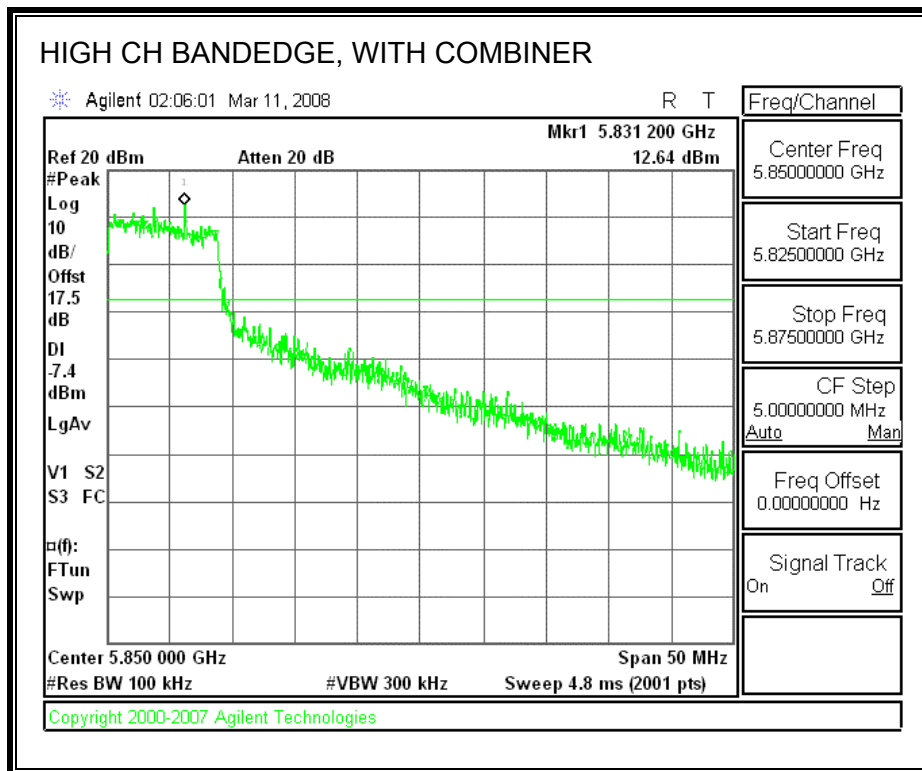

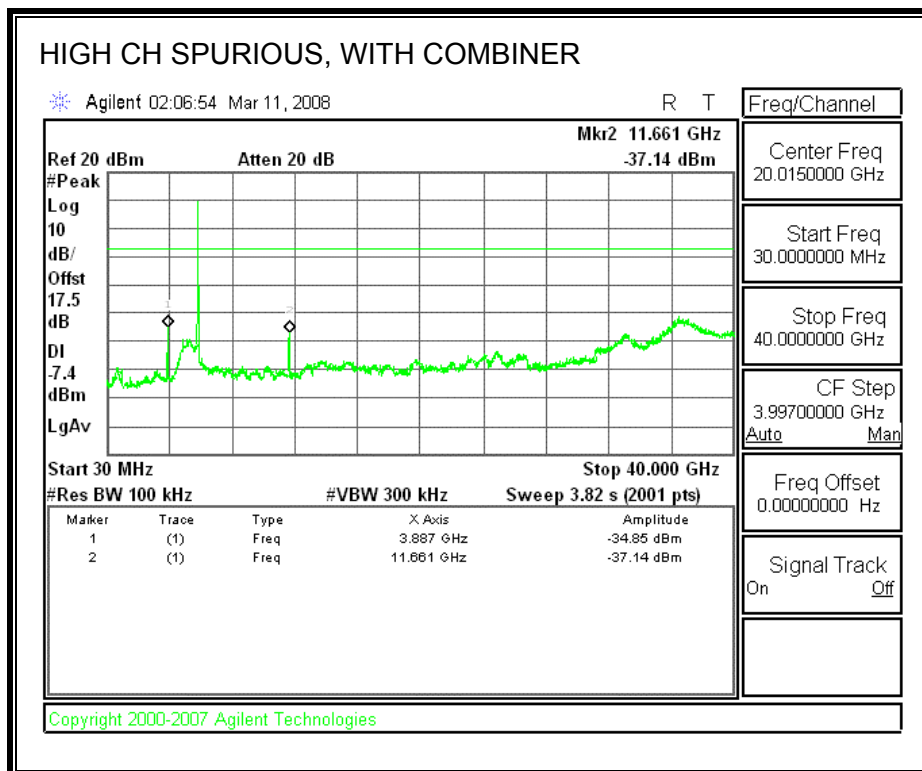

7.7. 802.11n HT40 MODE IN THE 5.8 GHz BAND

7.7.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	Chain 1 (MHz)	Minimum Limit (MHz)
Middle	5795	36.33	0.5

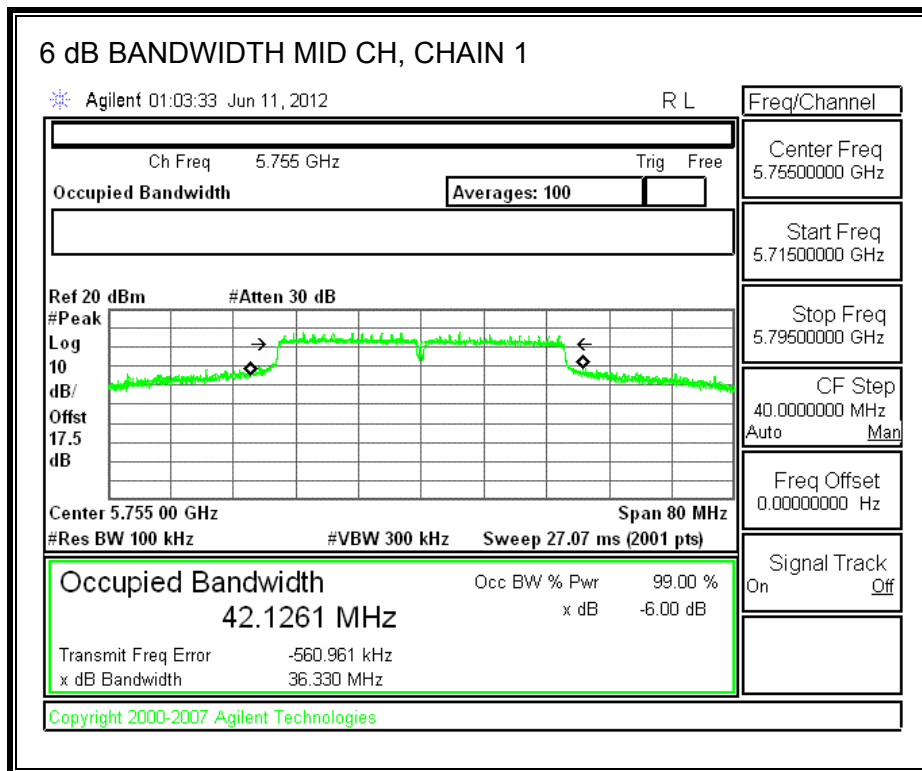

7.7.2. 99% BANDWIDTH

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	Chain 1 99% Bandwidth (MHz)
Middle	5795	36.9335

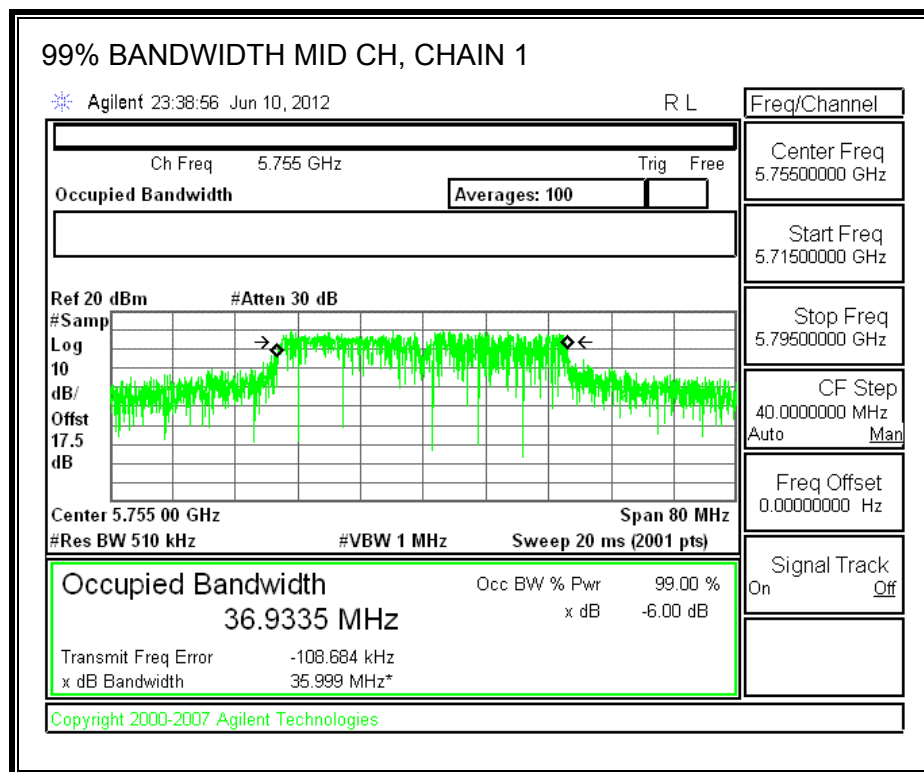

7.7.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


Peak power is measured using the spectrum analyzer's internal channel power integration function. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS


Channel	Frequency (MHz)	Limit (dBm)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)	Margin (dB)
Low	5755	30.00	26.76	26.91	29.85	-0.15
High	5795	30.00	26.15	26.76	29.48	-0.52


CHAIN 0 OUTPUT POWER

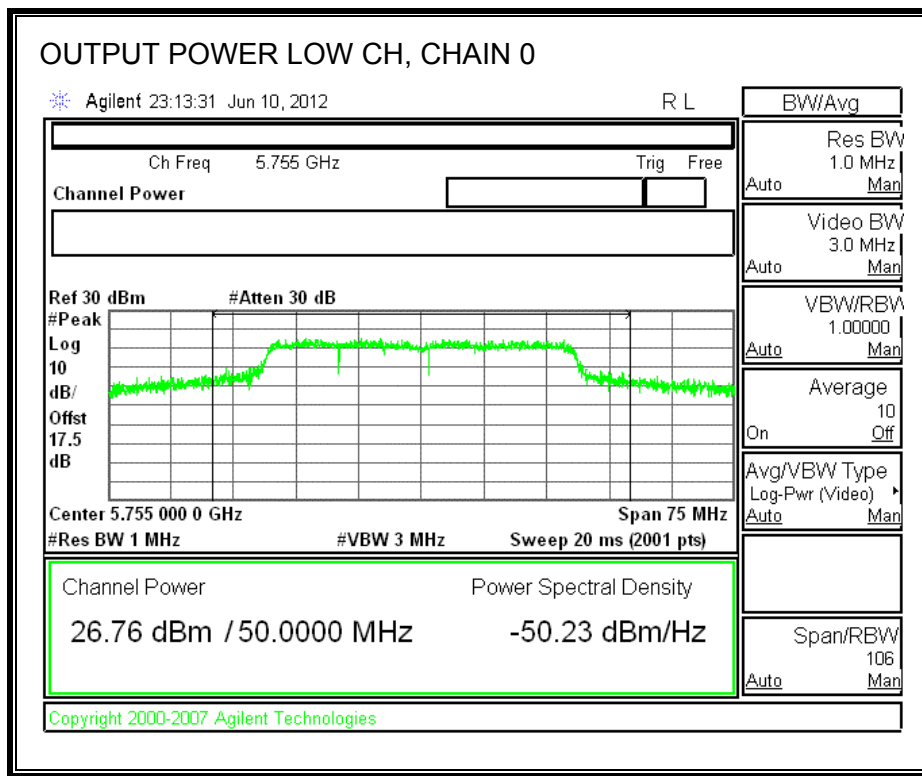

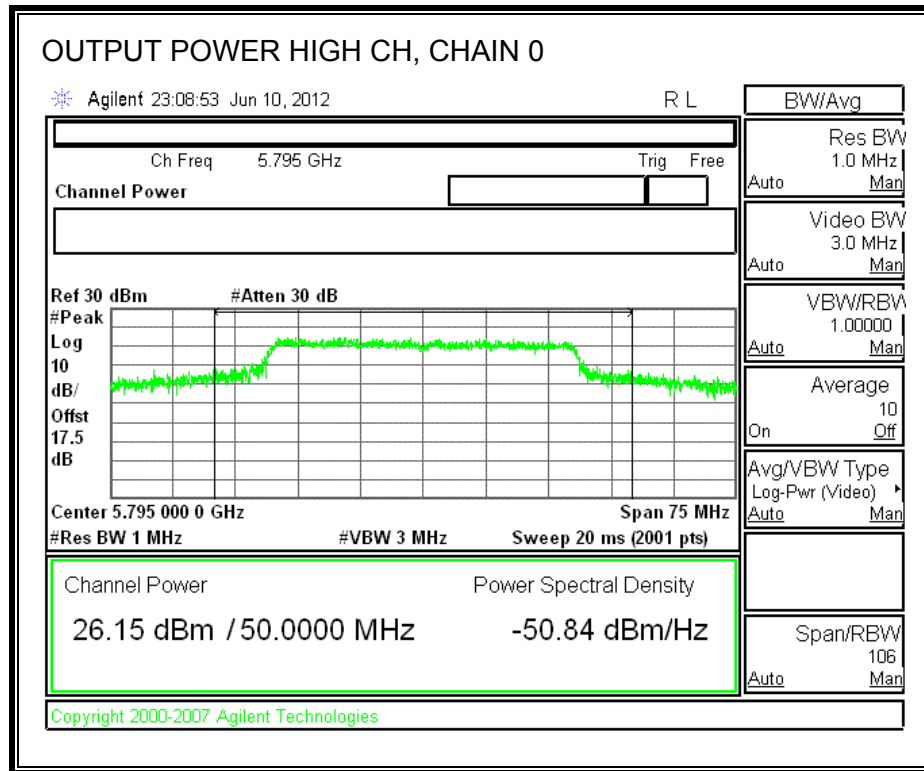

CHAIN 1 OUTPUT POWER

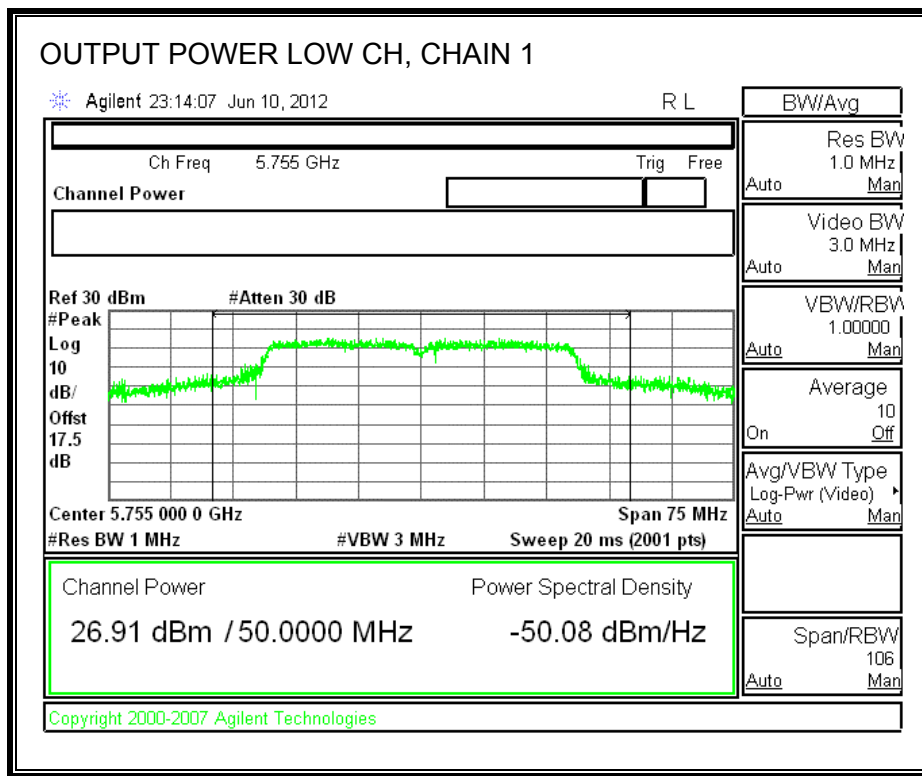

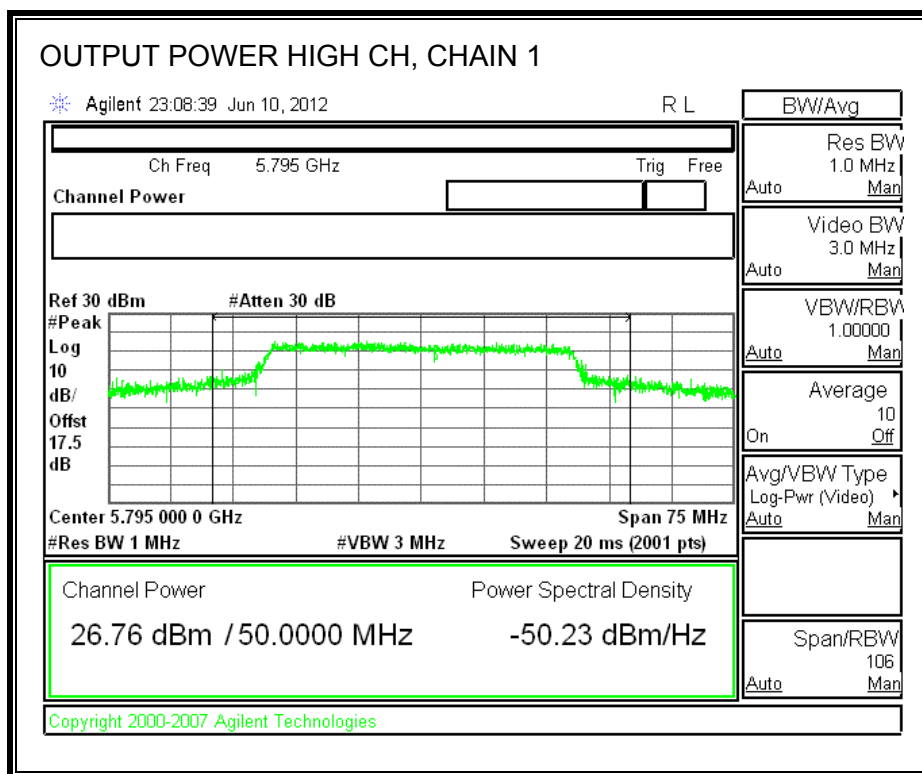

7.7.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 17.5 dB (including 16 dB pad and 1.5 dB cable) entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5755	19.93	20.11	23.03
High	5795	19.48	20.03	22.77

7.7.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.

RESULTS:

Channel	Frequency (MHz)	PSD with Combiner (dBm)	Limit (dBm)	Margin (dB)
Low	5755	5.82	8	-2.18
High	5795	7.21	8	-0.79

POWER SPECTRAL DENSITY, WITH COMBINER

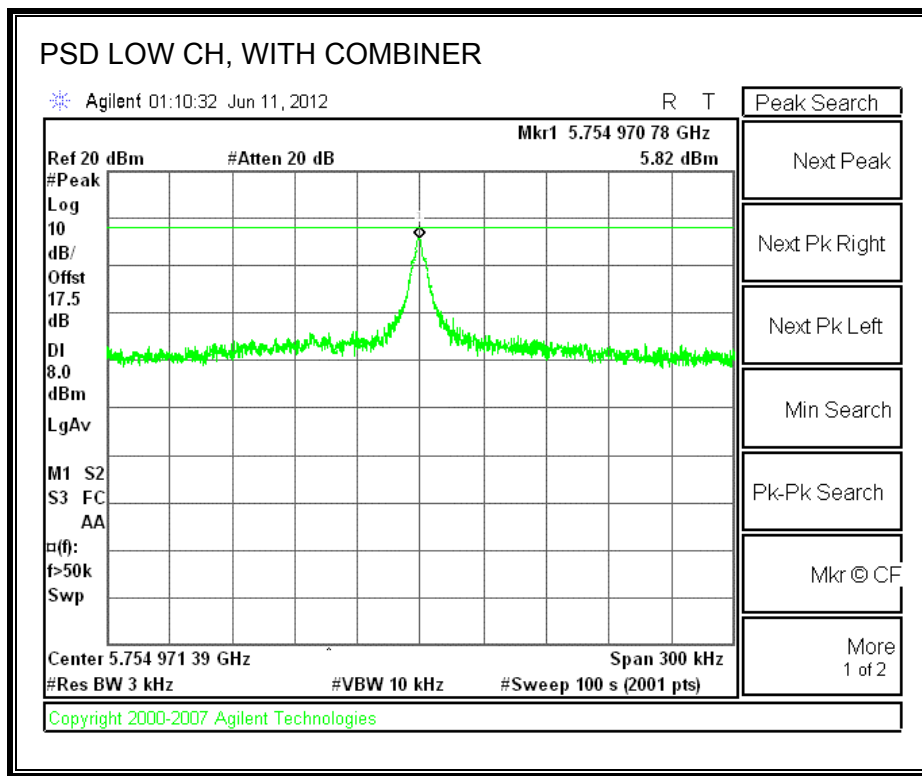

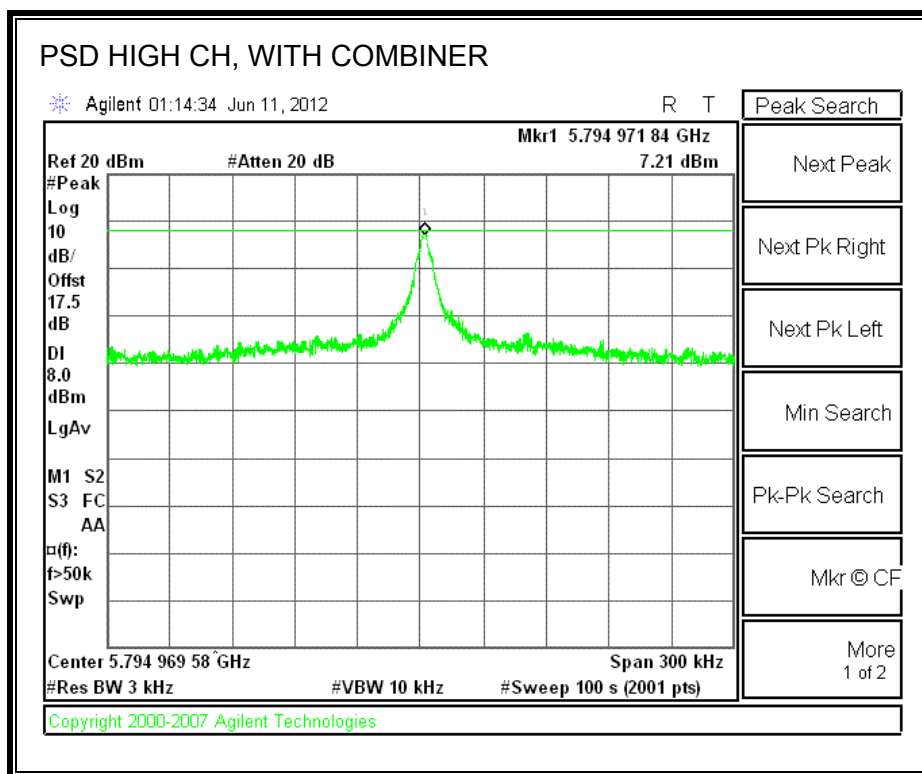

7.7.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest and highest channels.


RESULTS

SPURIOUS EMISSIONS WITH COMBINER

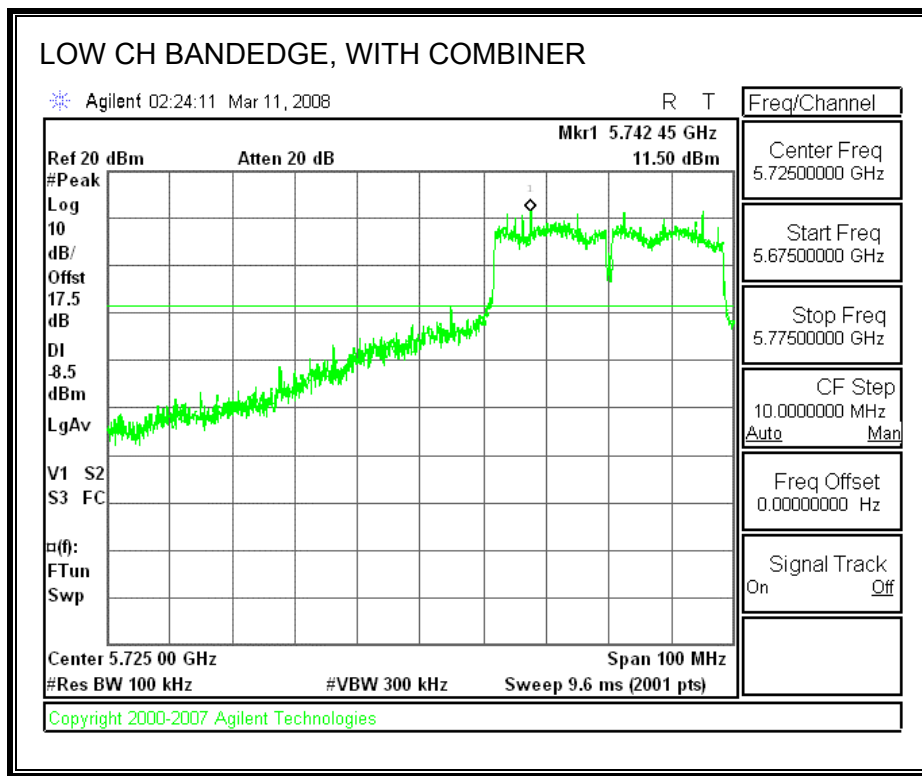

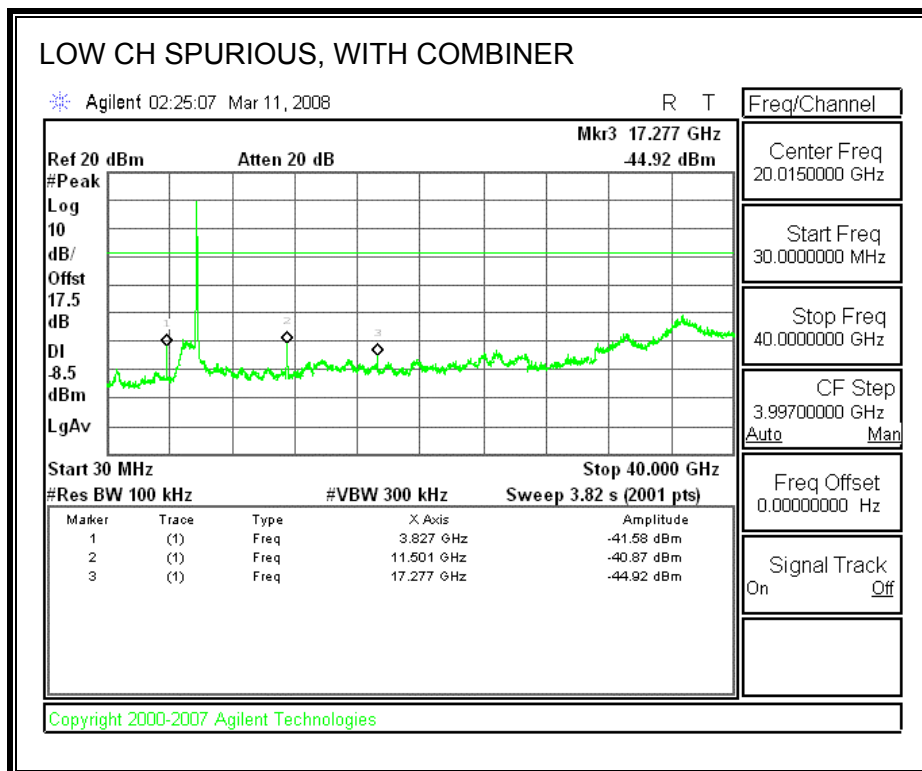

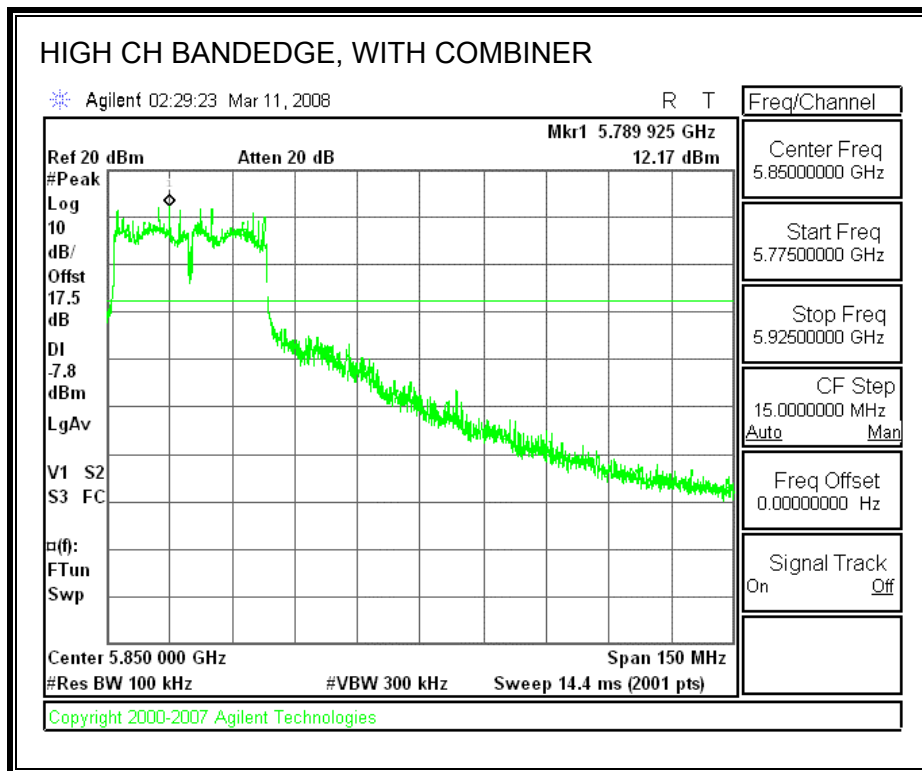

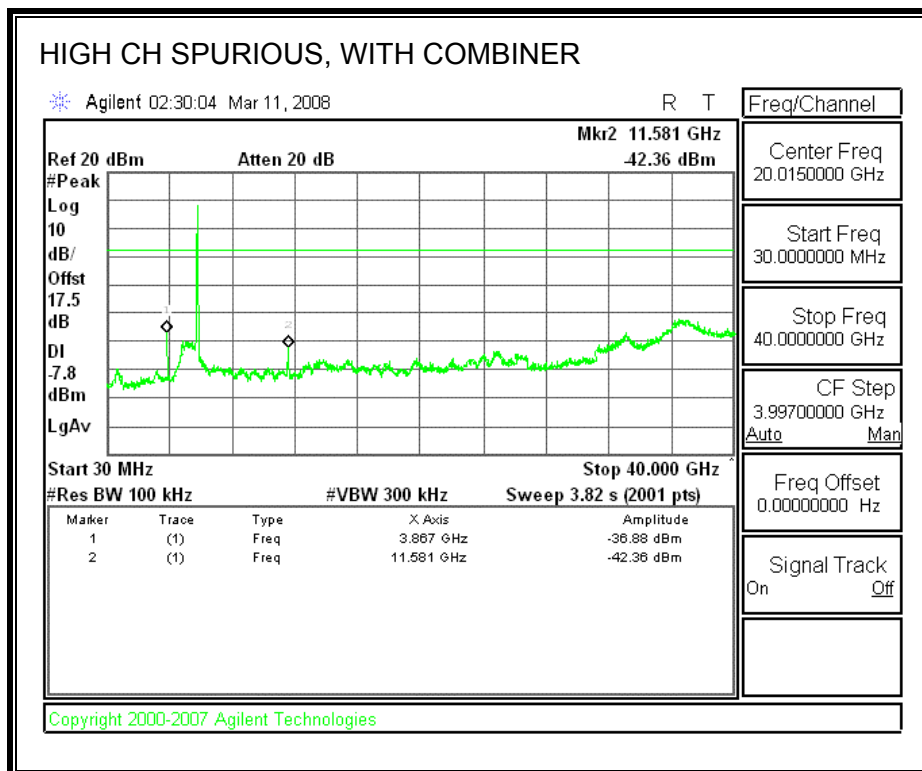

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz


8.2.1. TRANSMITTER ABOVE 1 GHz FOR 802.11b MODE IN THE 2.4 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

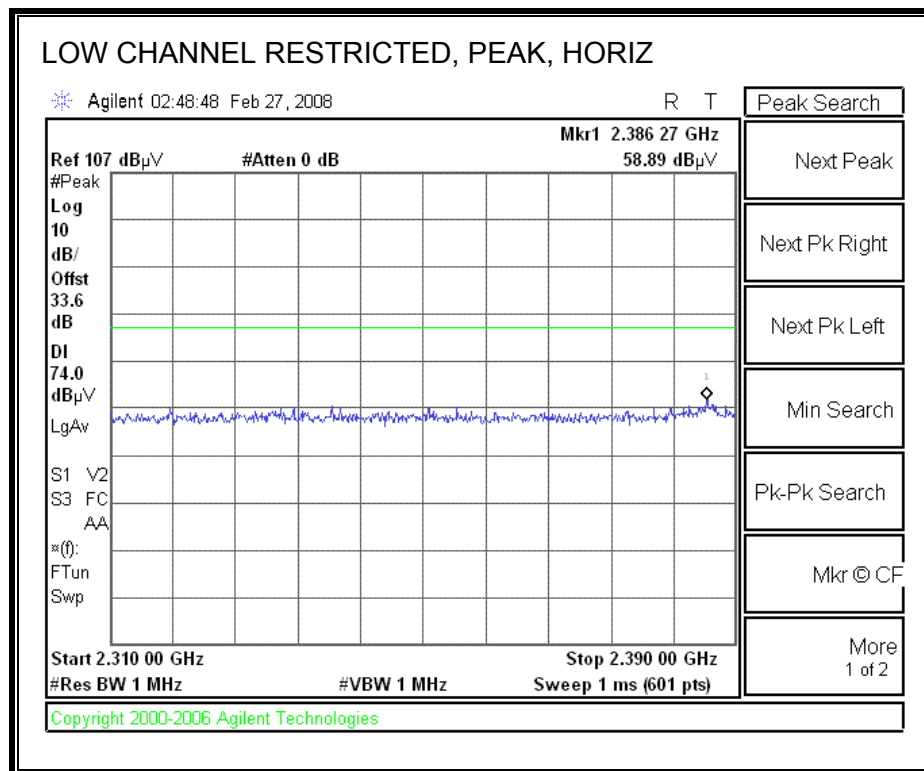

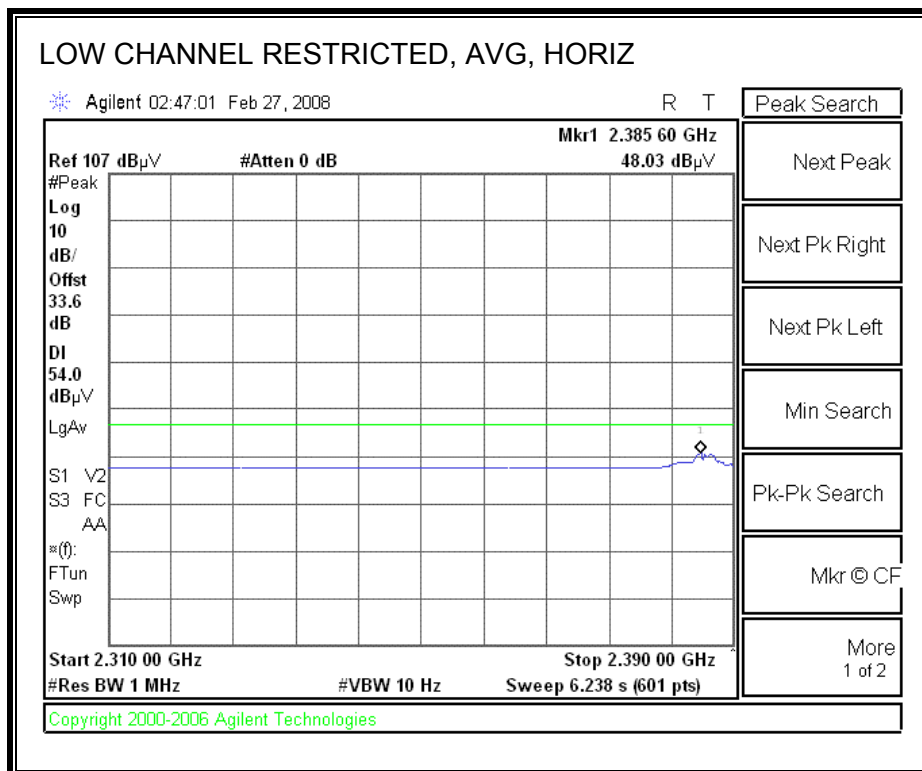



RESTRICTED BANEDGE (LOW CHANNEL, VERTICAL)

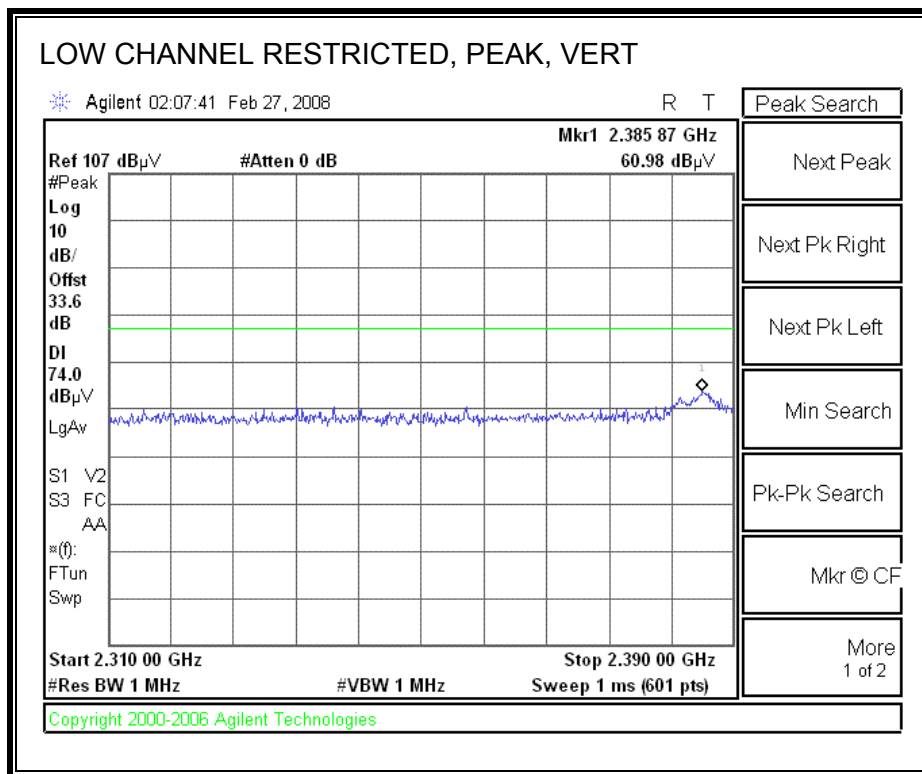

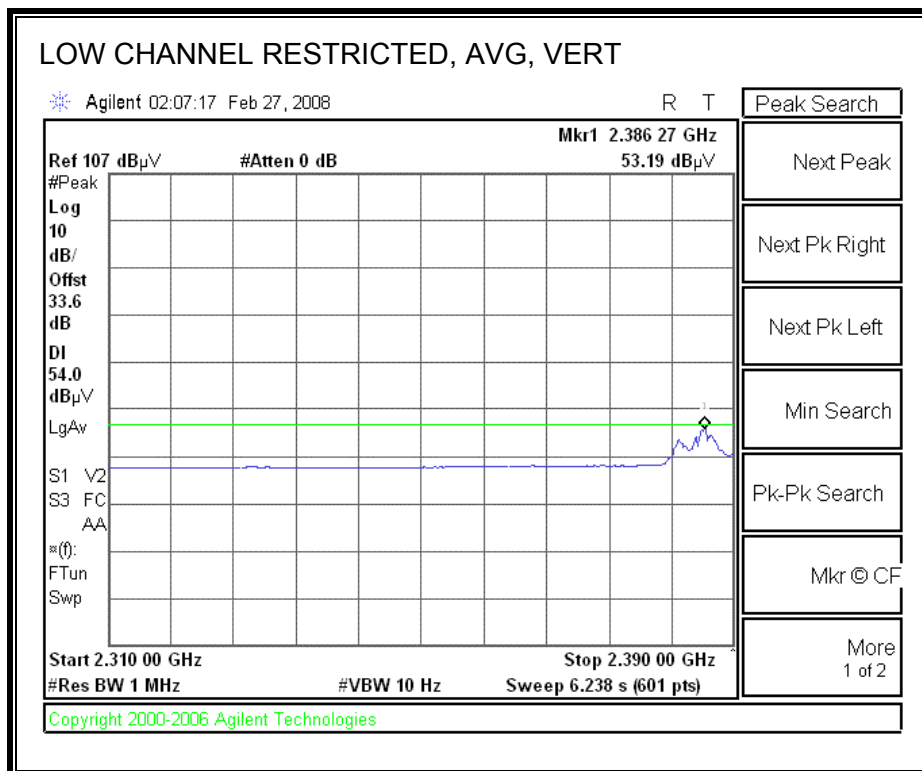



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

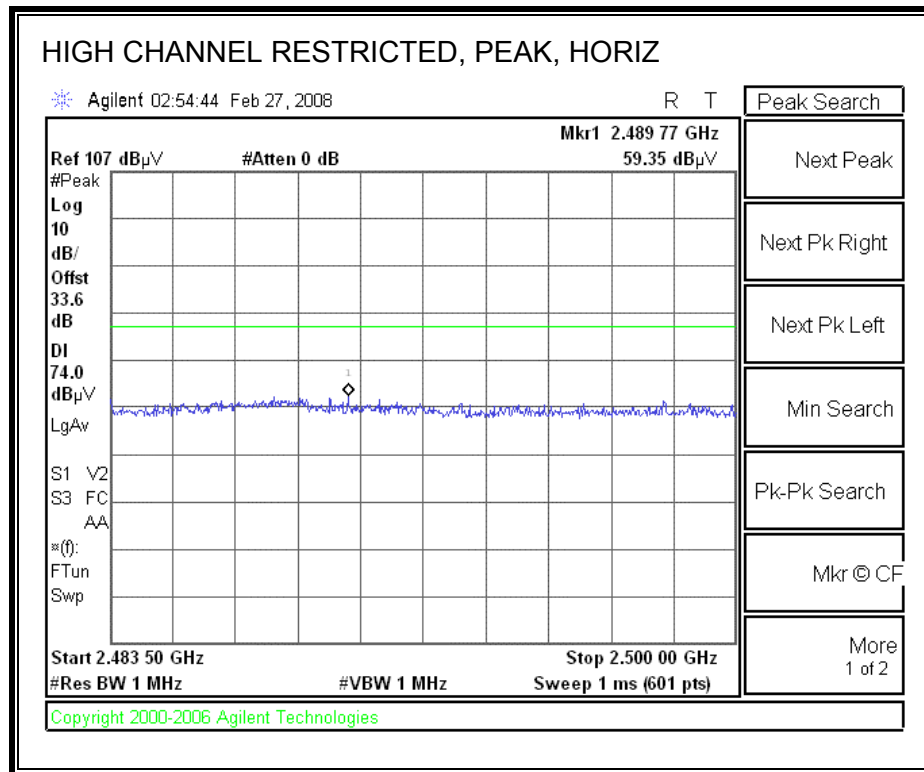

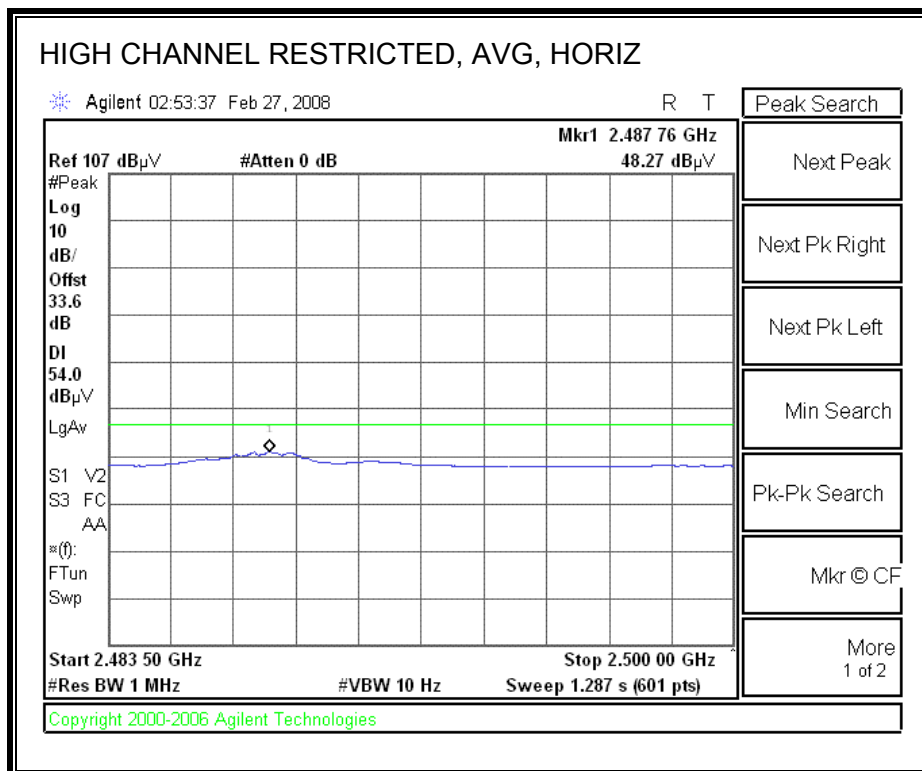

RESTRICTED BANEDGE (HIGH CHANNEL, VERTICAL)

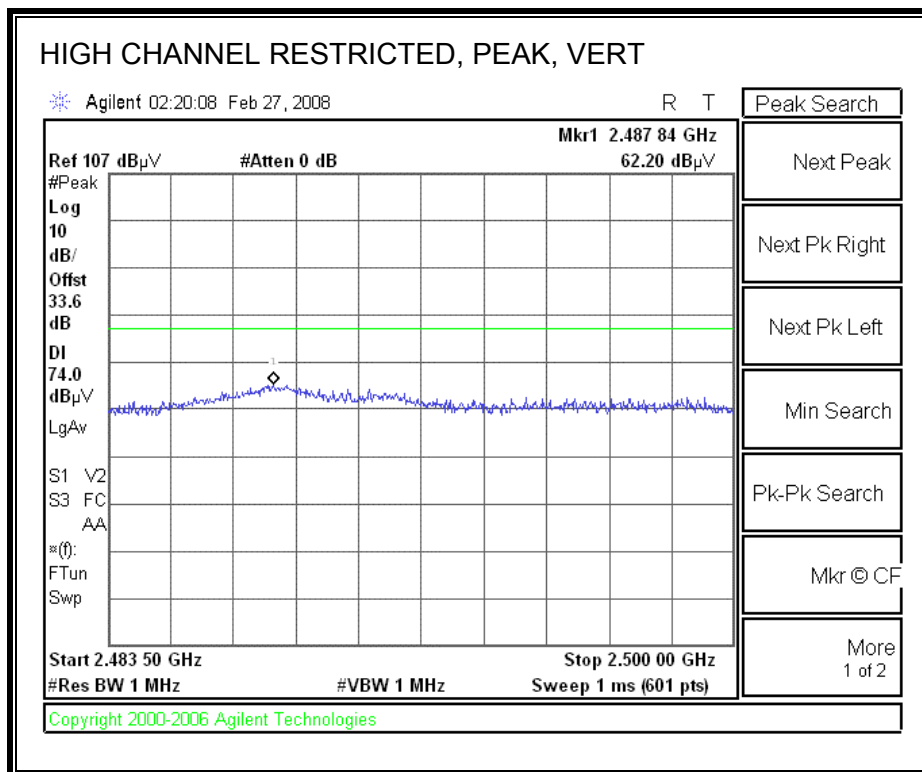

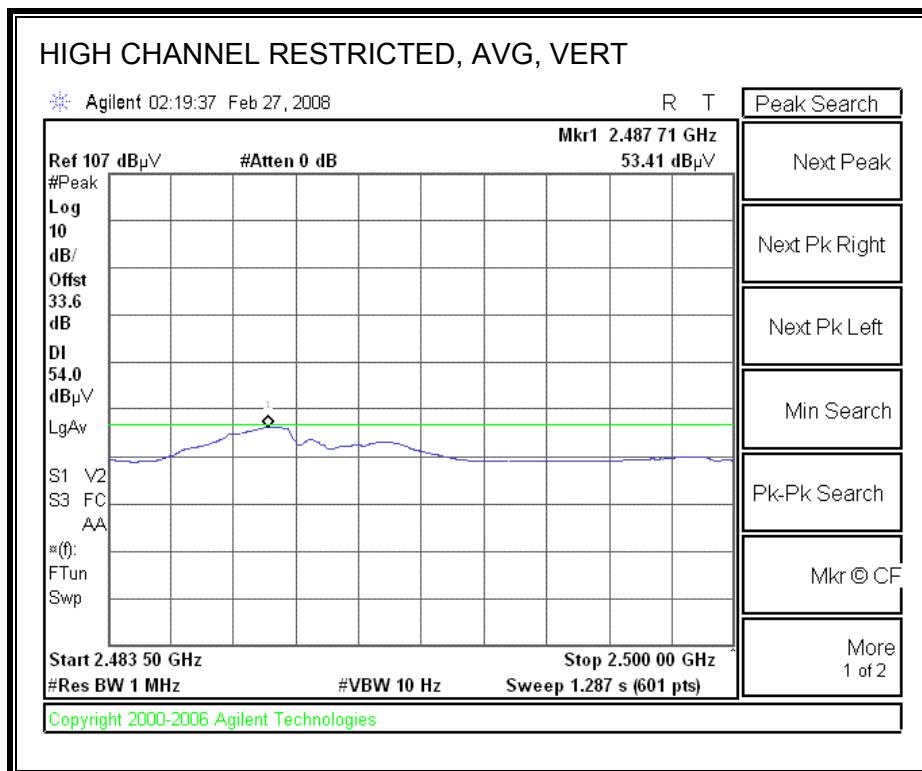



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Company: Atheros Project #: 08U11571 Date: 2/26/2008 Test Engineer: Chin Pang Configuration: EUT/Antenna/Laptop Mode: b mode, TX S/N: HB92-031-S-0805 FEM #1															
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T73; S/N: 6717 @3m		T34 HP 8449B						FCC 15.209							
Hi Frequency Cables															
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz					
				A-5m Chamber				R_001							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch (2412MHz)															
3.216	3.0	42.0	30.2	30.5	5.5	-35.7	0.0	0.0	42.3	30.5	74	54	-31.7	-23.5	V
4.824	3.0	49.0	47.0	33.3	6.9	-34.8	0.0	0.0	54.4	52.4	74	54	-19.6	-1.6	V
7.326	3.0	45.0	36.0	35.0	8.4	-34.1	0.0	0.0	54.3	45.3	74	54	-19.7	-8.7	V
Mid Ch (2437MHz)															
3.249	3.0	42.0	30.2	30.6	5.5	-35.7	0.0	0.0	42.5	30.7	74	54	-31.5	-23.3	V
4.874	3.0	49.5	48.0	33.4	6.9	-34.8	0.0	0.0	55.0	53.5	74	54	-19.0	-0.5	V
4.874	3.0	50.9	47.6	33.4	6.9	-34.8	0.0	0.0	56.3	53.1	74	54	-17.7	-0.9	V
7.311	3.0	43.0	33.2	35.0	8.4	-34.1	0.0	0.0	52.3	42.5	74	54	-21.7	-11.5	V
High Ch (2462MHz)															
3.283	3.0	41.6	29.5	30.7	5.6	-35.6	0.0	0.0	42.2	30.1	74	54	-31.8	-23.9	V
4.924	3.0	49.2	47.5	33.4	7.0	-34.8	0.0	0.0	54.8	53.1	74	54	-19.2	-0.9	V
7.386	3.0	43.5	33.5	35.0	8.4	-34.1	0.0	0.0	52.9	42.9	74	54	-21.1	-11.1	V
Rev. 4127															
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency		Amp	Preamp Gain		Avg Lim	Average Field Strength Limit								
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Pk Lim	Peak Field Strength Limit								
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Avg Mar	Margin vs. Average Limit								
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Pk Mar	Margin vs. Peak Limit								
CL	Cable Loss		HPF	High Pass Filter											


8.2.2. TRANSMITTER ABOVE 1 GHz FOR 802.11g MODE IN THE 2.4 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

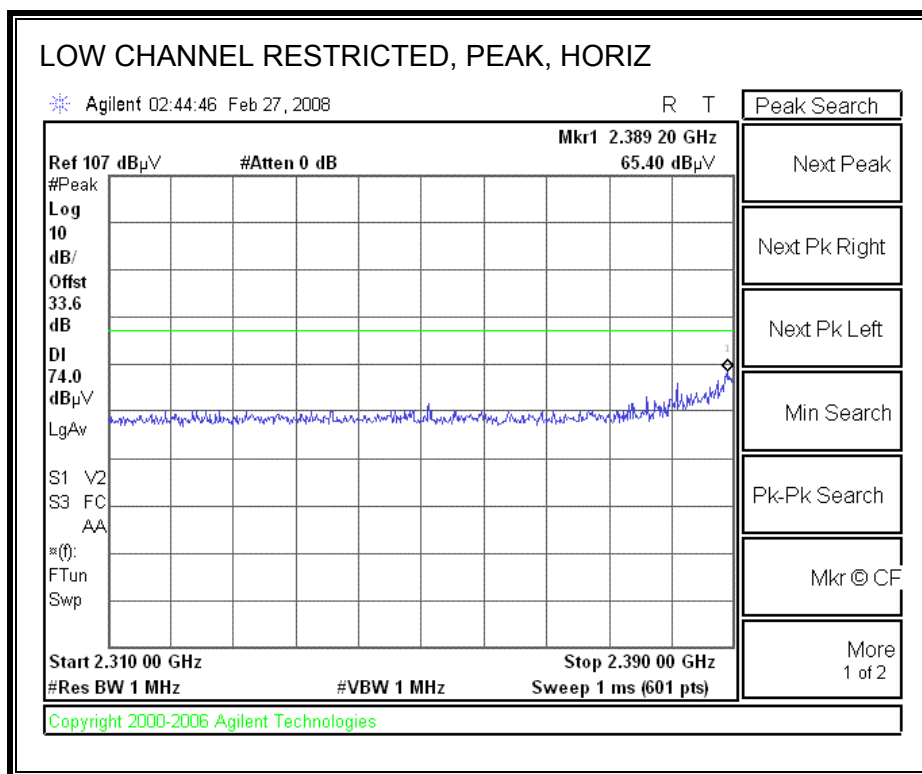

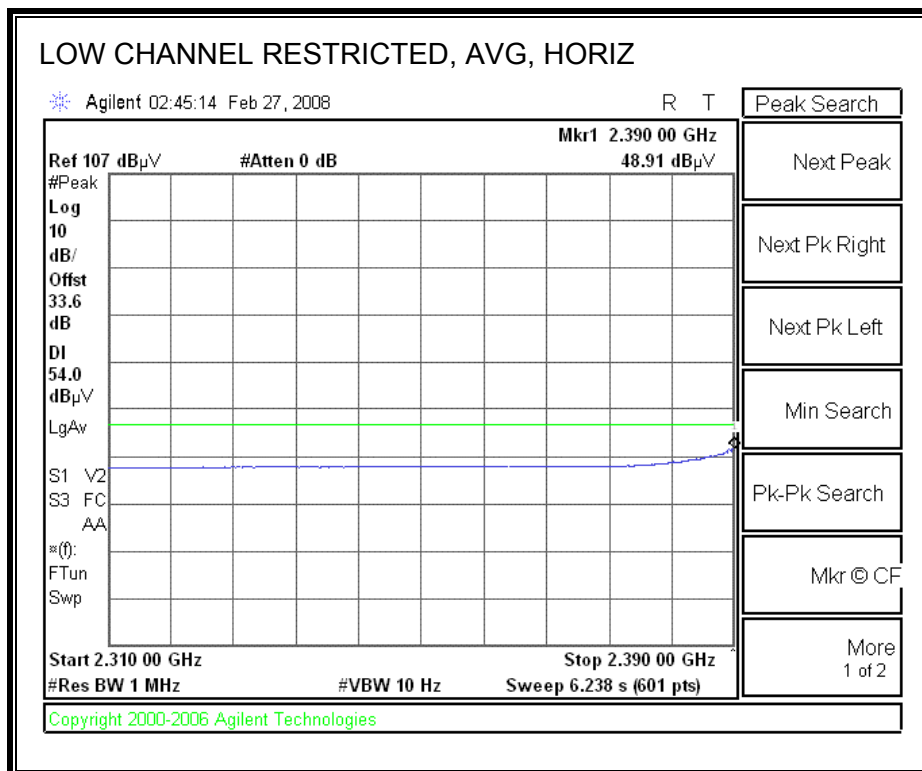



RESTRICTED BANEDGE (LOW CHANNEL, VERTICAL)

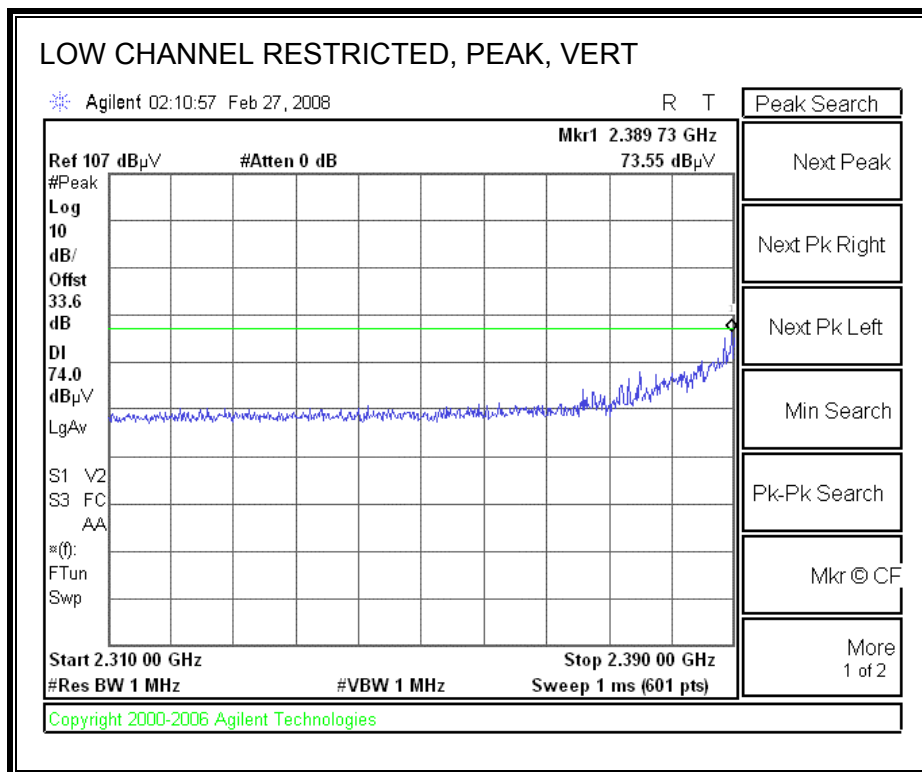

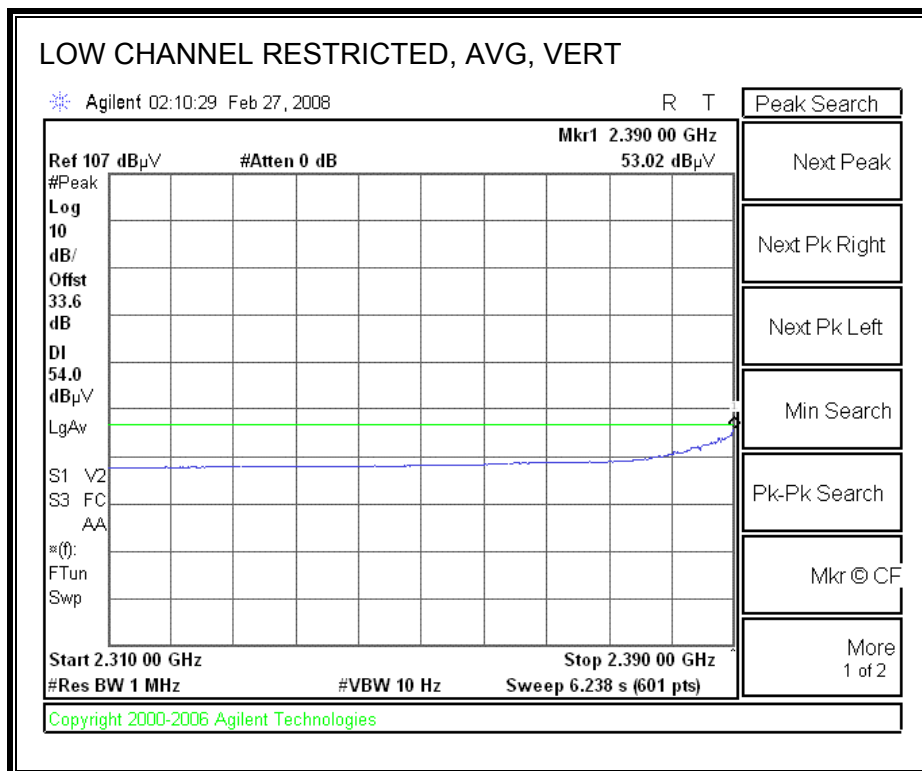



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

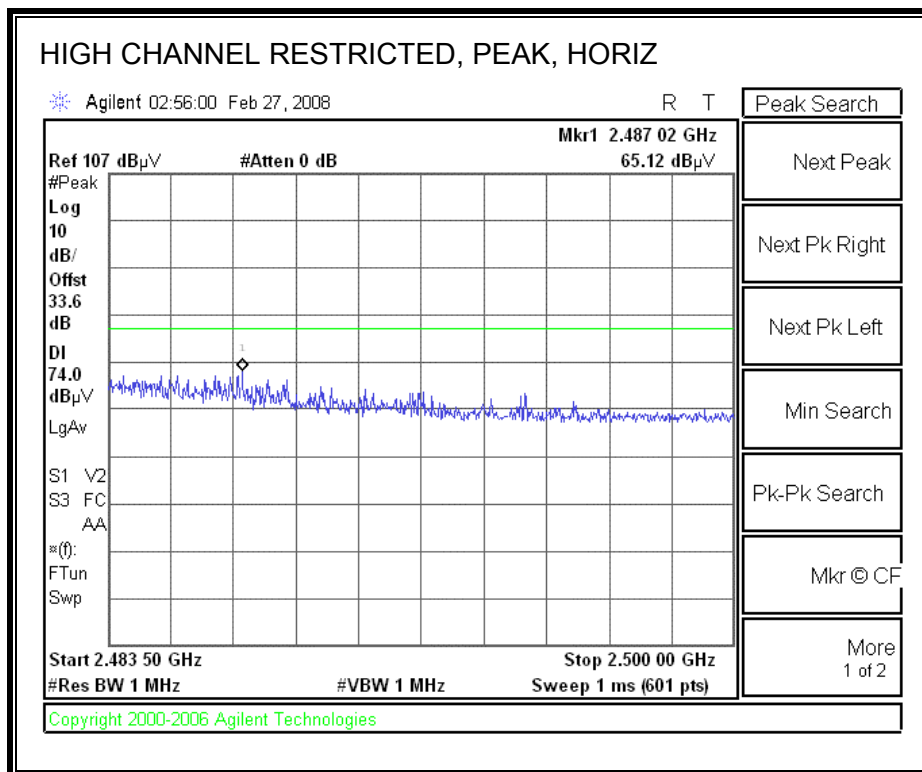

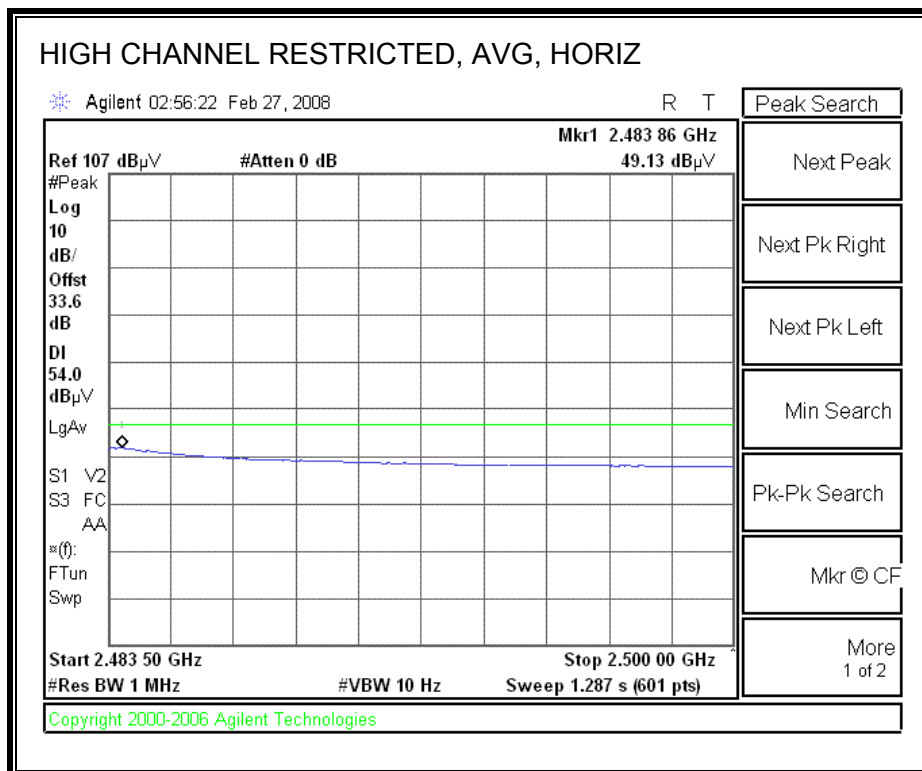

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

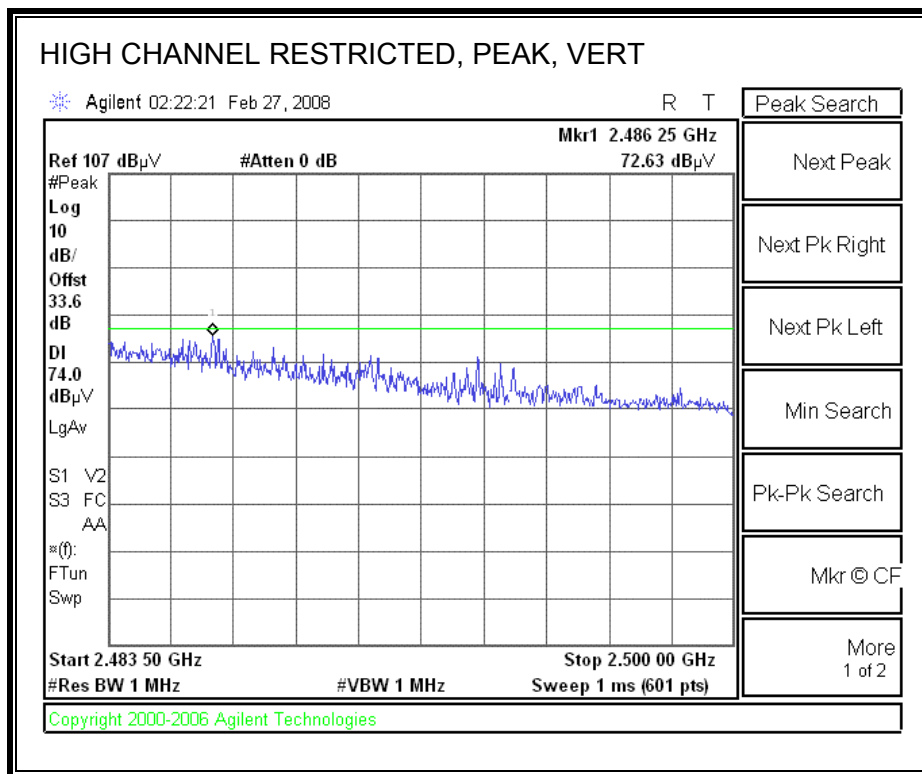

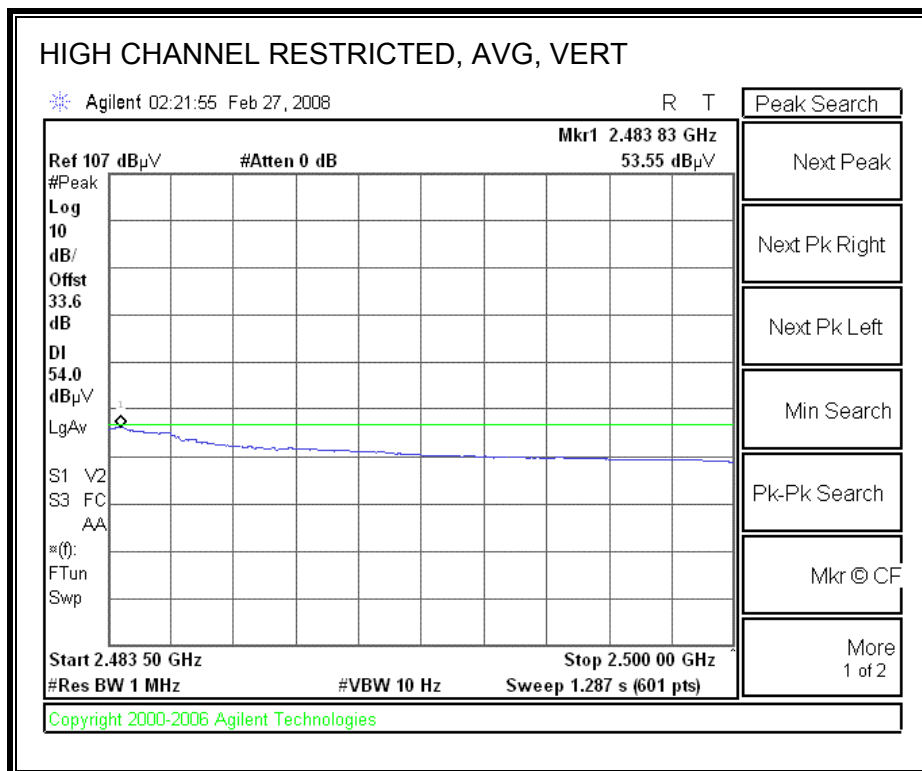



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																	
Compliance Certification Services, Fremont 5m Chamber																	
Company: Atheros Project #: 08U11571 Date: 2/27/2008 Test Engineer: Chin Pang Configuration: EUT/Antenna/Laptop Mode: g Mode, TX S/N: HB92-031-S-0805 FEM #1																	
Test Equipment:																	
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit									
T73; S/N: 6717 @3m		T34 HP 8449B						FCC 15.209									
Hi Frequency Cables																	
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz							
				A-5m Chamber				R_001									
f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	Fldr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes		
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)		
Low Ch (2412MHz)																	
3.216	3.0	44.0	36.0	30.5	5.5	-35.7	0.0	0.0	44.3	36.3	74	54	-29.7	-17.7	V		
4.824	3.0	46.7	34.0	33.3	6.9	-34.8	0.0	0.0	52.1	39.4	74	54	-21.9	-14.6	V		
7.326	3.0	45.0	30.0	35.0	8.4	-34.1	0.0	0.0	54.3	39.3	74	54	-19.7	-14.7	V		
3.216	3.0	44.7	37.5	30.5	5.5	-35.7	0.0	0.0	45.0	37.8	74	54	-29.0	-16.2	H		
4.824	3.0	43.9	32.0	33.3	6.9	-34.8	0.0	0.0	49.3	37.4	74	54	-24.7	-16.6	H		
7.326	3.0	42.3	29.6	35.0	8.4	-34.1	0.0	0.0	51.6	38.9	74	54	-22.4	-15.1	H		
Mid Ch (2437MHz)																	
3.249	3.0	43.0	32.6	30.6	5.5	-35.7	0.0	0.0	43.5	33.1	74	54	-30.5	-20.9	V		
4.874	3.0	47.1	34.4	33.4	6.9	-34.8	0.0	0.0	52.6	39.9	74	54	-21.4	-14.1	V		
7.311	3.0	45.6	31.6	35.0	8.4	-34.1	0.0	0.0	54.9	40.9	74	54	-19.1	-13.1	V		
3.249	3.0	43.7	33.2	30.6	5.5	-35.7	0.0	0.0	44.2	33.7	74	54	-29.8	-20.3	H		
4.874	3.0	44.6	32.1	33.4	6.9	-34.8	0.0	0.0	50.1	37.6	74	54	-23.9	-16.4	H		
7.311	3.0	42.0	30.0	35.0	8.4	-34.1	0.0	0.0	51.3	39.3	74	54	-22.7	-14.7	H		
High Ch (2462MHz)																	
3.283	3.0	43.0	32.0	30.7	5.6	-35.6	0.0	0.0	43.6	32.6	74	54	-30.4	-21.4	V		
4.924	3.0	46.5	34.4	33.4	7.0	-34.8	0.0	0.0	52.1	40.0	74	54	-21.9	-14.0	V		
7.386	3.0	46.0	32.0	35.0	8.4	-34.1	0.0	0.0	55.4	41.4	74	54	-18.6	-12.6	V		
3.283	3.0	43.4	32.3	30.7	5.6	-35.6	0.0	0.0	44.0	32.9	74	54	-30.0	-21.1	H		
4.924	3.0	44.7	32.2	33.4	7.0	-34.8	0.0	0.0	50.3	37.8	74	54	-23.7	-16.2	H		
7.386	3.0	43.8	31.2	35.0	8.4	-34.1	0.0	0.0	53.2	40.6	74	54	-20.8	-13.4	H		
Rev. 4.12.7																	
Note: No other emissions were detected above the system noise floor.																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										


8.2.3. TRANSMITTER ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 2.4 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

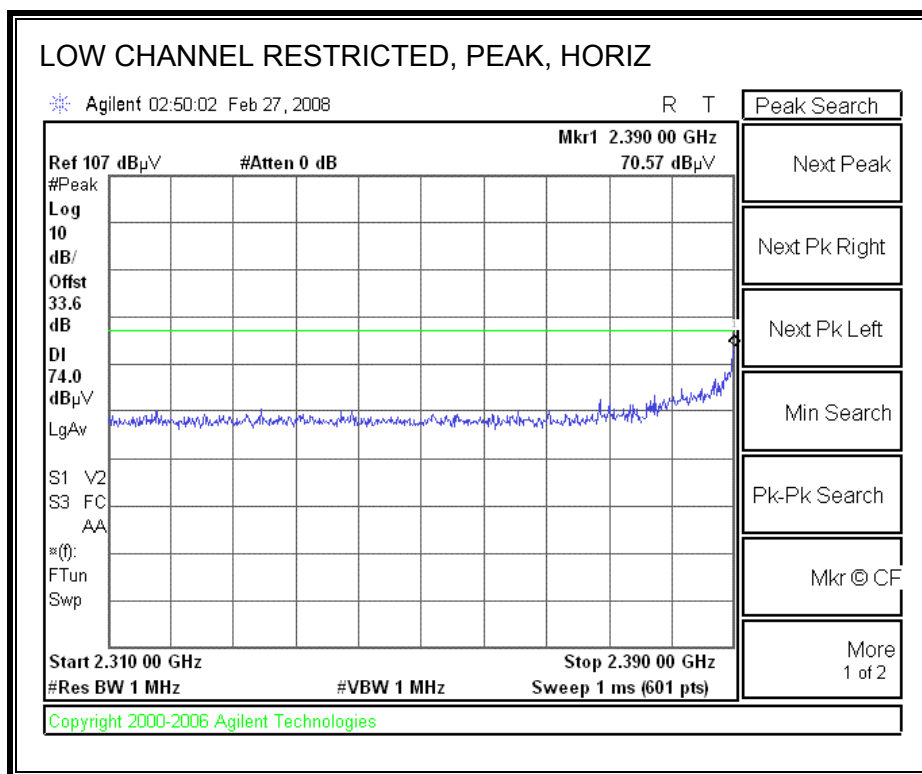

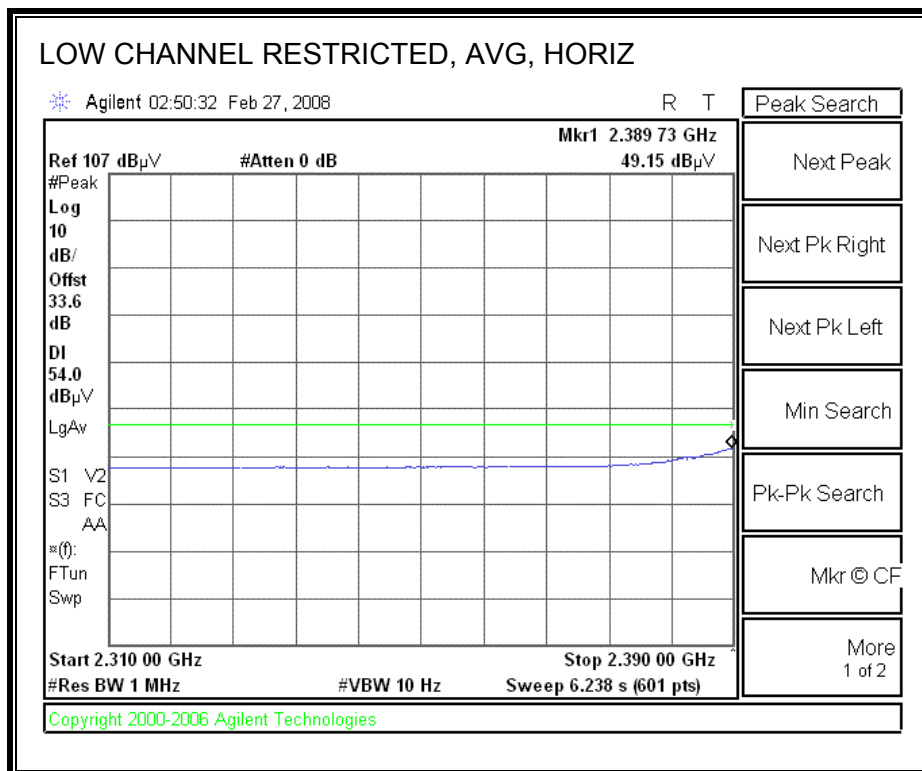



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

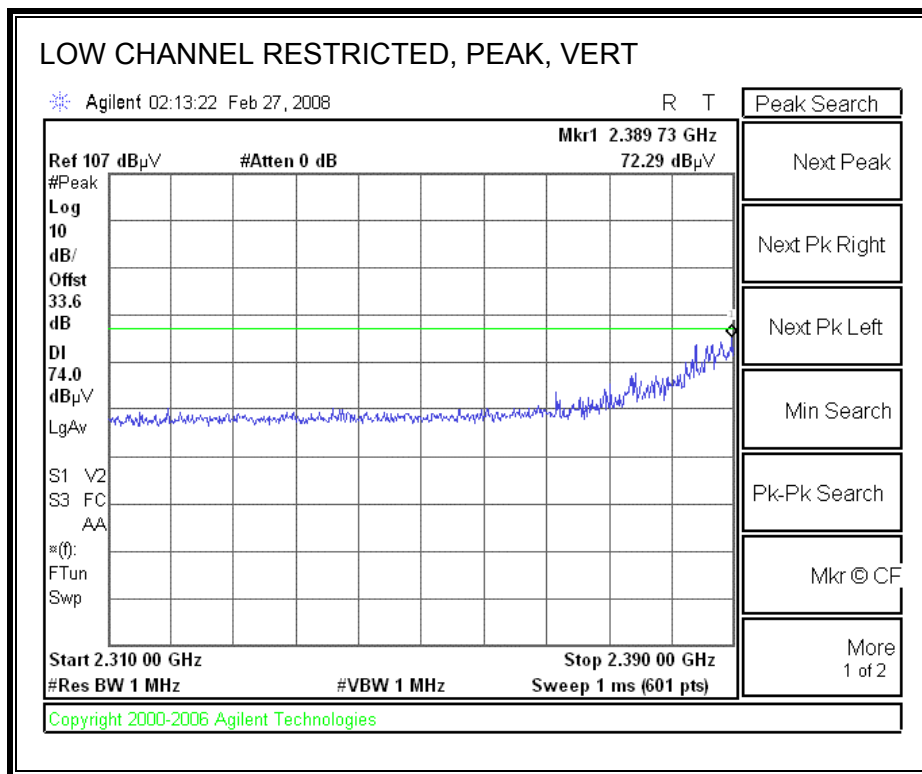

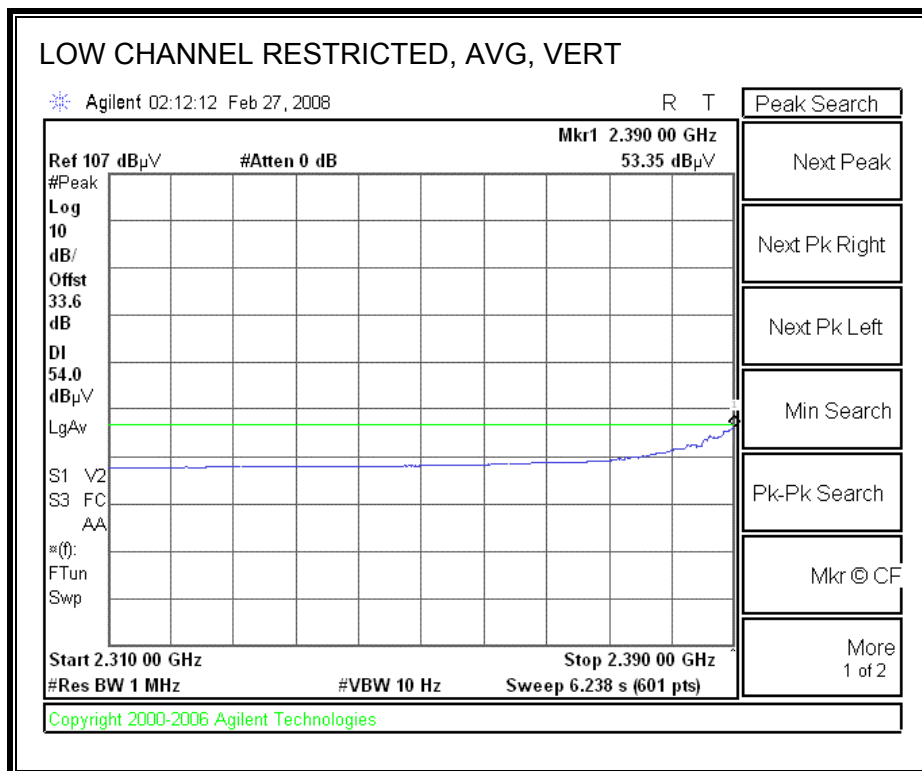



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

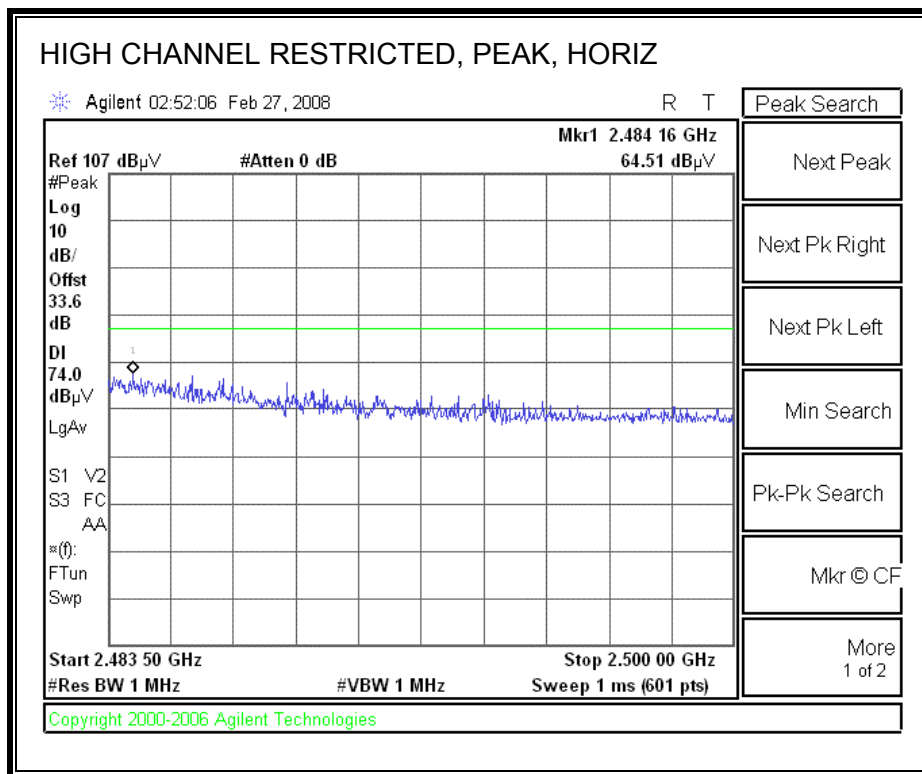

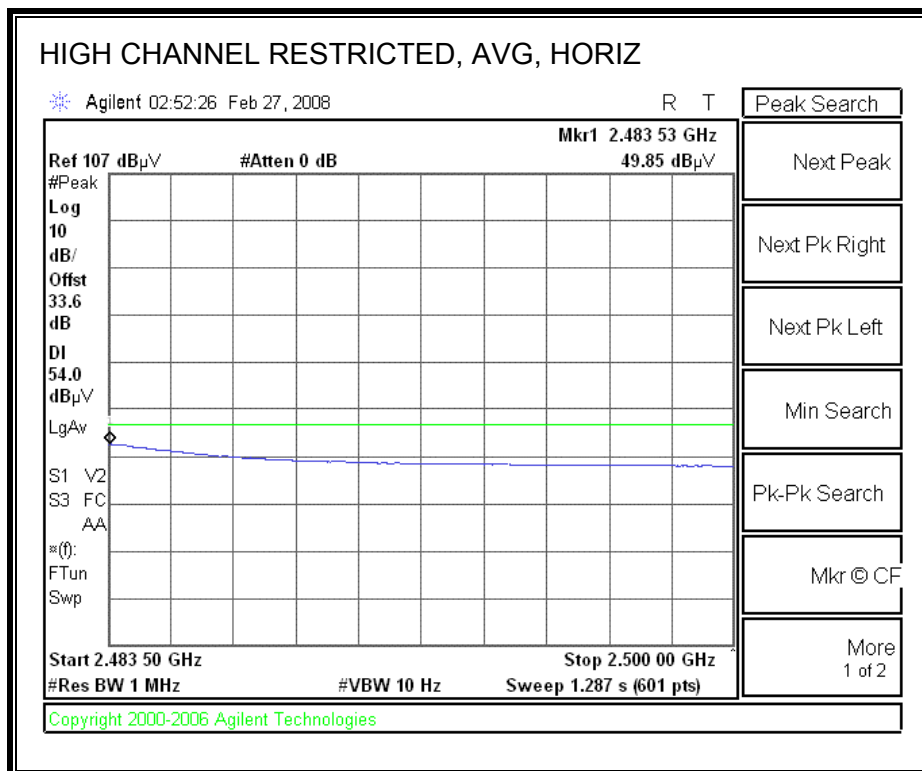

RESTRICTED BANEDGE (HIGH CHANNEL, VERTICAL)

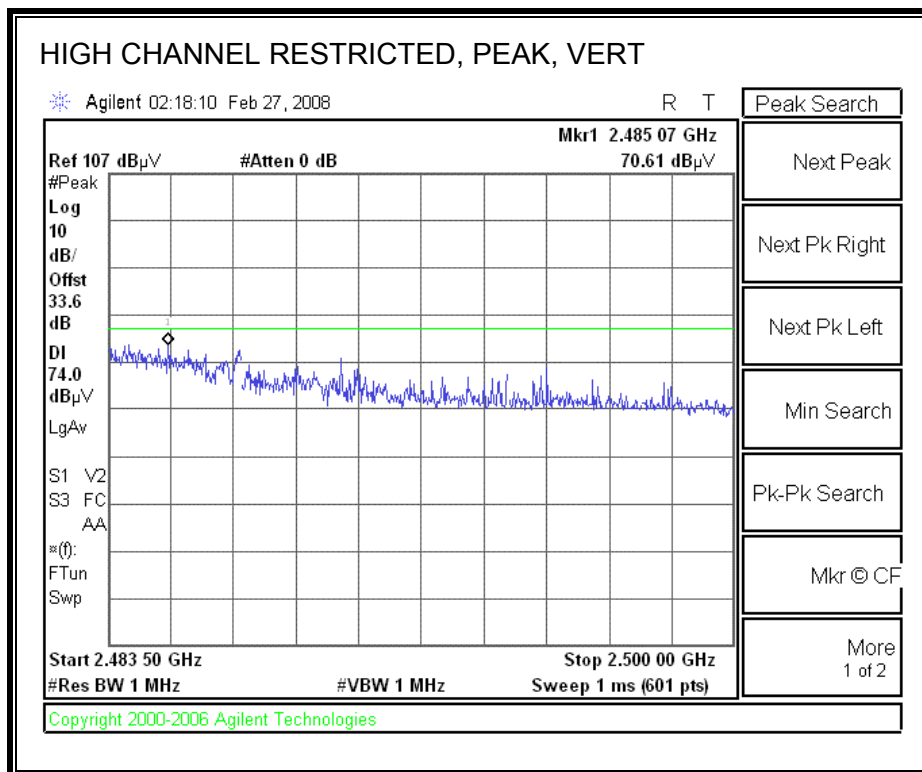

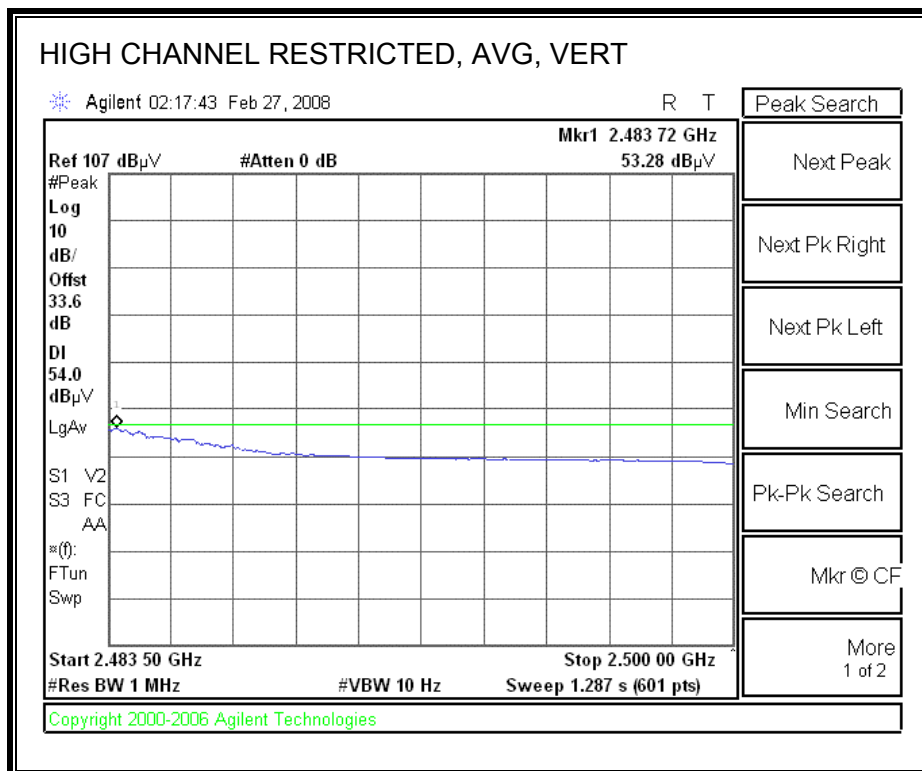



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																	
Compliance Certification Services, Fremont 5m Chamber																	
Company: Atheros Project #: 08U11571 Date: 2/27/2008 Test Engineer: Chin Pang Configuration: EUT/Antenna/Laptop Mode: HT20, TX S/N: HB92-031-S-00805 FEM #1																	
Test Equipment:																	
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit									
T73; S/N: 6717 @3m		T34 HP 8449B						FCC 15.209									
Hi Frequency Cables																	
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz							
				A-5m Chamber				R_001									
f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	Fldr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes		
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)		
Low Ch (2412MHz)																	
3.216	3.0	43.5	31.6	30.5	5.5	-35.7	0.0	0.0	43.8	31.9	74	54	-30.2	-22.1	V		
4.824	3.0	45.0	32.0	33.3	6.9	-34.8	0.0	0.0	50.4	37.4	74	54	-23.6	-16.6	V		
7.326	3.0	43.0	30.0	35.0	8.4	-34.1	0.0	0.0	52.3	39.3	74	54	-21.7	-14.7	V		
3.216	3.0	45.6	39.4	30.5	5.5	-35.7	0.0	0.0	45.9	39.7	74	54	-28.1	-14.3	H		
4.824	3.0	43.7	30.7	33.3	6.9	-34.8	0.0	0.0	49.1	36.1	74	54	-24.9	-17.9	H		
7.326	3.0	42.0	29.3	35.0	8.4	-34.1	0.0	0.0	51.3	38.6	74	54	-22.7	-15.4	H		
Mid Ch (2437MHz)																	
3.249	3.0	42.8	34.0	30.6	5.5	-35.7	0.0	0.0	43.3	34.5	74	54	-30.7	-19.5	V		
4.874	3.0	47.2	33.0	33.4	6.9	-34.8	0.0	0.0	52.7	38.5	74	54	-21.3	-15.5	V		
7.311	3.0	44.0	31.6	35.0	8.4	-34.1	0.0	0.0	53.3	40.9	74	54	-20.7	-13.1	V		
3.249	3.0	43.0	35.7	30.6	5.5	-35.7	0.0	0.0	43.5	36.2	74	54	-30.5	-17.8	H		
4.874	3.0	45.0	32.6	33.4	6.9	-34.8	0.0	0.0	50.5	38.1	74	54	-23.5	-15.9	H		
7.311	3.0	43.5	31.3	35.0	8.4	-34.1	0.0	0.0	52.8	40.6	74	54	-21.2	-13.4	H		
High Ch (2462MHz)																	
3.283	3.0	42.0	31.6	30.7	5.6	-35.6	0.0	0.0	42.6	32.2	74	54	-31.4	-21.8	V		
4.924	3.0	46.3	33.5	33.4	7.0	-34.8	0.0	0.0	51.9	39.1	74	54	-22.1	-14.9	V		
7.386	3.0	45.0	31.4	35.0	8.4	-34.1	0.0	0.0	54.4	40.8	74	54	-19.6	-13.2	V		
3.283	3.0	42.5	32.0	30.7	5.6	-35.6	0.0	0.0	43.1	32.6	74	54	-30.9	-21.4	H		
4.924	3.0	44.2	32.3	33.4	7.0	-34.8	0.0	0.0	49.8	37.9	74	54	-24.2	-16.1	H		
7.386	3.0	43.8	31.7	35.0	8.4	-34.1	0.0	0.0	53.2	41.1	74	54	-20.8	-12.9	H		
Rev. 4.12.7																	
Note: No other emissions were detected above the system noise floor.																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										


8.2.4. TRANSMITTER ABOVE 1 GHz FOR 802.11n HT40 MODE IN THE 2.4 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

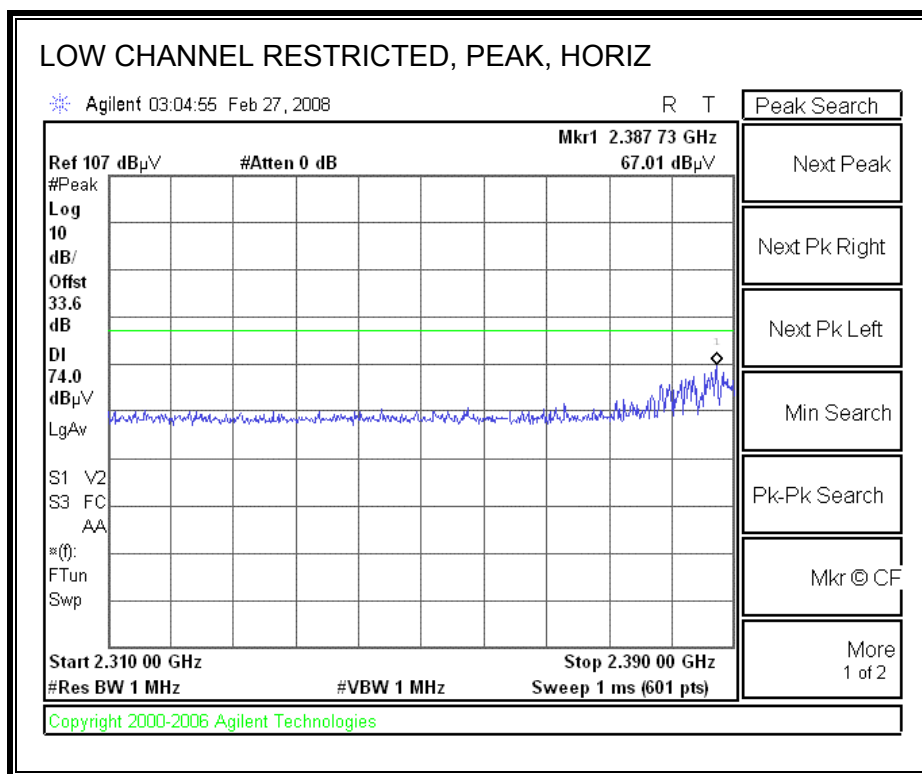

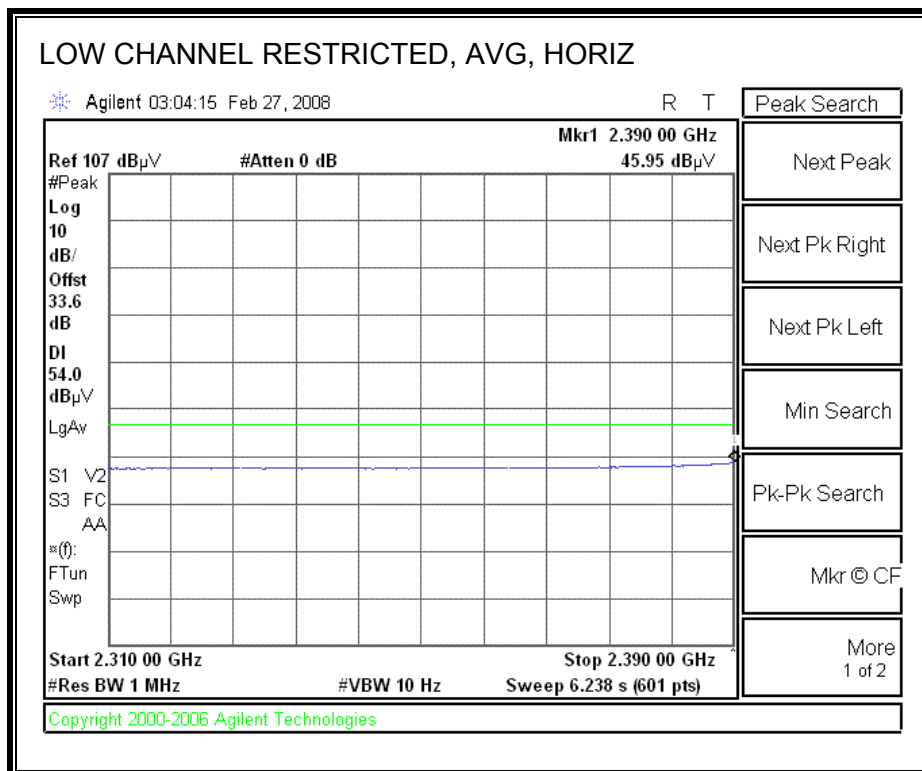



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

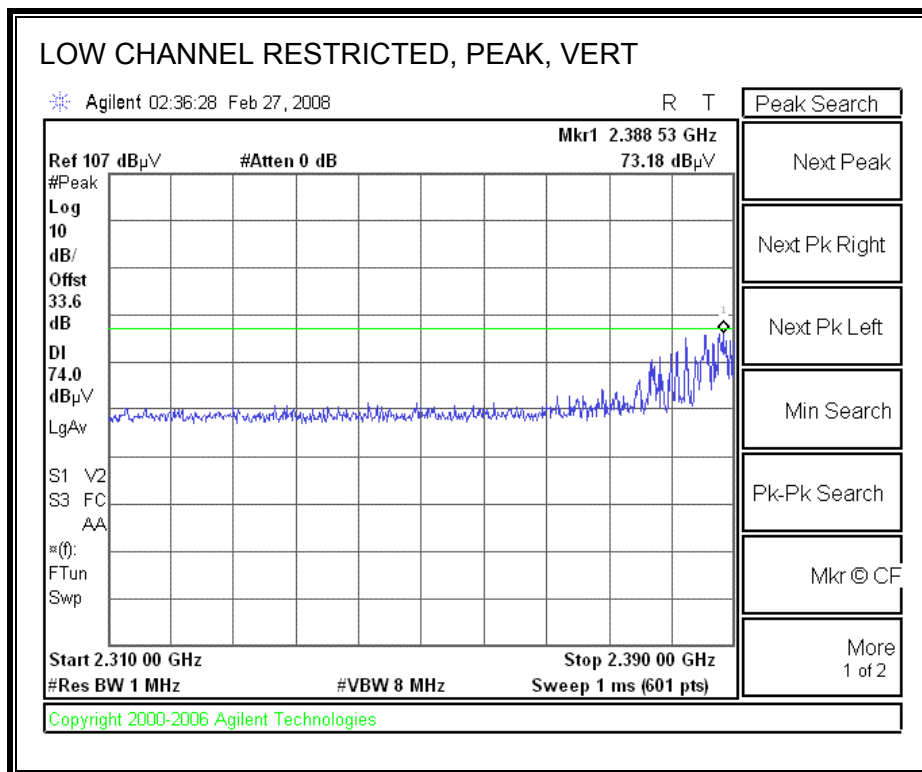

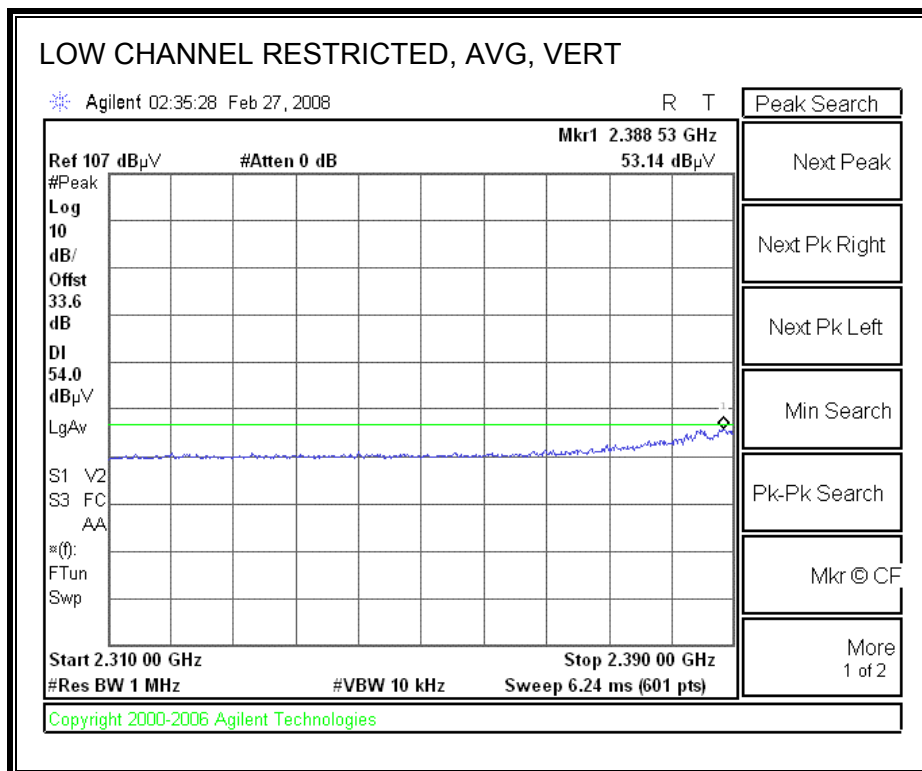



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

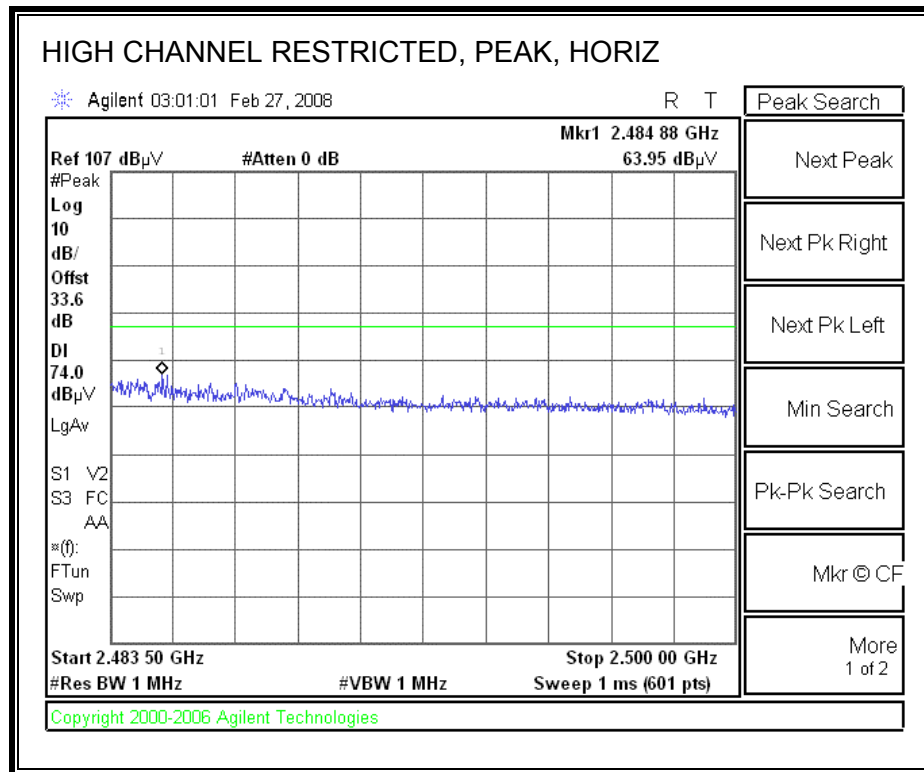

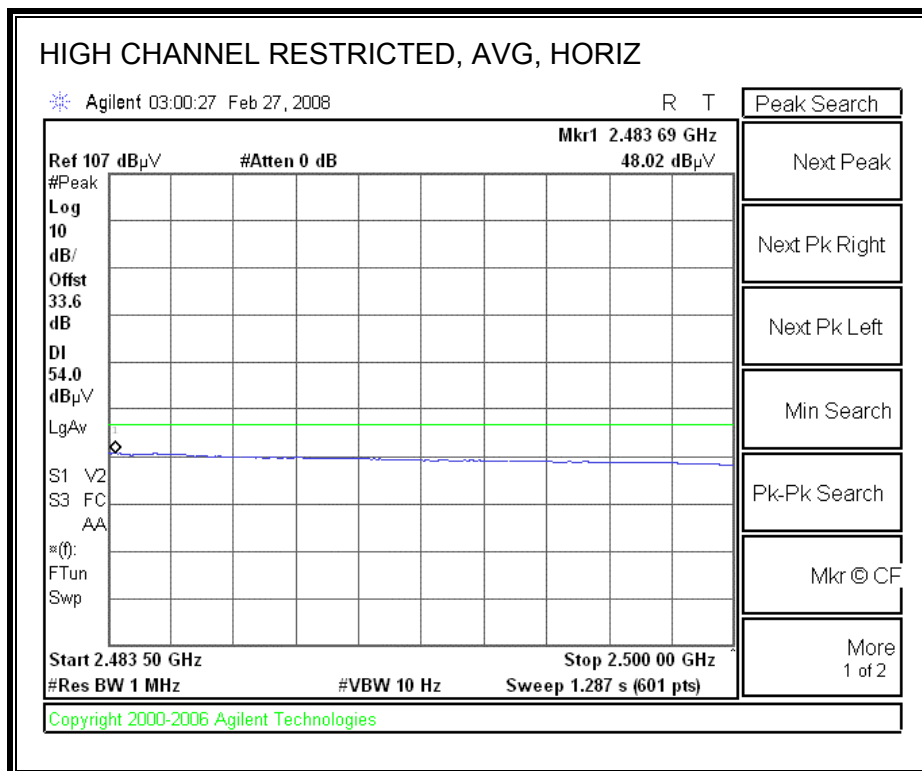

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

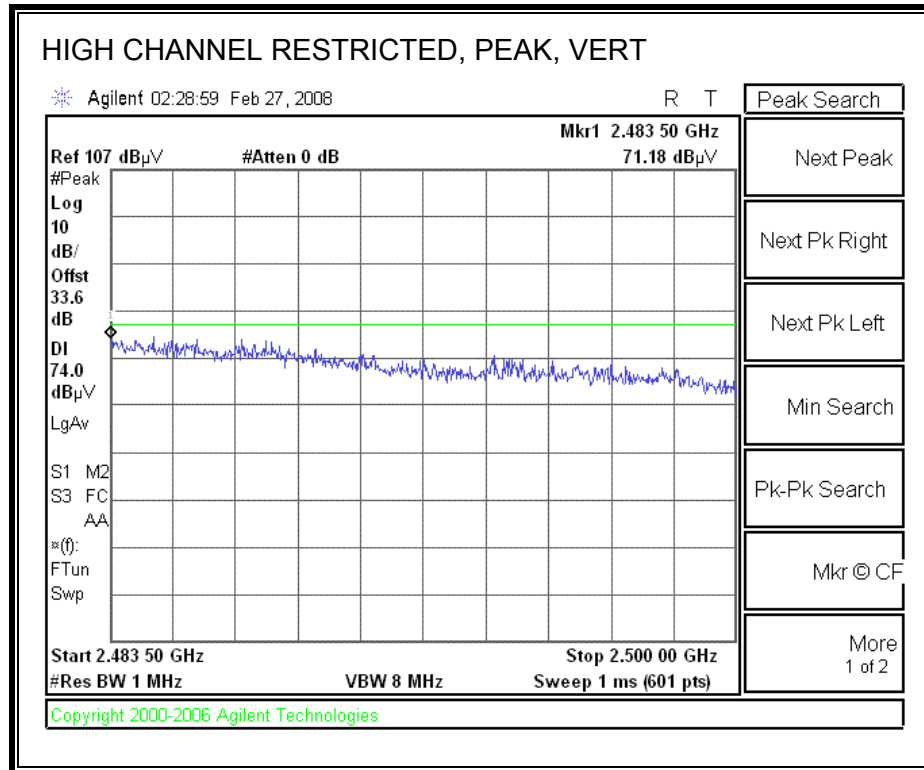

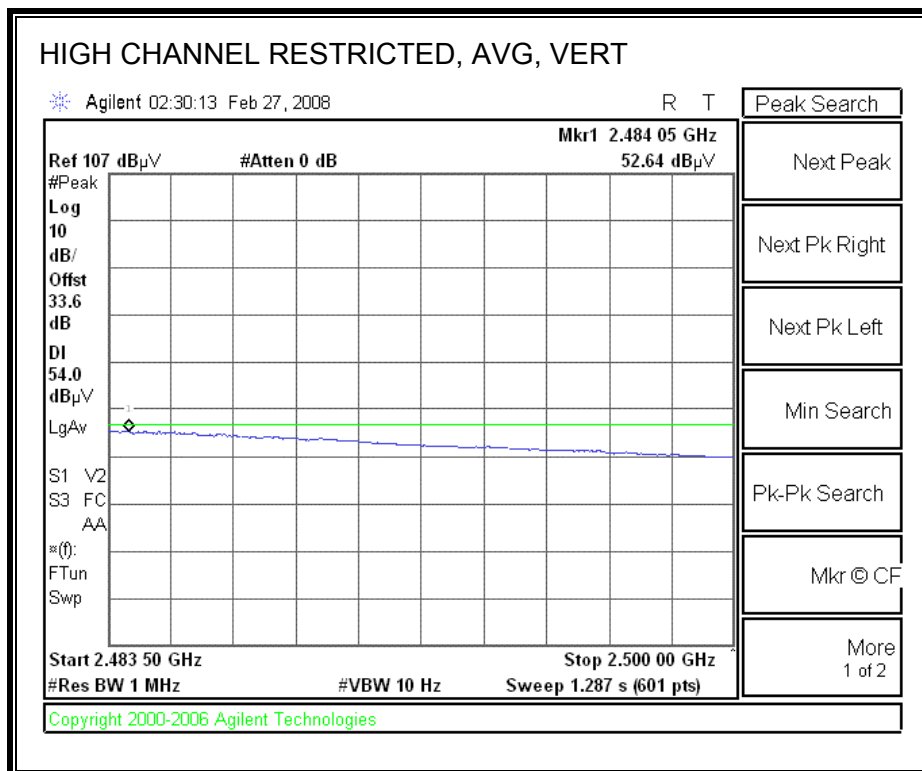

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Company: Atheros
Project #: 08U11571
Date: 2/27/2008
Test Engineer: Chin Pang
Configuration: EUT/Antenna/Laptop
Mode: HT40, TX
S/N: HB92-031-S-00805
FEM #1

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit
T73; S/N: 6717 @3m	T34 HP 8449B			FCC 15.209

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter	<u>Peak Measurements</u> RBW=VBW=1MHz <u>Average Measurements</u> RBW=1MHz; VBW=10Hz
		A-5m Chamber		R_001	

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch (2422MHz)															
3.229	3.0	43.5	31.6	30.6	5.5	-35.7	0.0	0.0	43.9	32.0	74	54	-30.1	-22.0	V
4.844	3.0	45.0	31.8	33.3	6.9	-34.8	0.0	0.0	50.4	37.2	74	54	-23.6	-16.8	V
7.266	3.0	43.0	29.1	35.0	8.4	-34.1	0.0	0.0	52.2	38.3	74	54	-21.8	-15.7	V
3.229	3.0	44.0	32.0	30.6	5.5	-35.7	0.0	0.0	44.4	32.4	74	54	-29.6	-21.6	H
4.844	3.0	43.6	30.6	33.3	6.9	-34.8	0.0	0.0	49.0	36.0	74	54	-25.0	-18.0	H
7.266	3.0	42.3	29.0	35.0	8.4	-34.1	0.0	0.0	51.5	38.2	74	54	-22.5	-15.8	H
Mid Ch (2437MHz)															
3.249	3.0	42.5	32.0	30.6	5.5	-35.7	0.0	0.0	43.0	32.5	74	54	-31.0	-21.5	V
4.874	3.0	46.8	33.0	33.4	6.9	-34.8	0.0	0.0	52.3	38.5	74	54	-21.7	-15.5	V
7.311	3.0	43.0	30.4	35.0	8.4	-34.1	0.0	0.0	52.3	39.7	74	54	-21.7	-14.3	V
3.249	3.0	43.6	33.7	30.6	5.5	-35.7	0.0	0.0	44.1	34.2	74	54	-29.9	-19.8	H
4.874	3.0	44.7	31.8	33.4	6.9	-34.8	0.0	0.0	50.2	37.3	74	54	-23.8	-16.7	H
7.311	3.0	42.6	30.5	35.0	8.4	-34.1	0.0	0.0	51.9	39.8	74	54	-22.1	-14.2	H
High Ch (2452MHz)															
3.269	3.0	42.5	31.0	30.7	5.6	-35.6	0.0	0.0	43.1	31.6	74	54	-30.9	-22.4	V
4.904	3.0	47.0	33.4	33.4	7.0	-34.8	0.0	0.0	52.5	38.9	74	54	-21.5	-15.1	V
7.356	3.0	44.3	32.3	35.0	8.4	-34.1	0.0	0.0	53.7	41.7	74	54	-20.3	-12.3	V
3.269	3.0	43.6	33.0	30.7	5.6	-35.6	0.0	0.0	44.2	33.6	74	54	-29.8	-20.4	H
4.904	3.0	45.5	31.5	33.4	7.0	-34.8	0.0	0.0	51.0	37.0	74	54	-23.0	-17.0	H
7.356	3.0	43.2	30.8	35.0	8.4	-34.1	0.0	0.0	52.6	40.2	74	54	-21.4	-13.8	H

Rev. 4.12.7

Note: No other emissions were detected above the system noise floor.

8.2.5. TRANSMITTER ABOVE 1 GHz FOR 802.11a MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Company: Atheros Communications															
Project #: 08U11571															
Date: 2/28/2008															
Test Engineer: Chin Pang															
Configuration: EUT/Antenna/Laptop															
Mode: Tx a mode															
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T73; S/N: 6717 @3m		T34 HP 8449B		T88 Miteq 26-40GHz		T39-T88 ARA 18-40GHz & Mixer > 40GHz		FCC 15.205							
Hi Frequency Cables															
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz					
				A-5m Chamber		HPF_7.6GHz									
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
5745MHz															
11.490	1.0	55.7	43.5	37.5	11.6	-32.5	-9.5	0.7	63.4	51.2	74	54	-10.6	-2.8	V
11.490	1.0	48.6	38.0	37.5	11.6	-32.5	-9.5	0.7	56.3	45.7	74	54	-17.7	-8.3	H
5785MHz															
11.570	1.0	56.0	44.2	37.5	11.7	-32.5	-9.5	0.7	63.8	52.0	74	54	-10.2	-2.0	V
11.570	1.0	50.0	38.6	37.5	11.7	-32.5	-9.5	0.7	57.8	46.4	74	54	-16.2	-7.6	H
5825MHz															
11.650	1.0	54.0	42.0	37.5	11.8	-32.5	-9.5	0.7	61.9	49.9	74	54	-12.1	-4.1	V
11.650	1.0	47.4	35.0	37.5	11.8	-32.5	-9.5	0.7	55.3	42.9	74	54	-18.7	-11.1	H
Rev. 4.12.7															
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										

8.2.6. TRANSMITTER ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Company: Atheros Communications Project #: 08U11571 Date: 2/28/2008 Test Engineer: Chin Pang Configuration: EUT/Antenna/Laptop Mode: Tx HT20 mode															
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T73; S/N: 6717 @3m		T34 HP 8449B		T88 Miteq 26-40GHz		T39-T88 ARA 18-40GHz & Mixer > 40GHz		FCC 15.205							
Hi Frequency Cables															
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz					
				A-5m Chamber		HPF_7.6GHz									
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
5745MHz															
11.490	1.0	55.4	43.0	37.5	11.6	-32.5	-9.5	0.7	63.1	50.7	74	54	-10.9	-3.3	V
11.490	1.0	51.2	37.6	37.5	11.6	-32.5	-9.5	0.7	58.9	45.3	74	54	-15.1	-8.7	H
5785MHz															
11.570	1.0	56.0	43.5	37.5	11.7	-32.5	-9.5	0.7	63.8	51.3	74	54	-10.2	-2.7	V
11.570	1.0	53.2	38.2	37.5	11.7	-32.5	-9.5	0.7	61.0	46.0	74	54	-13.0	-8.0	H
5825MHz															
11.650	1.0	54.8	41.0	37.5	11.8	-32.5	-9.5	0.7	62.7	48.9	74	54	-11.3	-5.1	V
11.650	1.0	51.6	36.0	37.5	11.8	-32.5	-9.5	0.7	59.5	43.9	74	54	-14.5	-10.1	H
Rev. 4.12.7															
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										

8.2.7. TRANSMITTER ABOVE 1 GHz FOR 802.11n HT40 MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Company: Atheros Communications															
Project #: 08U11571															
Date: 2/28/2008															
Test Engineer: Chin Pang															
Configuration: EUT/Antenna/Laptop.															
Mode: Tx HT40 mode															
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T73; S/N: 6717 @3m		T34 HP 8449B		T88 Miteq 26-40GHz		T39-T88 ARA 18-40GHz & Mixer > 40GHz		FCC 15.205							
Hi Frequency Cables															
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz					
				A-5m Chamber		HPF_7.6GHz									
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low channel (5755MHz)															
11.510	1.0	52.6	42.5	37.5	11.6	-32.5	-9.5	0.7	60.3	50.2	74	54	-13.7	-3.8	V
11.510	1.0	46.5	33.5	37.5	11.6	-32.5	-9.5	0.7	54.2	41.2	74	54	-19.8	-12.8	H
High Channel (5795MHz)															
11.590	1.0	51.5	42.0	37.5	11.7	-32.5	-9.5	0.7	59.4	49.9	74	54	-14.6	-4.1	V
11.590	1.0	47.0	35.0	37.5	11.7	-32.5	-9.5	0.7	54.9	42.9	74	54	-19.1	-11.1	H
Rev. 4.12.7															
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency		Amp	Preamp Gain		Avg Lim	Average Field Strength Limit								
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Pk Lim	Peak Field Strength Limit								
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Avg Mar	Margin vs. Average Limit								
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Pk Mar	Margin vs. Peak Limit								
CL	Cable Loss		HPF	High Pass Filter											

8.3. RECEIVER ABOVE 1 GHz

High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Company: Atheros Communications															
Project #: 08U11571															
Date: 2/29/2008															
Test Engineer: Chin Pang															
Configuration: EUT/Antenna/Laptop															
Mode: 2.4GHz RX (Worst Case)															
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T73; S/N: 6717 @3m		T34 HP 8449B						FCC 15.209							
Hi Frequency Cables															
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz					
				A-5m Chamber											
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Mid Ch															
1.062	3.0	54.0	34.2	25.9	3.1	-38.2	0.0	0.0	44.8	25.0	74	54	-29.2	-29.0	V
2.492	3.0	58.5	36.0	29.5	4.9	-36.3	0.0	0.0	56.7	34.2	74	54	-17.3	-19.8	V
1.062	3.0	53.4	33.5	25.9	3.1	-38.2	0.0	0.0	44.2	24.3	74	54	-29.8	-29.7	H
2.500	3.0	57.8	34.1	29.5	4.9	-36.3	0.0	0.0	56.0	32.3	74	54	-18.0	-21.7	H
Rev. 4.12.7															
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										

8.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA

Condition: FCC CLASS-B HORIZONTAL
Test Operator: Chin Pang
Project # : 08U11571
Company : Atheros Communications
Config : EUT/laptop/antenna
Mode : 2.4GHz Band, Tx (Worst Case)
Target : FCC Class B

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	181.320	55.83	-18.52	37.32	43.50	-6.18	Peak
2	357.860	48.00	-14.43	33.57	46.00	-12.43	Peak
3	454.860	48.33	-12.28	36.05	46.00	-9.95	Peak
4	551.860	44.50	-10.68	33.82	46.00	-12.18	Peak
5	700.270	43.83	-8.56	35.27	46.00	-10.73	Peak
6	799.210	43.33	-7.05	36.28	46.00	-9.72	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA

Condition: FCC CLASS-B VERTICAL
Test Operator: Chin Pang
Project # : 08U11571
Company : Atheros Communications
Config : EUT/laptop/antenna
Mode : 2.4GHz Band, Tx (Worst Case)
Target : FCC Class B

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	175.500	51.67	-18.49	33.18	43.50	-10.32	Peak
2	258.920	49.67	-17.48	32.19	46.00	-13.81	Peak
3	356.890	50.33	-14.31	36.02	46.00	-9.98	Peak
4	452.920	49.83	-12.32	37.51	46.00	-8.49	Peak
5	486.870	48.00	-11.59	36.41	46.00	-9.59	Peak
6	698.330	40.33	-8.54	31.79	46.00	-14.21	Peak

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4

RESULTS

6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.22	51.17	--	38.33	0.00	63.01	53.01	-11.84	-14.68	L1
0.32	40.84	--	29.74	0.00	59.63	49.63	-18.79	-19.89	L1
21.71	38.27	--	32.32	0.00	60.00	50.00	-21.73	-17.68	L1
0.22	52.03	--	38.67	0.00	63.01	53.01	-10.98	-14.34	L2
0.32	40.62	--	29.60	0.00	59.63	49.63	-19.01	-20.03	L2
21.26	34.70	--	27.01	0.00	60.00	50.00	-25.30	-22.99	L2
6 Worst Data									

LINE 1 RESULTS



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 70 File#: 08U11571 LC.EMI Date: 02-29-2008 Time: 18:21:49

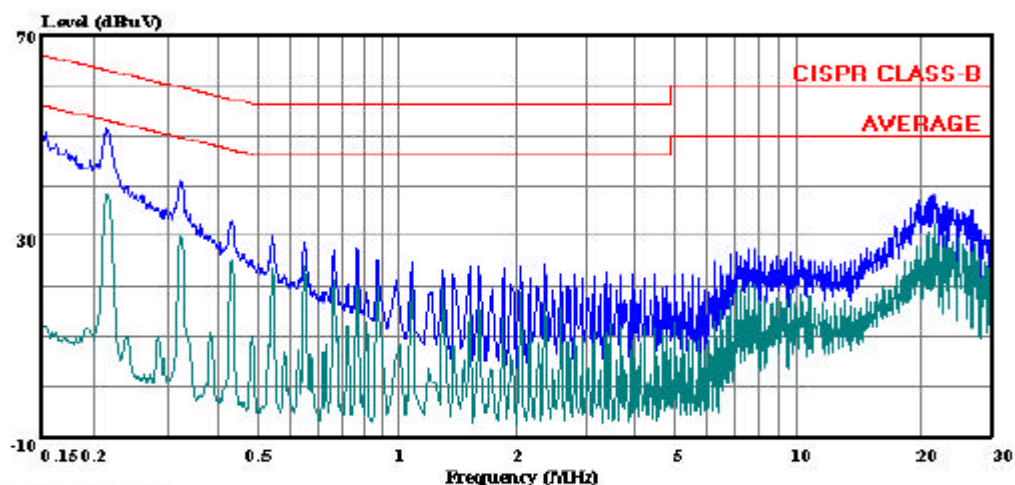


(Line Conduction)

Trace: 68

Ref Trace:

Condition: CISPR CLASS-B
Test Operator:: Mengistu Mekuria
Project #: 08U11571
Company: Atheros Communications
Configuration: EUT With Support Laptop
Mode: Tx (Worst Case)
Target: FCC Class B
Voltage: 115 VAC / 60Hz
Line 1: Peak (Blue); Average (Green)

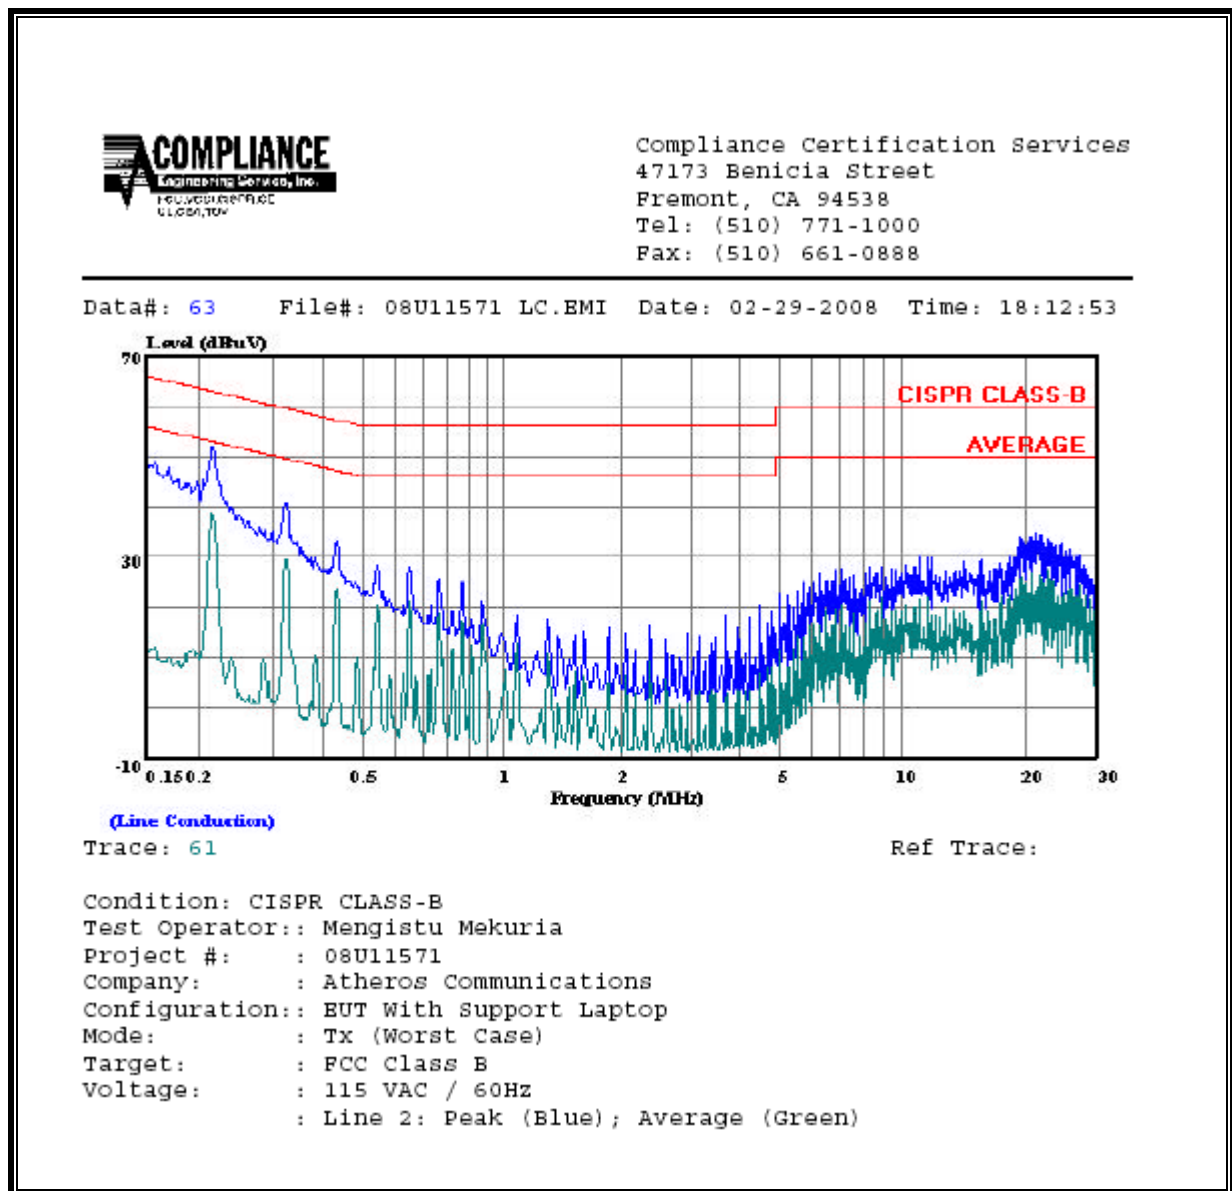

10. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
 2. A power density of 10 W/m² is equivalent to 1 mW/cm².
 3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

The power density in units of mW/cm² is converted to units of W/m² by multiplying by a factor of 10.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

From IC Safety Code 6, Section 2.2 Table 5 Column 4, $S = 10 \text{ W/m}^2$

RESULTS

(MPE distance is greater than 20 cm)

Mode	Band	FCC Limit (mW/cm ²)	IC Limit (W/m ²)	Output (dBm)	Antenna (dBi)	MPE Distance (cm)
WLAN	2.4 GHz	1.0	10.0	29.58	6.33	17.61
WLAN	5 GHz	1.0	10.0	29.86	6.76	19.11