

SAR TEST REPORT

The following samples were submitted and identified on behalf of the client as:

Equipment Under Test of Host	Tablet Computer
Marketing Name of Host	ICONIA W700 xx ("*" = 0-9, a-z, A-Z, "(, ")", "- ", "/", "\", "_ " or blank)
Brand Name of Host	Acer
Model No. of Host	W700
Equipment Under Test of Module	802.11 a/b/g/n + BT Combo Card
Model No. of Module	AR5BMD22
Company Name	Qualcomm Atheros Inc.
Company Address	1700 Technology Drive, San Jose, CA 95110
Standards	FCC OET 65 supplement C, IEEE /ANSI C95.1 , C95.3, IEEE 1528
FCC ID	PPD-AR5BMD22
Date of Receipt	Jul. 19, 2012
Date of Test(s)	Aug. 13, 2012 ~ Sep. 03, 2012
Date of Issue	Sep. 06, 2012

In the configuration tested, the EUT complied with the standards specified above.


Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

Signed for on the behalf of SGS

Engineer



Chris Tsung

Date: Sep. 06, 2012

Supervisor



Kelly Tsai

Date: Sep. 06, 2012

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Version

Report Number	Revision	Date	Memo
ES/2012/70004	00	2012/08/27	Initial creation of test report.
ES/2012/70004	01	2012/08/30	1 st modification
ES/2012/70004	02	2012/09/05	2 nd modification
ES/2012/70004	03	2012/09/06	3 rd modification

This test report contains a reference to the previous version test report that it replaces.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Contents

1. General Information	4
1.1 Testing Laboratory	4
1.2 Details of Applicant	4
1.3 Description of EUT	4
1.4 Test Environment	12
1.5 Operation Description.....	13
1.6 The SAR Measurement System	14
1.7 System Components	16
1.8 SAR System Verification	18
1.9 Tissue Simulant Fluid for the Frequency Band	20
1.10 Evaluation Procedures	24
1.11 Probe Calibration Procedures	26
1.12 Test Standards and Limits.....	29
2. Summary of Results	31
3. Instruments List	37
4. Measurements	38
5. SAR System Performance Verification.....	118
6. DAE & Probe Calibration Certificate.....	122
7. Uncertainty Budget.....	138
8. Phantom Description	139
9. System Validation from Original Equipment Supplier	140

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory	
134, Wu Kung Road, Wuku industrial zone	
Taipei county, Taiwan, R.O.C.	
Tel	+886-2-2299-3279
Fax	+886-2-2298-0488
Internet	http://www.tw.sgs.com/
Testing Location	1F, No.8, Alley 15, Lane 120, Sec .1, NeiHu Road NeiHu District Taipei City 114, Taiwan

1.2 Details of Applicant

Company Name	Qualcomm Atheros Inc.
Company Address	1700 Technology Drive, San Jose, CA 95110
Contact Person	Stanley Lin
Tel	+886-2-8751-6385 # 1633
E-mail	slin@qca.qualcomm.com

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.3 Description of EUT

EUT Name of Host	Tablet Computer			
Marketing Name of Host	ICONIA W700 xx ("*" = 0-9, a-z, A-Z, "(" , ")"", "- ", "/"", "\"", "_ " or blank)			
Brand Name of Host	Acer			
Model No. of Host	W700			
EUT Name of Module	802.11 a/b/g/n + BT Combo Card			
Model No. of Module	AR5BMD22			
FCC ID	PPD-AR5BMD22			
Mode of Operation	<input checked="" type="checkbox"/> WLAN802.11 a/b/g/ n (20M/40M) band			
Duty Cycle	WLAN802.11 a/b/g/n(20M/40M)	1		
TX Frequency Range (MHz)	WLAN802.11 b/g/n(20M)	2412	—	2462
	WLAN802.11 n (40M)	2422	—	2452
	WLAN802.11 a 5.2G	5180	—	5320
	WLAN802.11 n (20M) 5.2G	5180	—	5320
	WLAN802.11 n (40M) 5.2G	5190	—	5310
	WLAN802.11 a 5.5G	5500	—	5700
	WLAN802.11 n (20M) 5.5G	5500	—	5700
	WLAN802.11 n (40M) 5.5G	5510	—	5670
	WLAN802.11 a 5.8G	5745	—	5825
	WLAN802.11 n (20M) 5.8G	5745	—	5825
	WLAN802.11 n (40M) 5.8G	5755	—	5795

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Channel Number (ARFCN)	WLAN802.11 b/g/n(20M)		1	—	11
	WLAN802.11 n (40M)		3	—	9
	WLAN802.11 a 5.2G		36	—	64
	WLAN802.11 n (20M) 5.2G		36	—	64
	WLAN802.11 n (40M) 5.2G		38	—	62
	WLAN802.11 a 5.5G		100	—	140
	WLAN802.11 n (20M) 5.5G		100	—	140
	WLAN802.11 n (40M) 5.5G		102	—	134
	WLAN802.11 a 5.8G		149	—	165
	WLAN802.11 n (20M) 5.8G		149	—	165
WLAN802.11 n (40M) 5.8G		151	—	159	
Max. SAR Measured(1 g) (Unit: W/Kg)	Aux Antenna	WLAN802.11a 5.2G	1.15	<input checked="" type="checkbox"/> Lap held <input type="checkbox"/> Secondary Portrait <input type="checkbox"/> Secondary Landscape <u>64</u> Channel	
	MIMO	WLAN802.11a 5.8G	1.18	<input checked="" type="checkbox"/> Lap held <input type="checkbox"/> Secondary Portrait <input type="checkbox"/> Secondary Landscape <u>157</u> Channel	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

#. WLAN802.11 a/b/g/n (20M/40M) conducted power table:

Aux Antenna (CH1)

WLAN802.11 b		Average Power Output (dBm)			
CH	Frequency (MHz)	Data Rate (Mbps)			
		1	2	5.5	11
1	2412	12.84	12.77	12.62	12.54
6	2437	13.47	13.18	13.21	13.35
11	2462	12.83	12.67	12.62	12.67

WLAN802.11 g		Average Power Output (dBm)							
CH	Frequency (MHz)	Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
1	2412	11.78	11.72	11.64	11.53	11.64	11.70	11.54	11.73
6	2437	13.38	13.09	13.25	13.36	13.22	13.29	13.26	13.27
11	2462	9.88	9.58	9.64	9.69	9.60	9.68	9.66	9.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

802.11a 5.2G/5.5G/5.8G		Average Power Output(dBm)							
CH	Frequency (MHz)	Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
36	5180	10.43	10.37	10.29	10.18	10.24	10.18	10.30	10.18
40	5200	10.38	10.26	10.31	10.19	10.33	10.23	10.20	10.22
44	5220	10.47	10.27	10.23	10.37	10.43	10.45	10.17	10.26
48	5240	9.67	9.46	9.44	9.53	9.51	9.52	9.55	9.66
52	5260	9.94	9.80	9.87	9.66	9.85	9.77	9.89	9.84
56	5280	9.88	9.67	9.79	9.59	9.76	9.72	9.76	9.63
60	5300	9.96	9.71	9.68	9.72	9.87	9.93	9.83	9.81
64	5320	9.98	9.92	9.97	9.84	9.89	9.68	9.79	9.89
100	5500	10.97	10.81	10.75	10.90	10.78	10.74	10.69	10.94
104	5520	10.86	10.58	10.70	10.57	10.69	10.69	10.70	10.75
108	5540	12.47	12.17	12.41	12.44	12.41	12.24	12.30	12.22
112	5560	12.33	12.16	12.03	12.24	12.05	12.14	12.10	12.15
116	5580	12.48	12.44	12.31	12.40	12.43	12.44	12.29	12.24
120	5600	12.43	12.27	12.19	12.39	12.19	12.40	12.26	12.25
124	5620	12.32	12.10	12.28	12.20	12.27	12.03	12.14	12.19
128	5640	12.49	12.29	12.25	12.33	12.25	12.28	12.30	12.28
132	5660	12.23	11.95	11.96	11.99	12.14	12.22	12.17	12.07
136	5680	11.98	11.70	11.80	11.91	11.94	11.75	11.71	11.97
140	5700	11.66	11.55	11.54	11.62	11.38	11.64	11.62	11.56
149	5745	11.38	11.34	11.29	11.30	11.22	11.31	11.25	11.20
153	5765	11.31	11.20	11.26	11.19	11.17	11.08	11.07	11.02
157	5785	11.86	11.77	11.64	11.73	11.59	11.84	11.57	11.84
161	5805	11.73	11.45	11.68	11.67	11.46	11.62	11.71	11.48
165	5825	11.91	11.90	11.64	11.81	11.87	11.71	11.68	11.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

MIMO (CH0 + CH1)

WLAN802.11 b		Average Power Output (dBm)			
CH	Frequency (MHz)	Data Rate (Mbps)			
		1	2	5.5	11
1	2412	16.07	16.04	15.85	15.88
6	2437	16.55	16.38	16.27	16.50
11	2462	16.11	16.06	16.03	15.91

WLAN802.11 g		Average Power Output(dBm)							
CH	Frequency (MHz)	Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
1	2412	14.68	14.58	14.58	14.45	14.65	14.56	14.63	14.53
6	2437	16.33	16.10	16.10	16.22	16.12	16.18	16.23	16.08
11	2462	12.92	12.78	12.83	12.87	12.90	12.78	12.82	12.66

WLAN802.11 n (20M)		Average Power Output(dBm)							
CH	Frequency (MHz)	Data Rate (Mbps)							
		6.5	13	19.5	26	39	52	58.5	65
1	2412	13.62	13.38	13.54	13.47	13.56	13.42	13.32	13.33
6	2437	16.26	16.25	16.25	16.16	16.19	16.09	16.20	16.13
11	2462	12.71	12.63	12.67	12.44	12.64	12.60	12.54	12.66

WLAN802.11 n (40M)		Average Power Output(dBm)							
CH	Frequency (MHz)	Data Rate (Mbps)							
		13.5	27	40.5	54	81	108	121.5	135
3	2422	13.75	13.47	13.46	13.65	13.49	13.62	13.59	13.62
6	2437	16.23	16.22	16.05	16.12	15.96	15.96	16.21	16.12
9	2452	14.02	13.91	13.74	13.83	14.00	13.95	13.95	13.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

802.11a		Average Power Output(dBm)							
5.2G/5.5G/5.8G									
CH	Frequency (MHz)	Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
36	5180	13.44	13.23	13.19	13.16	13.26	13.32	13.41	13.32
40	5200	13.31	13.14	13.20	13.17	13.24	13.13	13.23	13.16
44	5220	13.35	13.11	13.11	13.15	13.13	13.27	13.16	13.17
48	5240	13.24	13.11	13.11	13.05	13.22	13.21	13.12	12.96
52	5260	12.89	12.86	12.61	12.80	12.75	12.78	12.77	12.70
56	5280	13.06	12.79	13.04	12.92	12.83	12.78	12.76	12.85
60	5300	13.05	12.82	12.75	12.83	12.81	13.02	13.02	13.03
64	5320	13.09	12.83	12.92	12.88	12.80	12.94	12.91	13.07
100	5500	14.13	14.01	14.06	13.85	13.98	14.05	13.99	13.90
104	5520	14.18	14.01	13.91	13.89	13.96	14.02	14.14	14.08
108	5540	15.68	15.52	15.45	15.55	15.42	15.40	15.49	15.41
112	5560	15.58	15.55	15.57	15.50	15.28	15.55	15.30	15.51
116	5580	15.72	15.57	15.48	15.55	15.50	15.58	15.57	15.60
120	5600	15.56	15.55	15.33	15.32	15.47	15.43	15.34	15.36
124	5620	15.28	15.23	15.02	15.26	15.02	15.13	15.17	15.23
128	5640	15.42	15.16	15.32	15.23	15.24	15.29	15.19	15.19
132	5660	15.66	15.46	15.37	15.60	15.63	15.65	15.53	15.52
136	5680	15.19	15.01	14.99	15.10	15.16	15.02	15.17	14.96
140	5700	15.17	14.98	15.15	15.02	15.04	15.05	14.88	14.89
149	5745	14.48	14.36	14.33	14.47	14.30	14.32	14.31	14.47
153	5765	14.55	14.26	14.28	14.40	14.28	14.45	14.46	14.43
157	5785	14.82	14.77	14.62	14.71	14.54	14.73	14.73	14.55
161	5805	14.73	14.59	14.58	14.67	14.53	14.64	14.52	14.71
165	5825	15.12	15.09	14.84	14.99	15.11	14.94	14.93	15.09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

802.11n(20M)		Average Power Output (dBm)							
5.2G/5.5G/5.8G									
CH	Frequency (MHz)	Data Rate (Mbps)							
		6.5	13	19.5	26	39	52	58.5	65
36	5180	13.87	13.62	13.66	13.83	13.57	13.85	13.61	13.68
48	5240	13.54	13.42	13.50	13.46	13.46	13.44	13.38	13.42
52	5260	13.13	13.01	12.85	13.05	12.95	13.04	12.99	13.04
64	5320	12.71	12.47	12.53	12.47	12.63	12.47	12.64	12.57
100	5500	13.92	13.74	13.63	13.87	13.65	13.79	13.62	13.68
116	5580	14.85	14.71	14.75	14.68	14.61	14.73	14.75	14.62
120	5600	14.96	14.90	14.81	14.72	14.86	14.71	14.80	14.74
140	5700	13.97	13.91	13.75	13.77	13.69	13.82	13.74	13.96
149	5745	14.12	14.02	13.86	14.03	14.09	14.04	14.02	13.93
157	5785	14.62	14.36	14.51	14.60	14.61	14.55	14.47	14.38
165	5825	14.72	14.64	14.68	14.68	14.45	14.45	14.45	14.58

802.11n(40M)		Average Power Output (dBm)							
5.2G/5.5G/5.8G									
CH	Frequency (MHz)	Data Rate (Mbps)							
		13.5	27	40.5	54	81	108	121.5	135
38	5190	14.60	14.24	14.29	14.28	14.39	14.53	14.37	14.38
46	5230	13.08	12.86	12.72	12.69	12.94	13.05	13.00	13.05
54	5270	12.61	12.49	12.54	12.46	12.43	12.27	12.37	12.24
62	5310	12.53	12.29	12.30	12.27	12.48	12.22	12.18	12.49
102	5510	9.85	9.64	9.66	9.64	9.77	9.50	9.55	9.55
118	5590	14.93	14.86	14.82	14.60	14.78	14.68	14.56	14.64
134	5670	14.74	14.68	14.67	14.64	14.60	14.67	14.45	14.68
151	5755	13.96	13.90	13.68	13.59	13.67	13.66	13.67	13.69
159	5795	14.06	14.00	13.67	13.74	13.87	14.04	13.88	13.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

#. Bluetooth conducted power table:

Frequency (MHz)	Peak Power (dBm)	
	BDR	EDR
2402	3.04	5.09
2441	2.68	5.01
2480	2.32	4.39

#. According KDB447498 , KDB648474 when the maximum transmitter and antenna output power are $\leq 60/f(\text{GHz})$ (mW) SAR evaluation is typically not required .

NOTE:

The device has three configurations (working mode)

- a. WLAN only (2x2 MIMO)
- b. BT+WLAN (2x2 MIMO) with reduced power on WLAN
- c. BT+WLAN (1x1 mode on a/b/g only, chain 0 is used for BT and chain 1 is used for WLAN)

1.4 Test Environment

Ambient Temperature: $22 \pm 2^\circ \text{C}$

Tissue Simulating Liquid: $22 \pm 2^\circ \text{C}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.5 Operation Description

Use chipset specific software to control the EUT, and makes it transmit in maximum power. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s).

The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.

We will test it with 3 configurations:

(Test distance is 0mm)

Configuration 1: Lap-held mode.

Configuration 2: Primary Portrait mode. (Not tested, since distance of WLAN antenna to edge is 205mm , which is larger than 5cm)

Configuration 3: Secondary Portrait mode.

Configuration 4: Primary Landscape mode. (Not tested, since distance of WLAN antenna to edge is 177.5mm , which is larger than 5cm)

Configuration 5: Secondary Landscape mode.

#. Bluetooth and WLAN can not be transmitted simultaneously, according to client's operational description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.6 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). A Model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

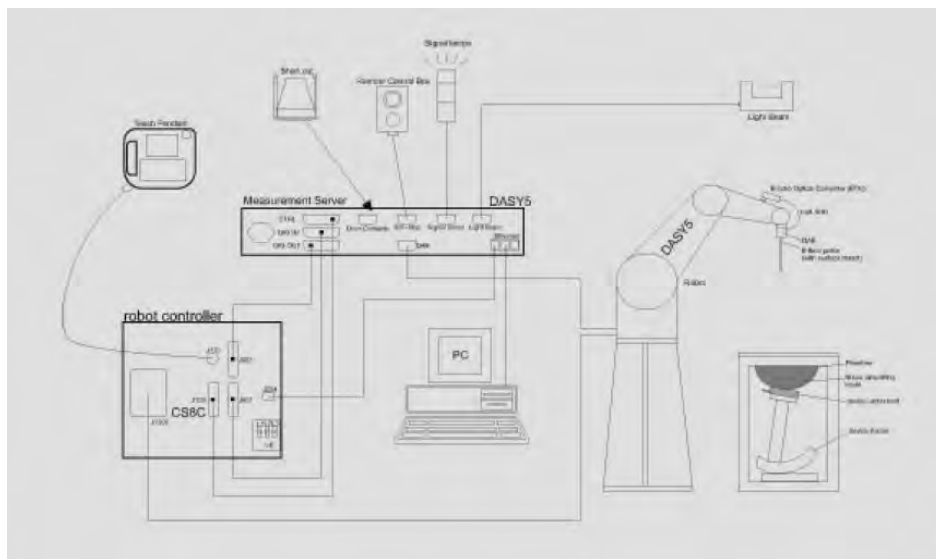


Fig.a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY 5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.7 System Components

EX3DV4 E-Field Probe


Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5200/5500/5800 MHz Additional CF for other liquids and frequencies upon request	
Frequency	10 MHz to > 6 GHz, Linearity: ± 0.6 dB (30 MHz to 4 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SAM PHANTOM V4.0C

Construction	<p>The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209.</p> <p>It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.</p>	
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	<p>Height: 810 mm;</p> <p>Length: 1000 mm;</p> <p>Width: 500 mm</p>	

DEVICE HOLDER

Construction	<p>The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin) , which is non-metal and non-conductive.</p> <p>The height can be adjusted to fit varies kind of notebooks.</p>	 <p style="text-align: center;">Device Holder</p>
--------------	---	---

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.8 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 5\%$ from the target SAR values. These tests were done at 2450/5200/5500/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was 21.7°C, the relative humidity was 62% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.


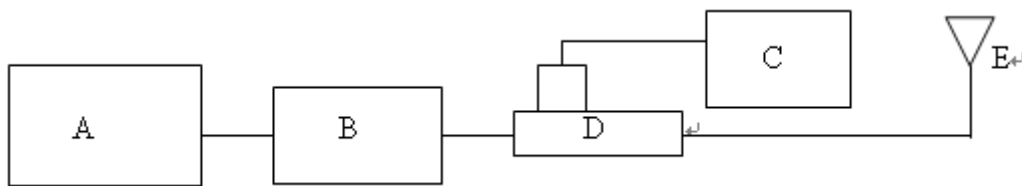


Fig.b The block diagram of system verification

- A. Signal generator
- B. Amplifier
- C. Power meter
- D. Dual directional coupling
- E. Reference dipole antenna

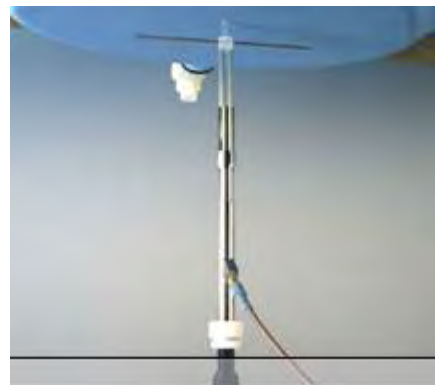

Photograph of the dipole Antenna

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Validation Kit	S/N	Frequency (MHz)	Target SAR (1g) (Pin=250mW) (mW/g)	Measured SAR (1g)(mW/g)	Measured Date
D2450V2	727	2450	12.7	13.1	Aug. 13, 2012
D5GHzV2	1104	5200	7.41	7.54	Sep. 01, 2012
D5GHzV2	1104	5500	7.89	7.91	Sep. 02, 2012
D5GHzV2	1104	5800	7.32	7.31	Sep. 03, 2012

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.9 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this body-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer (30 KHz-6000 MHz).

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the flat section of the phantom was 15cm±5mm during all tests. (Fig. 2)

Frequency (MHz)	Dielectric Parameters		Recommended Limits	Measured	Measurement Date	
2450	ϵ_r	Verification	49.78-55.02	53.113	Aug. 13, 2012	
		Test CH 1_WLAN		53.15		
		Test CH 6_WLAN		53.124		
		Test CH 11_WLAN		53.077		
	σ (S/m)	Verification	1.88-2.08	1.953		
		Test CH 1_WLAN		1.901		
		Test CH 6_WLAN		1.939		
		Test CH 11_WLAN		1.965		
	Simulated Tissue Temp.(°C)		20-24	21.7		
	5200	ϵ_r	Verification	45.41-50.19		49.153
Test CH 36_WLAN			49.2			
Test CH 38_WLAN			49.194			
Test CH 44_WLAN			49.106			
Test CH 46_WLAN			49.07			
Test CH 48_WLAN			49.058			
Test CH 52_WLAN			49.026			
Test CH 54_WLAN			48.997			
Test CH 62_WLAN			48.911			
Test CH 64_WLAN			48.881			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Frequency (MHz)	Dielectric Parameters		Recommended Limits	Measured	Measurement Date
5200	σ (S/m)	Verification	5.14-5.68	5.469	Sep. 01, 2012
		Test CH 36_WLAN		5.439	
		Test CH 38_WLAN		5.461	
		Test CH 44_WLAN		5.503	
		Test CH 46_WLAN		5.518	
		Test CH 48_WLAN		5.524	
		Test CH 52_WLAN		5.553	
		Test CH 54_WLAN		5.567	
		Test CH 62_WLAN		5.629	
		Test CH 64_WLAN		5.643	
		Simulated Tissue Temp.(°C)	20-24	21.7	
5500	ϵ_r	Verification	44.94-49.67	49.059	Sep. 02, 2012
		Test CH 100_WLAN		49.05	
		Test CH 102_WLAN		49.02	
		Test CH 104_WLAN		48.989	
		Test CH 116_WLAN		48.879	
		Test CH 118_WLAN		48.851	
		Test CH 120_WLAN		48.846	
		Test CH 124_WLAN		48.799	
		Test CH 128_WLAN		48.745	
		Test CH 134_WLAN		48.693	
		Test CH 136_WLAN		48.674	
		Test CH 140_WLAN		48.635	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Frequency (MHz)	Dielectric Parameters		Recommended Limits	Measured	Measurement Date
5500	σ (S/m)	Verification	5.49-6.07	5.708	Sep. 02, 2012
		Test CH 100_WLAN		5.708	
		Test CH 102_WLAN		5.72	
		Test CH 104_WLAN		5.733	
		Test CH 116_WLAN		5.823	
		Test CH 118_WLAN		5.834	
		Test CH 120_WLAN		5.854	
		Test CH 124_WLAN		5.875	
		Test CH 128_WLAN		5.905	
		Test CH 134_WLAN		5.951	
		Test CH 136_WLAN		5.964	
		Test CH 140_WLAN		5.996	
	Simulated Tissue Temp.(°C)		20-24	21.7	
5800	ϵ_r	Verification	44.46-49.14	48.03	Sep. 03, 2012
		Test CH 149_WLAN		48.097	
		Test CH 151_WLAN		48.088	
		Test CH 157_WLAN		48.044	
		Test CH 159_WLAN		48.018	
		Test CH 165_WLAN		47.954	
	σ (S/m)	Verification	5.89-6.51	6.196	
		Test CH 149_WLAN		6.119	
		Test CH 151_WLAN		6.14	
		Test CH 157_WLAN		6.175	
		Test CH 159_WLAN		6.19	
		Test CH 165_WLAN		6.236	
	Simulated Tissue Temp.(°C)		20-24	21.7	

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

The composition of the brain tissue simulating liquid:

Frequency (MHz)	Mode	Ingredient						Total amount
		DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	
2450M	Body	301.7ml	698.3ml	—	—	—	—	1.0L(Kg)

Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.10 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.11 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.11.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{\delta T}{\delta t}$$

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

- The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

- The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures ($\sim 2\%$ for c ; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed $\pm 5\%$.
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about $\pm 10\%$ (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is $\pm 5\%$ (RSS) when the same liquid is used for the calibration and for actual measurements and $\pm 7-9\%$ (RSS) when not, which is in good agreement with the estimates given in [2].

1.11.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

dielectric parameters of the liquid.

- Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- [1] N. Kuster, Q. Balzano, and J.C. Lin, Eds., *Mobile Communications Safety*, Chapman & Hall, London, 1997.
- [2] K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, "Broadband calibration of E-field probes in lossy media", *IEEE Transactions on Microwave Theory and Techniques*, vol. 44, no. 10, pp. 1954-1962, Oct. 1996.
- [3] K. Jokela, P. Hyysalo, and L. Puranen, "Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", *IEEE Transactions on Instrumentation and Measurements*, vol. 47, no. 2, pp. 432-438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.12 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- (1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- (2) Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- (3) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 m W/g	8.00 m W/g
Spatial Average SAR (Whole Body)	0.08 m W/g	0.40 m W/g
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

Table 4. RF exposure limits

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

2. Summary of Results

Aux Antenna (CH1)

WLAN802.11 b

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)			SAR Limit 1g (W/kg)
			CH 1	CH 6	CH 11	
			2412 MHz	2437 MHz	2462 MHz	
WLAN 802.11 b	Body Worn	Lap held	0.324	0.352	0.476	1.6
		Secondary Portrait	—	0.017	—	1.6
		Secondary Landscape	—	0.085	—	1.6

Test distance is 0mm.

- # Using KDB248227-SAR is not required for 802.11 g channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.
- # According to KDB447498 the 1-g SAR for the highest output channel is less than 0.8 W/kg, where the transmission band corresponding to all channels is ≤ 100 MHz, testing for the other channels is not required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN802.11 a 5.2G

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)					SAR Limit 1g (W/kg)
			CH 36	CH 44	CH 48	CH 52	CH 64	
			5180 MHz	5220 MHz	5240 MHz	5260 MHz	5320 MHz	
WLAN a 5.2G	Body Worn	Lap held	0.848	0.739	0.503	0.67	1.15	1.6
		Secondary Portrait	—	0.016	—	—	—	1.6
		Secondary Landscape	—	0.042	—	—	—	1.6

WLAN802.11 a 5.5G

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)					SAR Limit 1g (W/kg)
			CH 104	CH 116	CH 124	CH 128	CH 136	
			5520 MHz	5580 MHz	5620 MHz	5640 MHz	5680 MHz	
WLAN a 5.5G	Body Worn	Lap held	0.912	1.12	0.802	0.96	0.71	1.6
		Secondary Portrait	—	—	—	0.074	—	1.6
		Secondary Landscape	—	—	—	0.097	—	1.6

WLAN802.11 a 5.8G

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)			SAR Limit 1g (W/kg)
			CH 149	CH 157	CH 165	
			5745 MHz	5785 MHz	5825 MHz	
WLAN a 5.8G	Body Worn	Lap held	0.39	0.502	0.64	1.6
		Secondary Portrait	—	—	0.035	1.6
		Secondary Landscape	—	—	0.06	1.6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

MIMO (CH0 + CH1)

WLAN802.11 b

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)			SAR Limit 1g (W/kg)
			CH 1	CH 6	CH 11	
			2412 MHz	2437 MHz	2462 MHz	
WLAN 802.11 b	Body Worn	Lap held	0.421	0.813	1.09	1.6
		Secondary Portrait	—	0.01	—	1.6
		Secondary Landscape	—	0.119	—	1.6

Test distance is 0mm.

- # Using KDB248227-SAR is not required for 802.11 n (20M/40M) channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.
- # According to KDB447498 the 1-g SAR for the highest output channel is less than 0.8 W/kg, where the transmission band corresponding to all channels is ≤ 100 MHz, testing for the other channels is not required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN802.11 a / n (20M) 5.2G

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)				SAR Limit 1g (W/kg)
			CH 36	CH 48	CH 52	CH 64	
			5180 MHz	5240 MHz	5260 MHz	5320 MHz	
WLAN a 5.2G	Body Worn	Lap held	0.961	0.502	0.547	1.01	1.6
		Secondary Portrait	0.013	—	—	—	1.6
		Secondary Landscape	0.031	—	—	—	1.6
WLAN n (20M) 5.2G	Body Worn	Lap held	0.98	1.08	1.03	1.06	1.6
		Secondary Portrait	0.014	—	—	—	1.6
		Secondary Landscape	0.033	—	—	—	1.6

WLAN802.11 n (40M) 5.2G

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)				SAR Limit 1g (W/kg)
			CH 38	CH 46	CH 54	CH 62	
			5190 MHz	5230 MHz	5270 MHz	5310 MHz	
WLAN n (40M) 5.2G	Body Worn	Lap held	1.05	0.92	0.857	0.998	1.6
		Secondary Portrait	0.023	—	—	—	1.6
		Secondary Landscape	0.039	—	—	—	1.6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN802.11 a 5.5G

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)				SAR Limit 1g (W/kg)
			CH 104	CH 116	CH 124	CH 136	
			5520 MHz	5580 MHz	5620 MHz	5680 MHz	
WLAN a 5.5G	Body Worn	Lap held	0.849	0.939	0.868	1.11	1.6
		Secondary Portrait	—	0.027	—	—	1.6
		Secondary Landscape	—	0.036	—	—	1.6

WLAN802.11 n (20M) 5.5G

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)				SAR Limit 1g (W/kg)
			CH 100	CH 116	CH 120	CH 140	
			5500 MHz	5580 MHz	5600 MHz	5700 MHz	
WLAN n(20M) 5.5G	Body Worn	Lap held	0.846	0.996	0.807	0.886	1.6
		Secondary Portrait	—	—	0.00345	—	1.6
		Secondary Landscape	—	—	0.053	—	1.6

WLAN802.11 n (40M) 5.5G

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)			SAR Limit 1g (W/kg)
			CH 102	CH 118	CH 134	
			5510 MHz	5590 MHz	5670 MHz	
WLAN n (40M) 5.5G	Body Worn	Lap held	0.34	1.15	0.913	1.6
		Secondary Portrait	—	0.00192	—	1.6
		Secondary Landscape	—	0.09	—	1.6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN802.11 a / n (20M) 5.8G

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)			SAR Limit 1g (W/kg)
			CH 149	CH 157	CH 165	
			5745 MHz	5785 MHz	5825 MHz	
WLAN a 5.8G	Body Worn	Lap held	1.06	1.18	1.12	1.6
		Secondary Portrait	—	—	0.00608	1.6
		Secondary Landscape	—	—	0.029	1.6
WLAN n (20M) 5.8G	Body Worn	Lap held	1.03	0.982	0.935	1.6
		Secondary Portrait	—	—	0.00421	1.6
		Secondary Landscape	—	—	0.032	1.6

WLAN802.11 n (40M) 5.8G

Band	EUT Position	Test Configuration	Averaged SAR over 1g (W/kg)		SAR Limit 1g (W/kg)
			CH 151	CH 159	
			5755 MHz	5795 MHz	
WLAN n (40M) 5.8G	Body Worn	Lap held	0.977	1	1.6
		Secondary Portrait	—	0.019	1.6
		Secondary Landscape	—	0.031	1.6

According to KDB447498 the 1-g SAR for the highest output channel is less than 0.4 W/kg, where the transmission band corresponding to all channels is ≤ 200 MHz, testing for the other channels is not required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

3. Instruments List

Manufacturer	Device	Type	Serial number	Date of last calibration	Date of next calibration
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	EX3DV4	3848	Jun.04,2012	Jun.03,2013
Schmid & Partner Engineering AG	2450/5200/5500/5800 MHz System Validation Dipole	D2450V2 D5GHzV2	727 1104	Apr.25,2012 Apr.18,2012	Apr.24,2013 Apr.17,2013
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE4	1336	Jun.05,2012	Jun.04,2013
Schmid & Partner Engineering AG	Software	DASY 52 V52.8	N/A	Calibration not required	Calibration not required
Schmid & Partner Engineering AG	Phantom	SAM	N/A	Calibration not required	Calibration not required
HP	Network Analyzer	E5071C	MY46107530	Feb.16,2012	Feb.15,2013
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
Agilent	Dual-directional coupler	772D	MY46151242	Jul.05,2012	Jul.04,2013
Agilent	RF Signal Generator	N5181A	MY50141235	Jan.06,2012	Jan.05,2013
Agilent	Power Meter	E4417A	MY51410006	Oct.24.2011	Oct.23.2013

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

4. Measurements

Date: 2012/8/13

Lap-held_WLAN802.11b_CH1_Aux Antenna

Communication System: WLAN 2.45G (FCC); Frequency: 2412 MHz
 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.901$ mho/m; $\epsilon_r = 53.15$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASy5 (IEEE/IEC/ANSI C63.19-2007)
 DASy Configuration:

- Probe: EX3DV4 - SN3848; ConvF(6.95, 6.95, 6.95); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASy52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (71x211x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.623 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.275 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.078 mW/g

SAR(1 g) = 0.324 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.901 mW/g

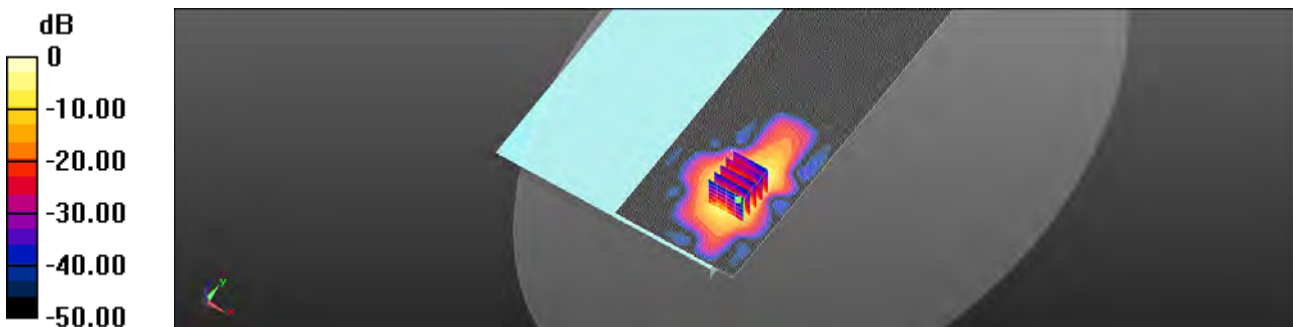

0 dB = 0.623 mW/g = 0.39 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/8/13

Lap-held_WLAN802.11b_CH6_Aux Antenna

Communication System: WLAN 2.45G (FCC); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.939$ mho/m; $\epsilon_r = 53.124$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(6.95, 6.95, 6.95); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (71x211x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.715 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.335 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.103 mW/g

SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 0.927 mW/g

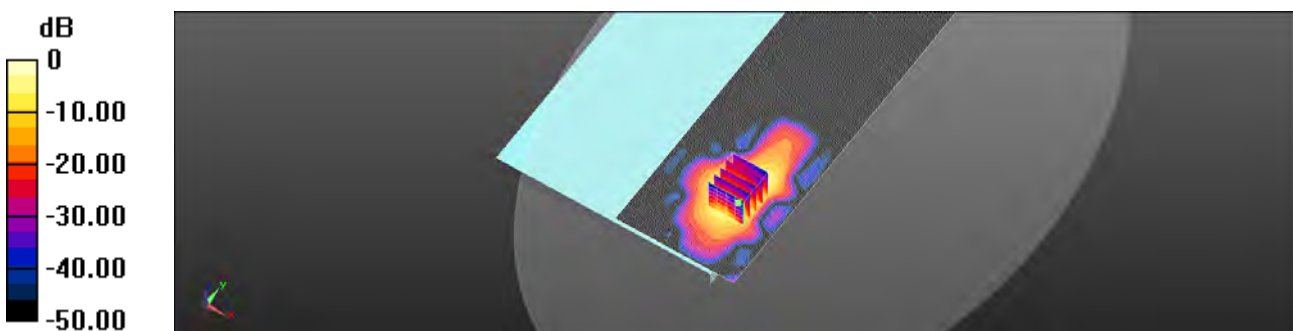

0 dB = 0.715 mW/g = 0.35 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/8/13

Lap-held_WLAN802.11b_CH11_Aux Antenna

Communication System: WLAN 2.45G (FCC); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.965$ mho/m; $\epsilon_r = 53.077$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(6.95, 6.95, 6.95); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (71x211x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.949 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.215 mW/g

SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.782 mW/g

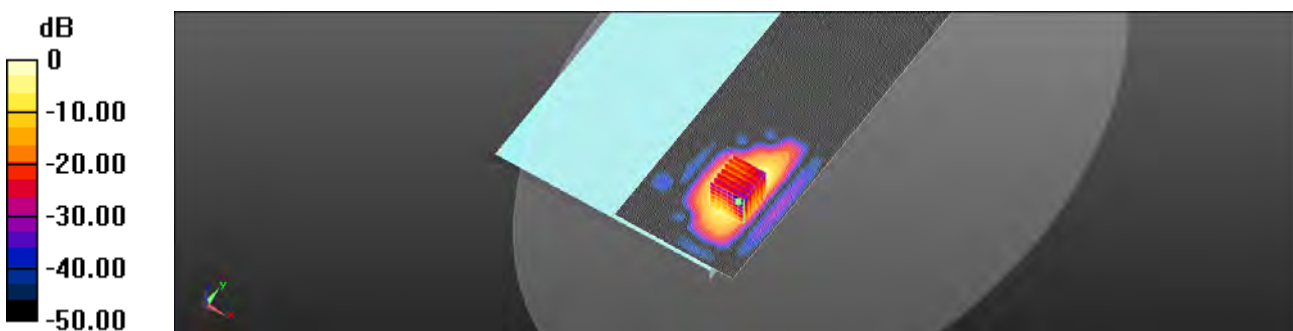

0 dB = 0.949 mW/g = -0.46 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/8/13

Secondary Portrait_WLAN802.11b_CH6_Aux Antenna

Communication System: WLAN 2.45G (FCC); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.939$ mho/m; $\epsilon_r = 53.124$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(6.95, 6.95, 6.95); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (61x171x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0550 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.884 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.039 mW/g

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00721 mW/g

Maximum value of SAR (measured) = 0.0245 mW/g

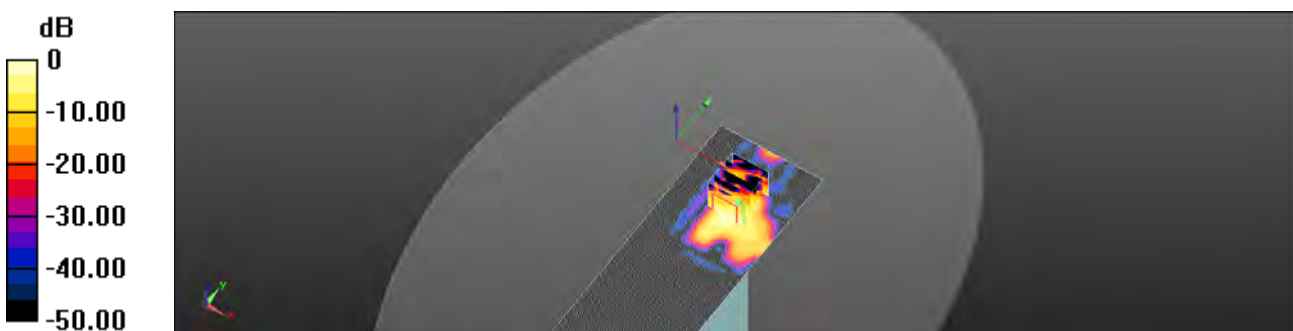

0 dB = 0.0550 mW/g = -25.19 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/8/13

Secondary Landscape_WLAN802.11b_CH6_Aux Antenna

Communication System: WLAN 2.45G (FCC); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.939$ mho/m; $\epsilon_r = 53.124$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(6.95, 6.95, 6.95); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (91x221x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.122 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)



(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.578 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.164 mW/g

SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.125 mW/g

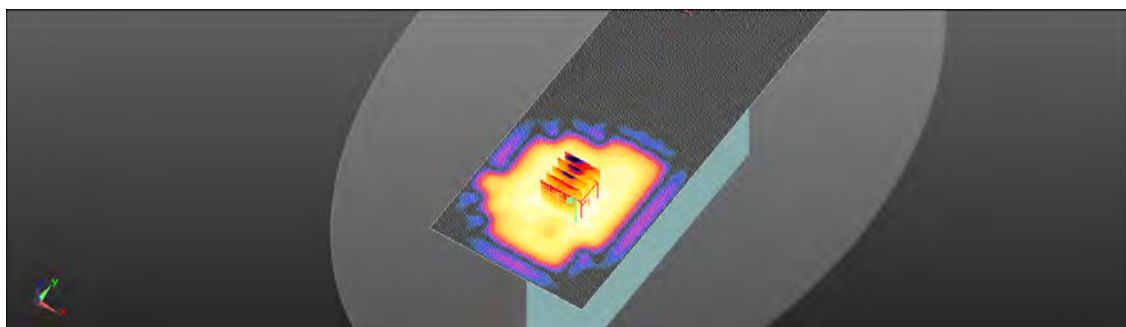

0 dB = 0.122 mW/g = -18.29 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11a 5.2G_CH36_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5180 MHz

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.439$ mho/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.41 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.728 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 4.225 mW/g

SAR(1 g) = 0.848 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 1.65 mW/g

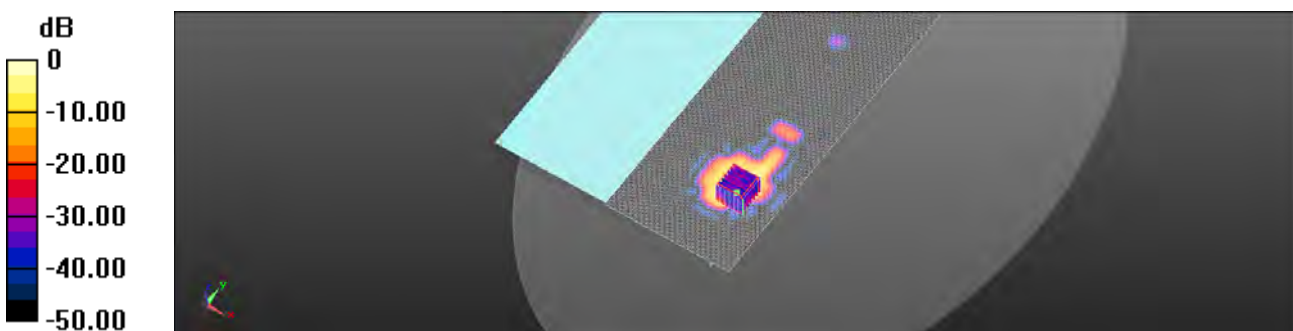

0 dB = 1.41 mW/g = 3.08 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11a 5.2G_CH44_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5220 MHz

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.503$ mho/m; $\epsilon_r = 49.106$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.93 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.805 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.188 mW/g

SAR(1 g) = 0.739 mW/g; SAR(10 g) = 0.183 mW/g

Maximum value of SAR (measured) = 1.47 mW/g

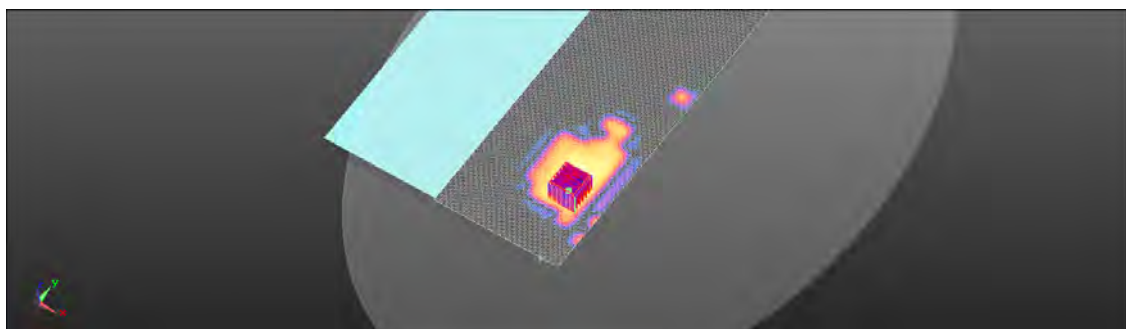

0 dB = 1.93 mW/g = 5.68 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11a 5.2G_CH48_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5240 MHz

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.524$ mho/m; $\epsilon_r = 49.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.32 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.805 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.922 mW/g

SAR(1 g) = 0.503 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

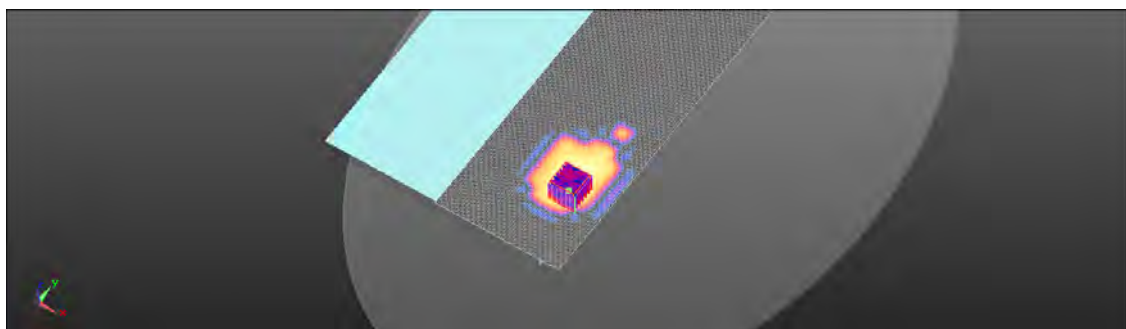

0 dB = 1.32 mW/g = 2.15 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11a 5.2G_CH52_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5260 MHz

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.553$ mho/m; $\epsilon_r = 49.026$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.17, 4.17, 4.17); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.75 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.560 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.780 mW/g

SAR(1 g) = 0.670 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

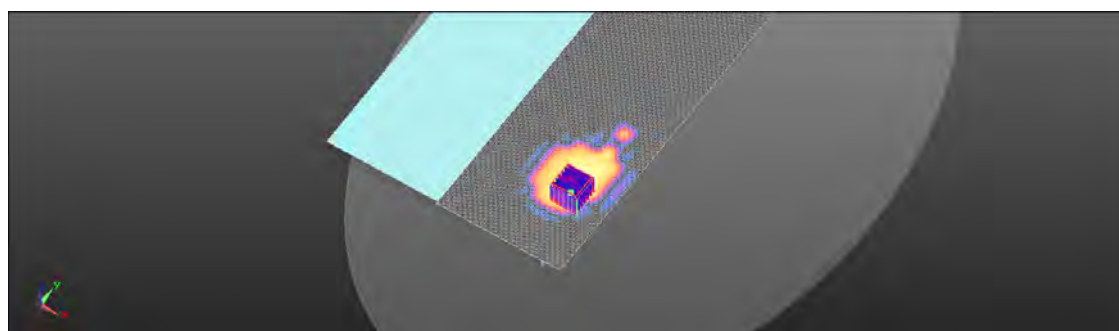

0 dB = 1.75 mW/g = 4.66 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11a 5.2G_CH64_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5320 MHz

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.643$ mho/m; $\epsilon_r = 48.881$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.17, 4.17, 4.17); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.71 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.804 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 5.444 mW/g

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.291 mW/g

Maximum value of SAR (measured) = 2.03 mW/g

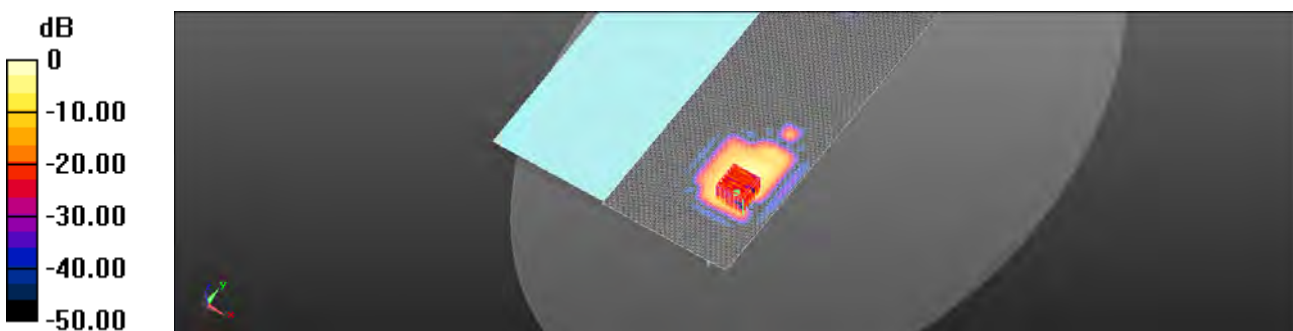


0 dB = 1.71 mW/g = 4.56 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

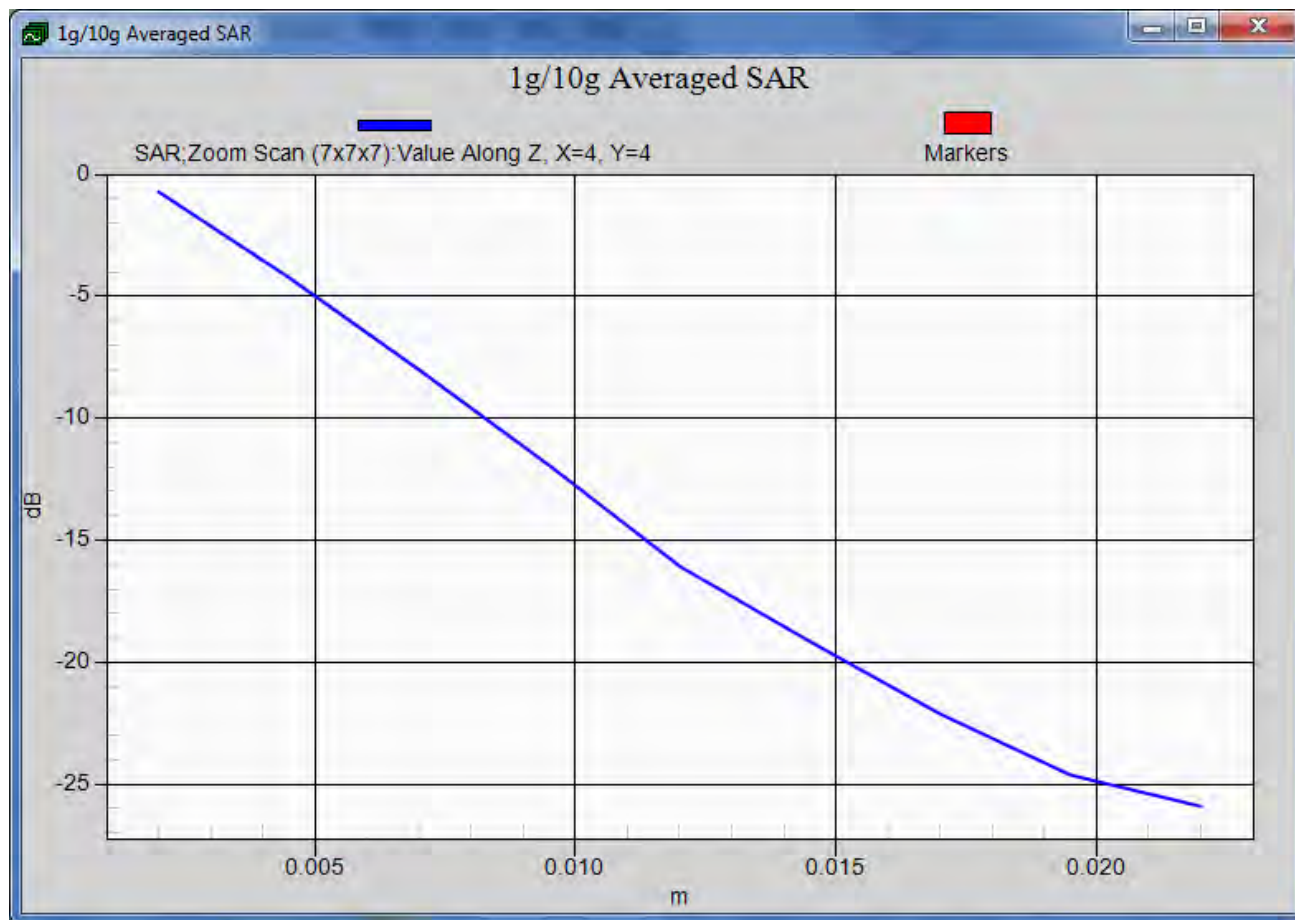

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Secondary Portrait_WLAN802.11a 5.2G_CH44_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5220 MHz

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.503$ mho/m; $\epsilon_r = 49.106$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0356 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.984 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.170 mW/g

SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.00508 mW/g

Maximum value of SAR (measured) = 0.0298 mW/g

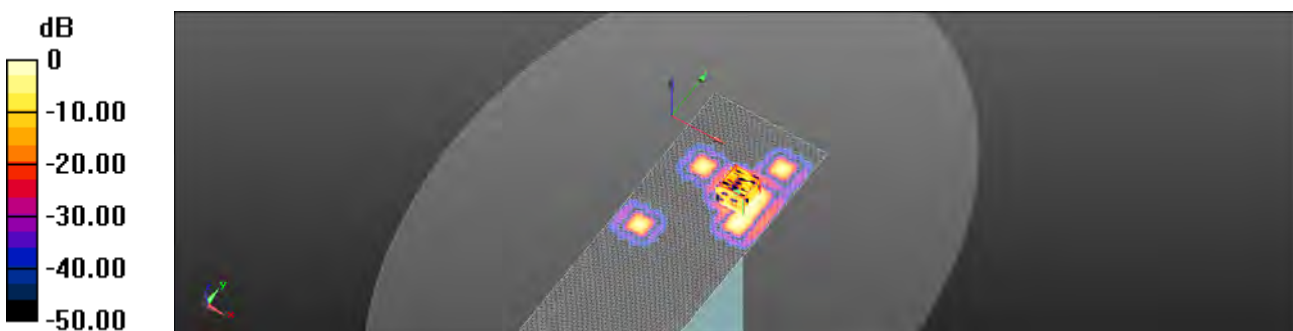

0 dB = 0.0356 mW/g = -28.98 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Secondary Landscape_WLAN802.11a 5.2G_CH44_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5220 MHz

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.503$ mho/m; $\epsilon_r = 49.106$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0957 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)



(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.722 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.198 mW/g

SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.017 mW/g

Maximum value of SAR (measured) = 0.0869 mW/g

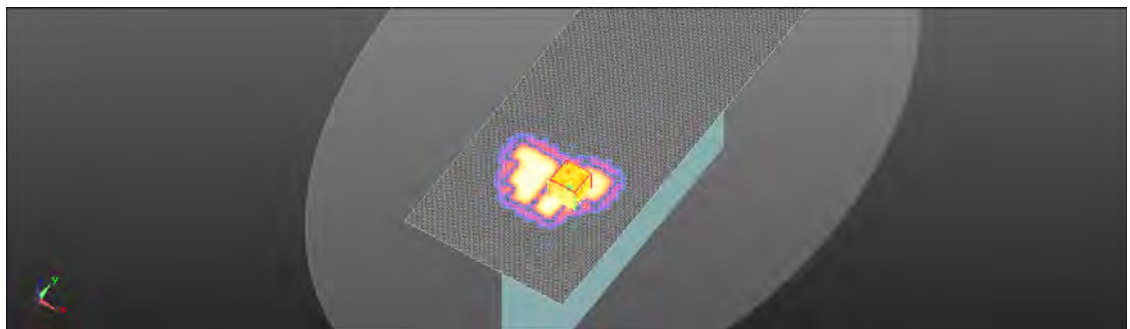

0 dB = 0.0957 mW/g = -20.38 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Lap-held_WLAN802.11a 5.5G_CH104_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5520 MHz

Medium parameters used: $f = 5520$ MHz; $\sigma = 5.733$ mho/m; $\epsilon_r = 48.989$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.78 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.191 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.161 mW/g

SAR(1 g) = 0.912 mW/g; SAR(10 g) = 0.237 mW/g

Maximum value of SAR (measured) = 1.96 mW/g

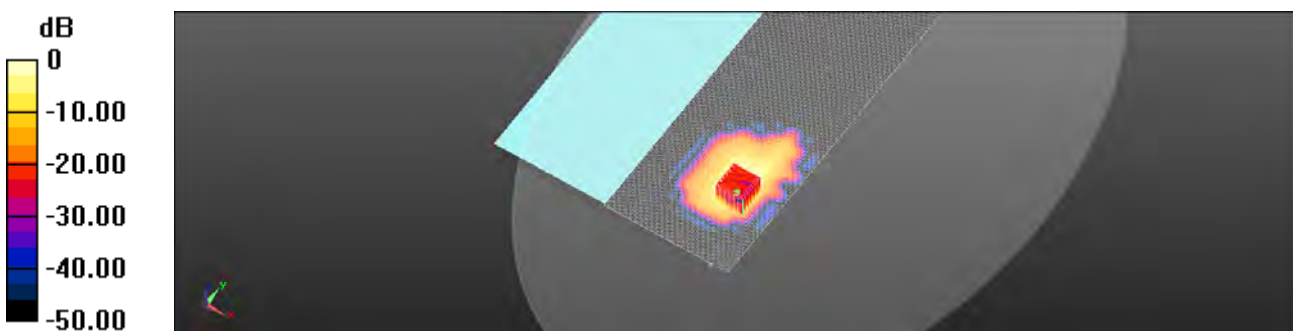

0 dB = 1.78 mW/g = 6.34 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Lap-held_WLAN802.11a 5.5G_CH116_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5580 MHz

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.823$ mho/m; $\epsilon_r = 48.879$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.46 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.128 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 5.241 mW/g

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.283 mW/g

Maximum value of SAR (measured) = 2.54 mW/g

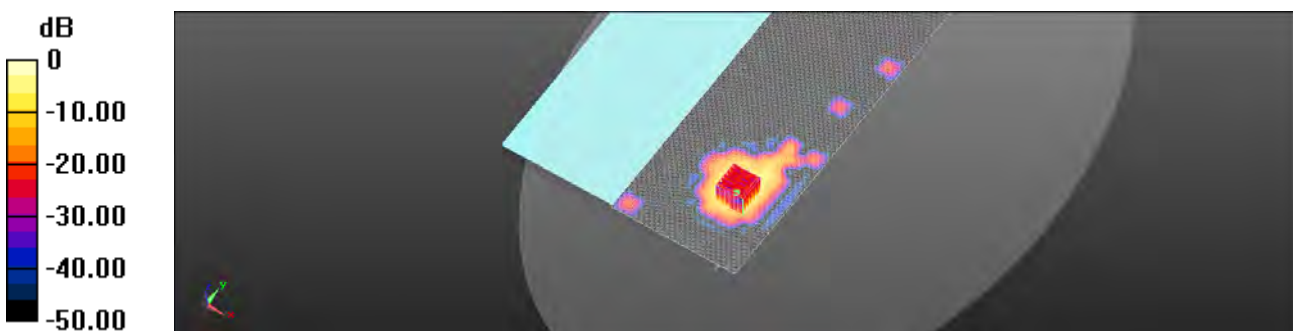

0 dB = 2.46 mW/g = 7.81 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Lap-held_WLAN802.11a 5.5G_CH124_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5620 MHz

Medium parameters used: $f = 5620$ MHz; $\sigma = 5.875$ mho/m; $\epsilon_r = 48.799$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.64 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.245 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 3.660 mW/g

SAR(1 g) = 0.802 mW/g; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 1.55 mW/g

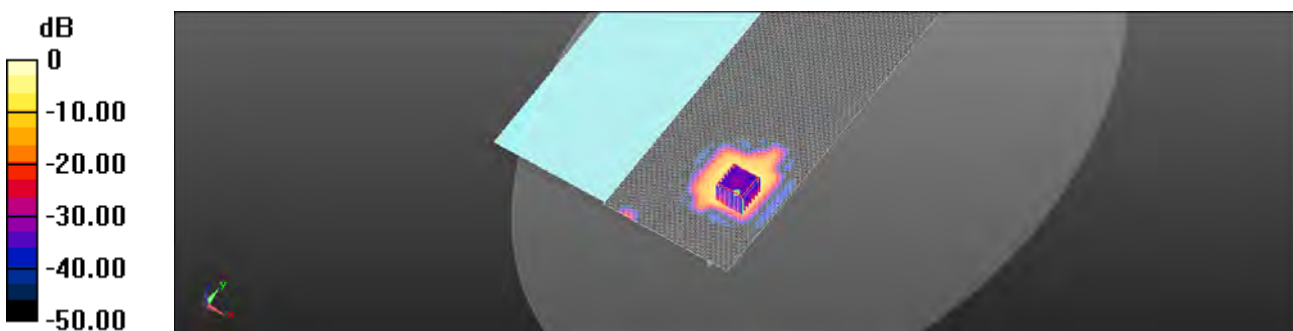

0 dB = 1.64 mW/g = 4.38 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Lap-held_WLAN802.11a 5.5G_CH128_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5640 MHz

Medium parameters used: $f = 5640$ MHz; $\sigma = 5.905$ mho/m; $\epsilon_r = 48.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.96 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.740 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 4.928 mW/g

SAR(1 g) = 0.96 mW/g; SAR(10 g) = 0.244 mW/g

Maximum value of SAR (measured) = 2.09 mW/g

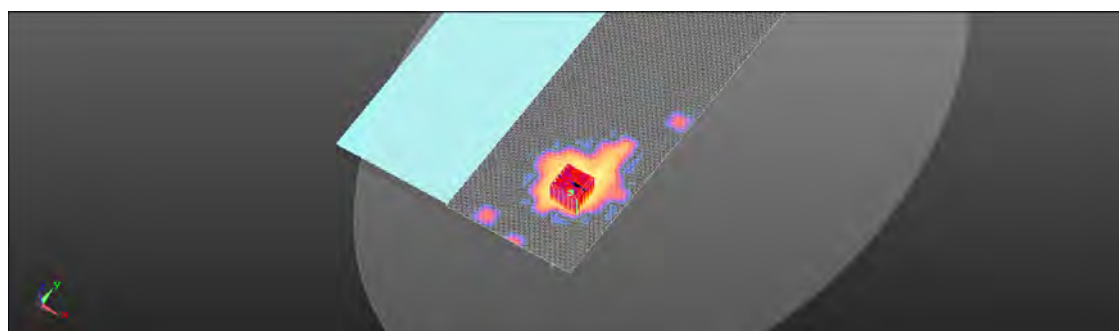

0 dB = 1.96 mW/g = 5.83 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Lap-held_WLAN802.11a 5.5G_CH136_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5680 MHz

Medium parameters used: $f = 5680$ MHz; $\sigma = 5.964$ mho/m; $\epsilon_r = 48.674$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.83 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.503 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.469 mW/g

SAR(1 g) = 0.71 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 1.88 mW/g

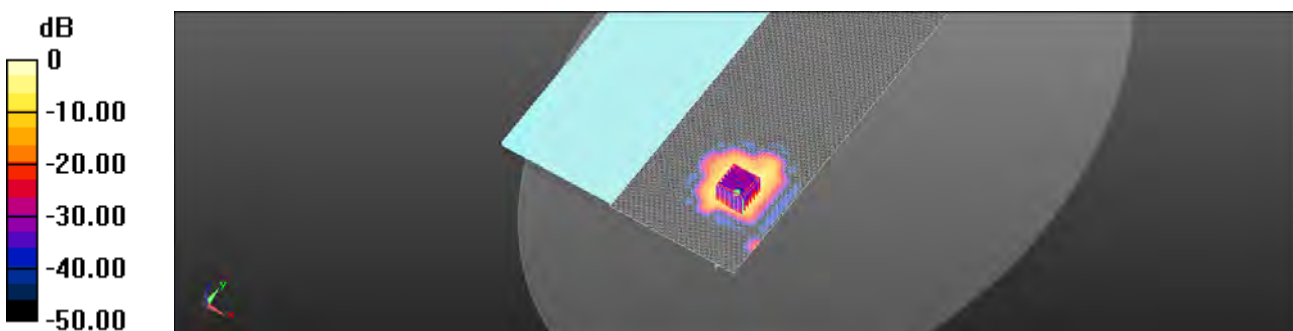

0 dB = 1.83 mW/g = 5.05 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Secondary Portrait_WLAN802.11a 5.5G_CH128_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5640 MHz

Medium parameters used: $f = 5640$ MHz; $\sigma = 5.905$ mho/m; $\epsilon_r = 48.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.169 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.964 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.272 mW/g

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.025 mW/g

Maximum value of SAR (measured) = 0.158 mW/g

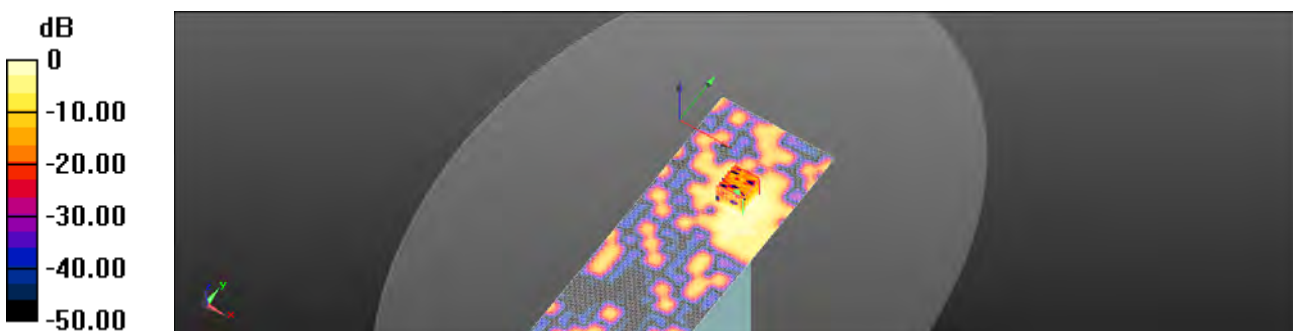

0 dB = 0.169 mW/g = -15.44 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Secondary Landscape_WLAN802.11a 5.5G_CH128_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5640 MHz

Medium parameters used: $f = 5640$ MHz; $\sigma = 5.905$ mho/m; $\epsilon_r = 48.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.306 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)



(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.285 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.375 mW/g

SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.201 mW/g

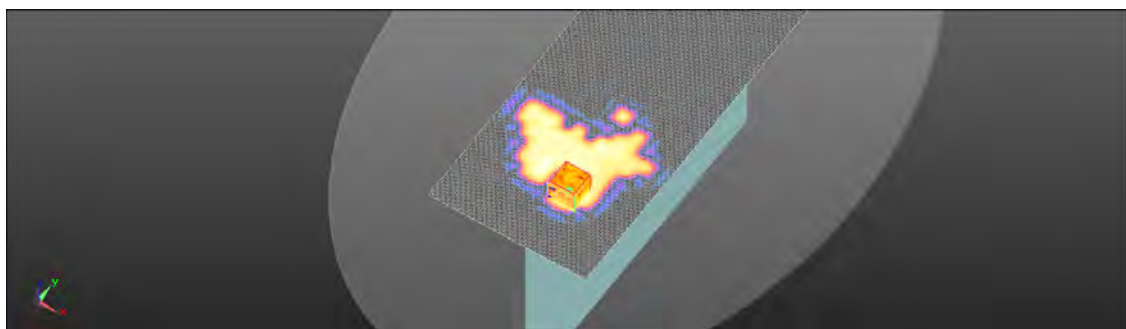

0 dB = 0.306 mW/g = -10.29 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Lap-held_WLAN802.11a 5.8G_CH149_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5745 MHz

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.119$ mho/m; $\epsilon_r = 48.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.979 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.509 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.757 mW/g

SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.832 mW/g

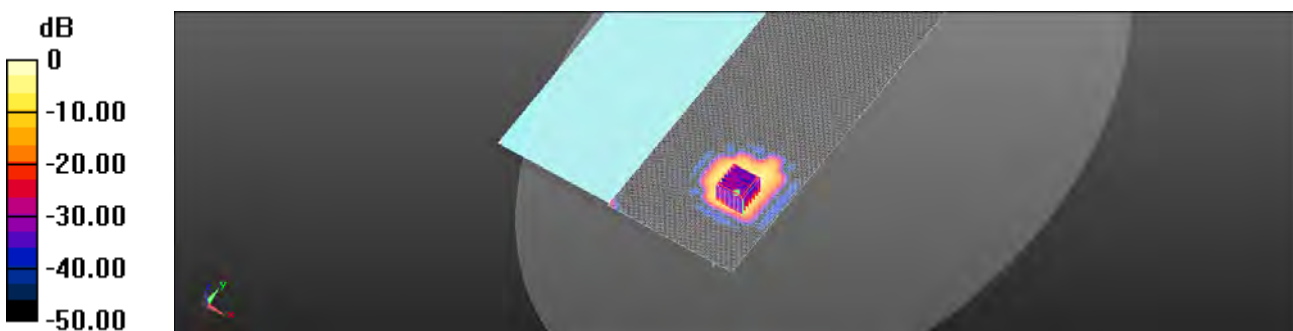

0 dB = 0.979 mW/g = 1.24 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Lap-held_WLAN802.11a 5.8G_CH157_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5785 MHz

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.175$ mho/m; $\epsilon_r = 48.044$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.17 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.782 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.158 mW/g

SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.116 mW/g

Maximum value of SAR (measured) = 1.24 mW/g

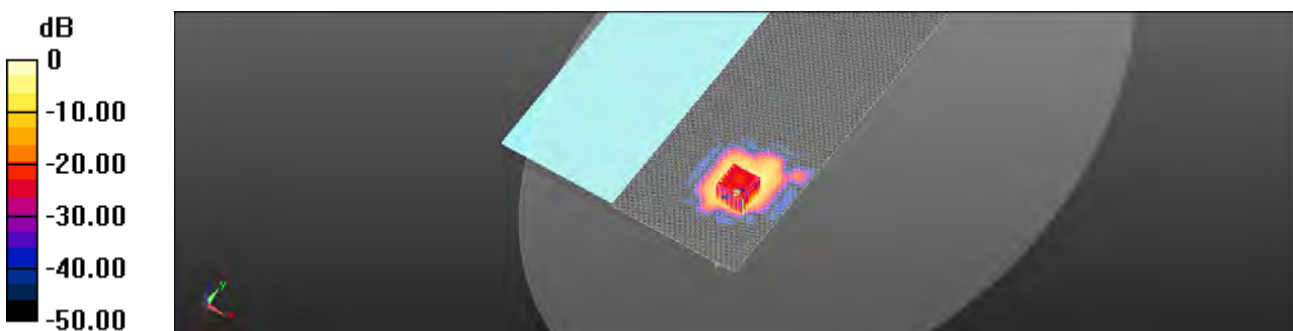

0 dB = 1.17 mW/g = 6.75 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Lap-held_WLAN802.11a 5.8G_CH165_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5825 MHz

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.236$ mho/m; $\epsilon_r = 47.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.37 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.939 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.967 mW/g

SAR(1 g) = 0.640 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 1.37 mW/g

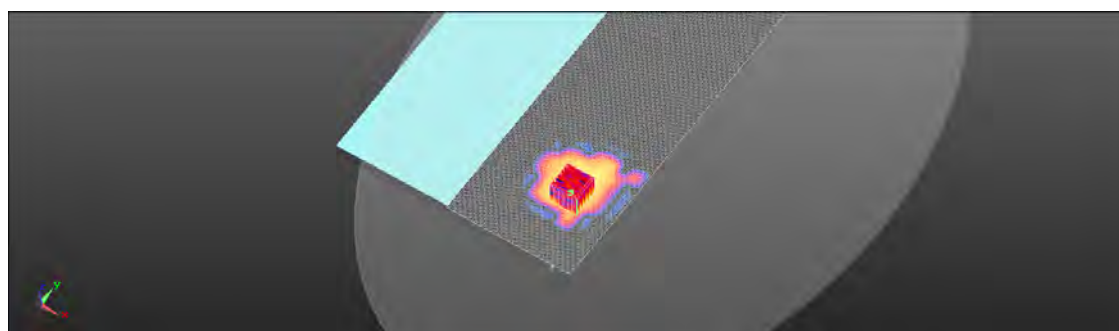

0 dB = 1.37 mW/g = 3.50 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Secondary Portrait_WLAN802.11a 5.8G_CH165_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5825 MHz

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.236$ mho/m; $\epsilon_r = 47.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0994 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.181 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.182 mW/g

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.0783 mW/g

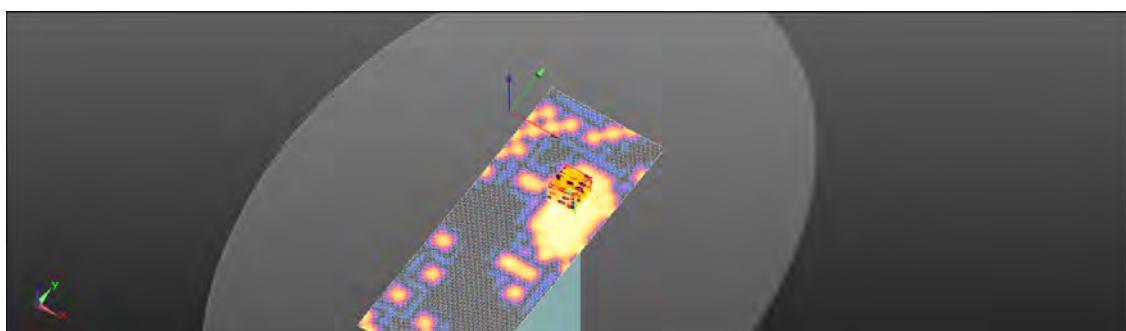

0 dB = 0.0994 mW/g = -20.06 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Secondary Landscape_WLAN802.11a 5.8G_CH165_Aux Antenna

Communication System: WLAN 5G (FCC); Frequency: 5825 MHz

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.236$ mho/m; $\epsilon_r = 47.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.127 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)



(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.246 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.542 mW/g

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.00936 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

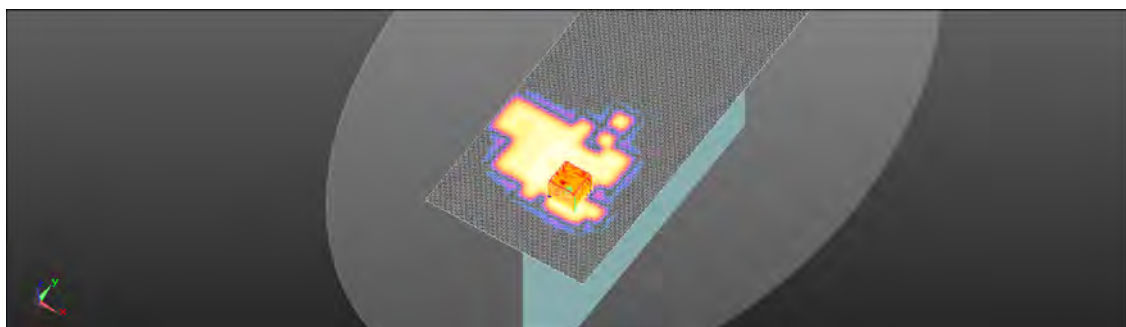

0 dB = 0.127 mW/g = -11.36 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/8/13

Lap-held_WLAN802.11b_CH1_MIMO

Communication System: WLAN 2.45G (FCC); Frequency: 2412 MHz
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.901$ mho/m; $\epsilon_r = 53.15$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(6.95, 6.95, 6.95); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (71x211x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR = 0.598 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.391 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.787 mW/g

SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.528 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x7)/Cube 1:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.391 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.937 mW/g

SAR(1 g) = 0.421 mW/g; SAR(10 g) = 0.177 mW/g

Maximum value of SAR (measured) = 0.664 mW/g

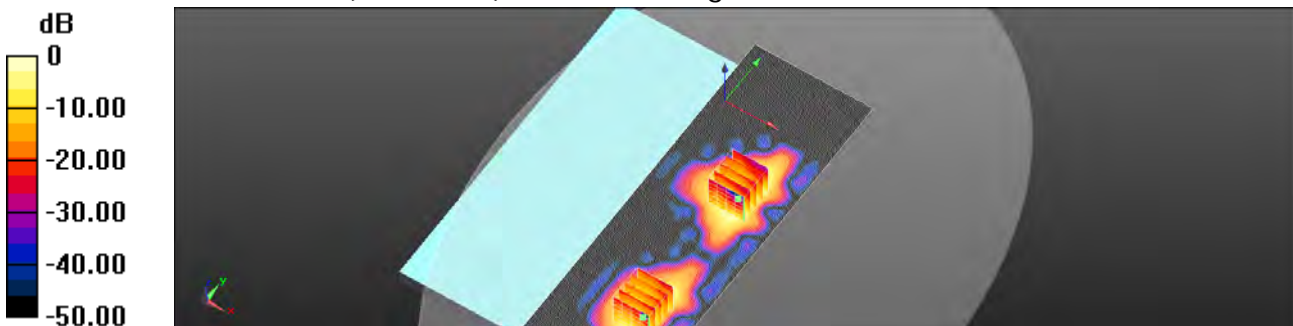

0 dB = 0.598 mW/g = -4.46 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/8/13

Lap-held_WLAN802.11b_CH6_MIMO

Communication System: WLAN 2.45G (FCC); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.939$ mho/m; $\epsilon_r = 53.124$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(6.95, 6.95, 6.95); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (71x211x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR = 1.03 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.375 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.878 mW/g

SAR(1 g) = 0.813 mW/g; SAR(10 g) = 0.337 mW/g

Maximum value of SAR (measured) = 1.24 mW/g

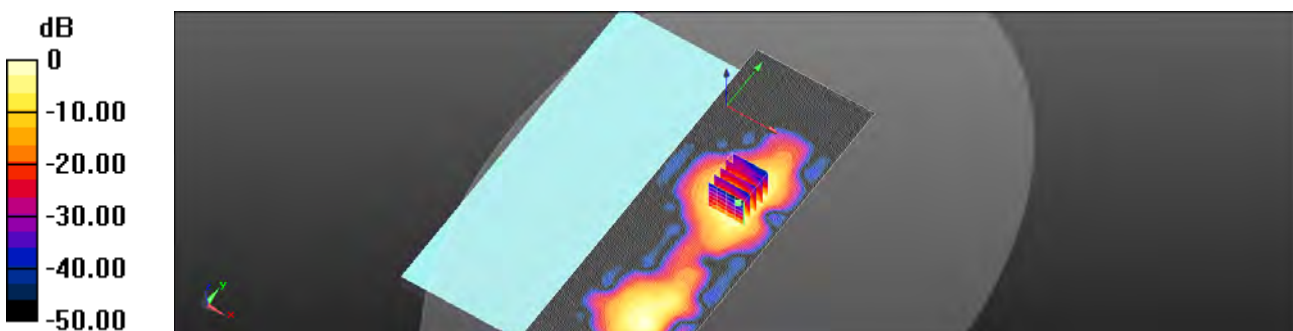

0 dB = 1.03 mW/g = 0.29 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/8/13

Lap-held_WLAN802.11b_CH11_MIMO

Communication System: WLAN 2.45G (FCC); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.965$ mho/m; $\epsilon_r = 53.077$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(6.95, 6.95, 6.95); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (71x211x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR = 1.38 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.532 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.556 mW/g

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.449 mW/g

Maximum value of SAR (measured) = 1.62 mW/g

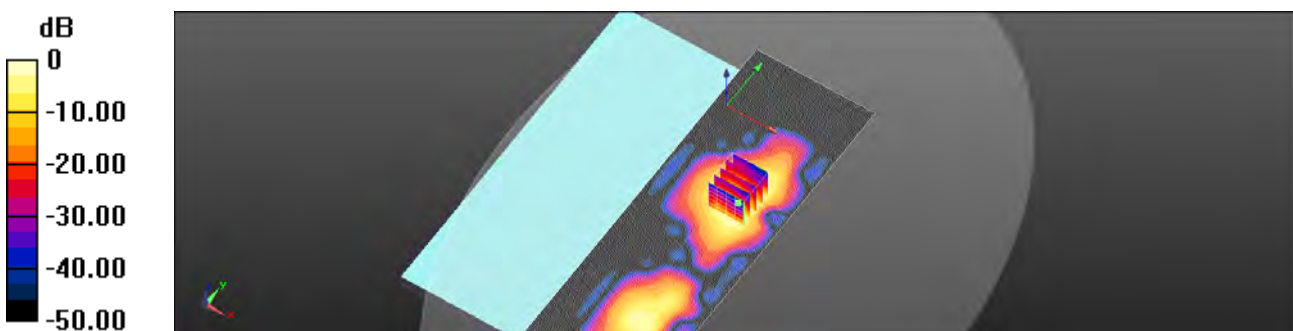

0 dB = 1.38 mW/g = 2.78 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/8/13

Secondary Portrait_WLAN802.11b_CH6_MIMO

Communication System: WLAN 2.45G (FCC); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.939$ mho/m; $\epsilon_r = 53.124$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(6.95, 6.95, 6.95); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS2 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (61x171x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR = 0.0311 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.325 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.029 mW/g

SAR(1 g) = 0.010 mW/g; SAR(10 g) = 0.004 mW/g

Maximum value of SAR (measured) = 0.0190 mW/g

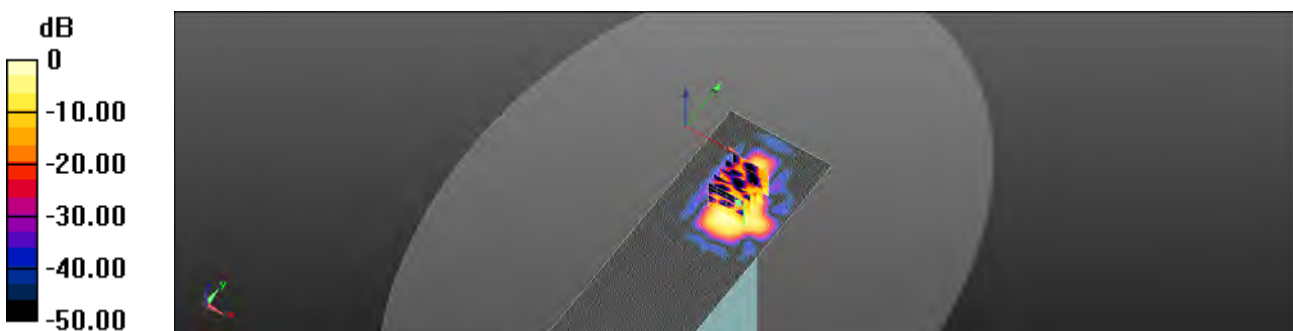

0 dB = 0.0311 mW/g = -30.15 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/8/13

Secondary Landscape_WLAN802.11b_CH6_MIMO

Communication System: WLAN 2.45G (FCC); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.939$ mho/m; $\epsilon_r = 53.124$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(6.95, 6.95, 6.95); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (91x221x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR = 0.148 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)



(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.299 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.236 mW/g

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.179 mW/g

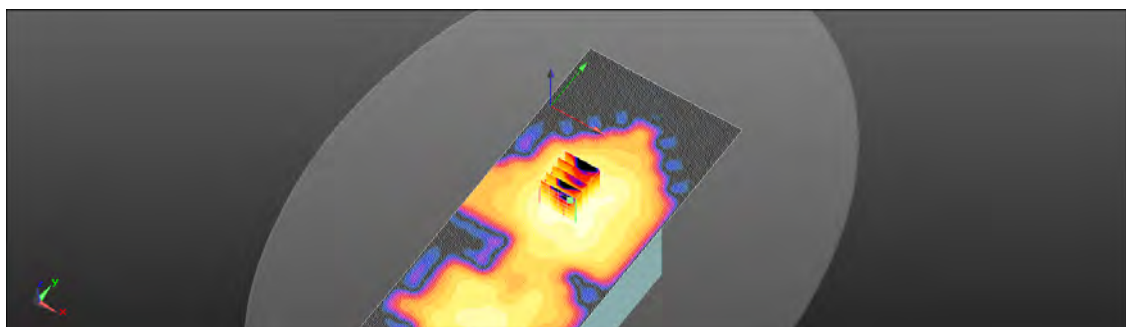

0 dB = 0.148 mW/g = -16.60 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11a 5.2G_CH36_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5180 MHz

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.439$ mho/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.75 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.695 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 4.252 mW/g

SAR(1 g) = 0.961 mW/g; SAR(10 g) = 0.237 mW/g

Maximum value of SAR (measured) = 2.11 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.695 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.036 mW/g

SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 1.46 mW/g

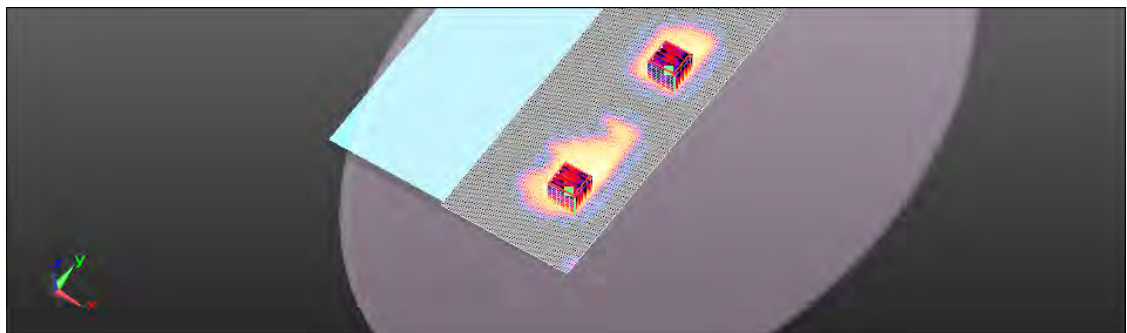

0 dB = 1.75 mW/g = 4.79 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11a 5.2G_CH48_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5240 MHz

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.524$ mho/m; $\epsilon_r = 49.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS2 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.21 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.166 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.540 mW/g

SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

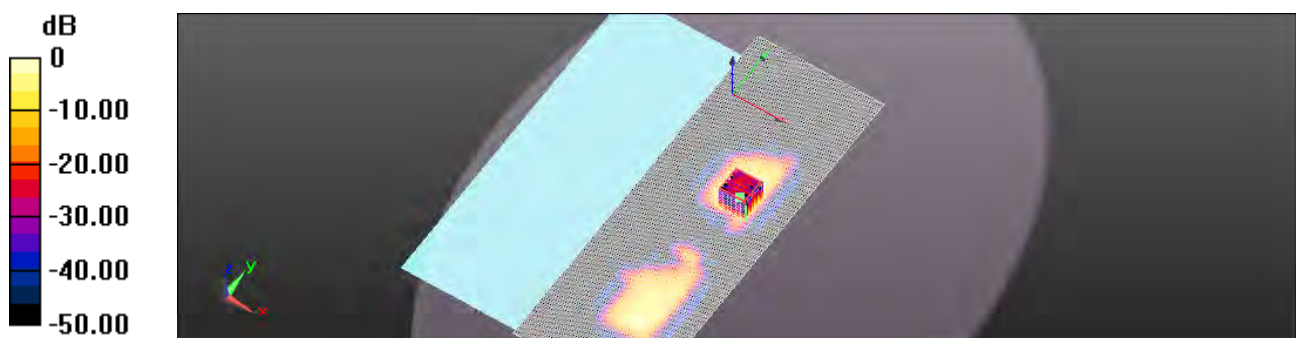

0 dB = 1.21 mW/g = -20.20 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11a 5.2G_CH52_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5260 MHz

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.553$ mho/m; $\epsilon_r = 49.026$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.17, 4.17, 4.17); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.37 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.715 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.640 mW/g

SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 1.33 mW/g

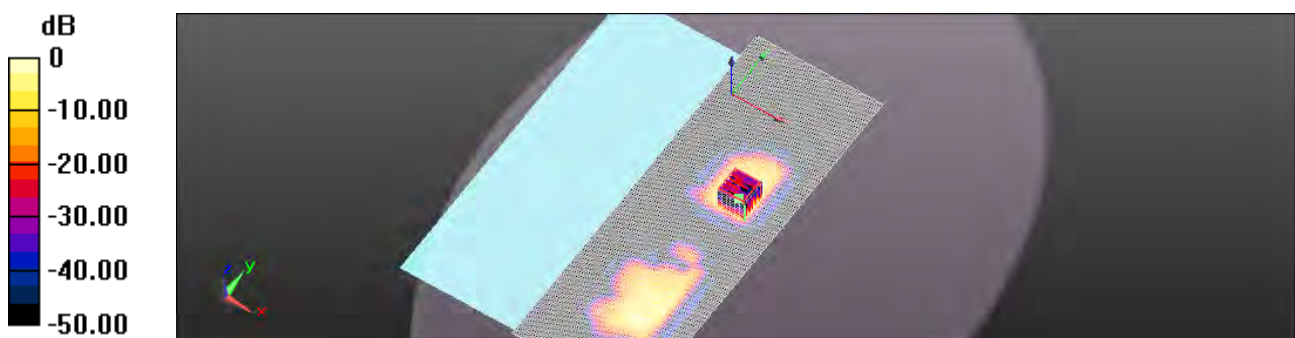

0 dB = 1.37 mW/g = 0.99 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11a 5.2G_CH64_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5320 MHz

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.643$ mho/m; $\epsilon_r = 48.881$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.17, 4.17, 4.17); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.42 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.900 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 4.502 mW/g

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 2.20 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.900 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.694 mW/g

SAR(1 g) = 0.885 mW/g; SAR(10 g) = 0.206 mW/g

Maximum value of SAR (measured) = 1.90 mW/g

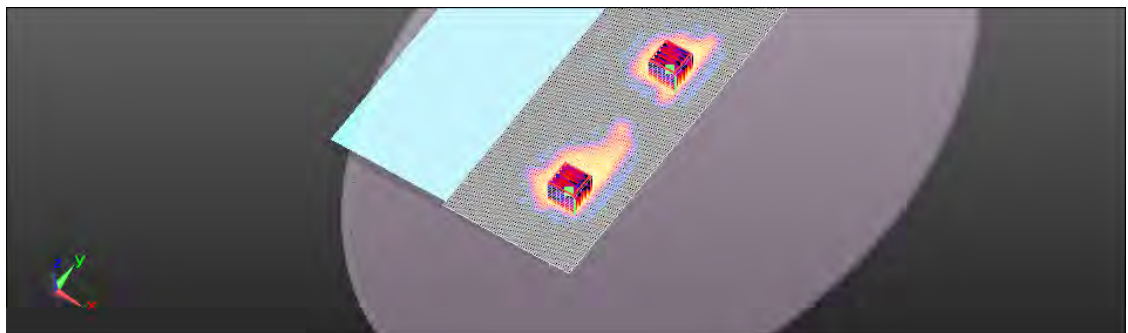

0 dB = 2.42 mW/g = 7.69 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Secondary Portrait_WLAN802.11a 5.2G_CH36_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5180 MHz

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.439$ mho/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0530 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.781 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.168 mW/g

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00348 mW/g

Maximum value of SAR (measured) = 0.0304 mW/g



0 dB = 0.0530 mW/g = -25.52 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Secondary Landscape_WLAN802.11a 5.2G_CH36_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5180 MHz

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.439$ mho/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0797 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)


(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.358 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.184 mW/g

SAR(1 g) = 0.031 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.0690 mW/g

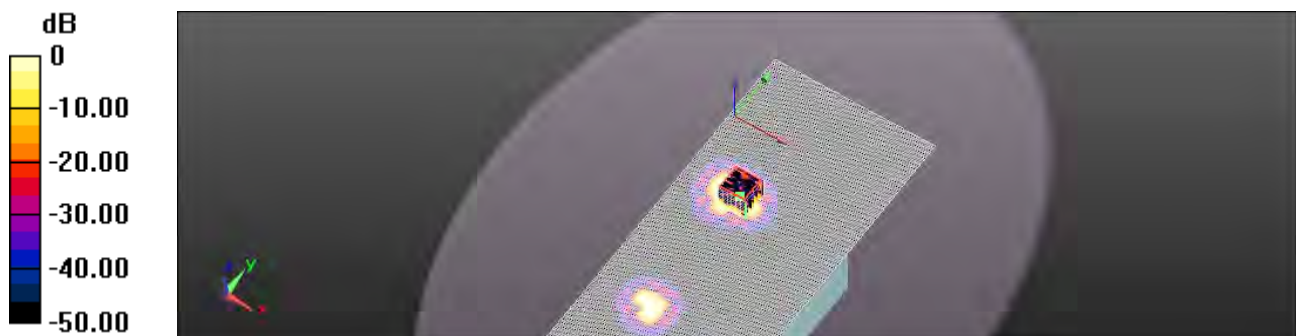

0 dB = 0.0797 mW/g = -21.97 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11n(20M) 5.2G_CH36_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5180 MHz

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.439$ mho/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.46 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.275 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 5.035 mW/g

SAR(1 g) = 0.98 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 2.07 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.275 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.531 mW/g

SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.220 mW/g

Maximum value of SAR (measured) = 1.70 mW/g

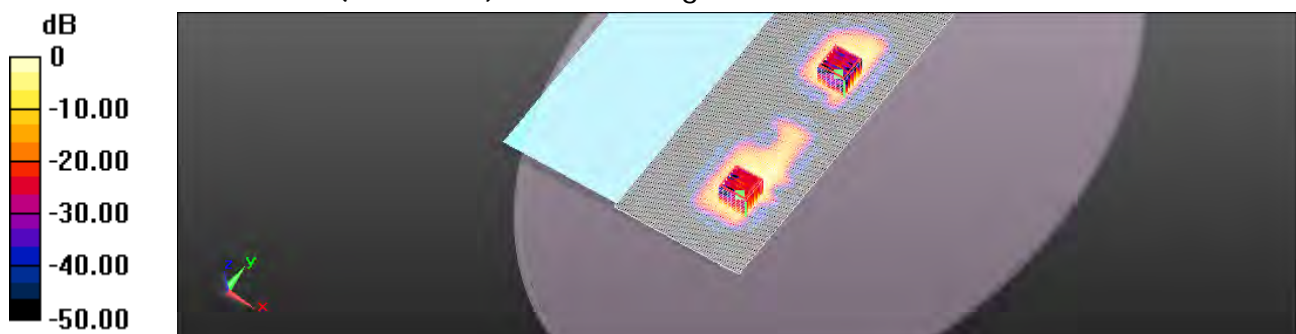

0 dB = 2.46 mW/g = 8.05 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11n(20M) 5.2G_CH48_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5240 MHz

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.524$ mho/m; $\epsilon_r = 49.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.54 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.383 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 5.389 mW/g

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 2.82 mW/g

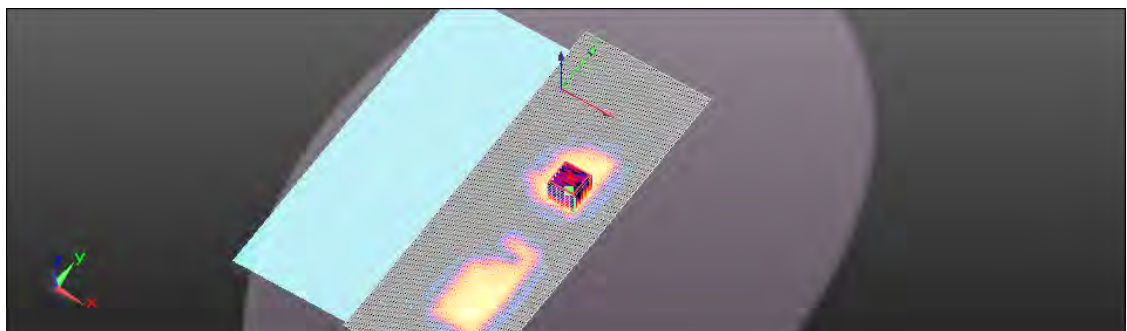

0 dB = 2.54 mW/g = 9.35 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11n(20M) 5.2G_CH52_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5260 MHz

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.553$ mho/m; $\epsilon_r = 49.026$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.17, 4.17, 4.17); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.41 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.152 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 5.134 mW/g

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 2.42 mW/g

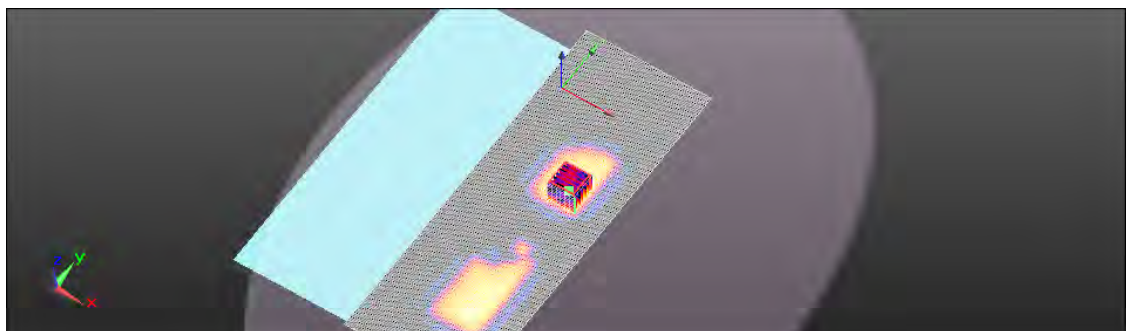

0 dB = 2.41 mW/g = 8.70 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11n(20M) 5.2G_CH64_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5320 MHz

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.643$ mho/m; $\epsilon_r = 48.881$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.17, 4.17, 4.17); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.46 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.990 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 4.764 mW/g

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 2.23 mW/g

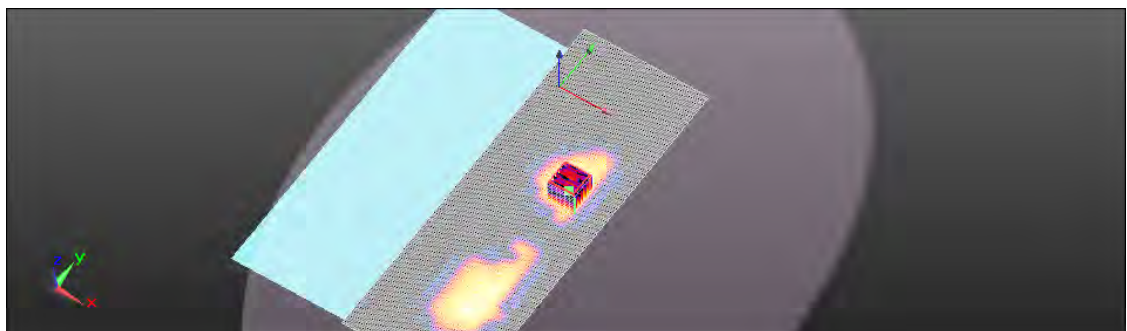

0 dB = 2.46 mW/g = 7.83 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Secondary Portrait_WLAN802.11n(20M) 5.2G_CH36_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5180 MHz

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.439$ mho/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0185 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.914 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.164 mW/g

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00252 mW/g

Maximum value of SAR (measured) = 0.0308 mW/g

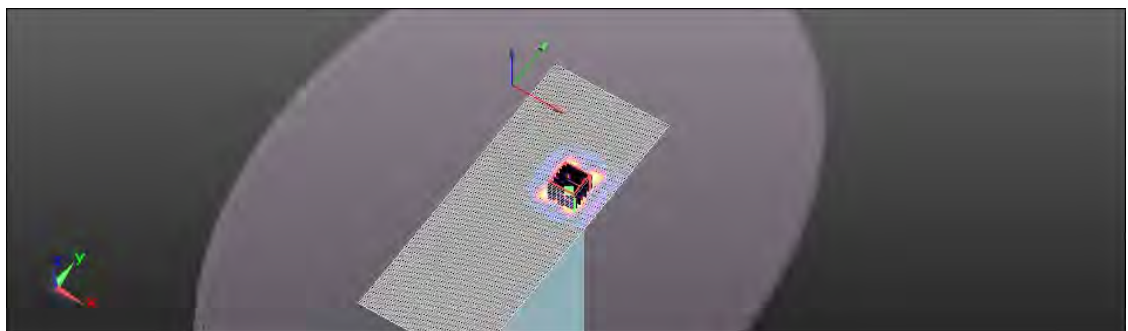

0 dB = 0.0185 mW/g = -34.66 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Secondary Landscape_WLAN802.11n(20M) 5.2G_CH36_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5180 MHz

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.439$ mho/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.158 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)


(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.051 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.105 mW/g

SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.0703 mW/g



0 dB = 0.158 mW/g = -16.00 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11n(40M) 5.2G_CH38_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5190 MHz

Medium parameters used: $f = 5190$ MHz; $\sigma = 5.461$ mho/m; $\epsilon_r = 49.194$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.41 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.043 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 4.389 mW/g

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 2.25 mW/g

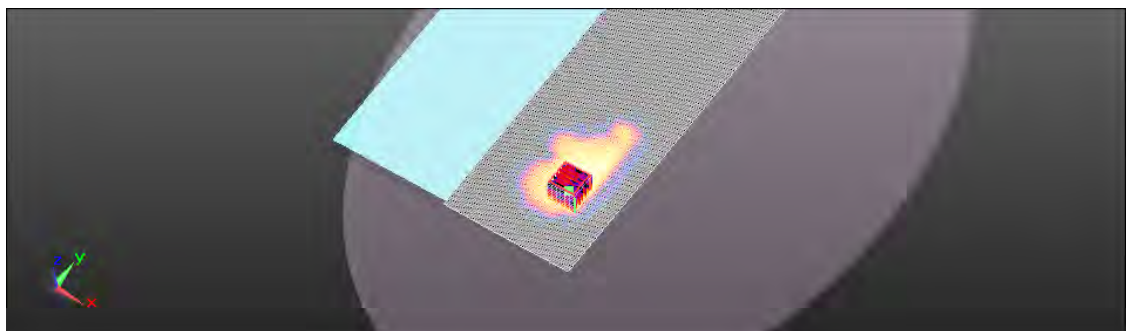

0 dB = 2.41 mW/g = 7.62 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11n(40M) 5.2G_CH46_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5230 MHz

Medium parameters used: $f = 5230$ MHz; $\sigma = 5.518$ mho/m; $\epsilon_r = 49.07$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS2 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.15 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.267 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 4.082 mW/g

SAR(1 g) = 0.920 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 1.93 mW/g

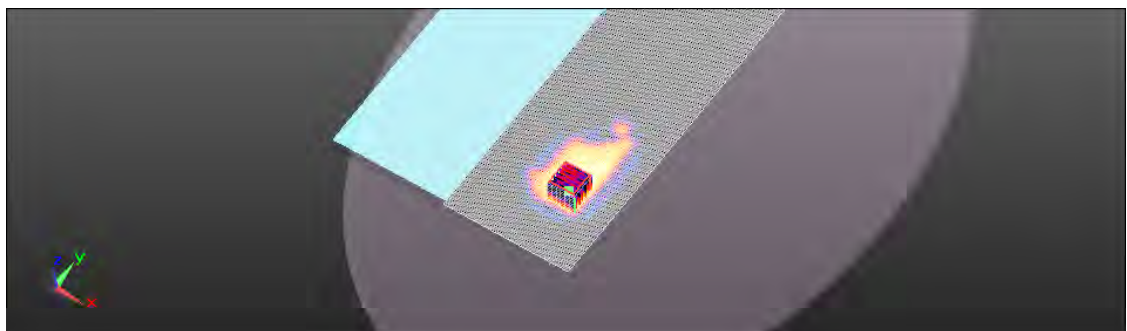

0 dB = 2.15 mW/g = 4.64 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11n(40M) 5.2G_CH54_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5270 MHz

Medium parameters used: $f = 5270$ MHz; $\sigma = 5.567$ mho/m; $\epsilon_r = 48.997$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.17, 4.17, 4.17); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.97 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.689 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.299 mW/g

SAR(1 g) = 0.857 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 1.80 mW/g

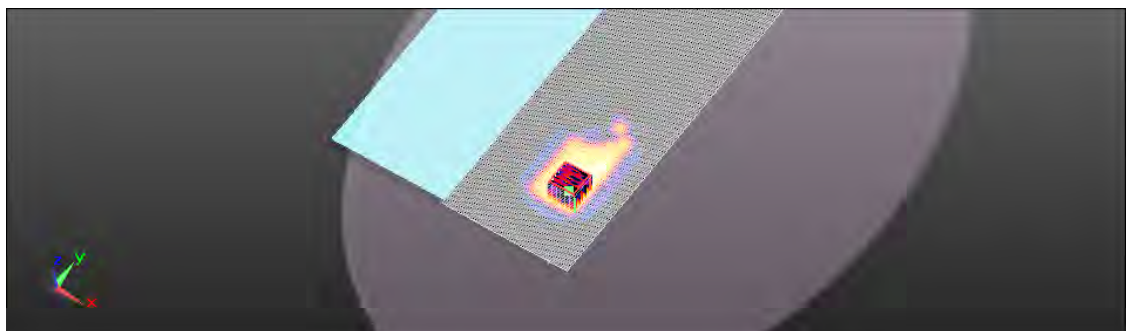

0 dB = 1.97 mW/g = 2.94 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Lap-held_WLAN802.11n(40M) 5.2G_CH62_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5310 MHz

Medium parameters used: $f = 5310$ MHz; $\sigma = 5.629$ mho/m; $\epsilon_r = 48.911$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.17, 4.17, 4.17); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.23 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.470 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 4.476 mW/g

SAR(1 g) = 0.998 mW/g; SAR(10 g) = 0.244 mW/g

Maximum value of SAR (measured) = 1.26 mW/g

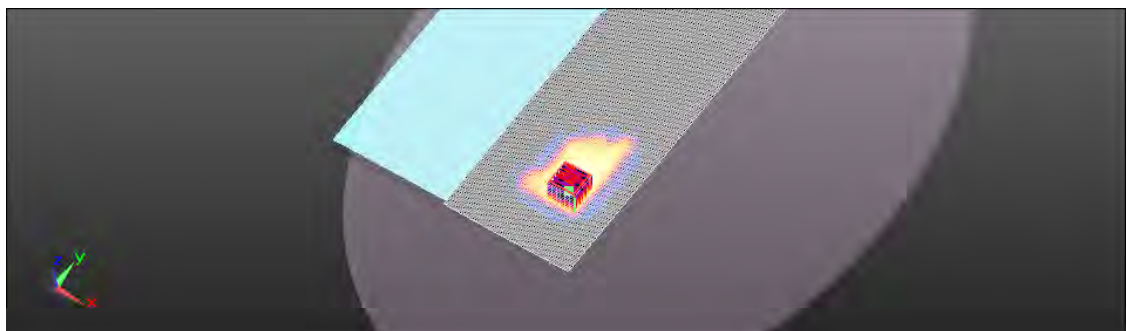

0 dB = 2.23 mW/g = 5.71 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Secondary Portrait_WLAN802.11n(40M) 5.2G_CH38_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5190 MHz

Medium parameters used: $f = 5190$ MHz; $\sigma = 5.461$ mho/m; $\epsilon_r = 49.194$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS2 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0453 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.532 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.232 mW/g

SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.00737 mW/g

Maximum value of SAR (measured) = 0.0439 mW/g

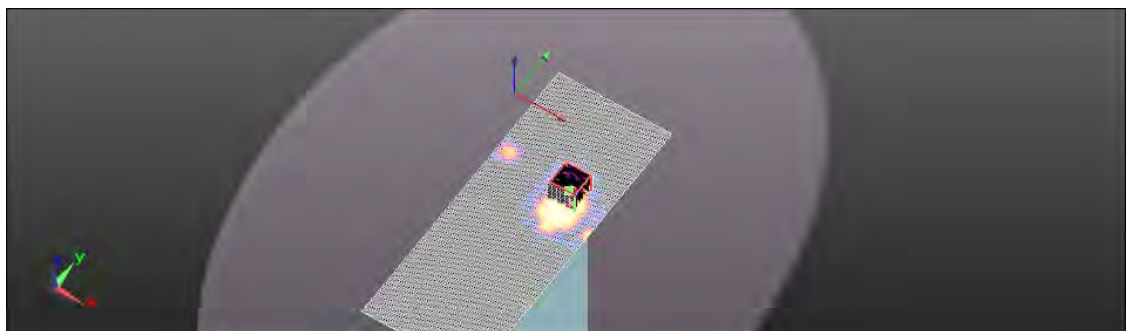

0 dB = 0.0453 mW/g = -26.88 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Secondary Landscape_WLAN802.11n(40M) 5.2G_CH38_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5190 MHz

Medium parameters used: $f = 5190$ MHz; $\sigma = 5.461$ mho/m; $\epsilon_r = 49.194$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0927 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)

(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.961 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.135 mW/g

SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.0836 mW/g



0 dB = 0.0927 mW/g = -20.66 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11a 5.5G_CH104_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5520 MHz

Medium parameters used: $f = 5520$ MHz; $\sigma = 5.733$ mho/m; $\epsilon_r = 48.989$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS5 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.91 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.364 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 4.303 mW/g

SAR(1 g) = 0.849 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 2.01 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.364 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 3.355 mW/g

SAR(1 g) = 0.784 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 1.75 mW/g

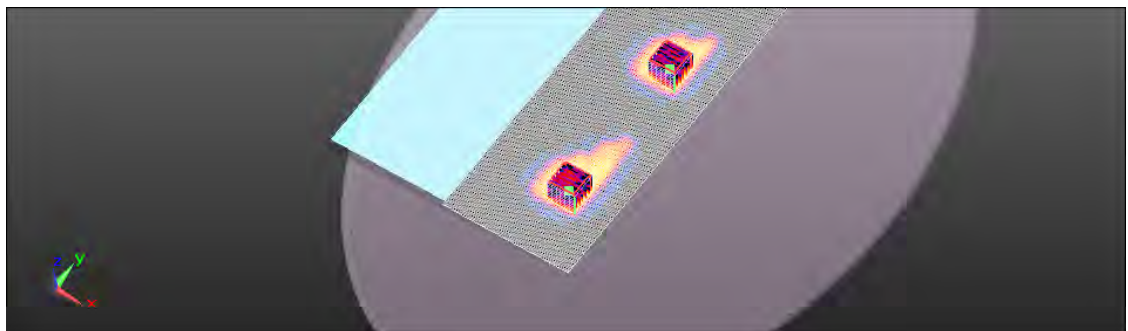

$$0 \text{ dB} = 1.91 \text{ mW/g} = 6.80 \text{ dB mW/g}$$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11a 5.5G_CH116_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5580 MHz

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.823$ mho/m; $\epsilon_r = 48.879$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.33 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.631 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.434 mW/g

SAR(1 g) = 0.939 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 2.11 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.631 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.500 mW/g

SAR(1 g) = 0.829 mW/g; SAR(10 g) = 0.195 mW/g

Maximum value of SAR (measured) = 1.84 mW/g

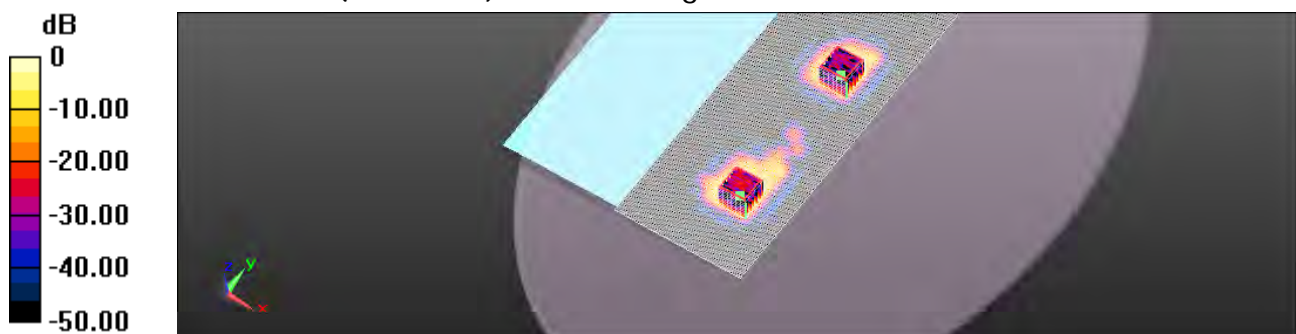

0 dB = 2.33 mW/g = 7.34 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11a 5.5G_CH124_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5620 MHz

Medium parameters used: $f = 5620$ MHz; $\sigma = 5.875$ mho/m; $\epsilon_r = 48.799$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.16 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.810 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.995 mW/g

SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.190 mW/g

Maximum value of SAR (measured) = 1.92 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.810 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.088 mW/g

SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.167 mW/g

Maximum value of SAR (measured) = 1.59 mW/g

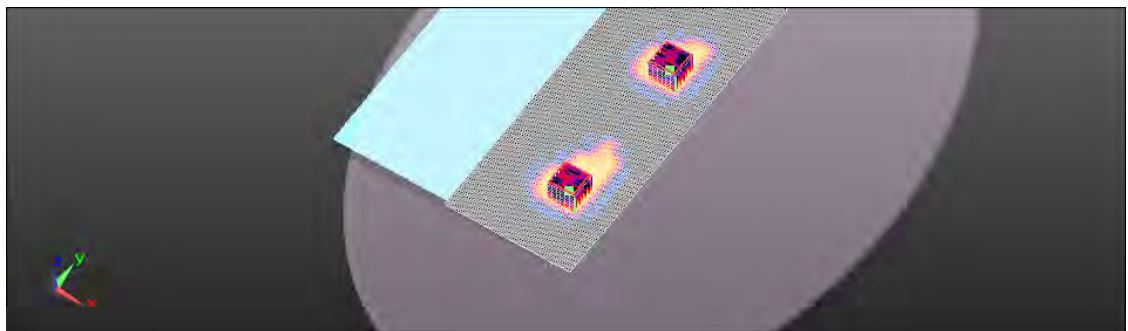

$$0 \text{ dB} = 2.16 \text{ mW/g} = 6.70 \text{ dB mW/g}$$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Lap-held_WLAN802.11a 5.5G_CH136_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5680 MHz

Medium parameters used: $f = 5680$ MHz; $\sigma = 5.964$ mho/m; $\epsilon_r = 48.674$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.65 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.814 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 5.453 mW/g

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.256 mW/g

Maximum value of SAR (measured) = 2.68 mW/g

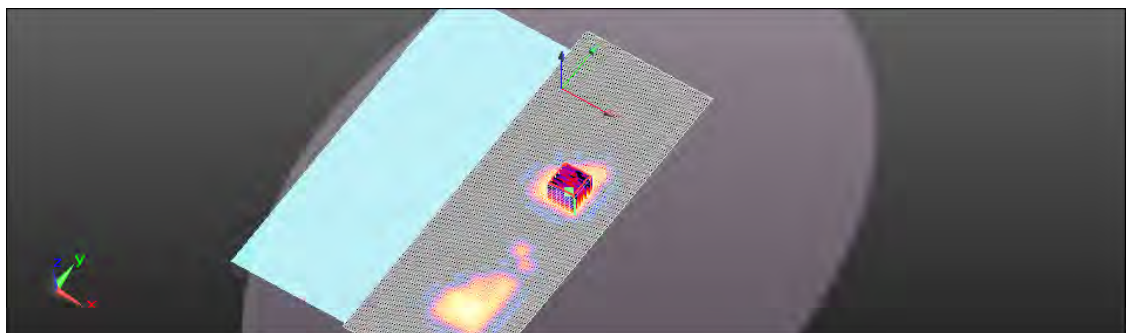

0 dB = 2.65 mW/g = 5.70 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Secondary Portrait_WLAN802.11a 5.5G_CH116_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5580 MHz

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.823$ mho/m; $\epsilon_r = 48.879$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.101 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.285 mW/g

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.00537 mW/g

Maximum value of SAR (measured) = 0.0485 mW/g



0 dB = 0.101 mW/g = -19.91 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Secondary Landscape_WLAN802.11a 5.5G_CH116_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5580 MHz

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.823$ mho/m; $\epsilon_r = 48.879$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.124 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)



(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.410 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.238 mW/g

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.0870 mW/g

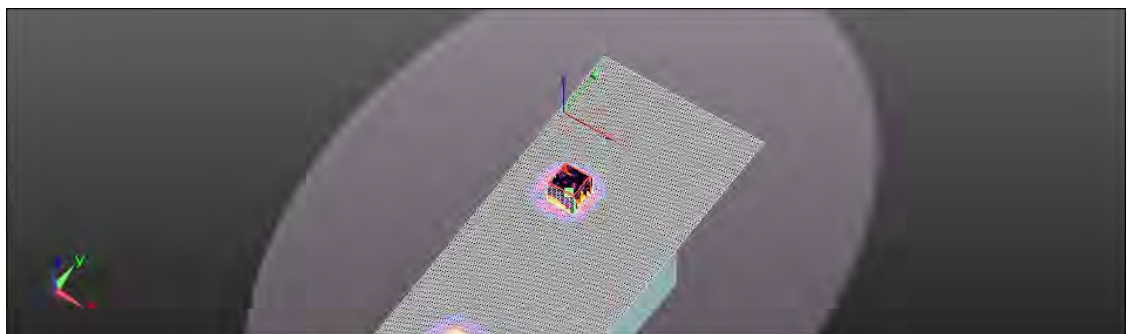

0 dB = 0.124 mW/g = -18.12 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11n(20M) 5.5G_CH100_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5500 MHz

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.708$ mho/m; $\epsilon_r = 49.05$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.12 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 2.131 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 4.438 mW/g

SAR(1 g) = 0.846 mW/g; SAR(10 g) = 0.187 mW/g

Maximum value of SAR (measured) = 1.84 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 2.131 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 2.955 mW/g

SAR(1 g) = 0.682 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 1.49 mW/g

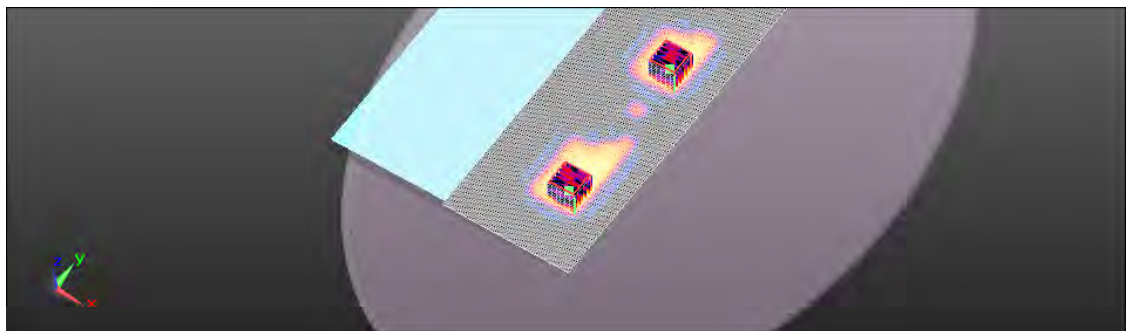

$$0 \text{ dB} = 2.12 \text{ mW/g} = 6.32 \text{ dB mW/g}$$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11n(20M) 5.5G_CH116_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5580 MHz

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.823$ mho/m; $\epsilon_r = 48.879$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.37 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.284 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 4.344 mW/g

SAR(1 g) = 0.996 mW/g; SAR(10 g) = 0.239 mW/g

Maximum value of SAR (measured) = 2.17 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.284 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 4.198 mW/g

SAR(1 g) = 0.885 mW/g; SAR(10 g) = 0.197 mW/g

Maximum value of SAR (measured) = 1.95 mW/g

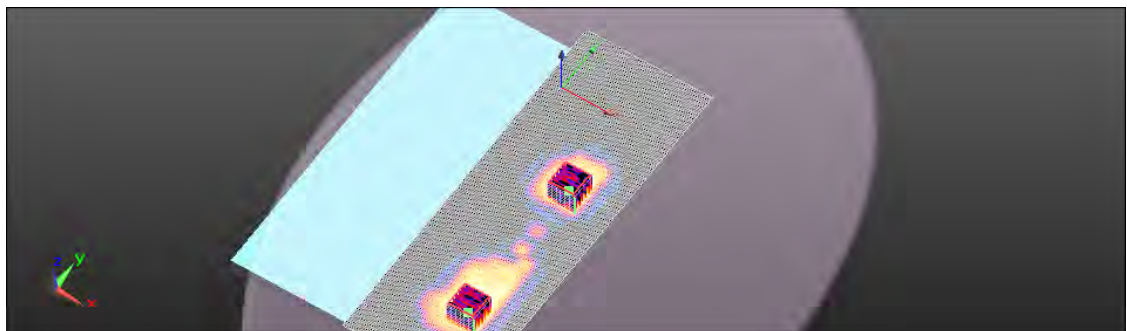

$$0 \text{ dB} = 2.37 \text{ mW/g} = 7.49 \text{ dB mW/g}$$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11n(20M) 5.5G_CH120_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5600 MHz

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.854$ mho/m; $\epsilon_r = 48.846$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 1.89 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.836 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 4.391 mW/g

SAR(1 g) = 0.805 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 1.91 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.836 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 4.246 mW/g

SAR(1 g) = 0.807 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 1.86 mW/g

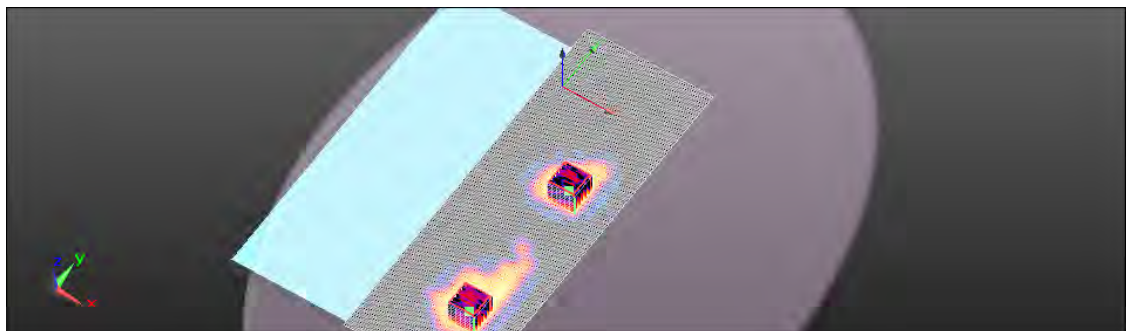

$$0 \text{ dB} = 1.89 \text{ mW/g} = 6.29 \text{ dB mW/g}$$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Lap-held_WLAN802.11n(20M) 5.5G_CH140_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5700 MHz

Medium parameters used: $f = 5700$ MHz; $\sigma = 5.996$ mho/m; $\epsilon_r = 48.635$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.30 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 2.231 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 4.280 mW/g

SAR(1 g) = 0.886 mW/g; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 1.93 mW/g



0 dB = 2.30 mW/g = 7.24 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Secondary Portrait_WLAN802.11n(20M) 5.5G_CH120_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5600 MHz

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.854$ mho/m; $\epsilon_r = 48.846$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0660 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.115 mW/g

SAR(1 g) = 0.00345 mW/g; SAR(10 g) = 0.000342 mW/g

Maximum value of SAR (measured) = 0.0226 mW/g

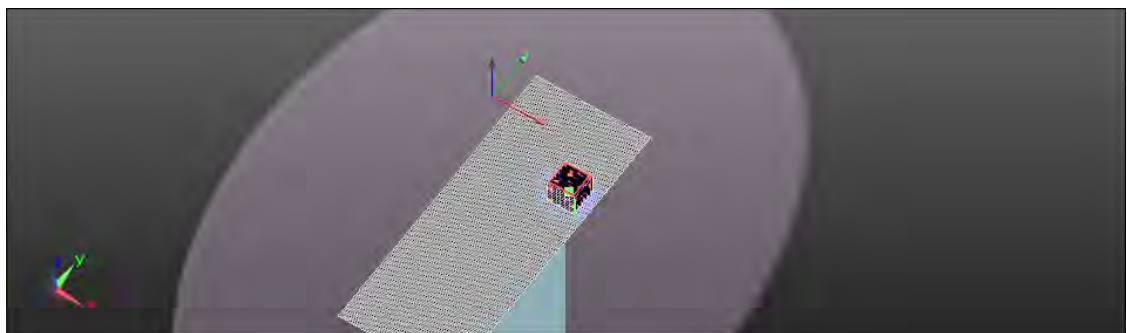

0 dB = 0.0660 mW/g = -23.61 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Secondary Landscape_WLAN802.11n(20M) 5.5G_CH120_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5600 MHz

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.854$ mho/m; $\epsilon_r = 48.846$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.436 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)


(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.388 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.373 mW/g

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.124 mW/g

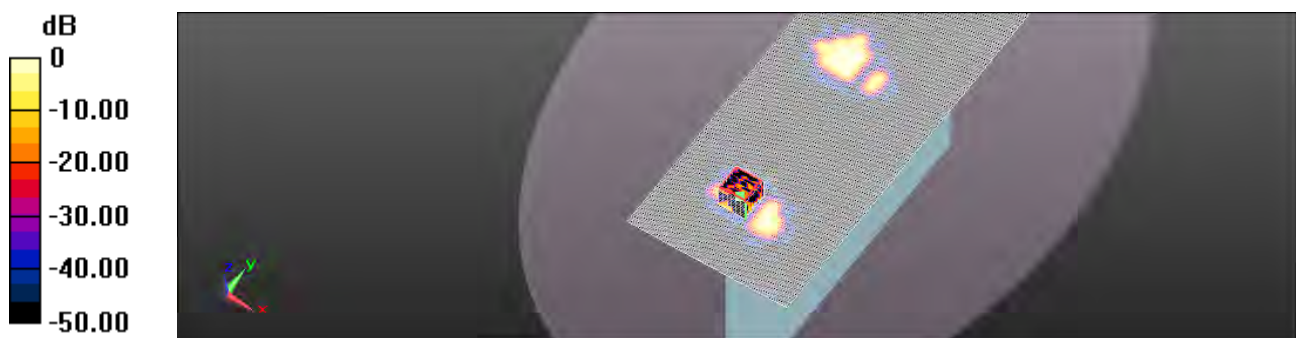

0 dB = 0.436 mW/g = -7.22 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Lap-held_WLAN802.11n(40M) 5.5G_CH102_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5510 MHz

Medium parameters used: $f = 5510$ MHz; $\sigma = 5.72$ mho/m; $\epsilon_r = 49.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.768 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.841 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.428 mW/g

SAR(1 g) = 0.340 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.679 mW/g

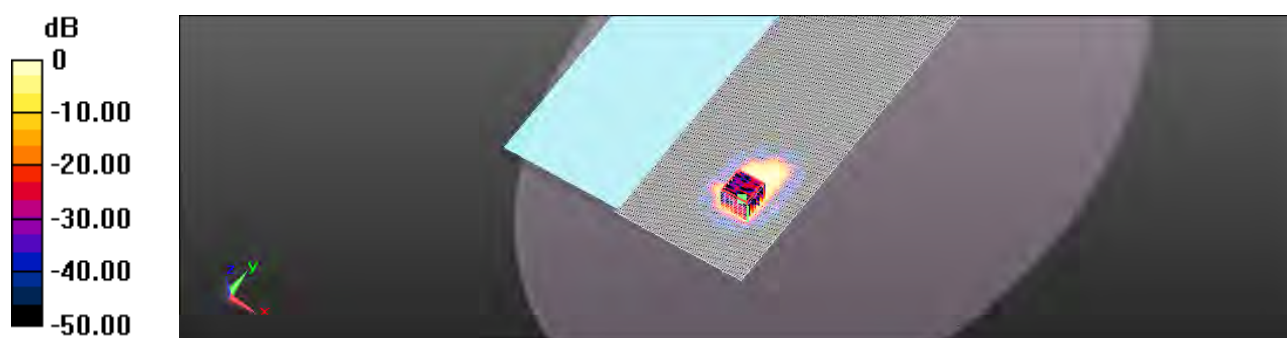

0 dB = 0.768 mW/g = -2.29 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Lap-held_WLAN802.11n(40M) 5.5G_CH118_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5590 MHz

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.834$ mho/m; $\epsilon_r = 48.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.65 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.246 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 5.145 mW/g

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.278 mW/g

Maximum value of SAR (measured) = 2.52 mW/g

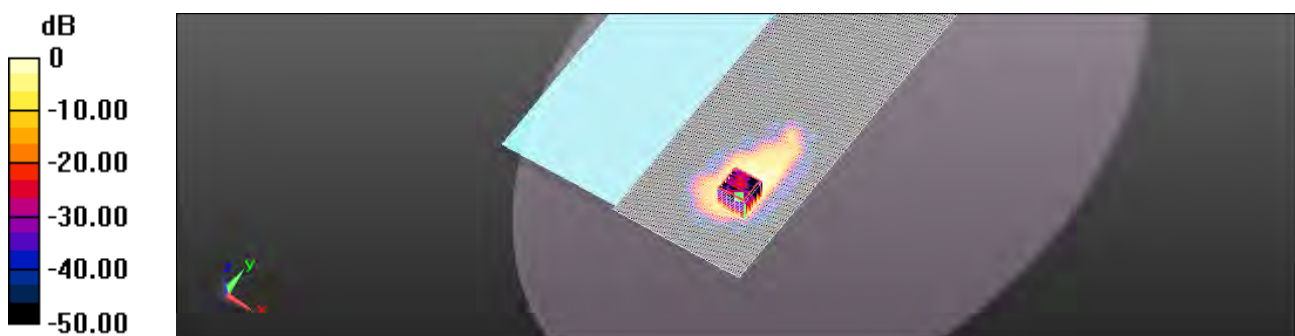

0 dB = 2.65 mW/g = 8.46 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Lap-held_WLAN802.11n(40M) 5.5G_CH134_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5670 MHz

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.951$ mho/m; $\epsilon_r = 48.693$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.05 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.134 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 4.317 mW/g

SAR(1 g) = 0.913 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 2.02 mW/g

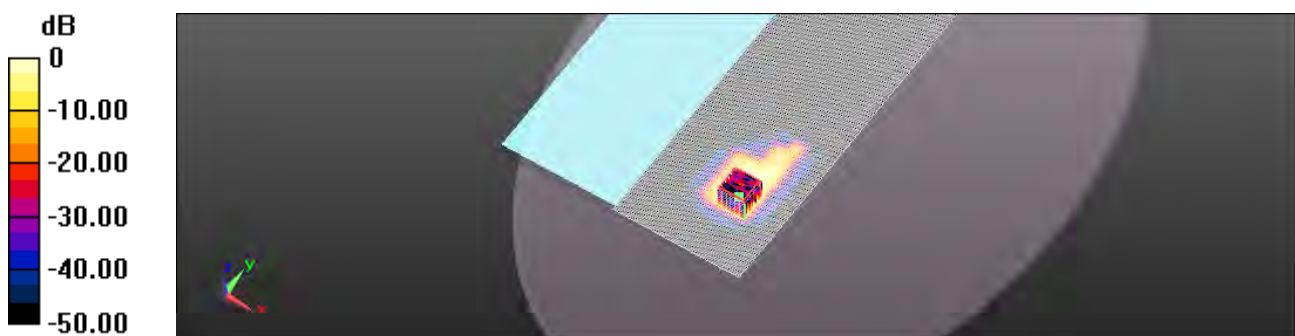

0 dB = 2.05 mW/g = 5.36 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Secondary Portrait_WLAN802.11n(40M) 5.5G_CH118_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5590 MHz

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.834$ mho/m; $\epsilon_r = 48.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0101 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.083 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.041 mW/g

SAR(1 g) = 0.00192 mW/g; SAR(10 g) = 0.000223 mW/g

Maximum value of SAR (measured) = 0.0157 mW/g

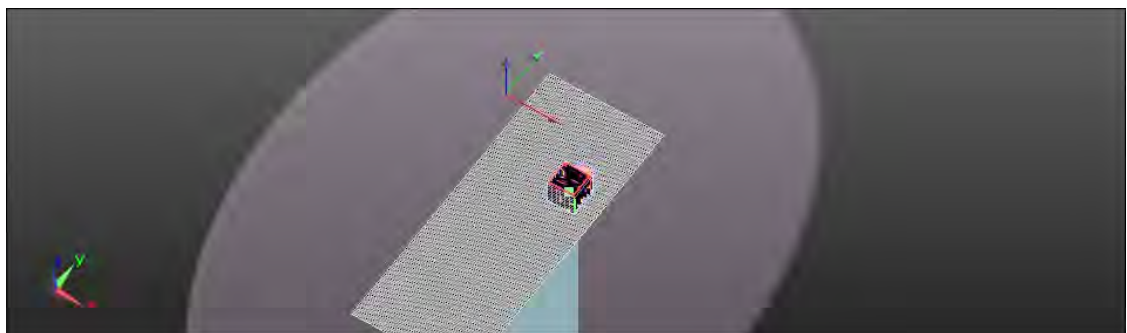

0 dB = 0.0101 mW/g = -39.93 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Secondary Landscape_WLAN802.11n(40M) 5.5G_CH118_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5590 MHz

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.834$ mho/m; $\epsilon_r = 48.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.329 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)


(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.353 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.563 mW/g

SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.210 mW/g



0 dB = 0.329 mW/g = -9.66 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Lap-held_WLAN802.11a 5.8G_CH149_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5745 MHz

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.119$ mho/m; $\epsilon_r = 48.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.63 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 2.103 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 5.147 mW/g

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 2.28 mW/g

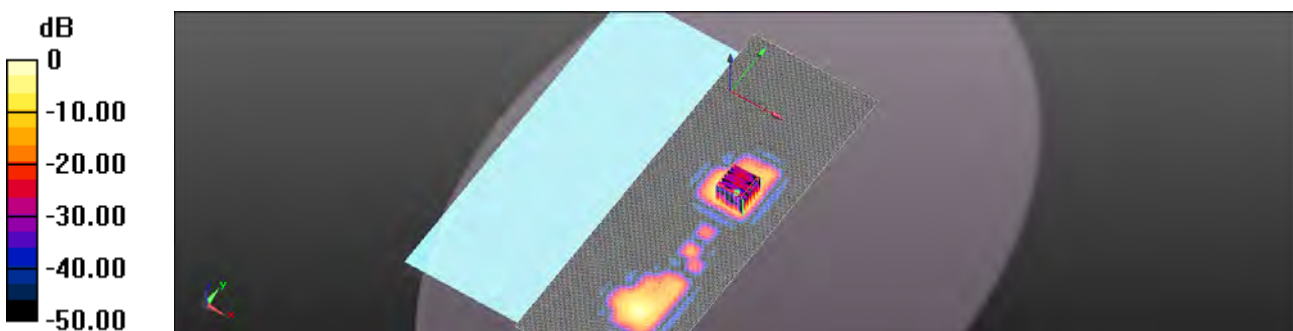

0 dB = 2.63 mW/g = 8.38 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Lap-held_WLAN802.11a 5.8G_CH157_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5785 MHz

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.175$ mho/m; $\epsilon_r = 48.044$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 3.06 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 2.198 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 6.036 mW/g

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.269 mW/g

Maximum value of SAR (measured) = 2.48 mW/g

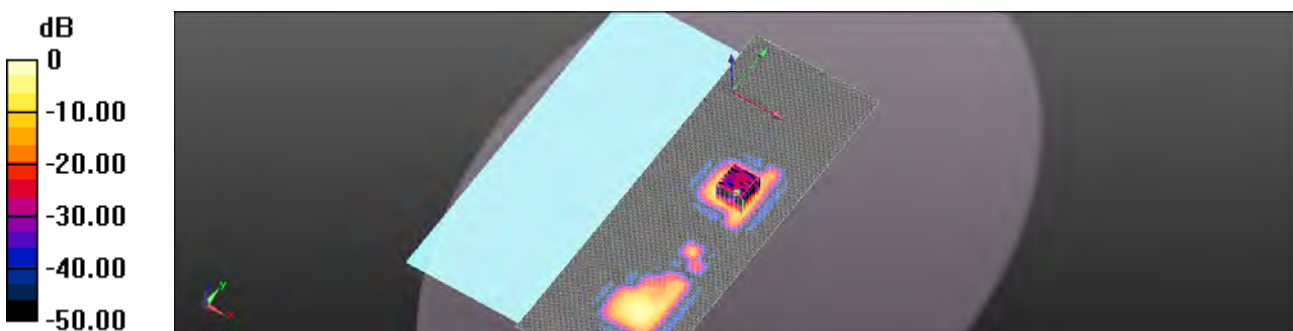


0 dB = 3.06 mW/g = 9.72 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

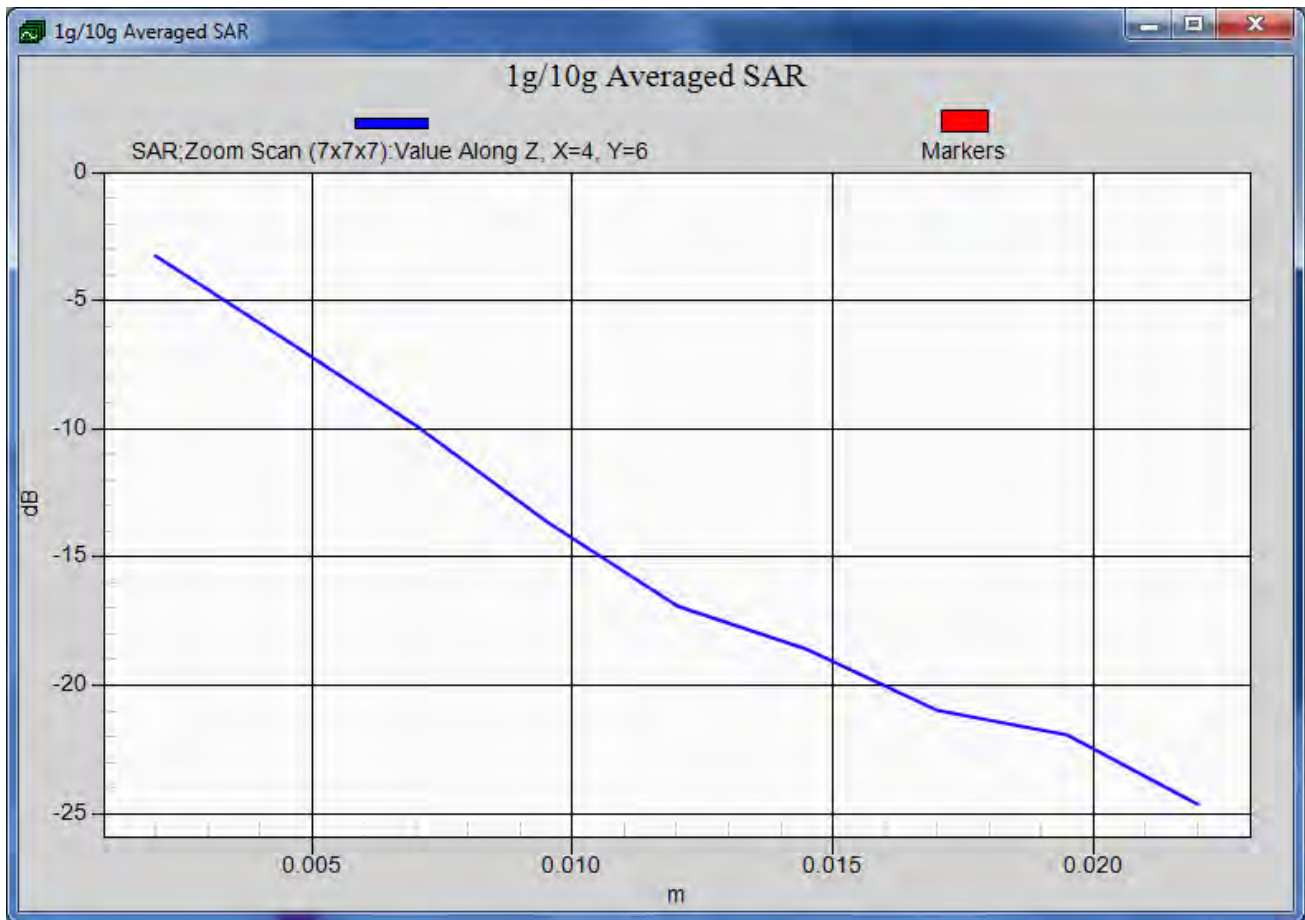

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Lap-held_WLAN802.11a 5.8G_CH165_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5825 MHz

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.236$ mho/m; $\epsilon_r = 47.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.91 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:



Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.457 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 5.879 mW/g

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 2.47 mW/g

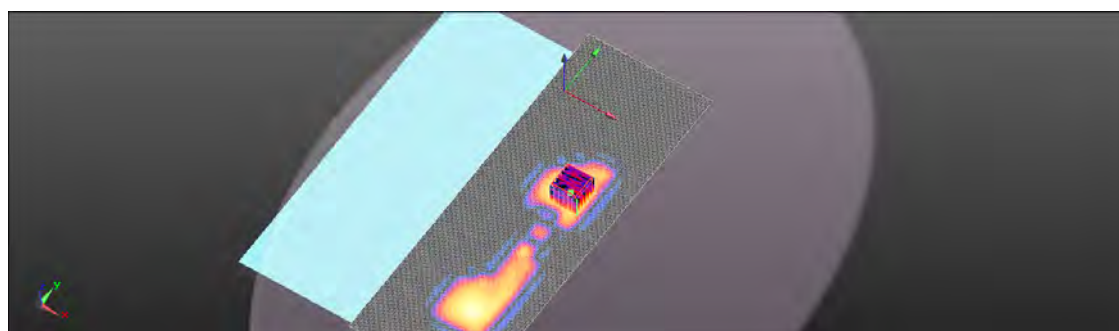

0 dB = 2.91 mW/g = 9.28 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Secondary Portrait_WLAN802.11a 5.8G_CH165_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5825 MHz

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.236$ mho/m; $\epsilon_r = 47.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS2 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0343 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.113 mW/g

SAR(1 g) = 0.00608 mW/g; SAR(10 g) = 0.000687 mW/g

Maximum value of SAR (measured) = 0.0303 mW/g



0 dB = 0.0343 mW/g = -29.30 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Secondary Landscape_WLAN802.11a 5.8G_CH165_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5825 MHz

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.236$ mho/m; $\epsilon_r = 47.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0802 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)


(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.187 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.241 mW/g

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.0662 mW/g



0 dB = 0.0802 mW/g = -21.91 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11n(20M) 5.8G_CH149_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5745 MHz

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.119$ mho/m; $\epsilon_r = 48.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS5 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.56 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.165 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 5.056 mW/g

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.237 mW/g

Maximum value of SAR (measured) = 2.25 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.165 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 3.345 mW/g

SAR(1 g) = 0.645 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 1.47 mW/g

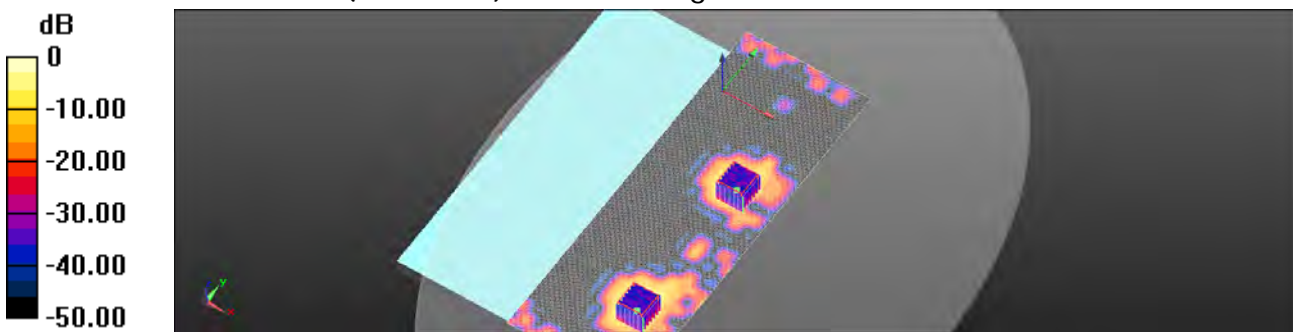

0 dB = 2.56 mW/g = 4.85 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11n(20M) 5.8G_CH157_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5785 MHz

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.175$ mho/m; $\epsilon_r = 48.044$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.41 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.155 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 4.705 mW/g

SAR(1 g) = 0.982 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 2.09 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.155 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 3.537 mW/g

SAR(1 g) = 0.669 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 1.58 mW/g

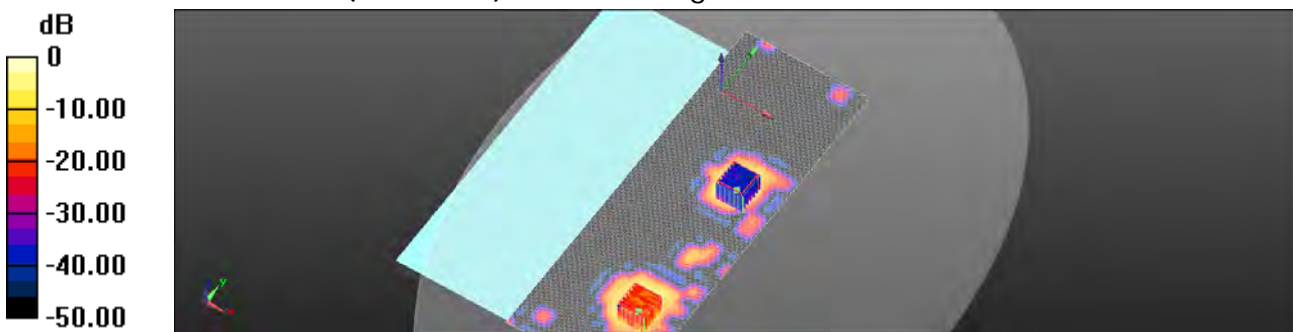

0 dB = 2.41 mW/g = 4.48 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11n(20M) 5.8G_CH165_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5825 MHz

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.236$ mho/m; $\epsilon_r = 47.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.31 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.692 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 5.266 mW/g

SAR(1 g) = 0.935 mW/g; SAR(10 g) = 0.216 mW/g

Maximum value of SAR (measured) = 1.95 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.692 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.984 mW/g

SAR(1 g) = 0.742 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 1.59 mW/g

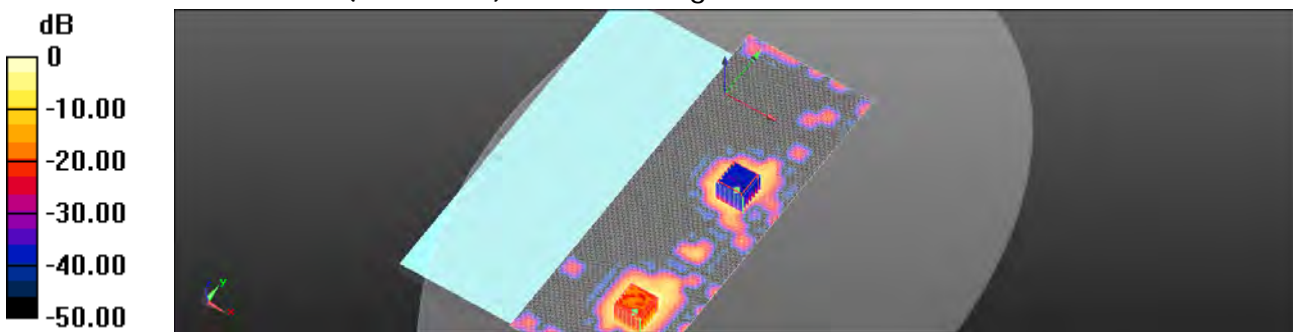

0 dB = 2.31 mW/g = 6.05 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Secondary Portrait_WLAN802.11n(20M) 5.8G_CH165_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5825 MHz

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.236$ mho/m; $\epsilon_r = 47.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0343 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.117 mW/g

SAR(1 g) = 0.00421 mW/g; SAR(10 g) = 0.000405 mW/g

Maximum value of SAR (measured) = 0.0304 mW/g



0 dB = 0.0343 mW/g = -29.29 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Secondary Landscape_WLAN802.11n(20M) 5.8G_CH165_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5825 MHz

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.236$ mho/m; $\epsilon_r = 47.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.107 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)


(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.244 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.266 mW/g

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.0701 mW/g



0 dB = 0.107 mW/g = -19.39 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11n(40M) 5.8G_CH151_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5755 MHz

Medium parameters used: $f = 5755$ MHz; $\sigma = 6.14$ mho/m; $\epsilon_r = 48.088$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.37 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.376 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 5.155 mW/g

SAR(1 g) = 0.977 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 2.20 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.376 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.184 mW/g

SAR(1 g) = 0.600 mW/g; SAR(10 g) = 0.147 mW/g

Maximum value of SAR (measured) = 1.31 mW/g

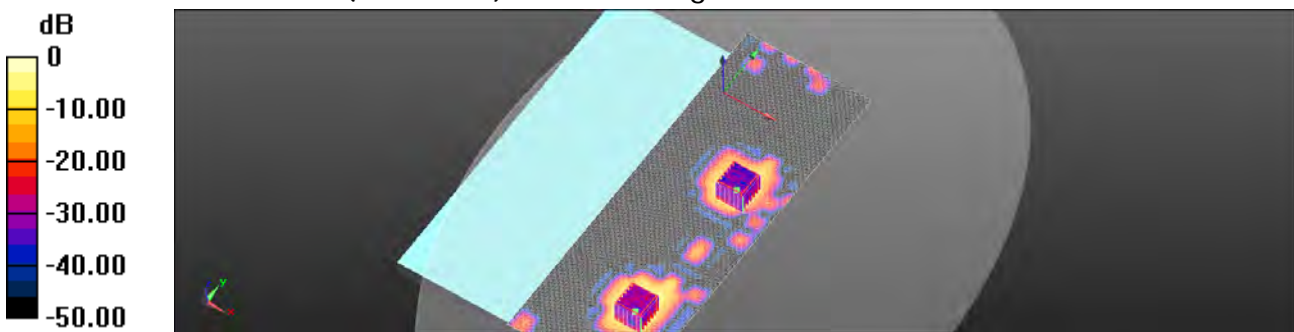

0 dB = 2.37 mW/g = 4.25 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Lap-held_WLAN802.11n(40M) 5.8G_CH159_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5795 MHz

Medium parameters used: $f = 5795$ MHz; $\sigma = 6.19$ mho/m; $\epsilon_r = 48.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Lap-held/Area Scan (111x321x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 2.06 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.219 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 5.222 mW/g

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 2.36 mW/g

Configuration/Lap-held/Zoom Scan (7x7x7) (7x7x9)/Cube 1:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 1.219 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.097 mW/g

SAR(1 g) = 0.770 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 1.80 mW/g

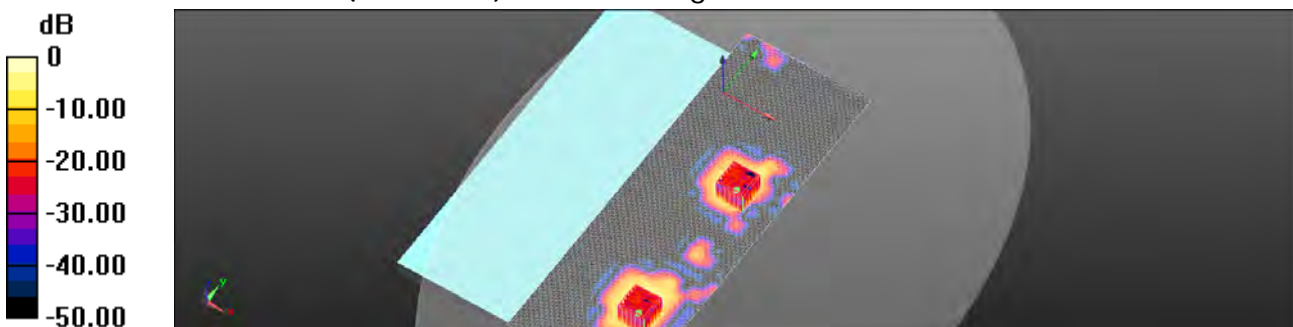

0 dB = 2.06 mW/g = 6.27 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Secondary Portrait_WLAN802.11n(40M) 5.8G_CH159_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5795 MHz

Medium parameters used: $f = 5795$ MHz; $\sigma = 6.19$ mho/m; $\epsilon_r = 48.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Portrait/Area Scan (101x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0485 mW/g

Configuration/Secondary Portrait/Zoom Scan (7x7x7) (7x7x9)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.227 mW/g

SAR(1 g) = 0.019 mW/g; SAR(10 g) = 0.00336 mW/g

Maximum value of SAR (measured) = 0.0392 mW/g



0 dB = 0.0485 mW/g = -26.28 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Secondary Landscape_WLAN802.11n(40M) 5.8G_CH159_MIMO

Communication System: WLAN 5G (FCC); Frequency: 5795 MHz

Medium parameters used: $f = 5795$ MHz; $\sigma = 6.19$ mho/m; $\epsilon_r = 48.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Secondary Landscape/Area Scan (141x331x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0924 mW/g

Configuration/Secondary Landscape/Zoom Scan (7x7x7)

(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.338 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.302 mW/g

SAR(1 g) = 0.031 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.0673 mW/g



0 dB = 0.0924 mW/g = -20.69 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

5. SAR System Performance Verification

Date: 2012/8/13

Dipole 2450 MHz (Body)

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.953$ mho/m; $\epsilon_r = 53.113$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(6.95, 6.95, 6.95); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS2 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Pin=250mW, d=10mm/Area Scan (41x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 22.3 mW/g

Configuration/Pin=250mW, d=10mm/Zoom Scan (7x7x7)


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.1 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 29.906 mW/g

SAR(1 g) = 13.1 mW/g; SAR(10 g) = 6.25 mW/g

Maximum value of SAR (measured) = 21.6 mW/g

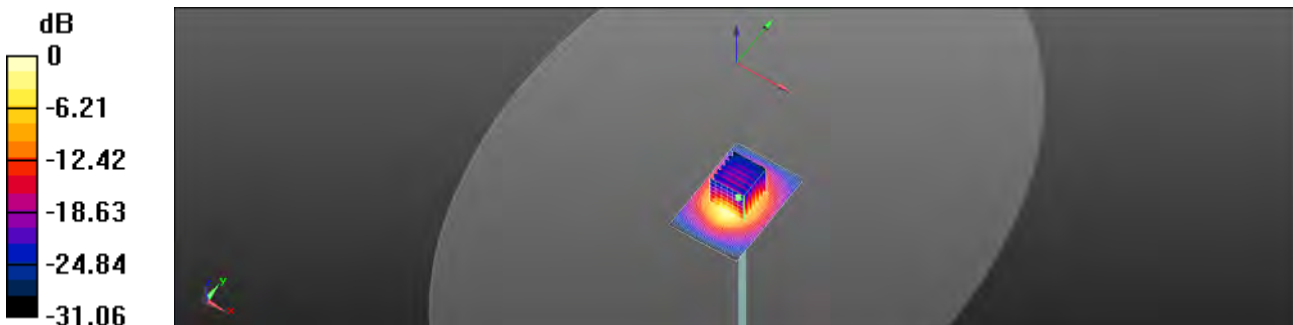

0 dB = 22.3 mW/g = 26.98 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/1

Dipole 5.2 GHz (Body)

Communication System: CW; Frequency: 5200 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.469$ mho/m; $\epsilon_r = 49.153$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASy5 (IEEE/IEC/ANSI C63.19-2007)

DASy Configuration:

- Probe: EX3DV4 - SN3848; ConvF(4.4, 4.4, 4.4); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASy52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Pin=100mW, d=10mm/Area Scan (41x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 15.4 mW/g



Configuration/Pin=100mW, d=10mm/Zoom Scan (7x7x7) (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 58.357 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 32.513 mW/g

SAR(1 g) = 7.54 mW/g; SAR(10 g) = 2.08 mW/g

Maximum value of SAR (measured) = 15.8 mW/g

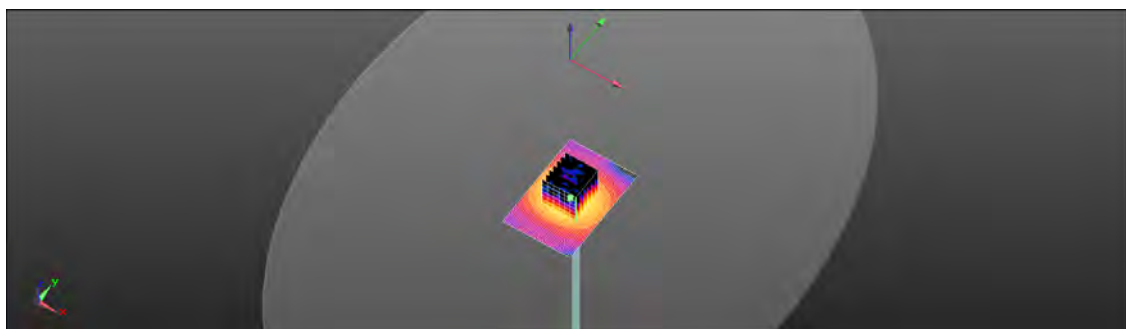

0 dB = 15.4 mW/g = 23.74 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/2

Dipole 5.5 GHz (Body)

Communication System: CW; Frequency: 5500 MHz

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.708$ mho/m; $\epsilon_r = 49.059$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASy5 (IEEE/IEC/ANSI C63.19-2007)

DASy Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.88, 3.88, 3.88); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASy52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Pin=100mW, d=10mm 2/Area Scan (41x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 16.8 mW/g

Configuration/Pin=100mW, d=10mm 2/Zoom Scan (7x7x7)



(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 58.323 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 35.348 mW/g

SAR(1 g) = 7.91 mW/g; SAR(10 g) = 2.14 mW/g

Maximum value of SAR (measured) = 16.8 mW/g

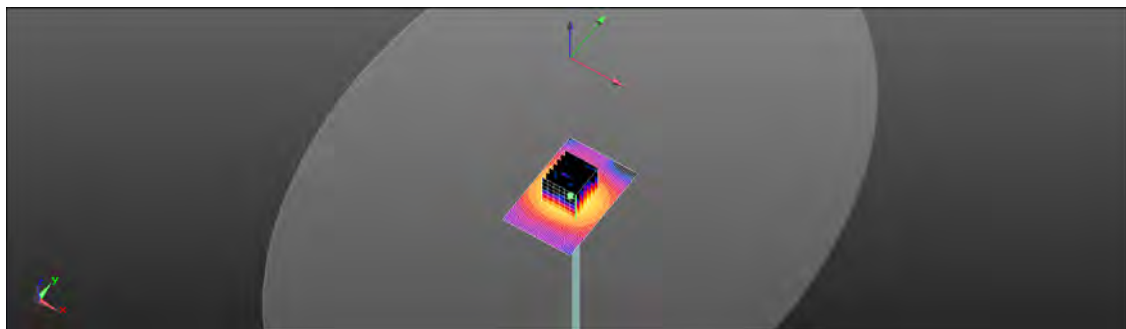

0 dB = 16.8 mW/g = 24.62 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2012/9/3

Dipole 5.8 GHz (Body)

Communication System: CW; Frequency: 5800 MHz

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.196$ mho/m; $\epsilon_r = 48.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3848; ConvF(3.87, 3.87, 3.87); Calibrated: 2012/6/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2012/6/5
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1141
- DASYS 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Pin=100mW, d=10mm 3/Area Scan (41x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 15.7 mW/g

Configuration/Pin=100mW, d=10mm 3/Zoom Scan (7x7x7)



(7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 55.785 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 35.117 mW/g

SAR(1 g) = 7.31 mW/g; SAR(10 g) = 1.99 mW/g

Maximum value of SAR (measured) = 15.9 mW/g

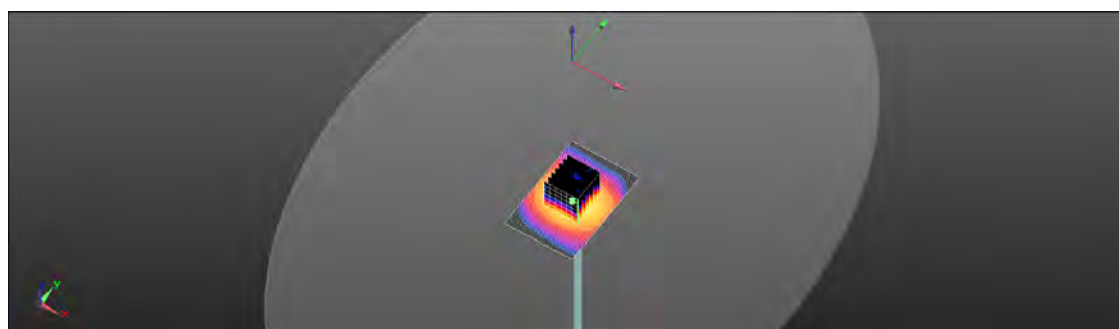

0 dB = 15.7 mW/g = 23.64 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

6. DAE & Probe Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 108

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **SGS-TW (Auden)**

Certificate No: DAE4-1336_Jun12

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BJ - SN: 1336**

Calibration procedure(s) **QA CAL-06.v24
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **June 05, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-11 (No:11450)	Sep-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V2.1	SE UWS 053 AA 1001	05-Jan-12 (in house check)	In house check: Jan-13

	Name	Function	Signature
Calibrated by:	Dominique Steffen	Technician	
Approved by:	Fin Bomholt	R&D Director	

Issued: June 5, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-1336_Jun12

Page 1 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	403.371 \pm 0.1% (k=2)	403.127 \pm 0.1% (k=2)	403.194 \pm 0.1% (k=2)
Low Range	3.96695 \pm 0.7% (k=2)	3.96890 \pm 0.7% (k=2)	3.99405 \pm 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	122.5 $^{\circ}$ \pm 1 $^{\circ}$
---	-------------------------------------

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Appendix
1. DC Voltage Linearity

High Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	199994.11	-3.29	-0.00
Channel X	+ Input	20001.83	0.90	0.00
Channel X	- Input	-19999.76	0.45	-0.00
Channel Y	+ Input	199997.52	0.39	0.00
Channel Y	+ Input	19998.61	-2.15	-0.01
Channel Y	- Input	-20001.36	-1.00	0.00
Channel Z	+ Input	199993.95	-3.37	-0.00
Channel Z	+ Input	19998.98	-1.78	-0.01
Channel Z	- Input	-20001.47	-0.97	0.00

Low Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	2002.07	0.90	0.04
Channel X	+ Input	202.26	0.62	0.31
Channel X	- Input	-197.79	0.45	-0.23
Channel Y	+ Input	2001.57	0.59	0.03
Channel Y	+ Input	201.46	-0.01	-0.01
Channel Y	- Input	-198.80	-0.34	0.17
Channel Z	+ Input	2001.54	0.51	0.03
Channel Z	+ Input	200.53	-1.00	-0.50
Channel Z	- Input	-199.57	-1.21	0.61

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	5.99	4.73
	- 200	-3.24	-5.13
Channel Y	200	4.30	4.27
	- 200	-5.85	-5.85
Channel Z	200	8.94	9.05
	- 200	-12.06	-12.09

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	6.36	-0.99
Channel Y	200	9.20	-	7.23
Channel Z	200	8.41	6.54	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15917	15922
Channel Y	15876	15535
Channel Z	15842	16395

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	1.30	-0.23	2.19	0.37
Channel Y	-0.29	-1.58	1.23	0.56
Channel Z	-2.08	-3.18	-0.96	0.49

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS-TW (Auden)**

Certificate No: **EX3-3848_Jun12**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3848**

Calibration procedure(s): **QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4
Calibration procedure for dosimetric E-field probes**

Calibration date: **June 4, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAE4	SN: 660	10-Jan-12 (No. DAE4-660_Jan12)	Jan-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: June 5, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A, B, C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4 – SN:3848

June 4, 2012

Probe EX3DV4

SN:3848

Manufactured: October 25, 2011
Calibrated: June 4, 2012

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4- SN:3848

June 4, 2012

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3848

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.35	0.40	0.45	± 10.1 %
DCP (mV) ^B	105.4	102.1	99.4	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
0	CW	0.00	X	0.00	0.00	1.00	177.0	±3.5 %
			Y	0.00	0.00	1.00	188.5	
			Z	0.00	0.00	1.00	199.4	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4- SN:3848

June 4, 2012

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3848

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	9.19	9.19	9.19	0.38	0.93	± 12.0 %
835	41.5	0.90	8.90	8.90	8.90	0.35	1.03	± 12.0 %
900	41.5	0.97	8.73	8.73	8.73	0.28	1.15	± 12.0 %
1750	40.1	1.37	7.82	7.82	7.82	0.80	0.55	± 12.0 %
1900	40.0	1.40	7.55	7.55	7.55	0.29	0.88	± 12.0 %
2000	40.0	1.40	7.54	7.54	7.54	0.41	0.74	± 12.0 %
2300	39.5	1.67	7.15	7.15	7.15	0.35	0.75	± 12.0 %
2450	39.2	1.80	6.78	6.78	6.78	0.53	0.66	± 12.0 %
2600	39.0	1.96	6.62	6.62	6.62	0.29	0.99	± 12.0 %
5200	36.0	4.66	5.24	5.24	5.24	0.30	1.80	± 13.1 %
5300	35.9	4.76	4.99	4.99	4.99	0.32	1.80	± 13.1 %
5600	35.5	5.07	4.85	4.85	4.85	0.30	1.80	± 13.1 %
5800	35.3	5.27	4.65	4.65	4.65	0.40	1.80	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4- SN:3848

June 4, 2012

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3848

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	9.24	9.24	9.24	0.34	0.99	± 12.0 %
835	55.2	0.97	9.11	9.11	9.11	0.54	0.76	± 12.0 %
900	55.0	1.05	8.99	8.99	8.99	0.29	1.13	± 12.0 %
1750	53.4	1.49	7.48	7.48	7.48	0.38	0.88	± 12.0 %
1900	53.3	1.52	7.28	7.28	7.28	0.39	0.83	± 12.0 %
2000	53.3	1.52	7.42	7.42	7.42	0.28	1.01	± 12.0 %
2300	52.9	1.81	7.10	7.10	7.10	0.46	0.74	± 12.0 %
2450	52.7	1.95	6.95	6.95	6.95	0.80	0.50	± 12.0 %
2600	52.5	2.16	6.74	6.74	6.74	0.80	0.54	± 12.0 %
5200	49.0	5.30	4.40	4.40	4.40	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.17	4.17	4.17	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.88	3.88	3.88	0.50	1.90	± 13.1 %
5800	48.2	6.00	3.87	3.87	3.87	0.60	1.90	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4- SN:3848

June 4, 2012

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

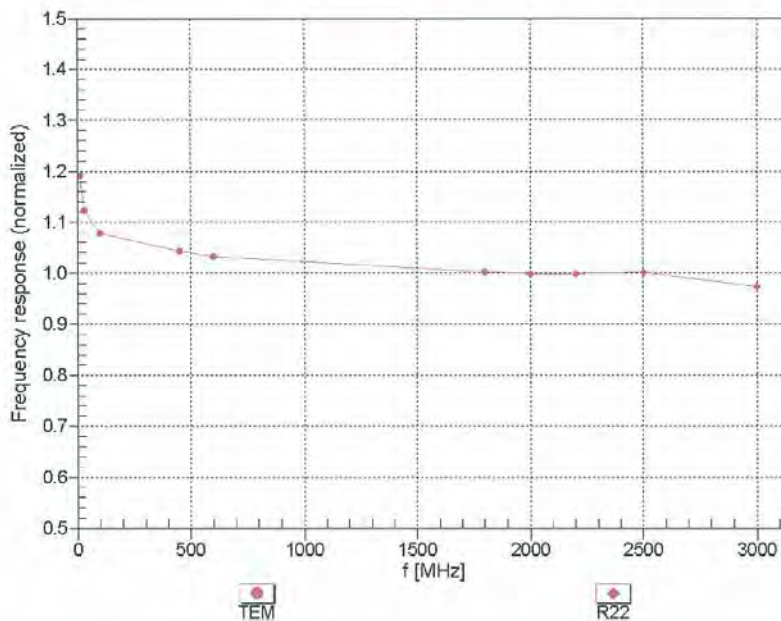

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4- SN:3848

June 4, 2012

Receiving Pattern (ϕ), $\theta = 0^\circ$

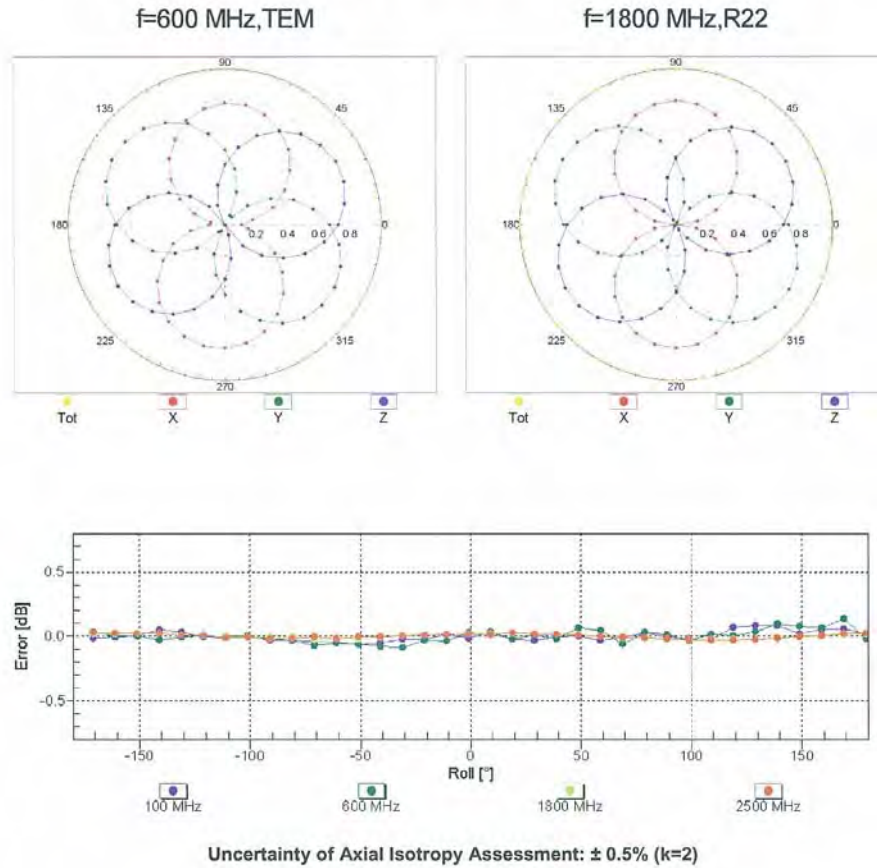

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4- SN:3848

June 4, 2012

Dynamic Range $f(SAR_{head})$ (TEM cell , $f = 900$ MHz)

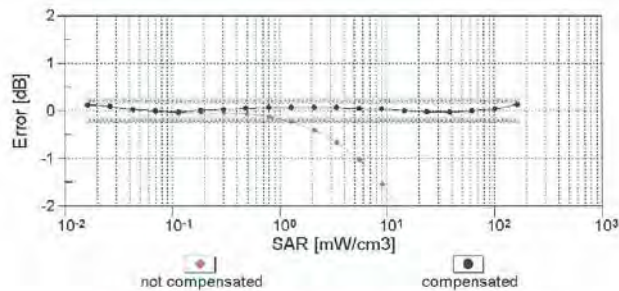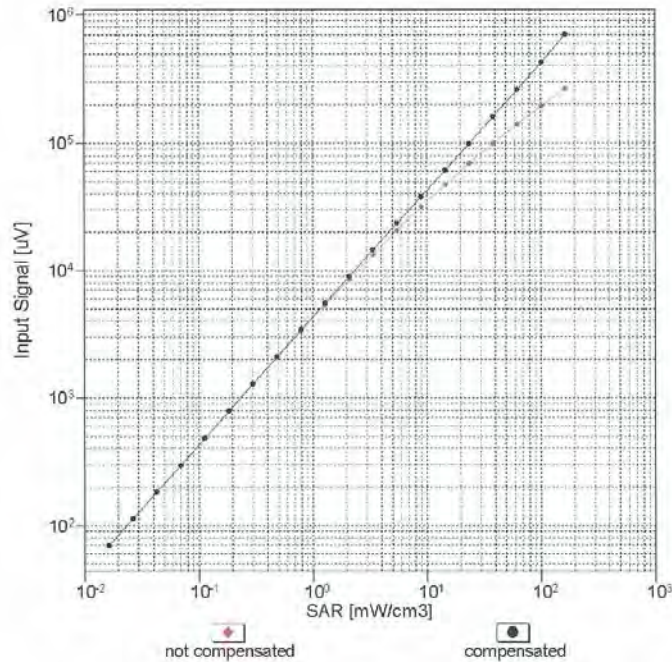

Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


EX3DV4- SN:3848

June 4, 2012

Conversion Factor Assessment

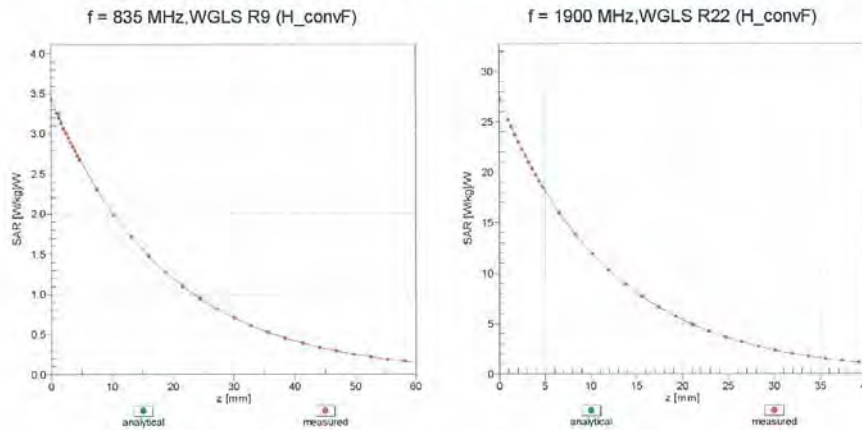

Deviation from Isotropy in Liquid Error (ϕ , θ), f = 900 MHz

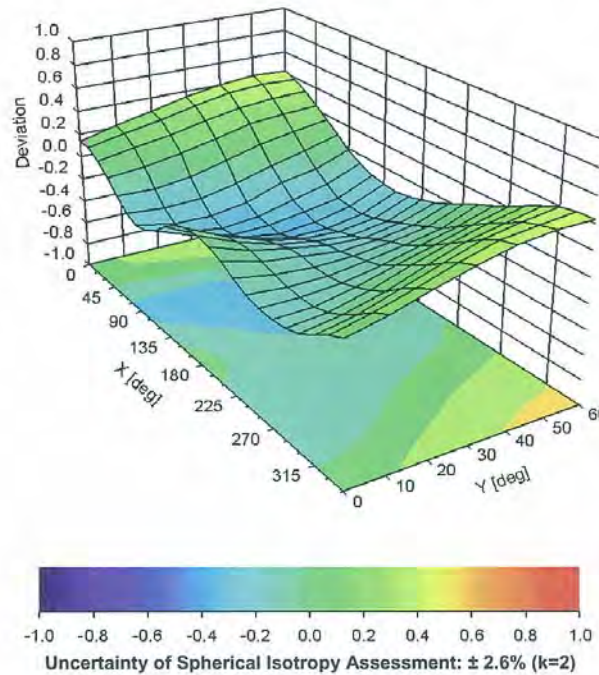

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4-SN:3848

June 4, 2012

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3848

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	59
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

7. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test
IEEE 1528

A	c	D	e		f	g	$h=c * f / e$	$i=c * g / e$	k
Source of Uncertainty	Tolerance/Uncertainty	Probability	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	∞
<i>Isotropy, Axial</i>	3.50%	R	$\sqrt{3}$	1.732	1	1	2.02%	2.02%	∞
<i>Isotropy, Hemispherical</i>	9.60%	R	$\sqrt{3}$	1.732	1	1	5.54%	5.54%	∞
Boundary Effect	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	$\sqrt{3}$	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	$\sqrt{3}$	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	$\sqrt{3}$	1.732	1	1	1.50%	1.50%	∞
<i>Measurement drift (Class A)</i>	1.75%	R	$\sqrt{3}$	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions -	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical	0.40%	R	$\sqrt{3}$	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to	2.90%	R	$\sqrt{3}$	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	$\sqrt{3}$	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	$\sqrt{3}$	1.732	1	1	2.31%	2.31%	∞
Liquid conductivity(meas.) Max at 5200 band	4.31%	N	1	1	0.64	0.43	2.76%	1.85%	M
Liquid permittivity(meas.) Max at 5500 band	3.72%	N	1	1	0.6	0.49	2.23%	1.82%	M
Combined standard uncertainty		RSS					12.10%	11.86%	
Expan uncertainty (95% confidence)							24.20%	23.72%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

8. Phantom Description

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zürich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
Info@speag.com, http://www.speag.com

Certificate of Conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No.	QD 000 P40 C
Series No.	TP-1150 and higher
Manufacturer	SPEAG Zeughausstrasse 43 CH-8004 Zürich Switzerland

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series items (called samples) or are tested at each item.

Test	Requirement	Details	Units tested
Dimensions	Compliant with the geometry according to the CAD model	IT15 CAD File (*)	First article, Samples
Material thickness of shell	Compliant with the requirements according to the standards	2mm +/- 0.2mm in flat and specific areas of head section	First article, Samples, TP-1314 ff.
Material thickness at ERP	Compliant with the requirements according to the standards	6mm +/- 0.2mm at ERP	First article, All items
Material parameters	Dielectric parameters for required frequencies	300 MHz – 6 GHz: Relative permittivity < 5, Loss tangent < 0.05	Material samples
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards (if handled and cleaned according to the instructions. Observe technical Note for material compatibility.	DEGMBE based simulating liquids	Pre-series, First article, Material samples
Sagging	Compliant with the requirements according to the standards. Sagging of the flat section when filled with tissue simulating liquid.	< 1% typical < 0.8% if filled with 155mm of HSL900 and without DUT below	Prototypes, Sample testing

Standards

- [1] CENELEC EN 50361
 - [2] IEEE Std 1528-2003
 - [3] IEC 62209 Part 1
 - [4] FCC OET Bulletin 65, Supplement C, Edition 01-01
- (*) The IT15 CAD file is derived from [2] and is also within the tolerance requirements of the shapes of the other documents.

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standards [1] to [4].

Date 07.07.2005

Signature / Stamp

s p e a g

Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zürich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
Info@speag.com, http://www.speag.com

Doc No. 881 - QD 000 P40 C - F

Page 3 (3)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group

9. System Validation from Original Equipment Supplier

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **SGS-TW (Auden)**

Certificate No: D2450V2-727_Apr12

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 727**

Calibration procedure(s) **QA CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz**



Calibration date: **April 25, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	30-Dec-11 (No. ES3-3205_Dec11)	Dec-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

	Name	Function	Signature
Calibrated by:	Jeton Kastrali	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 25, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-727_Apr12

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.6 \pm 6 %	1.81 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.8 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	51.2 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.95 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	23.8 mW / g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	52.4 \pm 6 %	1.98 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.7 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	50.4 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.92 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	23.6 mW / g \pm 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.6 Ω + 2.8 j Ω
Return Loss	- 27.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.3 Ω + 3.9 j Ω
Return Loss	- 27.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.149 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 09, 2003

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

DASY5 Validation Report for Head TSL

Date: 25.04.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.45, 4.45, 4.45); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.712 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 26.388 mW/g

SAR(1 g) = 12.8 mW/g; SAR(10 g) = 5.95 mW/g

Maximum value of SAR (measured) = 16.4 mW/g

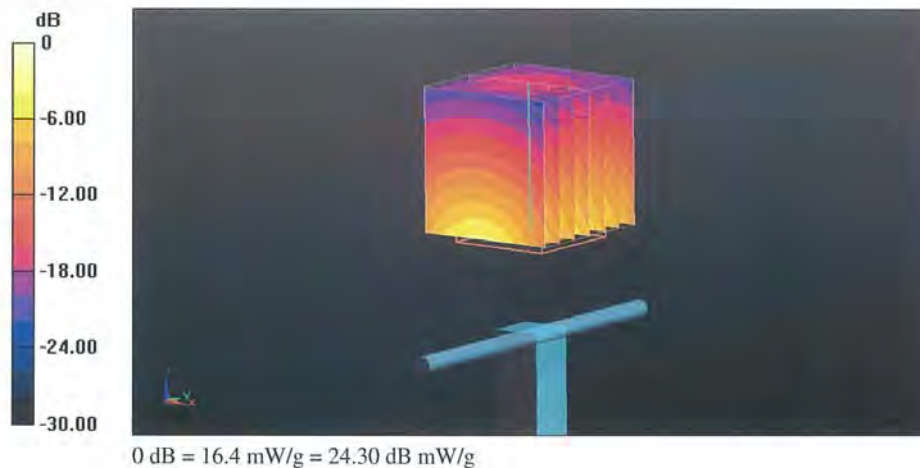


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Impedance Measurement Plot for Head TSL

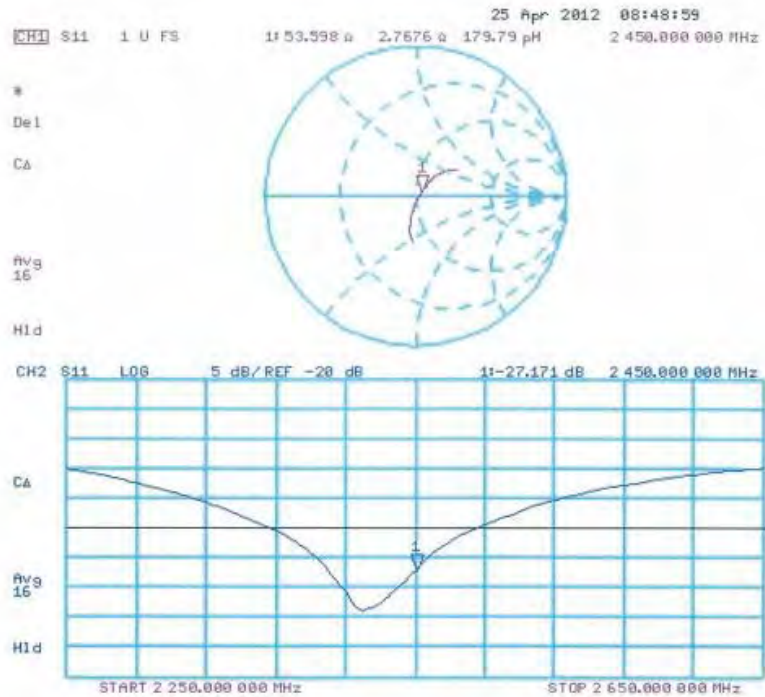

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

DASY5 Validation Report for Body TSL

Date: 25.04.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.26, 4.26, 4.26); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.136 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 25.811 mW/g

SAR(1 g) = 12.7 mW/g; SAR(10 g) = 5.92 mW/g

Maximum value of SAR (measured) = 16.7 mW/g

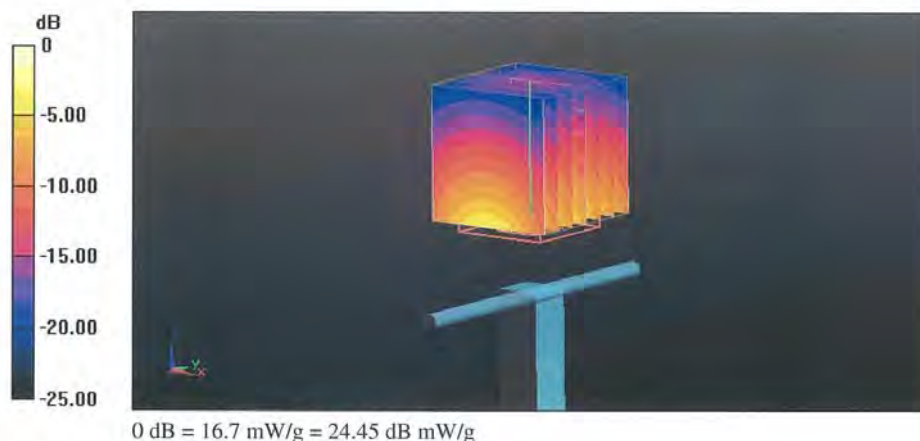

Impedance Measurement Plot for Body TSL

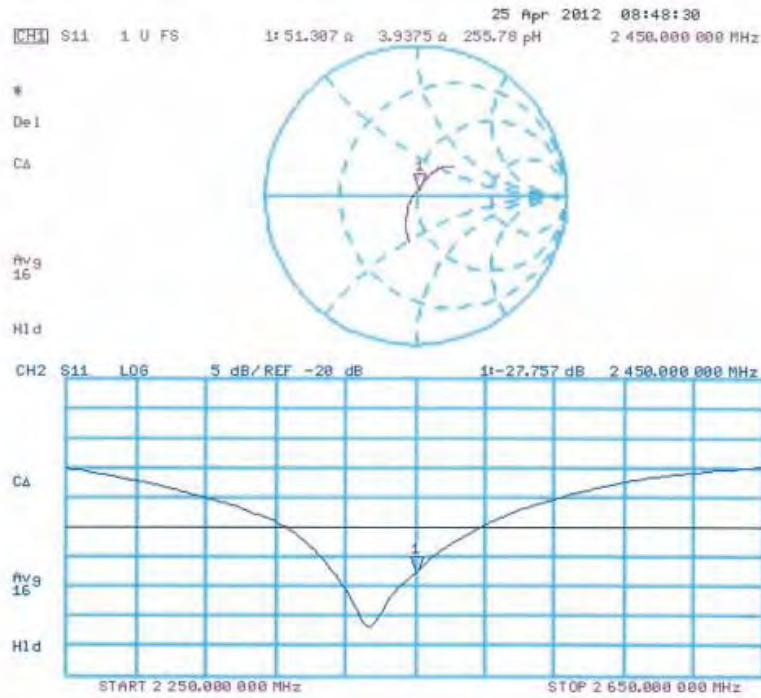

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS-TW (Auden)**

Certificate No: **D5GHzV2-1104_Apr12**

CALIBRATION CERTIFICATE

Object: **D5GHzV2 - SN: 1104**

Calibration procedure(s): **QA CAL-22.v1
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **April 18, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe EX3DV4	SN: 3503	30-Dec-11 (No. EX3-3503_Dec11)	Dec-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name	Function	Signature
	Israe El-Naouq	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 18, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- b) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	$dx, dy = 4.0 \text{ mm}, dz = 1.4 \text{ mm}$	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz \pm 1 MHz 5500 MHz \pm 1 MHz 5800 MHz \pm 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	35.0 \pm 6 %	4.52 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.22 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	81.7 mW / g \pm 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.35 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	23.3 mW / g \pm 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	34.6 \pm 6 %	4.80 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.54 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	84.8 mW / g \pm 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.43 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.1 mW / g \pm 19.5 % (k=2)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.1 ± 6 %	5.11 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.08 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	80.1 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.29 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	22.7 mW / g ± 19.5 % (k=2)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.8 ± 6 %	5.41 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.41 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	73.8 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.07 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.6 mW / g ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3 ± 6 %	5.78 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.89 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	78.5 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.18 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.7 mW / g ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48,2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46,8 ± 6 %	6.20 mho/m ± 6 %
Body TSL temperature change during test	< 0,5 °C	---	---

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.32 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	72.9 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.02 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.1 mW / g ± 19.5 % (k=2)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	52.8 Ω - 8.7 j Ω
Return Loss	- 21.0 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	52.4 Ω - 5.4 j Ω
Return Loss	- 24.8 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	56.5 Ω - 0.3 j Ω
Return Loss	- 24.3 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	53.5 Ω - 6.6 j Ω
Return Loss	- 22.9 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	53.2 Ω - 2.6 j Ω
Return Loss	- 27.9 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	56.8 Ω + 1.9 j Ω
Return Loss	- 23.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.209 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 24, 2010

DASY5 Validation Report for Head TSL

Date: 17.04.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1104

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.52$ mho/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.8$ mho/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.11$ mho/m; $\epsilon_r = 34.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 30.12.2011, ConvF(4.91, 4.91, 4.91); Calibrated: 30.12.2011, ConvF(4.81, 4.81, 4.81); Calibrated: 30.12.2011;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.351 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 30.800 mW/g
SAR(1 g) = 8.22 mW/g; SAR(10 g) = 2.35 mW/g
Maximum value of SAR (measured) = 19.1 mW/g

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.317 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 33.950 mW/g
SAR(1 g) = 8.54 mW/g; SAR(10 g) = 2.43 mW/g
Maximum value of SAR (measured) = 20.1 mW/g

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 61.898 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 34.138 mW/g
SAR(1 g) = 8.08 mW/g; SAR(10 g) = 2.29 mW/g
Maximum value of SAR (measured) = 19.7 mW/g

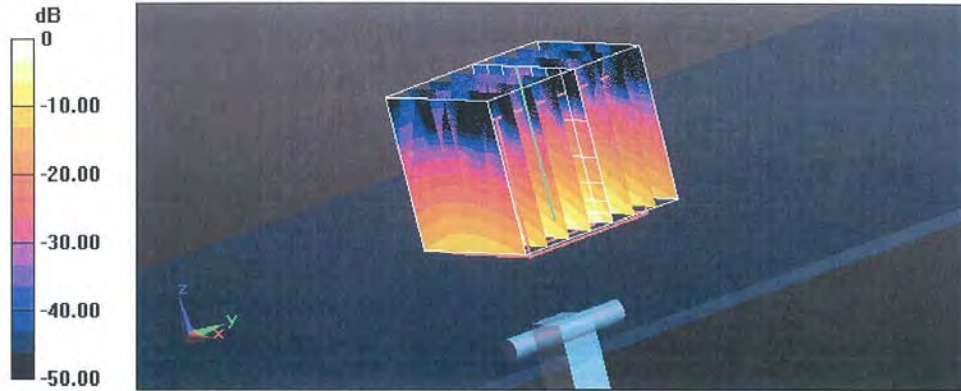


0 dB = 19.7 mW/g = 25.89 dB mW/g

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Impedance Measurement Plot for Head TSL

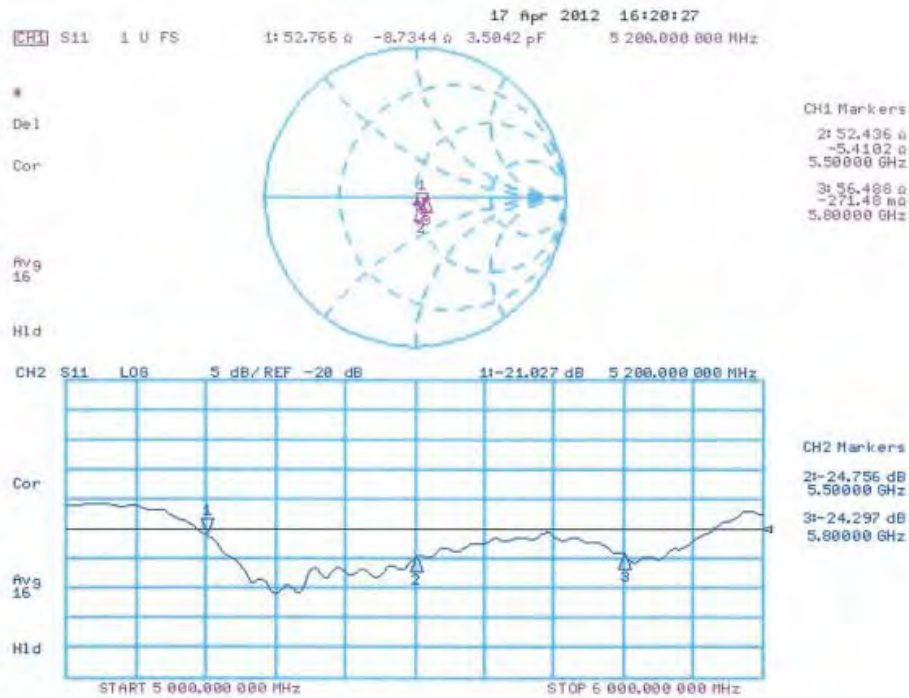

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

DASY5 Validation Report for Body TSL

Date: 18.04.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1104

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.41$ mho/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.78$ mho/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.2$ mho/m; $\epsilon_r = 46.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 30.12.2011, ConvF(4.43, 4.43, 4.43); Calibrated: 30.12.2011, ConvF(4.38, 4.38, 4.38); Calibrated: 30.12.2011;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.557 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 29.375 mW/g

SAR(1 g) = 7.41 mW/g; SAR(10 g) = 2.07 mW/g

Maximum value of SAR (measured) = 16.9 mW/g

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.550 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 34.062 mW/g

SAR(1 g) = 7.89 mW/g; SAR(10 g) = 2.18 mW/g

Maximum value of SAR (measured) = 18.9 mW/g

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 54.767 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 34.448 mW/g

SAR(1 g) = 7.32 mW/g; SAR(10 g) = 2.02 mW/g

Maximum value of SAR (measured) = 18.0 mW/g

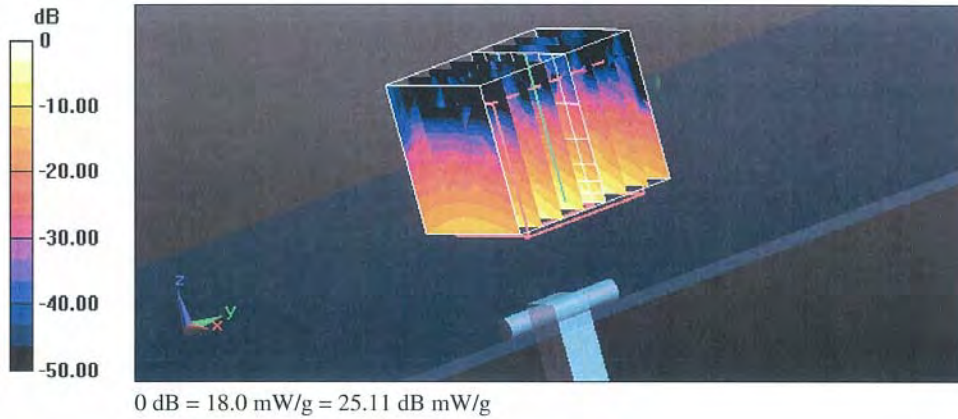


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Impedance Measurement Plot for Body TSL

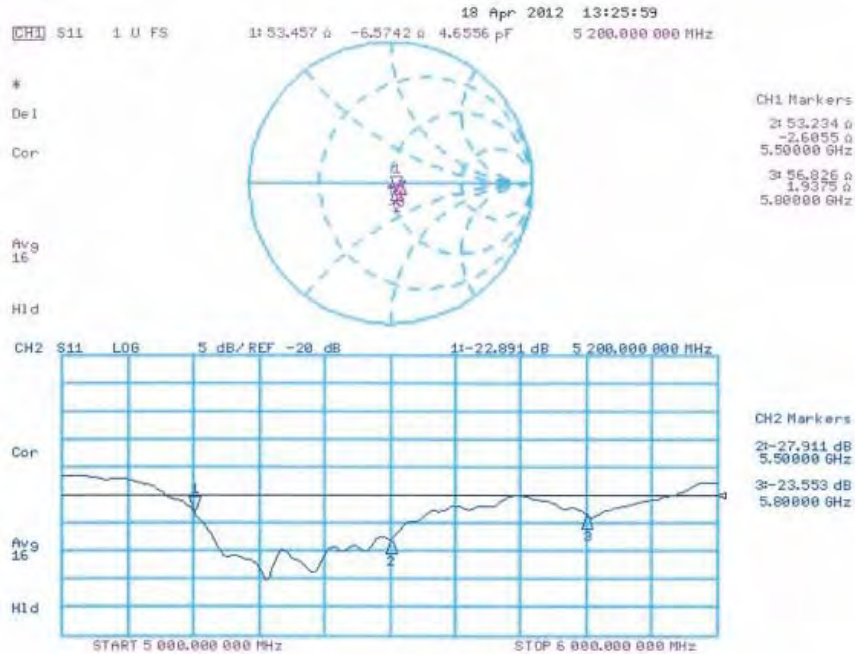

- End of 1st part of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.