



FCC 47 CFR PART 15 SUBPART C

PERMISSIVE CLASS II CHANGE TEST REPORT

For

802.11b/g PCI Express Minicard

Model: AR5BXB63

Trade Name: Atheros

Issued to

Atheros Communications, Inc.

**5480 Great America Parkway
Santa Clara, CA 95054, USA**

Issued by

Compliance Certification Services Inc.

**No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.**

TEL: 886-3-324-0332

FAX: 886-3-324-5235



***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION.....	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES.....	7
4. INSTRUMENT CALIBRATION.....	8
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
5.3 LABORATORY ACCREDITATIONS AND LISTING.....	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	9
6. SETUP OF EQUIPMENT UNDER TEST	10
6.1 SETUP CONFIGURATION OF EUT.....	10
6.2 SUPPORT EQUIPMENT	10
7. FCC PART 15.247 REQUIREMENTS.....	11
7.1 6DB BANDWIDTH	11
7.2 PEAK POWER.....	12
7.3 BAND EDGES MEASUREMENT	20
7.4 PEAK POWER SPECTRAL DENSITY	30
7.5 RADIO FREQUENCY EXPOSURE	31
7.6 SPURIOUS EMISSIONS	32
7.7 POWERLINE CONDUCTED EMISSIONS.....	45
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	48



1. TEST RESULT CERTIFICATION

Applicant: Atheros Communications, Inc.
 5480 Great America Parkway
 Santa Clara, CA 95054, USA

Equipment Under Test: 802.11b/g PCI Express Minicard

Trade Name: Atheros

Model: AR5BXB63

Date of Test: September 12, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

S.C. Wang
 Executive Vice President
 Compliance Certification Services Inc.

Miller Lee
 Deputy Manager of Linkou Laboratory
 Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	802.11b/g PCI Express Minicard
Trade Name	Atheros
Model Number	AR5BXB63
Model Discrepancy	N/A
Power Supply	Powered from host device.
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b: 23.83 dBm IEEE 802.11g: 26.66 dBm
Modulation Technique	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps
Number of Channels	11 Channels
Antenna Specification	WNC / 81.EJL15.003, 81.EJL15.004; Gain: -1.49dBi Yageo / CAN4313782022501B; Gain: 0.64dBi

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **PPD-AR5BXB63-D** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. Class II permissive change laptops to be added:

Type	Trade Name	Model
Notebook PC	DELL	PP39S
Power Adapter	PI	AD6113LF
	Asian Power Devices	WA-30A19U
	FSP	FSP030-DQDAI



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

All testing were performed on the DELL (PP39S) laptop with the AR5BXB63 pre-approved module. The data presented in this report was collected for a Class II permissive change to add the laptop the AR5BXB63 (FCC ID: PPD- AR5BXB63-D) module application.

The new output power only for this laptop system, the detail please list as blow:

802.11b:

Original Output Power			New Output Power		
Channel	Frequency (MHz)	Peak Power (dBm)	Channel	Frequency (MHz)	Peak Power (dBm)
Low	2412	23.97	Low	2412	22.37
Mid	2437	23.77	Mid	2437	23.83
High	2462	23.92	High	2462	23.17

802.11g:

Original Output Power			New Output Power		
Channel	Frequency (MHz)	Peak Power (dBm)	Channel	Frequency (MHz)	Peak Power (dBm)
Low	2412	23.91	Low	2412	23.25
Mid	2437	26.99	Mid	2437	26.66
High	2462	23.96	High	2462	23.22

Software used to control the EUT for staying in continuous transmitting mode was programmed. After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

IEEE802.11b: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

After verification, power line conduction emission tests were carried out with the worst case test modes, which worst case was used FSP / FSP030-DQDA1 Power Adapter in all test mode only.



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang, Taoyuan Shien, (338) Taiwan, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.






Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200600-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (Registration no: 93105 and 90471).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, IEC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 ACCREDITED No. 0824-01
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-2541/2798/725/1868 C-402/747/912
Taiwan	TAF	EN 300 328-1, EN 300 328-2, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	 Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 2324C-3 IC 2324C-5

Note: No part of this report may be used to claim or imply product endorsement by A2LA, TAF or other government agency.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	LCD Monitor	DELL	2407WFPb	CN-0FC255-46633-675-2 5THS	FCC DoC	D-SUB Cable: Shielded, 1.8m, with two cores	Unshielded, 1.8m
2	USB Mouse	DELL	MO56UO	N/A	FCC DoC	Unshielded, 1.8m	N/A
3	Music DJ 512MB MP3 Player	DELL	HV04T	N/A	FCC DoC	Unshielded, 1.8m	N/A
4	Music DJ 512MB MP3 Player	DELL	HV04T	N/A	FCC DoC	Unshielded, 1.8m	N/A
5	Multimedia Headset	TOP-TINT	TP-950MV	N/A	FCC DoC	Unshielded, 1.8m	N/A
6	Notebook Computer (Remote)	HP	COMPAQ NC 4010	CNU441F8LV	FCC DoC	LAN Cable: Unshielded, 10m Line Cable: Unshielded, 1.0m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
7	AP (Remote)	D-Link	DI-784	TDEC84	KA2D1774VBE	N/A	Unshielded, 1.8m

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7. FCC PART 15.247 REQUIREMENTS

7.1 6db BANDWIDTH

LIMIT


According to §15.247(a)(2), for the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
N/A				

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 50MHz, Sweep = 12.5s.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

Not applicable



7.2 PEAK POWER

LIMIT

According to §15.247(b)(3) & (4), the maximum peak output power of the intentional radiator shall not exceed the following:


1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSP30	100112	10/14/2008

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak power detection.



TEST RESULTS

No non-compliance noted

TEST DATA

IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)		Output Power (W)		Limit (W)	Test Result
		Peak	AVG	Peak	AVG		
Low	2412	22.37	19.07	0.17258	0.08072	1	PASS
Mid	2437	23.83	20.53	0.24155	0.11298		PASS
High	2462	23.17	19.76	0.20749	0.09462		PASS

IEEE 802.11g


Channel	Frequency (MHz)	Output Power (dBm)		Output Power (W)		Limit (W)	Test Result
		Peak	AVG	Peak	AVG		
Low	2412	23.25	15.22	0.21135	0.03327	1	PASS
Mid	2437	26.66	18.82	0.46345	0.07621		PASS
High	2462	23.22	15.14	0.20989	0.03266		PASS




Test Plot

Peak power (IEEE 802.11b / CH Low)

Detector mode: Peak

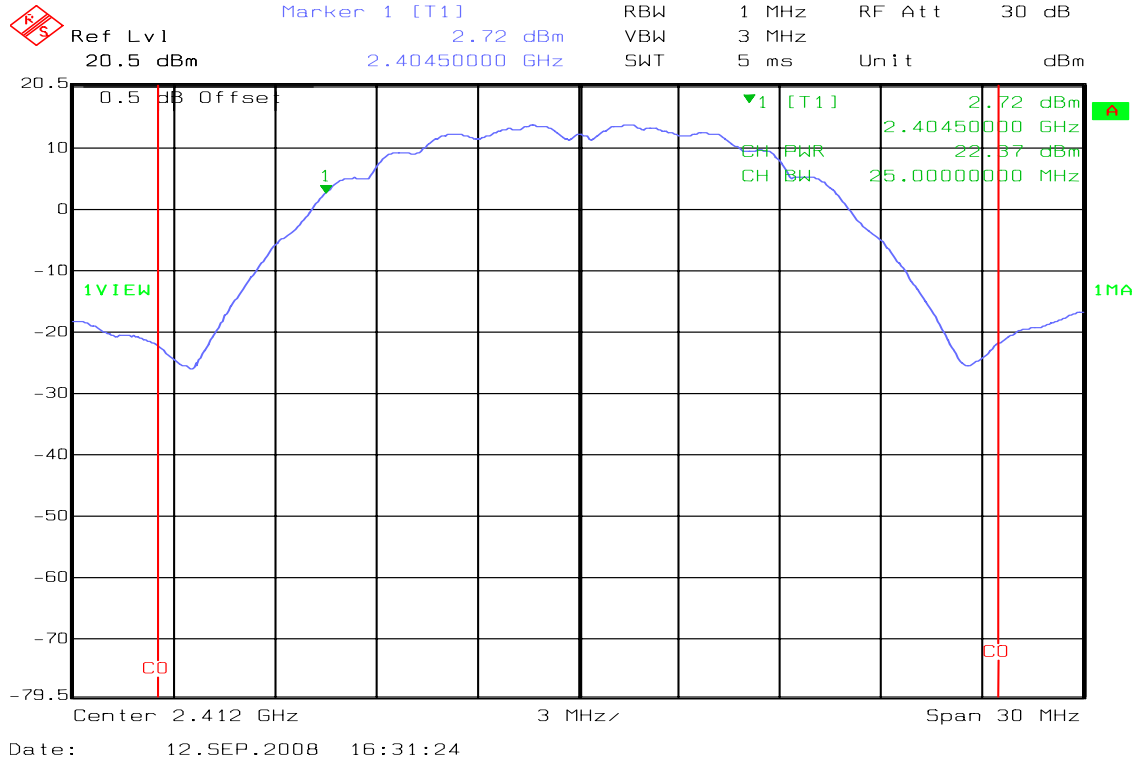


Detector mode: AVG

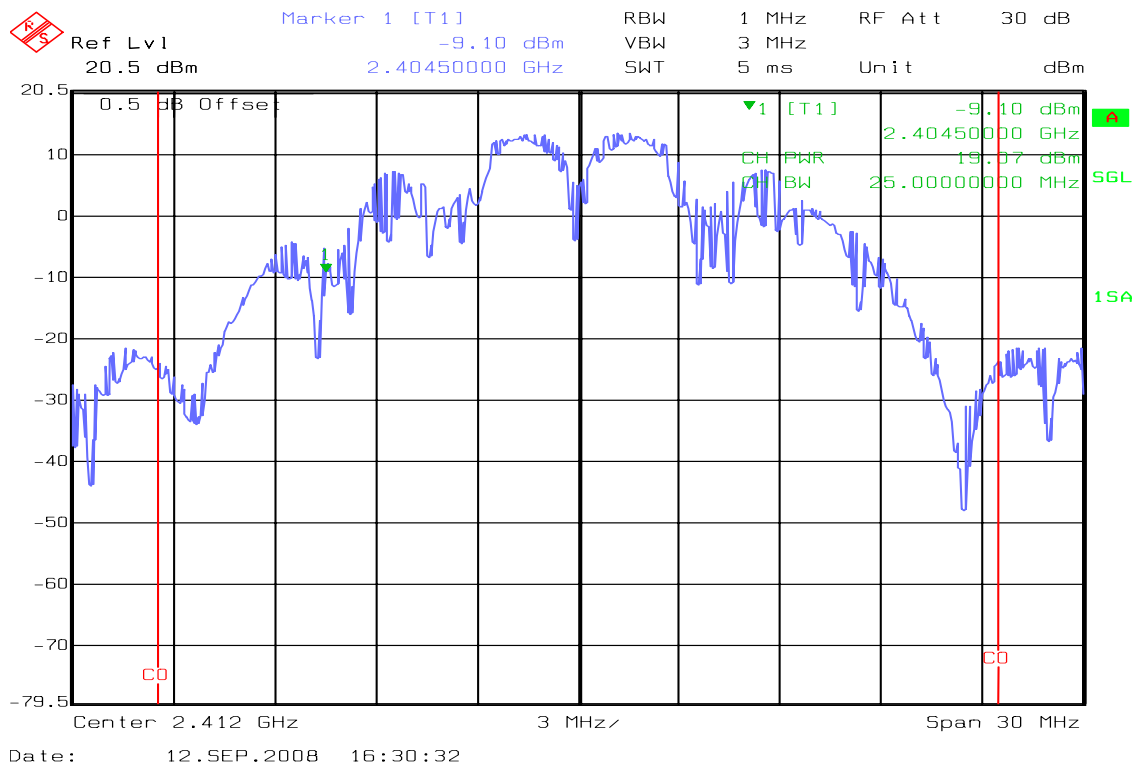




Peak power (IEEE 802.11b / CH Mid)

Detector mode: Peak

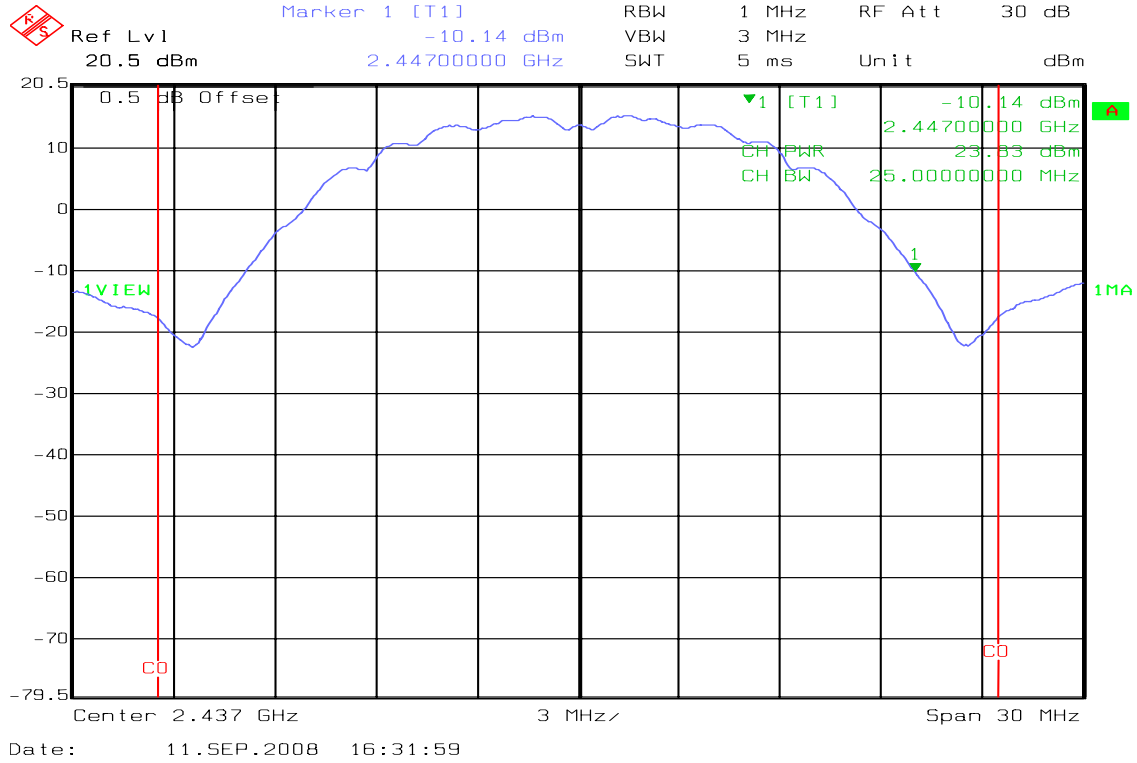


Detector mode: AVG

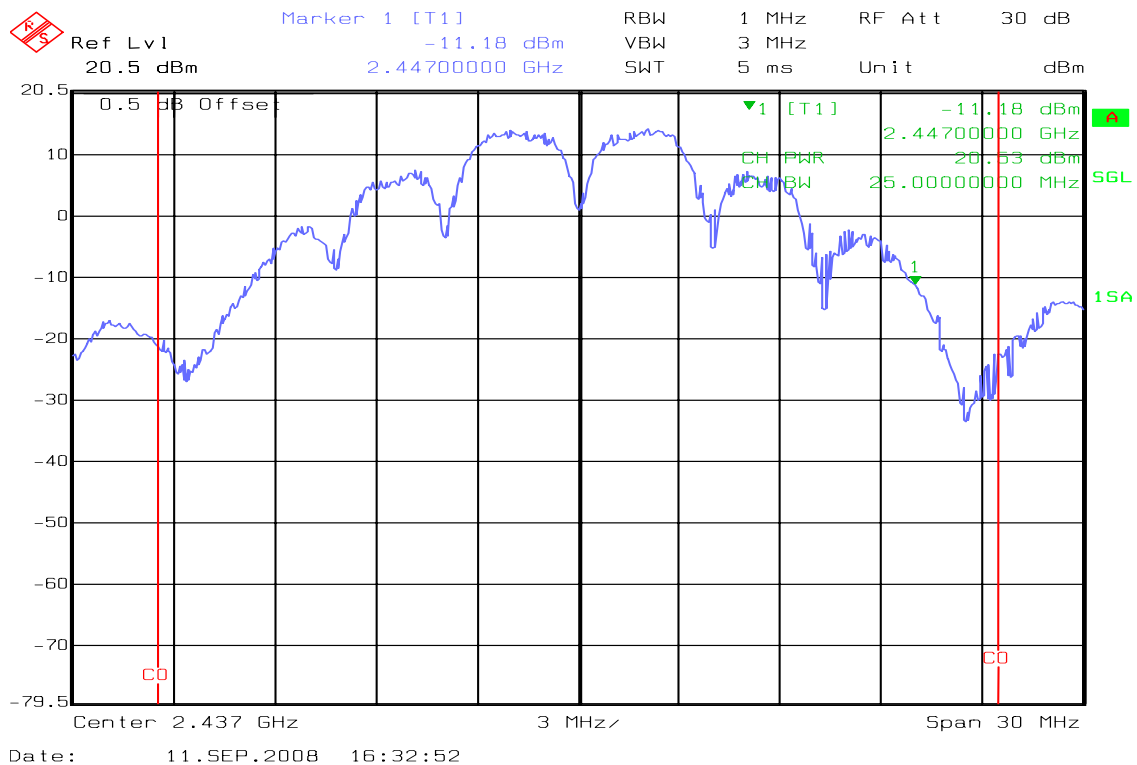




Peak power (IEEE 802.11b / CH High)

Detector mode: Peak

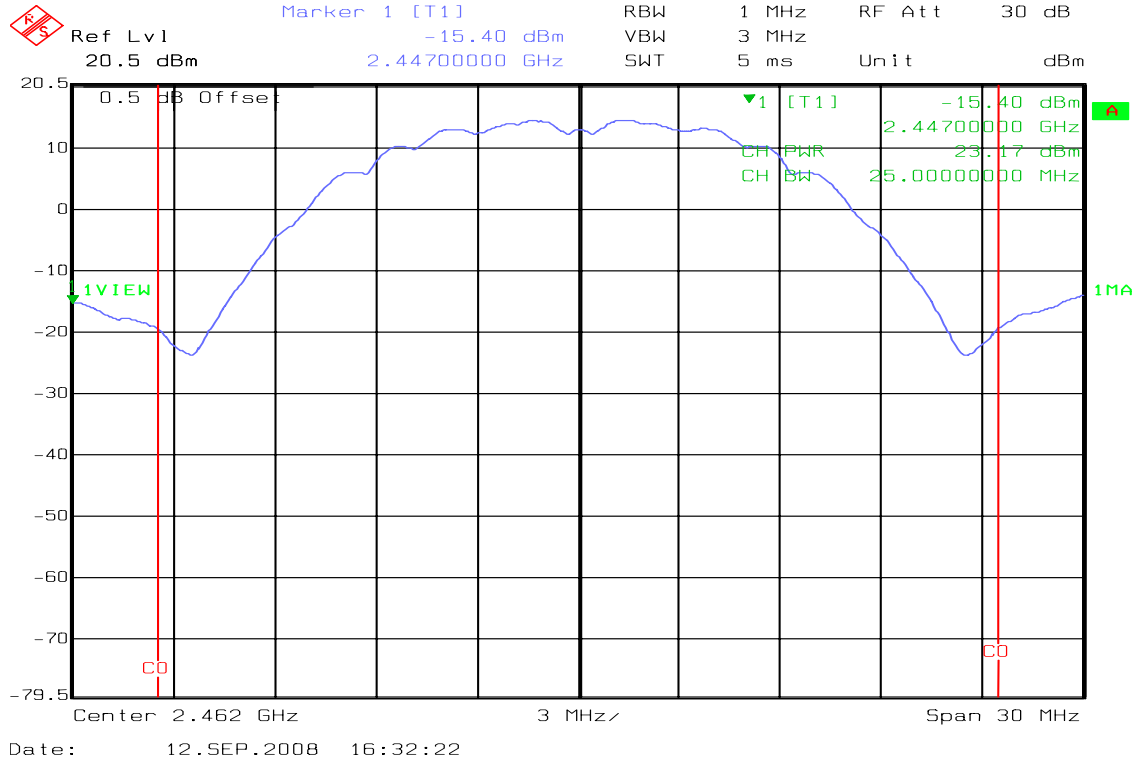


Detector mode: AVG

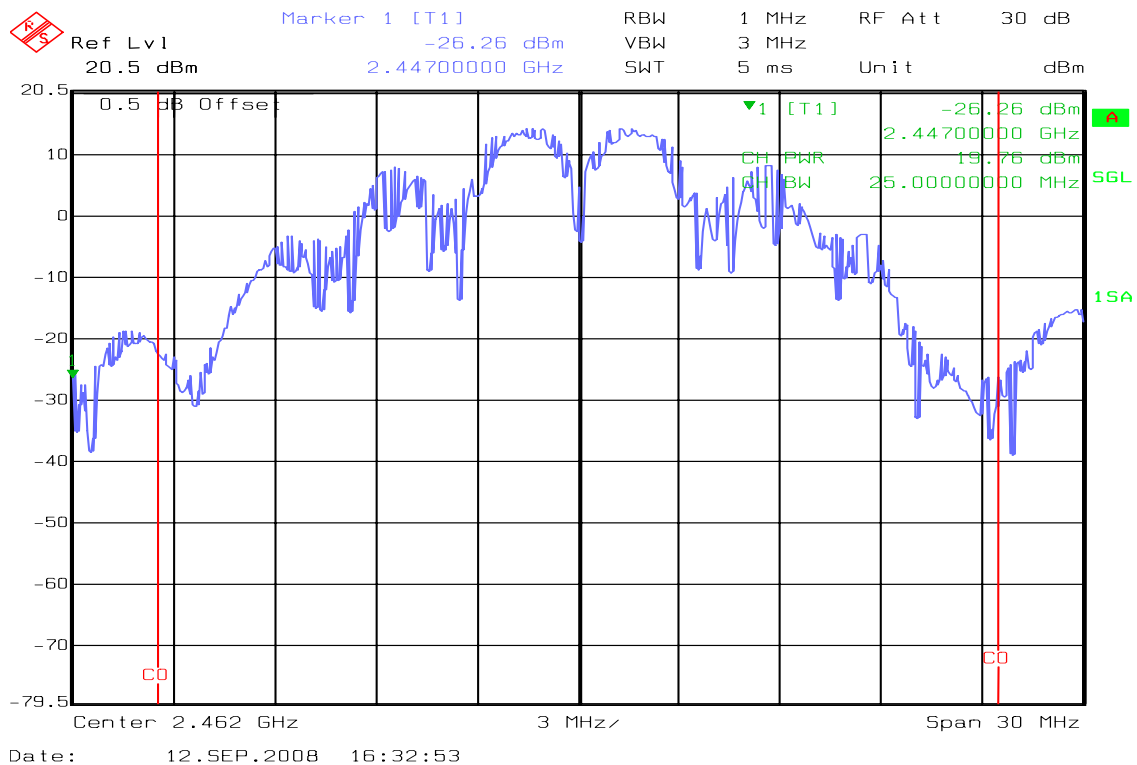




Peak power (IEEE 802.11g / CH Low)

Detector mode: Peak

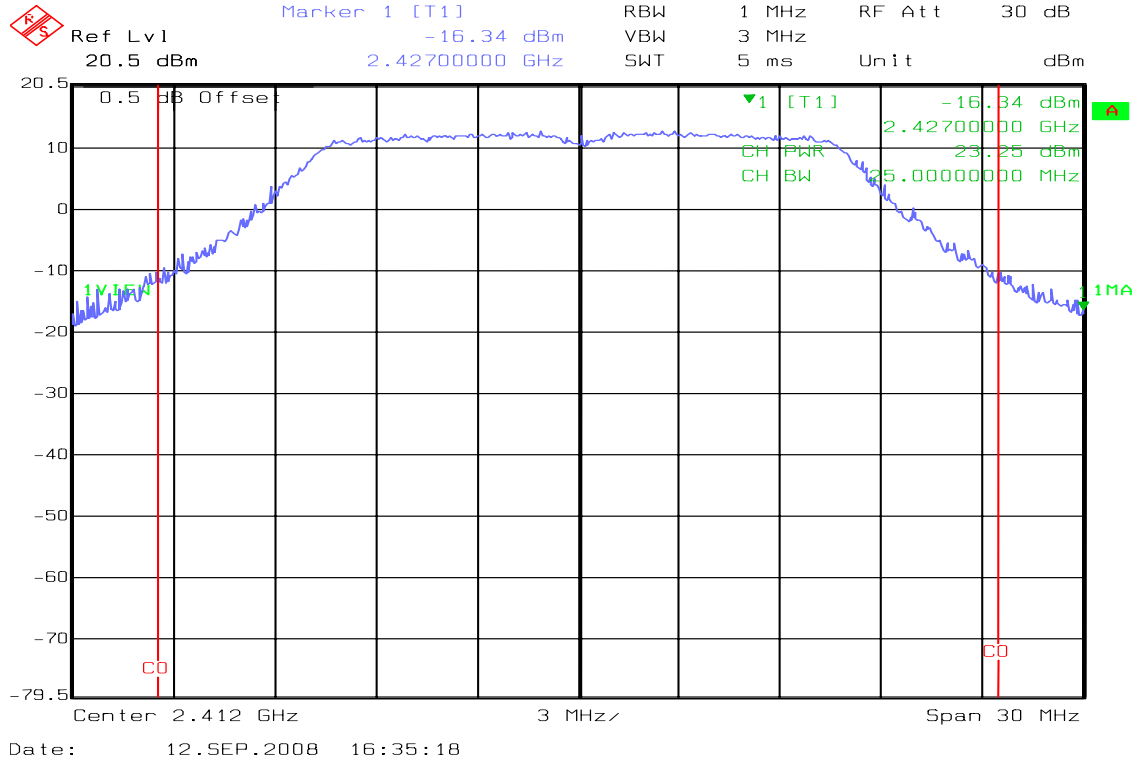


Detector mode: AVG

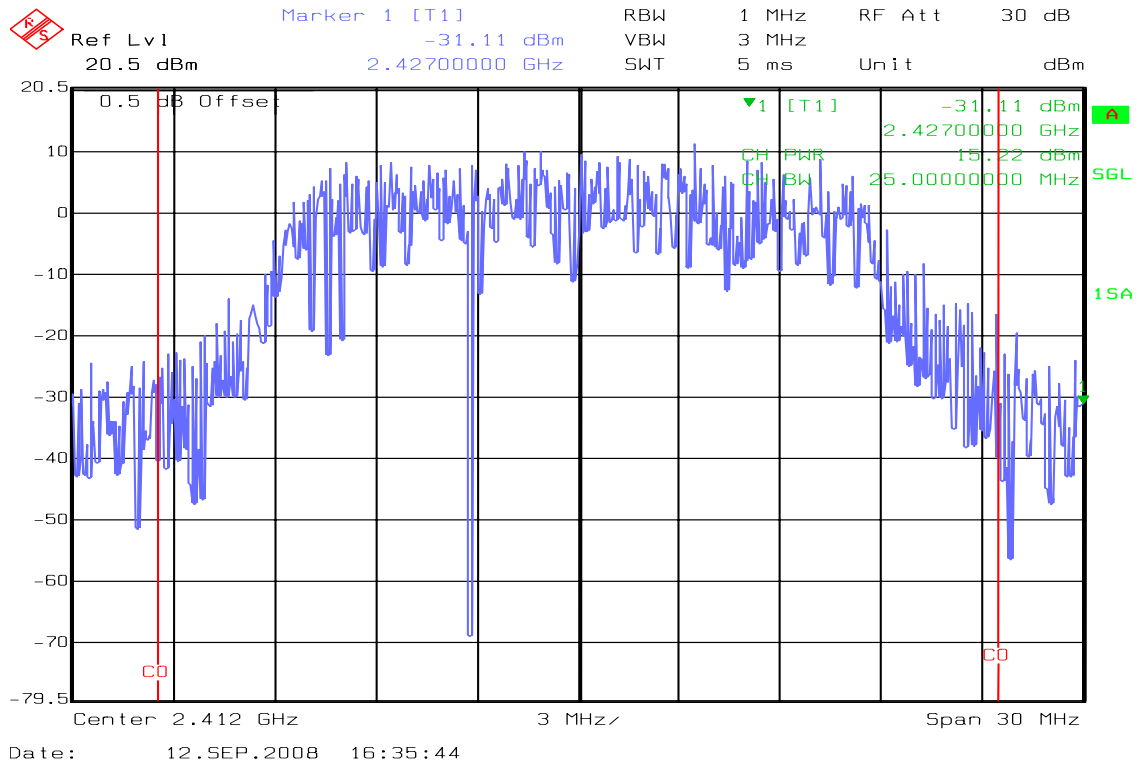




Peak power (IEEE 802.11g / CH Mid)

Detector mode: Peak

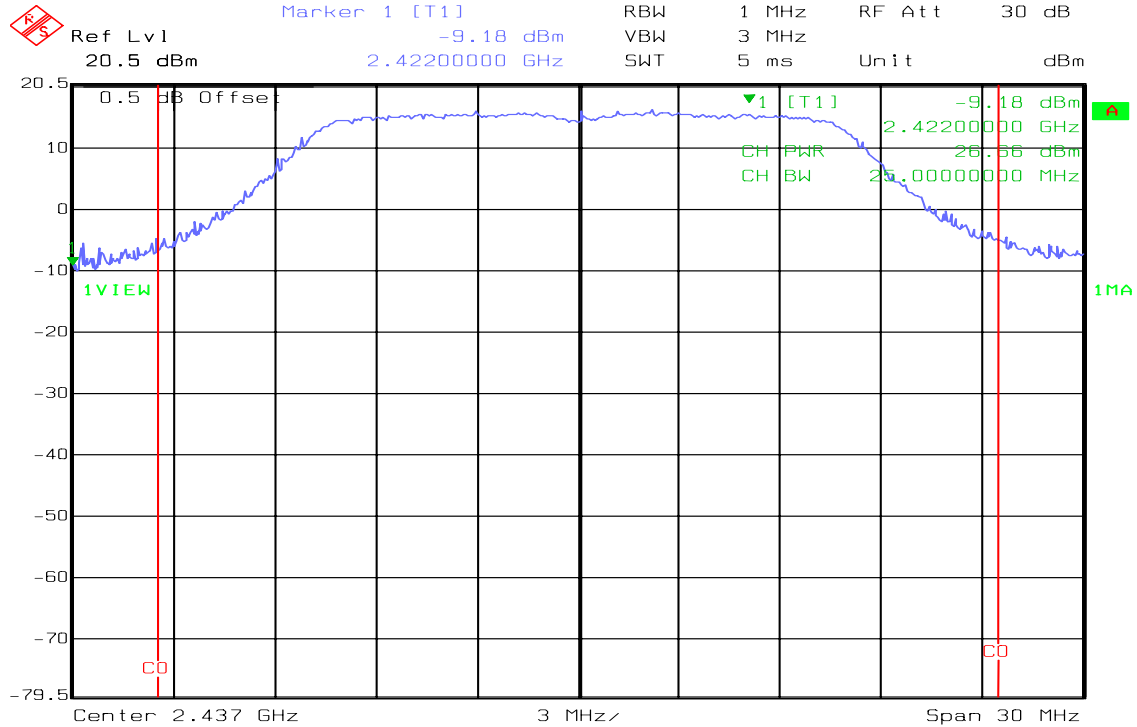

Date: 11.SEP.2008 16:18:42

Detector mode: AVG

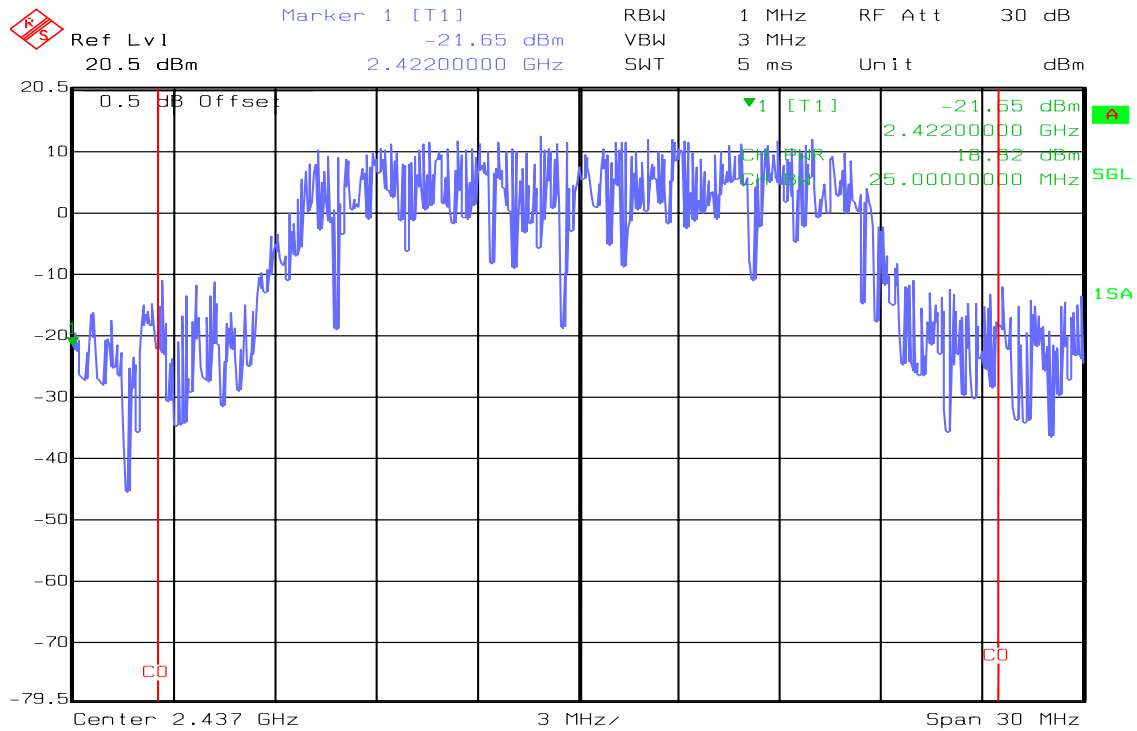


Date: 11.SEP.2008 16:19:24




Peak power (IEEE 802.11g / CH High)

Detector mode: Peak

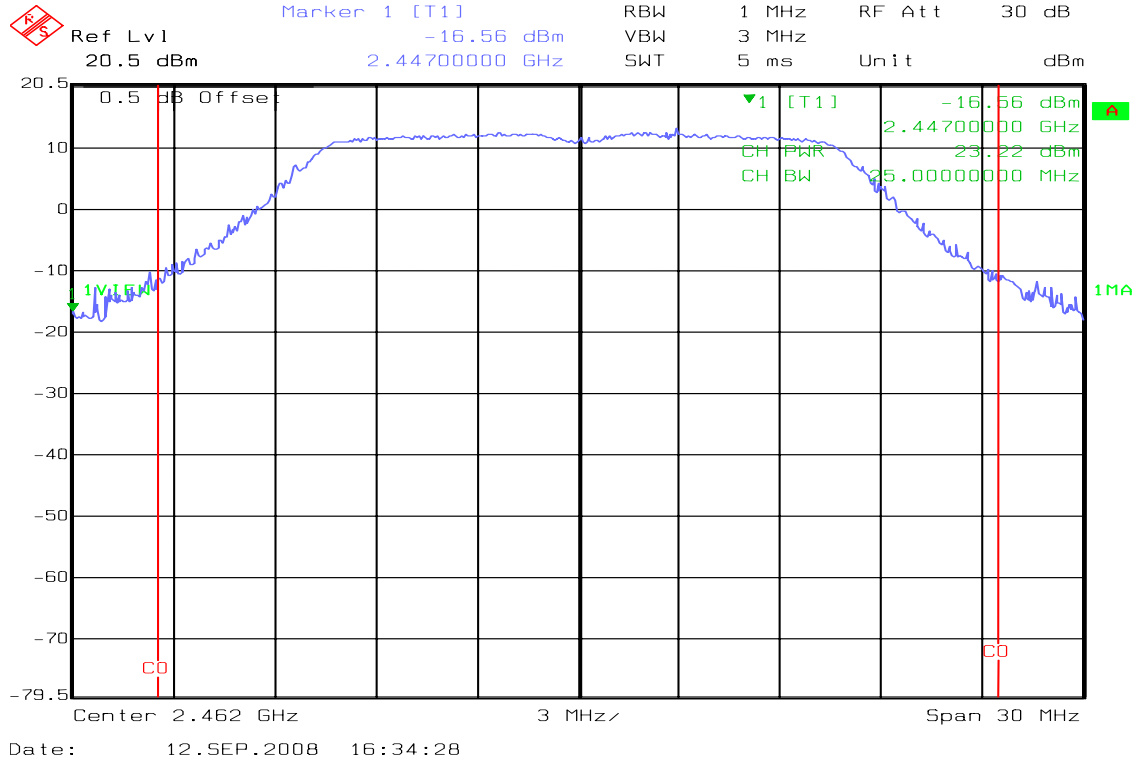

Detector mode: AVG

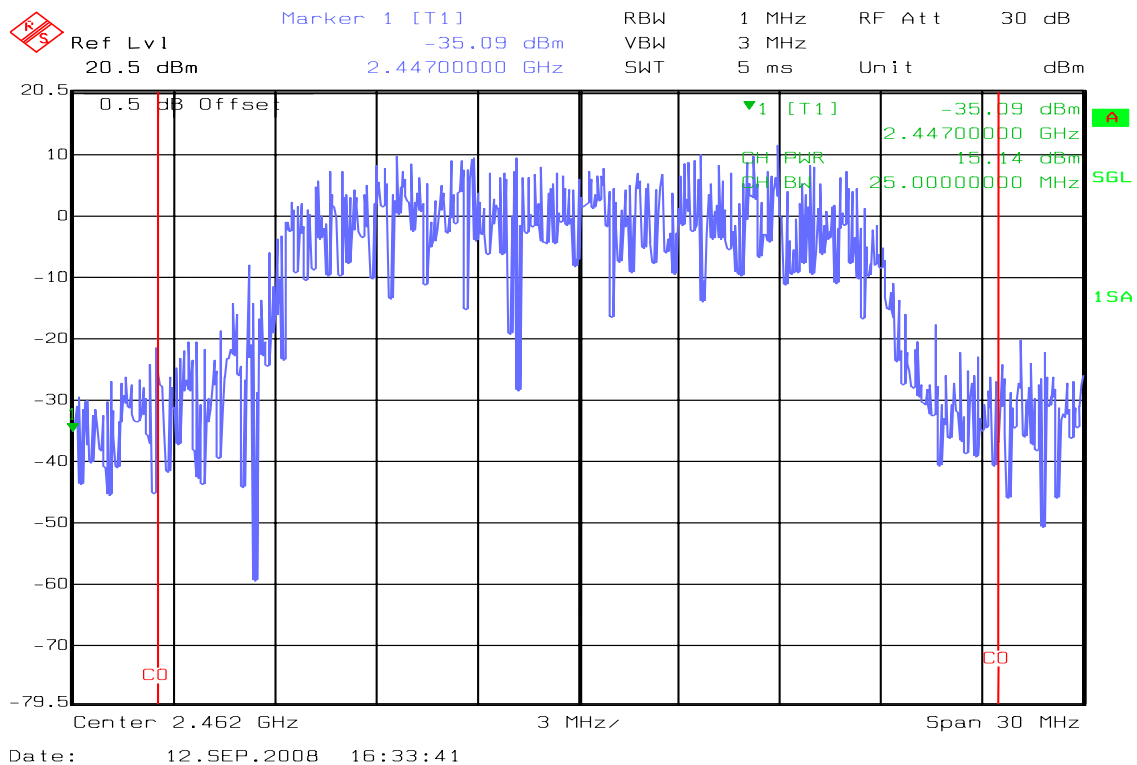

7.3 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSP30	100112	10/14/2008
Horn Antenna	EMCO	3115	00022250	05/08/2009
Turn Table	Chance Most	CM-T003-1	T807-6	N.C.R
Antenna Tower	Chance Most	CM-A003-1	A807-6	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

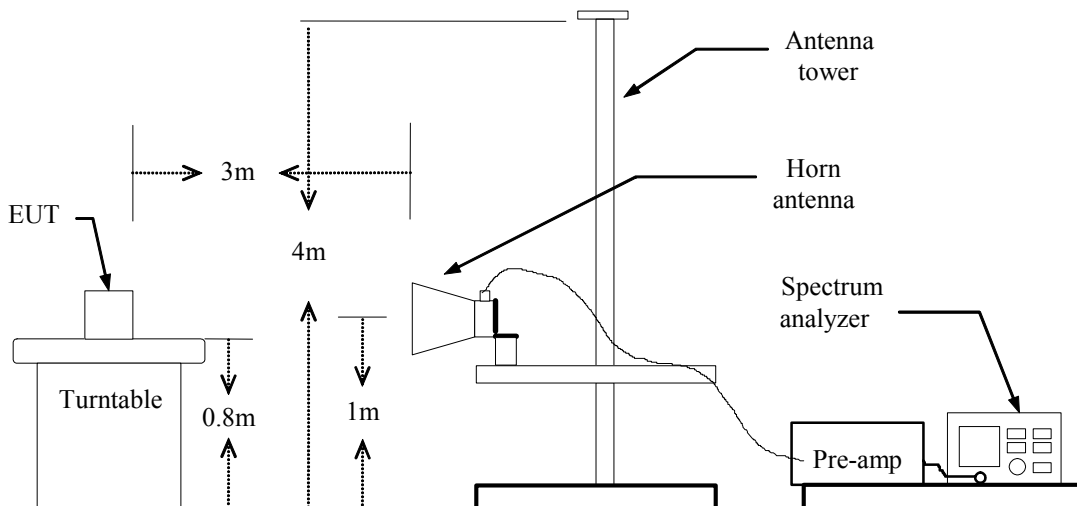



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

No non-compliance noted

TEST DATA

Refer to attach spectrum analyzer data chart.



Band Edges (IEEE 802.11b / CH Low)

Detector mode: Peak


Polarity: Vertical



SELECT TRACE
 1
 Ref 117 dBµV *Att 20 dB

*RBW 1 MHz Marker 1 [T1]
 *VBW 1 MHz 50.26 dBµV
 SWT 5 ms 2.390000000 GHz

1 PK
MAXH

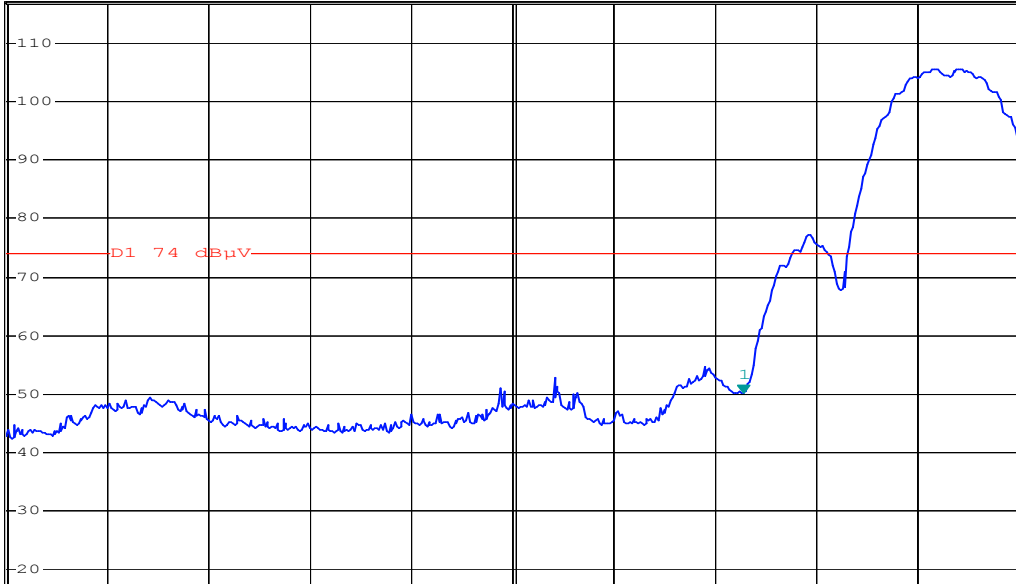

Start 2.31 GHz 11 MHz/ Stop 2.42 GHz

Date: 13.SEP.2008 13:19:02

Detector mode: Average


Polarity: Vertical



Ref 117 dBµV *Att 20 dB

*RBW 1 MHz Marker 1 [T1]
 *VBW 10 Hz 41.45 dBµV
 SWT 28 s 2.390000000 GHz

1 PK
MAXH

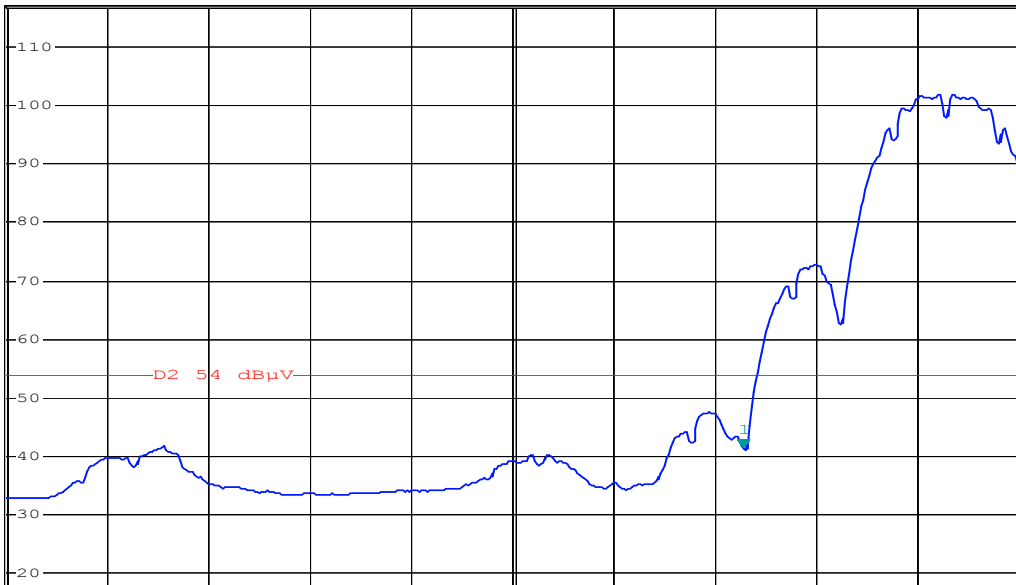

Start 2.31 GHz 11 MHz/ Stop 2.42 GHz

Date: 13.SEP.2008 13:20:24



Detector mode: Peak


Polarity: Horizontal



VIDEO BANDWIDTH
 1 MHz
 Ref 117 dBμV *Att 20 dB

*RBW 1 MHz Marker 1 [T1]
 *VBW 1 MHz 53.21 dBμV
 SWT 5 ms 2.390000000 GHz

1 PK
MAXH

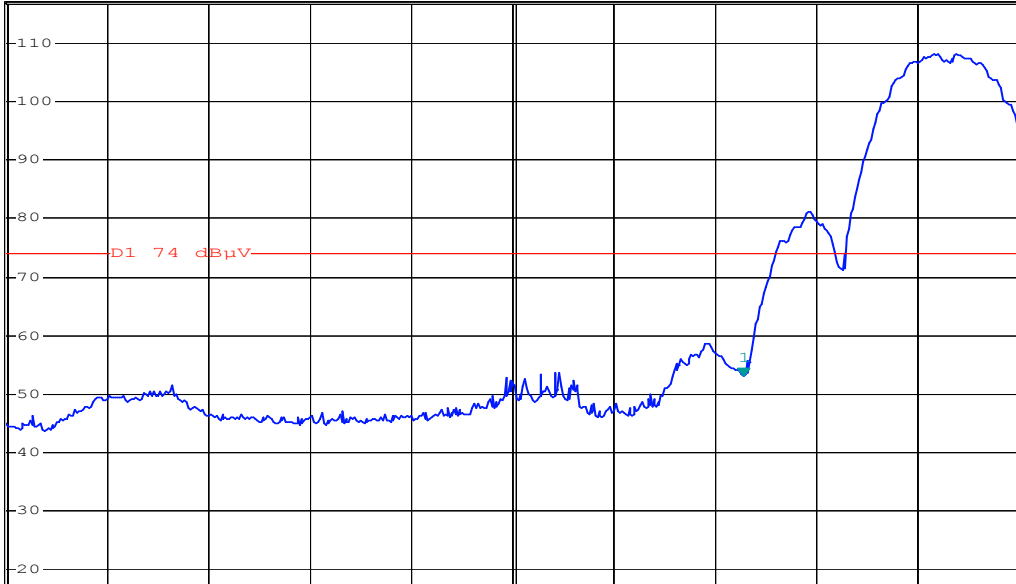

Start 2.31 GHz 11 MHz/ Stop 2.42 GHz

Date: 13.SEP.2008 13:16:31

Detector mode: Average


Polarity: Horizontal



VIDEO BANDWIDTH
 1 MHz
 Ref 117 dBμV *Att 20 dB

*RBW 1 MHz Marker 1 [T1]
 *VBW 10 Hz 44.48 dBμV
 SWT 28 s 2.390000000 GHz

1 PK
MAXH

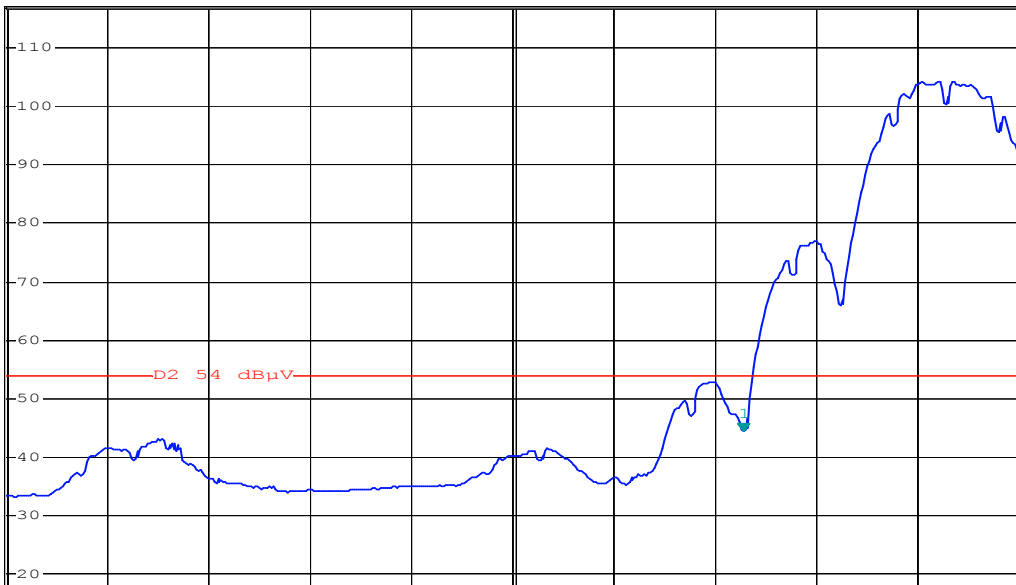

Start 2.31 GHz 11 MHz/ Stop 2.42 GHz

Date: 13.SEP.2008 13:15:54




Band Edges (IEEE 802.11b / CH High)

Detector mode: Peak

Polarity: Vertical



Ref 117 dB μ V *Att 20 dB *RBW 1 MHz Marker 1 [T1] 55.31 dB μ V
*VBW 1 MHz SWT 2.5 ms 2.483500000 GHz

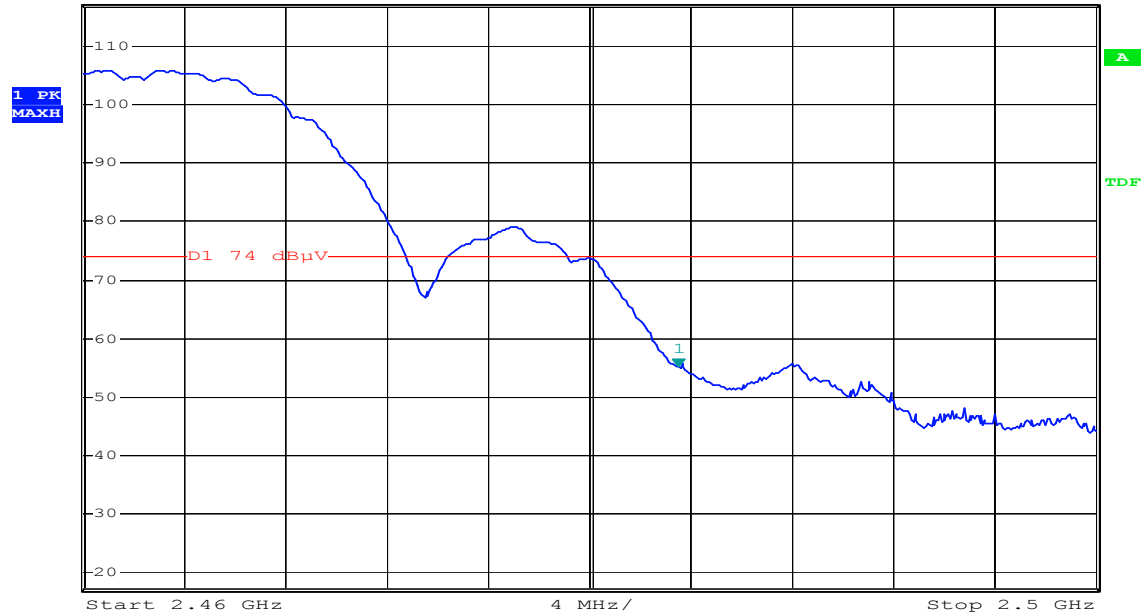


Date: 13.SEP.2008 13:31:09

Detector mode: Average

Polarity: Vertical



Ref 117 dB μ V *Att 20 dB *RBW 1 MHz Marker 1 [T1] 48.30 dB μ V
*VBW 10 Hz SWT 10 s 2.483500000 GHz

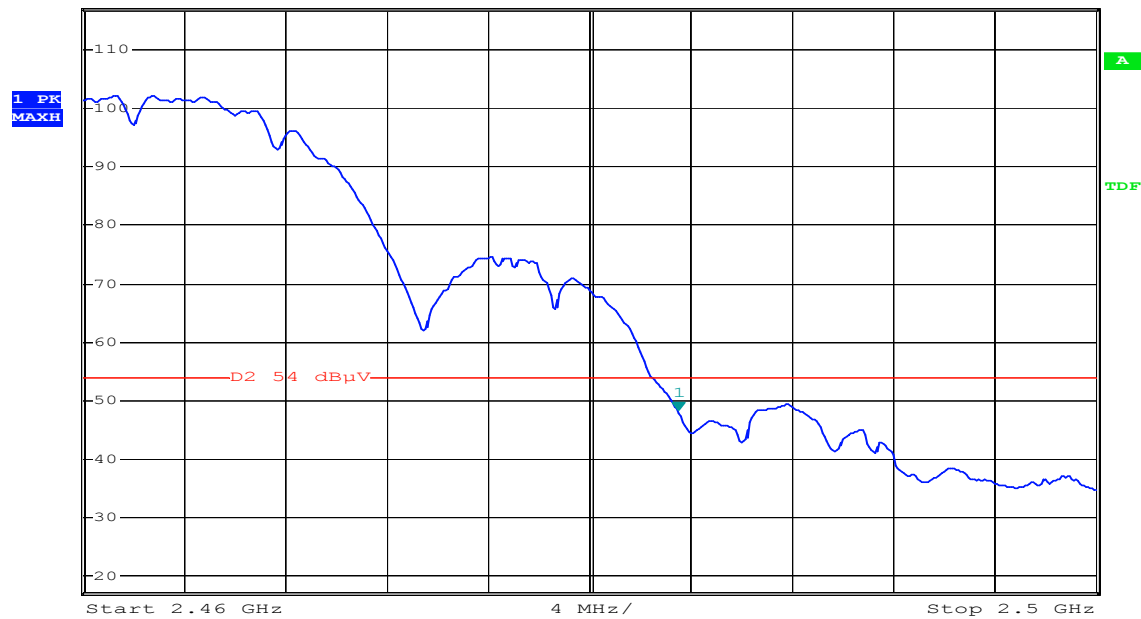


Date: 13.SEP.2008 13:31:41



Detector mode: Peak


Polarity: Horizontal

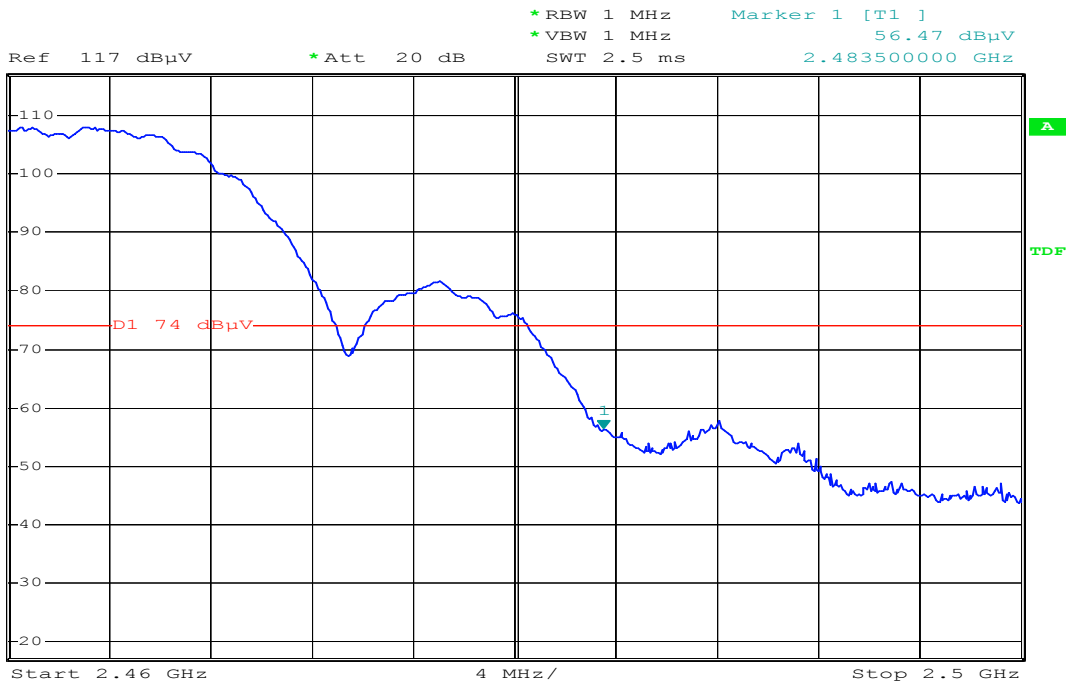

Date: 13.SEP.2008 13:29:23

Detector mode: Average

Polarity: Horizontal

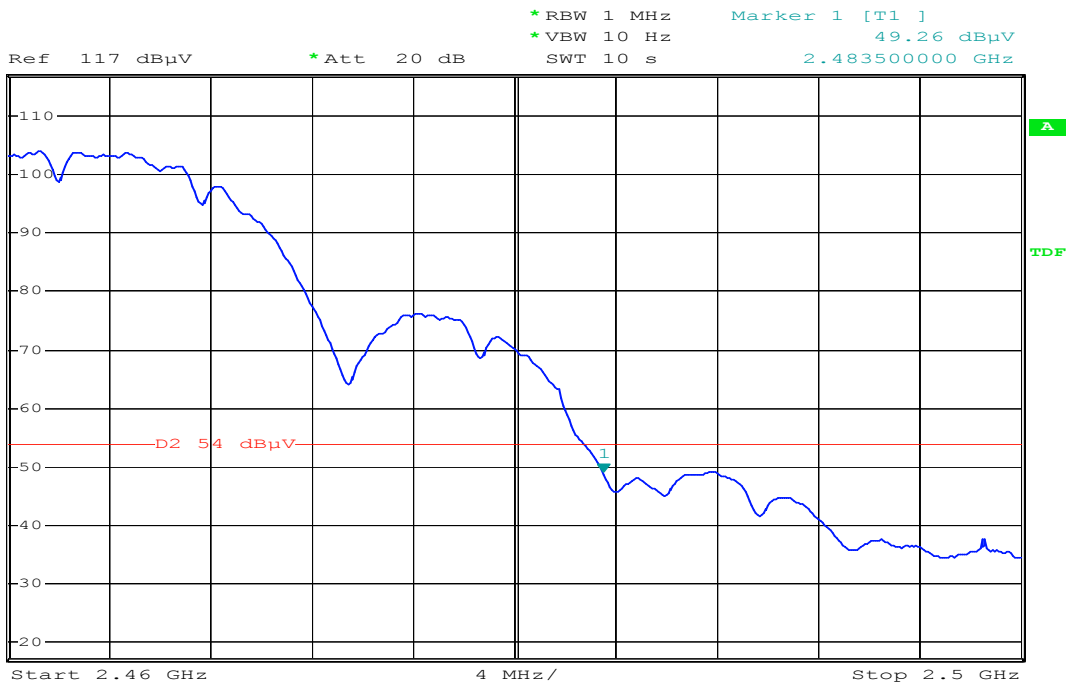

Date: 13.SEP.2008 13:29:04




Band Edges (IEEE 802.11g / CH Low)

Detector mode: Peak

Polarity: Vertical



*RBW 1 MHz Marker 1 [T1]
 *VBW 1 MHz 68.58 dBμV
 SWT 5 ms 2.390000000 GHz

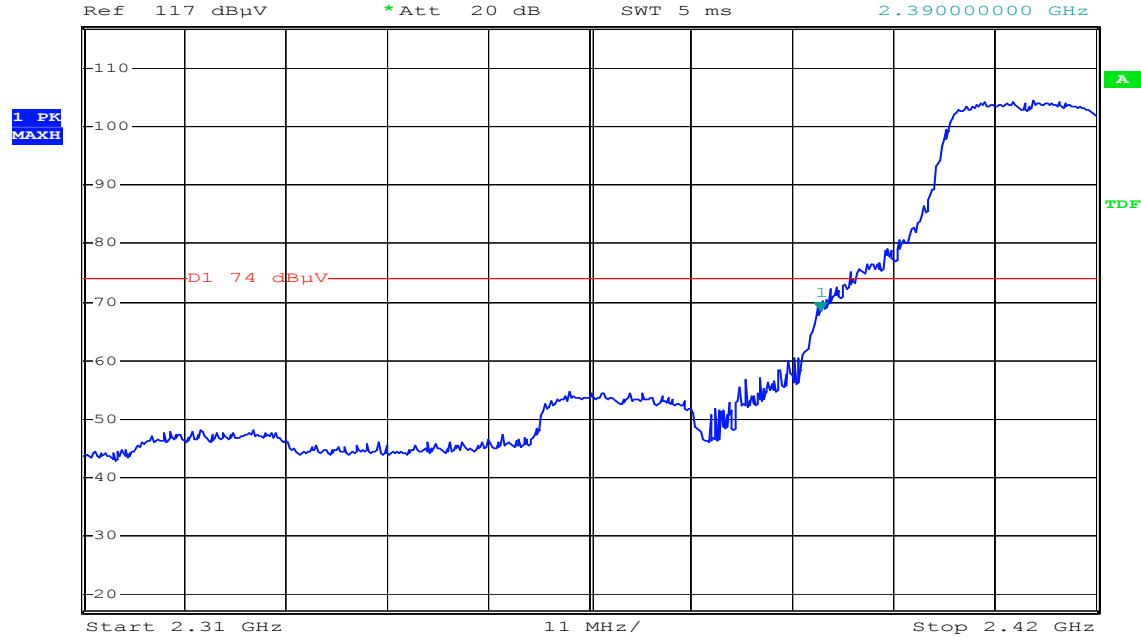


Date: 13.SEP.2008 13:23:12

Detector mode: Average

Polarity: Vertical



*RBW 1 MHz Marker 1 [T1]
 *VBW 10 Hz 47.05 dBμV
 SWT 28 s 2.390000000 GHz

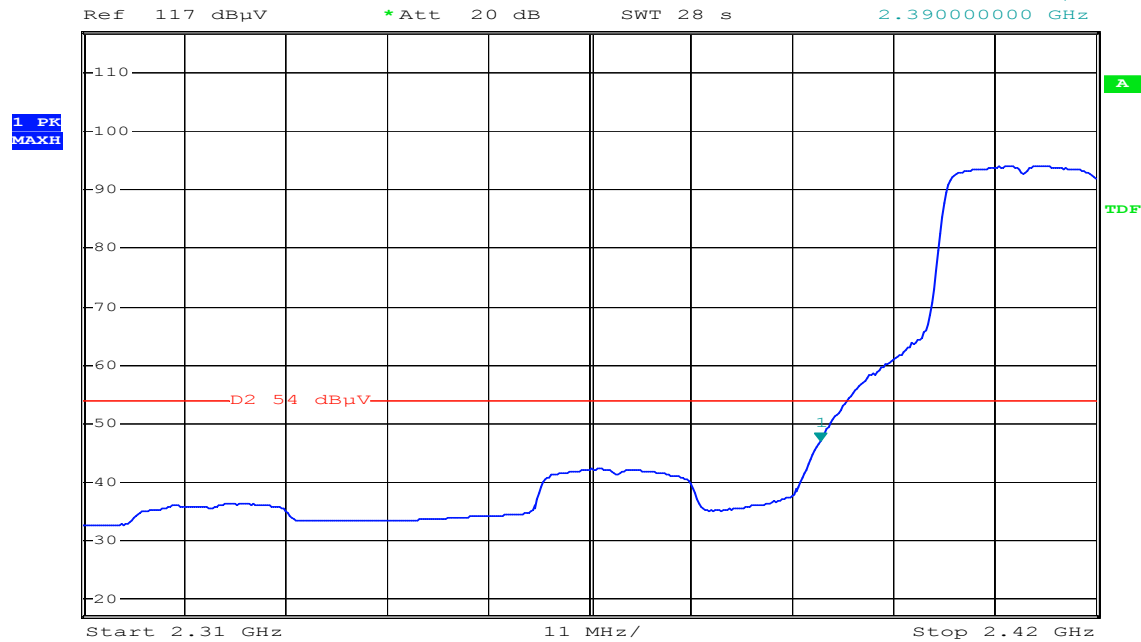


Date: 13.SEP.2008 13:22:30



Detector mode: Peak


Polarity: Horizontal

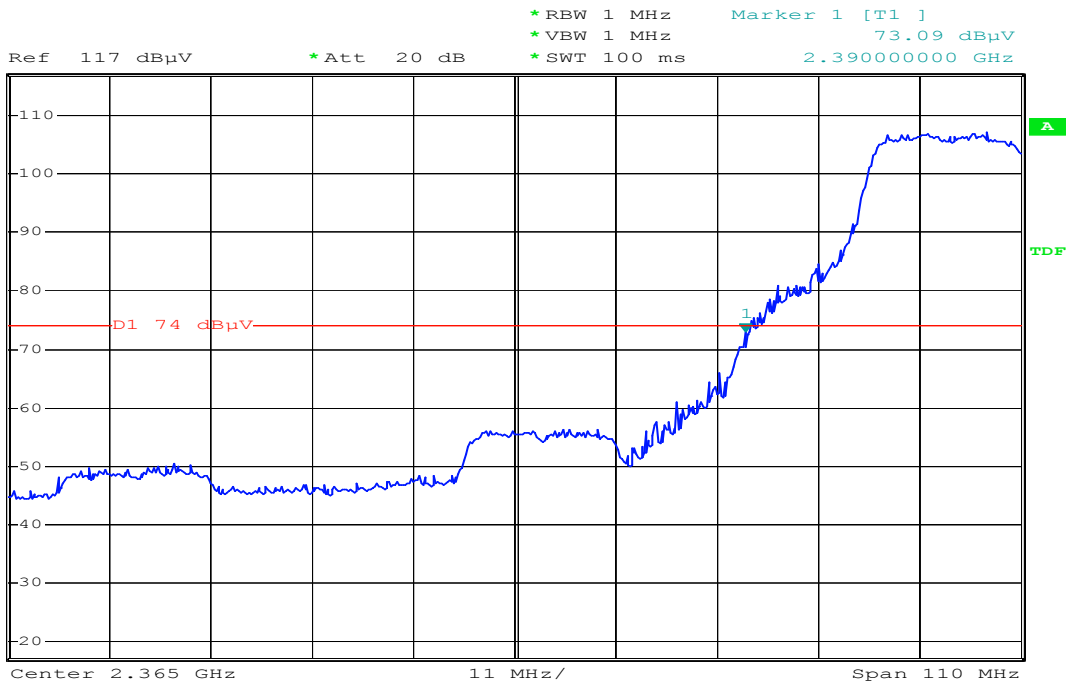

Date: 13.SEP.2008 13:08:29

Detector mode: Average

Polarity: Horizontal

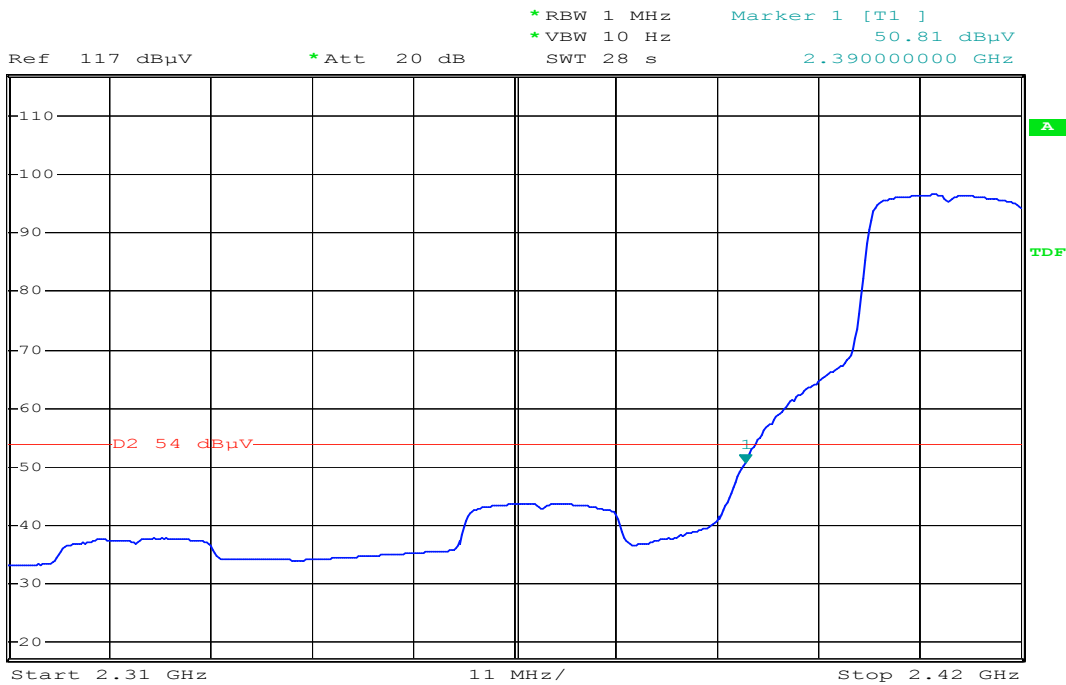

Date: 13.SEP.2008 13:10:58




Band Edges (IEEE 802.11g / CH High)

Detector mode: Peak

Polarity: Vertical



*RBW 1 MHz Marker 1 [T1]
 *VBW 1 MHz 70.98 dBμV
 SWT 2.5 ms 2.483500000 GHz

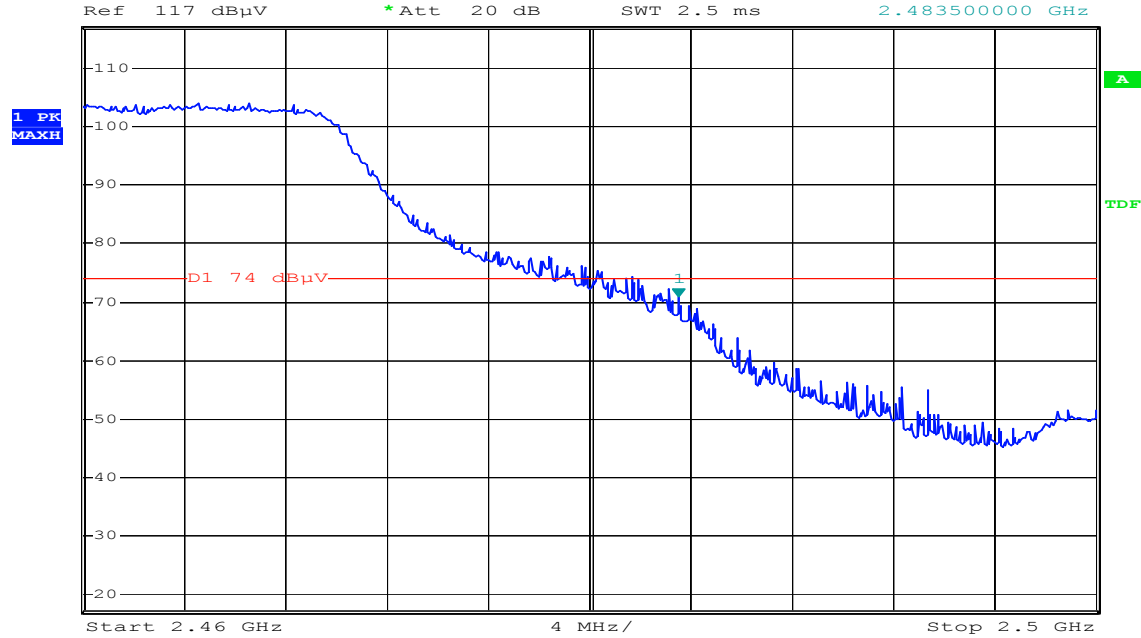


Date: 13.SEP.2008 13:33:09

Detector mode: Average

Polarity: Vertical



*RBW 1 MHz Marker 1 [T1]
 *VBW 10 Hz 48.54 dBμV
 SWT 10 s 2.483500000 GHz

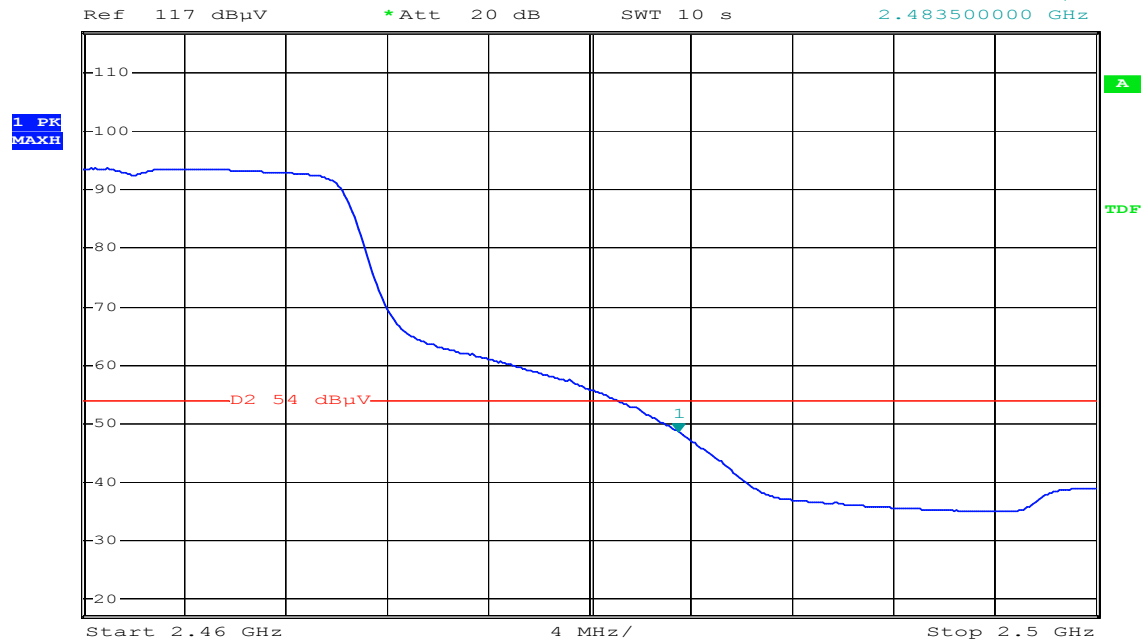


Date: 13.SEP.2008 13:32:43



Detector mode: Peak


Polarity: Horizontal

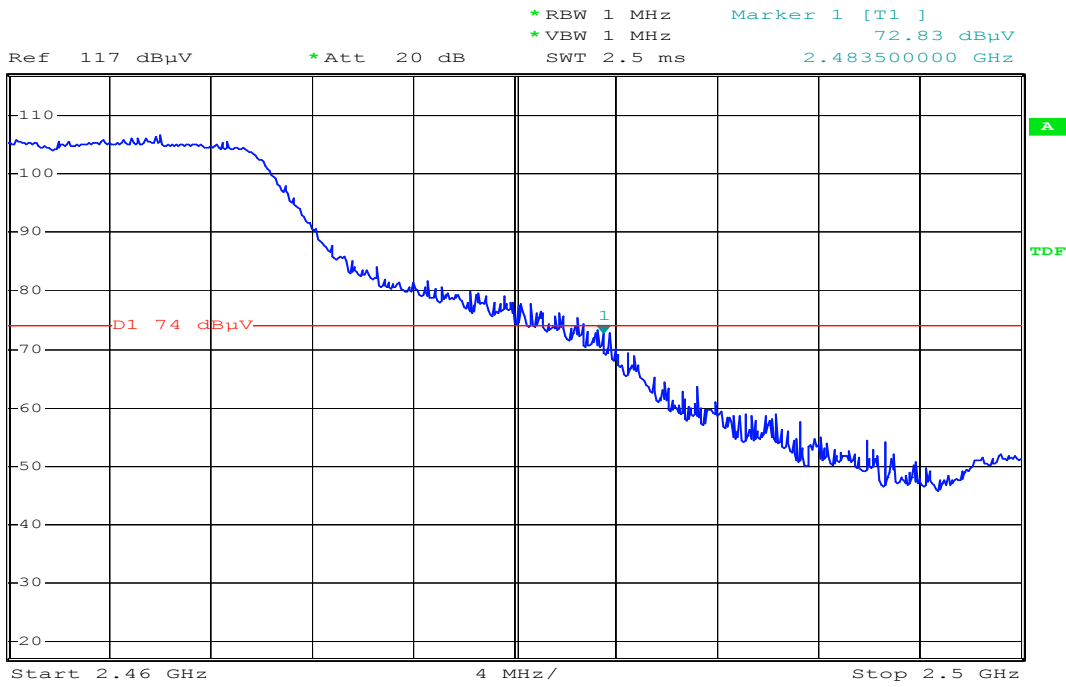

Date: 13.SEP.2008 13:27:10

Detector mode: Average

Polarity: Horizontal

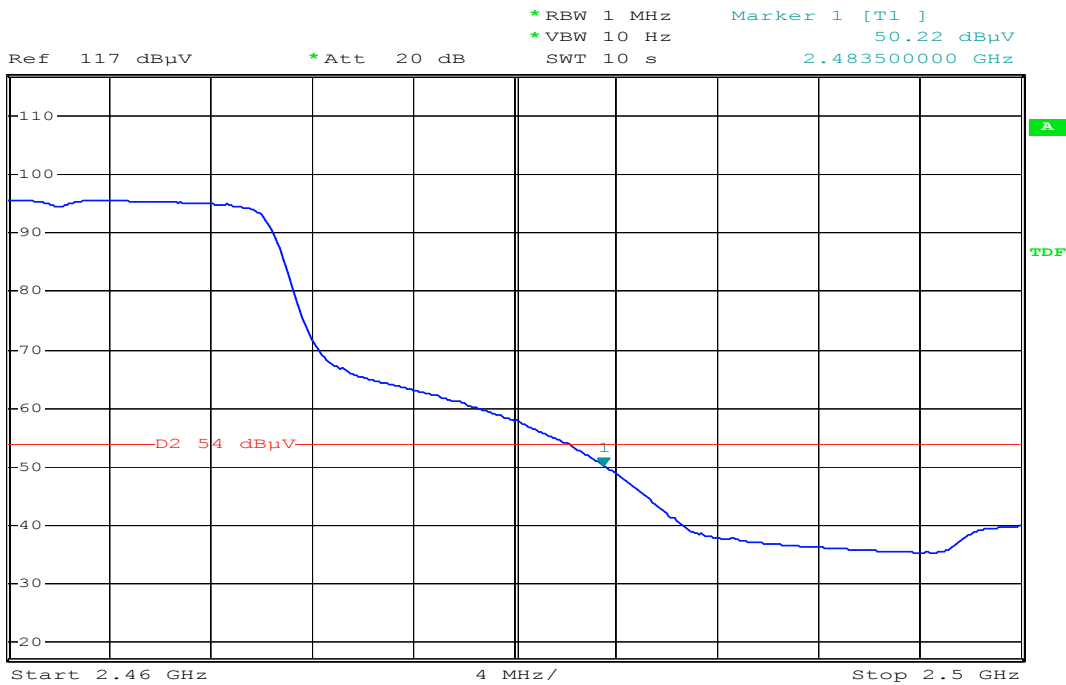

Date: 13.SEP.2008 13:27:50



7.4 PEAK POWER SPECTRAL DENSITY

LIMIT


1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
N/A				

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

Not applicable



7.5 RADIO FREQUENCY EXPOSURE

LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §15.247(i) and §1.1307(b)(1) of this chapter.

EUT Specification

EUT	Notebook PC
Frequency band (Operating)	<input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input type="checkbox"/> Others
Device category	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
Exposure classification	<input checked="" type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm2) <input type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm2)
Antenna diversity	<input type="checkbox"/> Single antenna <input checked="" type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input checked="" type="checkbox"/> Tx/Rx diversity
Max. output power	IEEE 802.11b: 23.83dBm (241.546mW) IEEE 802.11g: 26.66dBm (463.447mW)
Antenna gain (Max)	For WNC Antenna -1.14dBi (Numeric gain: 0.77) For Yageo Antenna 0.64dBi (Numeric gain: 1.159)
Evaluation applied	<input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A

Remark:

- The maximum output power is 26.66dBm (463.447mW) at 2437MHz (with 1.159 numeric antenna gain.)
- DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
- For mobile or fixed location transmitters, no SAR consideration applied. The minimum separation generally be used is at least 20 cm, even if the calculations indicate that the MPE distance would be lesser.

TEST RESULTS

No non-compliance noted.

Remark: Please refer to the separated SAR report.



7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
N/A				

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

Not applicable



7.6.2 RADIATED EMISSIONS

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**MEASUREMENT EQUIPMENT USED**


Open Area Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilnet	E4411B	MY41440314	N.C.R
Spectrum Analyzer	R&S	FSP30	100112	10/14/2008
EMI Test Receiver	R&S	ESVS30	828488/004	03/20/2009
Pre-Amplifier	Mini-Circuits	ZKL-2R5	83153007374	04/02/2009
Pre-Amplifier	Agilent	8449B	3008A01738	03/28/2009
Bilog Antenna	Sunol Sciences	JB1	A031605	04/03/2009
Horn Antenna	EMCO	3115	00022250	05/08/2009
Loop Antenna	EMCO	6502	2356	05/28/2010
Turn Table	Chance Most	CM-T003-1	T807-6	N.C.R
Antenna Tower	Chance Most	CM-A003-1	A807-6	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R
Site NSA	CCS	N/A	N/A	05/09/2009
Test S/W	LabVIEW 6.1 (CCS OATS EMI SW V2.6)			

Open Area Test Site # 5				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ADVANTEST	R3132	91700456	N.C.R
EMI Test Receiver	R&S	ESVS10	846285/016	06/06/2009
Bilog Antenna	TESEQ	CBL 6112D	23190	06/27/2009
Pre-Amplifier	WIRELESS	FPA-6592G	60010	08/26/2008
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	04	N.C.R
RF Switch	ANRITSU	MP59B	10877	N.C.R
Site NSA	CCS	N/A	N/A	11/23/2008
Test S/W	LabVIEW 6.1 (CCS OATS EMI SW V2.6)			


Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

Below 1 GHz

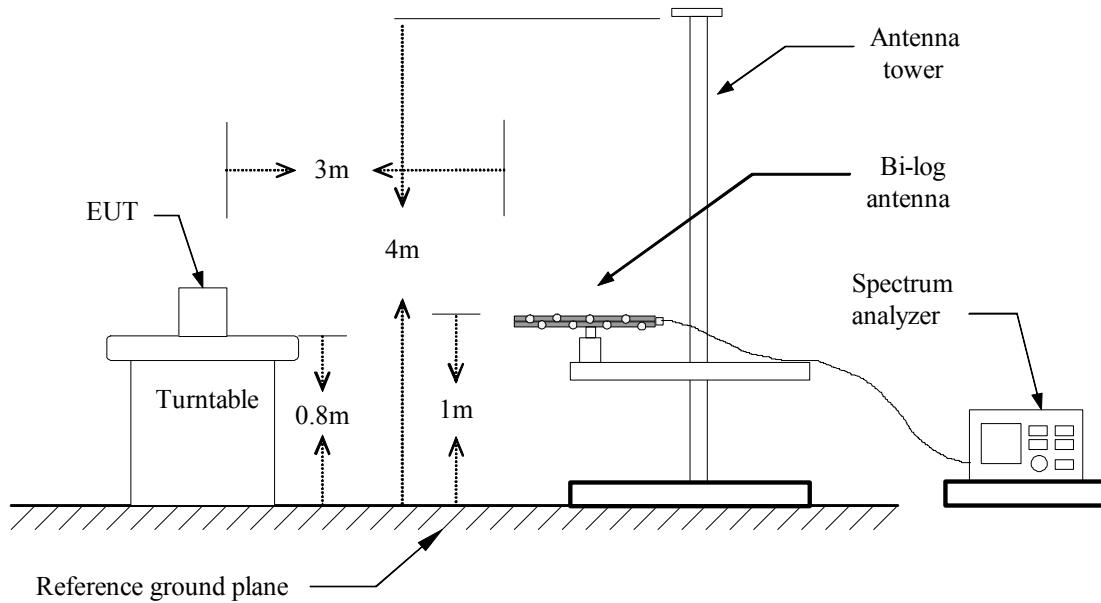

Above 1 GHz

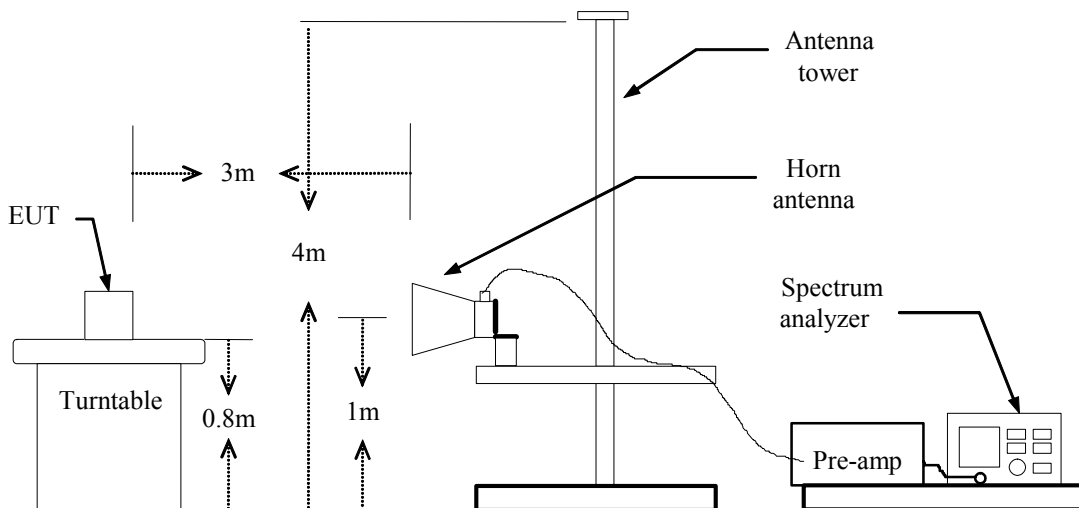



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS***No non-compliance noted***TEST DATA****Below 1 GHz****Operation Mode:** Normal Link**Test Date:** July 11, 2008**Temperature:** 36°C**Tested by:** Harry Wang**Humidity:** 64 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
38.00	V	QP	9.10	15.25	24.35	30.00	-5.65
85.10	V	QP	12.90	10.80	23.70	30.00	-6.30
125.33	V	QP	9.80	15.60	25.40	30.00	-4.60
140.42	V	QP	10.00	15.19	25.19	30.00	-4.81
166.00	V	QP	10.20	14.00	24.20	30.00	-5.80
216.00	V	QP	10.30	15.00	25.30	30.00	-4.70
303.50	V	QP	11.20	19.82	31.02	37.00	-5.98
480.00	V	QP	6.90	24.42	31.32	37.00	-5.68
500.00	V	QP	7.10	24.40	31.50	37.00	-5.50
624.22	V	QP	5.40	27.26	32.66	37.00	-4.34
998.35	V	QP	2.70	30.19	32.89	37.00	-4.11
47.01	H	QP	10.30	10.80	21.10	30.00	-8.90
84.00	H	QP	9.50	10.54	20.04	30.00	-9.96
112.32	H	QP	8.40	15.21	23.61	30.00	-6.39
150.00	H	QP	9.10	14.70	23.80	30.00	-6.20
166.20	H	QP	10.30	14.00	24.30	30.00	-5.70
180.00	H	QP	9.90	13.57	23.47	30.00	-6.53
220.36	H	QP	10.70	15.17	25.87	30.00	-4.13
250.00	H	QP	13.60	18.09	31.69	37.00	-5.31
362.20	H	QP	9.60	22.28	31.88	37.00	-5.12
465.00	H	QP	7.40	24.44	31.84	37.00	-5.16
998.12	H	QP	2.10	30.19	32.29	37.00	-4.71

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: Sep. 12, 2008

Temperature: 20°C

Tested by: Nan Tsai

Humidity: 57 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2152.00	V	49.87	---	-5.19	44.69	---	74.00	54.00	-9.31	Peak
2288.00	V	54.25	---	-4.88	49.37	---	74.00	54.00	-4.63	Peak
2504.00	V	53.98	---	-4.38	49.59	---	74.00	54.00	-4.41	Peak
3740.00	V	45.11	---	0.26	45.37	---	74.00	54.00	-8.63	Peak
4820.00	V	48.04	---	1.87	49.91	---	74.00	54.00	-4.09	Peak
N/A										
1592.00	H	49.74	---	-7.86	41.87	---	74.00	54.00	-12.13	Peak
2152.00	H	52.44	---	-5.19	47.26	---	74.00	54.00	-6.74	Peak
2288.00	H	55.06	---	-4.88	50.18	---	74.00	54.00	-3.82	Peak
4820.00	H	44.96	---	1.87	46.83	---	74.00	54.00	-7.17	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: Sep. 12, 2008

Temperature: 20°C

Tested by: Nan Tsai

Humidity: 57 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2152.00	V	54.53	---	-5.19	49.34	---	74.00	54.00	-4.66	Peak
2288.00	V	53.01	---	-4.88	48.14	---	74.00	54.00	-5.86	Peak
2356.00	V	53.64	---	-4.73	48.91	---	74.00	54.00	-5.09	Peak
3730.00	V	43.46	---	0.23	43.68	---	74.00	54.00	-10.32	Peak
4870.00	V	46.49	---	2.02	48.51	---	74.00	54.00	-5.49	Peak
9740.00	V	43.45	---	7.93	51.38	---	74.00	54.00	-2.62	Peak
2152.00	H	50.90	---	-5.19	45.71	---	74.00	54.00	-8.29	Peak
2288.00	H	53.98	---	-4.88	49.10	---	74.00	54.00	-4.90	Peak
2352.00	H	54.61	---	-4.73	49.87	---	74.00	54.00	-4.13	Peak
3880.00	H	43.32	---	0.78	44.11	---	74.00	54.00	-9.89	Peak
4870.00	H	48.22	---	2.02	50.24	---	74.00	54.00	-3.76	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** Sep. 12, 2008**Temperature:** 20°C**Tested by:** Nan Tsai**Humidity:** 57 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1796.00	V	50.06	---	-6.70	43.36	---	74.00	54.00	-10.64	Peak
2156.00	V	49.99	---	-5.18	44.81	---	74.00	54.00	-9.19	Peak
2288.00	V	53.70	---	-4.88	48.82	---	74.00	54.00	-5.18	Peak
2376.00	V	52.37	---	-4.68	47.69	---	74.00	54.00	-6.31	Peak
4920.00	V	44.94	---	2.16	47.10	---	74.00	54.00	-6.90	Peak
4990.00	V	44.35	---	2.37	46.72	---	74.00	54.00	-7.28	Peak
2152.00	H	51.72	---	-5.19	46.53	---	74.00	54.00	-7.47	Peak
2288.00	H	52.73	---	-4.88	47.85	---	74.00	54.00	-6.15	Peak
2376.00	H	52.18	---	-4.68	47.50	---	74.00	54.00	-6.50	Peak
4920.00	H	45.30	---	2.16	47.46	---	74.00	54.00	-6.54	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: Sep. 12, 2008

Temperature: 20°C

Tested by: Nan Tsai

Humidity: 57 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1128.00	V	52.41	---	-10.11	42.30	---	74.00	54.00	-11.70	Peak
1596.00	V	48.97	---	-7.84	41.13	---	74.00	54.00	-12.87	Peak
2152.00	V	50.18	---	-5.19	44.99	---	74.00	54.00	-9.01	Peak
2288.00	V	54.35	---	-4.88	49.47	---	74.00	54.00	-4.53	Peak
4990.00	V	44.43	---	2.37	46.80	---	74.00	54.00	-7.20	Peak
N/A										
1528.00	H	50.22	---	-8.23	41.99	---	74.00	54.00	-12.01	Peak
1752.00	H	48.47	---	-6.95	41.52	---	74.00	54.00	-12.48	Peak
2152.00	H	49.79	---	-5.19	44.61	---	74.00	54.00	-9.39	Peak
2288.00	H	56.38	---	-4.88	51.50	---	74.00	54.00	-2.50	Peak
5360.00	H	41.93	---	3.10	45.03	---	74.00	54.00	-8.97	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: Sep. 12, 2008

Temperature: 20°C

Tested by: Nan Tsai

Humidity: 57 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1132.00	V	52.05	---	-10.09	41.96	---	74.00	54.00	-12.04	Peak
2156.00	V	52.11	---	-5.18	46.94	---	74.00	54.00	-7.06	Peak
2288.00	V	56.14	---	-4.88	51.26	---	74.00	54.00	-2.74	Peak
2644.00	V	49.28	---	-3.74	45.54	---	74.00	54.00	-8.46	Peak
4880.00	V	42.74	---	2.05	44.79	---	74.00	54.00	-9.21	Peak
4990.00	V	44.23	---	2.37	46.60	---	74.00	54.00	-7.40	Peak
9740.00	V	42.96	---	7.93	50.89	---	74.00	54.00	-3.11	Peak
2152.00	H	49.54	---	-5.19	44.35	---	74.00	54.00	-9.65	Peak
2288.00	H	57.51	---	-4.88	52.63	---	74.00	54.00	-1.37	Peak
2644.00	H	49.79	---	-3.74	46.05	---	74.00	54.00	-7.95	Peak
3250.00	H	46.13	---	-1.37	44.77	---	74.00	54.00	-9.23	Peak
4870.00	H	42.58	---	2.02	44.59	---	74.00	54.00	-9.41	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: Sep. 12, 2008

Temperature: 20°C

Tested by: Nan Tsai

Humidity: 57 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2152.00	V	49.47	---	-5.19	44.29	---	74.00	54.00	-9.71	Peak
2288.00	V	53.28	---	-4.88	48.40	---	74.00	54.00	-5.60	Peak
4980.00	V	43.60	---	2.34	45.94	---	74.00	54.00	-8.06	Peak
N/A										
1752.00	H	50.50	---	-6.95	43.56	---	74.00	54.00	-10.44	Peak
2152.00	H	49.51	---	-5.19	44.33	---	74.00	54.00	-9.67	Peak
2288.00	H	54.90	---	-4.88	50.02	---	74.00	54.00	-3.98	Peak
4980.00	H	42.04	---	2.34	44.39	---	74.00	54.00	-9.61	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto

**Operation Mode:** RX / IEEE 802.11g / CH Mid**Test Date:** Sep. 12, 2008**Temperature:** 20°C**Tested by:** Nan Tsai**Humidity:** 57 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1124.00	V	46.71	---	-10.13	36.58	---	74.00	54.00	-17.42	Peak
1740.00	V	48.88	---	-7.02	41.86	---	74.00	54.00	-12.14	Peak
1940.00	V	46.52	---	-5.87	40.64	---	74.00	54.00	-13.36	Peak
2156.00	V	50.55	---	-5.18	45.37	---	74.00	54.00	-8.63	Peak
2504.00	V	51.00	---	-4.38	46.62	---	74.00	54.00	-7.38	Peak
4980.00	V	44.53	---	2.34	46.87	---	74.00	54.00	-7.13	Peak
5390.00	V	42.84	---	3.16	46.00	---	74.00	54.00	-8.00	Peak
1012.00	H	50.21	---	-10.64	39.56	---	74.00	54.00	-14.44	Peak
1128.00	H	48.04	---	-10.11	37.93	---	74.00	54.00	-16.07	Peak
1496.00	H	45.25	---	-8.41	36.84	---	74.00	54.00	-17.16	Peak
1732.00	H	45.49	---	-7.06	38.43	---	74.00	54.00	-15.57	Peak
2152.00	H	50.29	---	-5.19	45.11	---	74.00	54.00	-8.89	Peak
2492.00	H	47.02	---	-4.42	42.60	---	74.00	54.00	-11.40	Peak
4120.00	H	42.41	---	1.16	43.57	---	74.00	54.00	-10.43	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	100782	06/01/2009
LISN	R&S	ENV216	100066	05/11/2009
LISN	R&S	ENV 4200	830326/016	04/10/2009
Test S/W	LabVIEW 6.1 (CCS Conduction Test SW Version_01)			

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

TEST DATA

Operation Mode: Normal Link **Test Date:** July 11, 2008
Temperature: 20°C **Tested by:** Carl Chang
Humidity: 58% RH

Freq. (MHz)	QP Reading	AV Reading	Corr. factor	QP Result	AV Result	QP Limit	AV Limit	QP Margin	AV Margin	Note
0.4719	30.48	17.91	9.54	40.02	27.45	56.48	46.48	-16.46	-19.03	L1
0.6109	30.51	16.11	9.54	40.05	25.65	56.00	46.00	-15.95	-20.35	L1
3.0085	31.70	17.45	9.70	41.40	27.15	56.00	46.00	-14.60	-18.85	L1
4.6687	29.61	17.73	9.77	39.38	27.50	56.00	46.00	-16.62	-18.50	L1
9.9448	28.15	21.07	10.09	38.24	31.16	60.00	50.00	-21.76	-18.84	L1
16.3909	27.77	21.61	10.23	38.00	31.84	60.00	50.00	-22.00	-18.16	L1
0.4827	33.55	16.42	9.53	43.08	25.95	56.29	46.29	-13.21	-20.34	L2
0.6181	34.13	17.83	9.54	43.67	27.37	56.00	46.00	-12.33	-18.63	L2
2.9992	32.82	19.47	9.70	42.52	29.17	56.00	46.00	-13.48	-16.83	L2
4.5720	30.35	18.74	9.76	40.11	28.50	56.00	46.00	-15.89	-17.50	L2
8.5897	30.41	23.02	9.96	40.37	32.98	60.00	50.00	-19.63	-17.02	L2
15.9746	32.60	25.90	10.32	42.92	36.22	60.00	50.00	-17.08	-13.78	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. "---" denotes the emission level was or more than 2dB below the Average limit
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Test Plots

Conducted emissions (Line 1)

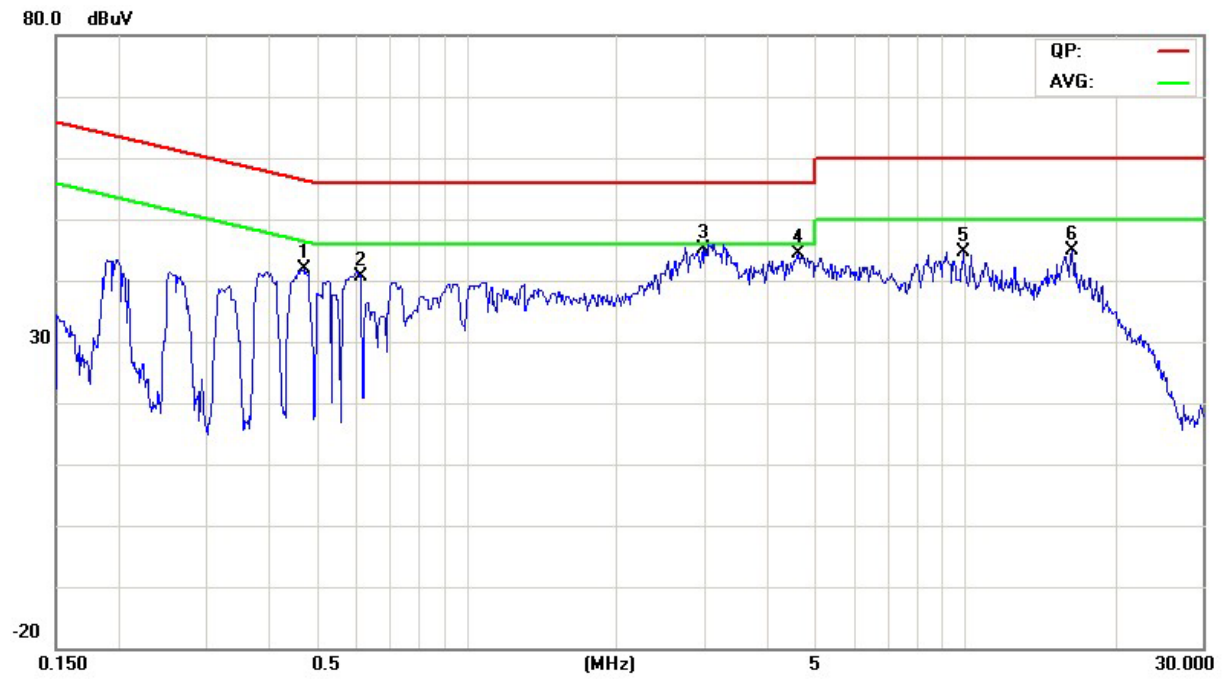

Conducted emissions (Line 2)

