



SAR Test Report

of

Product Name

AR5BXB63-L 802.11 b/g PCI Express Module

Model

AR5BXB63-L

Applied by:

Atheros Communications, Inc.
529 Almanor
Sunnyvale, CA 94085
USA

Test Performed by:

International Standards Laboratory
No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325
Taiwan, R.O.C.
Tel:(03)407-1718 Fax:(03)407-1738

Report Number: ISL-07LR014SAR-F

HC LAB:NVLAP:200234-0;VCCI: R-341,C-354; NEMKO:ELA 113A;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;TAF:1178; IC:IC4067
LT LAB: NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113B; BSMI:SL2-IN-E-0013;TAF:0997; IC:IC4164-1
ISL-T10-R4-14

Issue Date: 2007/04/12

Contents of Report

1.	General	1
1.1	Certification of Accuracy of Test Data	1
2.	Description of Equipment under Test (EUT)	2
2.1	Test Environment.....	3
3.	SAR Measurement System.....	4
3.1	ALSAS-10U System Description	4
3.1.1	Applications	4
3.1.2	Area Scans.....	4
3.1.3	Zoom Scan (Cube Scan Averaging).....	5
3.1.4	ALSAS-10U Interpolation and Extrapolation Uncertainty.....	5
3.2	Isotropic E-Field Probe	6
3.2.1	Isotropic E-Field Probe Specification.....	7
3.3	Boundary Detection Unit and Probe Mounting Device	7
3.4	Daq-Paq (Analog to Digital Electronics)	8
3.5	Axis Articulated Robot	8
3.6	ALSAS Universal Workstation.....	9
3.7	Universal Device Positioner.....	9
3.8	Phantom Types.....	10
3.8.1	APREL Laboratories Universal Phantom.....	10
4.	Tissue Simulating Liquid	11
4.1	The composition of the tissue simulating liquid	11
4.2	Tissue Calibration Result.....	11
4.3	Tissue Dielectric Parameters for Head and Body Phantoms	12
5.	SAR Measurement Procedure	13
5.1	SAR System Validation	13
5.1.1	Validation Dipoles	13
5.1.2	Validation Result.....	14
5.2	Arrangement Assessment Setup	15
5.2.1	Test Positions of Device Relative to Head.....	15
5.2.2	Definition of the “Cheek” Position.....	15
5.2.3	Definition of the “Tilted” Position.....	17
5.2.4	Test Positions for body-worn.....	17
5.3	SAR Measurement Procedure	18
6.	SAR Exposure Limits	19
7.	Test Equipment List.....	20
8.	Measurement Uncertainty	21
9.	Test Result Summary	22
9.1	EUT Test Position : Laptop	22
9.2	EUT Test Position: Tablet Mode	22
9.3	EUT Test Position: Notebook PC Mode.....	23
9.4	WLAN +Bluetooth SAR measurement Data	24
10.	Appendix A: Photographs of Test Setup	26
11.	Appendix B: Photographs of EUT	26
12.	Appendix C: SAR System Validation Data	26
13.	Appendix D: SAR measurement Data	26
14.	Appendix E: Probe calibration data	26
15.	Appendix F: Dipole calibration data	26

1. General

1.1 Certification of Accuracy of Test Data

Standards:

FCC Oet65 Supplement C June 2001
IEEE Std. 1528-2003
47CFR § 2.1093
RSS102 issue 2

Equipment Tested:

AR5BXB63-L 802.11 b/g PCI Express Module

Model:

AR5BXB63-L

FCC ID

PPD-AR5BXB63-L

Built-In Tablet PC

Brand Name: Lenovo

Model Name: 7762/7763/7764/7767/7768/7769

Project Name: ThinkPad X61 Tablet Series

Sierra, Wireless Karafuto (GSM, EGSM, UMTS) : FCCID N7NMC8765

RF Module A

Sierra Wireless Akita (GSM, EGSM) : FCCID N7NMC8755

RF Module B

Sierra Wireless Tosa (EV-DO) : FCCID N7N-MC5720

RF Module C

Bluetooth, Foxconn Callisto, FCCID MCLJ07H081

RF Module D

Atheros Communications, Inc.

Applied by

2007/03/15

Sample received Date:

refer to the date of test data

Final test Date :

Ivy Yang

Report Engineer:

SAR test site

Test Site:

Frank Hsu

Test Engineer:


Body Maximum SAR Measurement (1g)

802.11b (2450MHz): 0.559 W/g

802.11g (2450MHz): 0.792 W/g

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent test lab, International Standards Laboratory. The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature



Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions.

This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 28 pages, including 1 cover page , 1 contents page, and 26 pages for the test description.

This report must not be used to claim product endorsement by NVLAP, NIST, any agency of the federal government.

2. Description of Equipment under Test (EUT)

Product Name & Model No.	AR5BXB63-L 802.11 b/g PCI Express Module
Model No.	AR5BXB63-L
TX Frequency	2412MHz ~ 2462MHz (802.11b & 802.11g)
Number of Channel	802.11b: 11, 802.11g: 11
Type of Modulation	802.11b: DBPSK, DQPSK, CCK 802.11g: OFDM
Max. Conducted Output Power (Mid. Channel)	802.11b: 23.76dBm, 802.11g: 26.77dBm
Built-In Tablet PC	Brand Name: Lenovo Model Name: 7762/7763/7764/7767/7768/7769 Project Name: ThinkPad X61 Tablet Series
RF Module A	Sierra, Wireless Karafuto (GSM, EGSM, UMTS) : FCCID N7NMC8765
RF Module B	Sierra Wireless Akita (GSM, EGSM) : FCCID N7NMC8755
RF Module C	Sierra Wireless Tosa (EV-DO) : FCCID N7N-MC5720
RF Module D	Bluetooth, Foxconn Callisto, FCCID MCLJ07H081
Transmit Antenna Peak Gain	Main Antenna of WLAN: 2.4GHz : 0.9dBi Aux Antenna WLAN: 2.4GHz: 1.52dBi Main Antenna of WWAN (Karafuto and TOSA): 850MHz : 1.76dBi, 1900MHz: 1.30dBi Main Antenna of WWAN (Akita): 850MHz : 1.74dBi, 1900MHz: 1.78dBi
Antenna Type	Internal, Dual Band Printed IFA
Transfer Rate	802.11b: 1~11Mbps 802.11g: 6~54Mbps
Power Type	5V DC from Notebook PC
Device Category	Portable
RF Exposure Environment	Uncontrolled

Note: WLAN and WWAN can not transmit at the same time.

2.1 Test Environment

Ambient conditions of test site:

Item	Required	Actual
Temperature (°C)	18-25	21.3
Humidity (%RH)	30-70	49

3. SAR Measurement System

3.1 ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller.

ALSAS-10U uses the latest methodologies and FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

3.1.1 Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.



3.1.2 Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

3.1.3 Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.

3.1.4 ALSAS-10U Interpolation and Extrapolation Uncertainty

The overall uncertainty for the methodology and algorithms used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:


$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

3.2 Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change. A number of methods is used for calibrating probes, and these are outlined in the table below:

Calibration Frequency	Air Calibration	Tissue Calibration
835MHz	TEM Cell	Temperature
900MHz	TEM Cell	Temperature
1800MHz	TEM Cell	Temperature
1900MHz	TEM Cell	Temperature
2450MHz	Waveguide	Temperature
5200MHz	Waveguide	Temperature
5800MHz	Waveguide	Temperature

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

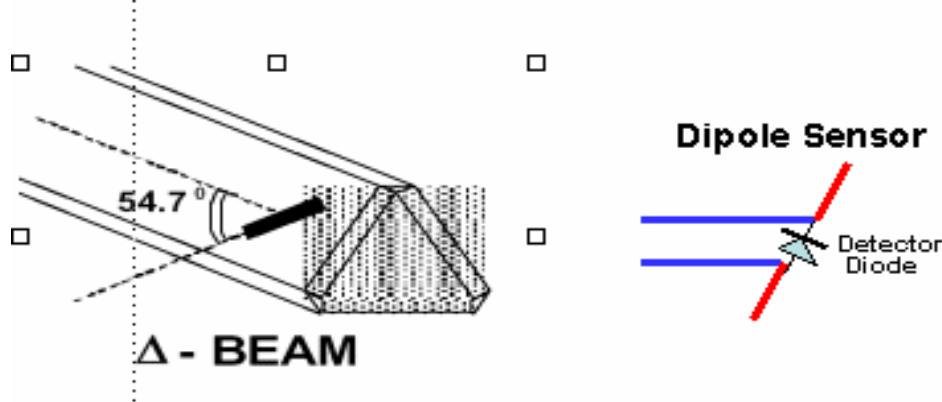

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

3.2.1 Isotropic E-Field Probe Specification

Calibration in Air	Frequency Dependent Below 2GHz Calibration in air performed in a TEM Cell Above 2GHz Calibration in air performed in waveguide
Sensitivity	0.70 $\mu\text{V}/(\text{V}/\text{m})^2$ to 0.85 $\mu\text{V}/(\text{V}/\text{m})^2$
Dynamic Range	0.0005 W/kg to 100W/kg
Isotropic Response	Better than 0.2dB
Diode Compression point (DCP)	Calibration for Specific Frequency
Probe Tip Radius	< 5mm
Sensor Offset	1.56 (+/- 0.02mm)
Probe Length	290mm
Video Bandwidth	@ 500 Hz: 1dB @ 1.02 KHz: 3dB
Boundary Effect	Less than 2% for distance greater than 2.4mm
Spatial Resolution	Diameter less than 5mm Compliant with Standards

3.3 Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

3.4 Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 5 μ V to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	12 Bit
Amplifier Range	20mV to 200mV and 150mV to 800mV
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232

3.5 Axis Articulated Robot



ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.

Robot/Controller Manufacturer	Thermo CRS
Number of Axis	Six independently controlled axis
Positioning Repeatability	0.05mm
Controller Type	Single phase Pentium based C500C
Robot Reach	710mm
Communication	RS232 and LAN compatible

3.6 ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

3.7 Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the aid of cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.




3.8 Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

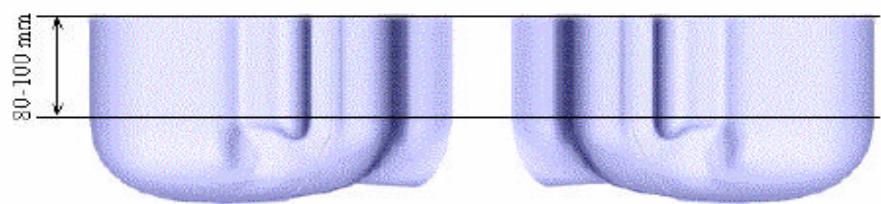

3.8.1 APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software. The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at one frequency for both left and right head experiments in one measurement.



4. Tissue Simulating Liquid

4.1 The composition of the tissue simulating liquid

INGREDIENT (% Weight)	2450MHz Head	2450MHz Body
Water	46.7	73.2
Salt	0.00	0.40
Sugar	0.00	0.00
HEC	0.00	0.00
Preventol	0.00	0.00
DGBE	53.3	26.76

4.2 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using Agilent Dielectric Probe Kit and Agilent E5071B Vector Network Analyzer

Head Tissue Simulant Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [s/m]	
2450MHz	Reference result $\pm 5\%$ window	39.2 37.24 to 41.16	1.8 1.71 to 1.89	N/A
	19-Apr-2007	40.59	1.75	21.1

Body Tissue Simulant Measurement				
Frequency [MHz]	Description/ Calibration date	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [s/m]	
2450MHz	Reference result $\pm 5\%$ window	52.7 50.065 to 55.335	1.95 1.8525 to 2.0475	N/A
	19-Apr-2007	51.98	1.97	21.1

4.3 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.


Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

5. SAR Measurement Procedure

5.1 SAR System Validation

5.1.1 Validation Dipoles

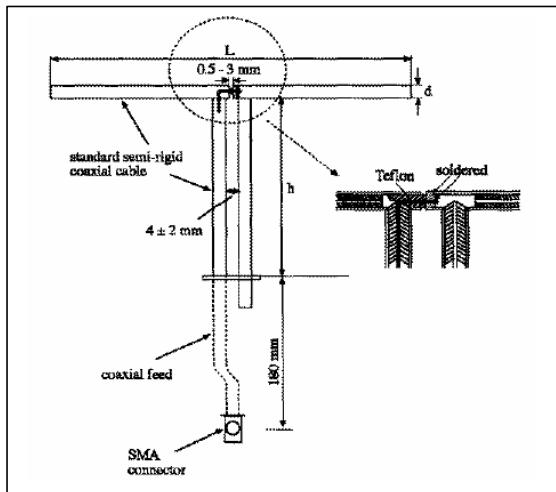

The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical specifications for the dipoles.

*	Frequency	L (mm)	h (mm)	d (mm)
	835MHz	161.0	89.8	3.6
	900MHz	149.0	83.3	3.6
	1800MHz	72.0	41.7	3.6
	1900MHz	68.0	39.5	3.6
v	2450MHz	51.5	30.4	3.6
	5200MHz	23.6	14.0	3.6
	5800MHz	21.6	12.6	3.6

*Note: "V" indicates Frequency used of EUT

5.1.2 Validation Result

System Performance Check at 2450MHz

Validation Kit: ASL-D-2450-S-2

Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
2450 MHz	Reference result ± 5% window	52.4 49.78 to 55.02	24 22.8 to 25.2	N/A
	04/19/2007	53.984	24.149	21.1

Note: All SAR values are 1W forward power.

5.2 Arrangement Assessment Setup

5.2.1 Test Positions of Device Relative to Head

This specifies exactly two test positions for the handset against the head phantom, the “cheek” position and the “tilted” position. The handset should be tested in both positions on the left and right sides of the SAM phantom. If the handset construction is such that it cannot be positioned using the handset positioning procedures described in 4.2.2.1 and 4.2.2.2 to represent normal use conditions (e.g., asymmetric handset), alternative alignment procedures should be considered with details provided in the test report.

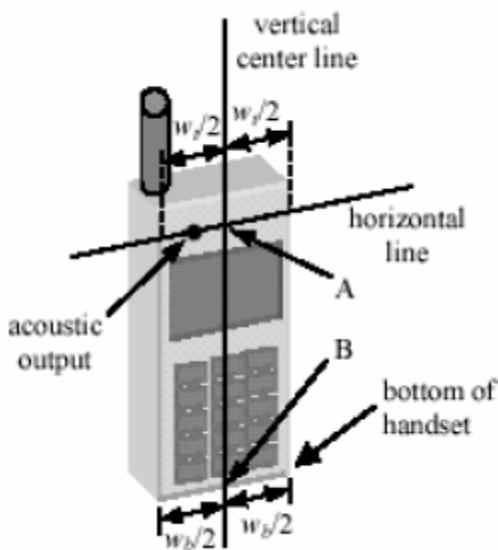


Figure 4.1a Fixed Case

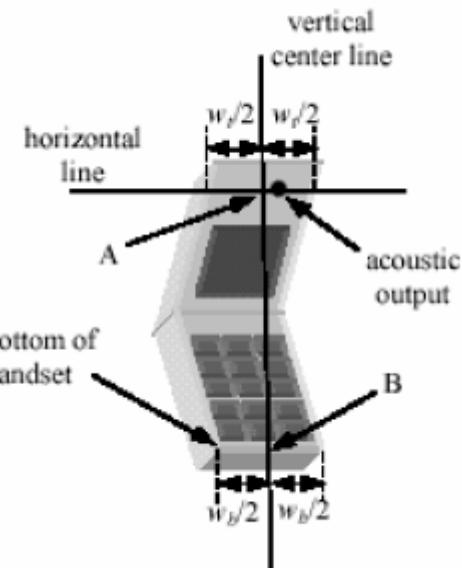


Figure 4.1b Clam Shell

5.2.2 Definition of the “Cheek” Position

The “cheek” position is defined as follows:

- Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover. (If the handset can also be used with the cover closed both configurations must be tested.)
- Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A on Figures 4.1a and 4.1b), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 4.1a). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 4.1b), especially for clamshell handsets, handsets with flip pieces, and other irregularly-shaped handsets.

- c. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 4.2), such that the plane defined by the vertical center line and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
- d. Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the pinna.
- e. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- f. Rotate the handset around the vertical centerline until the handset (horizontal line) is symmetrical with respect to the line NF.
- g. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the handset contact with the pinna, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the pinna (cheek). See Figure 4.2 the physical angles of rotation should be noted.

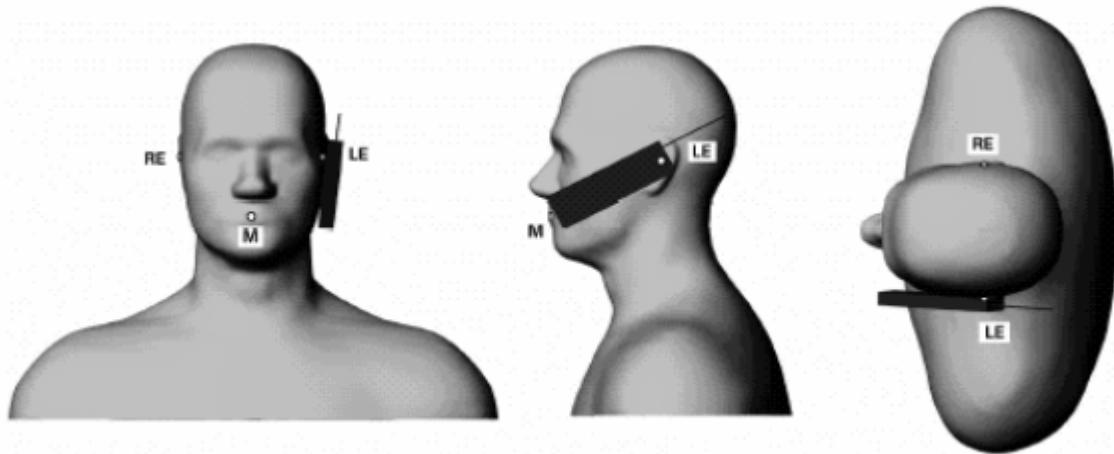


Figure 4.2 – Phone position 1, “cheek” or “touch” position.

5.2.3 Definition of the “Tilted” Position

The “tilted” position is defined as follows:

- a. Repeat steps (a) – (g) of 4.2.1.1 to place the device in the “cheek position.”
- b. While maintaining the orientation of the handset move the handset away from the pinna along the line passing through RE and LE in order to enable a rotation of the handset by 15 degrees.
- c. Rotate the handset around the horizontal line by 15 degrees.
- d. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna (e.g., the antenna with the back of the phantom head), the angle of the handset should be reduced. In this case, the tilted position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is contact with the phantom (e.g., the antenna with the back of the head).

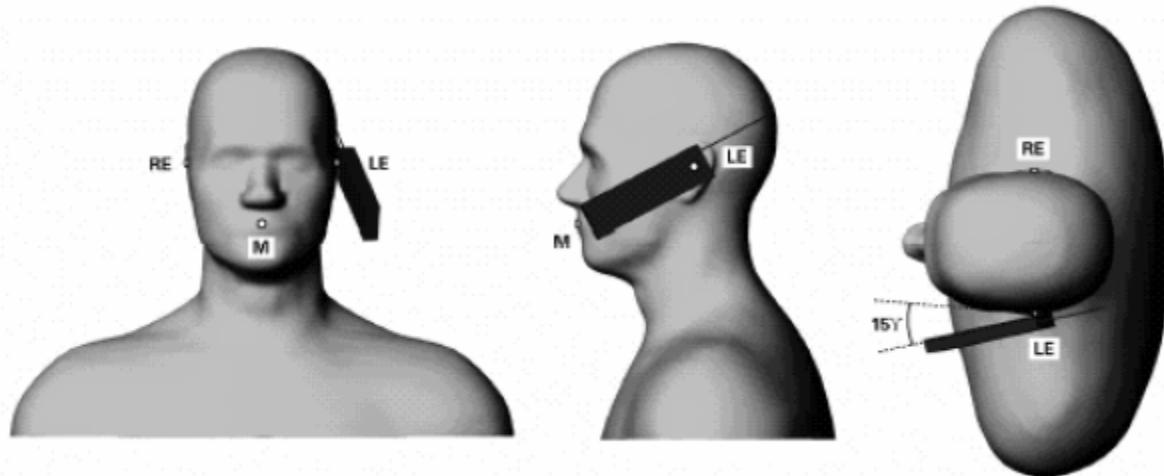


Figure 4.3 – Phone position 2, “tilted” position.

5.2.4 Test Positions for body-worn

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distance may be used, but not exceed 2.5 cm.

5.3 SAR Measurement Procedure

The ALSAS-10U calculates SAR using the following equation,

$$SAR = \frac{\sigma |E|^2}{\rho}$$

s: represents the simulated tissue conductivity

? represents the tissue density

The EUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm²) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm³).

6. SAR Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg
Spatial Average SAR (whole body)	0.08 W/kg
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	4.00 W/kg

7. Test Equipment List

Instrument	Manufacturer	Model No.	Serial No.	Last Calibration
Vector Network Analyzer	Agilent	E5071B	MY42402726	Jul. 2006
Dielectric Probe Kit	Agilent	85070E	MY44300124	N/A
Signal Generator	Anritsu	MG3692A	020311	Feb. 2007
Power Meter	Agilent	438A	3513U06187	Feb. 2007
Power Sensor	Agilent	84815A	3318A01828	Feb. 2007
Data Acquisition Package	Aprel	ALS-DAQ-PAQ-2	110-00203	N/A
Aprel Laboratories Probe	Aprel	ALS-E020	266	Jun. 2006
Aprel Reference Dipole 835MHz	Aprel	ALS-D-835-S-2	180-00553	Feb. 2007
Aprel Reference Dipole 1900MHz	Aprel	ALS-D-1900-S-2	210-00703	Feb. 2007
Aprel Reference Dipole 2450MHz	Aprel	ALS-D-2450-S-2	220-00753	Feb. 2007
Aprel Reference Dipole 5200MHz	Aprel	ALS-D-5200-S-2	230-00802	Feb. 2007
Aprel Reference Dipole 5800MHz	Aprel	ALS-D-5800-S-2	240-00852	Feb. 2007
Boundary Detection SensorSystem	Aprel	ALS-PMDPS-2	120-00253	N/A
Universal Work Station	Aprel	ALS-UWS	100-00153	N/A
Device Holder 2.0	Aprel	ALS-H-E-SET-2	170-00503	N/A
Left Ear SAM Phantom	Aprel	ALS-P-SAM-L	130-00305	N/A
Right Ear SAM Phantom	Aprel	ALS-P-SAM-R	140-00355	N/A
Universal Phantom	Aprel	ALS-P-UP-1	150-00405	N/A
Aprel Dipole Spacer	Aprel	ALS-DS-U	250-00903	N/A
SAR Software	Aprel	ALSAS-10U Ver.2.2.0	B0D5F-112FE	N/A
CRS C500C Controller	Thermo	ALS-C500	RCF0440278	N/A
CRF F3 Robot	Thermo	ALS-F3	RAF0440252	N/A
Power Amplifier	Mini-Circuit	ZVE-8G	D030305	N/A
Vector Network Analyzer	Agilent	E5071B	MY42402726	Jul. 2006
Dielectric Probe Kit	Agilent	85070E	MY44300124	N/A
Signal Generator	Anritsu	MG3692A	020311	Feb. 2007
Power Meter	Agilent	438A	3513U06187	Feb. 2007
Power Sensor	Agilent	84815A	3318A01828	Feb. 2007

Note: All equipment upon which need to be calibrated are with calibration period of 1 year except Reference Dipole is to be calibrated every two years. .

8. Measurement Uncertainty


Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c_i^1 (1g)	c_i^1 (10g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	v3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	v3	vcp	vcp	4.4	4.4
Boundary Effect	1.0	rectangular	v3	1	1	0.6	0.6
Linearity	4.7	rectangular	v3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	v3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	v3	1	1	0.5	0.5
Integration Time	1.7	rectangular	v3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	v3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	v3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	v3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	v3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	1.6	rectangular	v3	1	1	0.9	0.9
Phantom and Setup							
Phantom Uncertainty (shape & thickness tolerance)	3.4	rectangular	v3	1	1	2.0	2.0
Liquid Conductivity (target)	5.0	rectangular	v3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	4.6	normal	1	0.7	0.5	3.2	2.3
Liquid Permittivity(target)	5.0	rectangular	v3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	2.3	normal	1	0.6	0.5	1.4	1.1
Combined Uncertainty		RSS				9.9	9.5
Combined Uncertainty (coverage factor=2)		Normal(k=2)				19.8	18.9

9. Test Result Summary

9.1 EUT Test Position : Laptop

The EUT is put on the laptop of user. The TX Antennas WLAN_Main , WLAN_Aux and WWAN_Main are enable.

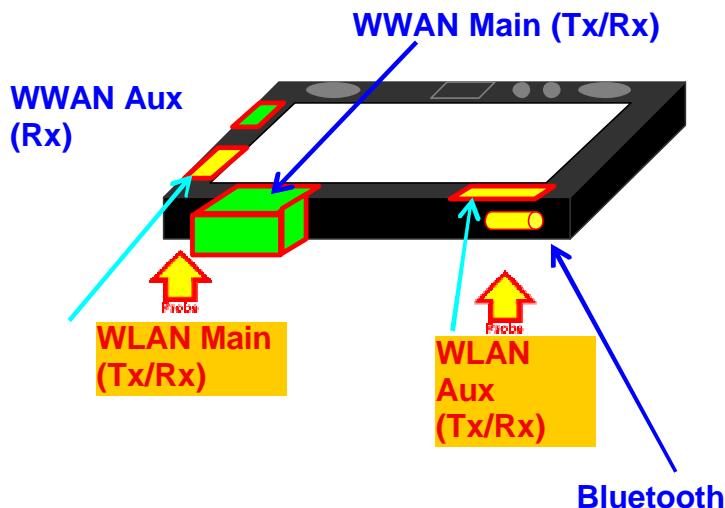

9.2 EUT Test Position: Tablet Mode


In order to meet SAR requirement, the TX antennas located in BODY SIDE will be disabled.

	Antenna	Notebook Mode	Primary Landscape (PL)	Primary Portrait (PP)	Secondary Landscape (SL)	Secondary Portrait (SP)	802.11 a/b/g	WWAN
WLAN	1 (Main)	Enable	Enable	Enable	Enable	Disable	Tx/Rx	NA
	2 (Aux)	Enable	Enable	Enable	Disable	Enable	Tx/Rx	NA
WWAN	Main	Enable	Enable	Enable	NA*1	Enable	NA	Tx/Rx
	Aux	Enable	Enable	Enable	NA*1	Enable	NA	Rx
Screen orientation vs. Body side								

Note:

1. *1: System does not function for the Secondary Landscape, when WWAN is enabled
2. WLAN and WWAN can not transmit at the same time.

9.3 EUT Test Position: Notebook PC Mode

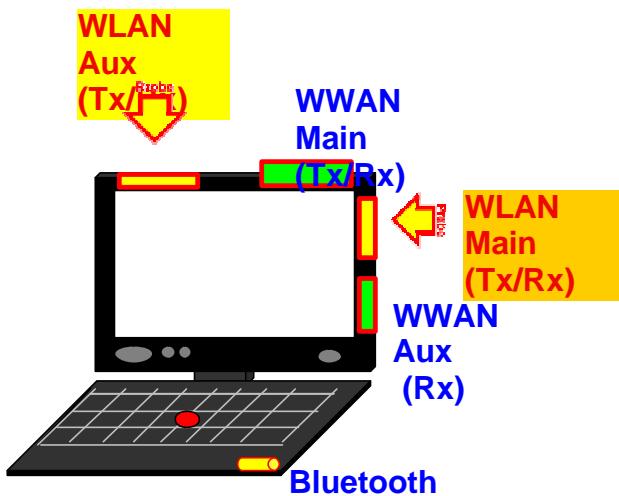

In Notebook PC mode, the distance between user to TX antennas (WLAN_Main , WLAN_Aux and WWAN_Main) is much larger than the distance of Laptop mode and Tablet mode. It is not necessary to verify the SAR Value of this Notebook PC mode.

The Conducted Power output of EUT

802.11b (dBm)							
Freq. (MHz)	Bit rate 1 mbps	Bit rate 2 mbps	Bit rate 5.5	Bit rate 11			
2412	23.76	23.7	23.7	23.63			
2437	23.58	23.45	23.32	23.32			
2462	23.70	23.51	23.42	23.56			

802.11g (dBm)							
Freq. (MHz)	Bit rate 6 mbps	Bit rate 9 mbps	Bit rate 12	Bit rate 18	Bit rate 24 mbps	Bit rate 36 mbps	Bit rate 54
2412	23.76	23.58	23.42	23.7	23.32	23.6	23.6
2437	26.77	26.3	26.4	26.3	26.2	26.3	26.5
2462	23.83	23.45	23.38	23.57	23.38	23.57	23.28

9.4 WLAN +Bluetooth SAR measurement Data

SAR Measurement										
Ambient Temperature (°C) : 21.3±1			Relative Humidity (%): 49							
EUT Position (See Note 1)	Transmitting Antenna (Bluetooth always on)	Frequency (MHz)		WLAN SAR 1g (W/Kg) (Note 2)	WWAN SAR 1g (W/Kg) (Note 3)	SUM SAR 1g (W/Kg) (Note 3)				
		WLAN	Conducted Power(dBm)							
802.11b mode										
Liquid Temperature (°C) : 21.1±1			Depth of Liquid (cm):>15							
Tablet, PL	WLAN: Main,	2412	23.76	----	----	----				
Tablet, PL	WLAN: Main,	2437	23.58	0.211	----	----				
Tablet, PL	WLAN: Main,	2462	23.70	----	----	----				
Tablet, PP	WLAN: Aux,	2412	23.76	0.559	----	----				
Tablet, PP	WLAN: Aux,	2437	23.58	0.512	----	----				
Tablet, PP	WLAN: Aux,	2462	23.70	0.455	----	----				
Tablet, SL	WLAN: Main	2412	23.76	----	----	----				
Tablet, SL	WLAN: Main	2437	23.58	0.296	----	----				
Tablet, SL	WLAN: Main	2462	23.70	----	----	----				
Tablet, SP	WLAN: Aux,	2412	23.76	----	----	----				
Tablet, SP	WLAN: Aux,	2437	23.58	0.091	----	----				
Tablet, SP	WLAN: Aux,	2462	23.70	----	----	----				
Laptop -1	WLAN: Main,	2412	23.76	----	----	----				
Laptop -1	WLAN: Main,	2437	23.58	0.116	----	----				
Laptop -1	WLAN: Main,	2462	23.70	----	----	----				
Laptop -2	WLAN: Aux,	2412	23.76	----	----	----				
Laptop -2	WLAN: Aux,	2437	23.58	0.075	----	----				
Laptop -2	WLAN: Aux,	2462	23.70	----	----	----				
Note: The SAR measured at the middle channel for this configuration is at least 3 dB lower than SAR limit, testing at the high and low channels is option.										

Note 1: WWAN did not transmit for the test listed in this table.

Note 2: The 1g SAR measurement of WLAN + Bluetooth only.

Note 3: SUM 1g SAR = WLAN+Bluetooth 1g SAR + WWAN 1g SAR.

Note 4: WLAN and WWAN can not transmit at the same time. .

Note5: The frequency and bit rate with highest output power was used to test SAR.

9.5 WLAN +Bluetooth SAR measurement Data

SAR Measurement										
Ambient Temperature (°C) : 21.3±1			Relative Humidity (%): 49							
EUT Position (See Note 1)	Transmitting Antenna (Bluetooth always on)	Frequency (MHz)		WLAN SAR 1g (W/Kg) (Note 2)	WWAN SAR 1g (W/Kg) (Note 3)	SUM SAR 1g (W/Kg) (Note 3)				
		WLAN	Conducted Power(dBm)							
802.11g mode										
Liquid Temperature (°C) : 21.1±1			Depth of Liquid (cm):>15							
Tablet, PL	WLAN: Main,	2412	23.76	----	----	----				
Tablet, PL	WLAN: Main,	2437	26.77	0.061	----	----				
Tablet, PL	WLAN: Main,	2462	23.83	----	----	----				
Tablet, PP	WLAN: Aux,	2412	23.76	0.170	----	----				
Tablet, PP	WLAN: Aux,	2437	26.77	0.792	----	----				
Tablet, PP	WLAN: Aux,	2462	23.83	0.174	----	----				
Tablet, SL	WLAN: Main	2412	23.76	----	----	----				
Tablet, SL	WLAN: Main	2437	26.77	0.248	----	----				
Tablet, SL	WLAN: Main	2462	23.83	----	----	----				
Tablet, SP	WLAN: Aux,	2412	23.76	----	----	----				
Tablet, SP	WLAN: Aux,	2437	26.77	0.100	----	----				
Tablet, SP	WLAN: Aux,	2462	23.83	----	----	----				
Laptop -1	WLAN: Main,	2412	23.76	----	----	----				
Laptop -1	WLAN: Main,	2437	26.77	0.104	----	----				
Laptop -1	WLAN: Main,	2462	23.83	----	----	----				
Laptop -2	WLAN: Aux,	2412	23.76	----	----	----				
Laptop -2	WLAN: Aux,	2437	26.77	0.112	----	----				
Laptop -2	WLAN: Aux,	2462	23.83	----	----	----				
Note: The SAR measured at the middle channel for this configuration is at least 3 dB lower than SAR limit, testing at the high and low channels is option.										

Note 1: WWAN did not transmit for the test listed in this table.

Note 2: The 1g SAR measurement of WLAN + Bluetooth only.

Note 3: SUM 1g SAR = WLAN+Bluetooth 1g SAR + WWAN 1g SAR.

Note 4: WLAN and WWAN can not transmit at the same time. .

Note5: The frequency and bit rate with highest output power was used to test SAR.

- 10. Appendix A: Photographs of Test Setup**
- 11. Appendix B: Photographs of EUT**
- 12. Appendix C: SAR System Validation Data**
- 13. Appendix D: SAR measurement Data**
- 14. Appendix E: Probe calibration data**
- 15. Appendix F: Dipole calibration data**