



FCC TEST REPORT (15.247)

REPORT NO.: RF130221E04

MODEL NO.: CUS227

FCC ID: PPD-CUS227

IC: 4104A-CUS227

RECEIVED: Feb. 21, 2013

TESTED: Feb. 28 to June 19, 2013

ISSUED: June 26, 2013

APPLICANT: Qualcomm Atheros, Inc.

ADDRESS: 1700 Technology Drive, San Jose, CA 95110

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung
Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD.....	6
1. CERTIFICATION.....	7
2. SUMMARY OF TEST RESULTS.....	8
2.1 MEASUREMENT UNCERTAINTY	10
3. GENERAL INFORMATION	11
3.1 GENERAL DESCRIPTION OF EUT.....	11
3.2 DESCRIPTION OF ANTENNA.....	12
3.3 DESCRIPTION OF TEST MODES.....	13
3.3.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	15
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	18
3.5 DESCRIPTION OF SUPPORT UNITS.....	19
3.6 CONFIGURATION OF SYSTEM UNDER TEST	20
4. TEST TYPES AND RESULTS (FOR 2.4GHZ, 2400 ~ 2483.5MHZ BAND).22	
4.1 CONDUCTED OUTPUT POWER MEASUREMENT	22
4.1.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	22
4.1.2 INSTRUMENTS	22
4.1.3 TEST PROCEDURES.....	22
4.1.4 DEVIATION FROM TEST STANDARD	22
4.1.5 TEST SETUP	23
4.1.6 EUT OPERATING CONDITIONS.....	23
4.1.7 TEST RESULTS.....	24
4.2 AVERAGE OUTPUT POWER.....	26
4.2.1 FOR REFERENCE.....	26
4.2.2 TEST INSTRUMENTS	26
4.2.3 TEST PROCEDURES.....	26
4.2.4 TEST SETUP	26
4.2.5 EUT OPERATING CONDITIONS.....	26
4.2.6 TEST RESULTS.....	27
4.3 POWER SPECTRAL DENSITY MEASUREMENT.....	28
4.3.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	28
4.3.2 TEST INSTRUMENTS	28
4.3.3 TEST PROCEDURE	28
4.3.4 DEVIATION FROM TEST STANDARD	28
4.3.5 TEST SETUP	28
4.3.6 EUT OPERATING CONDITION	28
4.3.7 TEST RESULTS.....	29
4.4 6dB BANDWIDTH MEASUREMENT	37



A D T

4.4.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	37
4.4.2	TEST INSTRUMENTS	37
4.4.3	TEST PROCEDURE	37
4.4.4	DEVIATION FROM TEST STANDARD	37
4.4.5	TEST SETUP	37
4.4.6	EUT OPERATING CONDITIONS.....	37
4.4.7	TEST RESULTS.....	38
4.5	OCCUPIED BANDWIDTH MEASUREMENT	46
4.5.1	TEST INSTRUMENTS	46
4.5.2	TEST PROCEDURE	46
4.5.3	TEST SETUP	46
4.5.4	EUT OPERATING CONDITIONS.....	46
4.5.5	TEST RESULTS.....	47
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	55
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	55
4.6.2	TEST INSTRUMENTS	55
4.6.3	TEST PROCEDURE	55
4.6.4	DEVIATION FROM TEST STANDARD	56
4.6.5	EUT OPERATING CONDITION	56
4.6.6	TEST RESULTS.....	56
4.7	UNWANTED EMISSION MEASUREMENT (RADIATED VERSUS CONDUCTED)	65
4.7.1	LIMITS OF UNWANTED EMISSION MEASUREMENT	65
4.7.2	TEST INSTRUMENTS	66
4.7.3	TEST PROCEDURES.....	68
4.7.4	DEVIATION FROM TEST STANDARD	69
4.7.5	TEST SETUP	70
4.7.6	EUT OPERATING CONDITIONS.....	71
4.7.7	TEST RESULTS (RADIATED MEASUREMENT).....	72
4.7.8	TEST RESULTS (CONDUCTED MEASUREMENT).....	86
4.8	AC POWER LINE CONDUCTED EMISSION MEASUREMENT.....	100
4.8.1	LIMITS OF AC POWER LINE CONDUCTED EMISSION MEASUREMENT.....	100
4.8.2	TEST INSTRUMENTS	100
4.8.3	TEST PROCEDURES.....	101
4.8.4	DEVIATION FROM TEST STANDARD	101
4.8.5	TEST SETUP	102
4.8.6	EUT OPERATING CONDITIONS.....	102
4.8.7	TEST RESULTS.....	103
5.	TEST TYPES AND RESULTS (FOR 5GHZ, 5725~5850MHZ BAND).....	105



A D T

5.1	CONDUCTED OUTPUT POWER MEASUREMENT	105
5.1.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	105
5.1.2	INSTRUMENTS	105
5.1.3	TEST PROCEDURES.....	105
5.1.4	DEVIATION FROM TEST STANDARD	105
5.1.5	TEST SETUP	106
5.1.6	EUT OPERATING CONDITIONS.....	106
5.1.7	TEST RESULTS.....	107
5.2	AVERAGE OUTPUT POWER.....	108
5.2.1	FOR REFERENCE.....	108
5.2.2	TEST INSTRUMENTS	108
5.2.3	TEST PROCEDURES.....	108
5.2.4	TEST SETUP	108
5.2.5	EUT OPERATING CONDITIONS.....	108
5.2.6	TEST RESULTS.....	109
5.3	POWER SPECTRAL DENSITY MEASUREMENT.....	110
5.3.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	110
5.3.2	TEST INSTRUMENTS	110
5.3.3	TEST PROCEDURE	110
5.3.4	DEVIATION FROM TEST STANDARD	110
5.3.5	TEST SETUP	110
5.3.6	EUT OPERATING CONDITION	110
5.3.7	TEST RESULTS.....	111
5.4	6DB BANDWIDTH MEASUREMENT.....	116
5.4.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	116
5.4.2	TEST INSTRUMENTS	116
5.4.3	TEST PROCEDURE	116
5.4.4	DEVIATION FROM TEST STANDARD	116
5.4.5	TEST SETUP	116
5.4.6	EUT OPERATING CONDITIONS.....	116
5.4.7	TEST RESULTS.....	117
5.5	OCCUPIED BANDWIDTH MEASUREMENT.....	122
5.5.1	TEST INSTRUMENTS	122
5.5.2	TEST PROCEDURE	122
5.5.3	TEST SETUP	122
5.5.4	EUT OPERATING CONDITIONS.....	122
5.5.5	TEST RESULTS.....	123
5.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	128
5.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	128



A D T

5.6.2	TEST INSTRUMENTS	128
5.6.3	TEST PROCEDURE	128
5.6.4	DEVIATION FROM TEST STANDARD	129
5.6.5	EUT OPERATING CONDITION	129
5.6.6	TEST RESULTS	129
5.7	UNWANTED EMISSION MEASUREMENT (RADIATED VERSUS CONDUCTED)	136
5.7.1	LIMITS OF UNWANTED EMISSION MEASUREMENT	136
5.7.2	TEST INSTRUMENTS	137
5.7.3	TEST PROCEDURES	139
5.7.4	DEVIATION FROM TEST STANDARD	140
5.7.5	TEST SETUP	141
5.7.6	EUT OPERATING CONDITIONS	142
5.7.7	TEST RESULTS (RADIATED MEASUREMENT)	143
5.7.8	TEST RESULTS (CONDUCTED MEASUREMENT)	153
5.8	AC POWER LINE CONDUCTED EMISSION MEASUREMENT	158
5.8.1	LIMITS OF AC POWER LINE CONDUCTED EMISSION MEASUREMENT	158
5.8.2	TEST INSTRUMENTS	158
5.8.3	TEST PROCEDURES	159
5.8.4	DEVIATION FROM TEST STANDARD	159
5.8.5	TEST SETUP	160
5.8.6	EUT OPERATING CONDITIONS	160
5.8.7	TEST RESULTS	161
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION	163
7.	INFORMATION ON THE TESTING LABORATORIES	164
8.	APPENDIX A - RADIATED EMISSION MEASUREMENT (FOR 5GHZ, 5725~5850MHZ BAND)	165
8.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	165
8.1.2	TEST INSTRUMENTS	166
8.1.3	TEST PROCEDURES	167
8.1.4	DEVIATION FROM TEST STANDARD	167
8.1.5	TEST SETUP	168
8.1.6	EUT OPERATING CONDITIONS	168
8.1.7	TEST RESULTS	169
9.	APPENDIX B - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	177



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130221E04	Original release	June 26, 2013



1. CERTIFICATION

PRODUCT: 802.11a/b/g/n 2x2 WLAN card
BRAND NAME: Qualcomm Atheros
MODEL NO.: CUS227
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: Qualcomm Atheros, Inc.
TESTED: Feb. 28 to June 19, 2013
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2009
Canada RSS-210 Issue 8 (2010-12)
Canada RSS-Gen Issue 3 (2010-12)

The above equipment (Model: CUS227) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and was in compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng, **DATE:** June 26, 2013
(Midoli Peng, Specialist)

APPROVED BY : May Chen, **DATE:** June 26, 2013
(May Chen, Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 2.4GHz, 2412~2462MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247) ; RSS-210; RSS-Gen				
STANDARD SECTION		TEST TYPE	RESULT	REMARK
FCC Part 15	RSS-Gen			
15.207	RSS-Gen 7.2.4	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.61dB at 0.15391MHz
15.247(d) 15.209	RSS-210 A8.5	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.1dB at 4924.00MHz
15.247(d)	RSS-210 A8.5	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	RSS-210 A8.2 (a)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	RSS-210 A8.2 (4)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	RSS-210 A8.2 (b)	Power Spectral Density	PASS	Meet the requirement of limit.
-	RSS-Gen 4.6	Occupied Bandwidth Measurement	-	Meet the requirement
15.203	-	Antenna Requirement	PASS	No antenna connector is used.



A D T

For 5GHz, 5725~5850MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247) ; RSS-210; RSS-Gen				
STANDARD SECTION		TEST TYPE	RESULT	REMARK
FCC Part 15	RSS-210; RSS-Gen			
15.207	RSS-Gen 7.2.4	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.49dB at 0.1500MHz
15.247(d) 15.209	RSS-210 A8.5	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -4.3dB at 11650.00MHz & 11590.00MHz
15.247(d)	RSS-210 A8.5	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	RSS-210 A8.2 (a)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	RSS-210 A8.2 (4)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	RSS-210 A8.2 (b)	Power Spectral Density	PASS	Meet the requirement of limit.
-	RSS-Gen 4.6	Occupied Bandwidth Measurement	-	Meet the requirement.
15.203	-	Antenna Requirement	PASS	No antenna connector is used.

NOTE: The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.35GHz, 5.47~5.6GHz & 5.65~5.725GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2400 ~ 2483.5MHz and 5.725~5.850GHz. For the 5.15~5.35GHz, 5.47~5.6GHz & 5.65~5.725GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.59 dB
Radiated emissions (1GHz -6GHz)	3.54 dB
Radiated emissions (6GHz -18GHz)	4.08 dB
Radiated emissions (18GHz -40GHz)	4.11 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11a/b/g/n 2x2 WLAN card
MODEL NO.	CUS227
POWER SUPPLY	DC 3.3V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n : up to 300Mbps
OPERATING FREQUENCY	For 15.407 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.5~5.58GHz & 5.66~5.7GHz
	For 15.247 2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 16 for 802.11a, 802.11n (HT20) 7 for 802.11n (HT40)
	For 15.247(2.4GHz) 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
	For 15.247(5GHz) 5 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40)
MAXIMUM OUTPUT POWER	For 15.407 802.11a: 190.003mW 802.11n (HT20): 185.792mW 802.11n (HT40): 120.049mW For 15.247(2.4GHz) 802.11b: 121.264mW 802.11g: 243.414mW 802.11n (HT20): 239.950mW 802.11n (HT40): 118.997mW For 15.247(5GHz) 802.11a: 379.385mW 802.11n (HT20): 379.840mW 802.11n (HT40): 336.788mW

ANTENNA TYPE	See item 3.2
ANTENNA CONNECTOR	See item 3.2
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is a 2.4GHz & 5GHz WLAN device.
2. The EUT is 2 * 2 MIMO with 802.11n beam forming function.

MODULATION MODE	TX/RX FUNCTION
802.11b	2TX/2RX
802.11g	2TX/2RX
802.11a	2TX/2RX
802.11n (HT20)	2TX/2RX
802.11n (HT40)	2TX/2RX

The maximum compliance powers listed on the report are compliance with both Beam Forming and non-Beam Forming configurations.

3. 2.4GHz and 5GHz technology cannot transmit at same time.
4. The EUT was pre-tested under the following modes:

Test Mode	Data rate
Mode A	400ns GI
Mode B	800ns GI

From the above modes, the worst case was found in **Mode B**. Therefore only the test data of the mode was recorded in this report.

5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF ANTENNA

The antenna provided to the EUT, please refer to the following table:

Brand	Model	Antenna Type	Antenna gain 2.4G(dBi)	Antenna gain 5G(dBi)	Connector Type
Qualcomm	CUS227 V03-2	Integrated PCB antenna	2	3	NA



A D T

3.3 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



A D T

Operated in 5725 ~ 5850MHz band:

5 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY
151	5755 MHz
159	5795 MHz



A D T

3.3.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	UE < 1G	UE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: AC Power Line Conducted Emission **UE < 1G**: Unwanted Emission below 1GHz
UE ≥ 1G: Unwanted Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: The EUT's antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

AC POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	6
For 5 GHz 802.11n (HT20)	149 to 165	149	OFDM	6.5

UNWANTED EMISSION TEST (BELOW 1 GHz):

- Radiated versus Conducted Measurements
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	6
For 5 GHz 802.11n (HT20)	149 to 165	149	OFDM	6.5

UNWANTED EMISSION TEST (ABOVE 1 GHz):

- Radiated versus Conducted Measurements
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1
802.11g	1 to 11	1, 6, 11	OFDM	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	13.5
802.11a	149 to 165	149, 157, 165	OFDM	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1
802.11g	1 to 11	1, 2, 6, 10, 11	OFDM	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 2, 6, 10, 11	OFDM	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	13.5
802.11a	149 to 165	149, 157, 165	OFDM	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	13.5



A D T

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1
802.11g	1 to 11	1, 6, 11	OFDM	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	13.5
802.11a	149 to 165	149, 157, 165	OFDM	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	20deg. C, 70%RH	120Vac, 60Hz	Mike Hsieh
UE<1G	23deg. C, 66%RH	120Vac, 60Hz	Robert Cheng
UE ³ 1G	25deg. C, 65%RH	120Vac, 65Hz	Nelson Teng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Amos Chuang
OB	25deg. C, 60%RH	120Vac, 60Hz	Amos Chuang

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

Canada RSS-210 Issue 8 (2010-12)

Canada RSS-Gen Issue 3 (2010-12)

558074 D01 DTS Meas Guidance v03r01

662911 D01 Multiple Transmitter Output v01 r02

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.



A D T

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER (For conducted emission test)	DELL	PP32LA	GSLB32S	FCC DoC
	NOTEBOOK COMPUTER (For other test items)	DELL	PP27L	7YLB32S	FCC DoC
2	EXTENSION CARD	Qualcomm Atheros	PB124	NA	NA
3	Adapter	JENTEC TECHNOLOG Y CO.,LTD.	CF1205-B	795558	NA

No.	Signal cable description
1	UTP cable(10m)
2	NA
3	DC line (1.5m)

Note: The power cords of the above support units were unshielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST


For conducted emission test

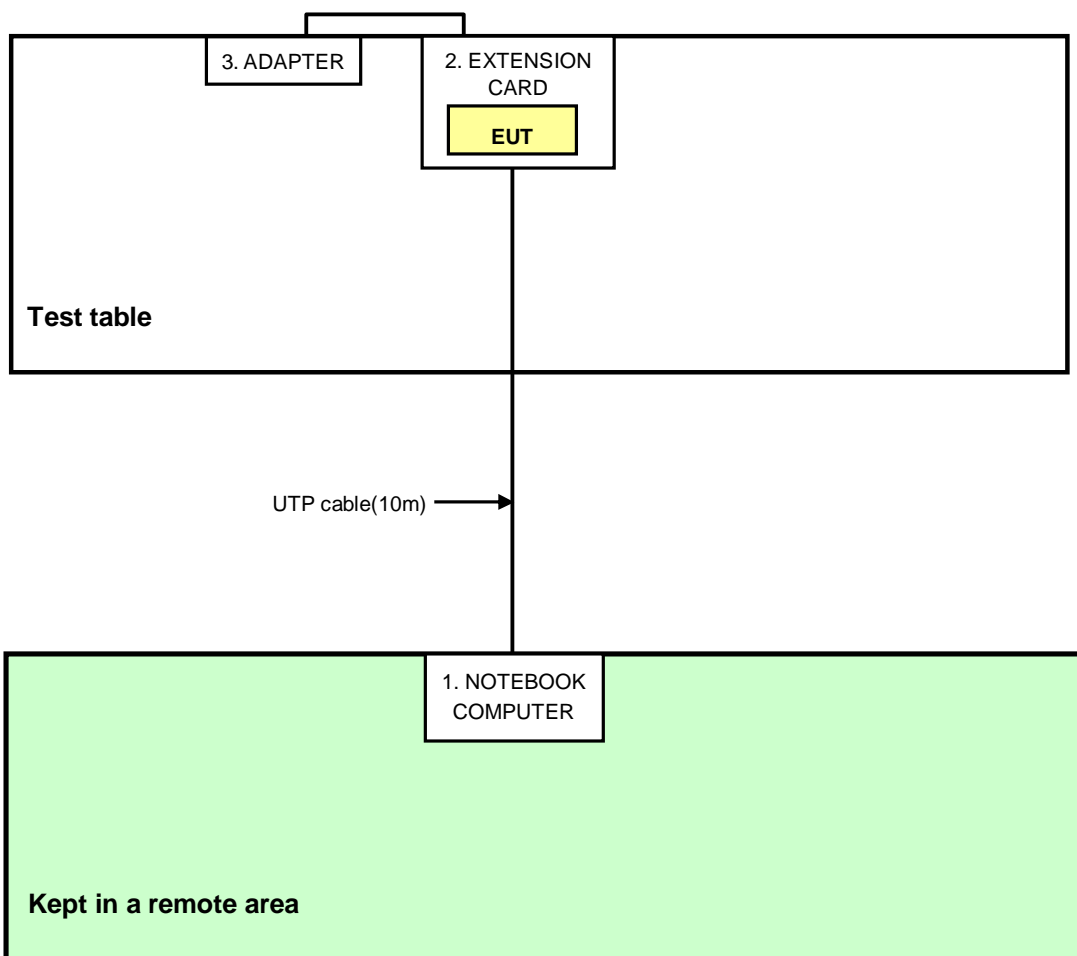



A D T

For other test items

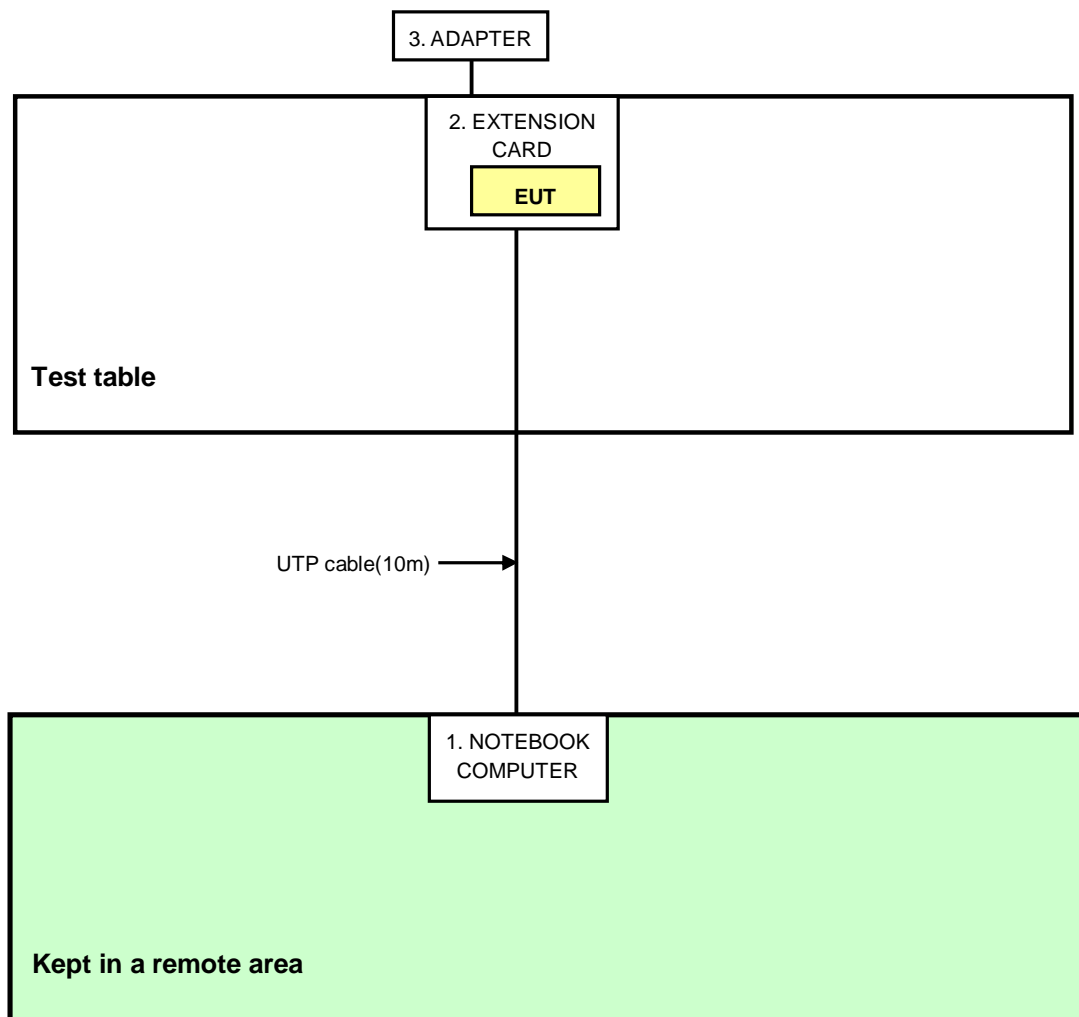

4. TEST TYPES AND RESULTS (FOR 2.4GHz, 2400 ~ 2483.5MHz Band)

4.1 CONDUCTED OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT \geq 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.1.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 19, 2013


4.1.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

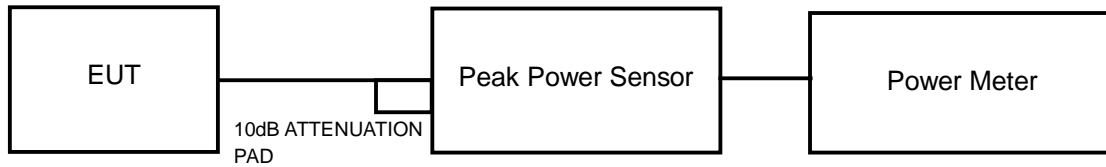

4.1.6 EUT OPERATING CONDITIONS

The software (Atheros Radio test 2_Version:2.3) provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.1.7 TEST RESULTS

802.11b

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	16.78	18.67	121.264	20.84	30	PASS
6	2437	17.01	18.19	116.151	20.65	30	PASS
11	2462	16.77	17.88	108.910	20.37	30	PASS

NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11g

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	18.04	17.79	123.797	20.93	30	PASS
6	2437	20.33	21.32	243.414	23.86	30	PASS
11	2462	16.81	16.45	92.130	19.64	30	PASS

NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.



A D T

802.11n (HT20)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	16.37	17.24	96.317	19.84	30	PASS
6	2437	20.29	21.24	239.950	23.80	30	PASS
11	2462	16.37	16.34	86.404	19.37	30	PASS

NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11n (HT40)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	14.71	14.81	59.849	17.77	30	PASS
6	2437	17.73	17.76	118.997	20.76	30	PASS
9	2452	14.87	14.47	58.680	17.68	30	PASS

NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.



A D T

4.2 AVERAGE OUTPUT POWER

4.2.1 FOR REFERENCE.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 19, 2013

4.2.3 TEST PROCEDURES

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.2.4 TEST SETUP

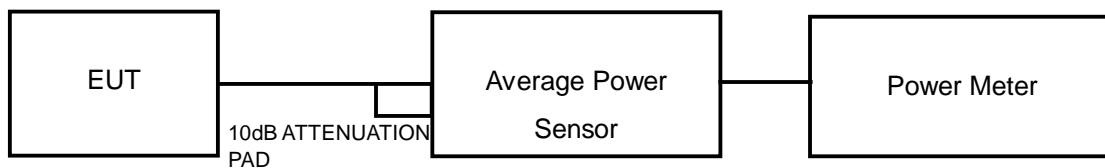

4.2.5 EUT OPERATING CONDITIONS

Same as Item 4.1.6



A D T

4.2.6 TEST RESULTS

802.11b

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	14.32	16.03	67.127	18.27
6	2437	14.34	15.52	62.809	17.98
11	2462	14.04	15.24	58.771	17.69

802.11g

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	11.96	11.21	28.917	14.61
6	2437	14.36	15.84	65.661	18.17
11	2462	10.21	9.77	19.979	13.01

802.11n (HT20)

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	10.22	10.73	22.350	13.49
6	2437	14.39	15.81	65.586	18.17
11	2462	9.93	9.84	19.478	12.90

802.11n (HT40)

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
3	2422	8.37	7.57	12.586	11.00
6	2437	11.75	11.74	29.890	14.76
9	2452	8.43	7.90	13.132	11.18

4.3 POWER SPECTRAL DENSITY MEASUREMENT

4.3.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 19, 2013


4.3.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITION


Same as Item 4.1.6

4.3.7 TEST RESULTS

802.11b

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-9.27	3.01	-6.26	8	PASS
	6	2437	-11.48	3.01	-8.47	8	PASS
	11	2462	-10.05	3.01	-7.04	8	PASS
1	1	2412	-6.90	3.01	-3.89	8	PASS
	6	2437	-7.35	3.01	-4.34	8	PASS
	11	2462	-7.58	3.01	-4.57	8	PASS


NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi , so the power density limit shall not be reduced.

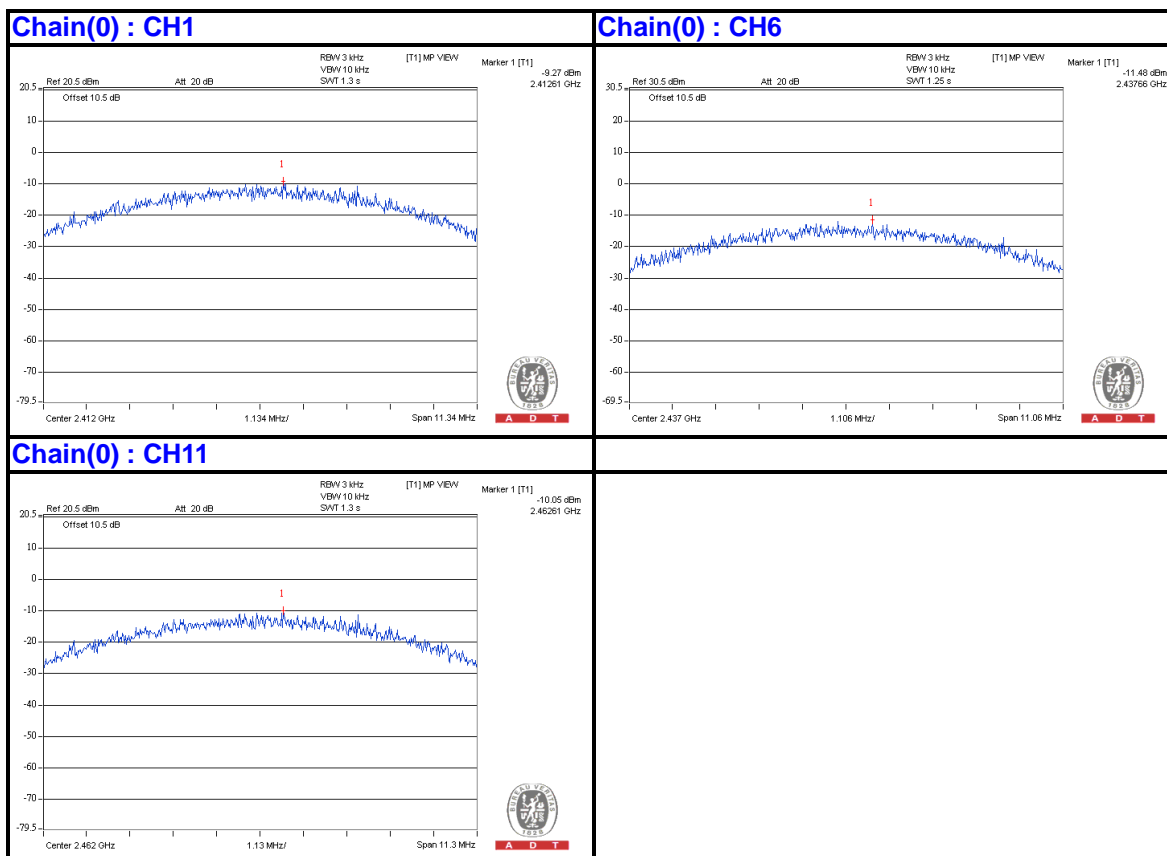




A D T


Chain(1) : CH1

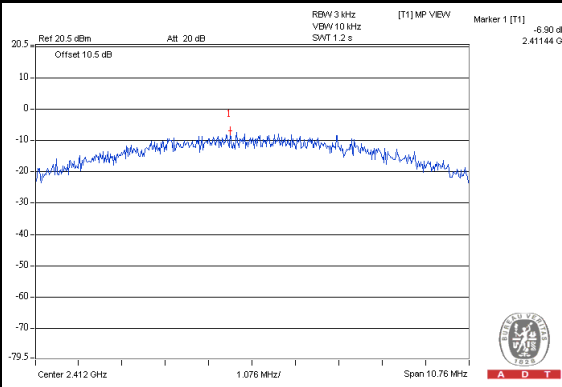

Chain(1) : CH6

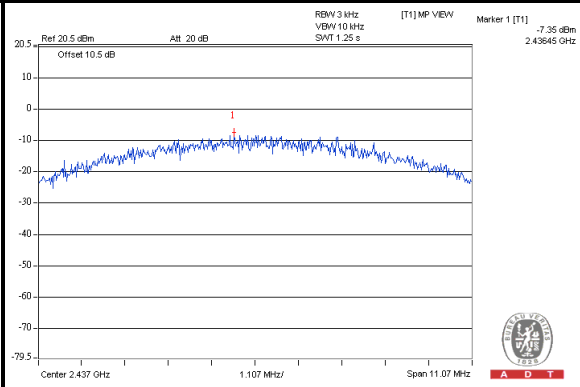

Chain(1) : CH11

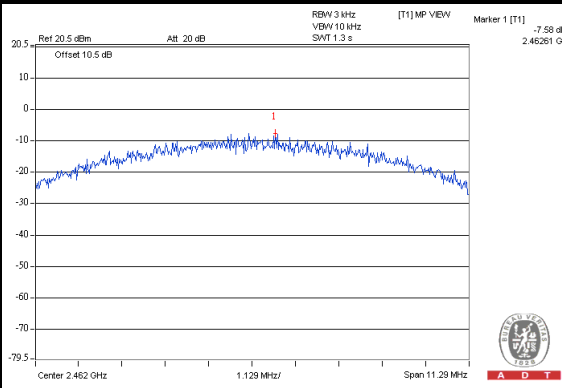




A D T

802.11g

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-15.23	3.01	-12.22	8	PASS
	6	2437	-13.07	3.01	-10.06	8	PASS
	11	2462	-16.72	3.01	-13.71	8	PASS
1	1	2412	-13.93	3.01	-10.92	8	PASS
	6	2437	-8.84	3.01	-5.83	8	PASS
	11	2462	-15.76	3.01	-12.75	8	PASS


NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi, so the power density limit shall not be reduced.

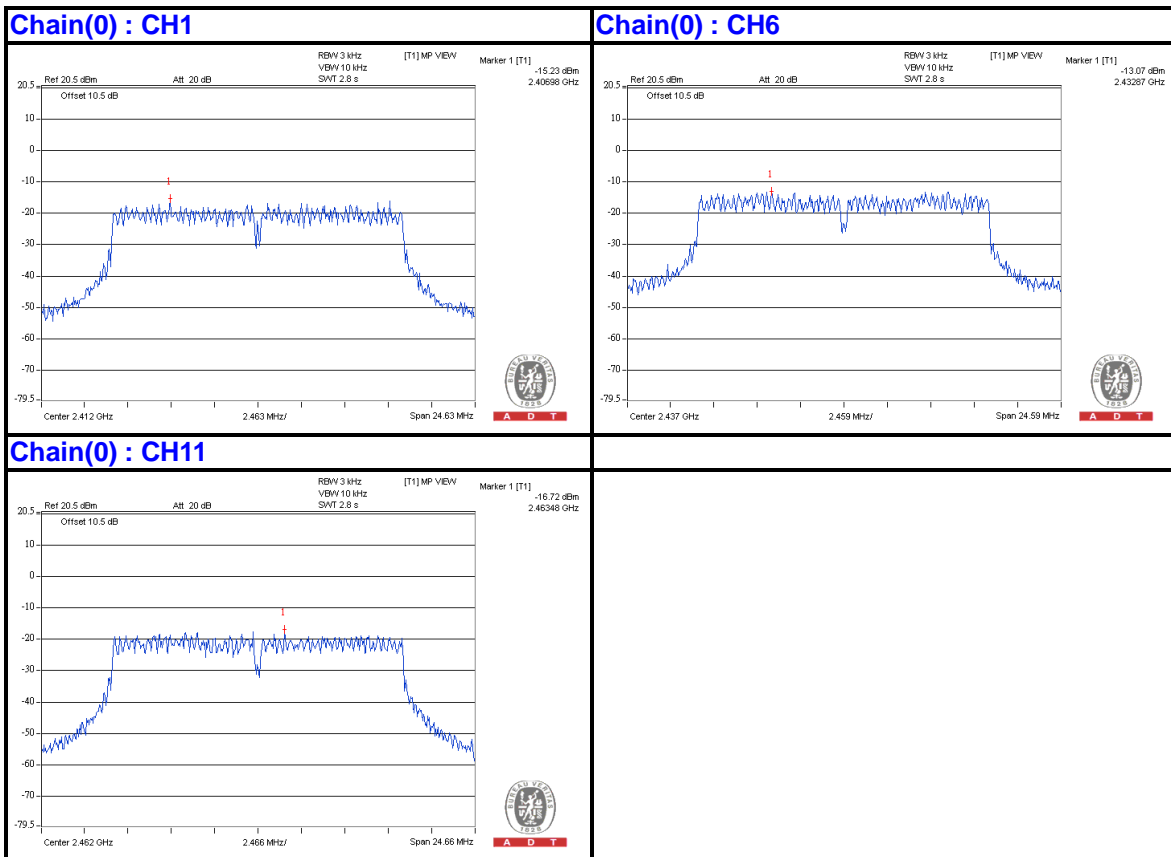




A D T


Chain(1) : CH1

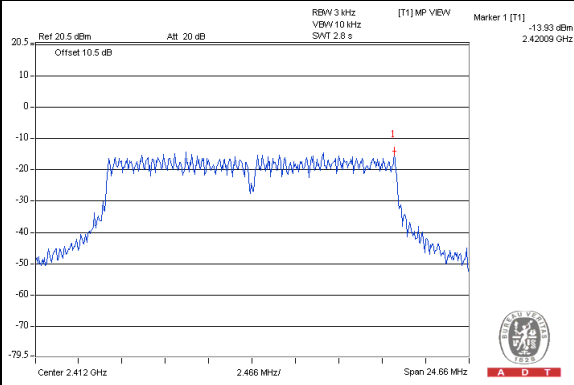

Chain(1) : CH6

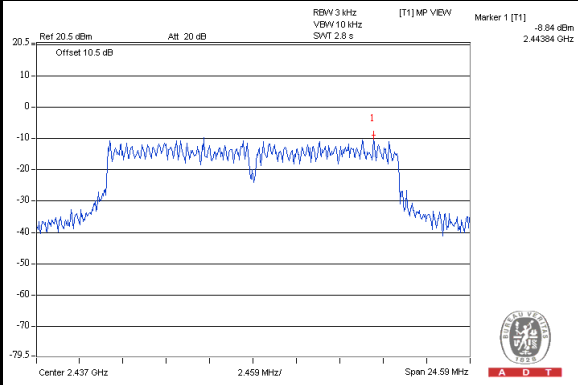

Chain(1) : CH11

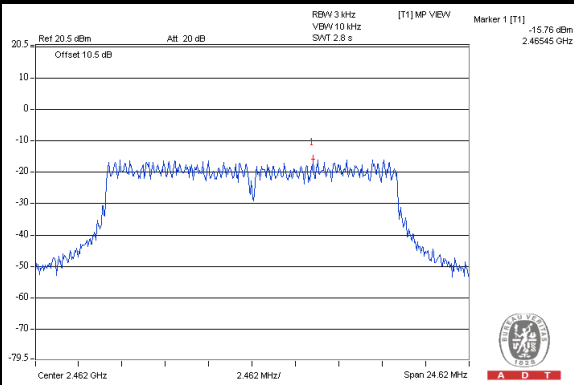




A D T

802.11n (HT20)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-17.37	3.01	-14.36	8	PASS
	6	2437	-12.94	3.01	-9.93	8	PASS
	11	2462	-18.73	3.01	-15.72	8	PASS
1	1	2412	-14.60	3.01	-11.59	8	PASS
	6	2437	-10.75	3.01	-7.74	8	PASS
	11	2462	-15.77	3.01	-12.76	8	PASS


NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi , so the power density limit shall not be reduced.

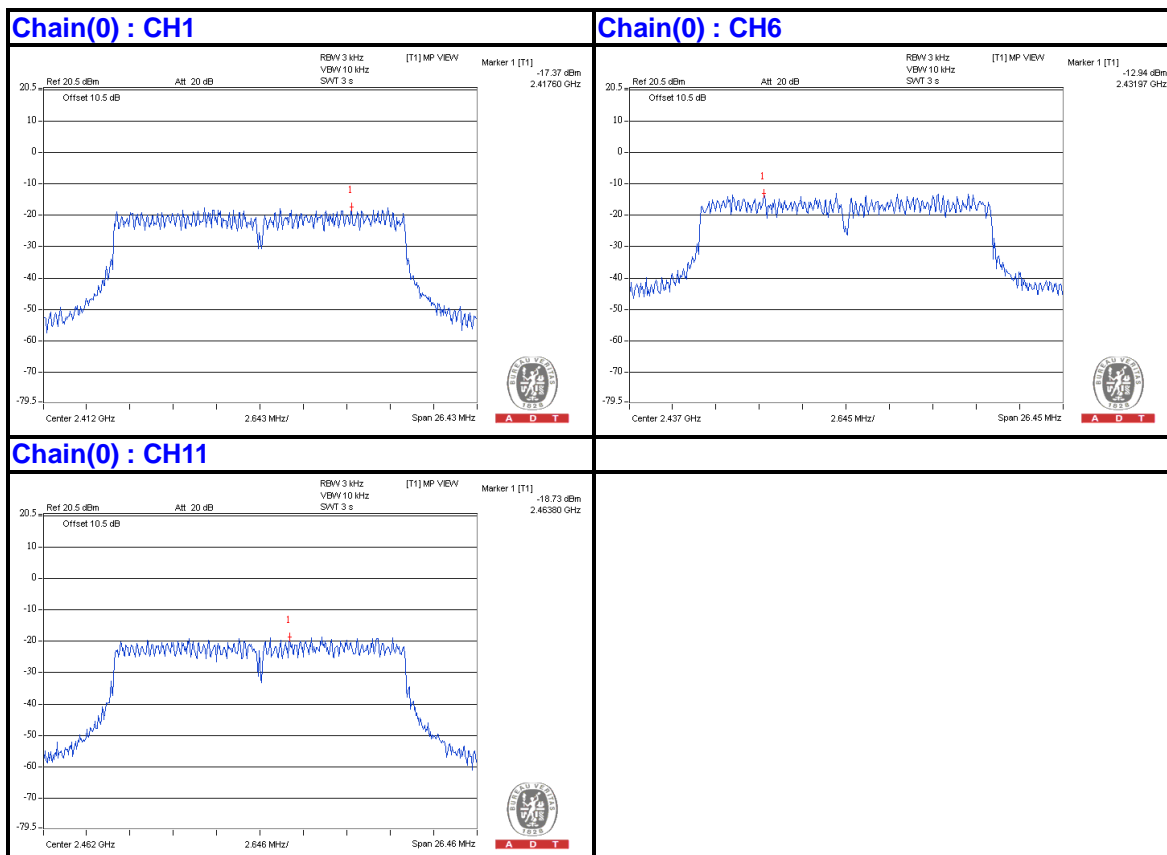




A D T


Chain(1) : CH1

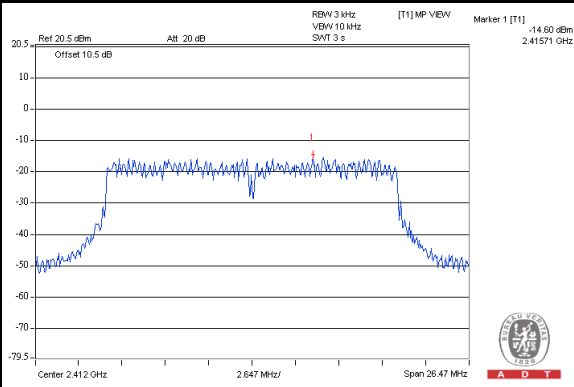

Chain(1) : CH6

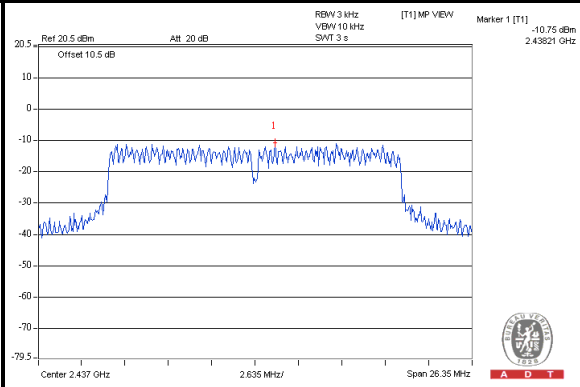

Chain(1) : CH11

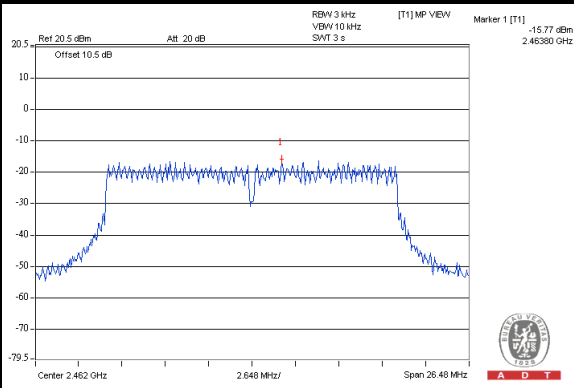




A D T

802.11n (HT40)


TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-19.72	3.01	-16.71	8	PASS
	6	2437	-17.54	3.01	-14.53	8	PASS
	9	2452	-20.05	3.01	-17.04	8	PASS
1	3	2422	-19.43	3.01	-16.42	8	PASS
	6	2437	-16.65	3.01	-13.64	8	PASS
	9	2452	-18.38	3.01	-15.37	8	PASS

NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi, so the power density limit shall not be reduced.


Chain(0) : CH3

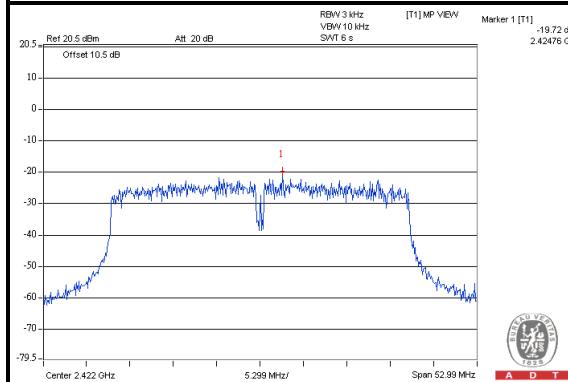

Chain(0) : CH6

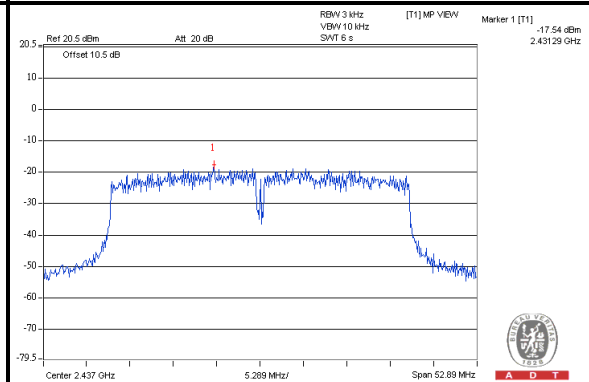


Chain(0) : CH9

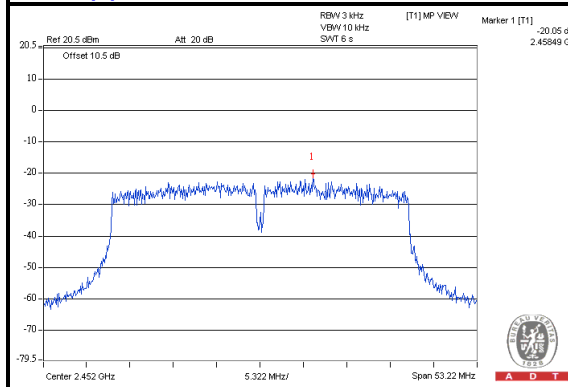




A D T


Chain(1) : CH3

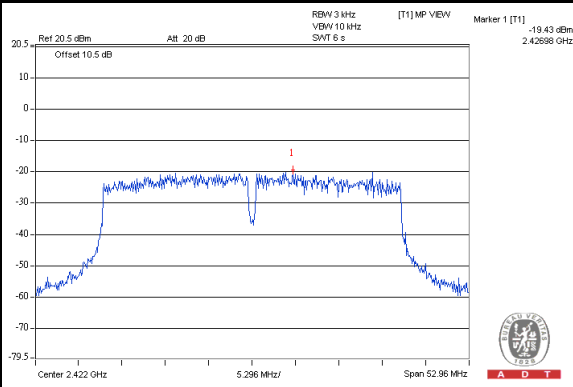

Chain(1) : CH6

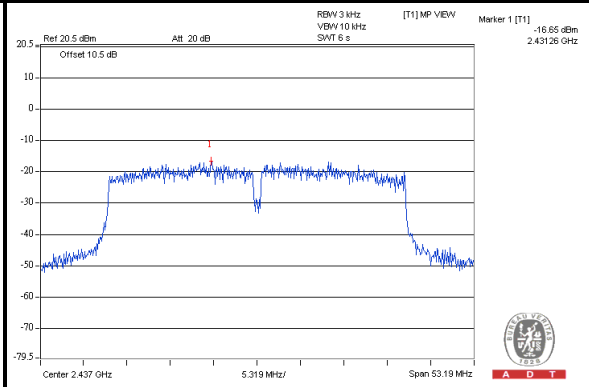

Chain(1) : CH9

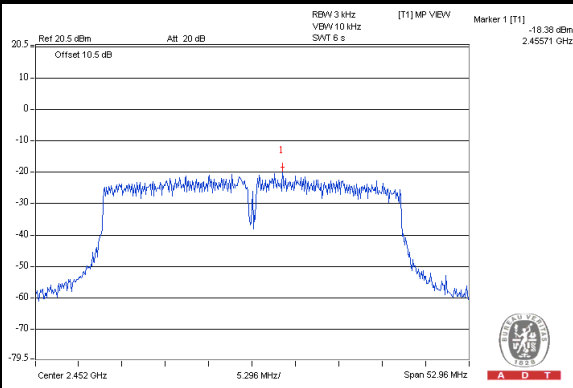

4.4 6dB BANDWIDTH MEASUREMENT

4.4.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 11, 2013


4.4.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP




4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.1.6

4.4.7 TEST RESULTS

802.11b


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	7.56	7.18	0.5	PASS
6	2437	7.37	7.38	0.5	PASS
11	2462	7.54	7.53	0.5	PASS

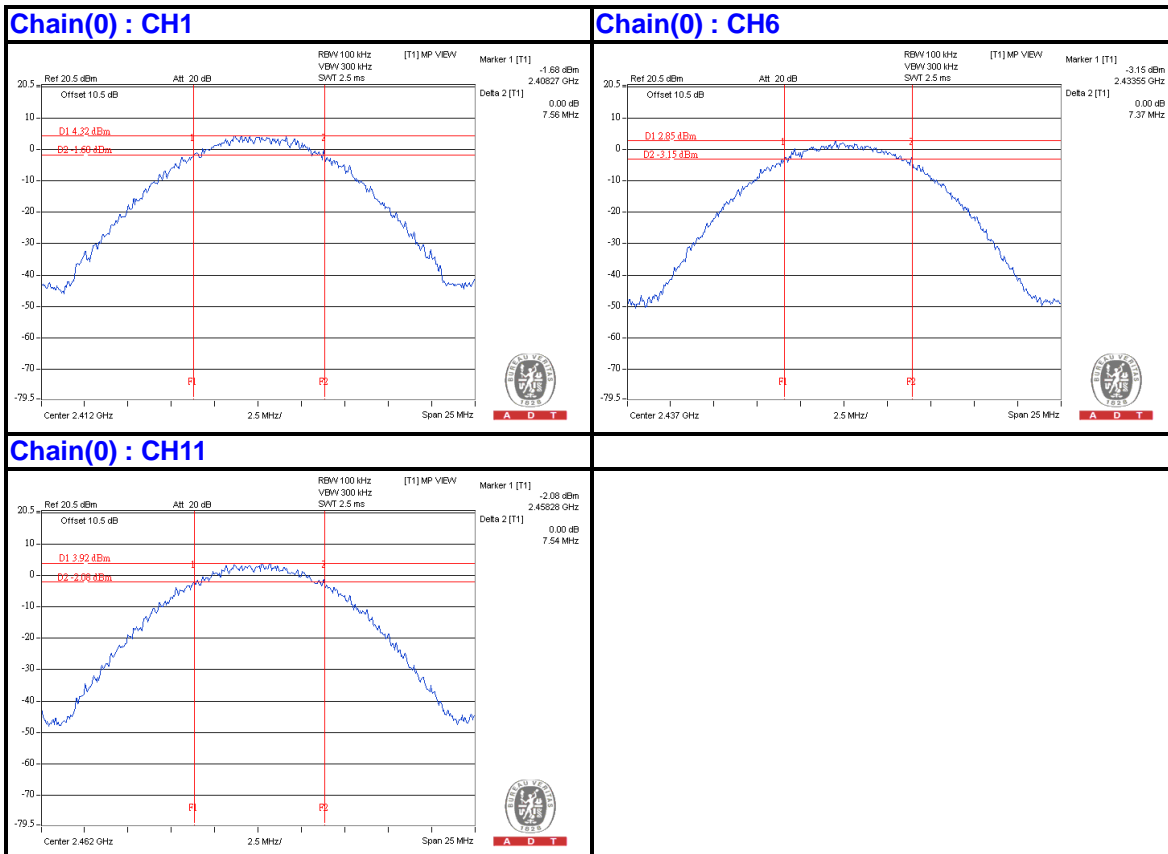




A D T


Chain(1) : CH1

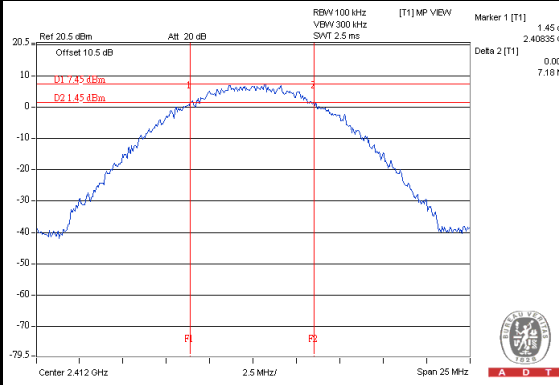

Chain(1) : CH6

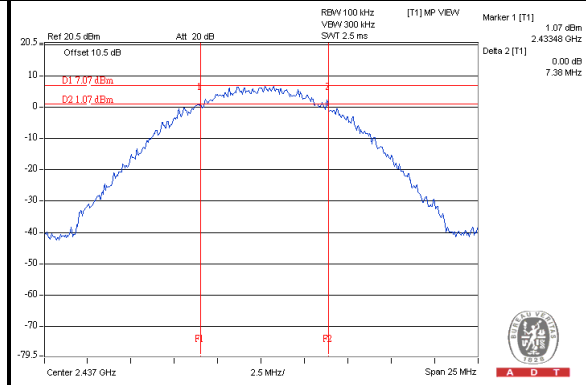

Chain(1) : CH11

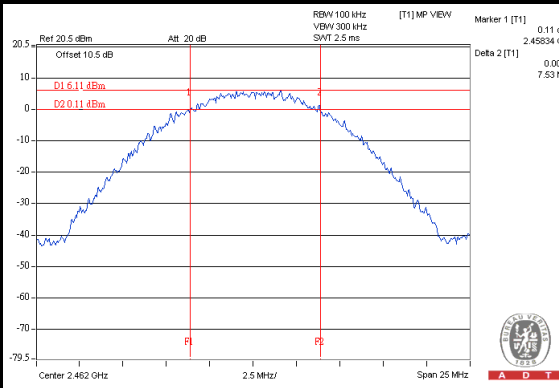




A D T


802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.43	16.44	0.5	PASS
6	2437	16.40	16.40	0.5	PASS
11	2462	16.44	16.42	0.5	PASS


Chain(0) : CH1

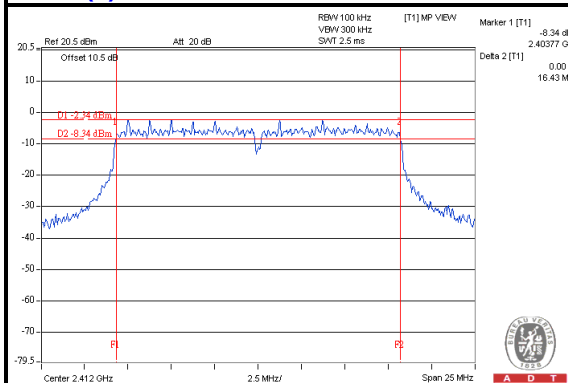

Chain(0) : CH6

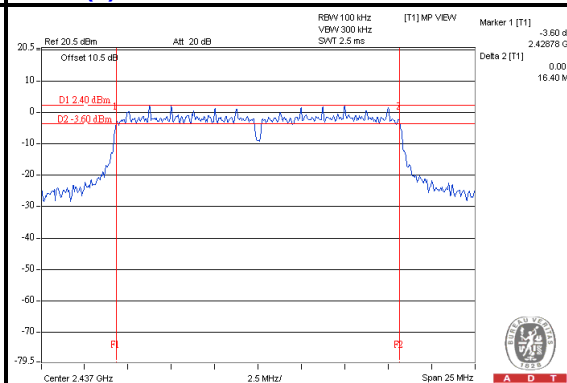


Chain(0) : CH11

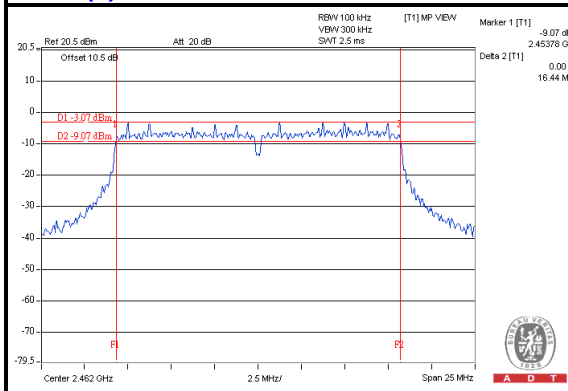




A D T


Chain(1) : CH1

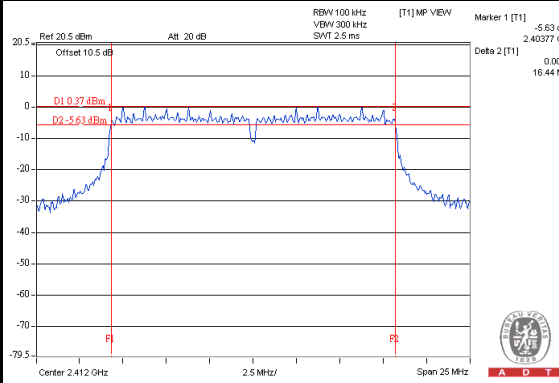

Chain(1) : CH6

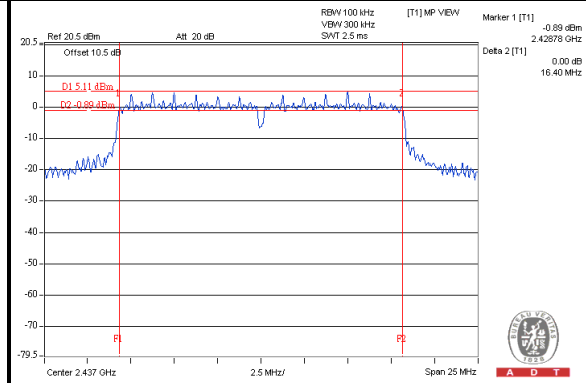

Chain(1) : CH11

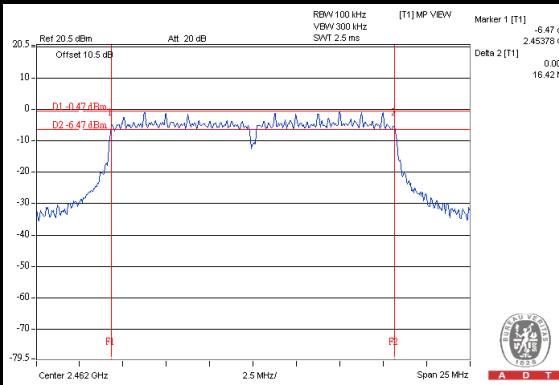




A D T


802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.62	17.65	0.5	PASS
6	2437	17.63	17.57	0.5	PASS
11	2462	17.64	17.66	0.5	PASS


Chain(0) : CH1

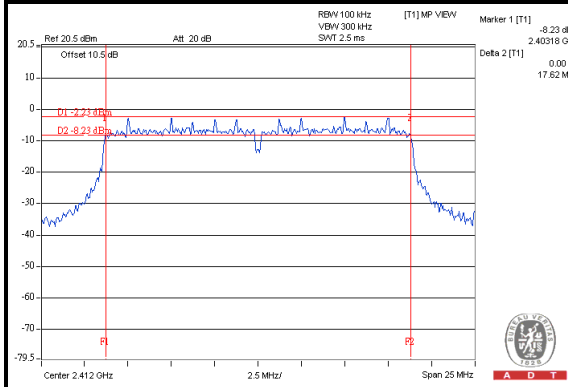

Chain(0) : CH6

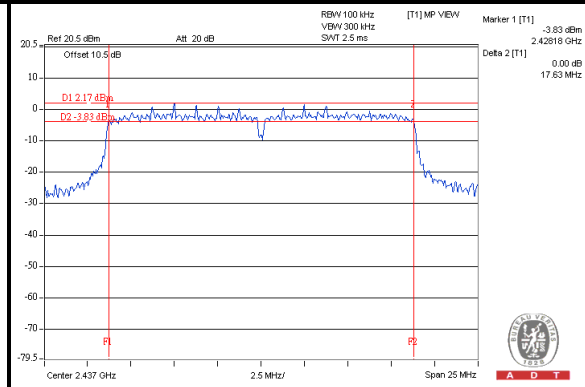


Chain(0) : CH11

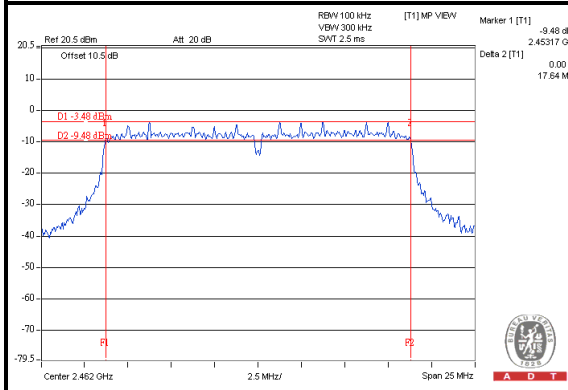




A D T


Chain(1) : CH1

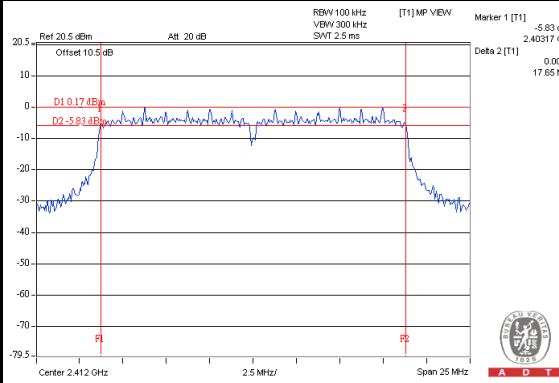

Chain(1) : CH6

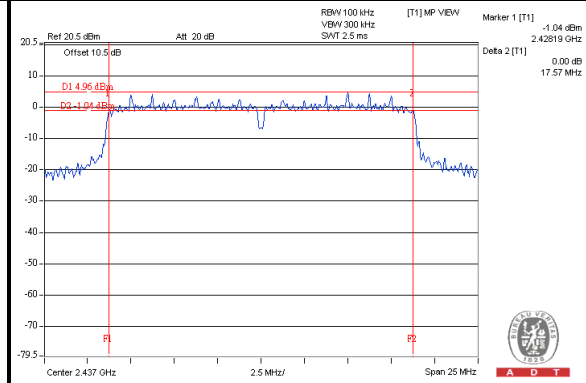

Chain(1) : CH11

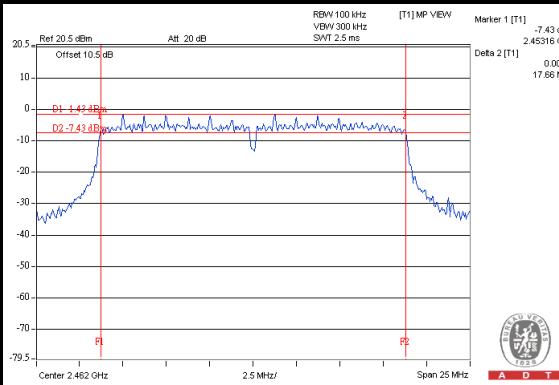




A D T


802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	35.33	35.31	0.5	PASS
6	2437	35.27	35.47	0.5	PASS
9	2452	35.49	35.31	0.5	PASS


Chain(0) : CH3

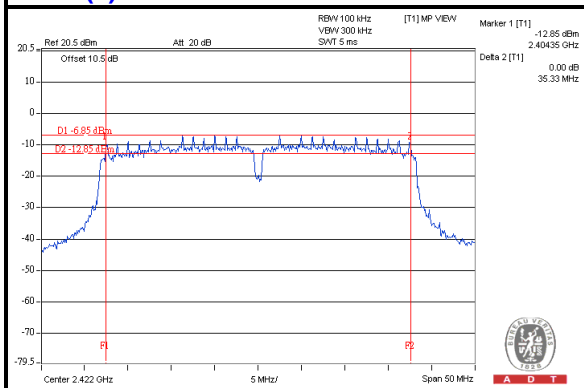

Chain(0) : CH6

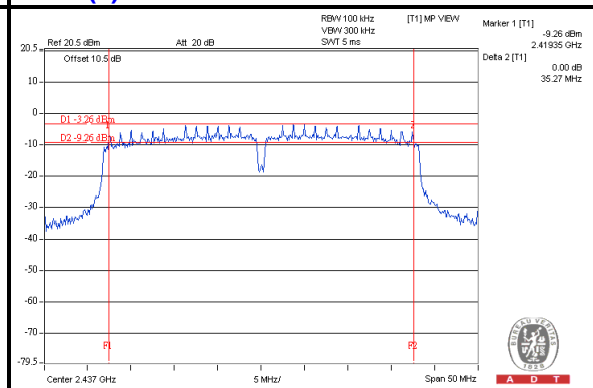


Chain(0) : CH9

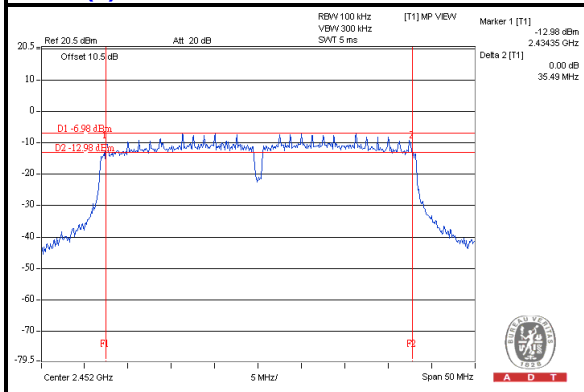




A D T


Chain(1) : CH3

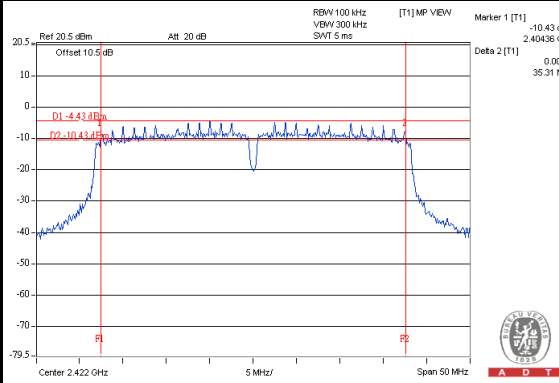

Chain(1) : CH6

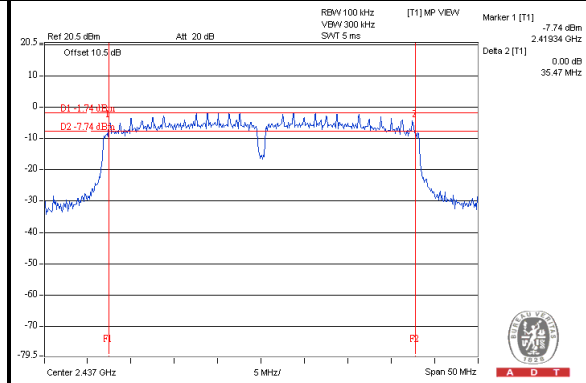

Chain(1) : CH9

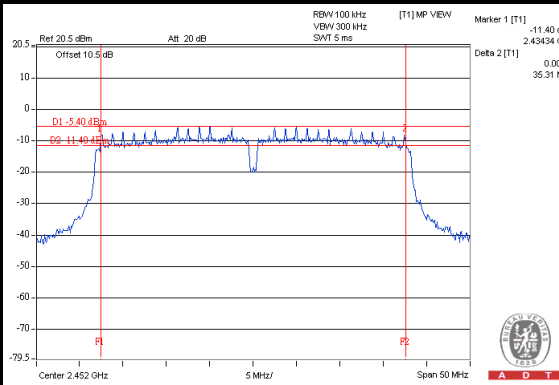

4.5 OCCUPIED BANDWIDTH MEASUREMENT

4.5.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 11, 2013

4.5.2 TEST PROCEDURE

- 1) Set RBW \geq 1% of the emission bandwidth.
- 2) Set the VBW \geq 3 x RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Record the 99% emission bandwidth.

4.5.3 TEST SETUP

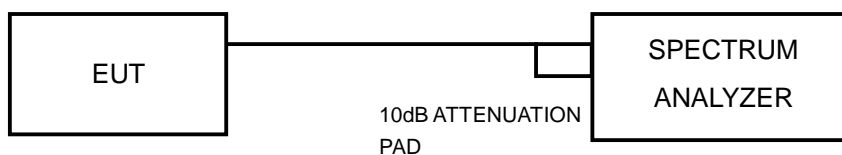

4.5.4 EUT OPERATING CONDITIONS

Same as Item 4.1.6




A D T

4.5.5 TEST RESULTS


802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	
		CHAIN(0)	CHAIN(1)
1	2412	12.00	12.00
6	2437	11.76	12.12
11	2462	11.88	12.12


Chain(0) : CH1

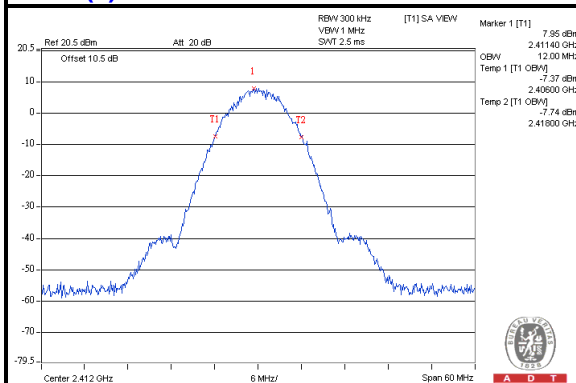

Chain(0) : CH6

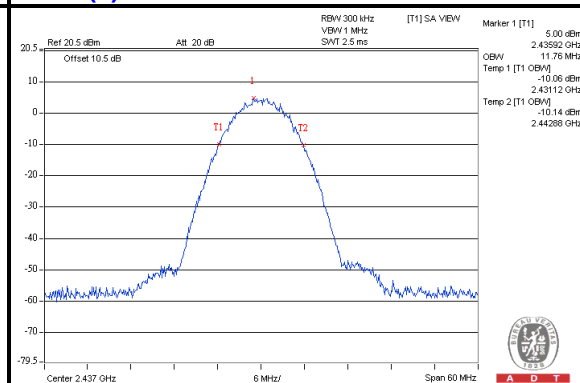


Chain(0) : CH11

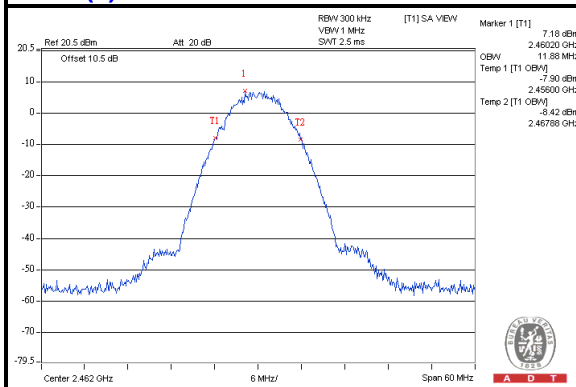




A D T


Chain(1) : CH1

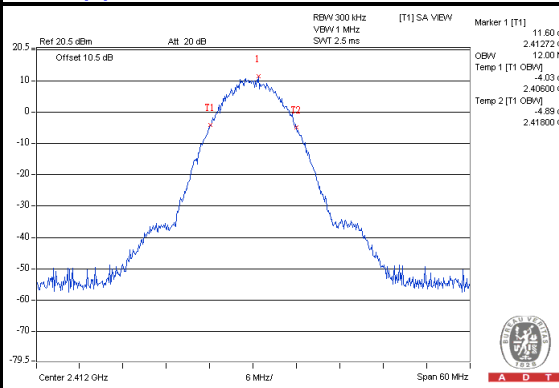

Chain(1) : CH6

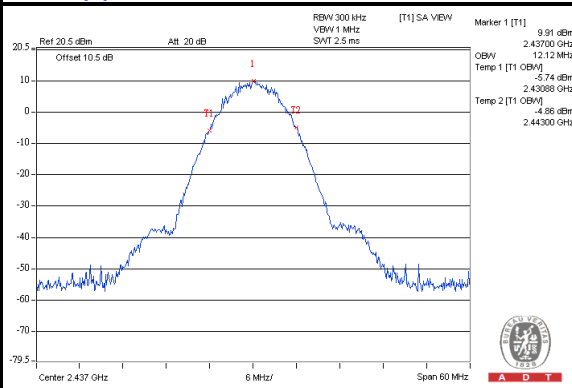

Chain(1) : CH11

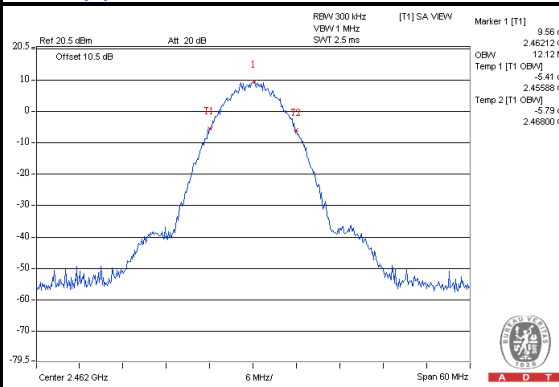




A D T


802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	
		CHAIN(0)	CHAIN(1)
1	2412	16.68	16.68
6	2437	16.92	17.52
11	2462	16.68	16.68


Chain(0) : CH1

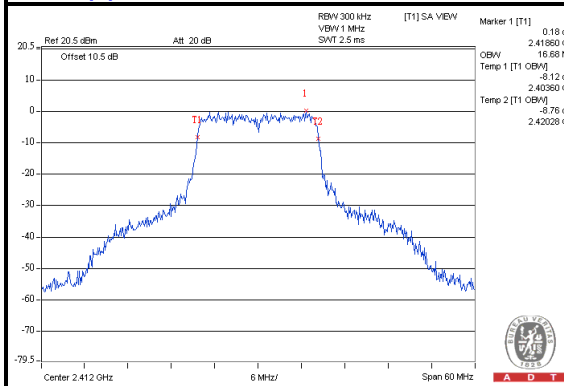

Chain(0) : CH6

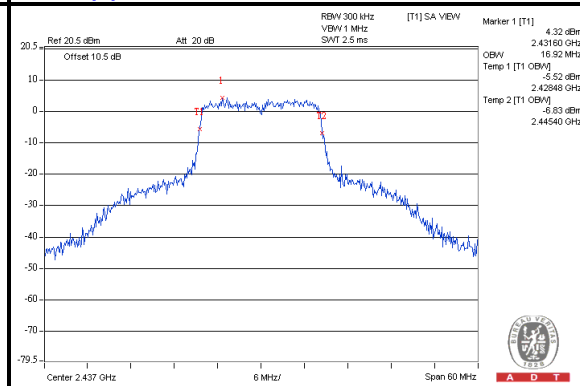


Chain(0) : CH11

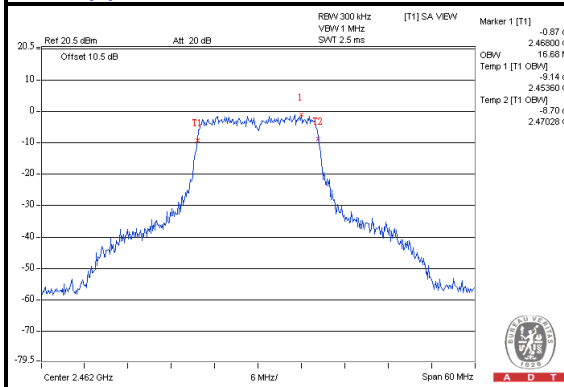




A D T


Chain(1) : CH1

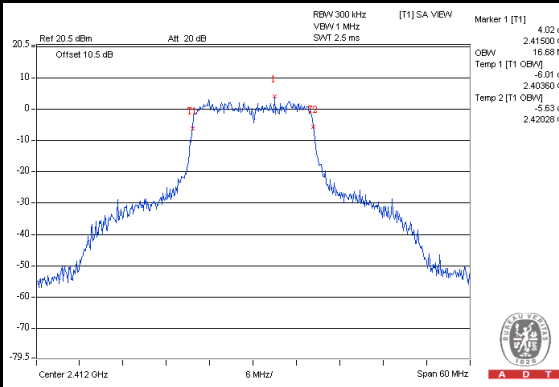

Chain(1) : CH6

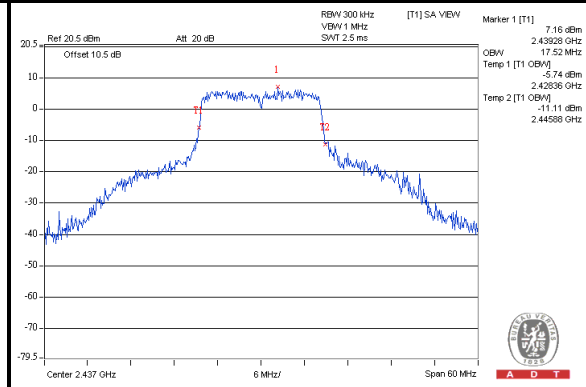

Chain(1) : CH11

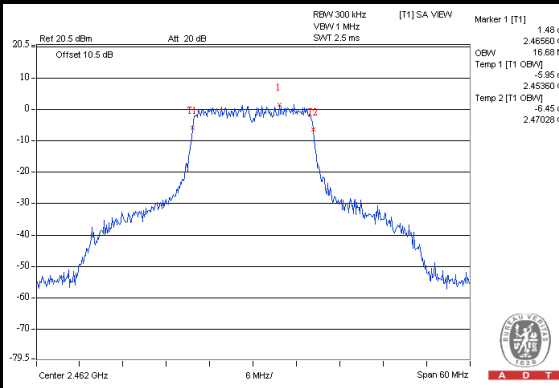




A D T


802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	
		CHAIN(0)	CHAIN(1)
1	2412	17.88	17.88
6	2437	18.00	18.36
11	2462	17.88	17.88


Chain(0) : CH1

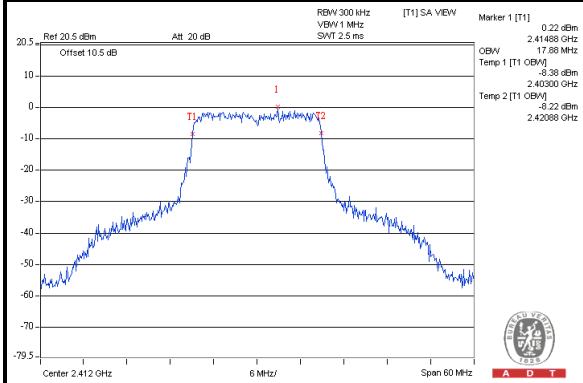

Chain(0) : CH6

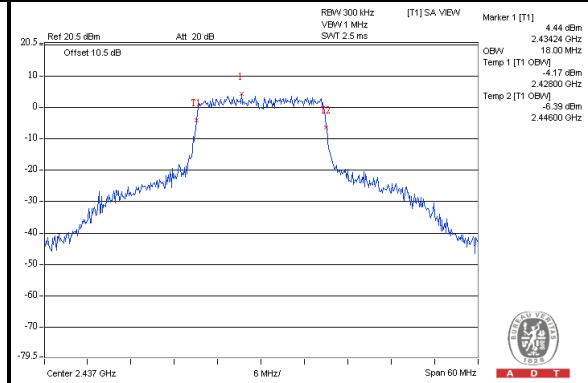


Chain(0) : CH11

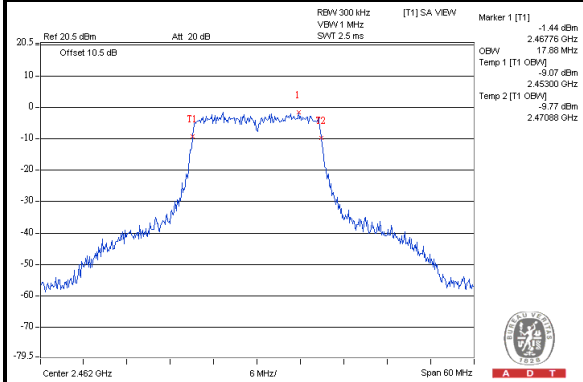




A D T


Chain(1) : CH1

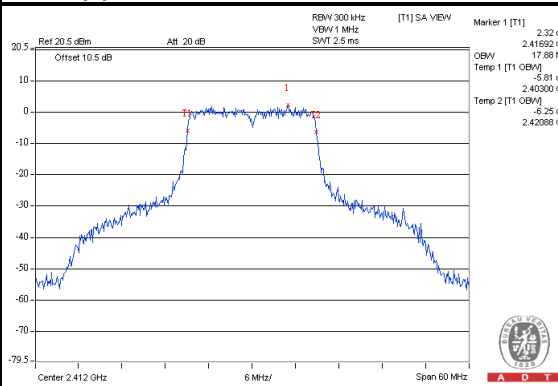

Chain(1) : CH6

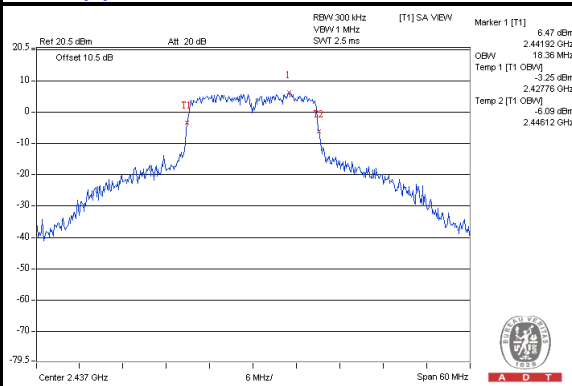

Chain(1) : CH11

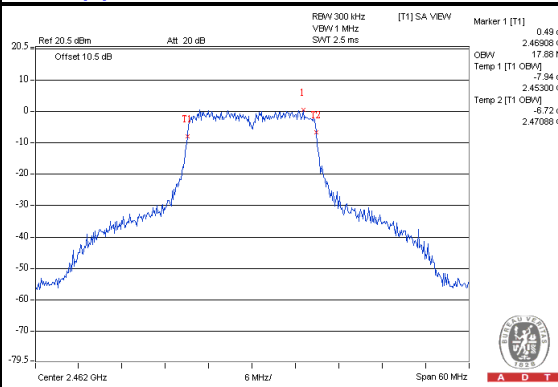




A D T


802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	
		CHAIN(0)	CHAIN(1)
3	2422	36.40	36.40
6	2437	37.00	36.80
9	2452	36.40	36.40


Chain(0) : CH3

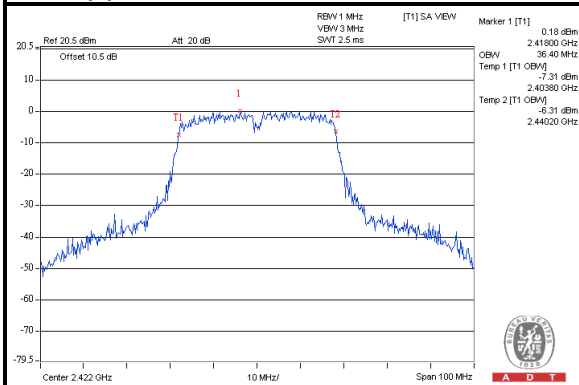

Chain(0) : CH6

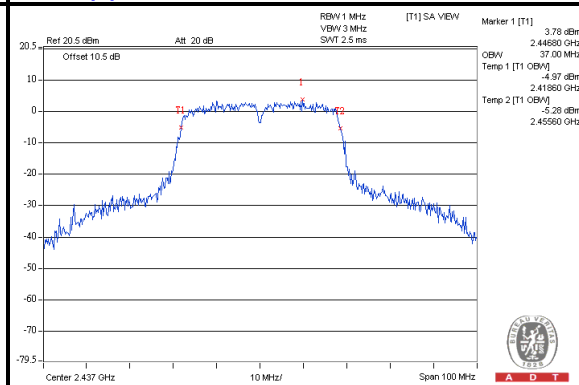


Chain(0) : CH9

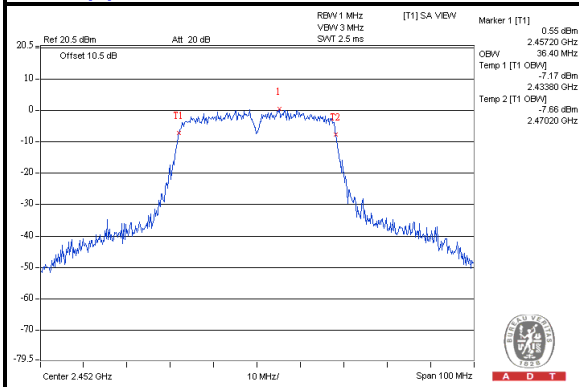




A D T


Chain(1) : CH3

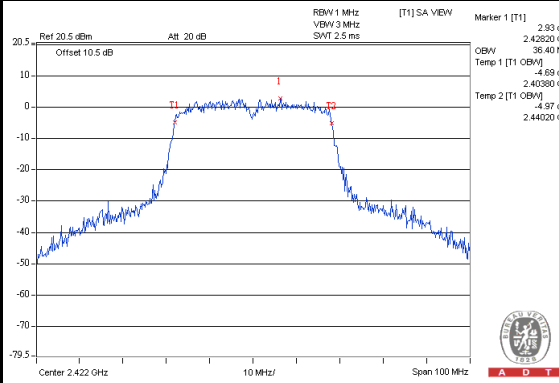

Chain(1) : CH6

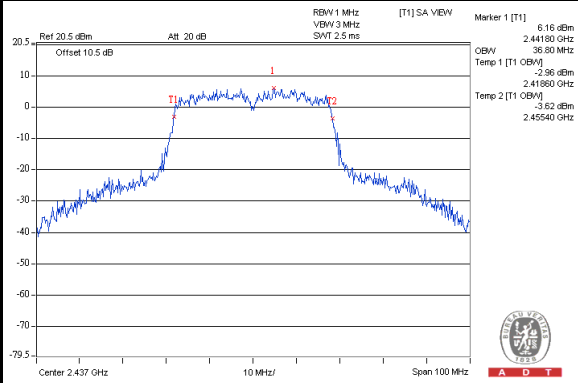

Chain(1) : CH9

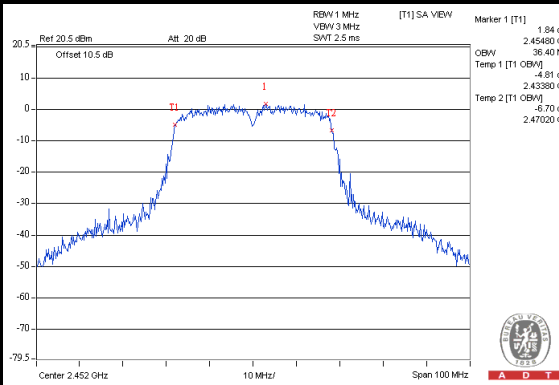

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 11, 2013

4.6.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.1.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b


Chain(0) : CH 1

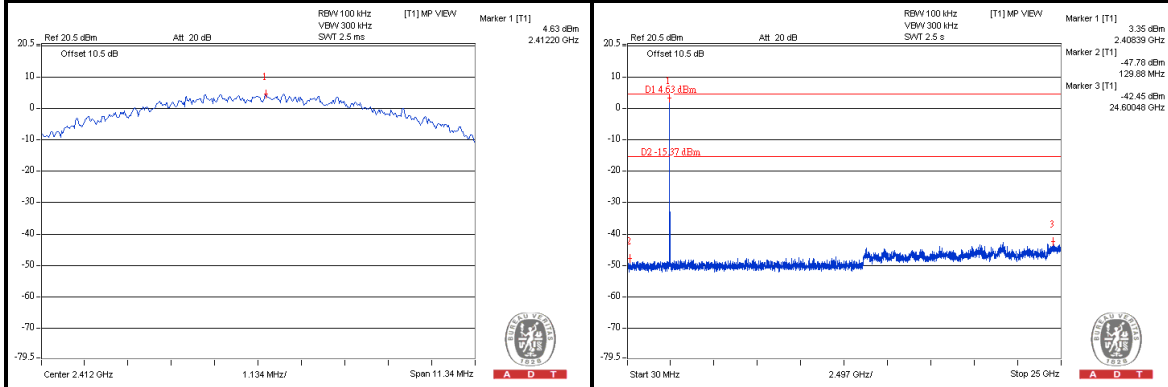

Chain(0) : CH 6

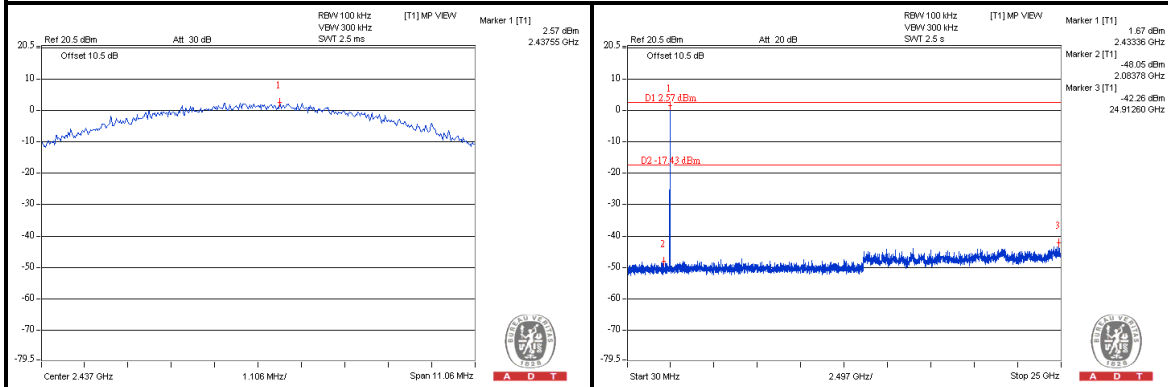

Chain(0) : CH 11


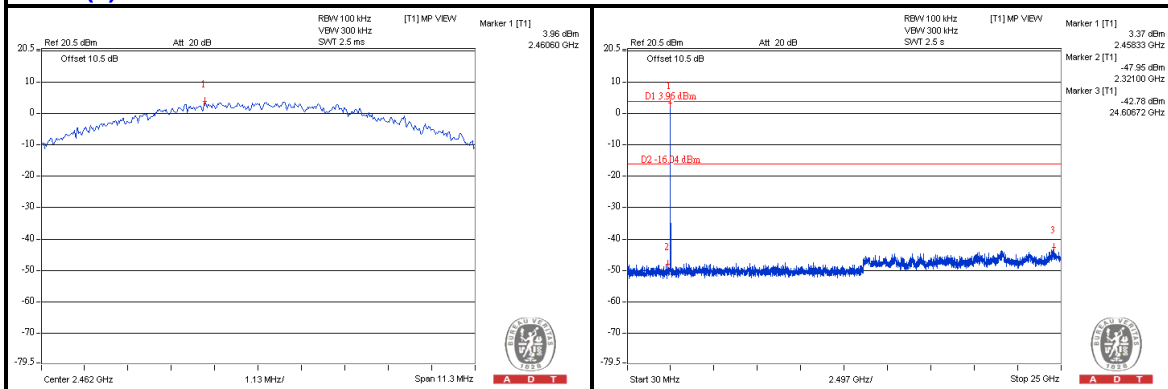






A D T

802.11b



Chain(1) : CH 1

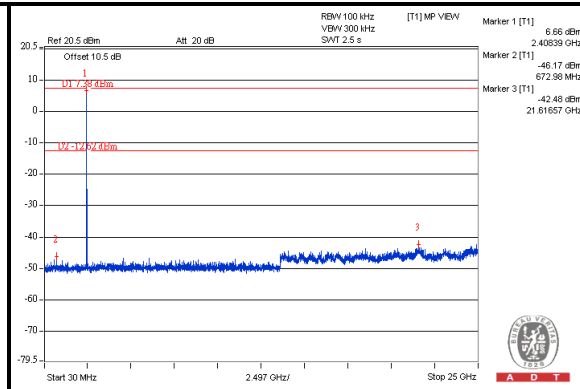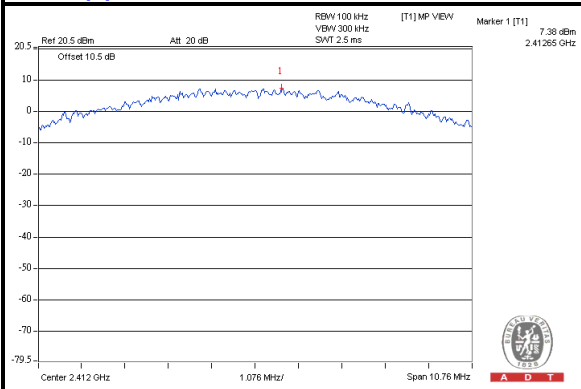

Chain(1) : CH 6

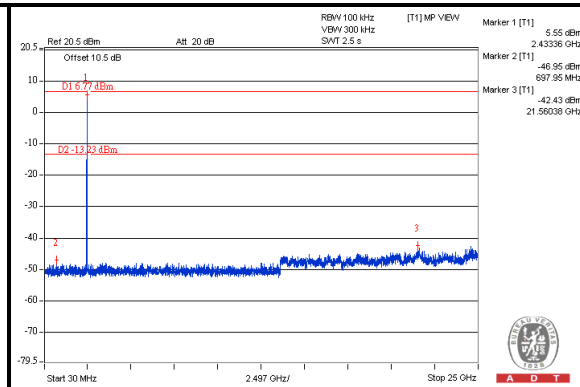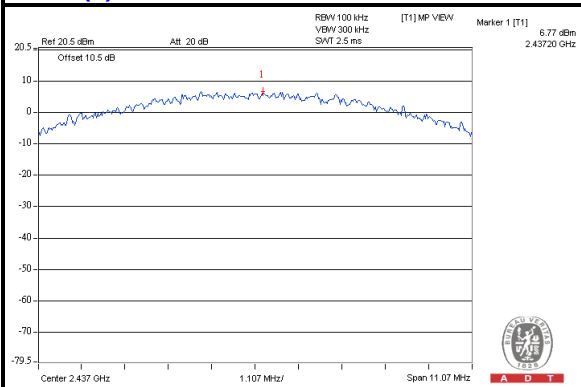

Chain(1) : CH 11

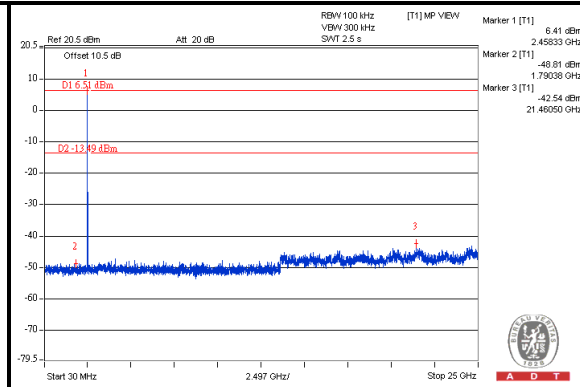
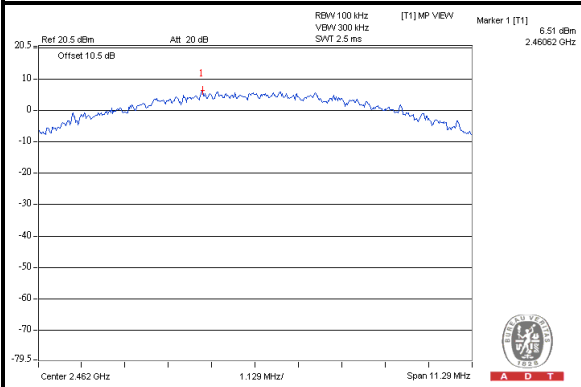






A D T

802.11g



Chain(0) : CH 1

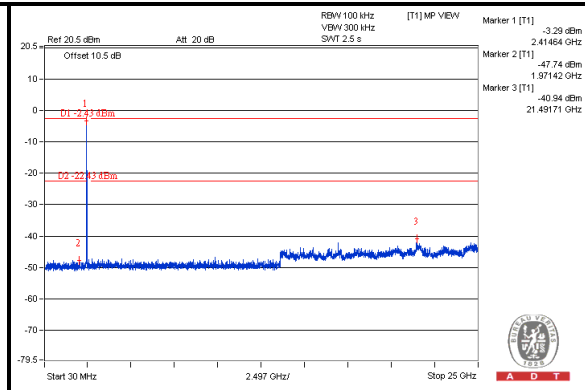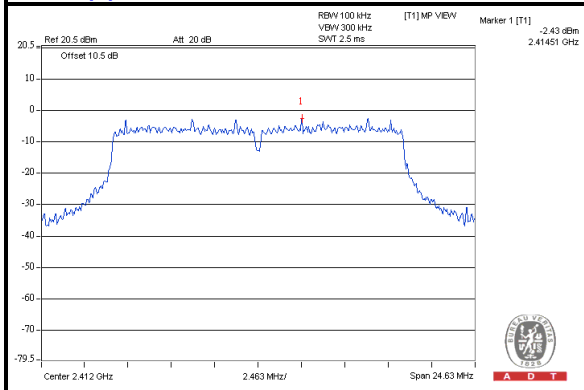

Chain(0) : CH 6

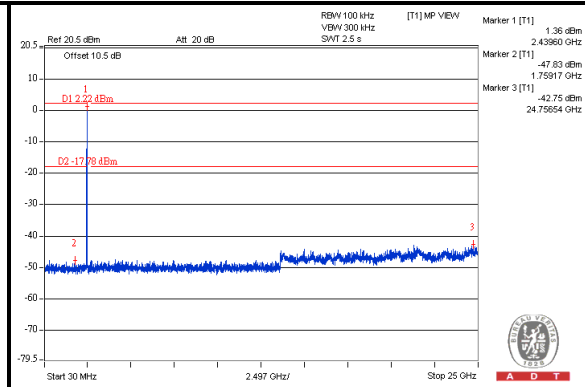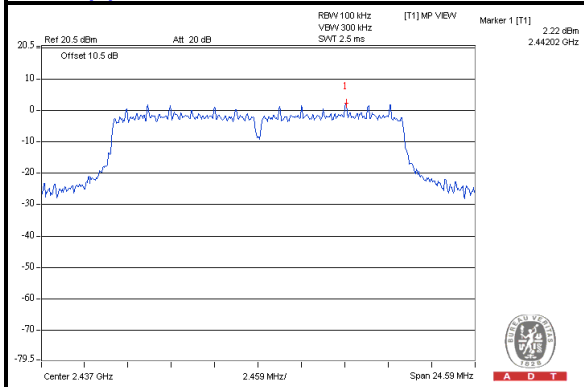

Chain(0) : CH 11

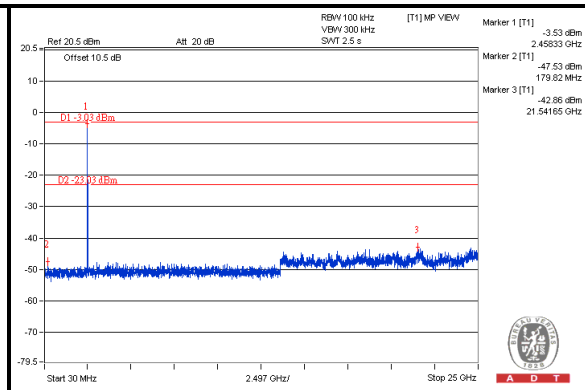
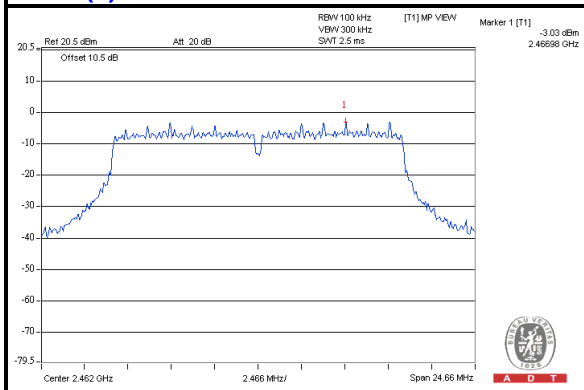






A D T

802.11g



Chain(1) : CH 1

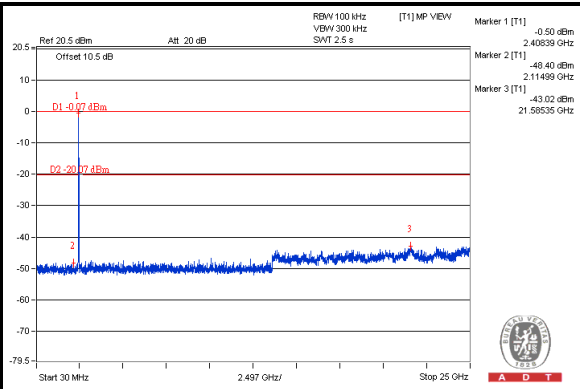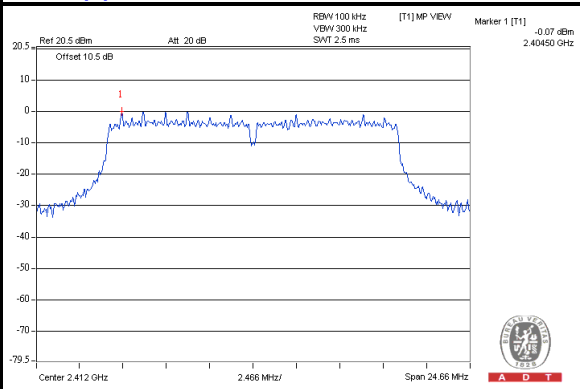

Chain(1) : CH 6

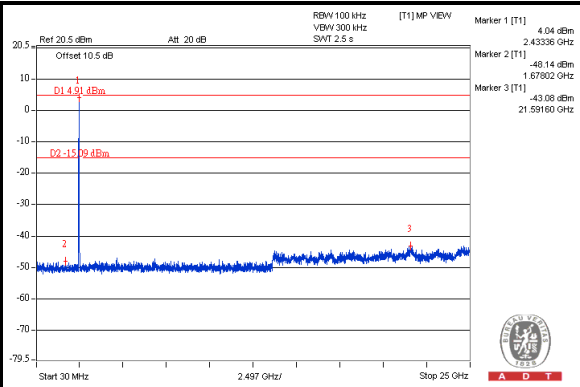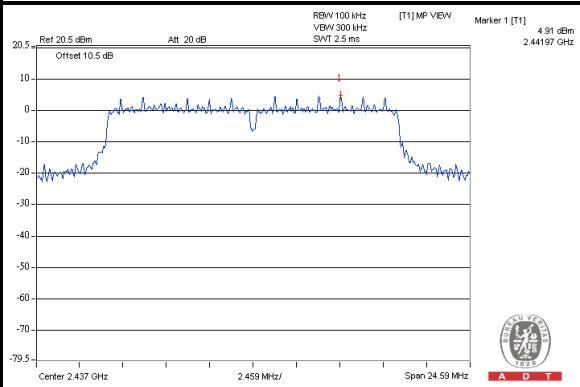

Chain(1) : CH 11

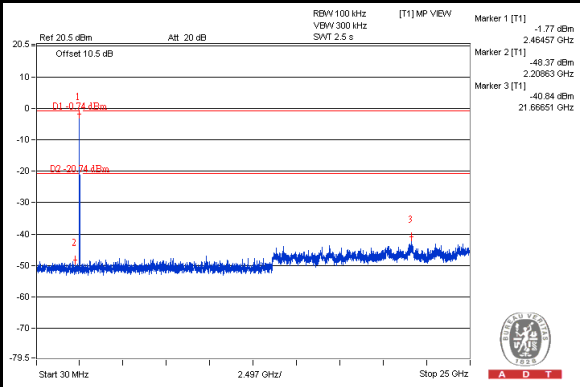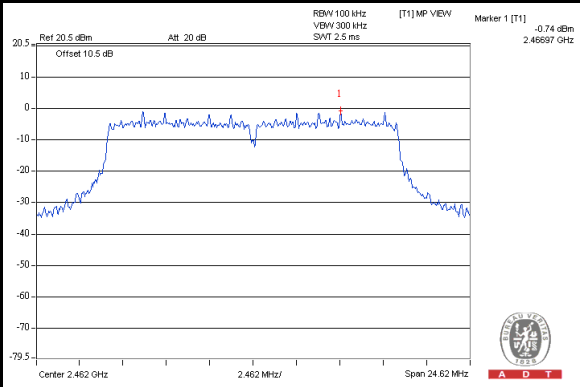





A D T

802.11n (HT20)


Chain(0) : CH 1

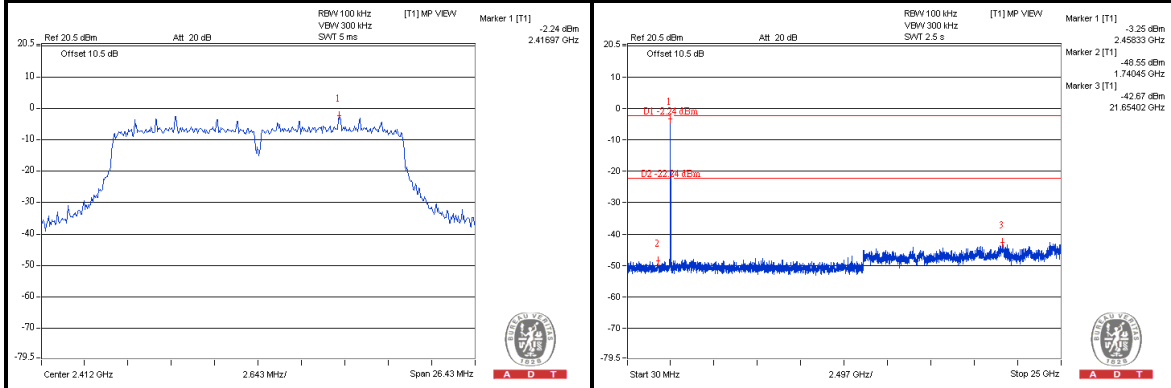

Chain(0) : CH 6

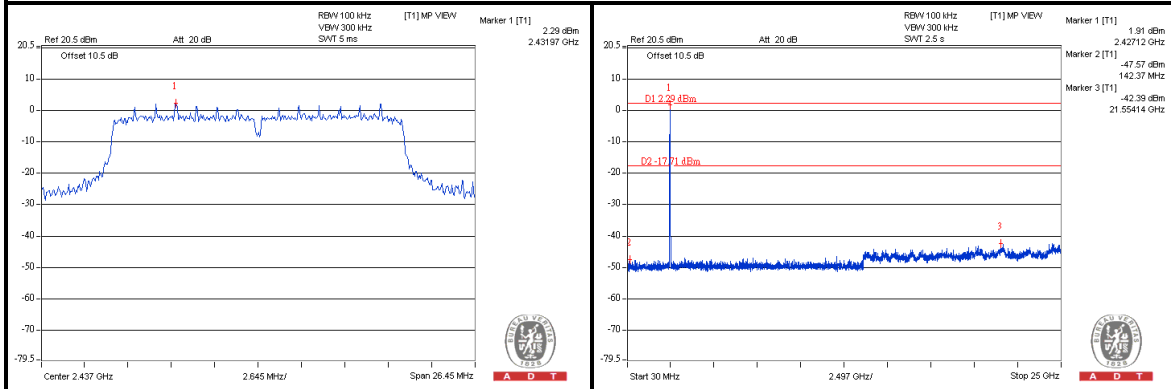

Chain(0) : CH 11


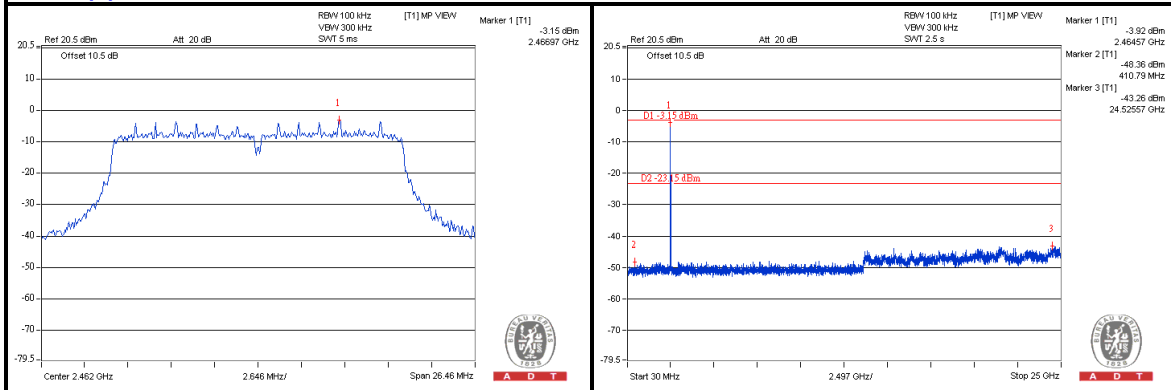






A D T

802.11n (HT20)



Chain(1) : CH 1

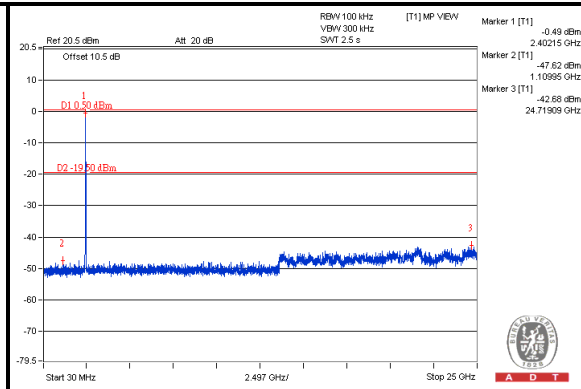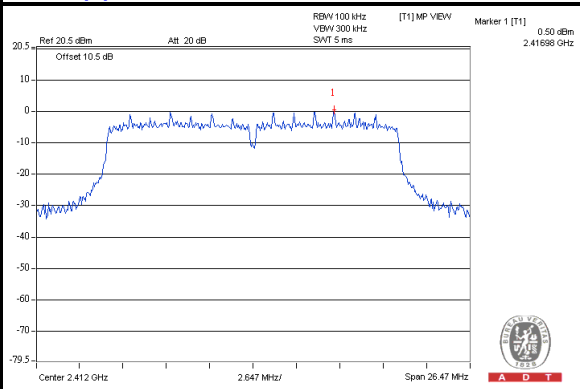

Chain(1) : CH 6

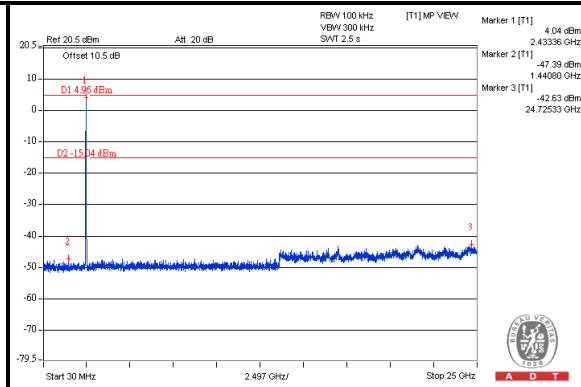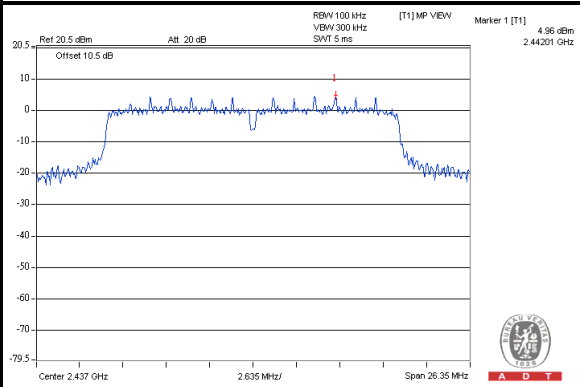

Chain(1) : CH 11

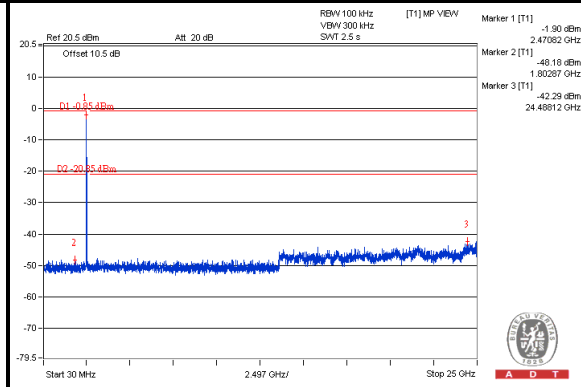
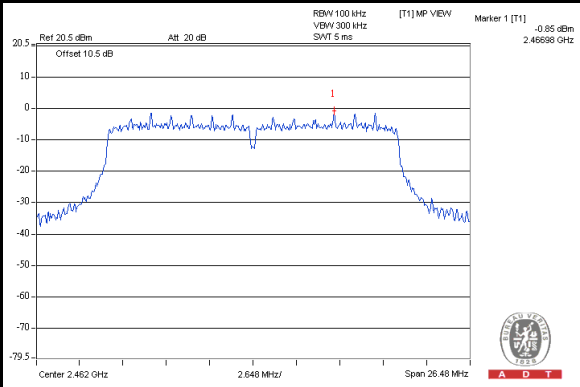






A D T

802.11n (HT40)



Chain(0) : CH 3

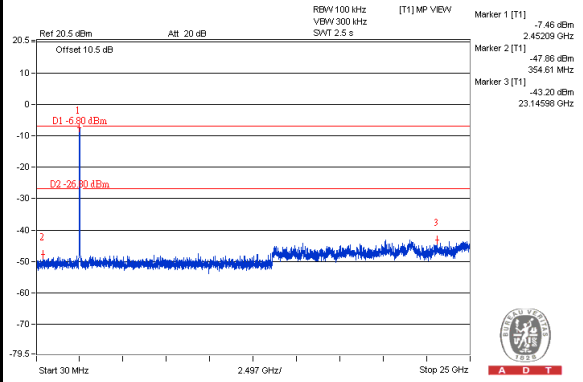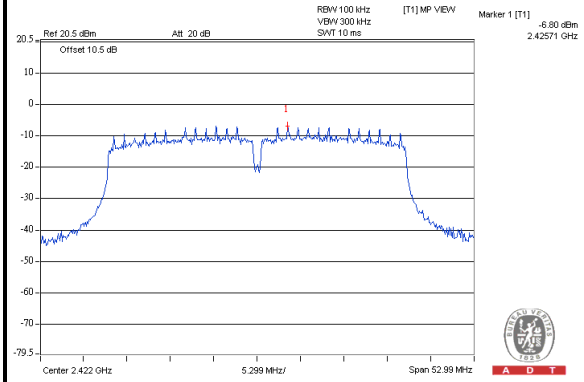

Chain(0) : CH 6

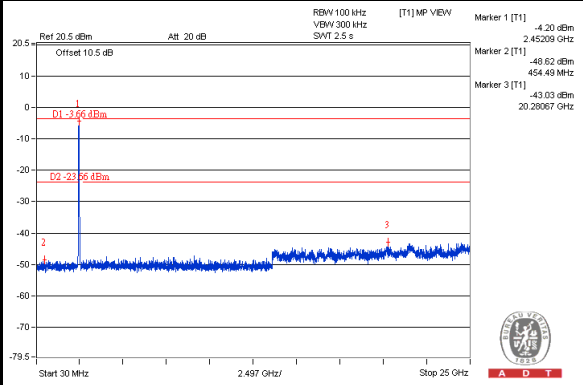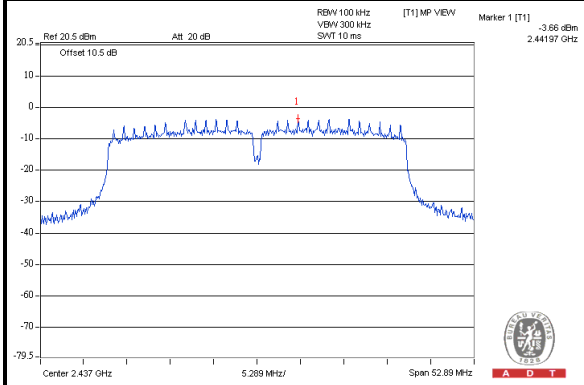

Chain(0) : CH 9

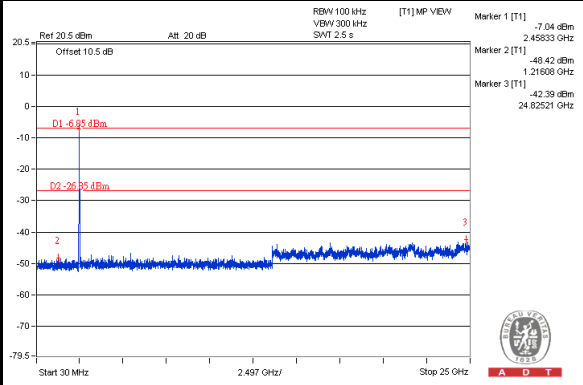
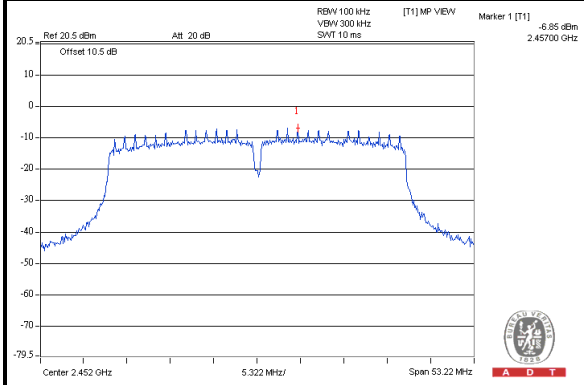






A D T

802.11n (HT40)



Chain(1) : CH 3

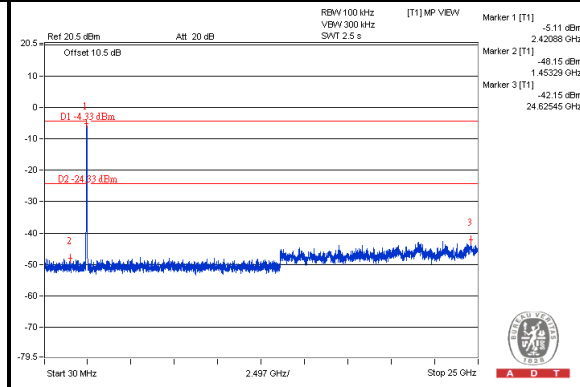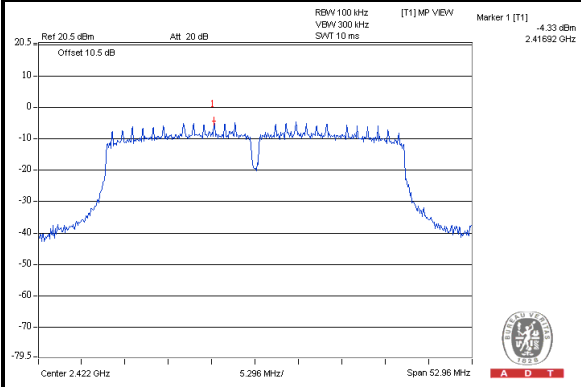

Chain(1) : CH 6

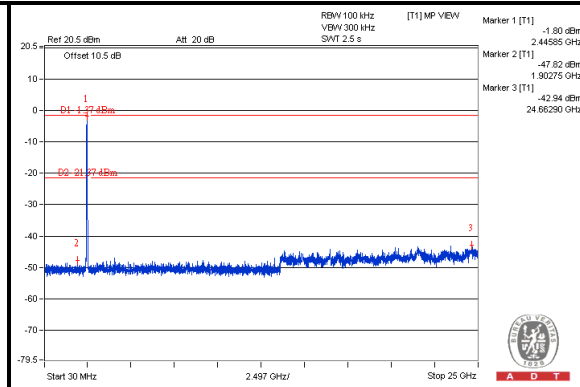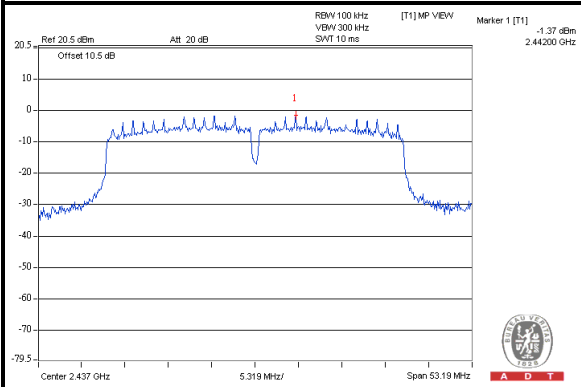

Chain(1) : CH 9

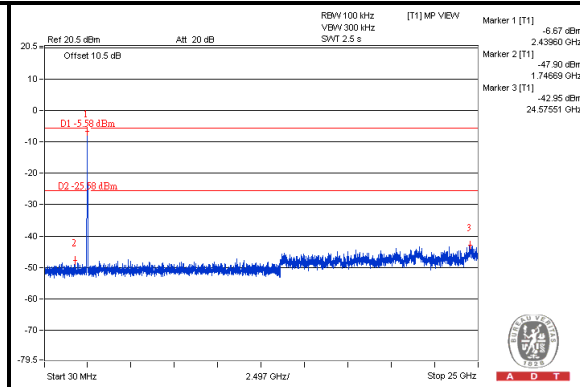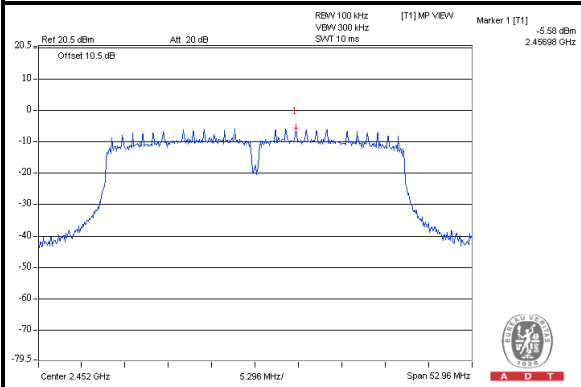

4.7 UNWANTED EMISSION MEASUREMENT (RADIATED VERSUS CONDUCTED)

4.7.1 LIMITS OF UNWANTED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.7.2 TEST INSTRUMENTS

Below 1GHz test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 29,2013	Jan. 28,2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02578	June 26, 2012	June 25, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 19, 2012	Nov. 18, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 25, 2012	Dec. 24, 2013
RF Cable	NA	CHGCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Feb. 28, 2013



A D T

Above 1GHz test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 16, 2013	Jan. 15, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 30, 2012	Oct. 29, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 27, 2012	Nov. 26, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 26, 2012	Dec. 25, 2013
RF Cable	NA	CHHCAB_001	Oct. 07, 2012	Oct. 06, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: Mar. 06, 2013

4.7.3 TEST PROCEDURES

Following FCC KDB 558074 D01 DTS Meas. Guidance :
Radiated versus Conducted Measurements.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- e. For all of Radiation emission test
 - e-1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
 - e-2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - e-3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - e-4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - e-5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - e-6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.



A D T

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


4.7.4 DEVIATION FROM TEST STANDARD

No deviation


4.7.5 TEST SETUP

Radiation configuration:


<Frequency Range below 1GHz>

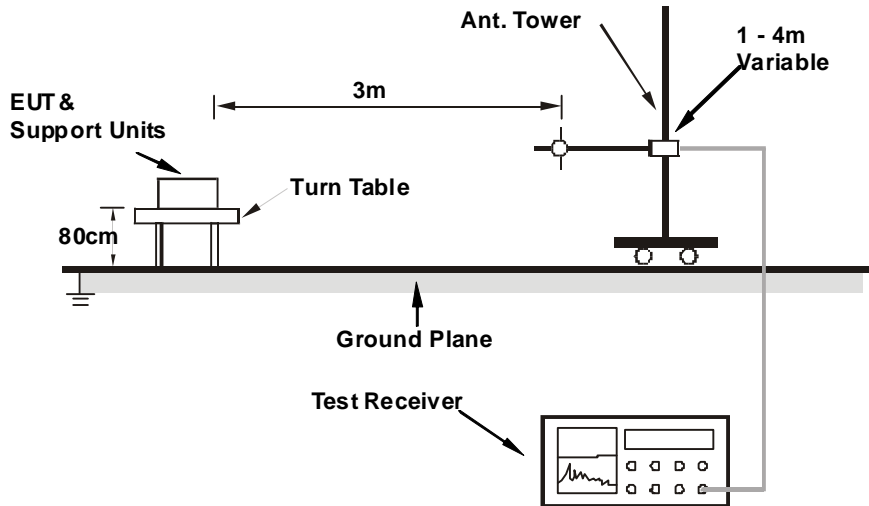

<Frequency Range above 1GHz>

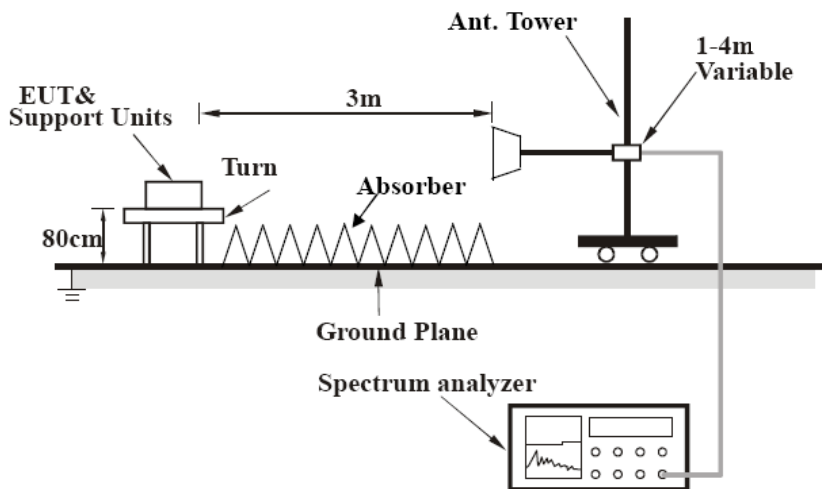

Conducted configuration:



For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



A D T

4.7.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program “Atheros Radio test 2_Version:2.3” to enable EUT under transmission/receiving condition continuously at specific channel frequency.



A D T

4.7.7 TEST RESULTS (RADIATED MEASUREMENT)

Radiated versus Conducted Measurement	
<input type="checkbox"/> Conducted measurement	<input checked="" type="checkbox"/> Radiated measurement
<p><u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)</p> <p><u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).</p>	

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.93	33.8 QP	40.0	-6.2	1.50 H	204	20.80	12.98
2	76.12	32.2 QP	40.0	-7.8	1.50 H	239	21.39	10.84
3	136.94	35.6 QP	43.5	-7.9	2.00 H	75	21.88	13.72
4	476.88	30.2 QP	46.0	-15.8	2.00 H	246	10.38	19.81
5	625.00	33.0 QP	46.0	-13.0	1.50 H	201	10.05	22.97
6	875.02	40.2 QP	46.0	-5.8	1.00 H	36	13.04	27.12

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.28	33.4 QP	40.0	-6.6	1.50 V	328	20.42	13.01
2	108.81	28.9 QP	43.5	-14.7	2.00 V	360	17.78	11.07
3	132.92	31.2 QP	43.5	-12.3	1.00 V	78	17.78	13.45
4	625.00	31.2 QP	46.0	-14.8	1.50 V	346	8.21	22.97
5	750.03	40.0 QP	46.0	-6.0	2.00 V	0	15.05	24.91
6	875.02	36.2 QP	46.0	-9.8	1.00 V	16	9.12	27.12

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

ABOVE 1GHz DATA
802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	53.7 PK	74.0	-20.3	1.26 H	321	11.43	42.27
2	4824.00	45.6 AV	54.0	-8.4	1.26 H	321	3.33	42.27
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	54.4 PK	74.0	-19.6	1.22 V	192	12.13	42.27
2	4824.00	47.7 AV	54.0	-6.3	1.22 V	192	5.43	42.27

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	53.9 PK	74.0	-20.1	1.25 H	311	11.58	42.32
2	4874.00	45.9 AV	54.0	-8.1	1.25 H	311	3.58	42.32
3	7311.00	56.1 PK	74.0	-17.9	1.53 H	122	9.15	46.95
4	7311.00	43.3 AV	54.0	-10.7	1.53 H	122	-3.65	46.95

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	54.4 PK	74.0	-19.6	1.20 V	170	12.08	42.32
2	4874.00	47.9 AV	54.0	-6.1	1.20 V	170	5.58	42.32
3	7311.00	55.5 PK	74.0	-18.5	1.32 V	203	8.55	46.95
4	7311.00	43.5 AV	54.0	-10.5	1.32 V	203	-3.45	46.95

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	53.7 PK	74.0	-20.3	1.22 H	297	11.38	42.32
2	4924.00	46.0 AV	54.0	-8.0	1.22 H	297	3.68	42.32
3	7386.00	56.4 PK	74.0	-17.6	1.56 H	122	9.21	47.19
4	7386.00	43.7 AV	54.0	-10.3	1.56 H	122	-3.49	47.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	55.4 PK	74.0	-18.6	1.24 V	174	13.08	42.32
2	4924.00	48.9 AV	54.0	-5.1	1.24 V	174	6.58	42.32
3	7386.00	55.9 PK	74.0	-18.1	1.37 V	208	8.71	47.19
4	7386.00	43.8 AV	54.0	-10.2	1.37 V	208	-3.39	47.19

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	50.8 PK	74.0	-23.2	1.29 H	317	8.53	42.27
2	4824.00	38.4 AV	54.0	-15.6	1.29 H	317	-3.87	42.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	52.0 PK	74.0	-22.0	1.12 V	175	9.73	42.27
2	4824.00	39.8 AV	54.0	-14.2	1.12 V	175	-2.47	42.27

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	51.3 PK	74.0	-22.7	1.28 H	303	8.98	42.32
2	4874.00	38.9 AV	54.0	-15.1	1.28 H	303	-3.42	42.32
3	7311.00	55.8 PK	74.0	-18.2	1.52 H	130	8.85	46.95
4	7311.00	43.1 AV	54.0	-10.9	1.52 H	130	-3.85	46.95

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	53.1 PK	74.0	-20.9	1.14 V	162	10.78	42.32
2	4874.00	40.1 AV	54.0	-13.9	1.14 V	162	-2.22	42.32
3	7311.00	55.4 PK	74.0	-18.6	1.41 V	221	8.45	46.95
4	7311.00	43.6 AV	54.0	-10.4	1.41 V	221	-3.35	46.95

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	50.6 PK	74.0	-23.4	1.23 H	307	8.28	42.32
2	4924.00	38.4 AV	54.0	-15.6	1.23 H	307	-3.92	42.32
3	7386.00	56.1 PK	74.0	-17.9	1.52 H	115	8.91	47.19
4	7386.00	43.3 AV	54.0	-10.7	1.52 H	115	-3.89	47.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	52.2 PK	74.0	-21.8	1.15 V	160	9.88	42.32
2	4924.00	39.8 AV	54.0	-14.2	1.15 V	160	-2.52	42.32
3	7386.00	55.7 PK	74.0	-18.3	1.36 V	216	8.51	47.19
4	7386.00	43.8 AV	54.0	-10.2	1.36 V	216	-3.39	47.19

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	51.4 PK	74.0	-22.6	1.35 H	287	9.13	42.27
2	4824.00	38.8 AV	54.0	-15.2	1.35 H	287	-3.47	42.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	52.0 PK	74.0	-22.0	1.09 V	185	9.73	42.27
2	4824.00	39.8 AV	54.0	-14.2	1.09 V	185	-2.47	42.27

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	50.5 PK	74.0	-23.5	1.19 H	295	8.18	42.32
2	4874.00	38.3 AV	54.0	-15.7	1.19 H	295	-4.02	42.32
3	7311.00	56.6 PK	74.0	-17.4	1.54 H	126	9.65	46.95
4	7311.00	43.5 AV	54.0	-10.5	1.54 H	126	-3.45	46.95

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	53.0 PK	74.0	-21.0	1.15 V	153	10.68	42.32
2	4874.00	40.2 AV	54.0	-13.8	1.15 V	153	-2.12	42.32
3	7311.00	55.7 PK	74.0	-18.3	1.39 V	205	8.75	46.95
4	7311.00	43.8 AV	54.0	-10.2	1.39 V	205	-3.15	46.95

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	50.8 PK	74.0	-23.2	1.21 H	293	8.48	42.32
2	4924.00	38.4 AV	54.0	-15.6	1.21 H	293	-3.92	42.32
3	7386.00	56.1 PK	74.0	-17.9	1.57 H	122	8.91	47.19
4	7386.00	43.1 AV	54.0	-10.9	1.57 H	122	-4.09	47.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	52.3 PK	74.0	-21.7	1.12 V	166	9.98	42.32
2	4924.00	39.7 AV	54.0	-14.3	1.12 V	166	-2.62	42.32
3	7386.00	55.1 PK	74.0	-18.9	1.34 V	205	7.91	47.19
4	7386.00	43.5 AV	54.0	-10.5	1.34 V	205	-3.69	47.19

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4844.00	50.2 PK	74.0	-23.8	1.15 H	294	7.91	42.29
2	4844.00	38.1 AV	54.0	-15.9	1.15 H	294	-4.19	42.29
3	7266.00	55.8 PK	74.0	-18.2	1.61 H	129	8.99	46.81
4	7266.00	43.0 AV	54.0	-11.0	1.61 H	129	-3.81	46.81
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4844.00	50.7 PK	74.0	-23.3	1.12 V	180	8.41	42.29
2	4844.00	38.3 AV	54.0	-15.7	1.12 V	180	-3.99	42.29
3	7266.00	55.9 PK	74.0	-18.1	1.32 V	207	9.09	46.81
4	7266.00	43.2 AV	54.0	-10.8	1.32 V	207	-3.61	46.81

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	51.3 PK	74.0	-22.7	1.24 H	299	8.98	42.32
2	4874.00	38.6 AV	54.0	-15.4	1.24 H	299	-3.72	42.32
3	7311.00	55.9 PK	74.0	-18.1	1.55 H	121	8.95	46.95
4	7311.00	43.2 AV	54.0	-10.8	1.55 H	121	-3.75	46.95

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	52.2 PK	74.0	-21.8	1.11 V	154	9.88	42.32
2	4874.00	39.6 AV	54.0	-14.4	1.11 V	154	-2.72	42.32
3	7311.00	55.3 PK	74.0	-18.7	1.34 V	189	8.35	46.95
4	7311.00	43.4 AV	54.0	-10.6	1.34 V	189	-3.55	46.95

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4904.00	50.6 PK	74.0	-23.4	1.14 H	303	8.26	42.34
2	4904.00	38.0 AV	54.0	-16.0	1.14 H	303	-4.34	42.34
3	7356.00	56.2 PK	74.0	-17.8	1.61 H	136	9.11	47.09
4	7356.00	43.3 AV	54.0	-10.7	1.61 H	136	-3.79	47.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4904.00	50.5 PK	74.0	-23.5	1.17 V	171	8.16	42.34
2	4904.00	38.4 AV	54.0	-15.6	1.17 V	171	-3.94	42.34
3	7356.00	56.0 PK	74.0	-18.0	1.36 V	205	8.91	47.09
4	7356.00	43.3 AV	54.0	-10.7	1.36 V	205	-3.79	47.09

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

4.7.8 TEST RESULTS (CONDUCTED MEASUREMENT)

Radiated versus Conducted Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement
<p><u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)</p> <p><u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).</p>	

Conducted Measurement Factor
<p>a. The composite gain will be used when signal support the correlated signal. (Composite gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 5.01\text{dBi}$)</p> <p>b. For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.</p> <p>c. For the band edge the gain for the specific band may have been used.</p> <p>d. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For $f = 30 - 1000$ MHz, add 4.7 dB.</p> <p>Note: The conducted emission test was considered some factor to compute test result.</p>



A D T

BELOW 1GHz WORST-CASE DATA

802.11g

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
6	50.855 QP	-65.43	-65.01	-62.2	-55.26	-6.94	PASS
	110.995 QP	-67.9	-70.73	-66.08	-51.76	-14.32	PASS
	259.89 QP	-69.67	-74.19	-68.36	-49.26	-19.1	PASS
	439.825 QP	-70.94	-72.25	-68.54	-49.26	-19.28	PASS
	651.77 QP	-71.74	-71.8	-68.76	-49.26	-19.5	PASS
	813.76 QP	-50.17	-68.8	-50.11	-49.26	-0.85	PASS



A D T

ABOVE 1GHz DATA

802.11b

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
1	1606.25 PK	-46.15	-47.88	-43.92	-21.26	-22.66	PASS
	1606.25 AV	-53.57	-54.83	-51.14	-41.26	-9.88	PASS
	4825 PK	-45.05	-44.97	-42	-21.26	-20.74	PASS
	4821.875 AV	-54.65	-55	-51.81	-41.26	-10.55	PASS

Bandedge table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
1	2382.58 PK	-40.05	-40.02	-37.02	-21.26	-15.76	PASS
	2382.58 AV	-55.66	-54.76	-52.18	-41.26	-10.92	PASS
	2486.7 PK	-44.66	-37.89	-37.06	-21.26	-15.8	PASS
	2483.66 AV	-56.57	-55.39	-52.93	-41.26	-11.67	PASS



A D T

802.11b

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
6	1621.875 PK	-49.03	-47.15	-44.98	-21.26	-23.72	PASS
	1621.875 AV	-55.48	-54.61	-52.01	-41.26	-10.75	PASS
	4865.625 PK	-46.12	-47.89	-43.91	-21.26	-22.65	PASS
	4875 AV	-57.68	-56.64	-54.12	-41.26	-12.86	PASS
	7315.625 PK	-45.25	-45.21	-42.22	-21.26	-20.96	PASS
	7309.375 AV	-56.42	-55.21	-52.76	-41.26	-11.5	PASS

Bandedge table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
6	2356.74 PK	-42.05	-40.79	-38.36	-21.26	-17.1	PASS
	2359.78 AV	-57.89	-53.21	-51.94	-41.26	-10.68	PASS
	2493.92 PK	-45.38	-43.75	-41.48	-21.26	-20.22	PASS
	2496.58 AV	-57.74	-56.06	-53.81	-41.26	-12.55	PASS



A D T

802.11b

Conducted spurious emission table

Channel	SPURIOUS EMISSION/ HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/ HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
11	4915.625 PK	-44.7	-47.21	-42.77	-21.26	-21.51	PASS
	4921.875 AV	-56.75	-56.86	-53.79	-41.26	-12.53	PASS
	7384.375 PK	-43.63	-44.1	-40.85	-21.26	-19.59	PASS
	7390.625 AV	-55.27	-55.21	-52.23	-41.26	-10.97	PASS

Bandedge table

Channel	SPURIOUS EMISSION/ HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/ HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
11	2382.58 PK	-40.05	-40.02	-37.02	-21.26	-15.76	PASS
	2382.58 AV	-55.66	-54.76	-52.18	-41.26	-10.92	PASS
	2486.7 PK	-44.66	-37.89	-37.06	-21.26	-15.8	PASS
	2483.66 AV	-56.57	-55.39	-52.93	-41.26	-11.67	PASS



A D T

802.11g

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
1	1606.25 PK	-47.03	-47.46	-44.23	-21.26	-22.97	PASS
	1606.25 AV	-52.88	-55.81	-51.09	-41.26	-9.83	PASS
	4815.625 PK	-46.49	-46.22	-43.34	-21.26	-22.08	PASS
	4821.875 AV	-56.94	-57.14	-54.03	-41.26	-12.77	PASS

Bandedge table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
1	2389.8 PK	-23.09	-28.35	-21.96	-21.26	-0.7	PASS
	2389.8 AV	-43.55	-47.29	-42.02	-41.26	-0.76	PASS
	2493.54 PK	-41.57	-44.84	-39.89	-21.26	-18.63	PASS
	2486.7 AV	-57.7	-57.41	-54.54	-41.26	-13.28	PASS



A D T

802.11g

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
6	1621.875 PK	-47.19	-44.94	-42.91	-21.26	-21.65	PASS
	1621.875 AV	-52.14	-52.02	-49.07	-41.26	-7.81	PASS
	4875 PK	-45.27	-46.71	-42.92	-21.26	-21.66	PASS
	4865.625 AV	-56.78	-56.71	-53.73	-41.26	-12.47	PASS
	7309.375 PK	-43.93	-44.37	-41.13	-21.26	-19.87	PASS
	7315.625 AV	-55.29	-55.3	-52.28	-41.26	-11.02	PASS

Bandedge table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
6	2363.96 PK	-40.76	-41.16	-37.95	-21.26	-16.69	PASS
	2359.78 AV	-56.21	-52.93	-51.26	-41.26	-10	PASS
	2484.42 PK	-43.36	-40.34	-38.58	-21.26	-17.32	PASS
	2483.66 AV	-56.06	-54.84	-52.4	-41.26	-11.14	PASS



A D T

802.11g

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
11	4918.75 PK	-44.95	-46.91	-42.81	-21.26	-21.55	PASS
	4915.625 AV	-57.41	-57.32	-54.35	-41.26	-13.09	PASS
	7384.375 PK	-45.61	-44.11	-41.79	-21.26	-20.53	PASS
	7378.125 AV	-55.59	-55.67	-52.62	-41.26	-11.36	PASS

Bandedge table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
11	2386.38 PK	-43.29	-45.22	-41.14	-21.26	-19.88	PASS
	2319.88 AV	-59.38	-54.82	-53.52	-41.26	-12.26	PASS
	2483.66 PK	-24.35	-25.9	-22.05	-21.26	-0.79	PASS
	2483.66 AV	-45.76	-48.97	-44.06	-41.26	-2.8	PASS



A D T

802.11n(HT20)

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
1	1606.25 PK	-47.82	-47.55	-44.67	-21.26	-23.41	PASS
	1606.25 AV	-52.87	-55.87	-51.11	-41.26	-9.85	PASS
	4821.875 PK	-45.29	-46.8	-42.97	-21.26	-21.71	PASS
	4818.75 AV	-57.14	-57.12	-54.12	-41.26	-12.86	PASS

Bandedge table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
1	2389.8 PK	-24.43	-26.29	-22.25	-21.26	-0.99	PASS
	2389.8 AV	-45.02	-45.12	-42.06	-41.26	-0.8	PASS
	2496.96 PK	-41.61	-44.21	-39.71	-21.26	-18.45	PASS
	2487.08 AV	-57.92	-57.44	-54.66	-41.26	-13.4	PASS



A D T

802.11n(HT20)**Conducted spurious emission table**

Channel	SPURIOUS EMISSION/ HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/ HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
6	1621.875 PK	-45.83	-46.47	-43.13	-21.26	-21.87	PASS
	1621.875 AV	-52.37	-51.83	-49.08	-41.26	-7.82	PASS
	4868.75 PK	-47.14	-45.96	-43.5	-21.26	-22.24	PASS
	4881.25 AV	-56.81	-56.78	-53.78	-41.26	-12.52	PASS
	7306.25 PK	-43.99	-43.29	-40.62	-21.26	-19.36	PASS
	7303.125 AV	-55.24	-55.06	-52.14	-41.26	-10.88	PASS

Bandedge table

Channel	SPURIOUS EMISSION/ HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/ HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
6	2389.8 PK	-42.34	-40.51	-38.32	-21.26	-17.06	PASS
	2359.78 AV	-56.24	-53.11	-51.39	-41.26	-10.13	PASS
	2485.56 PK	-42.6	-40.68	-38.52	-21.26	-17.26	PASS
	2483.66 AV	-55.86	-54.56	-52.15	-41.26	-10.89	PASS



A D T

802.11n(HT20)

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
11	4918.75 PK	-45.09	-48.12	-43.34	-21.26	-22.08	PASS
	4925 AV	-57.51	-57.26	-54.37	-41.26	-13.11	PASS
	7381.25 PK	-45.07	-44.74	-41.89	-21.26	-20.63	PASS
	7393.75 AV	-55.93	-55.52	-52.71	-41.26	-11.45	PASS

Bandedge table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
11	2389.8 PK	-45.08	-43.97	-41.48	-21.26	-20.22	PASS
	2319.88 AV	-59.36	-52.95	-52.06	-41.26	-10.8	PASS
	2483.66 PK	-24.17	-27.46	-22.5	-21.26	-1.24	PASS
	2483.66 AV	-44.44	-46.19	-42.22	-41.26	-0.96	PASS



A D T

802.11n(HT40)

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
3	1612.5 PK	-47.56	-48.57	-45.03	-21.26	-23.77	PASS
	1612.5 AV	-53.88	-57.08	-52.18	-41.26	-10.92	PASS
	4837.5 PK	-45.78	-45.9	-42.83	-21.26	-21.57	PASS
	4834.375 AV	-57.29	-57.13	-54.2	-41.26	-12.94	PASS
	7256.25 PK	-45.63	-44.17	-41.83	-21.26	-20.57	PASS
	7256.25 AV	-55.68	-55.99	-52.82	-41.26	-11.56	PASS

Bandedge table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
3	2389.04 PK	-27.57	-30.34	-25.73	-21.26	-4.47	PASS
	2389.8 AV	-43.64	-47.43	-42.12	-41.26	-0.86	PASS
	2500 PK	-43.86	-44.61	-41.21	-21.26	-19.95	PASS
	2484.42 AV	-57.28	-58.14	-54.68	-41.26	-13.42	PASS



A D T

802.11n(HT40)

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
6	1625 PK	-46.06	-46.79	-43.4	-21.26	-22.14	PASS
	1621.875 AV	-54.02	-55.1	-51.52	-41.26	-10.26	PASS
	4865.625 PK	-46.62	-46.64	-43.62	-21.26	-22.36	PASS
	4878.125 AV	-57.53	-57.11	-54.3	-41.26	-13.04	PASS
	7306.25 PK	-45.25	-44.52	-41.86	-21.26	-20.6	PASS
	7312.5 AV	-55.72	-55.97	-52.83	-41.26	-11.57	PASS

Bandedge table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
6	2389.04 PK	-27.95	-31.05	-26.22	-21.26	-4.96	PASS
	2389.8 AV	-46.58	-48.86	-44.56	-41.26	-3.3	PASS
	2484.42 PK	-26.21	-28.64	-24.25	-21.26	-2.99	PASS
	2483.66 AV	-43.43	-46.72	-41.76	-41.26	-0.5	PASS



A D T

802.11n(HT40)

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
9	4912.5 PK	-45.83	-46.57	-43.17	-21.26	-21.91	PASS
	4906.25 AV	-57.25	-57.46	-54.34	-41.26	-13.08	PASS
	7346.875 PK	-45.21	-44.82	-42	-21.26	-20.74	PASS
	7365.625 AV	-56.05	-56	-53.01	-41.26	-11.75	PASS

Bandedge table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
9	2360.16 PK	-44.98	-45.5	-42.22	-21.26	-20.96	PASS
	2359.78 AV	-59.28	-55.34	-53.87	-41.26	-12.61	PASS
	2487.46 PK	-27.43	-33	-26.37	-21.26	-5.11	PASS
	2483.66 AV	-43.26	-47.64	-41.91	-41.26	-0.65	PASS



A D T

4.8 AC POWER LINE CONDUCTED EMISSION MEASUREMENT

4.8.1 LIMITS OF AC POWER LINE CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar.11, 2013	Mar.10, 2014
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 06, 2012	Sep. 05, 2013
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 08,2012	June 07,2013
RF Cable (JYEBAO)	5DFB	COCCAB-001	Aug. 28, 2012	Aug. 27, 2013
50 ohms Terminator	50	EMC-3	Sep. 25, 2012	Sep. 24, 2013
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
- 3 The VCCI Con C Registration No. is C-3611.
- 4 Tested Date: Mar. 12, 2013

4.8.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 TEST SETUP

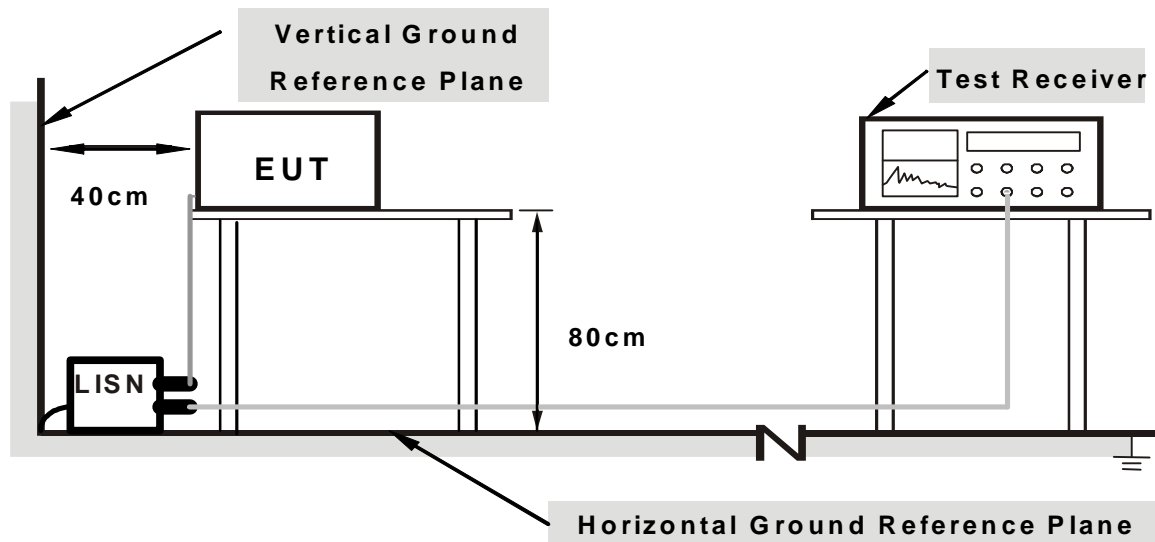

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.8.6 EUT OPERATING CONDITIONS

Same as Item 4.7.6


4.8.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin [dB]	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.11	56.07	45.90	56.18	46.01	65.79	55.79	-9.61	-9.78
2	0.20469	0.12	50.17	40.57	50.29	40.69	63.42	53.42	-13.13	-12.73
3	0.25547	0.13	44.73	35.72	44.86	35.85	61.58	51.58	-16.72	-15.73
4	0.59922	0.17	37.23	32.75	37.40	32.92	56.00	46.00	-18.60	-13.08
5	2.45703	0.24	27.90	22.51	28.14	22.75	56.00	46.00	-27.86	-23.25
6	24.06641	1.04	31.12	28.06	32.16	29.10	60.00	50.00	-27.84	-20.90

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

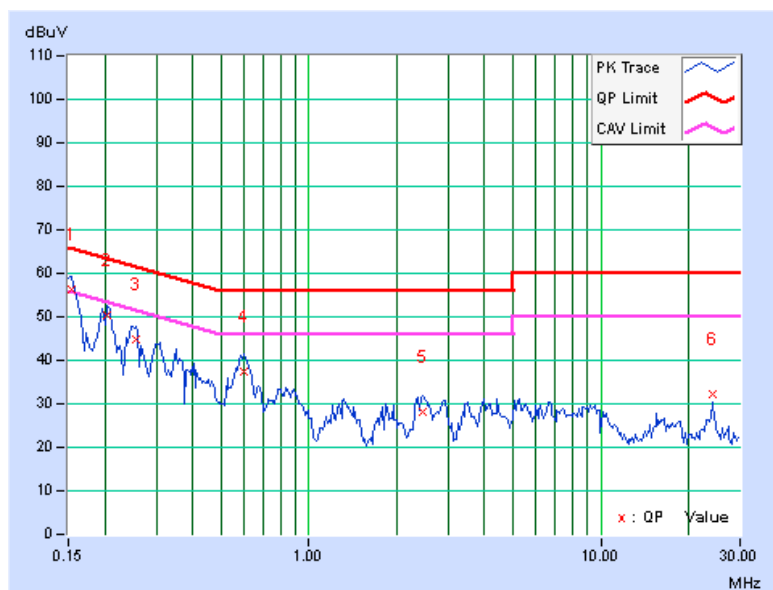


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	0.09	56.09	45.90	56.18	45.99	66.00
2	0.20469	0.10	49.92	39.95	50.02	40.05	63.42	53.42	-13.40	-13.37
3	0.25547	0.11	43.76	34.09	43.87	34.20	61.58	51.58	-17.70	-17.37
4	0.59922	0.16	35.45	30.93	35.61	31.09	56.00	46.00	-20.39	-14.91
5	0.84922	0.16	28.32	23.07	28.48	23.23	56.00	46.00	-27.52	-22.77
6	2.48438	0.22	26.69	21.34	26.91	21.56	56.00	46.00	-29.09	-24.44
7	24.06250	0.70	30.76	27.90	31.46	28.60	60.00	50.00	-28.54	-21.40

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

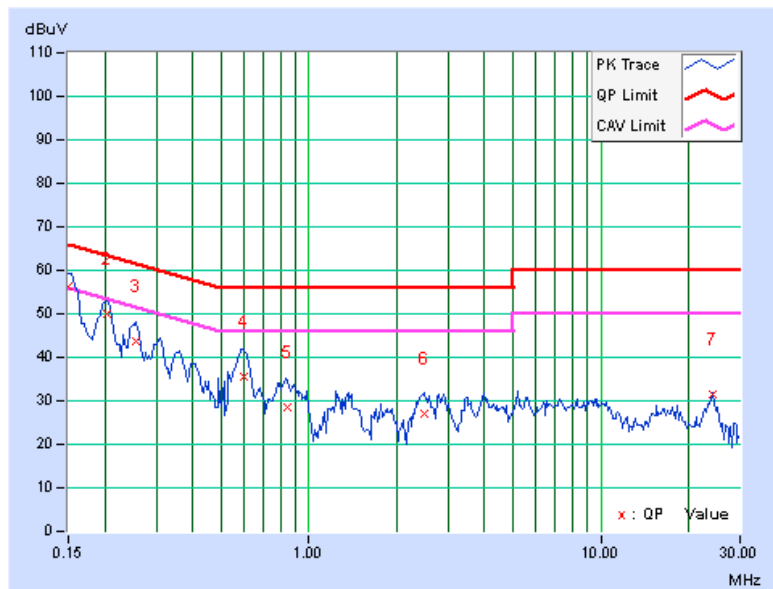

5. TEST TYPES AND RESULTS (FOR 5GHz, 5725~5850MHz Band)

5.1 CONDUCTED OUTPUT POWER MEASUREMENT

5.1.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz band: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT \geq 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

5.1.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 19, 2013


5.1.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

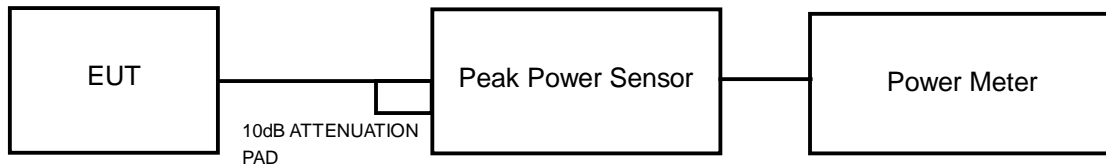

5.1.6 EUT OPERATING CONDITIONS

Same as Item 4.1.6

5.1.7 TEST RESULTS

802.11a

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	21.58	23.72	379.385	25.79	29.99	PASS
157	5785	21.59	23.37	361.482	25.58	29.99	PASS
165	5825	22.21	23.06	368.643	25.67	29.99	PASS

NOTE: Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, therefore the limit needs to reduce, so the power limit shall be reduced to $30 - (6.01 - 6) = 29.99\text{dBm}$.

802.11n (HT20)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	21.61	23.71	379.840	25.80	29.99	PASS
157	5785	21.57	23.35	359.821	25.56	29.99	PASS
165	5825	21.99	23.19	366.574	25.64	29.99	PASS

NOTE: Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, therefore the limit needs to reduce, so the power limit shall be reduced to $30 - (6.01 - 6) = 29.99\text{dBm}$.

802.11n (HT40)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	21.39	22.99	336.788	25.27	29.99	PASS
159	5795	21.44	22.62	322.126	25.08	29.99	PASS

NOTE: Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, therefore the limit needs to reduce, so the power limit shall be reduced to $30 - (6.01 - 6) = 29.99\text{dBm}$.



A D T

5.2 AVERAGE OUTPUT POWER

5.2.1 For REFERENCE.

5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 19, 2013

5.2.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator, the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the average power level.

5.2.4 TEST SETUP

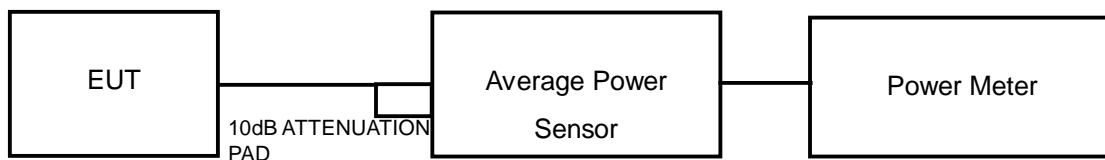

5.2.5 EUT OPERATING CONDITIONS

Same as Item 4.1.6



A D T

5.2.6 TEST RESULTS

802.11a

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
149	5745	19.07	20.12	183.526	22.64
157	5785	19.08	20.02	181.372	22.59
165	5825	19.01	19.14	161.651	22.09

802.11n (HT20)

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
149	5745	19.13	20.09	183.940	22.65
157	5785	19.03	19.97	179.295	22.54
165	5825	19.21	19.52	172.904	22.38

802.11n (HT40)

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
151	5755	17.00	17.20	102.600	20.11
159	5795	17.02	17.28	103.806	20.16

5.3 POWER SPECTRAL DENSITY MEASUREMENT

5.3.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 19, 2013

5.3.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP



5.3.6 EUT OPERATING CONDITION

Same as Item 4.1.6




A D T

5.3.7 TEST RESULTS

802.11a

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-6.29	3.01	-3.28	7.99	PASS
	157	5785	-7.08	3.01	-4.07	7.99	PASS
	165	5825	-8.24	3.01	-5.23	7.99	PASS
1	149	5745	-4.59	3.01	-1.58	7.99	PASS
	157	5785	-4.55	3.01	-1.54	7.99	PASS
	165	5825	-6.65	3.01	-3.64	7.99	PASS


NOTE: Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (6.01 - 6) = 7.99\text{dBm}$.

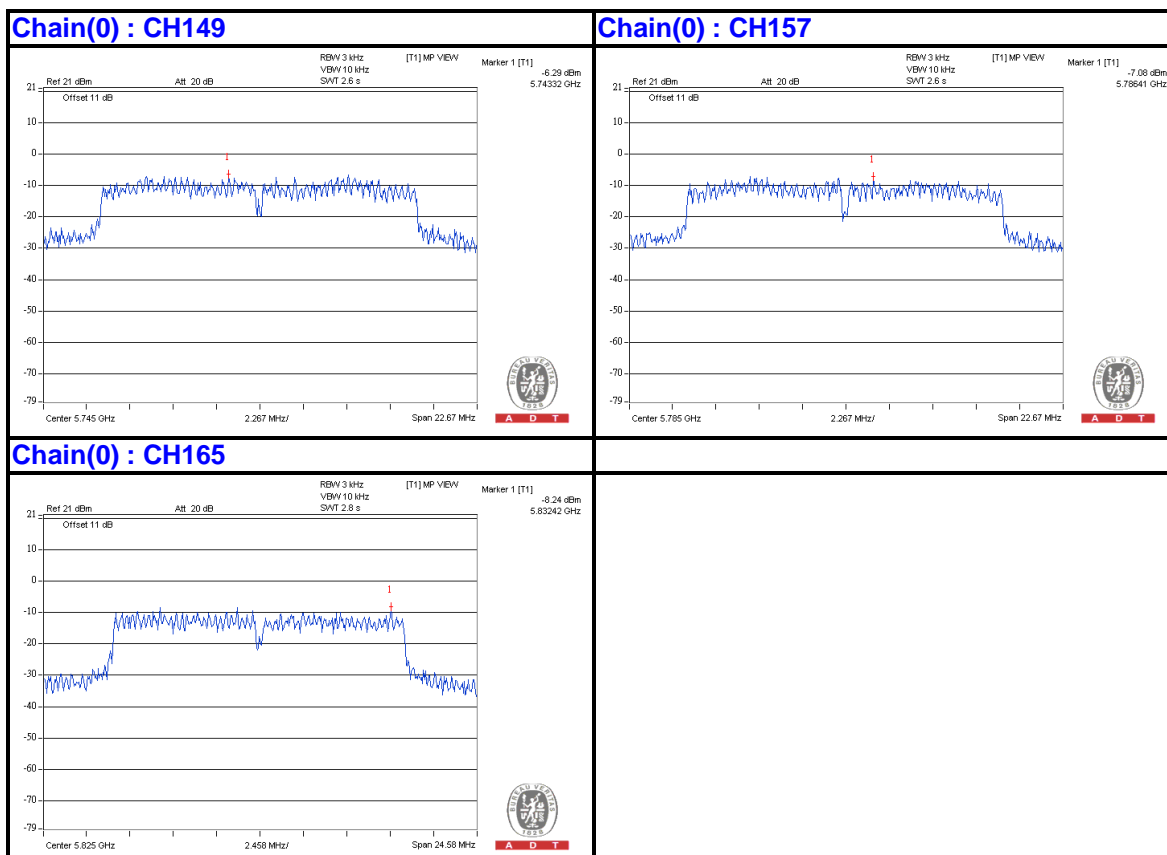




A D T


Chain(1) : CH149

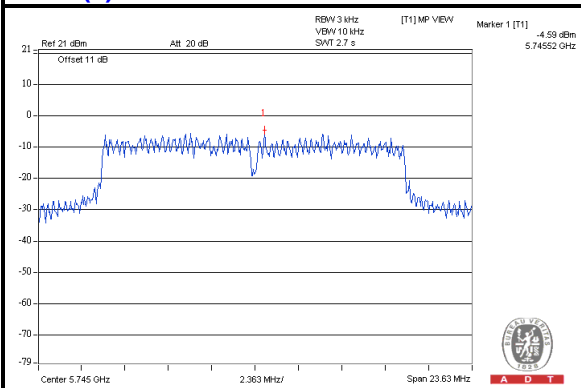

Chain(1) : CH157

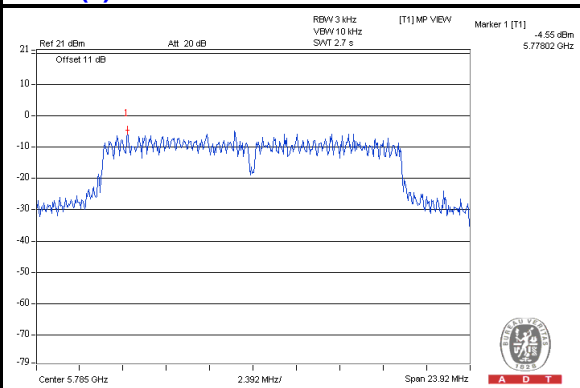

Chain(1) : CH165

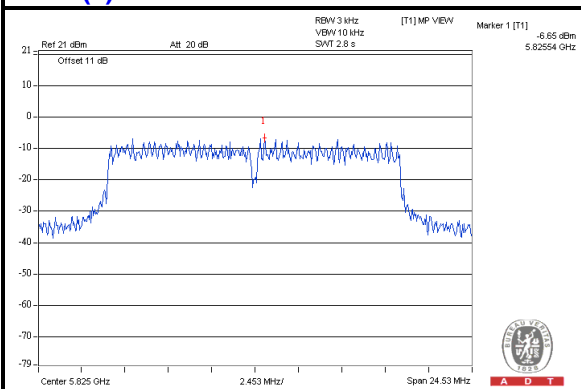




A D T

802.11n (HT20):

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-6.87	3.01	-3.86	7.99	PASS
	157	5785	-7.37	3.01	-4.36	7.99	PASS
	165	5825	-8.29	3.01	-5.28	7.99	PASS
1	149	5745	-5.70	3.01	-2.69	7.99	PASS
	157	5785	-5.09	3.01	-2.08	7.99	PASS
	165	5825	-5.58	3.01	-2.57	7.99	PASS


NOTE: Directional gain = 3dBi + 10log(2) = 6.01dBi > 6dBi , so the power density limit shall be reduced to 8-(6.01-6) = 7.99dBm.

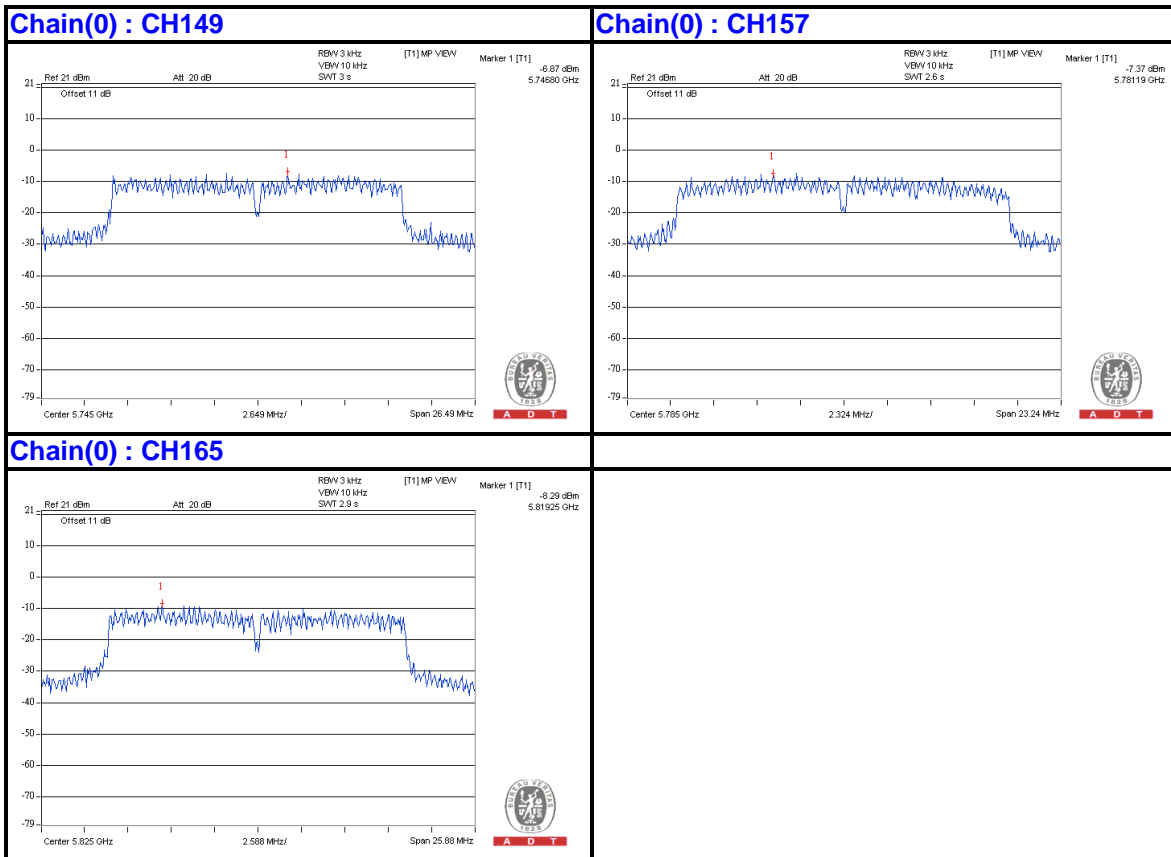




A D T


Chain(1) : CH149

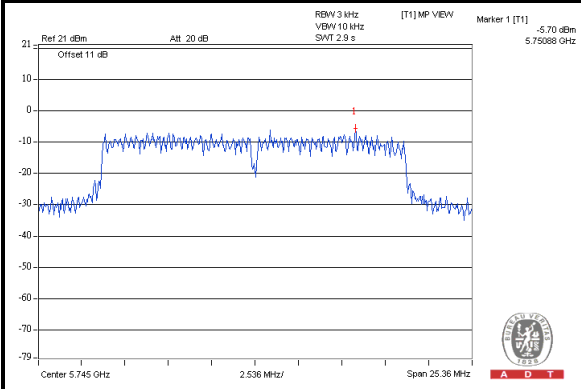

Chain(1) : CH157

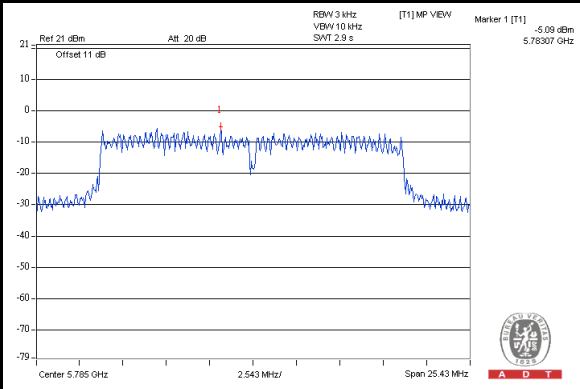

Chain(1) : CH165

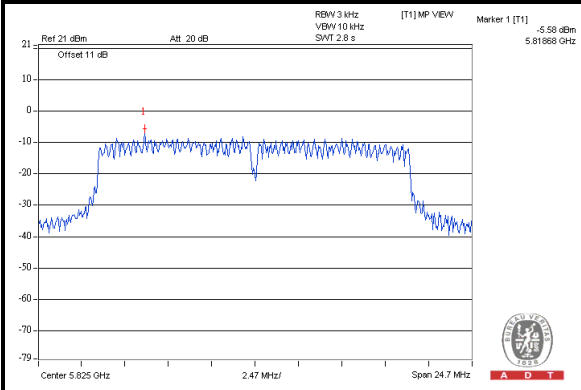





A D T

802.11n (HT40)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	-11.80	3.01	-8.79	7.99	PASS
	159	5795	-11.35	3.01	-8.34	7.99	PASS
1	151	5755	-11.25	3.01	-8.24	7.99	PASS
	159	5795	-11.27	3.01	-8.26	7.99	PASS

NOTE: Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (6.01 - 6) = 7.99\text{dBm}$.

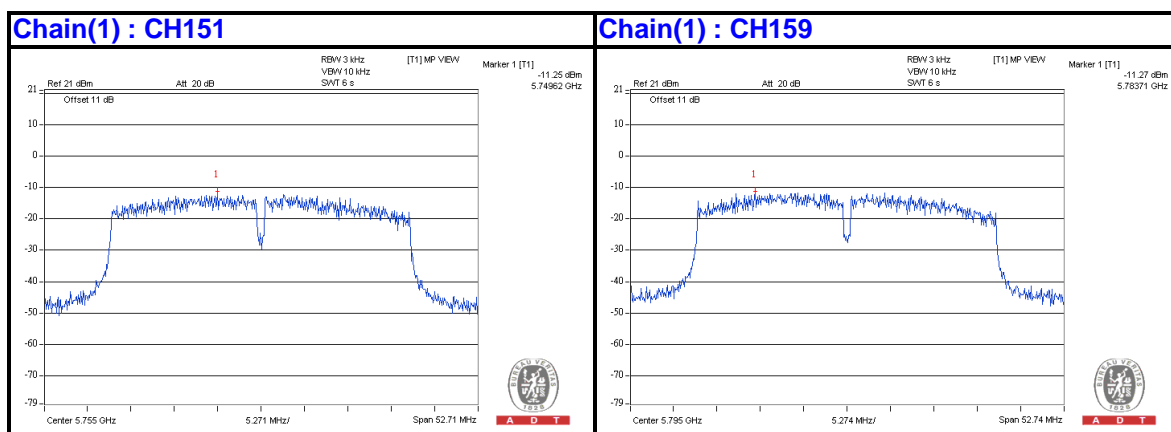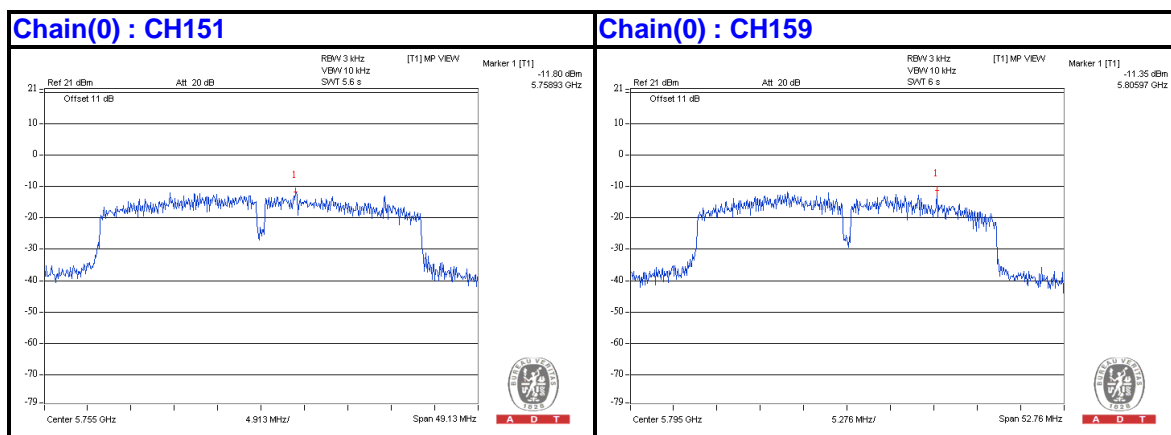

5.4 6dB BANDWIDTH MEASUREMENT

5.4.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 11, 2013


5.4.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as the 4.1.6




A D T

5.4.7 TEST RESULTS


802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	15.11	15.76	0.5	PASS
157	5785	15.12	15.95	0.5	PASS
165	5825	16.39	16.36	0.5	PASS


Chain(0) : CH149

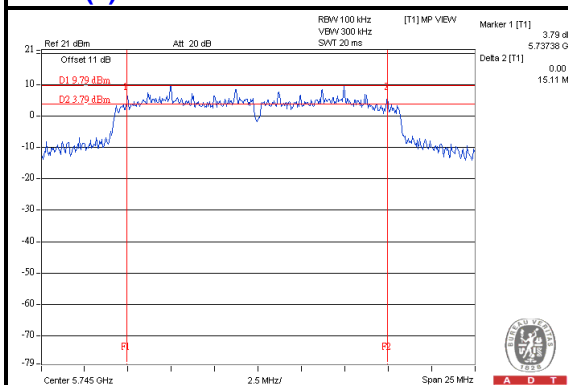

Chain(0) : CH157

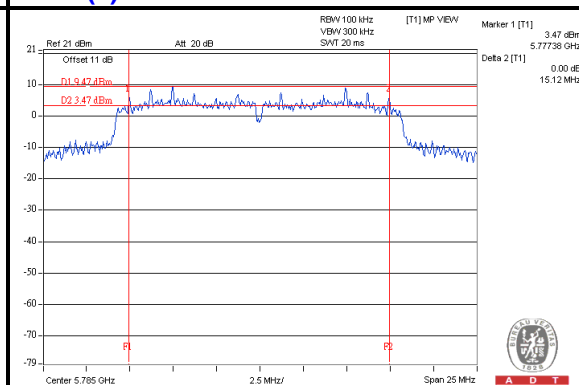


Chain(0) : CH165

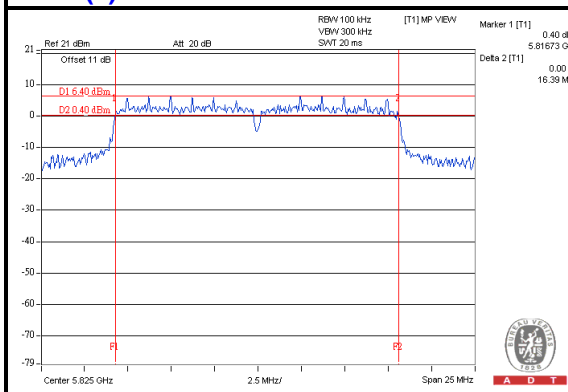




A D T


Chain(1) : CH149

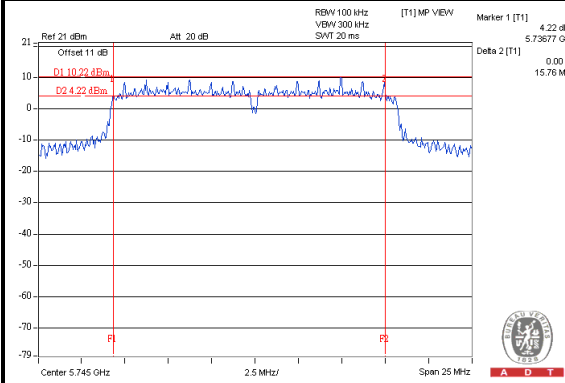

Chain(1) : CH157

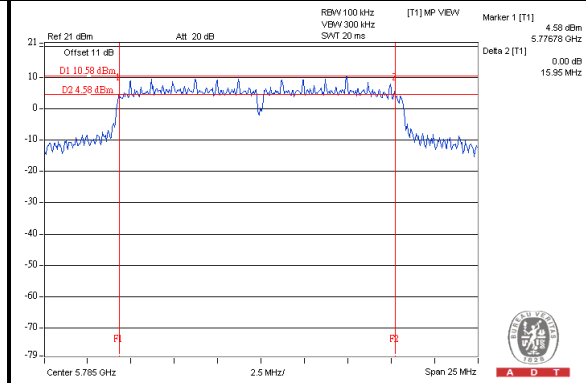

Chain(1) : CH165

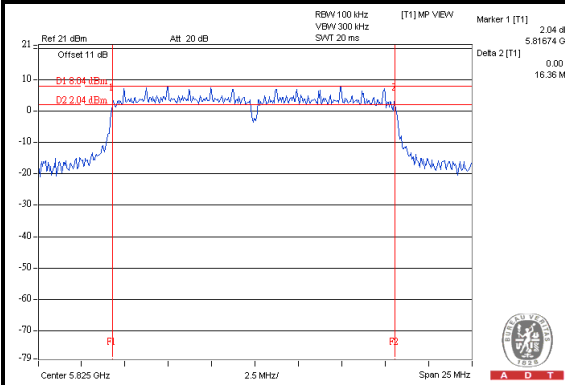




A D T


802.11n (HT20):

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.66	16.91	0.5	PASS
157	5785	15.49	16.96	0.5	PASS
165	5825	17.26	16.47	0.5	PASS


Chain(0) : CH149

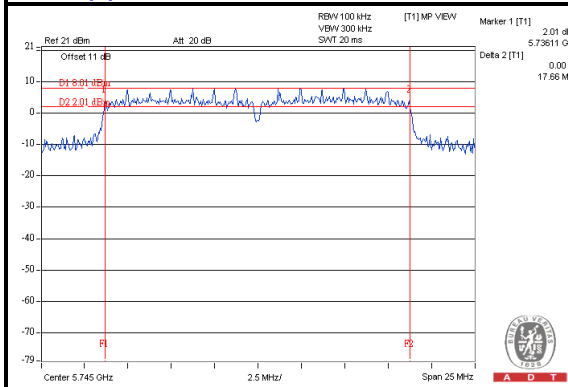

Chain(0) : CH157

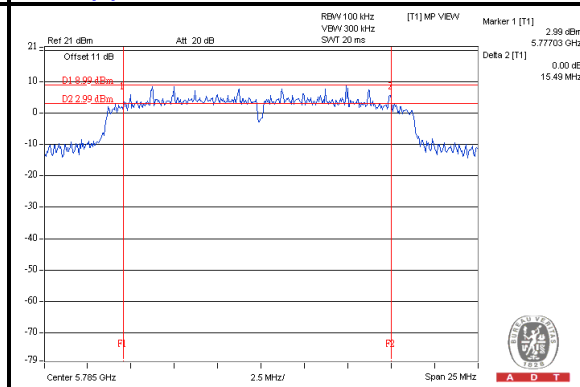


Chain(0) : CH165

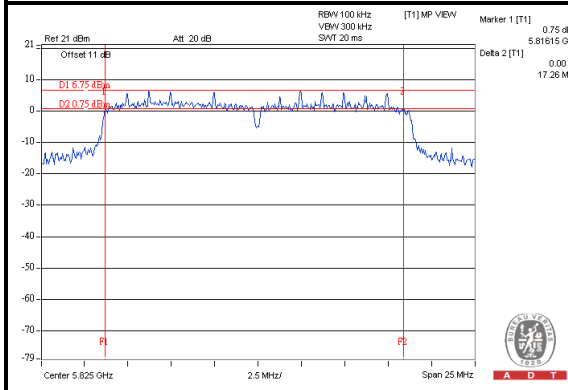




A D T


Chain(1) : CH149

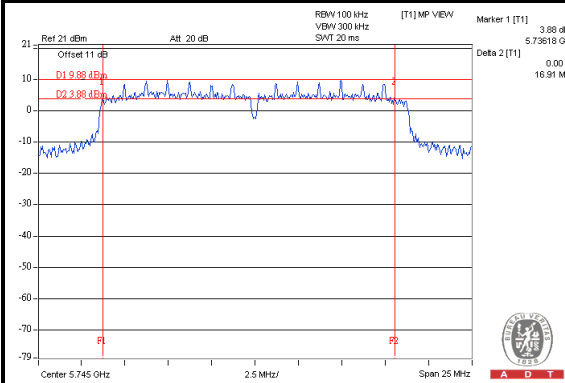

Chain(1) : CH157

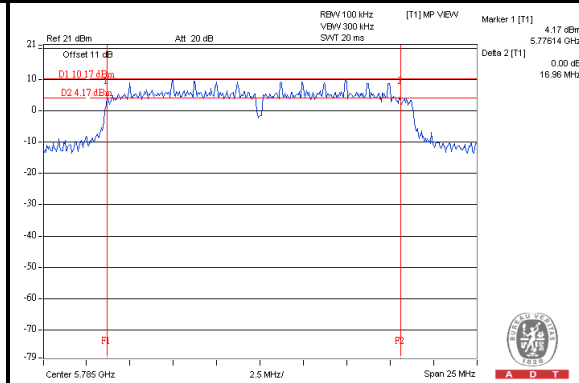

Chain(1) : CH165

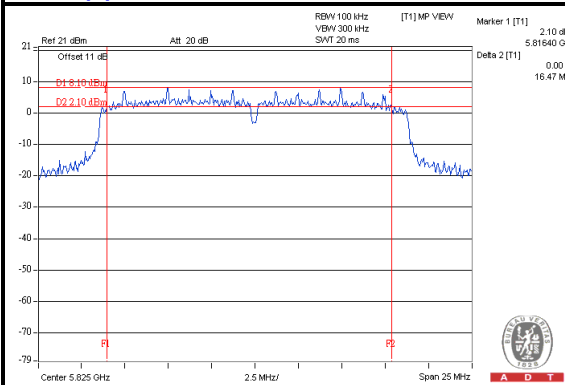




A D T


802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	32.76	35.15	0.5	PASS
159	5795	35.17	35.16	0.5	PASS


Chain(0) : CH151

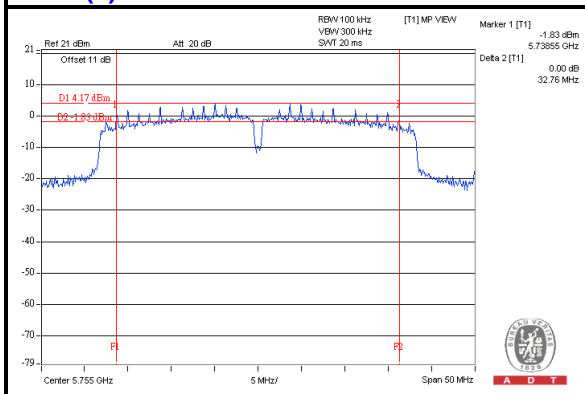


Chain(0) : CH159

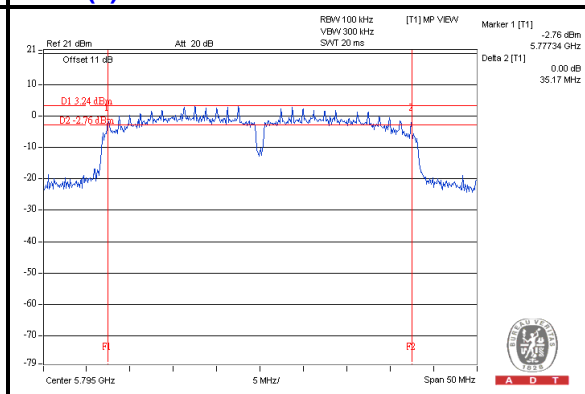

Chain(1) : CH151

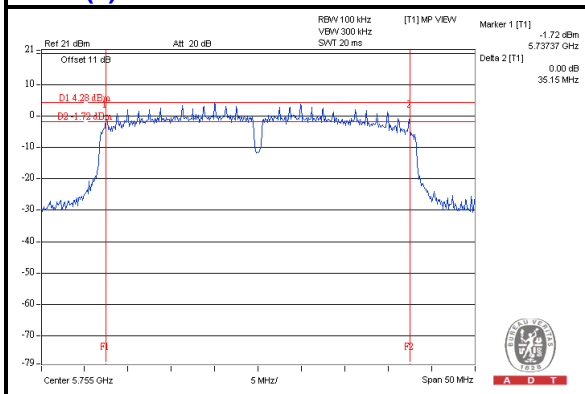

Chain(1) : CH159

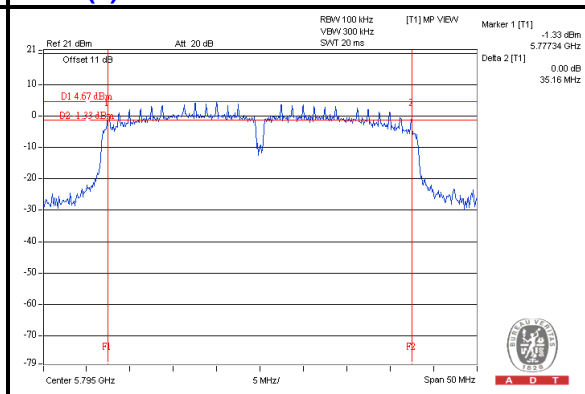



A D T

5.5 OCCUPIED BANDWIDTH MEASUREMENT

5.5.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 11, 2013

5.5.2 TEST PROCEDURE

- 1) Set RBW \geq 1% of the emission bandwidth.
- 2) Set the VBW \geq 3 x RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Record the 99% emission bandwidth.

5.5.3 TEST SETUP






5.5.4 EUT OPERATING CONDITIONS

Same as the 4.1.6

5.5.5 TEST RESULTS

802.11a


CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	
		CHAIN(0)	CHAIN(1)
149	5745	26.28	20.88
157	5785	26.52	22.32
165	5825	21.84	16.92

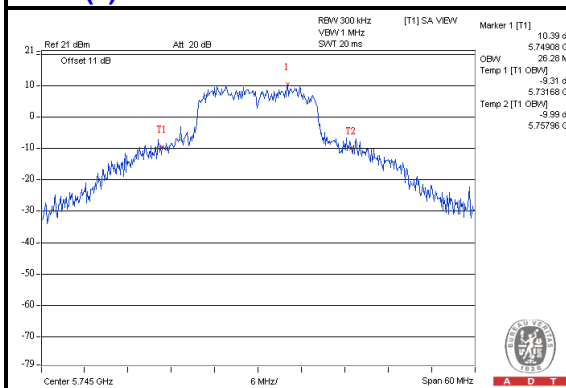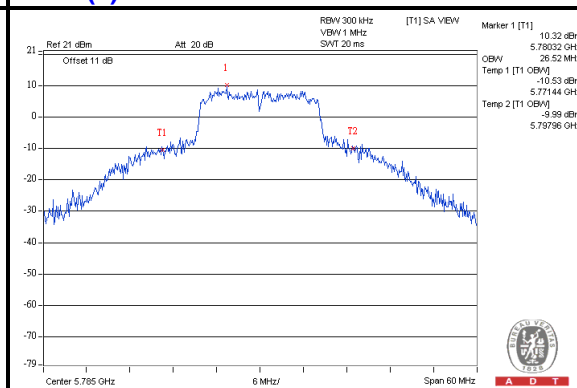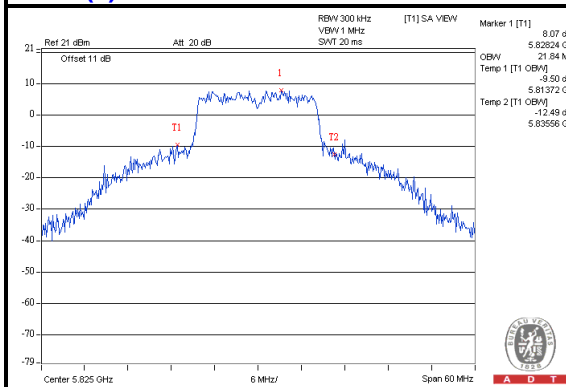Chain(0) : CH149

Chain(0) : CH157

Chain(0) : CH165


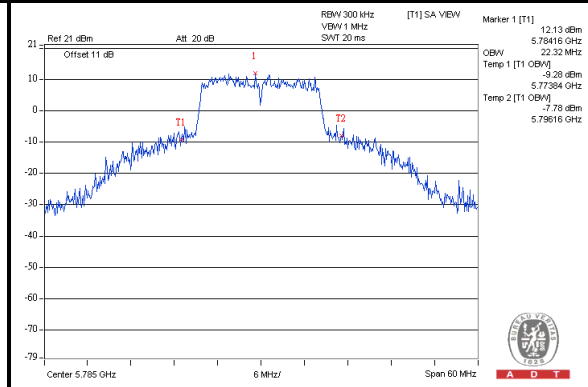


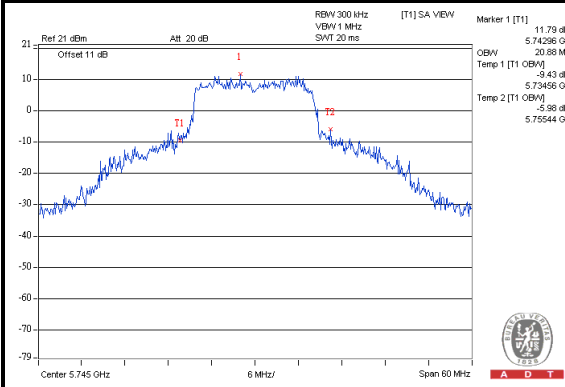A D T


Chain(1) : CH149



Chain(1) : CH157



Chain(1) : CH165

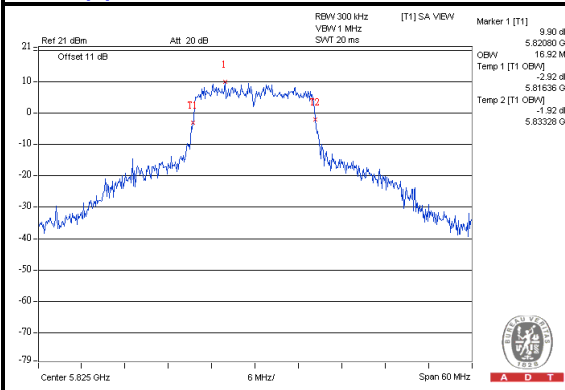




A D T


802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	
		CHAIN(0)	CHAIN(1)
149	5745	28.68	20.40
157	5785	27.12	22.80
165	5825	22.80	18.00


Chain(0) : CH149

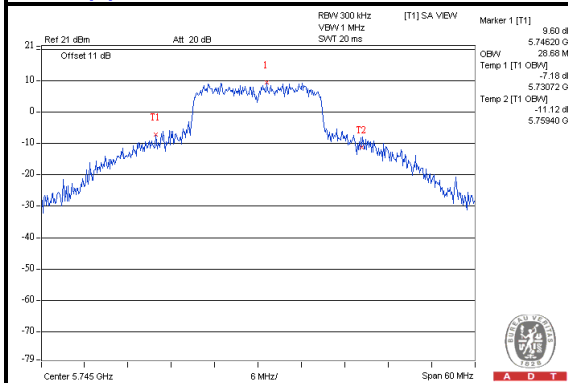

Chain(0) : CH157

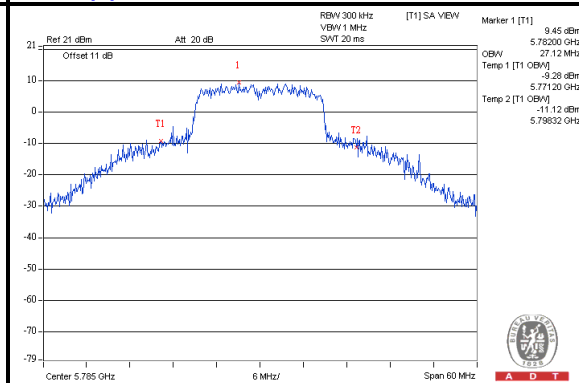


Chain(0) : CH165

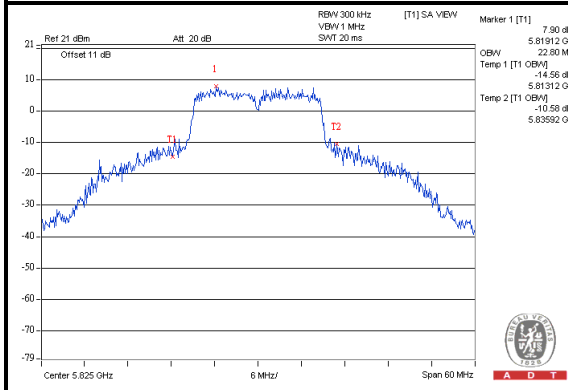




A D T


Chain(1) : CH149

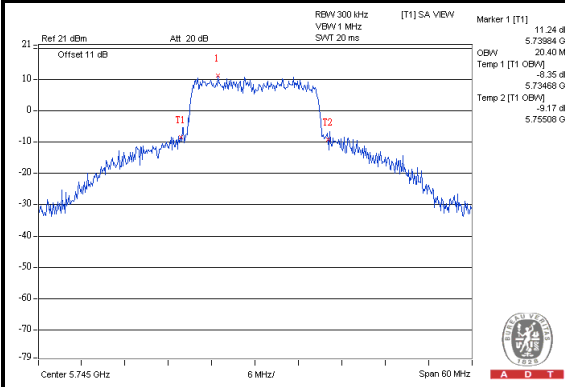

Chain(1) : CH157

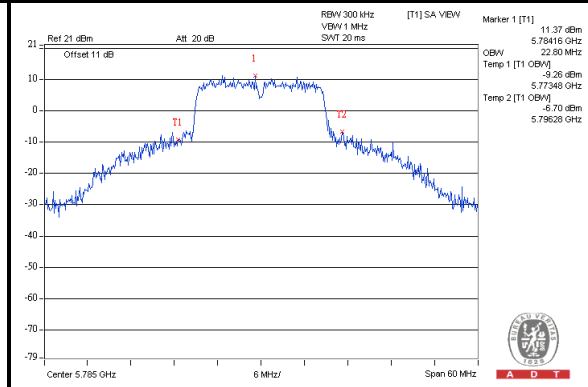

Chain(1) : CH165

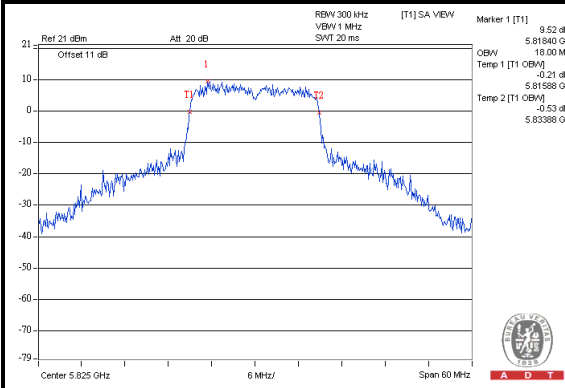




A D T


802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	
		CHAIN(0)	CHAIN(1)
151	5755	37.00	36.40
159	5795	37.00	36.20


Chain(0) : CH151

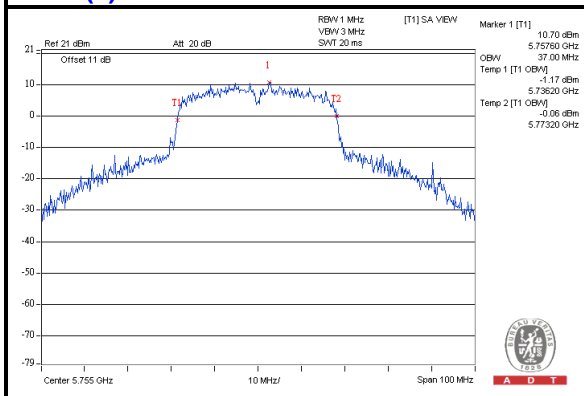


Chain(0) : CH159

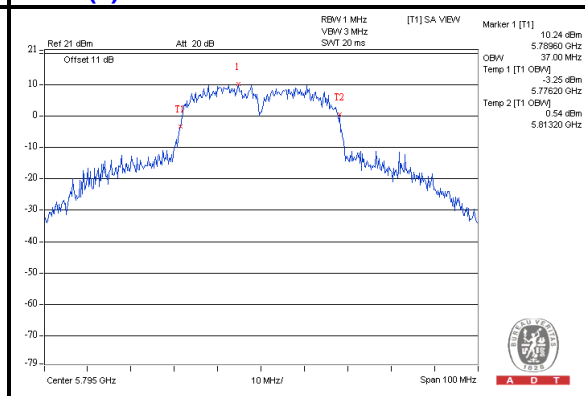

Chain(1) : CH151

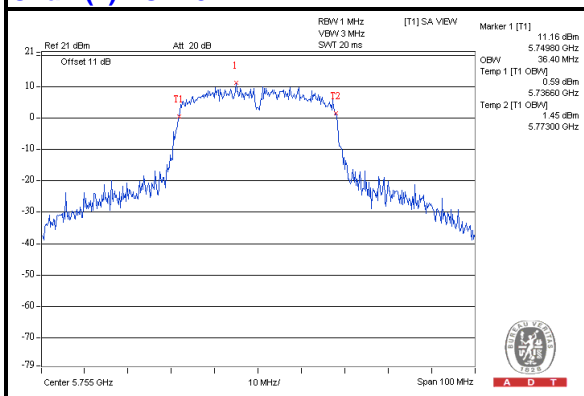

Chain(1) : CH159

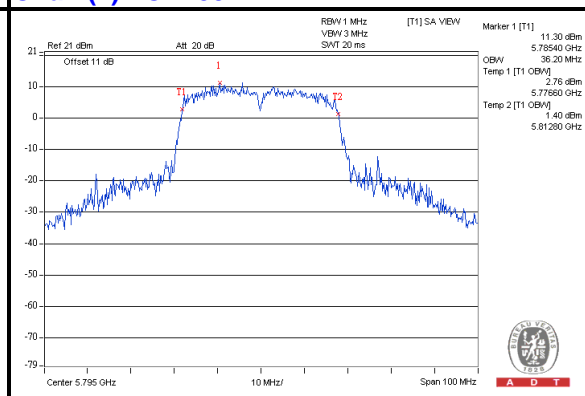

5.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 11, 2013

5.6.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation

5.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.6 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11a


Chain(0) : CH149

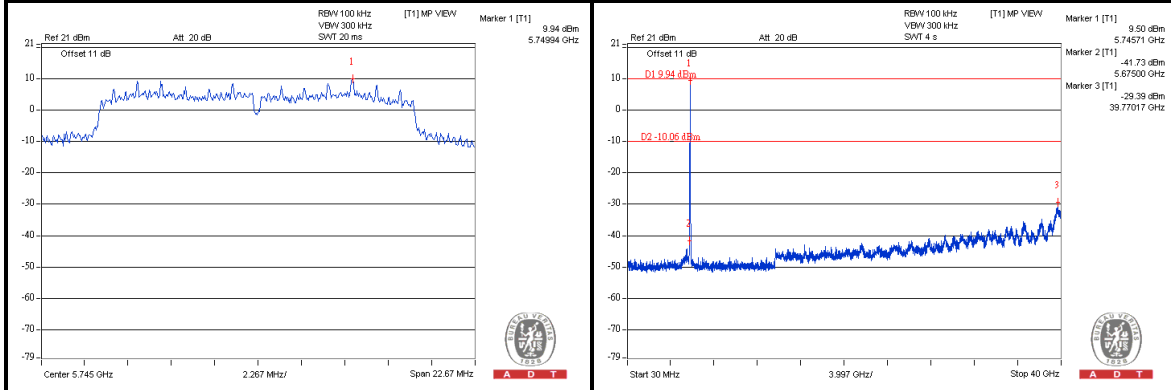

Chain(0) : CH 157

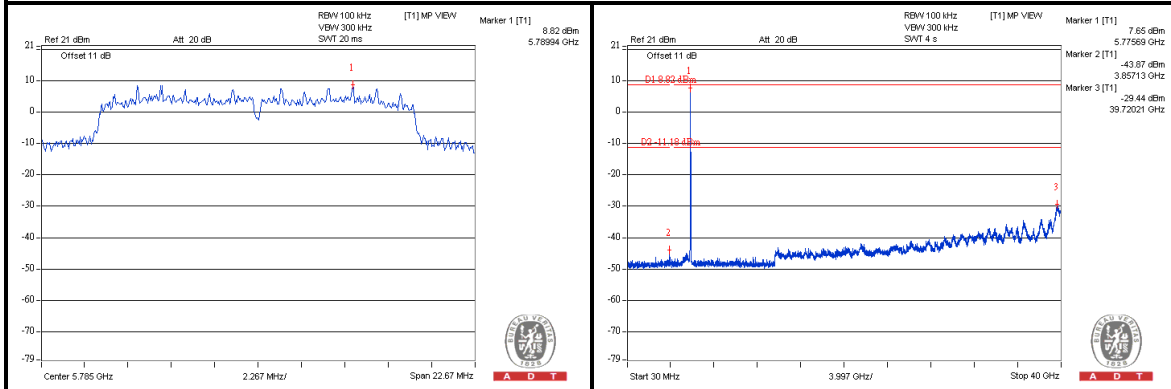

Chain(0) : CH 165


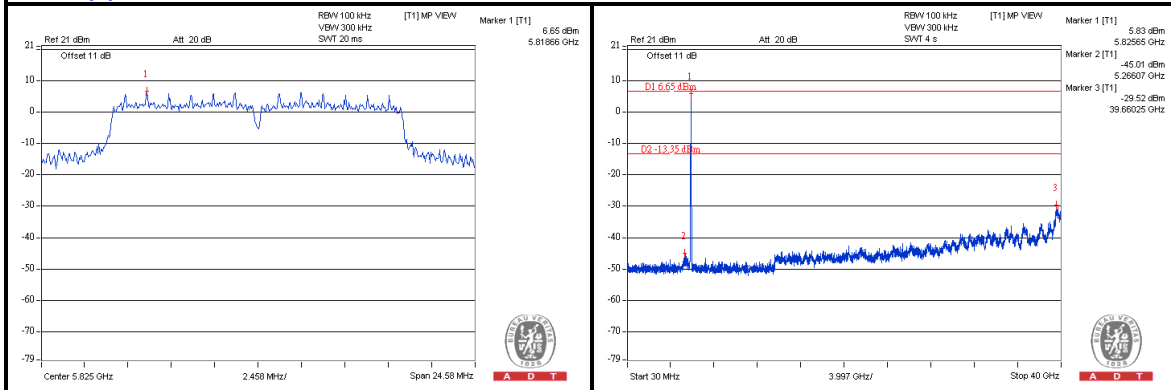






A D T

802.11a



Chain(1) : CH149

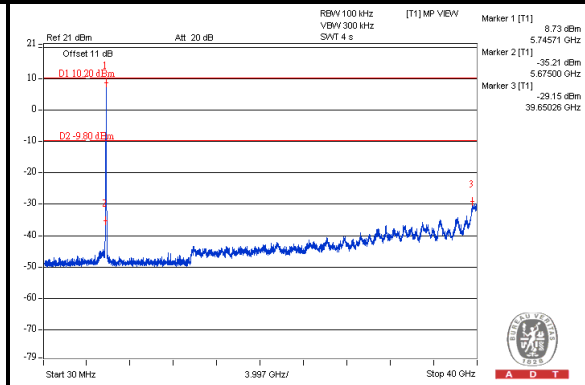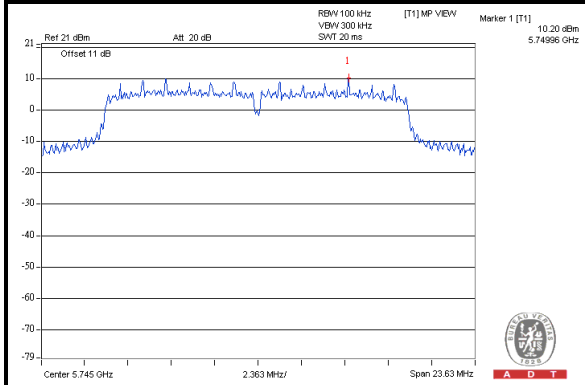

Chain(1) : CH 157

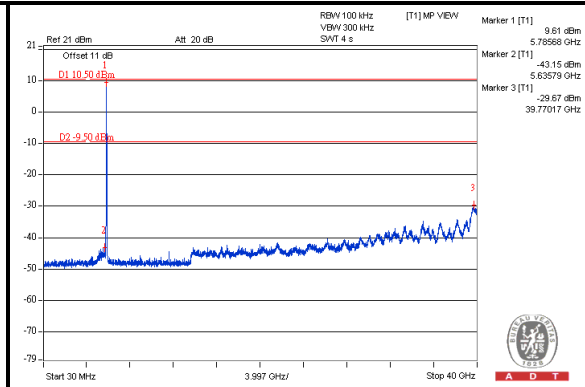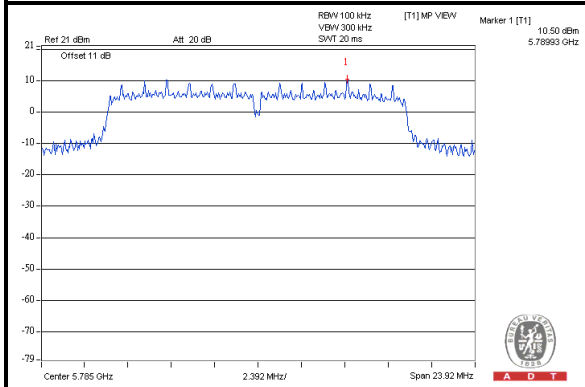

Chain(1) : CH 165

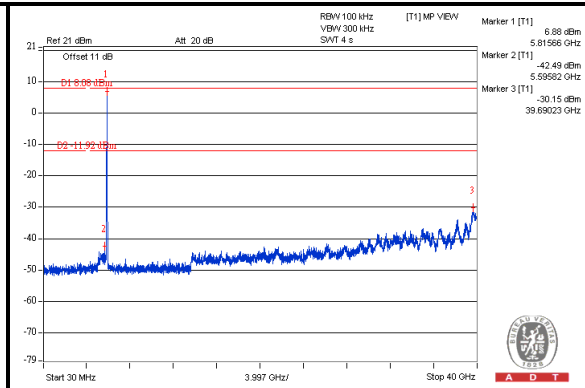
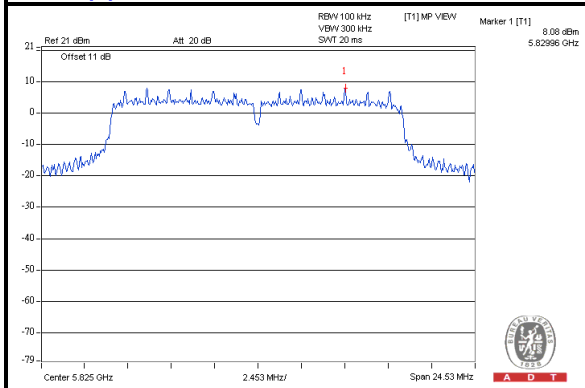






A D T

802.11n (HT20)



Chain(0) : CH149

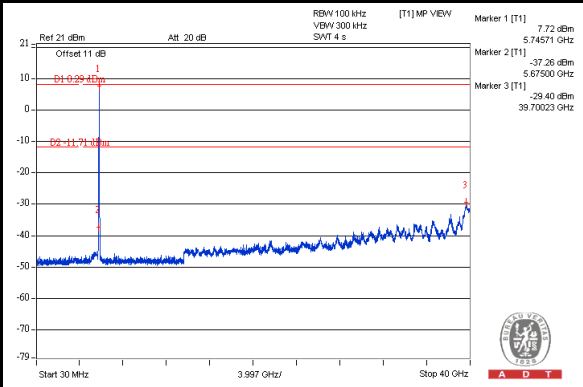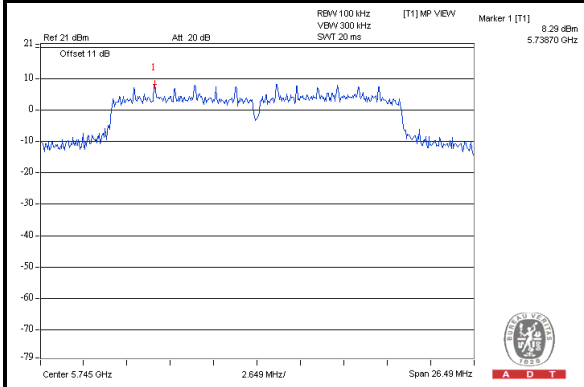

Chain(0) : CH 157

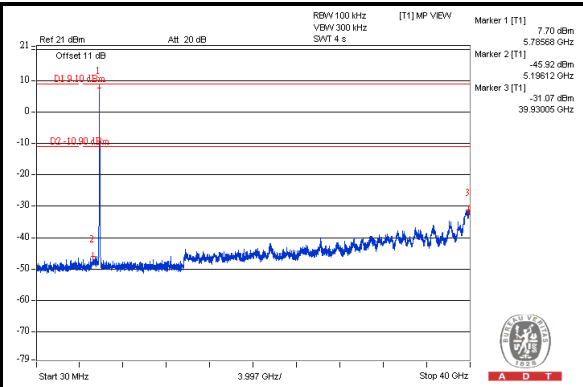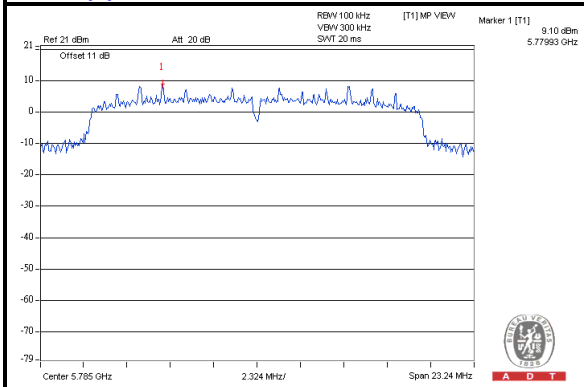

Chain(0) : CH 165

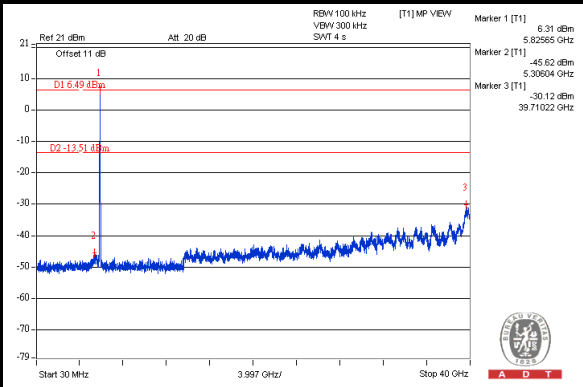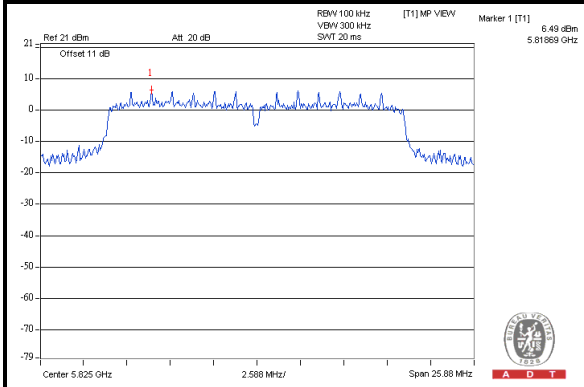





A D T

802.11n (HT20)


Chain(1) : CH149

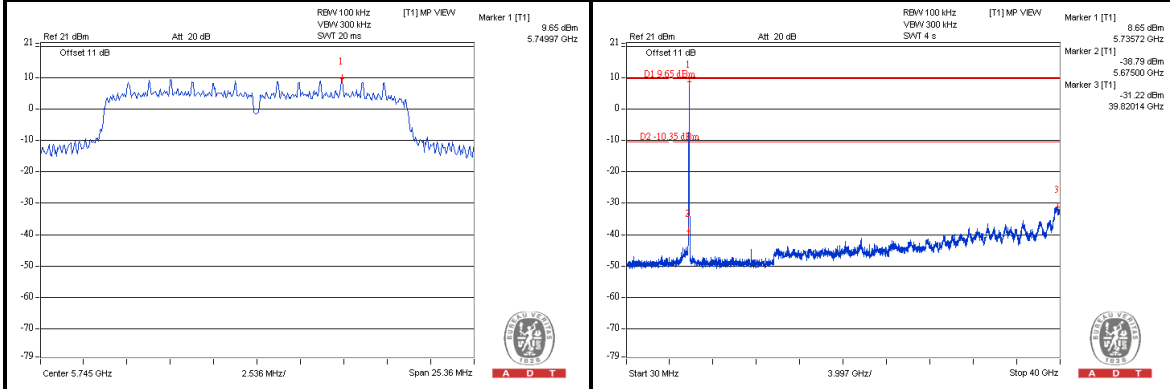

Chain(1) : CH 157

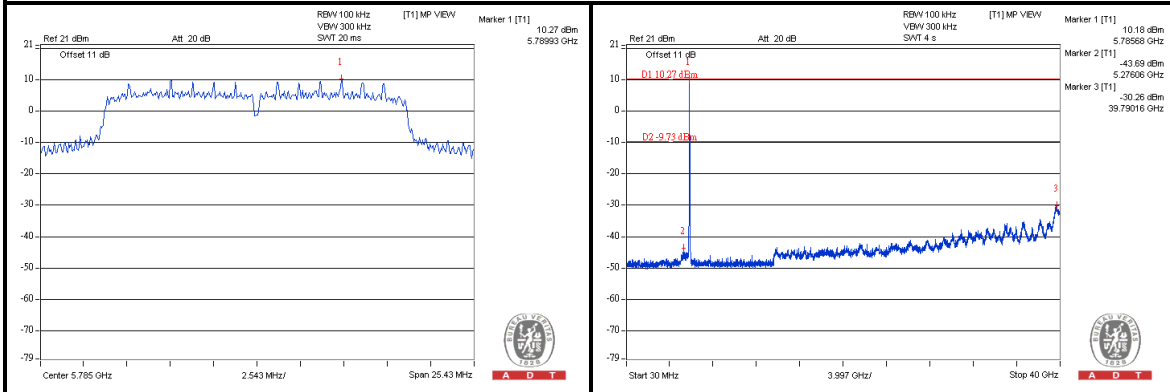

Chain(1) : CH 165

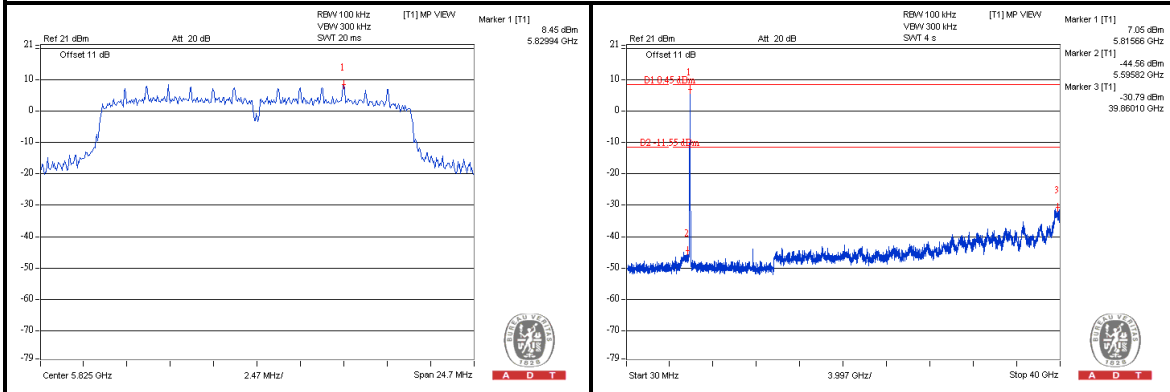





A D T

802.11n (HT40)

Chain(0) : CH 151

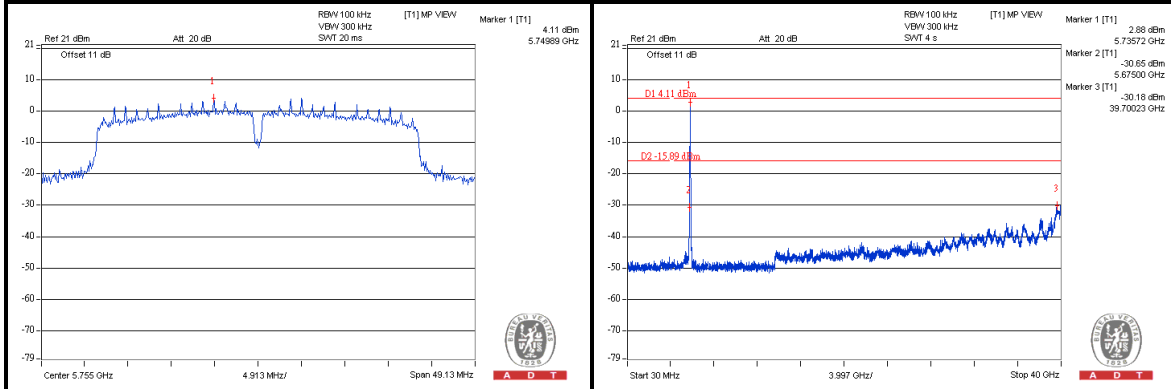

Chain(0) : CH 159

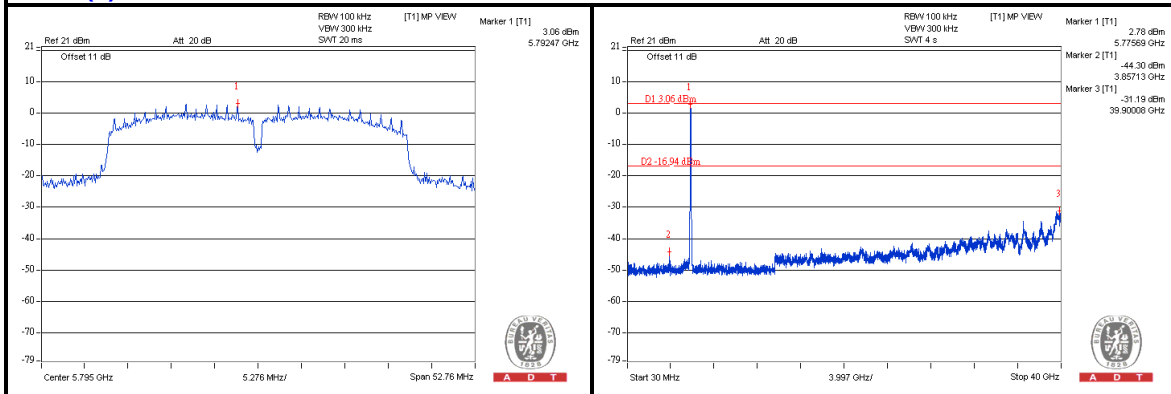





A D T

802.11n (HT40)

Chain(1) : CH 151

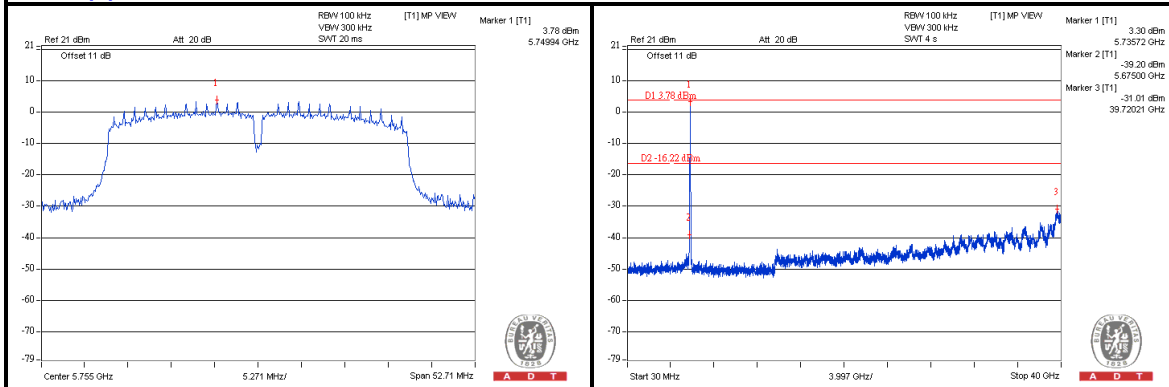

Chain(1) : CH 159

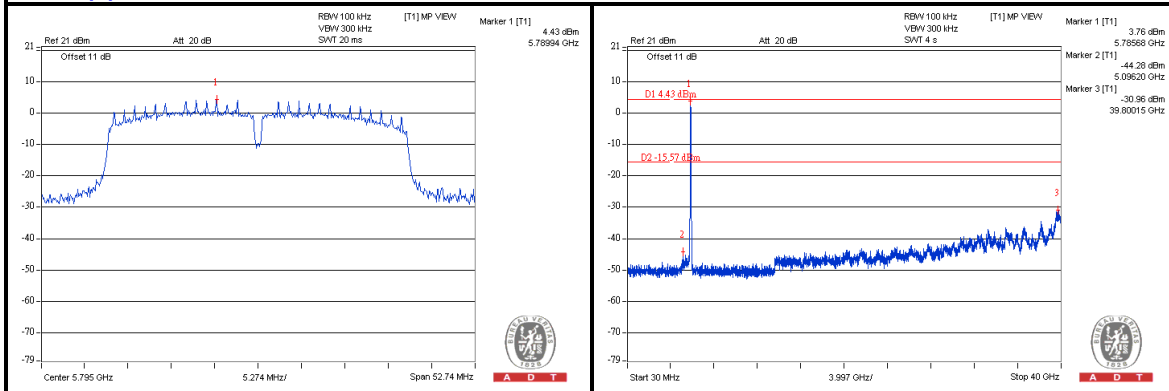

5.7 UNWANTED EMISSION MEASUREMENT (RADIATED VERSUS CONDUCTED)

5.7.1 LIMITS OF UNWANTED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

5.7.2 TEST INSTRUMENTS

Below 1GHz test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 29,2013	Jan. 28,2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02578	June 26, 2012	June 25, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 19, 2012	Nov. 18, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 25, 2012	Dec. 24, 2013
RF Cable	NA	CHGCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Feb. 28, 2013



A D T

Above 1GHz test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 16, 2013	Jan. 15, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 30, 2012	Oct. 29, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 27, 2012	Nov. 26, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 26, 2012	Dec. 25, 2013
RF Cable	NA	CHHCAB_001	Oct. 07, 2012	Oct. 06, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: Mar. 06, 2013

5.7.3 TEST PROCEDURES

Following FCC KDB 558074 D01 DTS Meas. Guidance :
Radiated versus Conducted Measurements.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- e. For all of Radiation emission test
 - e-1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
 - e-2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - e-3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - e-4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - e-5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - e-6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


5.7.4 DEVIATION FROM TEST STANDARD

No deviation


5.7.5 TEST SETUP

Radiation configuration:


<Frequency Range below 1GHz>

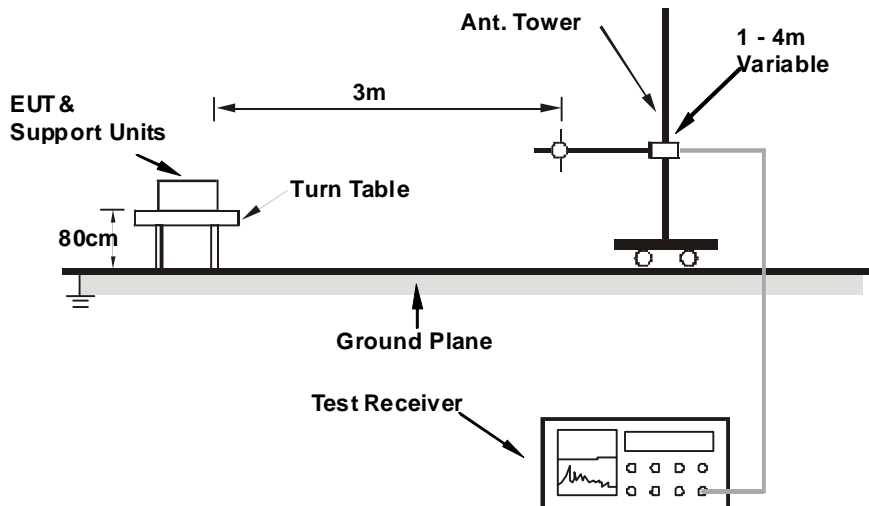

<Frequency Range above 1GHz>

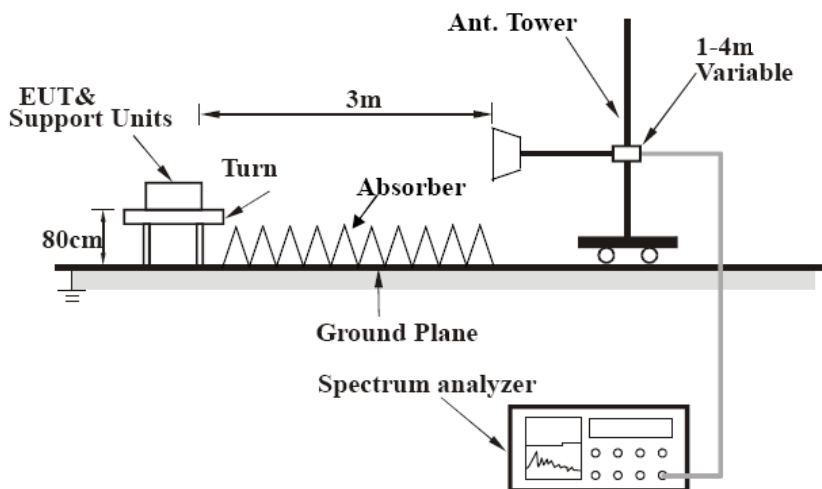

Conducted configuration:



For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.7.6 EUT OPERATING CONDITIONS

Same as the 4.7.6



A D T

5.7.7 TEST RESULTS (RADIATED MEASUREMENT)

Radiated versus Conducted Measurement	
<input type="checkbox"/> Conducted measurement	<input checked="" type="checkbox"/> Radiated measurement
<p><u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)</p> <p><u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).</p>	

BELOW 1GHz WORST-CASE DATA

802.11n (HT20)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.93	33.7 QP	40.0	-6.3	1.24 H	200	20.72	12.98
2	76.10	32.2 QP	40.0	-7.8	1.10 H	65	21.34	10.84
3	136.92	35.5 QP	43.5	-8.0	1.10 H	100	21.82	13.72
4	476.86	30.2 QP	46.0	-15.8	1.00 H	120	10.39	19.81
5	625.00	33.0 QP	46.0	-13.0	1.10 H	65	10.05	22.98
6	875.02	41.0 QP	46.0	-5.0	1.41 H	100	13.88	27.12

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	65.10	33.6 QP	40.0	-6.4	1.00 V	210	20.48	13.13
2	100.00	28.0 QP	43.5	-15.5	1.00 V	65	18.13	9.88
3	132.40	31.6 QP	43.5	-11.9	1.45 V	75	18.21	13.41
4	620.00	31.1 QP	46.0	-14.9	1.45 V	65	8.22	22.91
5	750.00	39.9 QP	46.0	-6.1	1.45 V	65	14.98	24.91
6	874.00	36.2 QP	46.0	-9.8	1.45 V	85	9.08	27.11

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	60.4 PK	74.0	-13.6	1.07 H	166	10.22	50.18
2	11490.00	48.8 AV	54.0	-5.2	1.07 H	166	-1.38	50.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	61.7 PK	74.0	-12.3	1.61 V	242	11.52	50.18
2	11490.00	49.5 AV	54.0	-4.5	1.61 V	242	-0.68	50.18

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	60.4 PK	74.0	-13.6	1.03 H	178	10.22	50.18
2	11570.00	48.7 AV	54.0	-5.3	1.03 H	178	-1.48	50.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	61.2 PK	74.0	-12.8	1.56 V	245	11.02	50.18
2	11570.00	49.3 AV	54.0	-4.7	1.56 V	245	-0.88	50.18

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	60.6 PK	74.0	-13.4	1.05 H	163	10.18	50.42
2	11650.00	49.1 AV	54.0	-4.9	1.05 H	163	-1.32	50.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	61.5 PK	74.0	-12.5	1.52 V	237	11.08	50.42
2	11650.00	49.7 AV	54.0	-4.3	1.52 V	237	-0.72	50.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.



A D T

802.11n (HT20)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	60.6 PK	74.0	-13.4	1.12 H	157	10.42	50.18
2	11490.00	49.0 AV	54.0	-5.0	1.12 H	157	-1.18	50.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	61.8 PK	74.0	-12.2	1.66 V	256	11.62	50.18
2	11490.00	49.6 AV	54.0	-4.4	1.66 V	256	-0.58	50.18

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	60.3 PK	74.0	-13.7	1.11 H	169	10.12	50.18
2	11570.00	48.6 AV	54.0	-5.4	1.11 H	169	-1.58	50.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	60.9 PK	74.0	-13.1	1.51 V	234	10.72	50.18
2	11570.00	49.2 AV	54.0	-4.8	1.51 V	234	-0.98	50.18

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	60.1 PK	74.0	-13.9	1.07 H	151	9.68	50.42
2	11650.00	48.7 AV	54.0	-5.3	1.07 H	151	-1.72	50.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	61.7 PK	74.0	-12.3	1.65 V	242	11.28	50.42
2	11650.00	49.7 AV	54.0	-4.3	1.65 V	242	-0.72	50.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.

802.11n (HT40)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11510.00	60.4 PK	74.0	-13.6	1.13 H	160	10.23	50.17
2	11510.00	48.6 AV	54.0	-5.4	1.13 H	160	-1.57	50.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11510.00	61.0 PK	74.0	-13.0	1.56 V	238	10.83	50.17
2	11510.00	49.5 AV	54.0	-4.5	1.56 V	238	-0.67	50.17

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11590.00	61.0 PK	74.0	-13.0	1.13 H	155	10.81	50.19
2	11590.00	49.0 AV	54.0	-5.0	1.13 H	155	-1.19	50.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11590.00	61.0 PK	74.0	-13.0	1.52 V	251	10.81	50.19
2	11590.00	49.7 AV	54.0	-4.3	1.52 V	251	-0.49	50.19

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.



A D T

5.7.8 TEST RESULTS (CONDUCTED MEASUREMENT)

Radiated versus Conducted Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement
<p><u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)</p> <p><u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).</p>	

Conducted Measurement Factor
<p>a. The composite gain will be used when signal support the correlated signal. (Composite gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.01\text{dBi}$)</p> <p>b. For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.</p> <p>c. For the band edge the gain for the specific band may have been used.</p> <p>d. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For $f = 30 - 1000$ MHz, add 4.7 dB.</p> <p>Note: The conducted emission test was considered some factor to compute test result.</p>



A D T

BELOW 1GHz WORST-CASE DATA

802.11n (HT20)

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
149	41.155 QP	-59.81	-62.72	-58.02	-55.26	-2.76	PASS
	167.0125 QP	-61.2	-64.01	-59.37	-51.76	-7.61	PASS
	310.5725 QP	-64.86	-61.53	-59.87	-49.26	-10.61	PASS
	453.6475 QP	-64.84	-61.31	-59.72	-49.26	-10.46	PASS
	791.2075 QP	-62.2	-63.83	-59.93	-49.26	-10.67	PASS
	1000 QP	-51.72	-52.08	-48.89	-41.26	-7.63	PASS



A D T

ABOVE 1GHz DATA

802.11a

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
149	3828.125 PK	-39.79	-43.04	-38.11	-21.26	-16.85	PASS
	3828.125 AV	-43.33	-53.5	-42.93	-41.26	-1.67	PASS
	11490.625 PK	-35.28	-38.69	-33.65	-21.26	-12.39	PASS
	11490.625 AV	-44.8	-47.75	-43.02	-41.26	-1.76	PASS

802.11a

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
157	3856.25 PK	-38.11	-44.81	-37.27	-21.26	-16.01	PASS
	3856.25 AV	-41.49	-53.58	-41.23	-41.26	0.03	PASS *
	11568.75 PK	-35.08	-38.51	-33.45	-21.26	-12.19	PASS
	11571.875 AV	-46.3	-47.58	-43.88	-41.26	-2.62	PASS

*The unwanted emission at 3.8GHz was verified and the test result was passed by radiated measurement. (Please refer APPENDIX A)

802.11a

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
165	3884.375 PK	-36.89	-44.44	-36.19	-21.26	-14.93	PASS
	3881.25 AV	-39.51	-53.38	-39.34	-41.26	1.92	PASS *
	11650 PK	-42.16	-37.02	-35.86	-21.26	-14.6	PASS
	11650 AV	-52.57	-49.75	-47.92	-41.26	-6.66	PASS

*The unwanted emission at 3.8GHz was verified and the test result was passed by radiated measurement. (Please refer APPENDIX A)



A D T

802.11n(HT20)

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
149	3828.125 PK	-39.17	-44	-37.94	-21.26	-16.68	PASS
	3828.125 AV	-43.93	-53.74	-43.5	-41.26	-2.24	PASS
	11493.75 PK	-33.92	-38.26	-32.56	-21.26	-11.3	PASS
	11490.625 AV	-45.66	-47.98	-43.66	-41.26	-2.4	PASS

802.11n(HT20)

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
157	3856.25 PK	-37.53	-43.21	-36.49	-21.26	-15.23	PASS
	3856.25 AV	-41.35	-53.86	-41.11	-41.26	0.15	PASS *
	11571.875 PK	-36.29	-38.49	-34.24	-21.26	-12.98	PASS
	11571.875 AV	-46.72	-47.61	-44.13	-41.26	-2.87	PASS

*The unwanted emission at 3.8GHz was verified and the test result was passed by radiated measurement. (Please refer APPENDIX A)

802.11n(HT20)

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
165	3884.375 PK	-36.71	-44.2	-36	-21.26	-14.74	PASS
	3881.25 AV	-39.38	-53.08	-39.2	-41.26	2.06	PASS *
	11650 PK	-42.49	-39.53	-37.75	-21.26	-16.49	PASS
	11650 AV	-52.38	-50.03	-48.04	-41.26	-6.78	PASS

*The unwanted emission at 3.8GHz was verified and the test result was passed by radiated measurement. (Please refer APPENDIX A)



A D T

802.11n(HT40)

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
151	3837.5 PK	-38.59	-43.52	-37.38	-21.26	-16.12	PASS
	3834.375 AV	-42	-52.72	-41.65	-41.26	-0.39	PASS *
	11503.125 PK	-41.56	-39.33	-37.29	-21.26	-16.03	PASS
	11509.375 AV	-51.38	-51.04	-48.2	-41.26	-6.94	PASS

*The unwanted emission at 3.8GHz was verified and the test result was passed by radiated measurement. (Please refer APPENDIX A)

802.11n(HT40)

Conducted spurious emission table

Channel	SPURIOUS EMISSION/HARMONIC FREQ.(MHz)	POWER LEVEL (dBm)		TOTAL POWER LEVEL (dBm)	SPURIOUS EMISSION/HARMONIC Limit(dBm)	Margin (dB)	PASS/FAIL
		Chain 0	Chain 1				
159	3862.5 PK	-37.82	-44.09	-36.9	-21.26	-15.64	PASS
	3862.5 AV	-40.06	-53.11	-39.85	-41.26	1.41	PASS *
	11593.75 PK	-44.02	-40.86	-39.15	-21.26	-17.89	PASS
	11593.75 AV	-53.05	-51.45	-49.17	-41.26	-7.91	PASS

*The unwanted emission at 3.8GHz was verified and the test result was passed by radiated measurement. (Please refer APPENDIX A)



A D T

5.8 AC POWER LINE CONDUCTED EMISSION MEASUREMENT

5.8.1 LIMITS OF AC POWER LINE CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar.11, 2013	Mar.10, 2014
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 06, 2012	Sep. 05, 2013
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 08,2012	June 07,2013
RF Cable (JYEBAO)	5DFB	COCCAB-001	Aug. 28, 2012	Aug. 27, 2013
50 ohms Terminator	50	EMC-3	Sep. 25, 2012	Sep. 24, 2013
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Mar. 12, 2013

5.8.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.


NOTE:

The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

5.8.4 DEVIATION FROM TEST STANDARD

No deviation

5.8.5 TEST SETUP

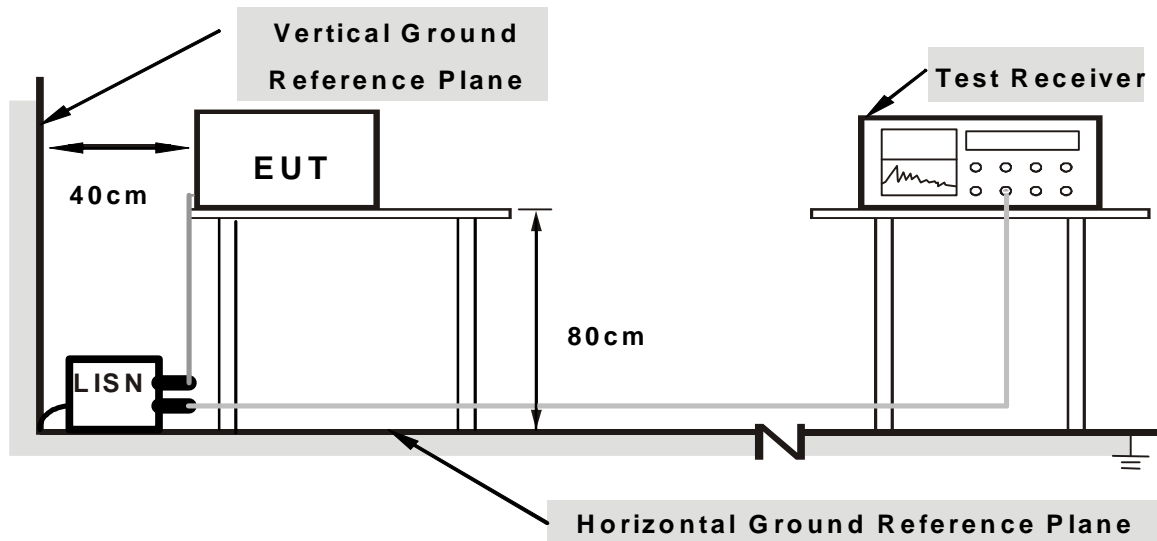

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.8.6 EUT OPERATING CONDITIONS

Same as the 4.7.6


5.8.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.11	56.40	46.08	56.51	46.19	66.00	56.00	-9.49	-9.81
2	0.20469	0.12	50.94	41.34	51.06	41.46	63.42	53.42	-12.36	-11.96
3	0.25156	0.13	44.95	35.64	45.08	35.77	61.71	51.71	-16.63	-15.94
4	0.59141	0.17	37.53	33.31	37.70	33.48	56.00	46.00	-18.30	-12.52
5	2.45313	0.24	28.04	22.69	28.28	22.93	56.00	46.00	-27.72	-23.07
6	24.06641	1.04	31.30	28.22	32.34	29.26	60.00	50.00	-27.66	-20.74

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

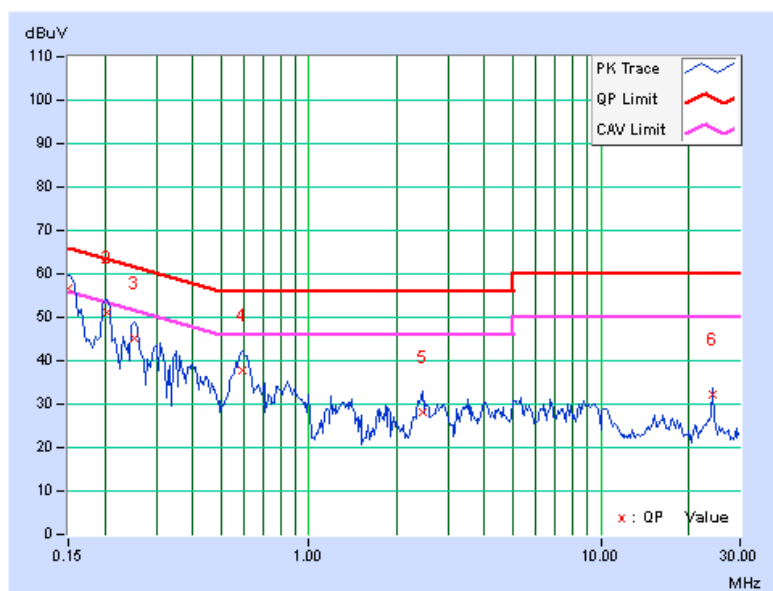


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. (dB)	AV. (dB)
1	0.15391	0.09	55.82	46.00	55.91	46.09	65.79	55.79	-9.88	-9.70
2	0.20078	0.10	49.10	38.83	49.20	38.93	63.58	53.58	-14.38	-14.65
3	0.25547	0.11	43.42	34.11	43.53	34.22	61.58	51.58	-18.04	-17.35
4	0.59141	0.16	36.57	31.73	36.73	31.89	56.00	46.00	-19.27	-14.11
5	2.43359	0.22	26.49	21.10	26.71	21.32	56.00	46.00	-29.29	-24.68
6	24.06641	0.70	29.48	26.27	30.18	26.97	60.00	50.00	-29.82	-23.03

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

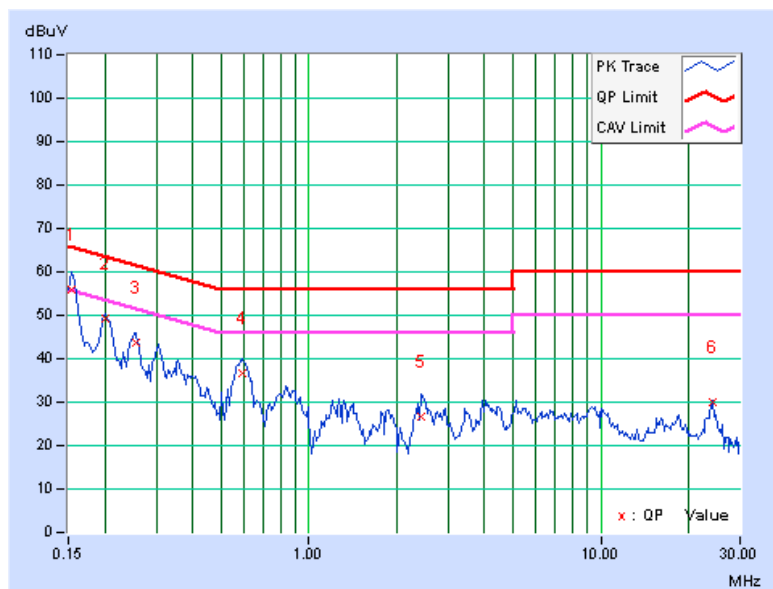



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

8. APPENDIX A - RADIATED EMISSION MEASUREMENT(FOR 5GHZ, 5725~5850MHZ BAND)

8.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

4. The lower limit shall apply at the transition frequencies.
5. Emission level (dBuV/m) = 20 log Emission level (uV/m).
6. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

8.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 16, 2013	Jan. 15, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 30, 2012	Oct. 29, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Mar. 25, 2013	Mar. 24, 2014
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 27, 2012	Nov. 26, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
Loop Antenna ^(*) R&S	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 26, 2012	Dec. 25, 2013
RF Cable	NA	CHHCAB_001	Oct. 07, 2012	Oct. 06, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: Apr. 30, 2013

8.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

8.1.4 DEVIATION FROM TEST STANDARD

No deviation

8.1.5 TEST SETUP

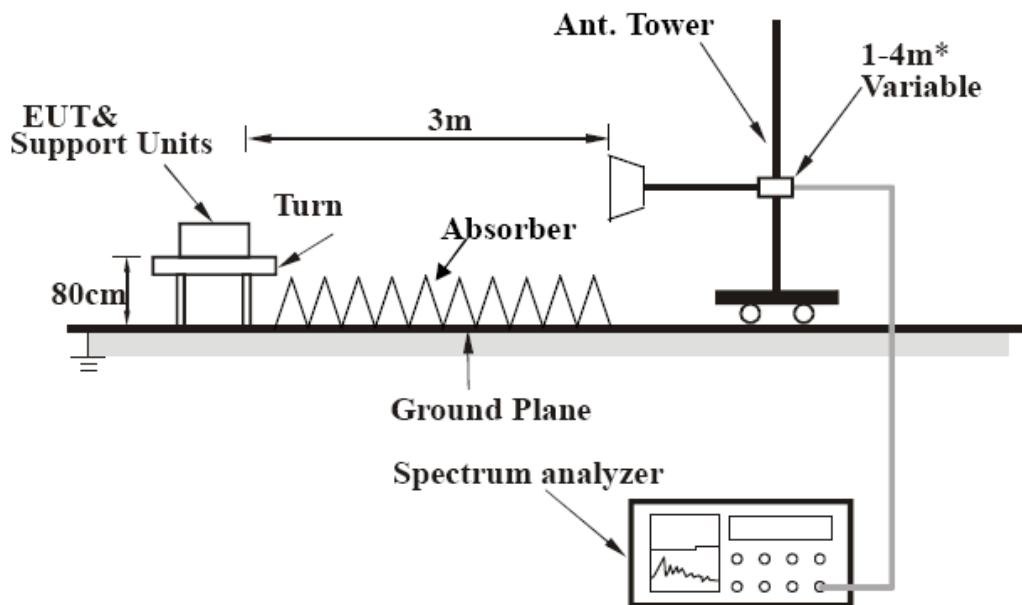

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program “Atheros Radio test 2_Version:2.3” to enable EUT under transmission/receiving condition continuously at specific channel frequency.

8.1.7 TEST RESULTS

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3830.00	43.0 PK	74.0	-31.0	1.10 H	112	5.92	37.08
2	3830.00	33.2 AV	54.0	-20.8	1.10 H	112	-3.88	37.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3830.00	43.5 PK	74.0	-30.5	1.00 V	359	6.42	37.08
2	3830.00	33.1 AV	54.0	-20.9	1.00 V	359	-3.98	37.08

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3856.67	43.6 PK	74.0	-30.4	1.00 H	243	6.46	37.14
2	3856.67	33.2 AV	54.0	-20.8	1.00 H	243	-3.94	37.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3856.67	42.6 PK	74.0	-31.4	1.00 V	137	5.46	37.14
2	3856.67	32.9 AV	54.0	-21.1	1.00 V	137	-4.24	37.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3883.33	44.0 PK	74.0	-30.0	1.27 H	255	6.79	37.21
2	3883.33	34.1 AV	54.0	-19.9	1.27 H	255	-3.11	37.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3883.33	44.3 PK	74.0	-29.7	1.00 V	265	7.09	37.21
2	3883.33	32.9 AV	54.0	-21.1	1.00 V	265	-4.31	37.21

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

802.11n (HT20)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3830.00	43.0 PK	74.0	-31.0	1.14 H	105	5.92	37.08
2	3830.00	33.1 AV	54.0	-20.9	1.14 H	105	-3.98	37.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3830.00	43.8 PK	74.0	-30.2	1.00 V	360	6.72	37.08
2	3830.00	33.5 AV	54.0	-20.5	1.00 V	360	-3.58	37.08

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3856.67	43.1 PK	74.0	-30.9	1.08 H	118	5.96	37.14
2	3856.67	33.0 AV	54.0	-21.0	1.08 H	118	-4.14	37.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3856.67	43.4 PK	74.0	-30.6	1.00 V	360	6.26	37.14
2	3856.67	33.3 AV	54.0	-20.7	1.00 V	360	-3.84	37.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3883.33	43.3 PK	74.0	-30.7	1.11 H	112	6.09	37.21
2	3883.33	33.1 AV	54.0	-20.9	1.11 H	112	-4.11	37.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3883.33	43.4 PK	74.0	-30.6	1.00 V	360	6.19	37.21
2	3883.33	33.3 AV	54.0	-20.7	1.00 V	360	-3.91	37.21

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

802.11n (HT40)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3836.67	43.1 PK	74.0	-30.9	1.07 H	114	6.01	37.09
2	3836.67	32.7 AV	54.0	-21.3	1.07 H	114	-4.39	37.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3836.67	43.0 PK	74.0	-31.0	1.01 V	360	5.91	37.09
2	3836.67	33.0 AV	54.0	-21.0	1.01 V	360	-4.09	37.09

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3863.33	42.8 PK	74.0	-31.2	1.09 H	118	5.64	37.16
2	3863.33	32.4 AV	54.0	-21.6	1.09 H	118	-4.76	37.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3863.33	43.4 PK	74.0	-30.6	1.03 V	360	6.24	37.16
2	3863.33	33.1 AV	54.0	-20.9	1.03 V	360	-4.06	37.16

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

9.APPENDIX B - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---