



A D T

802.11n (HT40) – Channel 54

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3518.75 PK	57.29	74	-16.71	-47.88	-46.26	6.01	-37.97
2	3512.5 AV	47.25	54	-6.75	-56.29	-57.93	6.01	-48.01
3	7028.125 PK	57.73	74	-16.27	-45.6	-47.76	6.01	-37.53
4	7018.75 AV	46.33	54	-7.67	-58.11	-57.8	6.01	-48.93
5	10543.75 PK	58.72	74	-15.28	-45.23	-45.91	6.01	-36.54
6	10540.625 AV	46.84	54	-7.16	-57.52	-57.36	6.01	-48.42
7	15814.375 PK	55.17	74	-18.83	-49.42	-48.83	6.01	-40.09
8	15811.5 AV	44.8	54	-9.2	-59.78	-59.2	6.01	-50.46

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

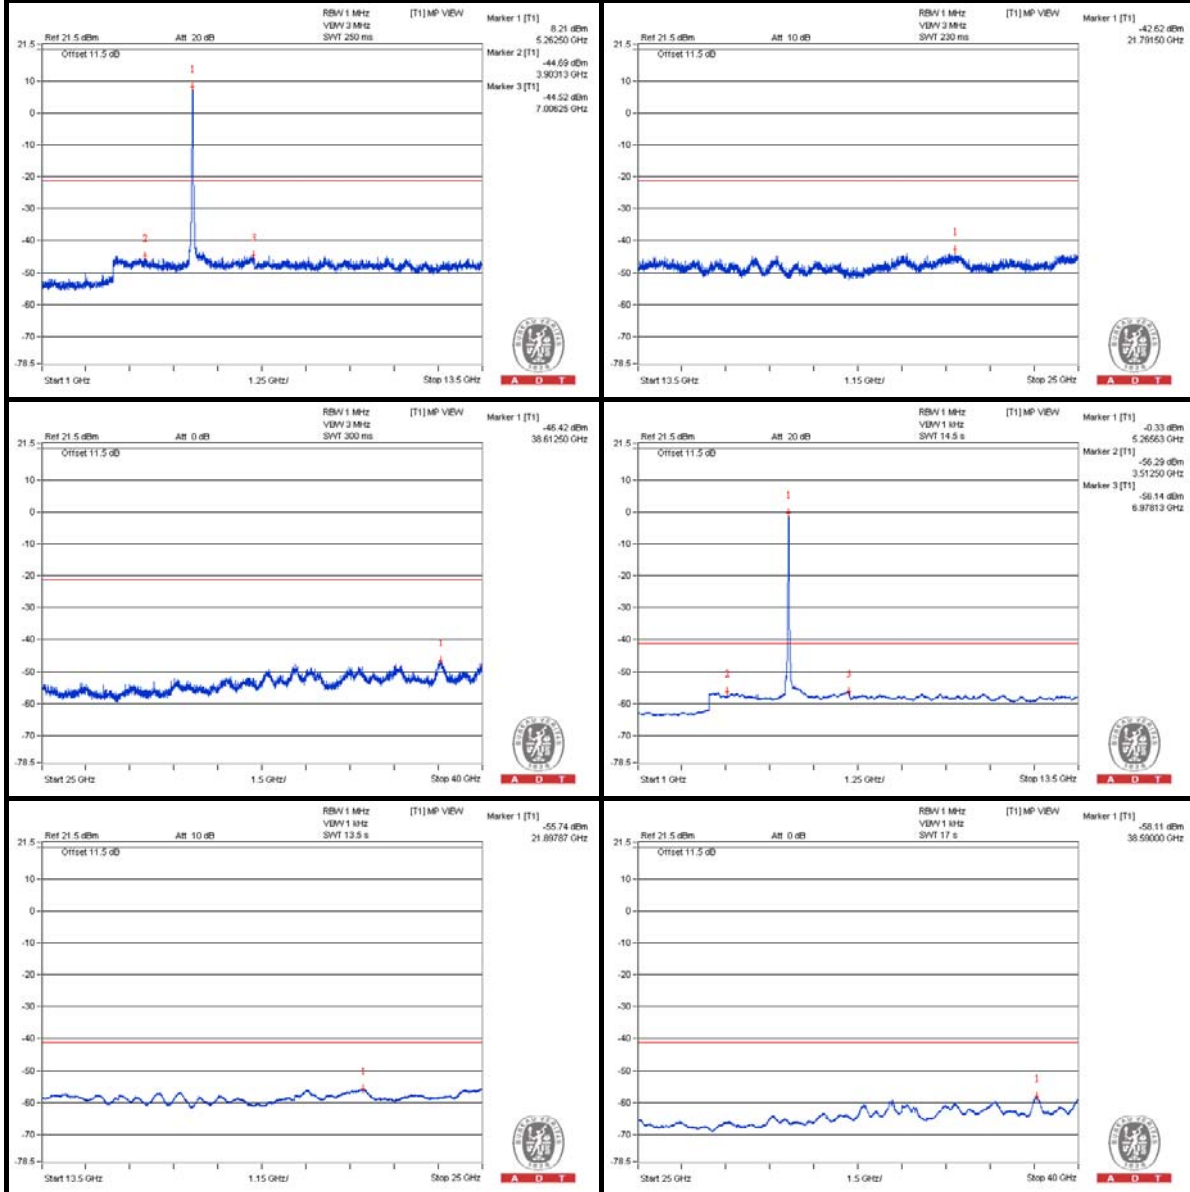

Chain (1)

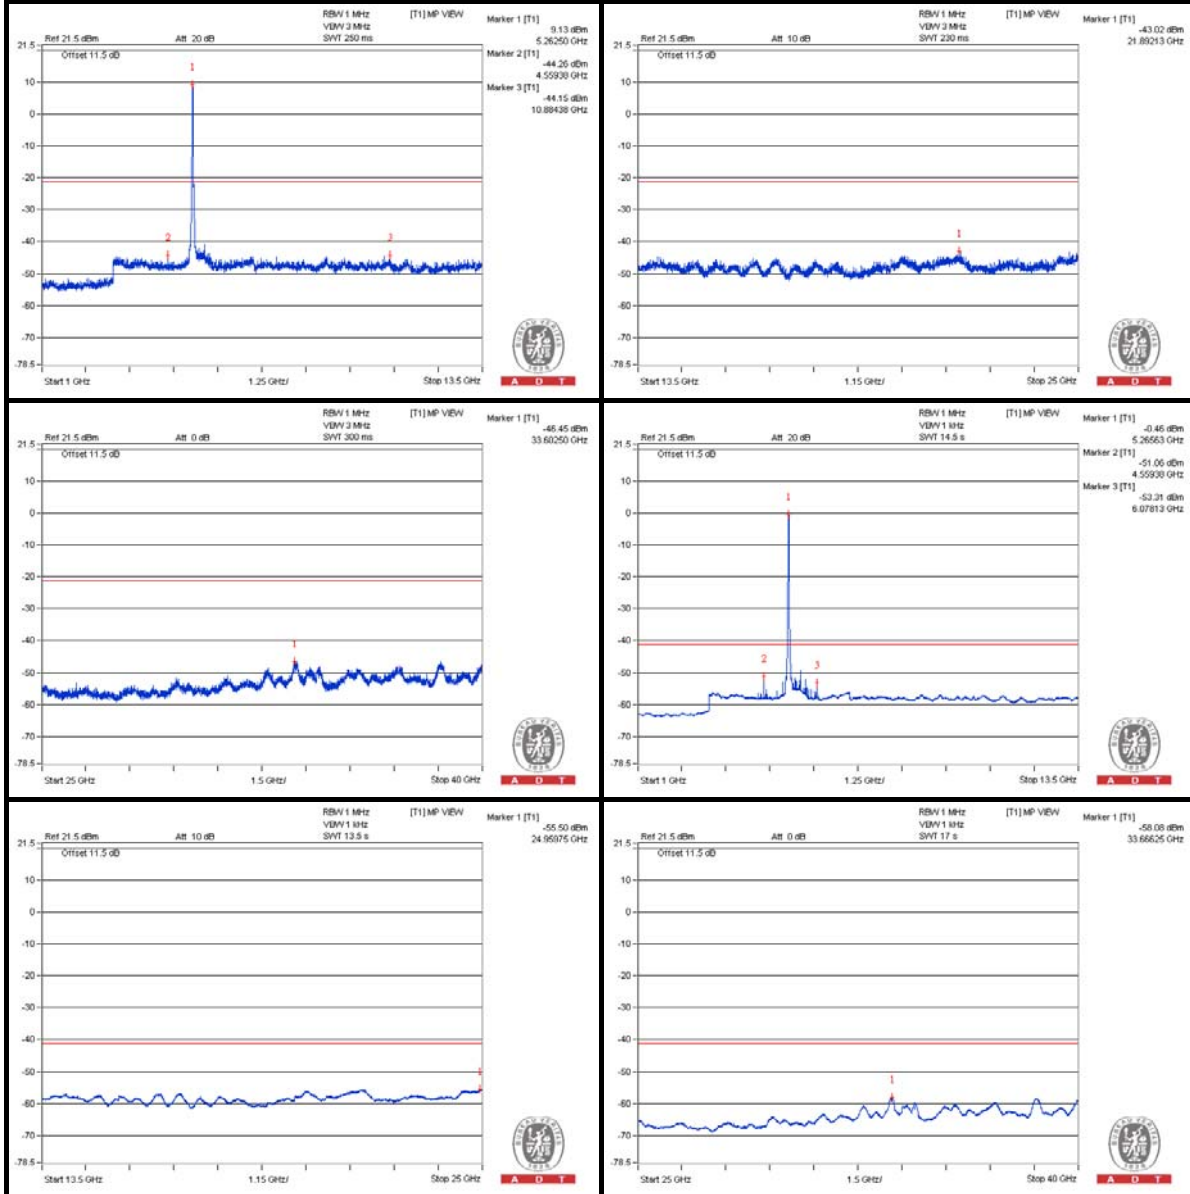



A D T


802.11n (HT40) – Channel 62

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3531.25 PK	57.88	74	-16.12	-45.74	-47.18	6.01	-37.38
2	3540.625 AV	47.73	54	-6.27	-55.6	-57.78	6.01	-47.53
3	7075 PK	57.16	74	-16.84	-46.79	-47.48	6.01	-38.1
4	7087.5 AV	46.06	54	-7.94	-58.32	-58.12	6.01	-49.2
5	10625 PK	57.5	74	-16.5	-48.08	-45.78	6.01	-37.76
6	10625 AV	46.19	54	-7.81	-58.22	-57.97	6.01	-49.07
7	15935.125 PK	57.31	74	-16.69	-47.1	-46.84	6.01	-37.95
8	15935.125 AV	45.91	54	-8.09	-58.57	-58.18	6.01	-49.35

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

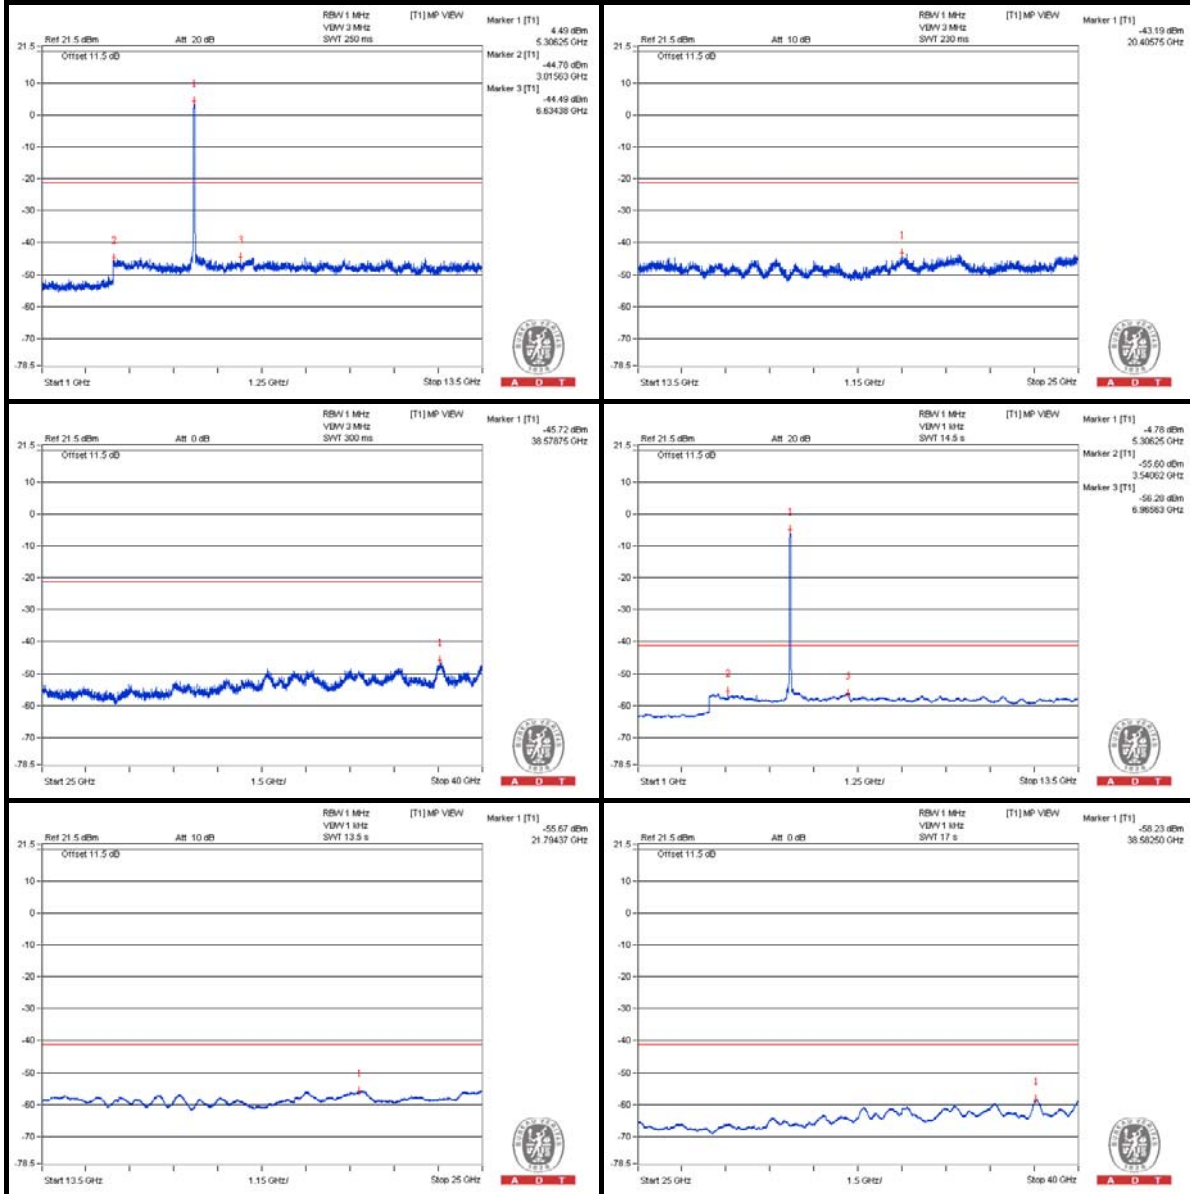Chain (0)

Chain (1)

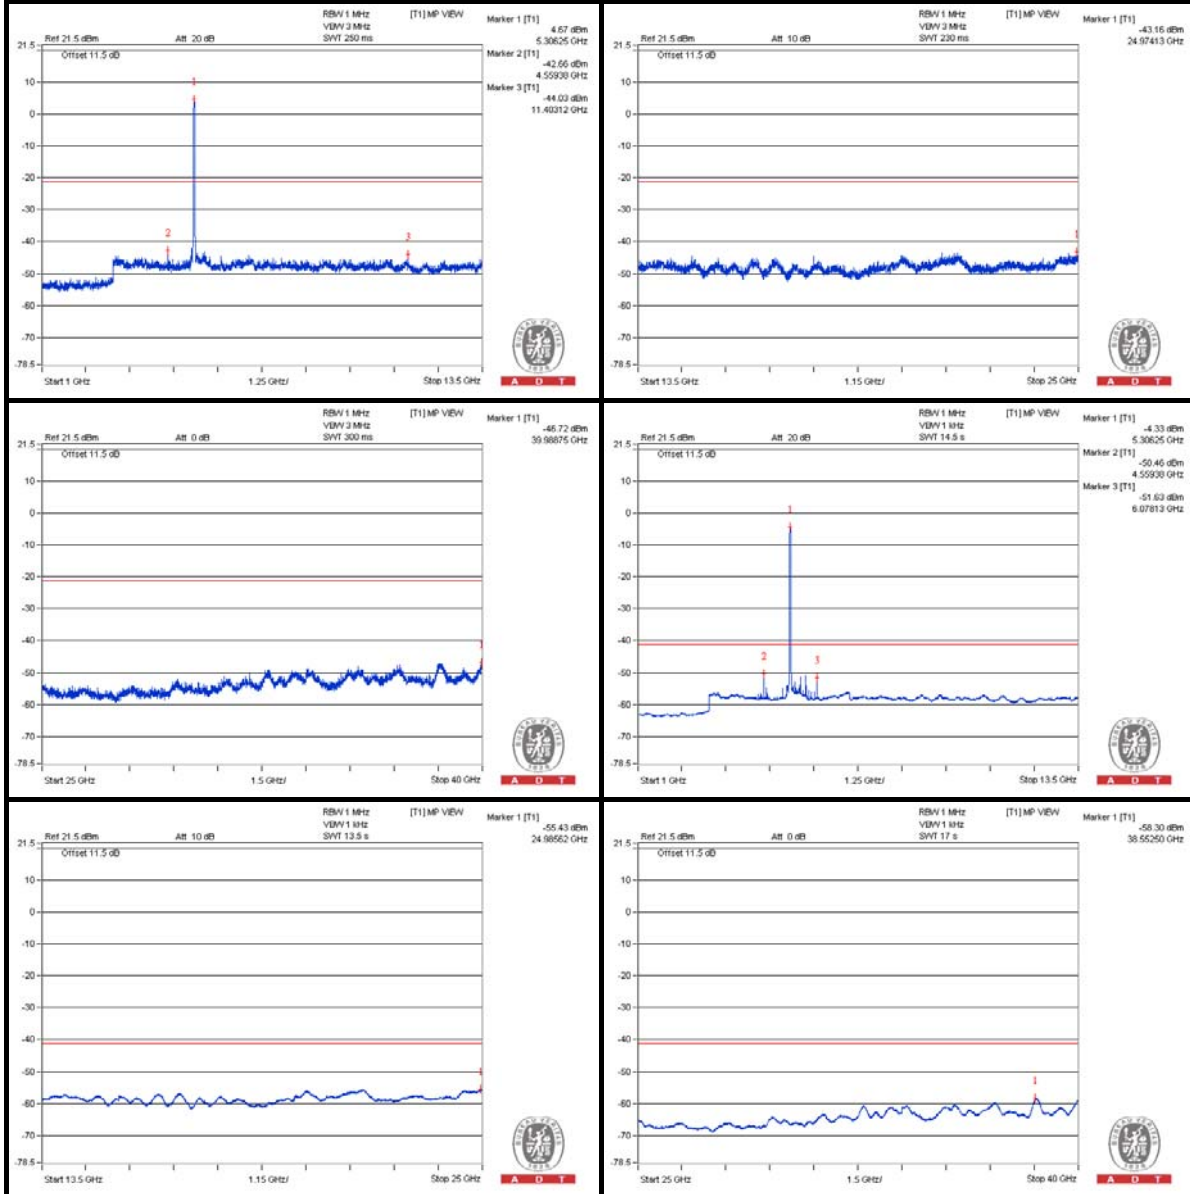

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350 PK	66.35	74	-7.65	-36.32	-40.53	6.01	-28.91
2	5350 AV	51.19	54	-2.81	-52.58	-53.66	6.01	-44.07

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

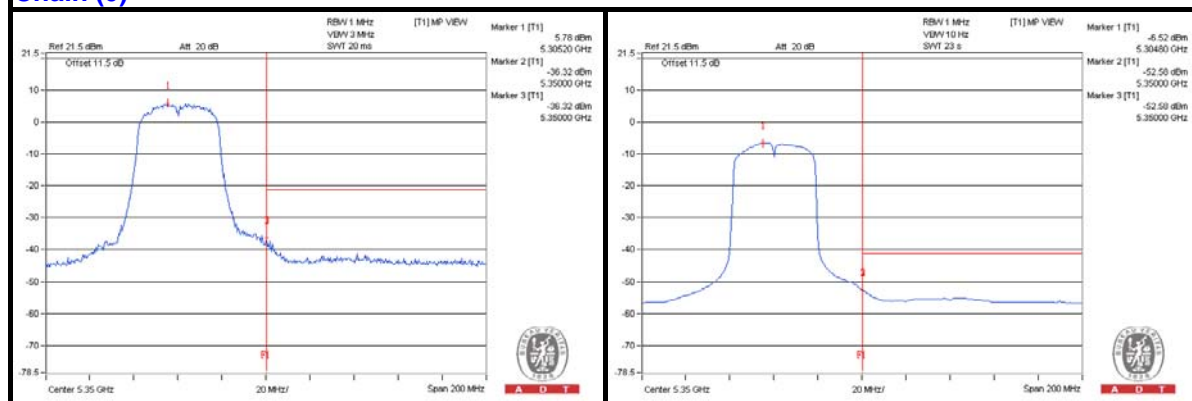

Chain (1)

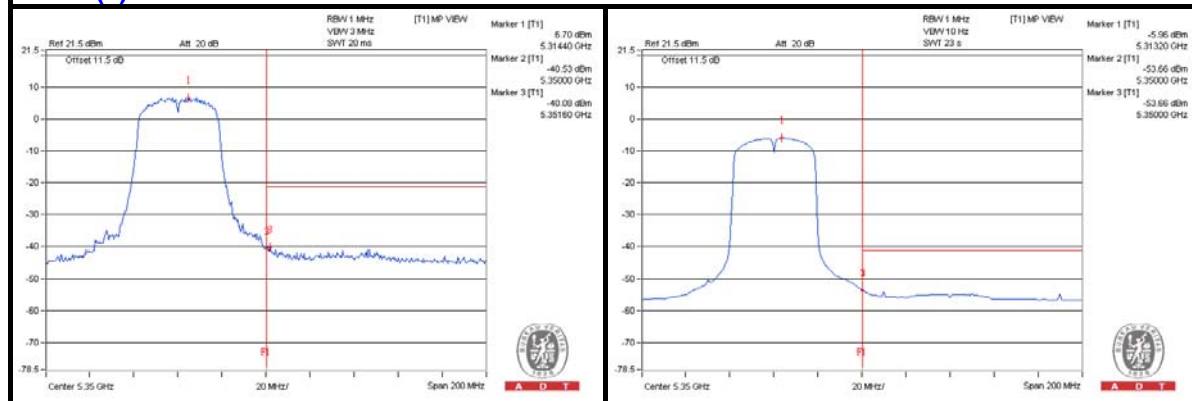



A D T

802.11n (HT40) – Channel 102

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3671.875 PK	58.83	74	-15.17	-45.34	-45.57	6.01	-36.43
2	3671.875 AV	50.93	54	-3.07	-52.2	-54.91	6.01	-44.33
3	7343.75 PK	57.17	74	-16.83	-46.82	-47.42	6.01	-38.09
4	7346.875 AV	47.1	54	-6.9	-56.7	-57.71	6.01	-48.16
5	11028.125 PK	56.19	74	-17.81	-47.38	-48.93	6.01	-39.07
6	11015.625 AV	45.79	54	-8.21	-58.51	-58.48	6.01	-49.47
7	16533.125 PK	58.38	74	-15.62	-45.19	-46.75	6.01	-36.88
8	16521.625 AV	46.95	54	-7.05	-57.4	-57.27	6.01	-48.31


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.




A D T

Chain (0)

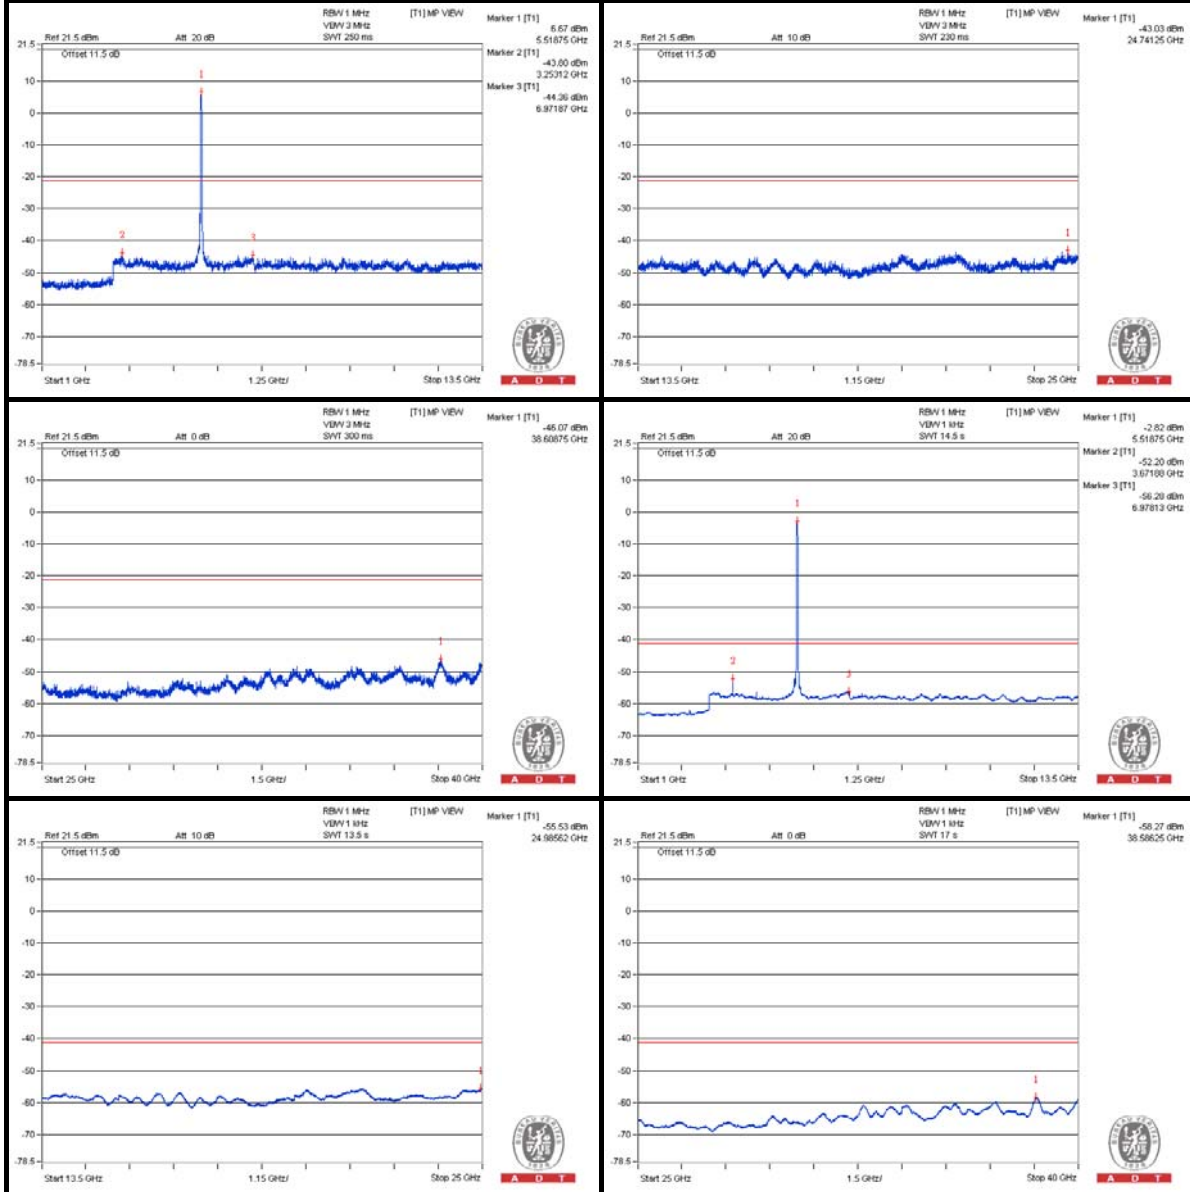

Chain (1)

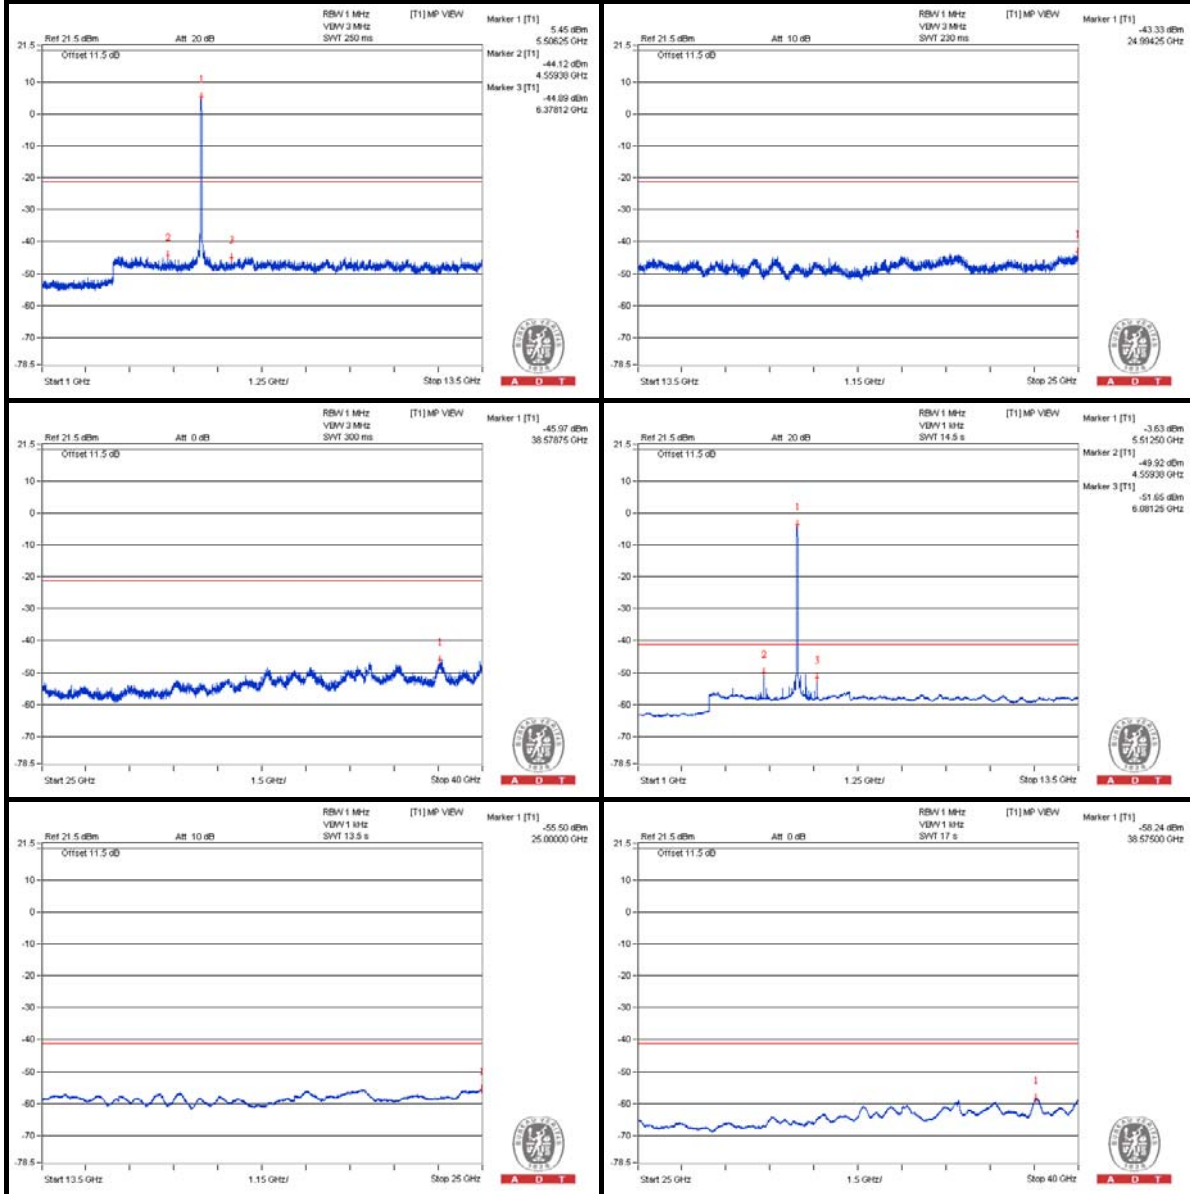


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5470 PK	67.69	74	-6.31	-35	-39.11	6.01	-27.57
2	5440 AV	51.72	54	-2.28	-52.55	-52.58	6.01	-43.54


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

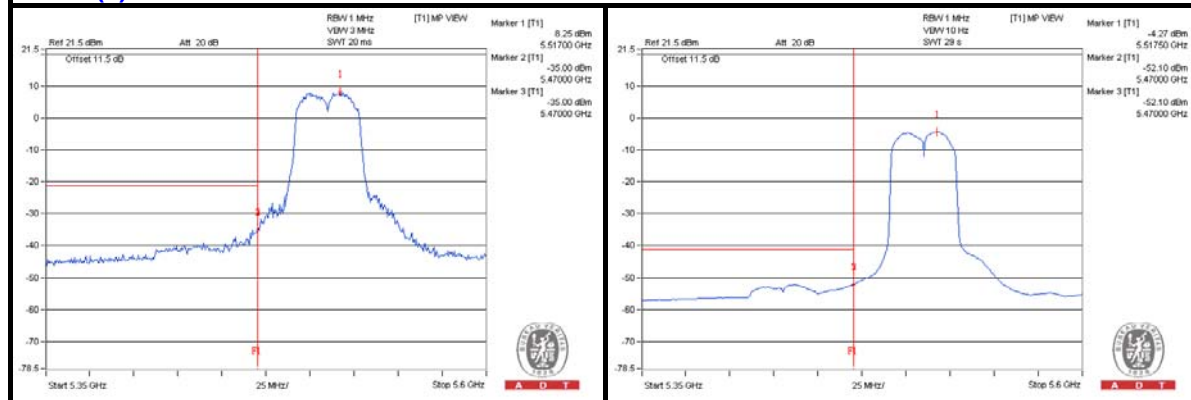

Chain (1)

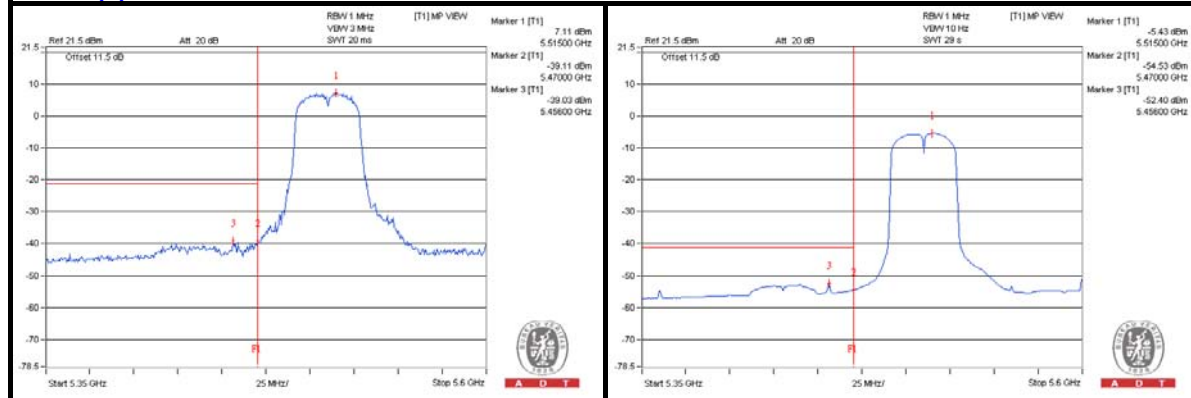



A D T

802.11n (HT40) – Channel 110

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3700 PK	59.72	74	-14.28	-43.51	-45.94	6.01	-35.54
2	3700 AV	50.58	54	-3.42	-52.31	-55.75	6.01	-44.68
3	7400 PK	57.81	74	-16.19	-46.12	-46.85	6.01	-37.45
4	7400 AV	48.12	54	-5.88	-55.16	-57.46	6.01	-47.14
5	11100 PK	59.56	74	-14.44	-43.53	-46.37	6.01	-35.7
6	11103.125 AV	47.93	54	-6.07	-55.3	-57.74	6.01	-47.33
7	16645.25 PK	57.56	74	-16.44	-47.9	-45.8	6.01	-37.7
8	16648.125 AV	46.79	54	-7.21	-58.22	-56.86	6.01	-48.47

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

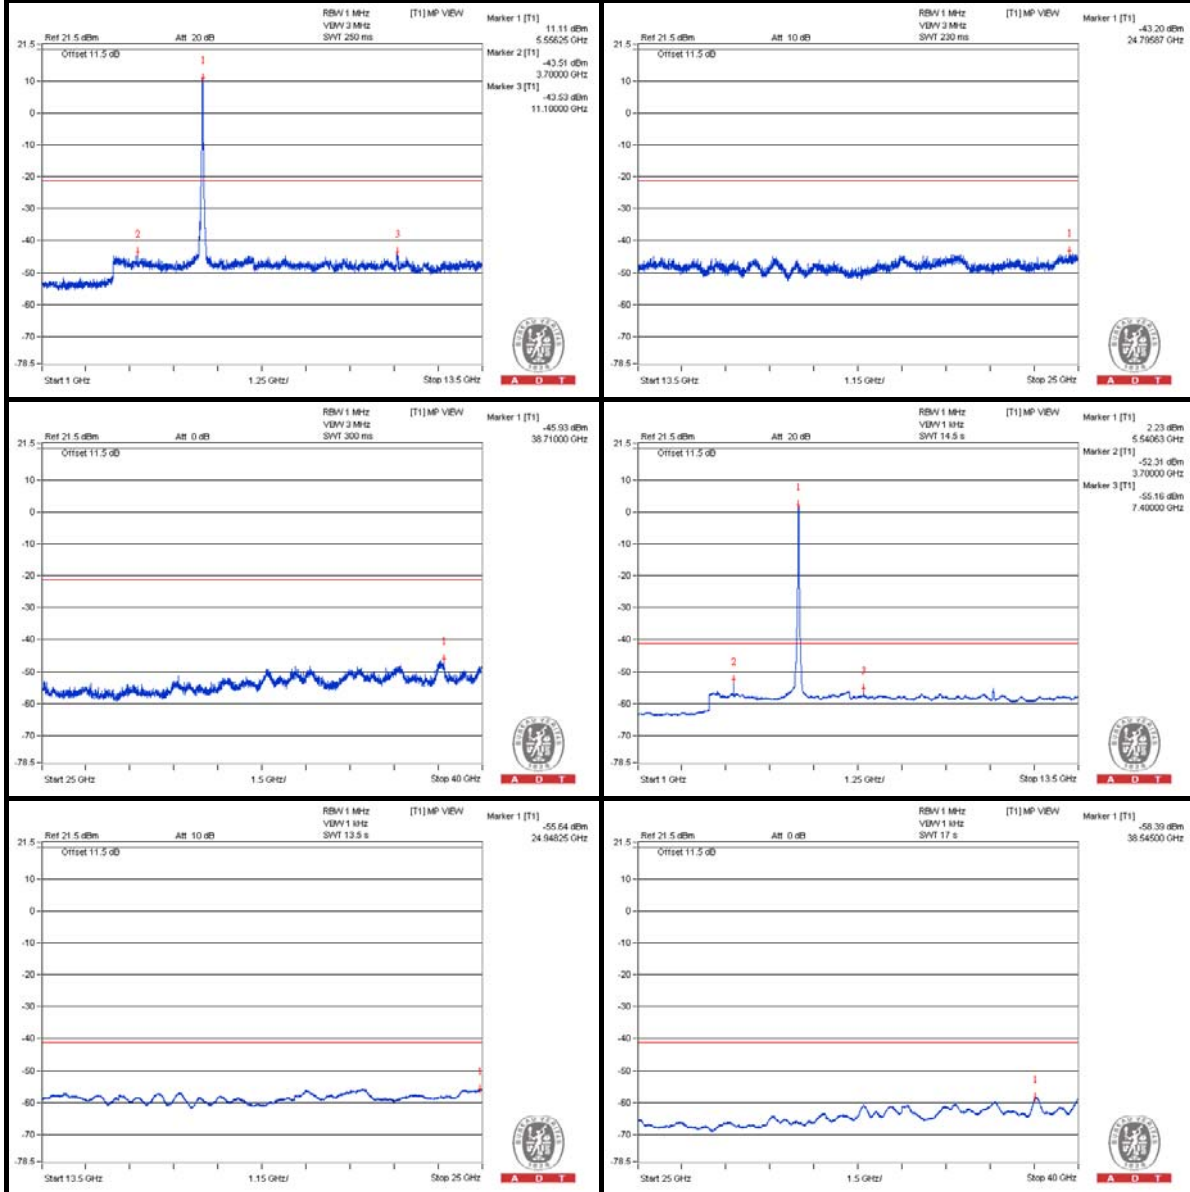

Chain (1)

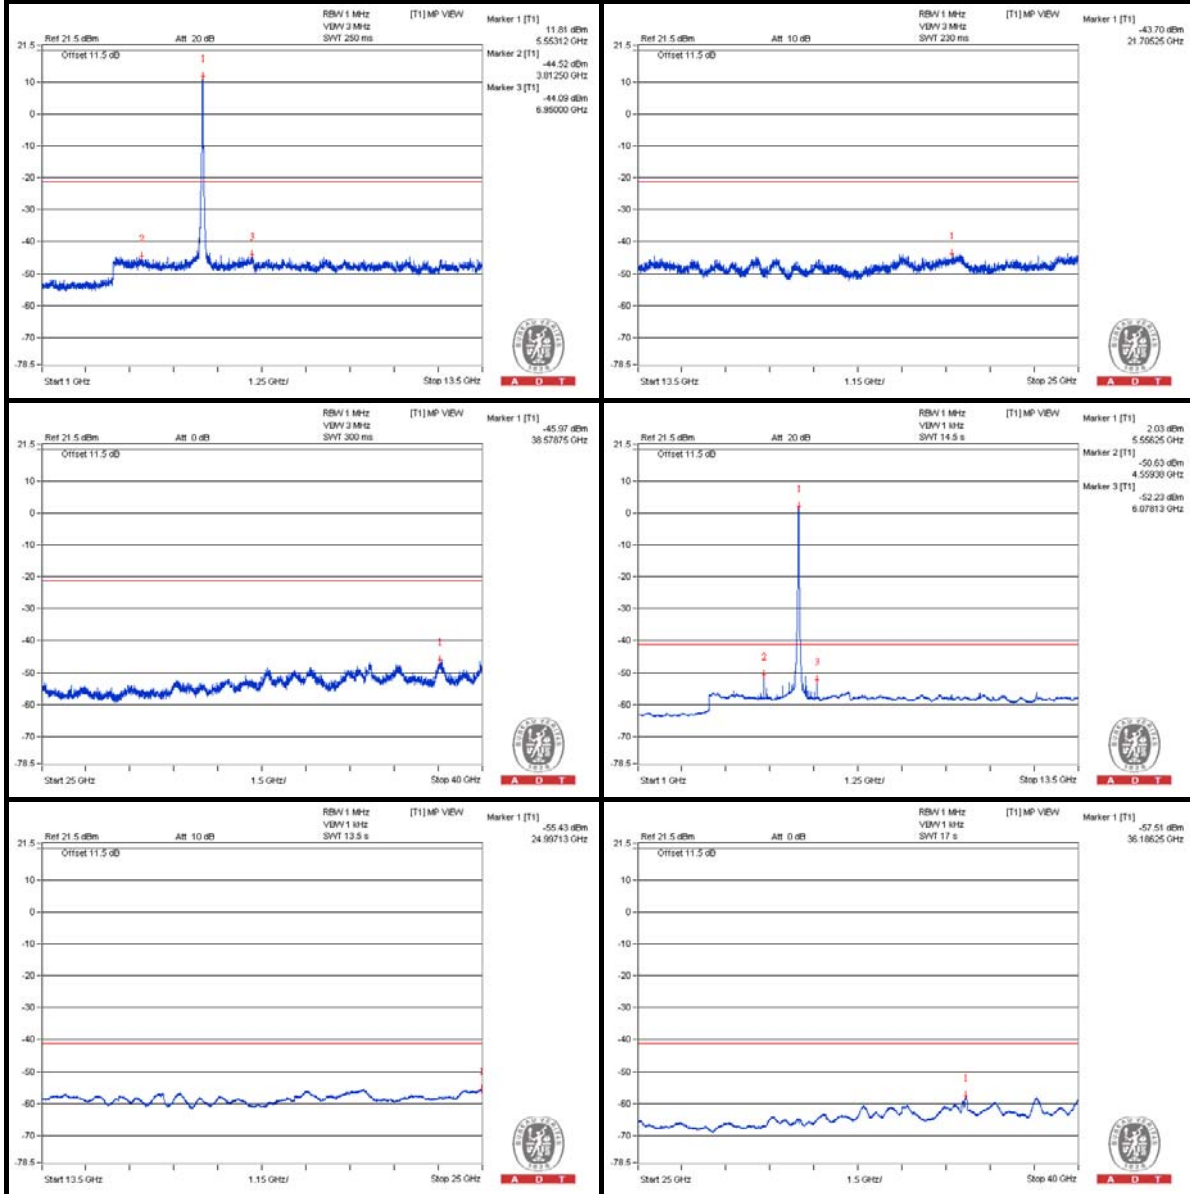



A D T

802.11n (HT40) – Channel 134

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3778.125 PK	60.49	74	-13.51	-42.84	-45.01	6.01	-34.77
2	3778.125 AV	55.21	54	* 1.21	-46.72	-54.59	6.01	-40.05
3	7559.375 PK	57.14	74	-16.86	-46.53	-47.84	6.01	-38.12
4	7559.375 AV	49.38	54	-4.62	-53.92	-56.18	6.01	-45.88
5	11346.875 PK	58.63	74	-15.37	-45.51	-45.79	6.01	-36.63
6	11346.875 AV	47.13	54	-6.87	-57.15	-57.15	6.01	-48.13
7	17001.75 PK	57.99	74	-16.01	-45.15	-47.84	6.01	-37.27
8	17016.125 AV	47.27	54	-6.73	-57.35	-56.69	6.01	-47.99


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX A)

Chain (0)

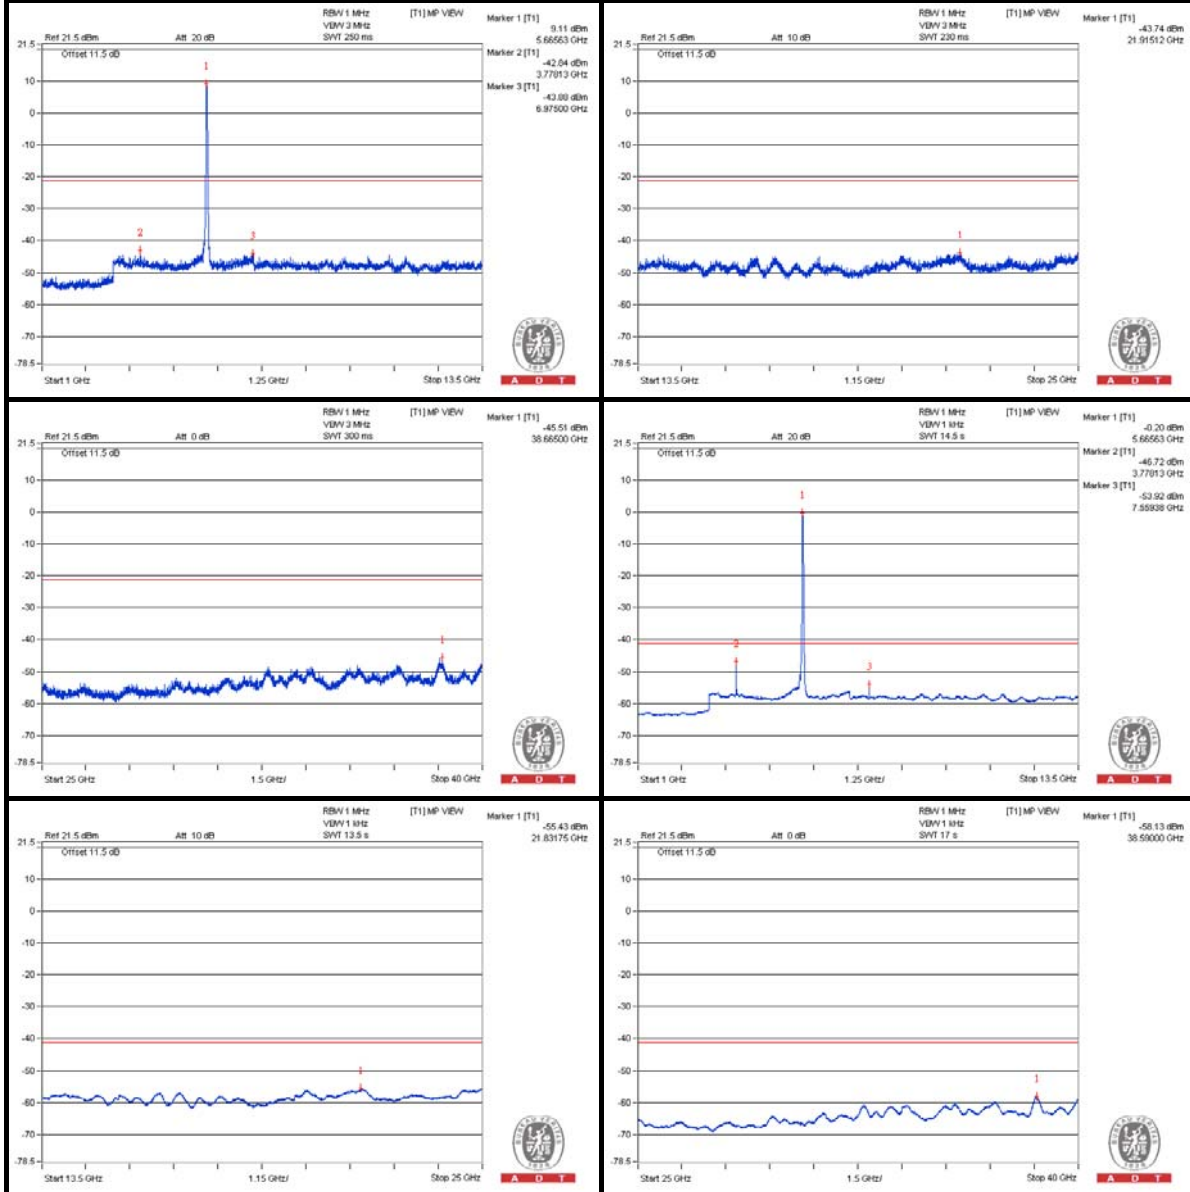

Chain (1)

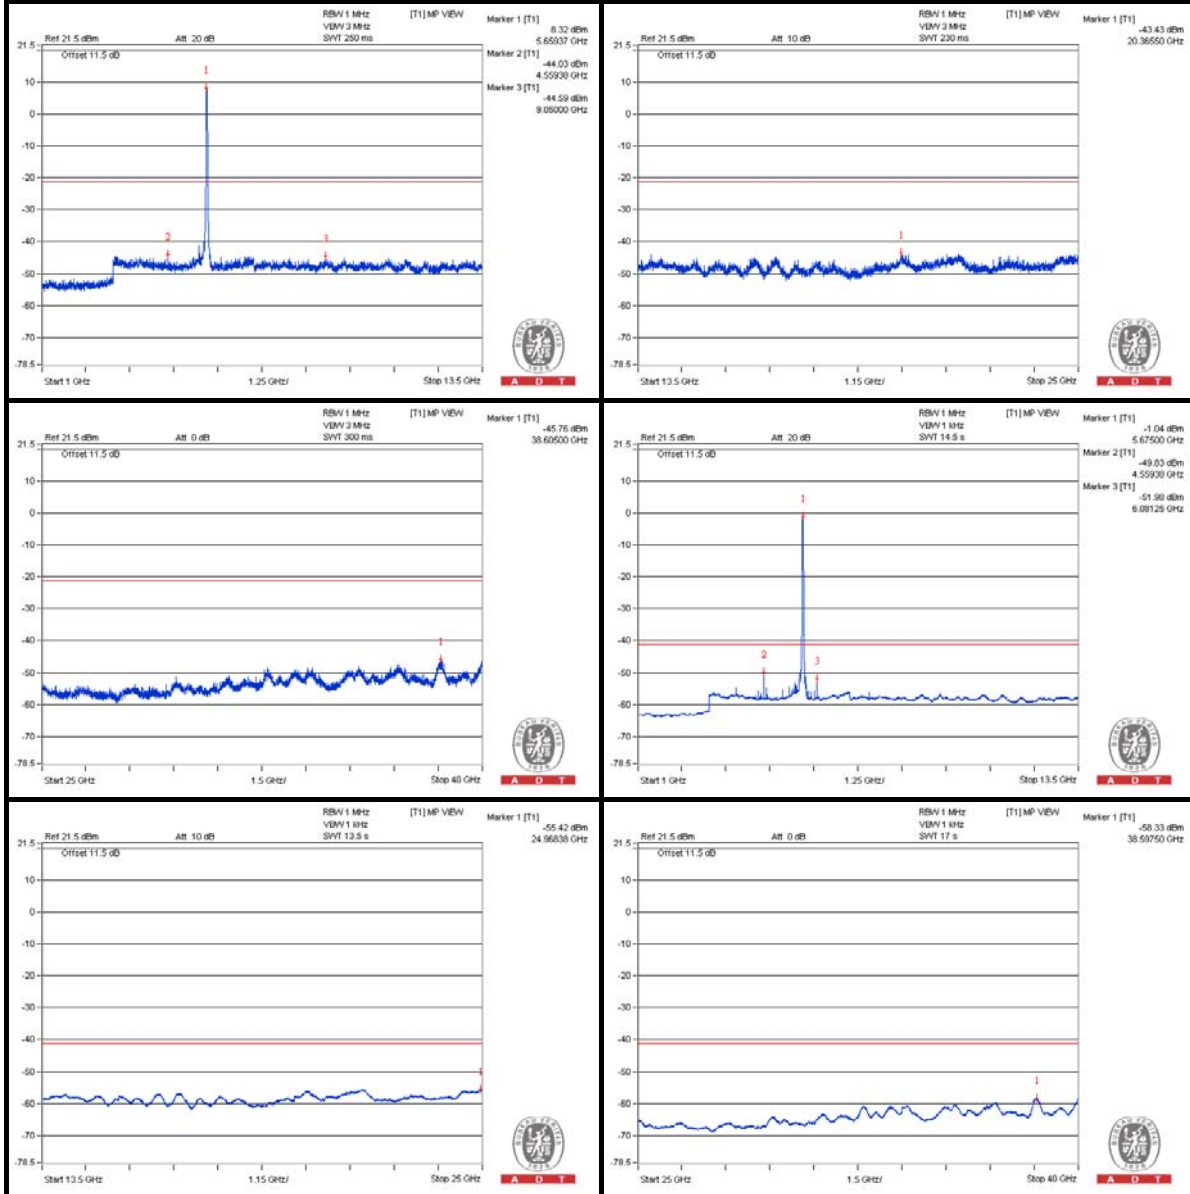

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725 PK	67.23	74	-6.77	-37.38	-36.75	6.01	-28.03
2	5725 AV	51.76	54	-2.24	-52.57	-52.48	6.01	-43.5

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

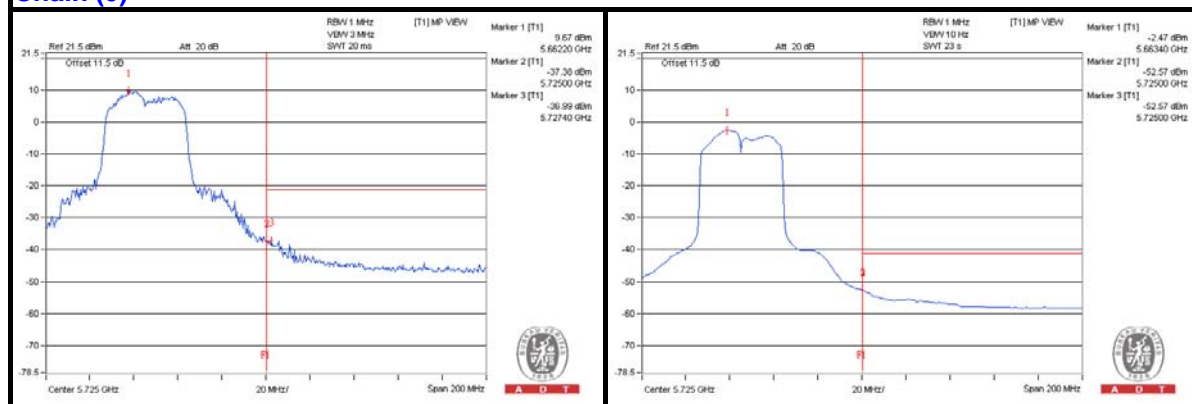

Chain (1)

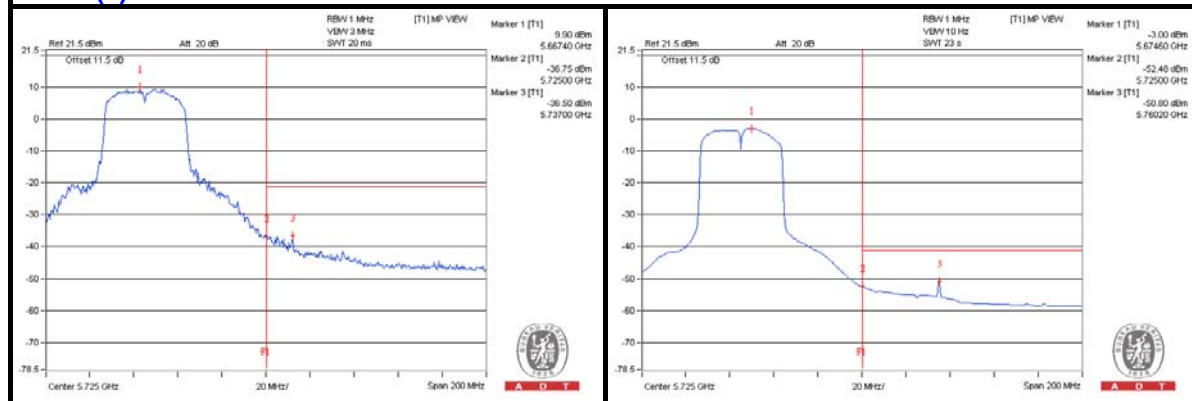



A D T

MODE 2

BELOW 1GHz WORST-CASE DATA

802.11a – Channel 116


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	99.1125	40.64	43.5	-2.86	-72.81	-63.05	7.99	-54.62
2	115.1175	39.61	43.5	-3.89	-73.23	-64.14	7.99	-55.65
3	228.6075	36.85	46	-9.15	-72.85	-67.52	7.99	-58.41
4	481.05	36.94	46	-9.06	-71.72	-67.78	7.99	-58.32
5	736.8875	37.04	46	-8.96	-70.8	-68.07	7.99	-58.22
6	871.7175	36.48	46	-9.52	-71.53	-68.54	7.99	-58.78

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

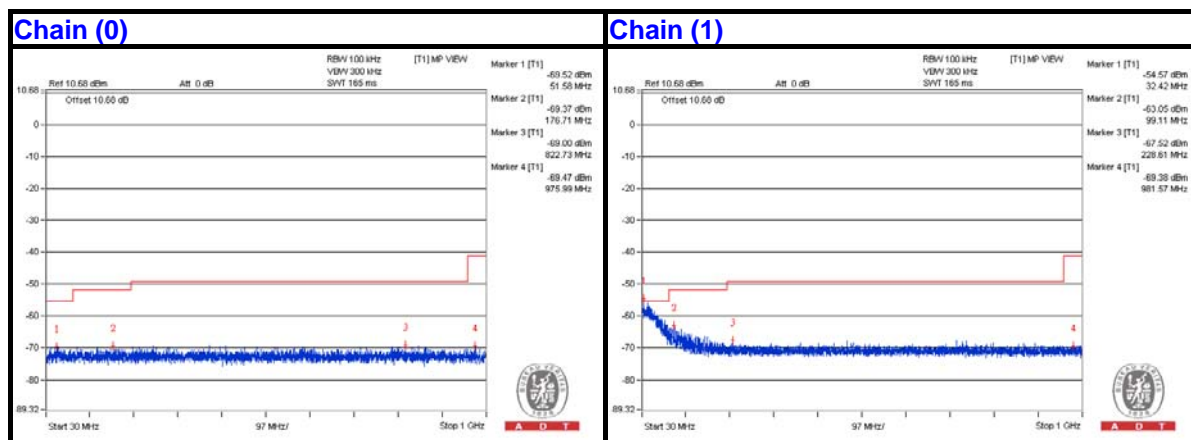



A D T

ABOVE 1GHz DATA
802.11a – Channel 36

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3453.125 PK	59.37	74	-14.63	-45.95	-46.75	7.43	-35.89
2	3453.125 AV	48.86	54	-5.14	-55.97	-57.93	7.43	-46.4
3	6903.125 PK	60.32	74	-13.68	-44.64	-46.27	7.43	-34.94
4	6906.25 AV	49.47	54	-4.53	-55.72	-56.8	7.43	-45.79
5	10353.125 PK	58.52	74	-15.48	-46.88	-47.51	7.43	-36.74
6	10356.25 AV	48.1	54	-5.9	-57.85	-57.37	7.43	-47.16
7	15532.625 PK	58.54	74	-15.46	-46.85	-47.49	7.43	-36.72
8	15538.375 AV	47.92	54	-6.08	-57.88	-57.68	7.43	-47.34


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.




A D T

Chain (0)

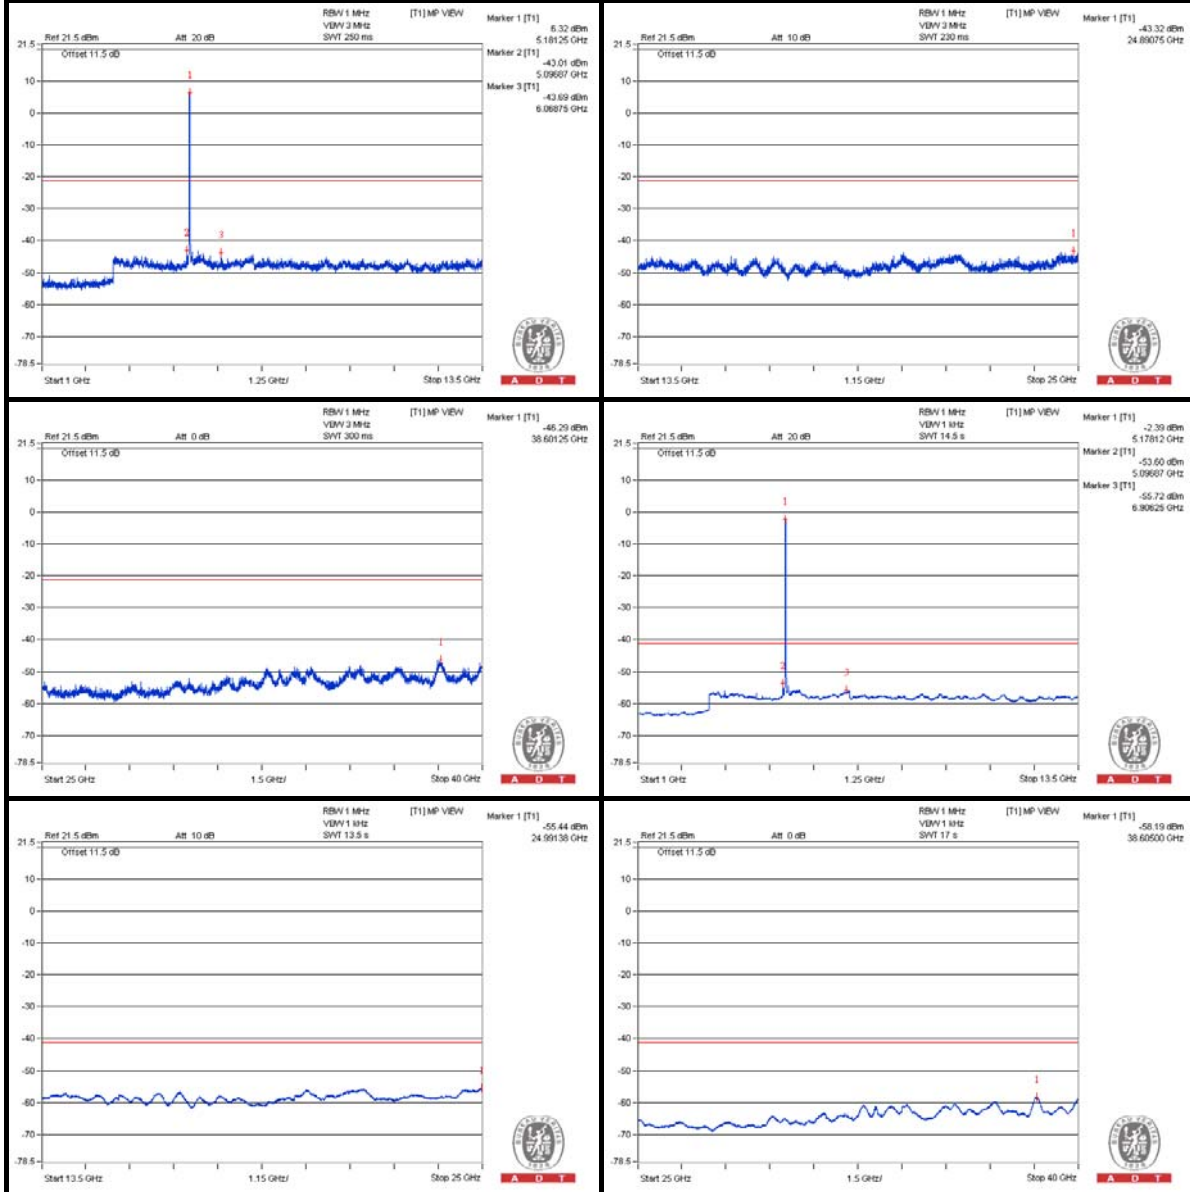

Chain (1)

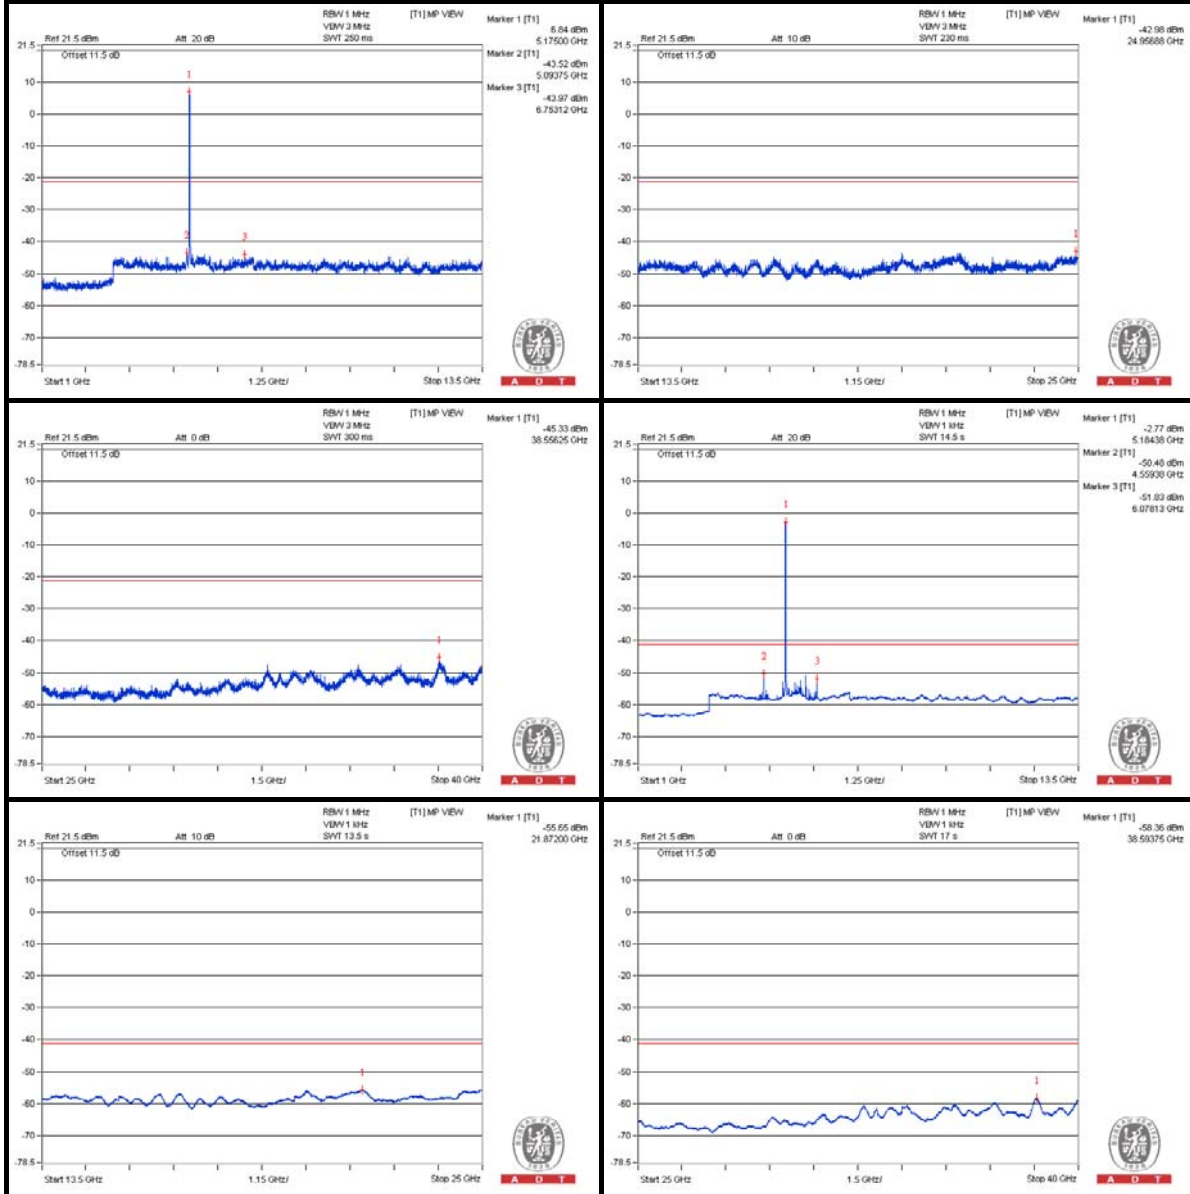


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5106.4 PK	63.77	74	-10.23	-41.59	-42.31	7.43	-31.49
2	5103.6 AV	51.94	54	-2.06	-54.36	-53.24	7.43	-43.32


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

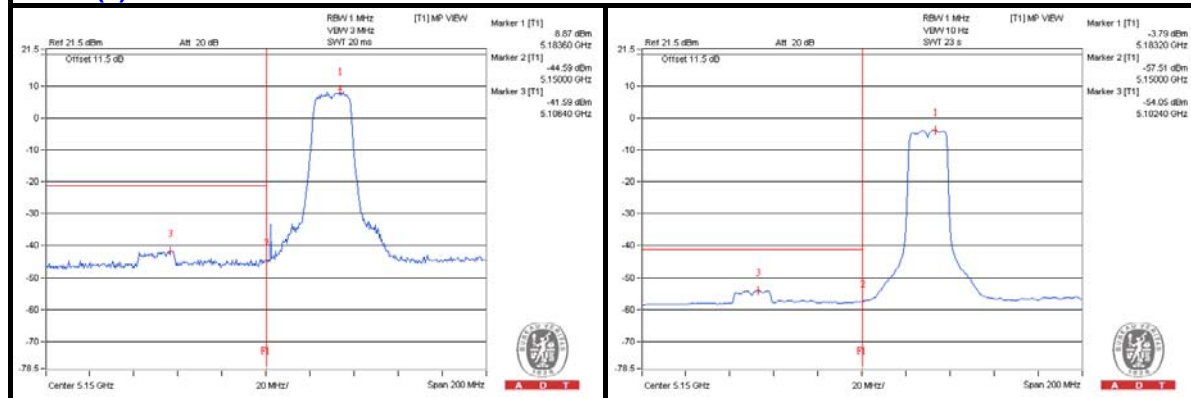

Chain (1)

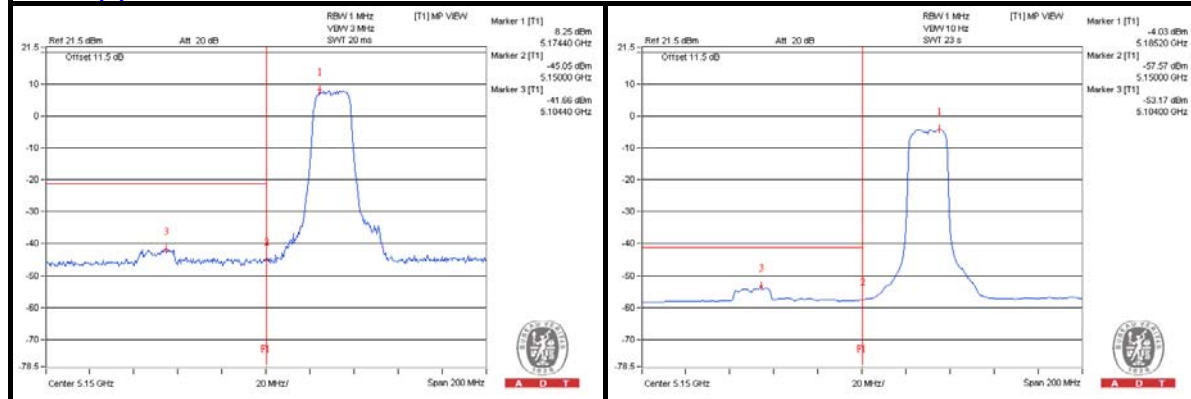



A D T

802.11a – Channel 40

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3465.625 PK	58.65	74	-15.35	-46.56	-47.61	7.43	-36.61
2	3465.625 AV	48.9	54	-5.1	-56.08	-57.67	7.43	-46.36
3	6940.625 PK	60.36	74	-13.64	-45.29	-45.4	7.43	-34.9
4	6934.375 AV	49.4	54	-4.6	-56.15	-56.45	7.43	-45.86
5	10393.75 PK	58.4	74	-15.6	-47.84	-46.82	7.43	-36.86
6	10393.75 AV	47.85	54	-6.15	-58.01	-57.69	7.43	-47.41
7	15601.625 PK	58.45	74	-15.55	-46.82	-47.73	7.43	-36.81
8	15601.625 AV	47.6	54	-6.4	-58.08	-58.13	7.43	-47.66

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

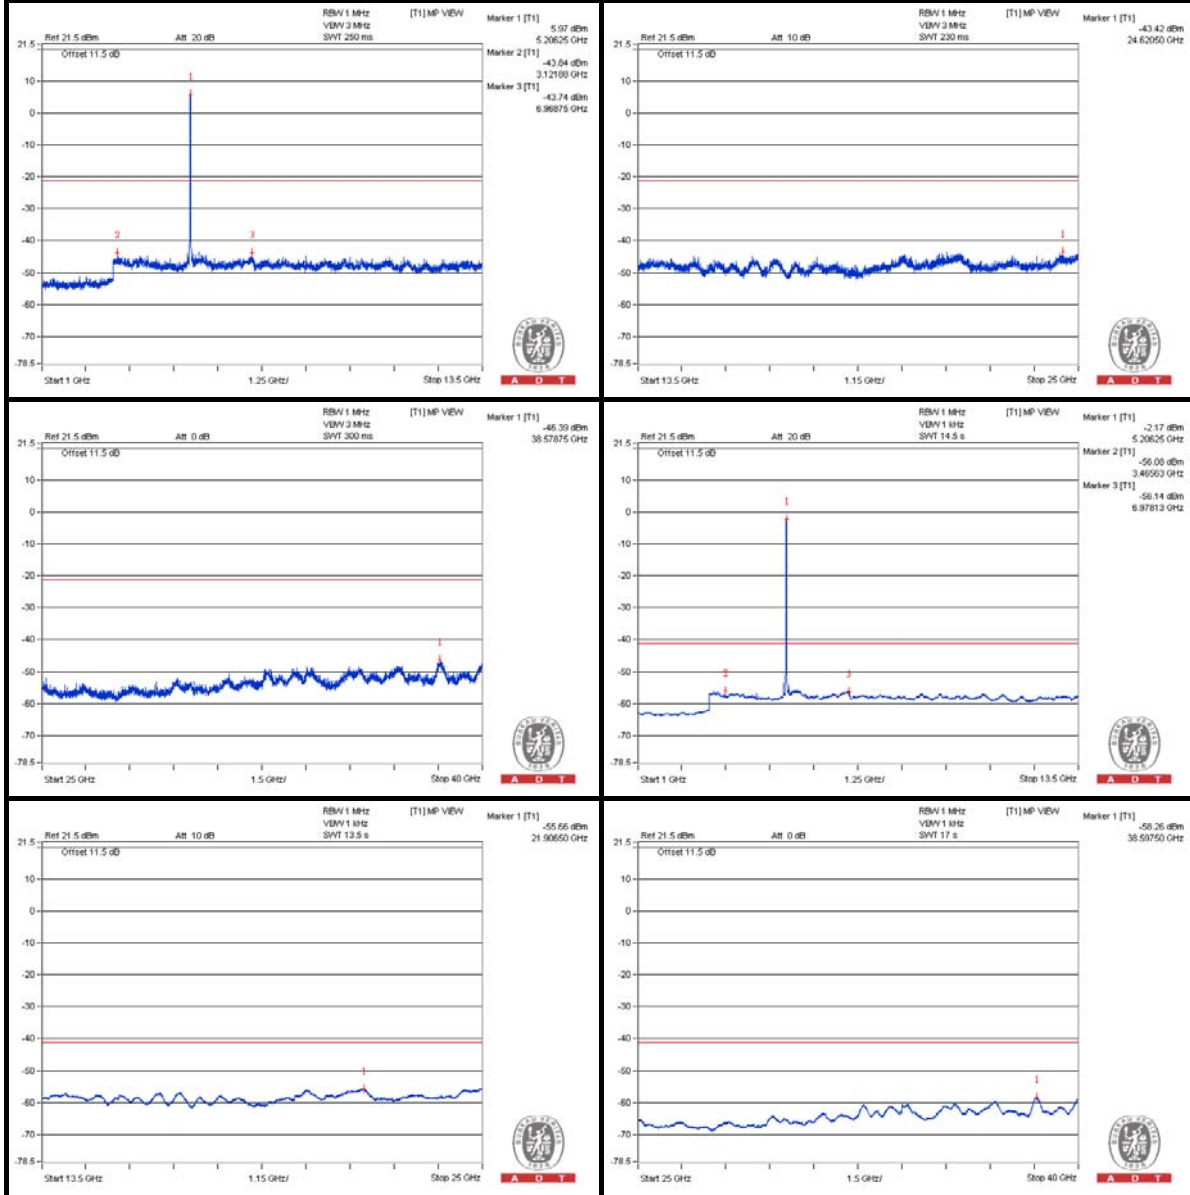

Chain (1)

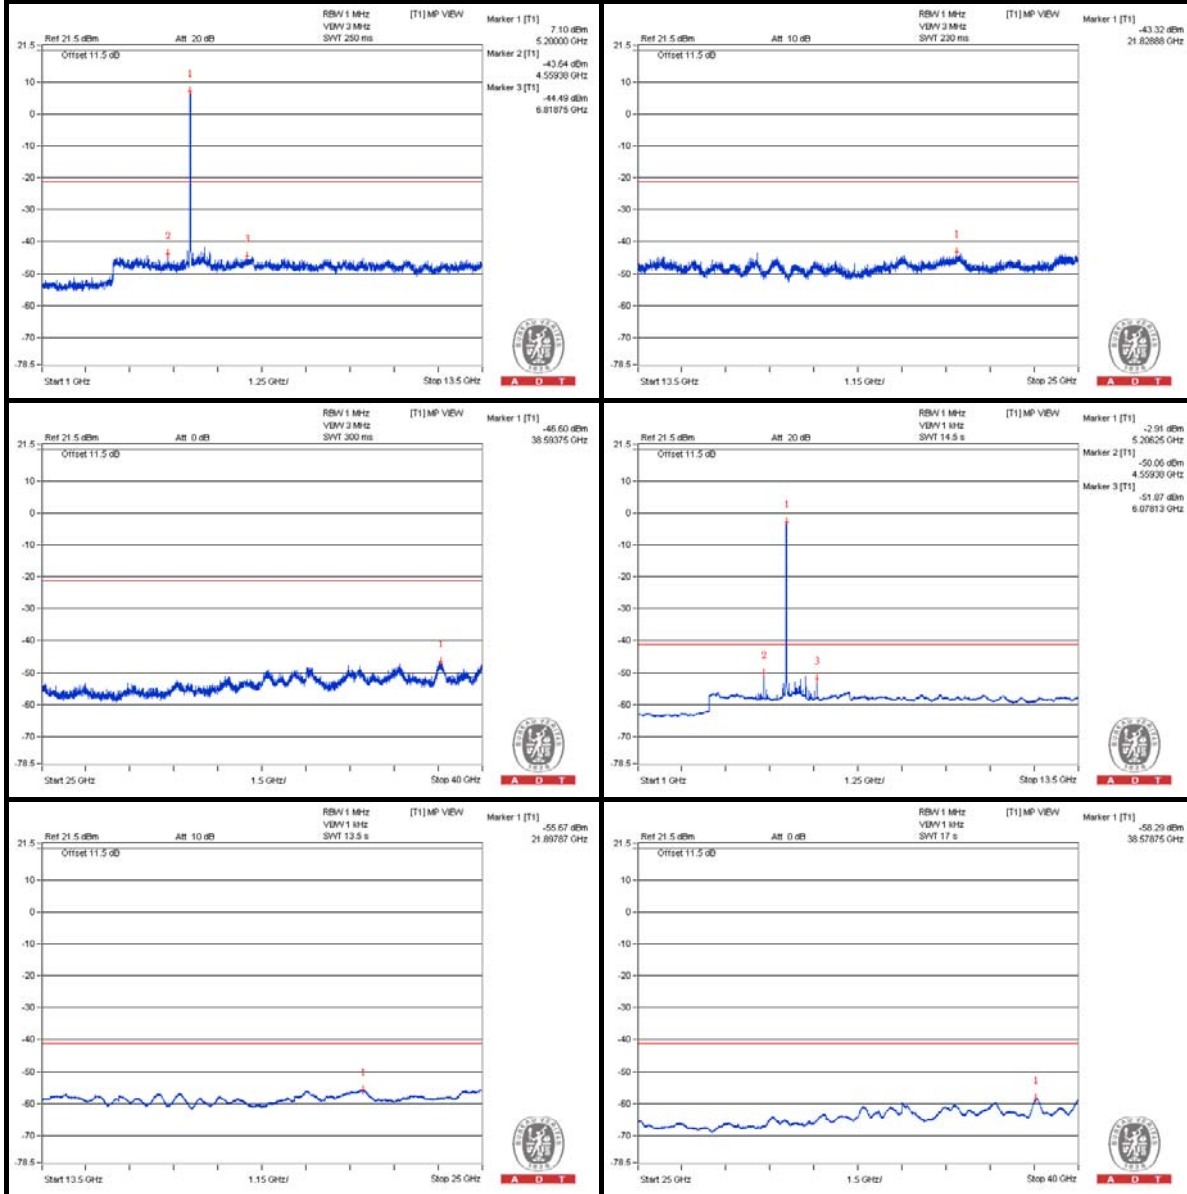



A D T

802.11a - Channel 48

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3487.5 PK	58.76	74	-15.24	-46.66	-47.25	7.43	-36.5
2	3493.75 AV	48.82	54	-5.18	-55.92	-58.12	7.43	-46.44
3	6987.5 PK	60.37	74	-13.63	-45.15	-45.52	7.43	-34.89
4	6990.625 AV	49.47	54	-4.53	-56.26	-56.2	7.43	-45.79
5	10487.5 PK	58.35	74	-15.65	-48.73	-46.31	7.43	-36.91
6	10484.375 AV	47.51	54	-6.49	-58.07	-58.32	7.43	-47.75
7	15722.375 PK	58.75	74	-15.25	-48.68	-45.72	7.43	-36.51
8	15710.875 AV	46.88	54	-7.12	-58.77	-58.87	7.43	-48.38


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.




A D T

Chain (0)

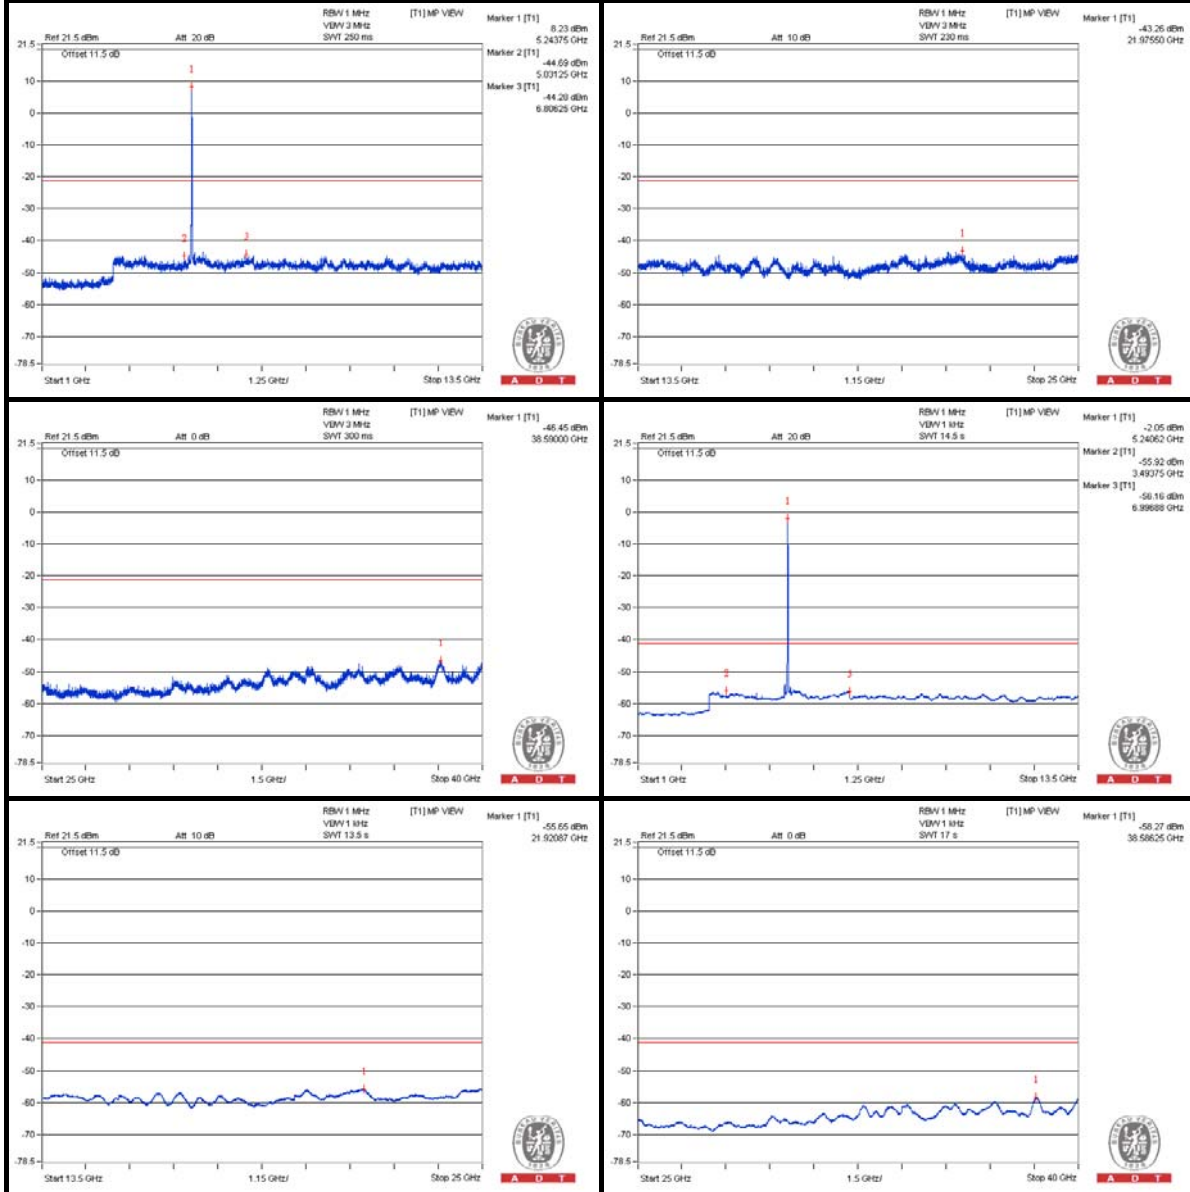

Chain (1)

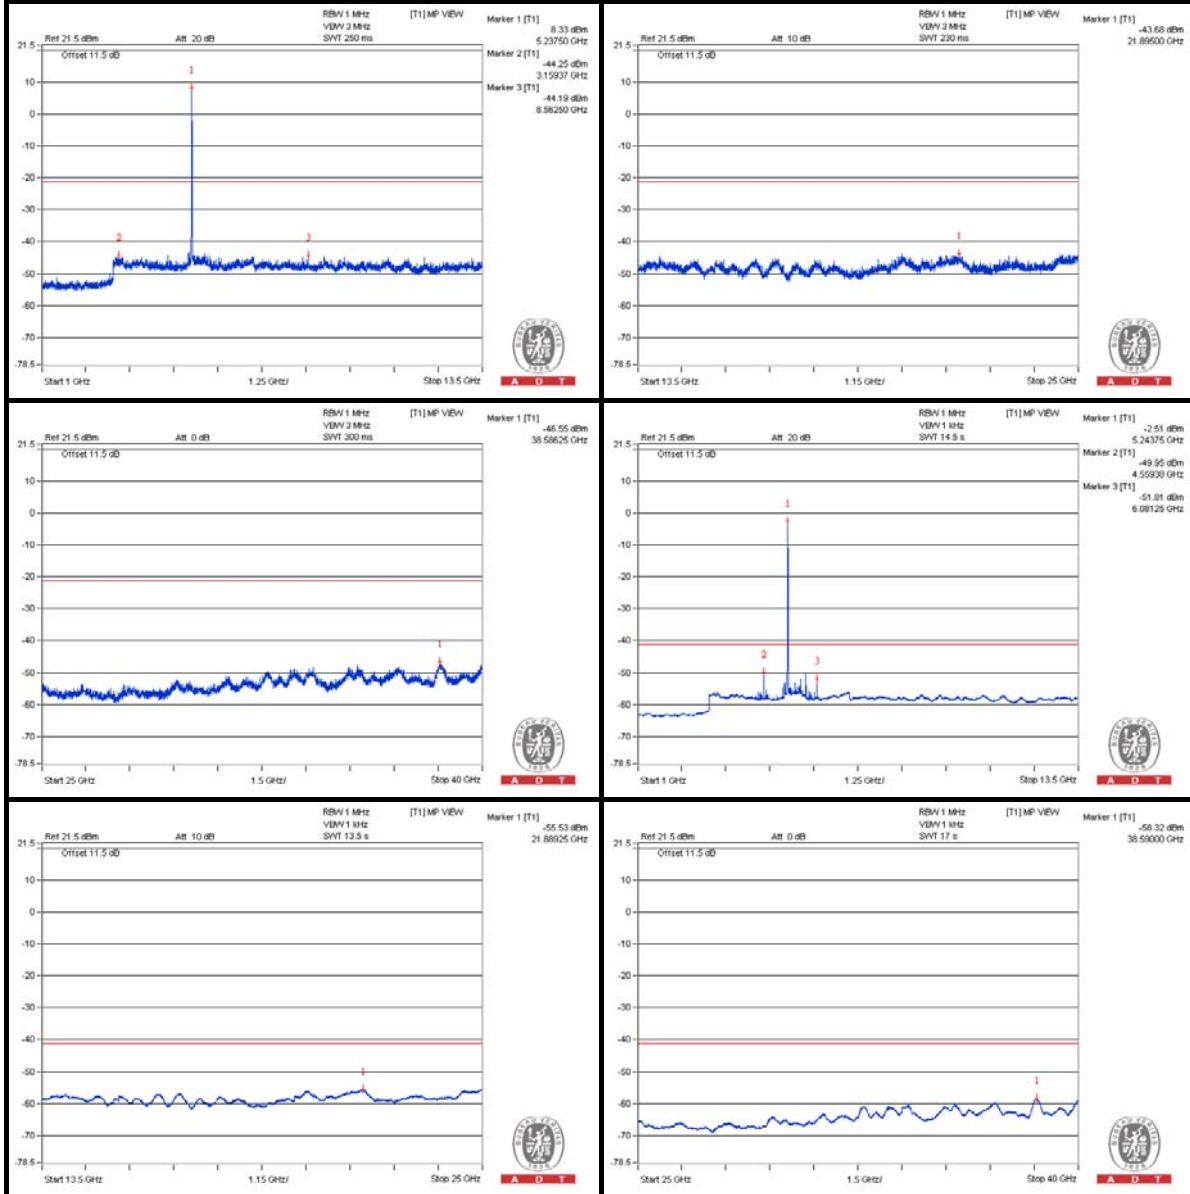



A D T

802.11a – Channel 52

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3506.25 PK	58.66	74	-15.34	-46.76	-47.53	7.52	-36.6
2	3506.25 AV	48.48	54	-5.52	-56.88	-57.79	7.52	-46.78
3	7012.5 PK	60.08	74	-13.92	-45.16	-46.35	7.52	-35.18
4	7012.5 AV	50.26	54	-3.74	-54.13	-57.62	7.52	-45
5	10521.875 PK	65.84	74	-8.16	-38.91	-41.33	7.52	-29.42
6	10518.75 AV	52.43	54	-1.57	-53.53	-53.19	7.52	-42.83
7	15779.875 PK	58.62	74	-15.38	-47.87	-46.56	7.52	-36.64
8	15779.875 AV	48.03	54	-5.97	-57.91	-57.61	7.52	-47.23

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

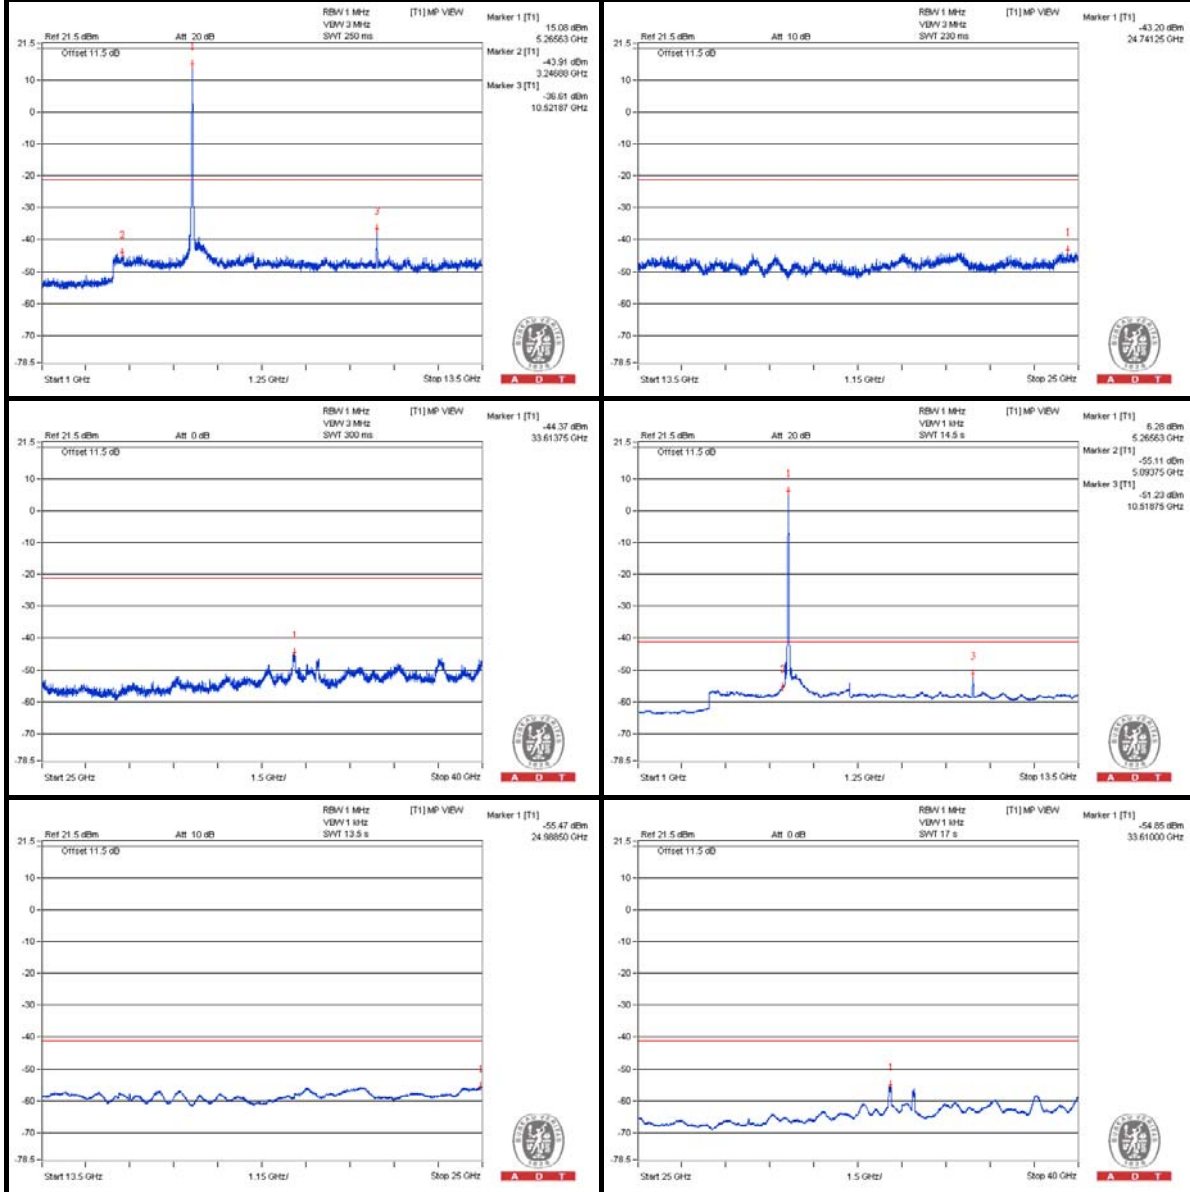

Chain (1)

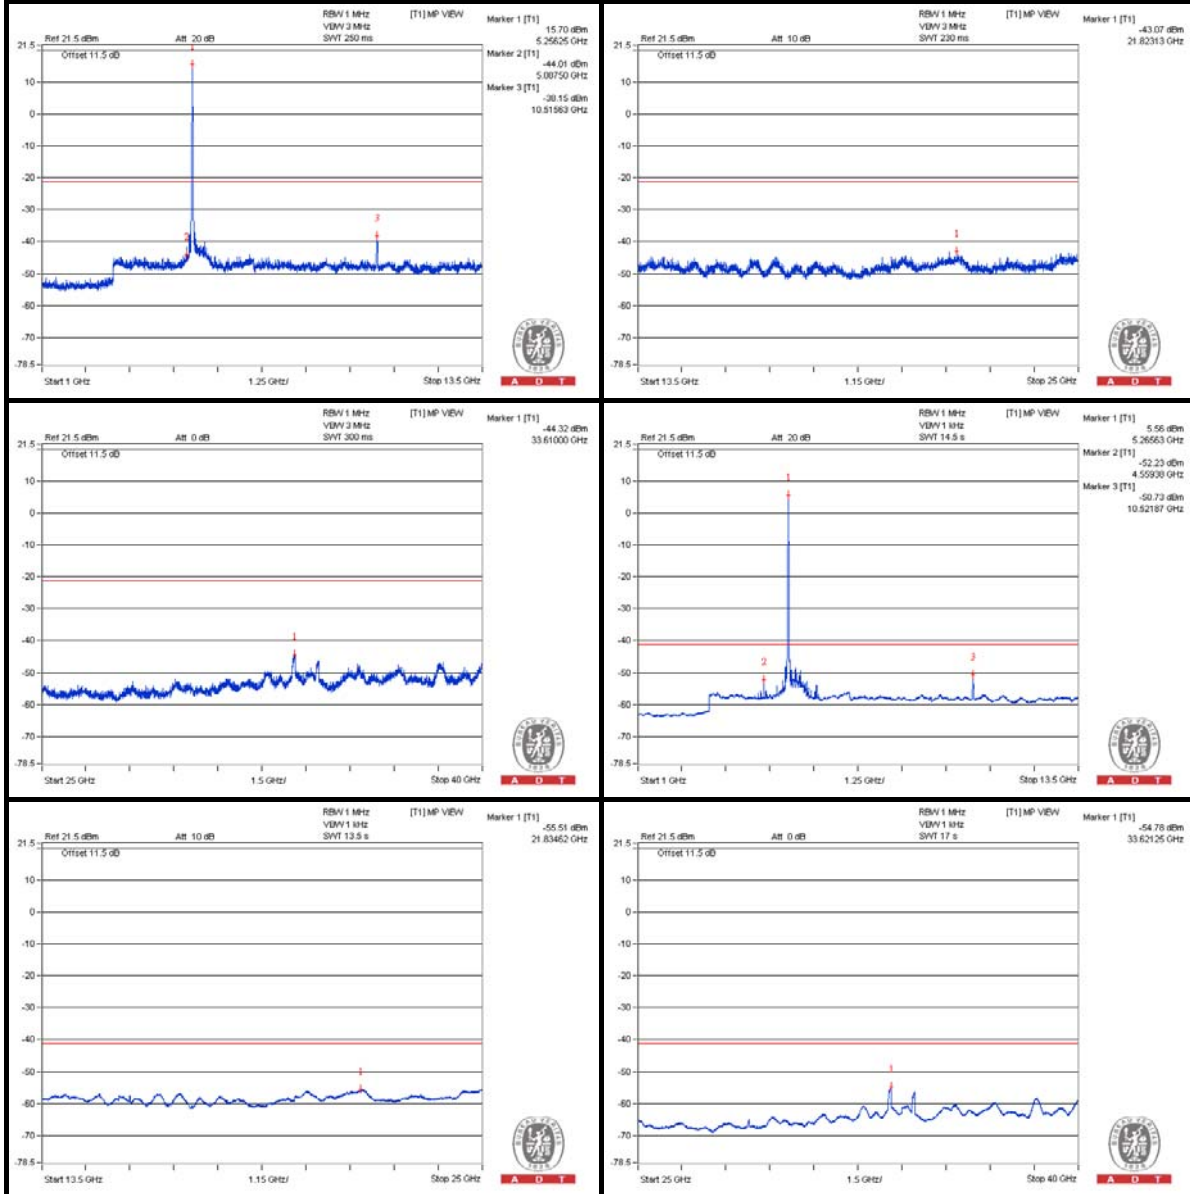

802.11a – Channel 60
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3531.25 PK	59.32	74	-14.68	-45.77	-47.3	7.52	-35.94
2	3531.25 AV	48.8	54	-5.2	-56.38	-57.71	7.52	-46.46
3	7075 PK	57.9	74	-16.1	-47.94	-47.85	7.52	-37.36
4	7075 AV	47.34	54	-6.66	-58.55	-58.36	7.52	-47.92
5	10600 PK	63.73	74	-10.27	-43.41	-41.03	7.52	-31.53
6	10600 AV	51.16	54	-2.84	-55.35	-54.01	7.52	-44.1
7	15900.625 PK	59.71	74	-14.29	-46.73	-45.51	7.52	-35.55
8	15897.75 AV	48.47	54	-5.53	-57.8	-56.88	7.52	-46.79

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

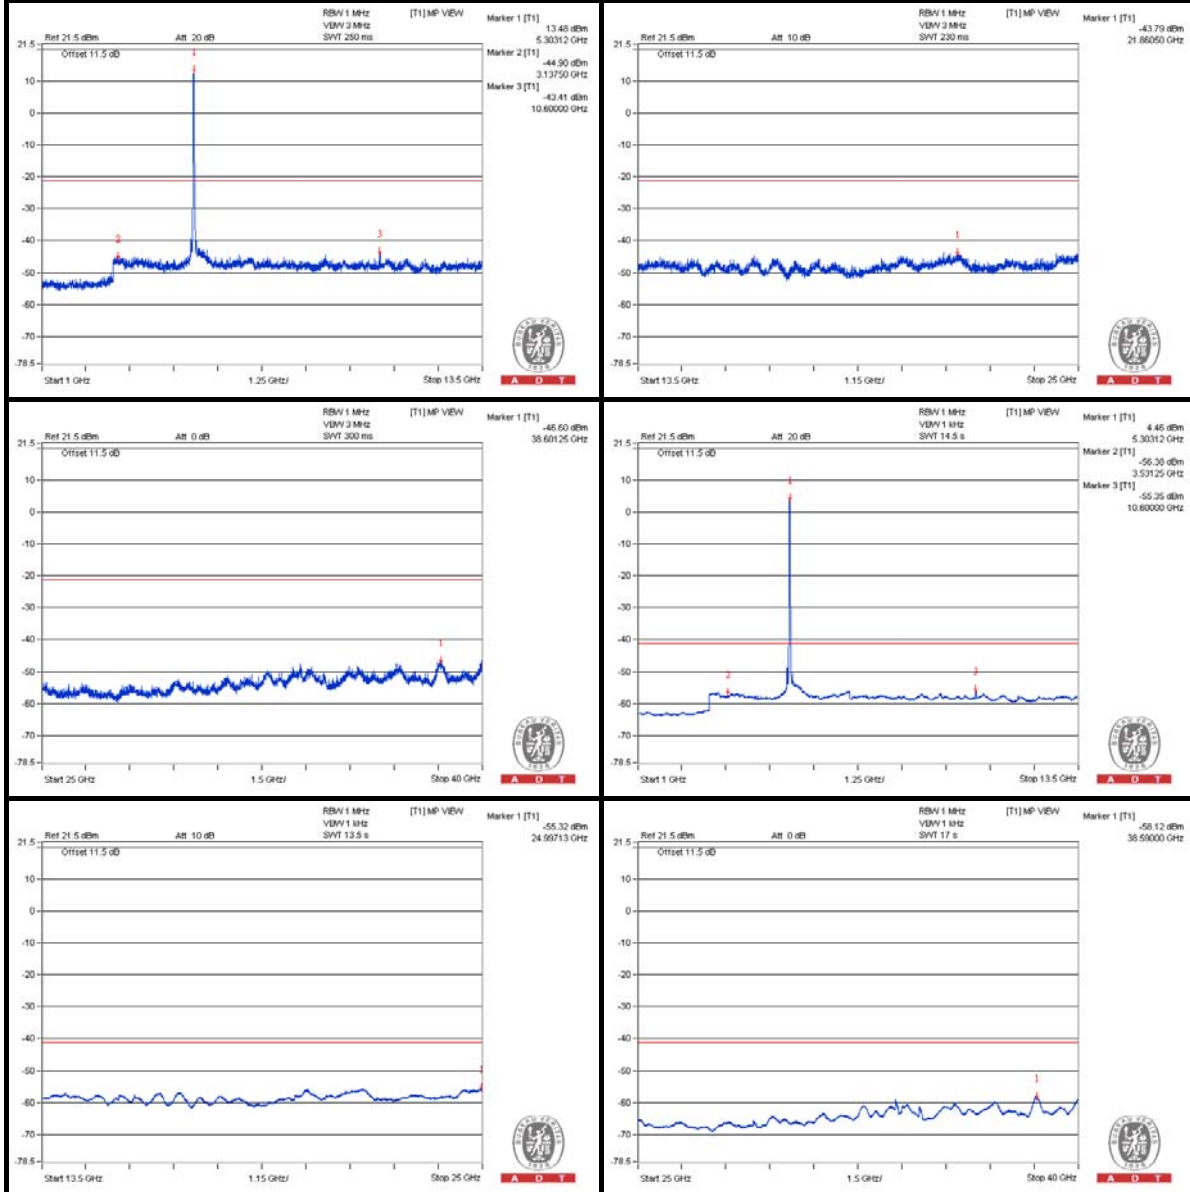

Chain (1)

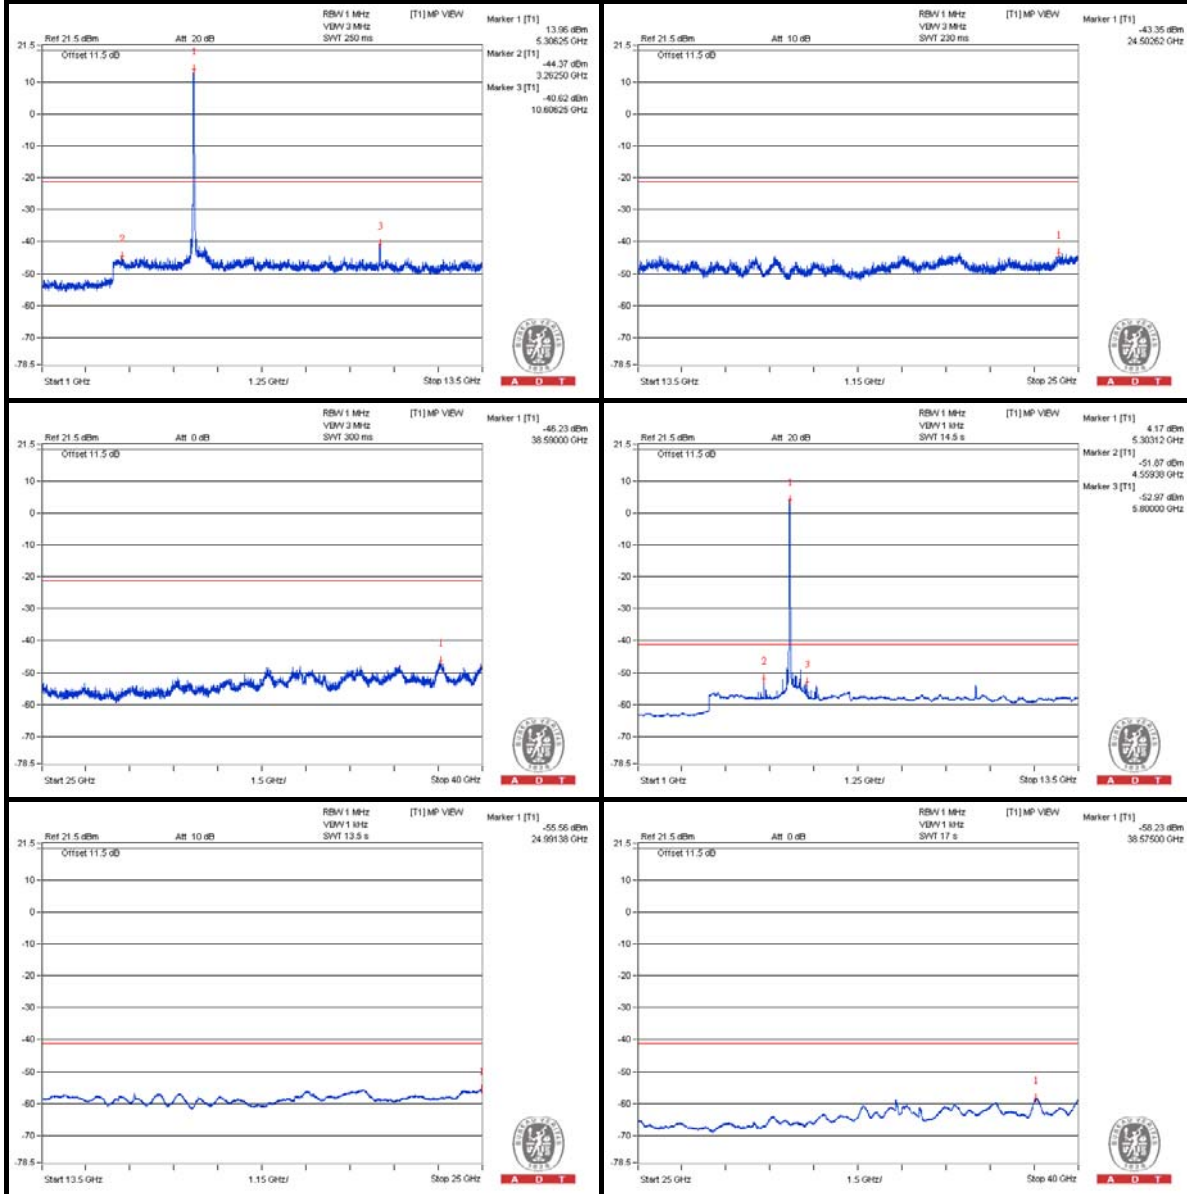

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5383.6 PK	64.86	74	-9.14	-41.53	-40.41	7.52	-30.4
2	5376 AV	52.48	54	-1.52	-53.35	-53.28	7.52	-42.78

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

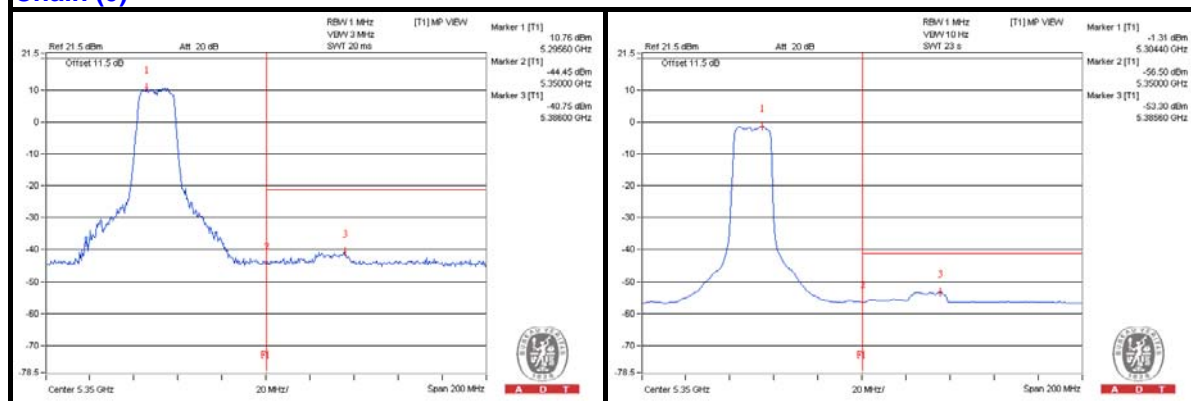

Chain (1)

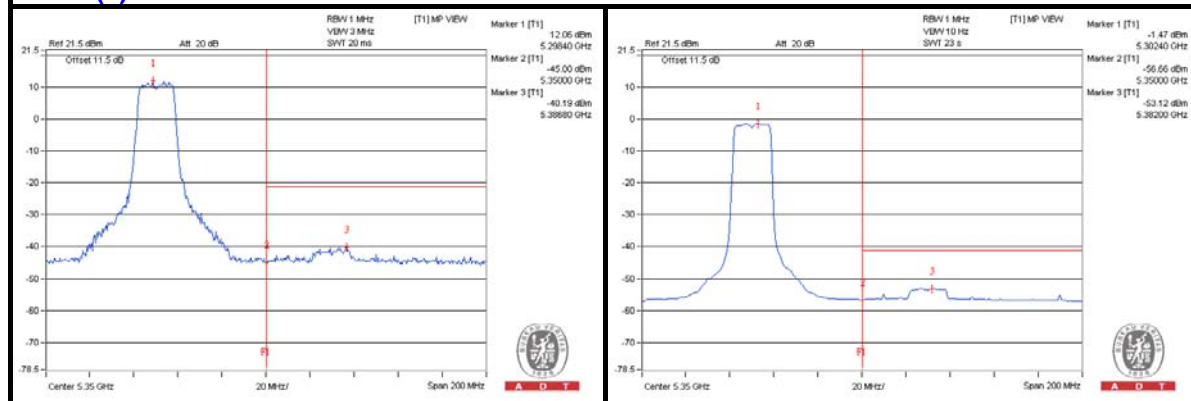



A D T

802.11a – Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3546.875 PK	59.34	74	-14.66	-46.88	-46.06	7.52	-35.92
2	3546.875 AV	49.42	54	-4.58	-55.26	-57.87	7.52	-45.84
3	7096.875 PK	59.25	74	-14.75	-46.51	-46.57	7.52	-36.01
4	7096.875 AV	47.82	54	-6.18	-57.97	-57.97	7.52	-47.44
5	10640.625 PK	59.38	74	-14.62	-47.52	-45.53	7.52	-35.88
6	10640.625 AV	48.44	54	-5.56	-57.45	-57.26	7.52	-46.82
7	15969.625 PK	57.9	74	-16.1	-47.18	-48.73	7.52	-37.36
8	15955.25 AV	47.5	54	-6.5	-58.27	-58.32	7.52	-47.76

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

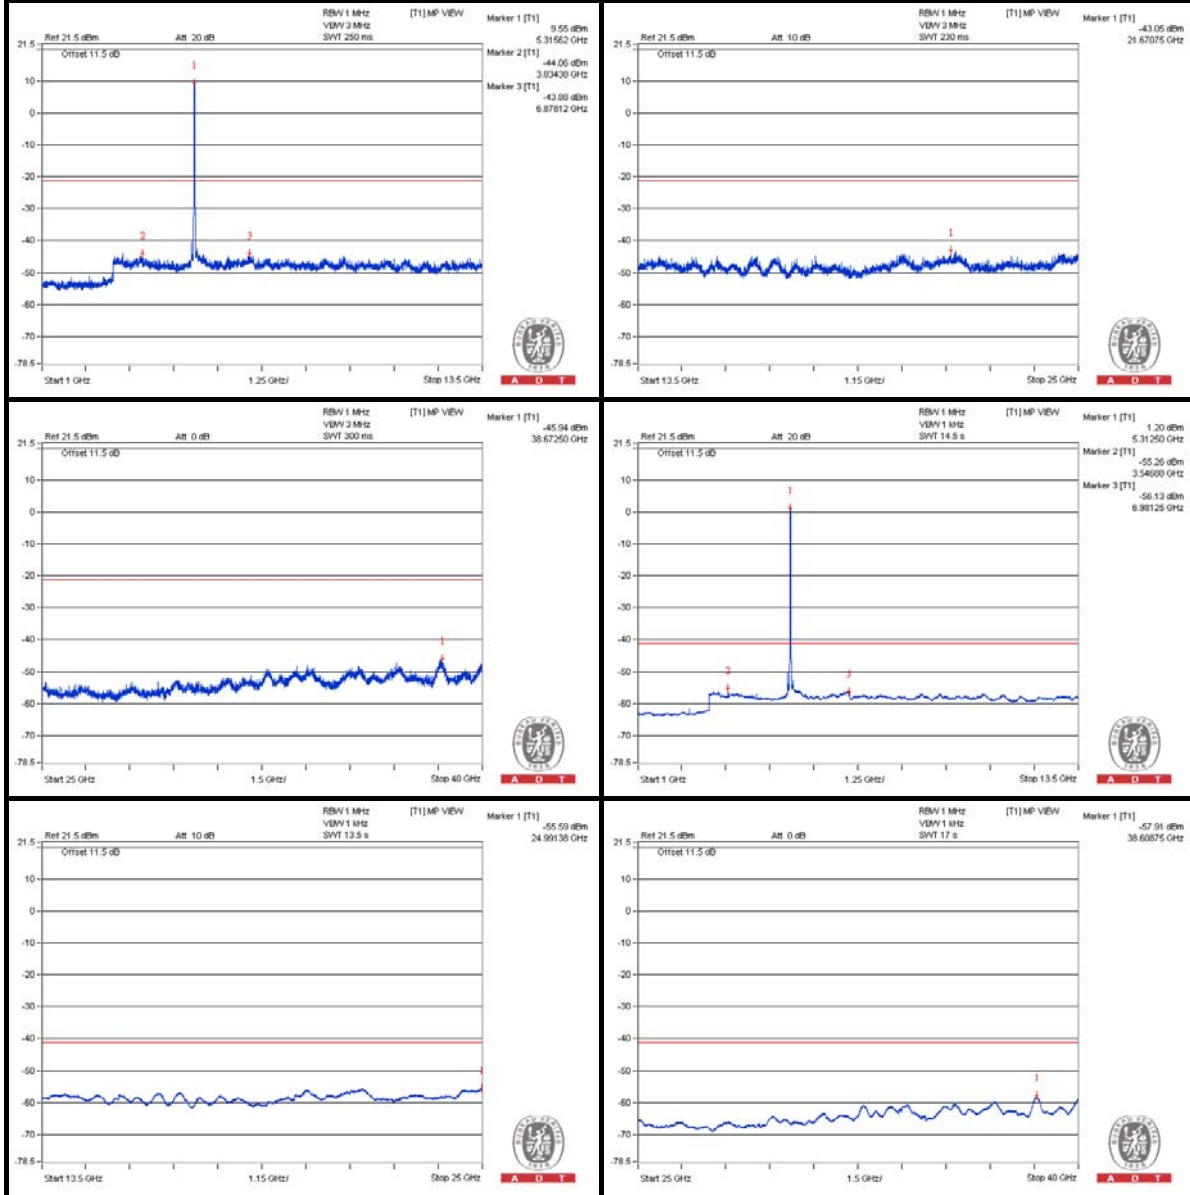

Chain (1)

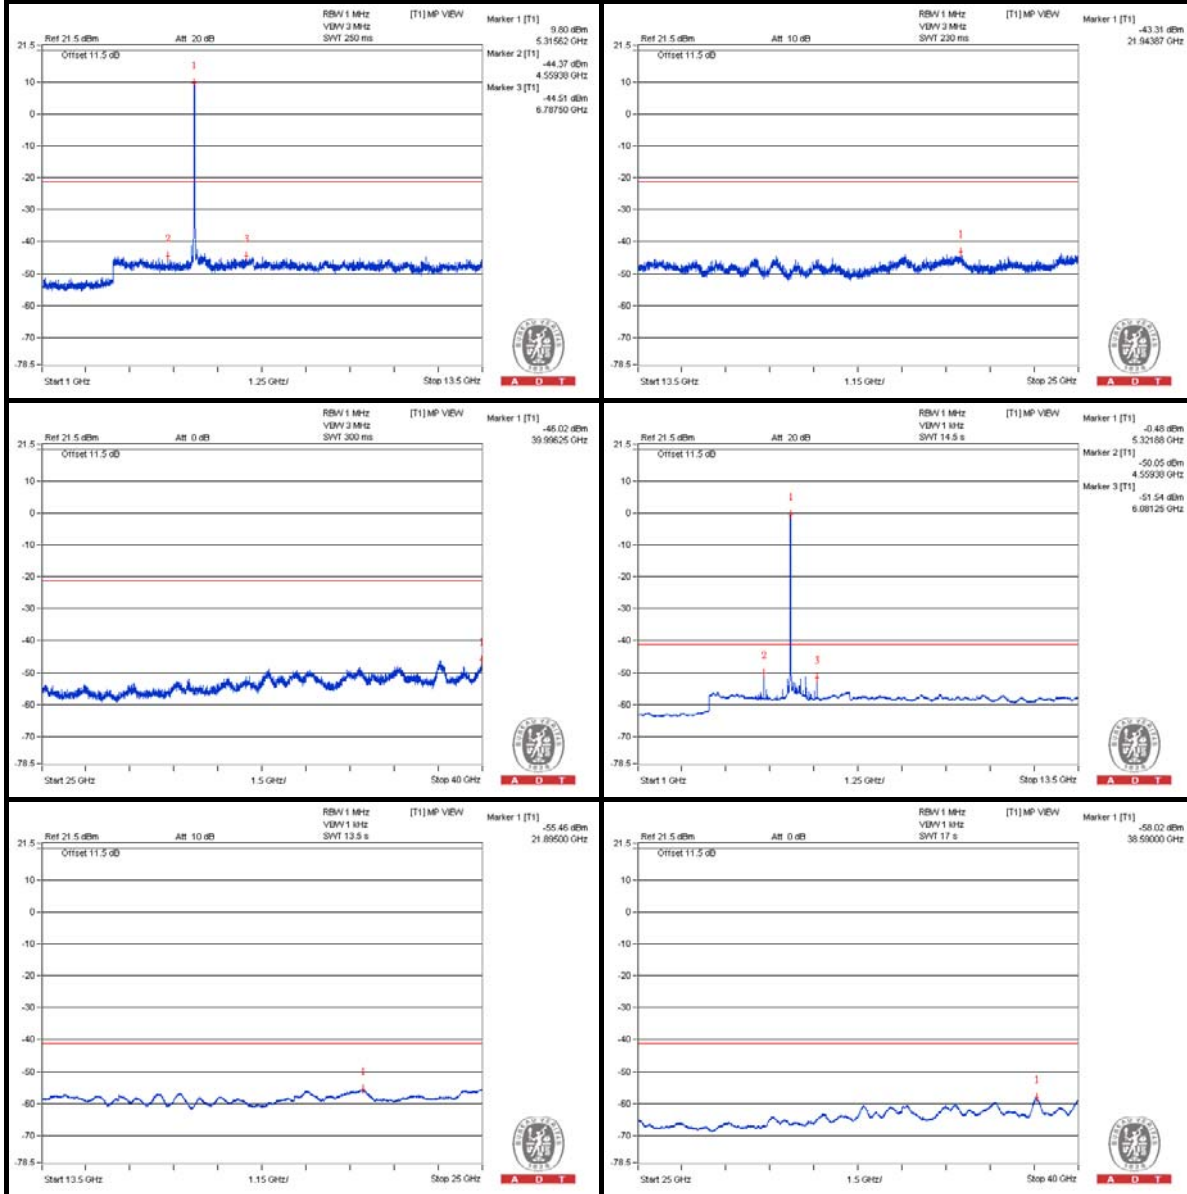


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350 PK	66.25	74	-7.75	-38.26	-41.35	7.52	-29.01
2	5397.6 AV	52.34	54	-1.66	-53.58	-53.33	7.52	-42.92


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

Chain (0)

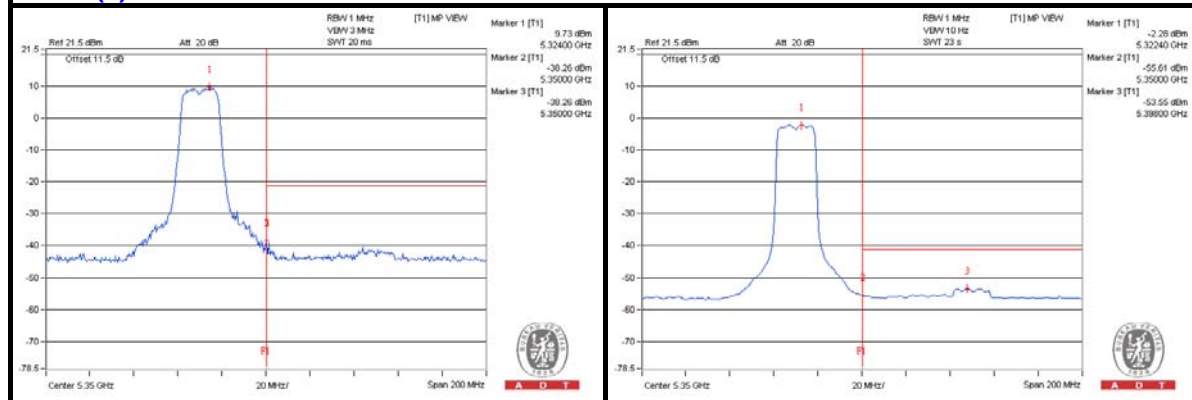

Chain (1)

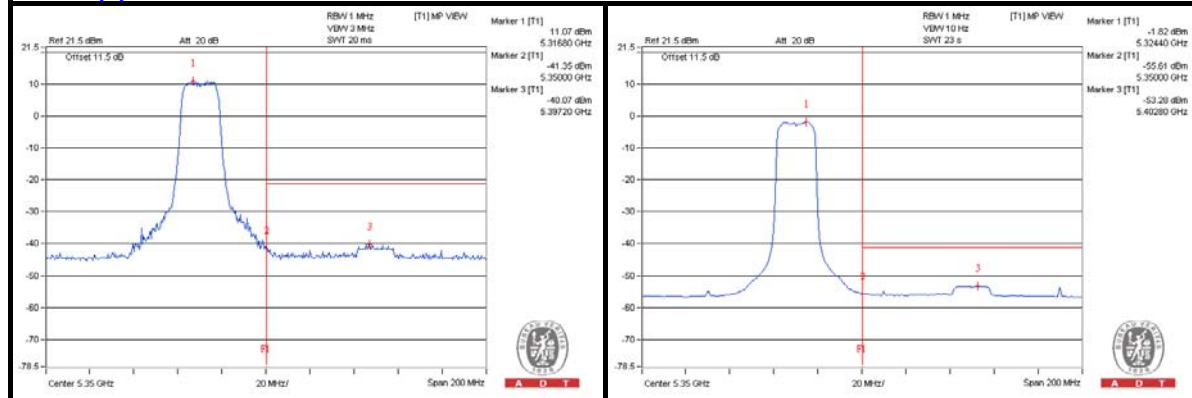



A D T

802.11a – Channel 100


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3665.625 PK	60.77	74	-13.23	-45.15	-45.87	7.99	-34.49
2	3665.625 AV	52.61	54	-1.39	-52.86	-54.62	7.99	-42.65
3	7334.375 PK	60.26	74	-13.74	-44.9	-47.48	7.99	-35
4	7334.375 AV	49.08	54	-4.92	-56.73	-57.68	7.99	-46.18
5	10996.875 PK	59.03	74	-14.97	-47.67	-46.83	7.99	-36.23
6	11000 AV	48.48	54	-5.52	-57.59	-57.97	7.99	-46.78
7	16492.875 PK	60.23	74	-13.77	-46.15	-45.92	7.99	-35.03
8	16501.5 AV	48.94	54	-5.06	-57.58	-57.08	7.99	-46.32


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

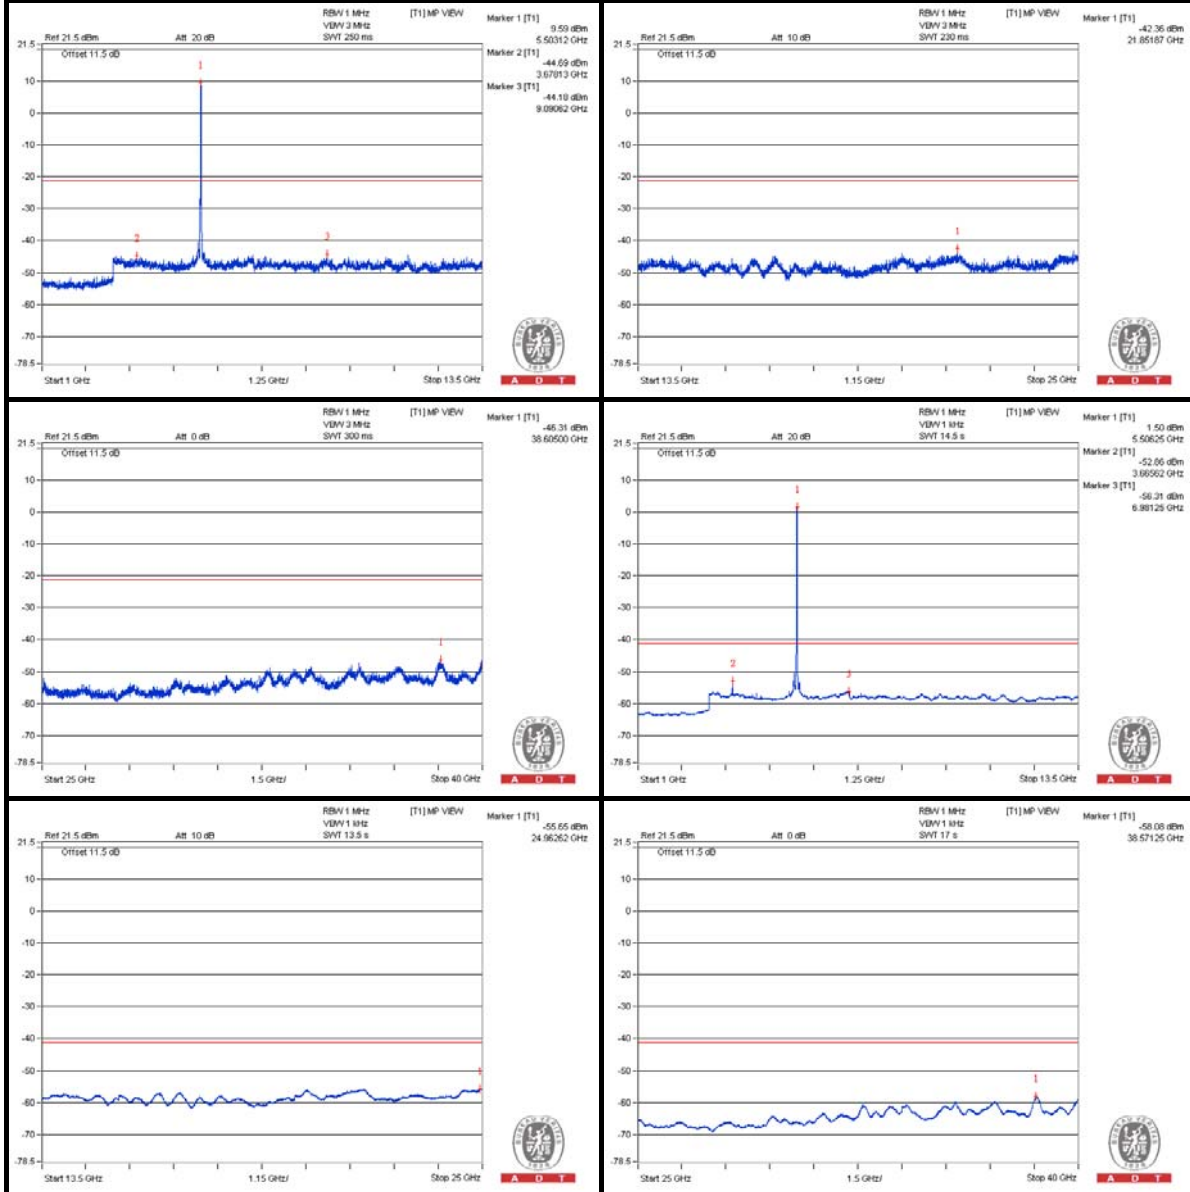

Chain (1)

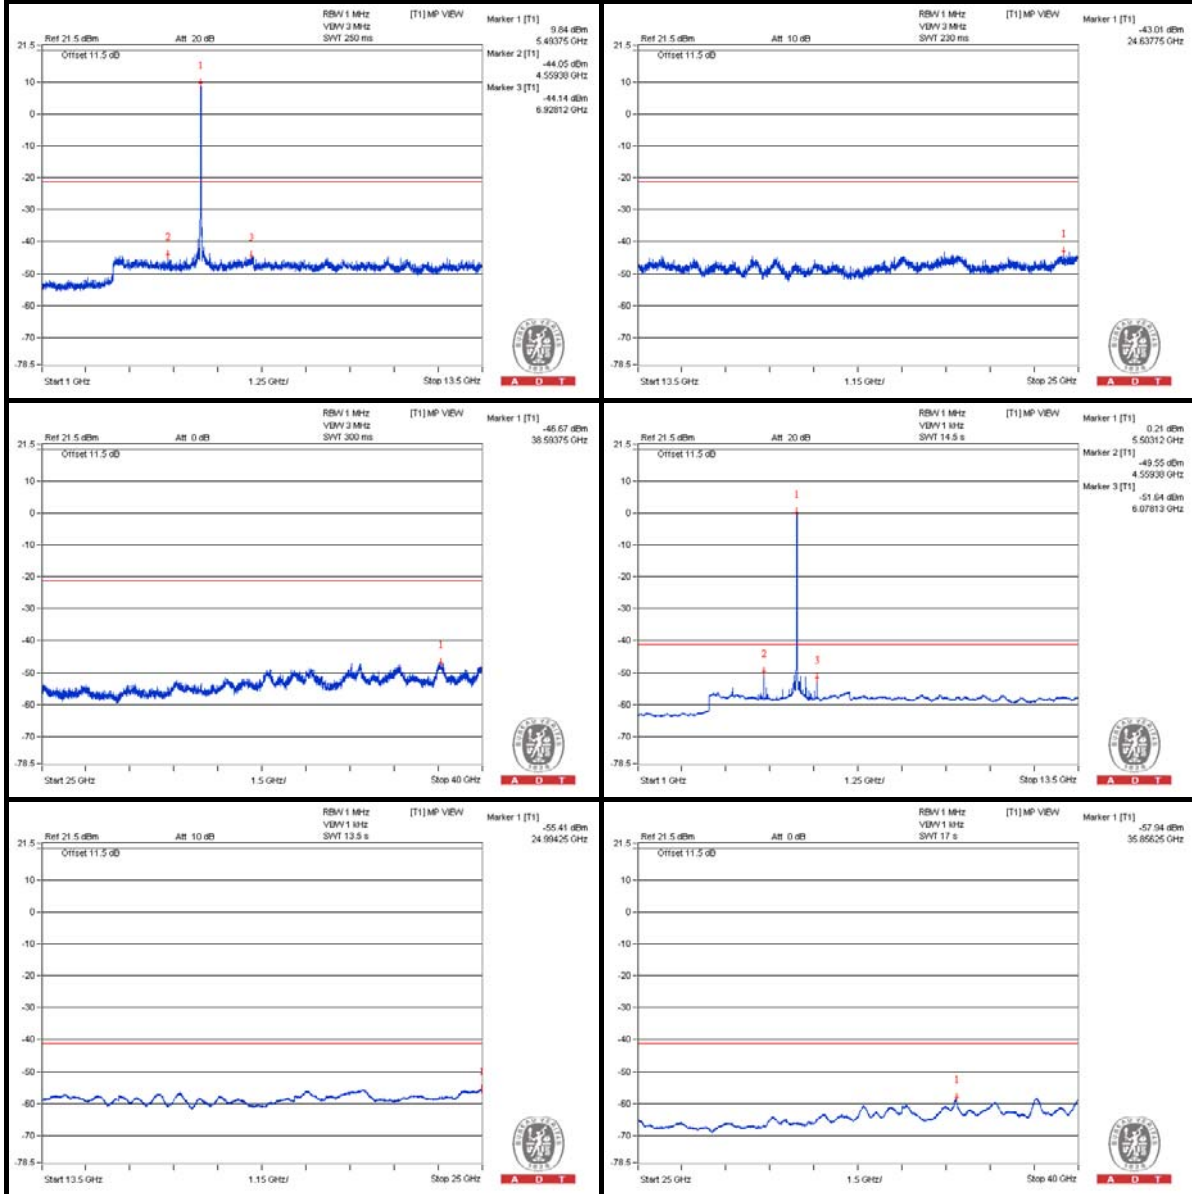


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5421.5 PK	65.05	74	-8.95	-40.8	-41.67	7.99	-30.21
2	5422 AV	52.54	54	-1.46	-53.27	-54.23	7.99	-42.72


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

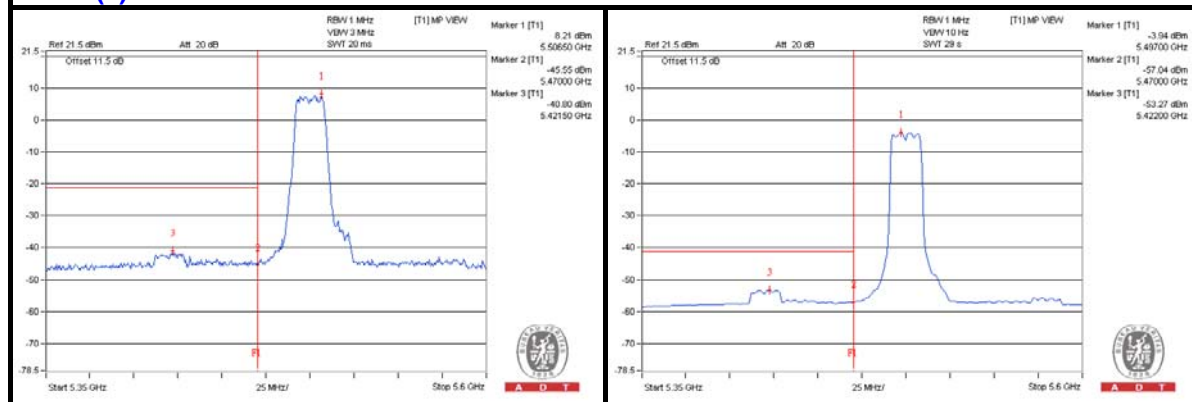

Chain (1)

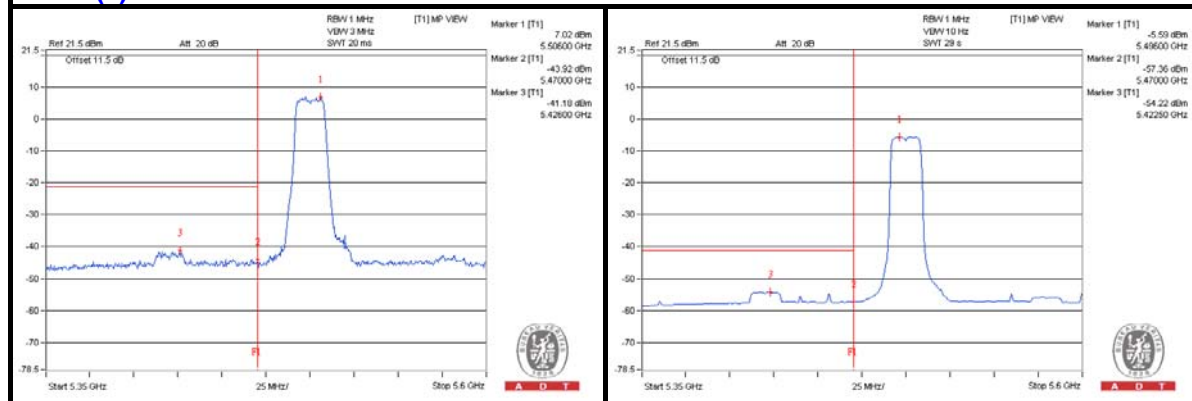



A D T

802.11a – Channel 116

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3718.75 PK	61.78	74	-12.22	-43.8	-45.29	7.99	-33.48
2	3718.75 AV	53.33	54	-0.67	-51.16	-55.96	7.99	-41.93
3	7440.625 PK	59.87	74	-14.13	-45.8	-47.08	7.99	-35.39
4	7440.625 AV	50.4	54	-3.6	-54.83	-57.22	7.99	-44.86
5	11168.75 PK	64.72	74	-9.28	-39.25	-46.68	7.99	-30.54
6	11162.5 AV	52.42	54	-1.58	-52.14	-56.68	7.99	-42.84
7	16745.875 PK	61.12	74	-12.88	-50.39	-42.83	7.99	-34.14
8	16737.25 AV	48.85	54	-5.15	-60.05	-55.78	7.99	-46.41

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

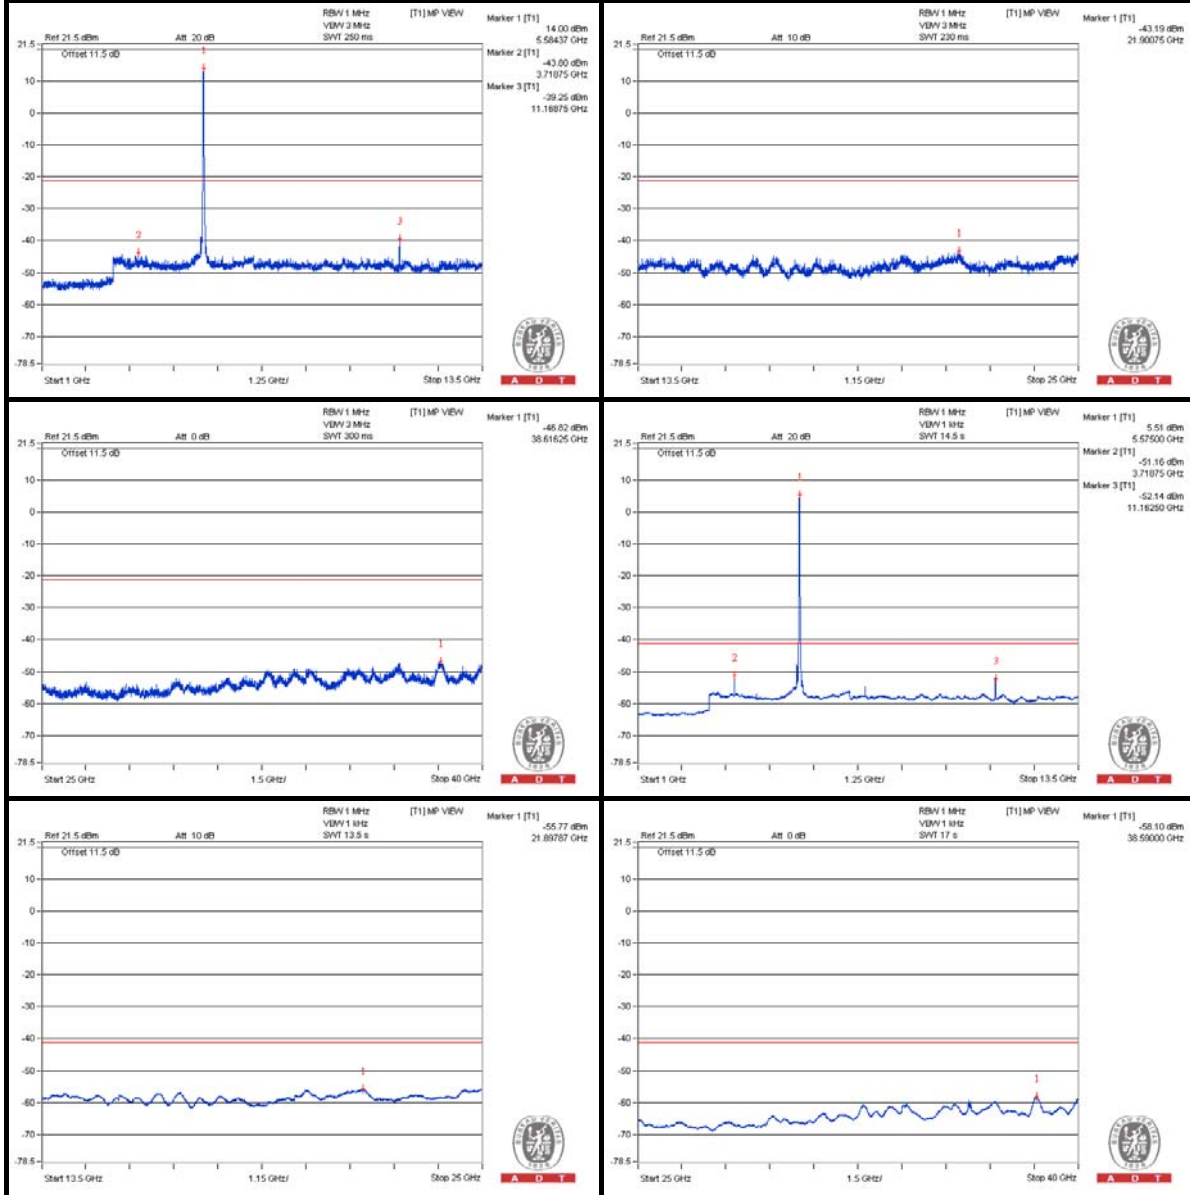

Chain (1)

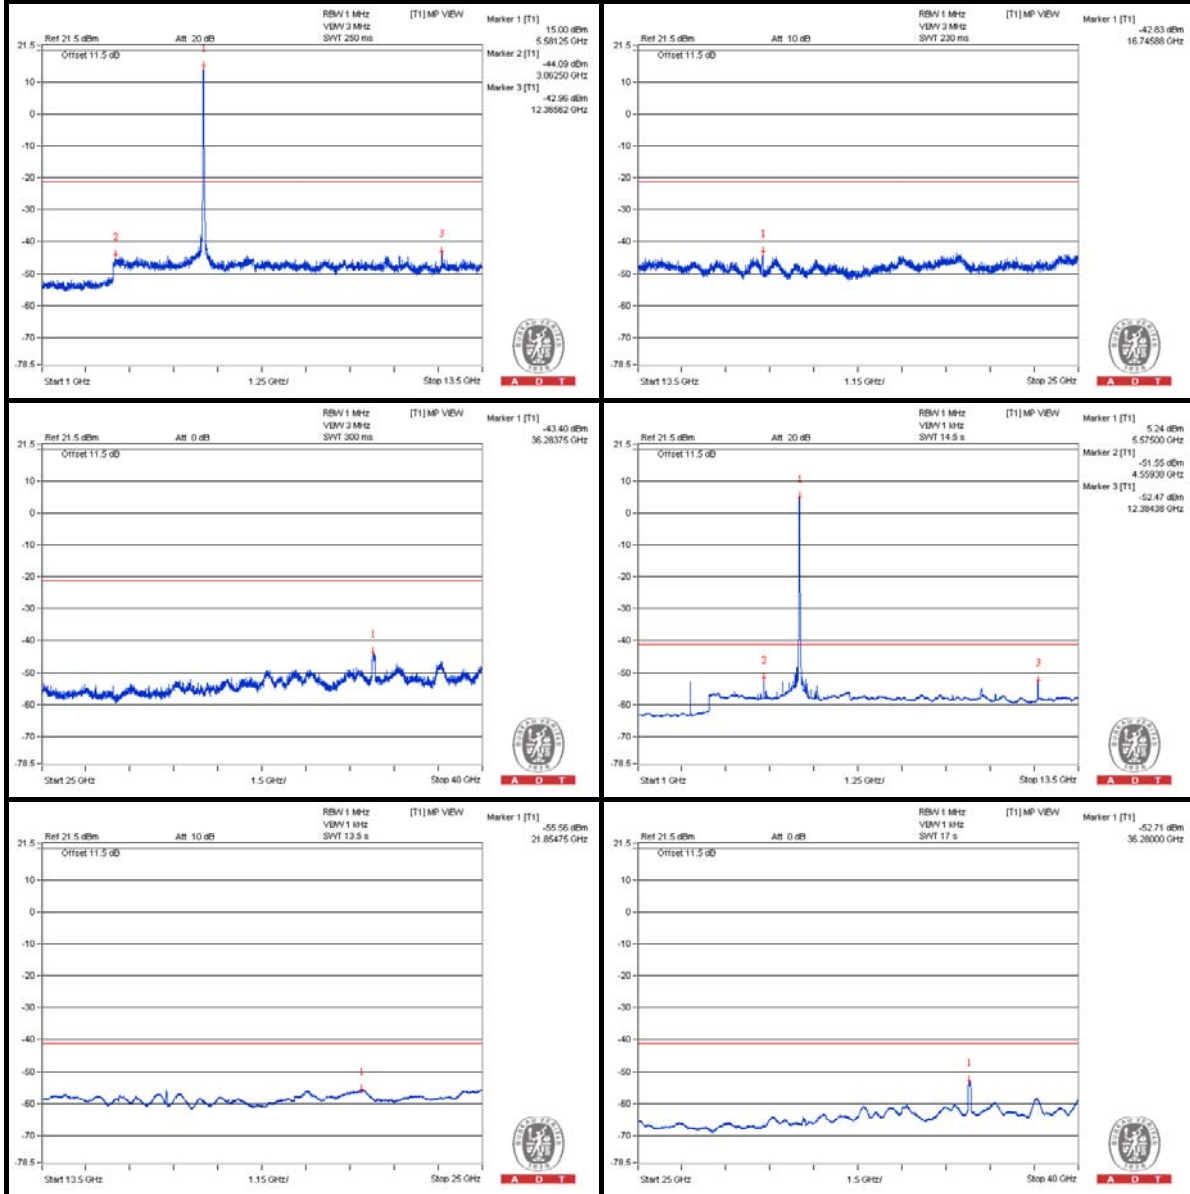

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5456 PK	65.75	74	-8.25	-40.51	-40.51	7.99	-29.51
2	5456 AV	55.92	54	* 1.92	-50.34	-50.34	7.99	-39.34

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX A)

Chain (0)

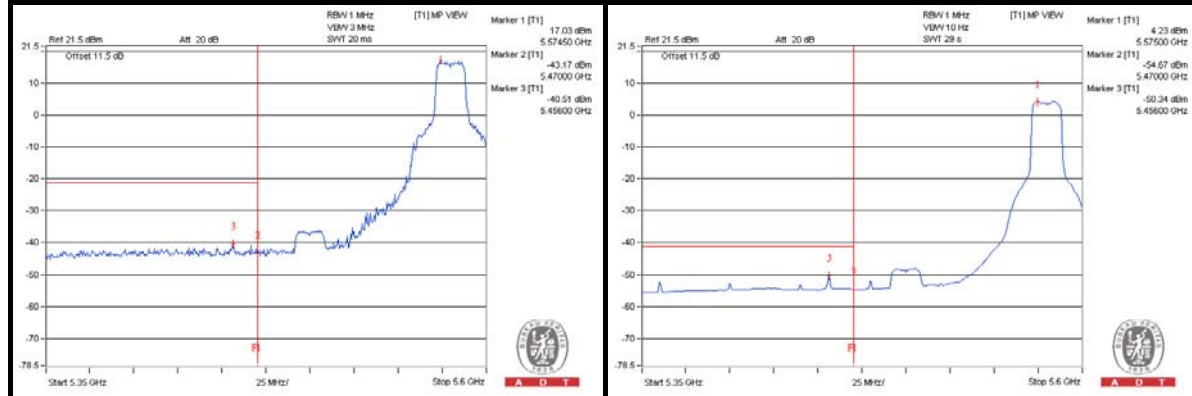

Chain (1)

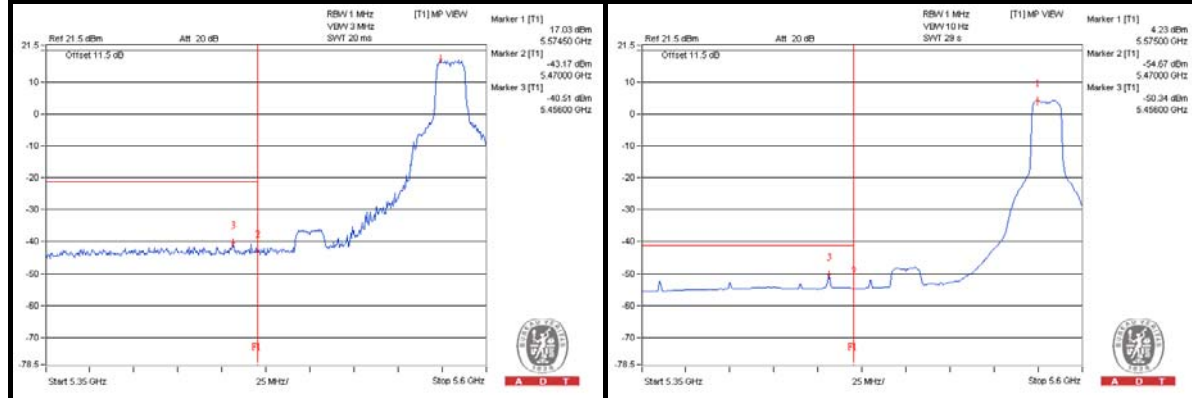



A D T

802.11a – Channel 132

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3771.875 PK	62.52	74	-11.48	-42.92	-44.76	7.99	-32.74
2	3771.875 AV	56.59	54	* 2.59	-47.29	-55.33	7.99	-38.67
3	7546.875 PK	59.39	74	-14.61	-46.47	-47.32	7.99	-35.87
4	7546.875 AV	52.06	54	-1.94	-52.51	-57.02	7.99	-43.2
5	11318.75 PK	61.92	74	-12.08	-44.77	-43.95	7.99	-33.34
6	11321.875 AV	50.85	54	-3.15	-54.9	-55.98	7.99	-44.41
7	16984.5 PK	60.91	74	-13.09	-46.91	-44.21	7.99	-34.35
8	16981.625 AV	49.57	54	-4.43	-57.92	-55.74	7.99	-45.69


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX A)

Chain (0)

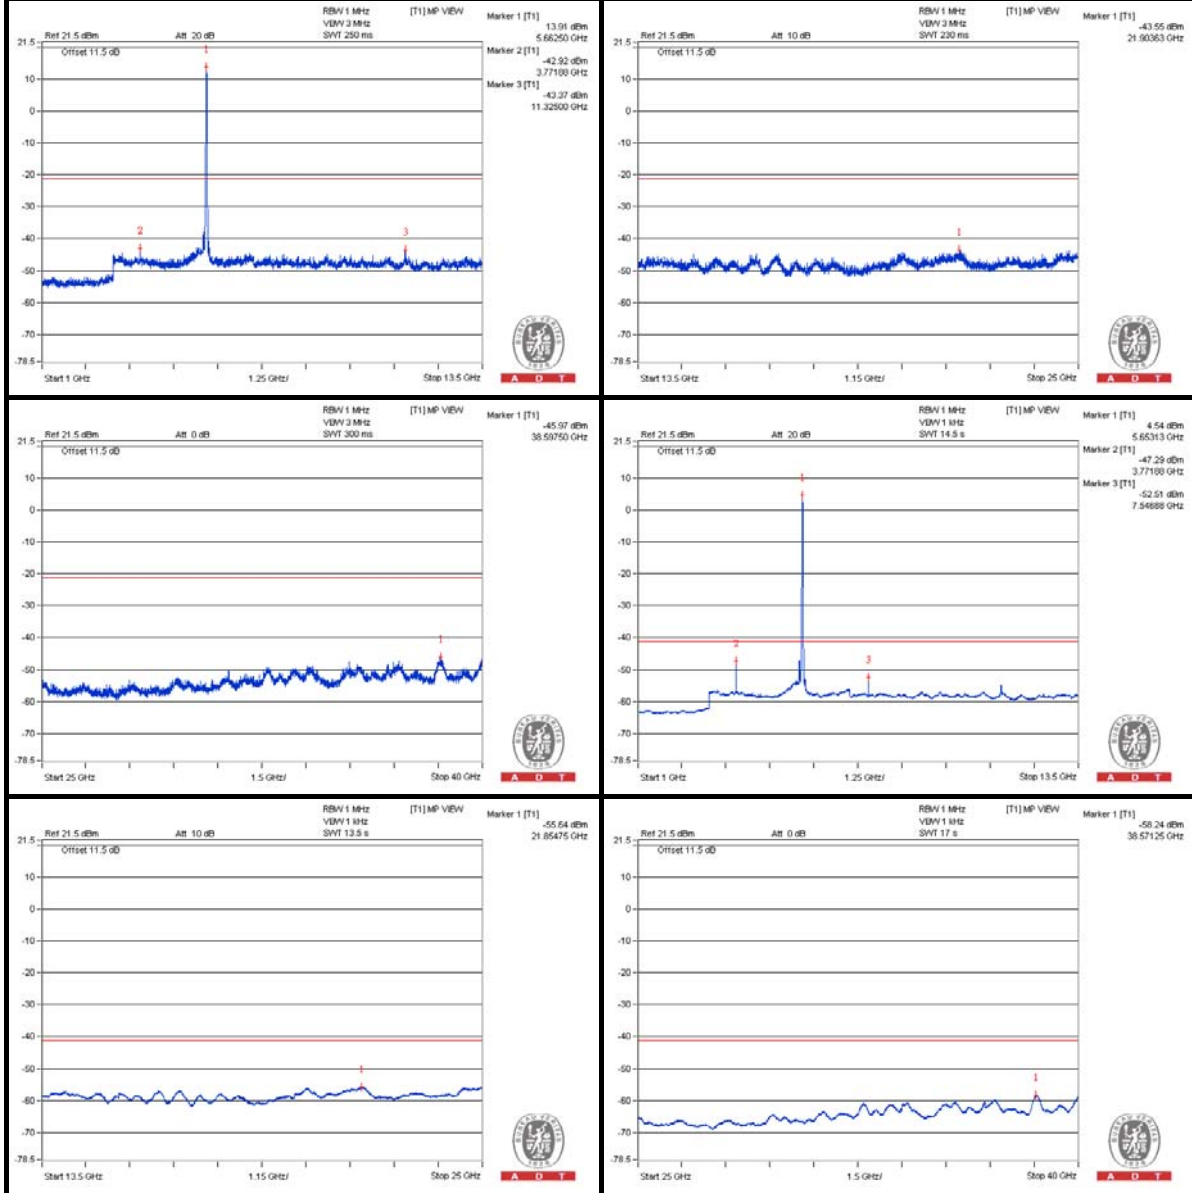

Chain (1)

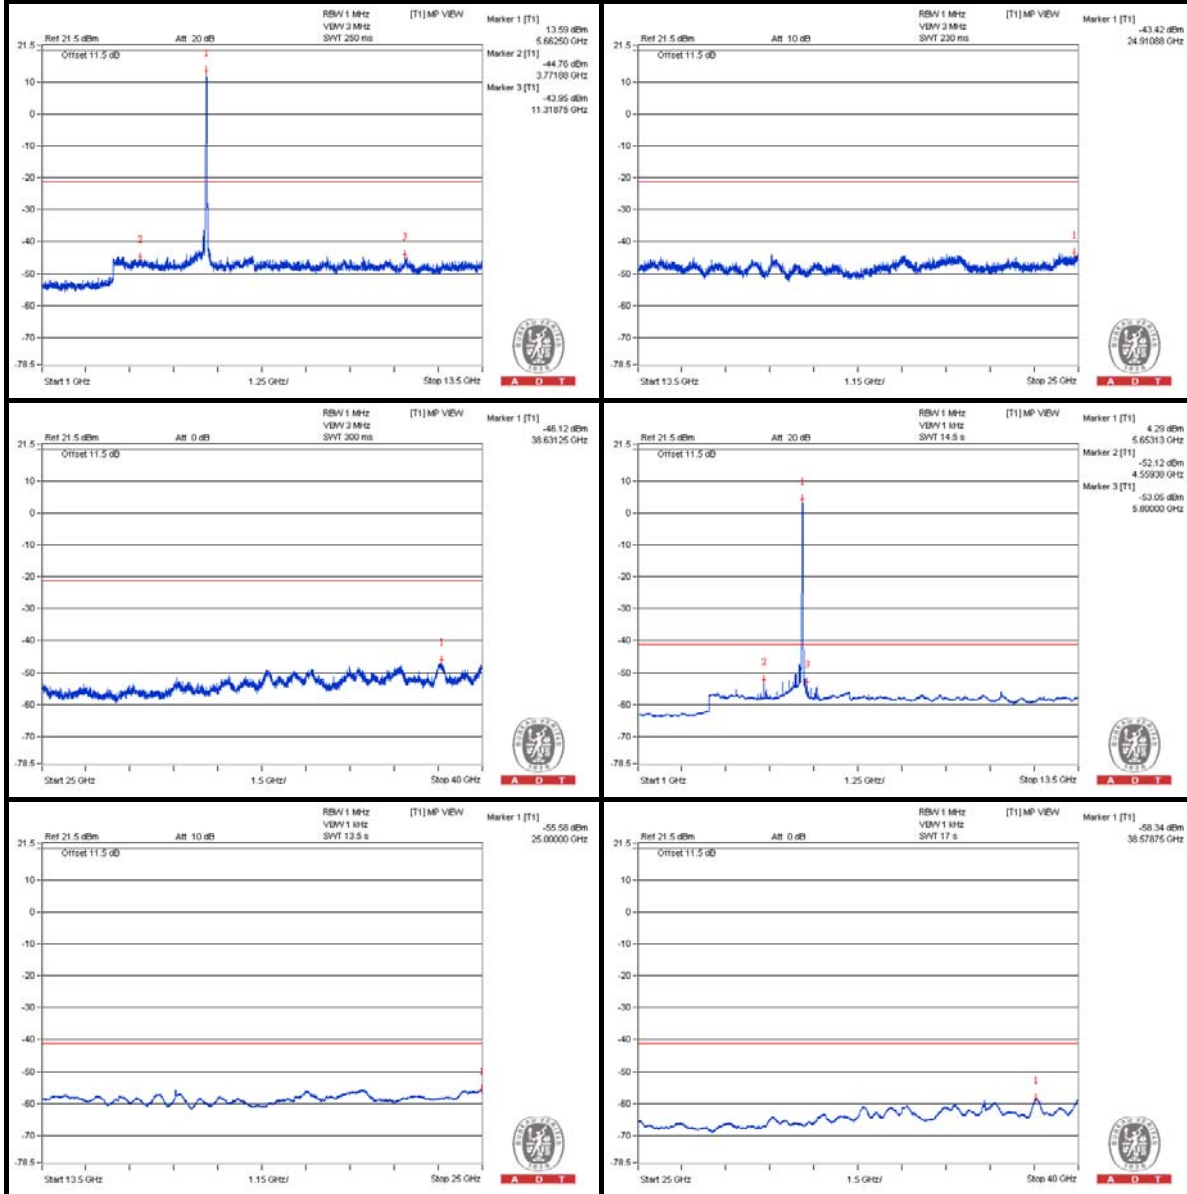


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5745 PK	65.51	74	-8.49	-41.82	-39.89	7.99	-29.75
2	5734.6 AV	53.32	54	-0.68	-53.32	-52.59	7.99	-41.94

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

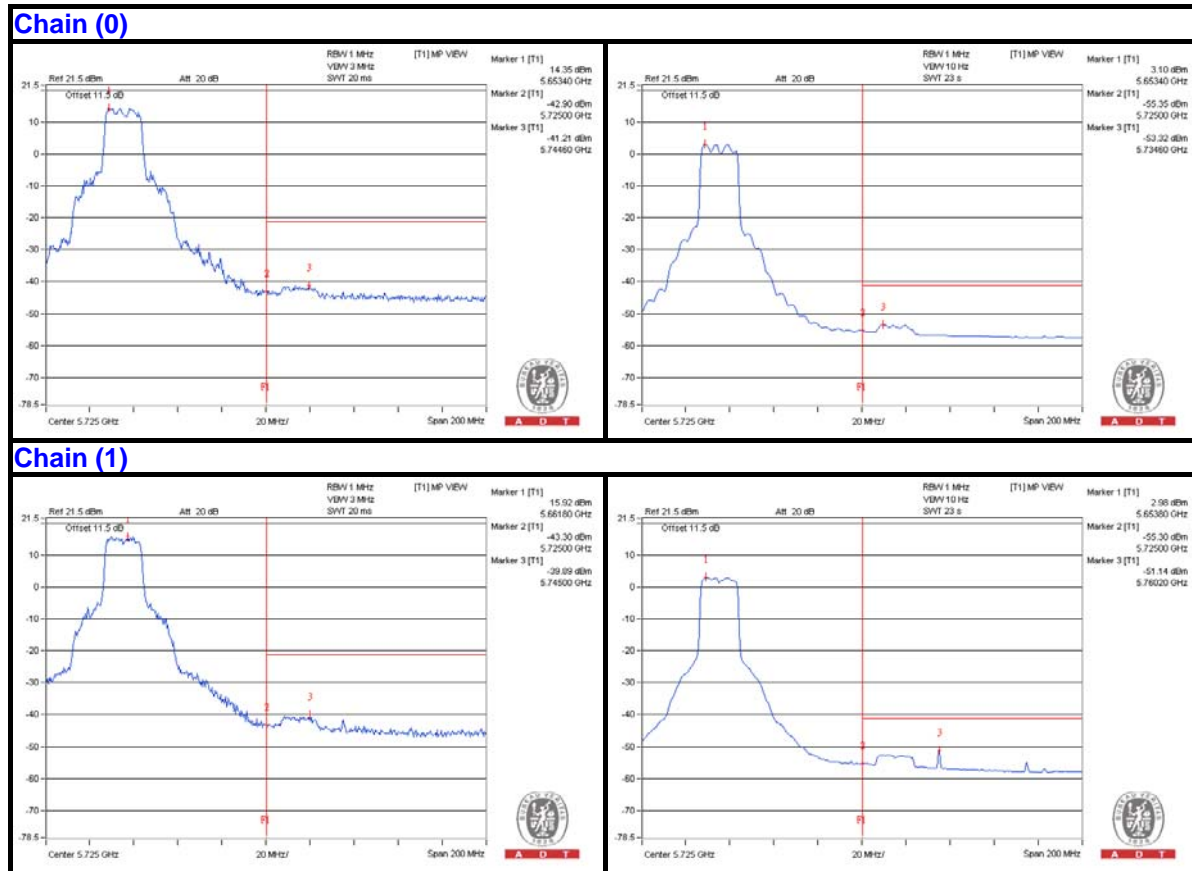



A D T

802.11a – Channel 140

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3800 PK	62.62	74	-11.38	-41.76	-47.02	7.99	-32.64
2	3800 AV	57.67	54	* 3.67	-46.07	-55.27	7.99	-37.59
3	7600 PK	59.64	74	-14.36	-46.1	-47.21	7.99	-35.62
4	7600 AV	51.93	54	-2.07	-52.84	-56.62	7.99	-43.33
5	11390.625 PK	59.83	74	-14.17	-47.15	-45.82	7.99	-35.43
6	11403.125 AV	49.16	54	-4.84	-57.28	-56.92	7.99	-46.1
7	17105.25 PK	60.22	74	-13.78	-45.57	-46.56	7.99	-35.04
8	17090.875 AV	49.42	54	-4.58	-56.88	-56.81	7.99	-45.84

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX A)




A D T

Chain (0)

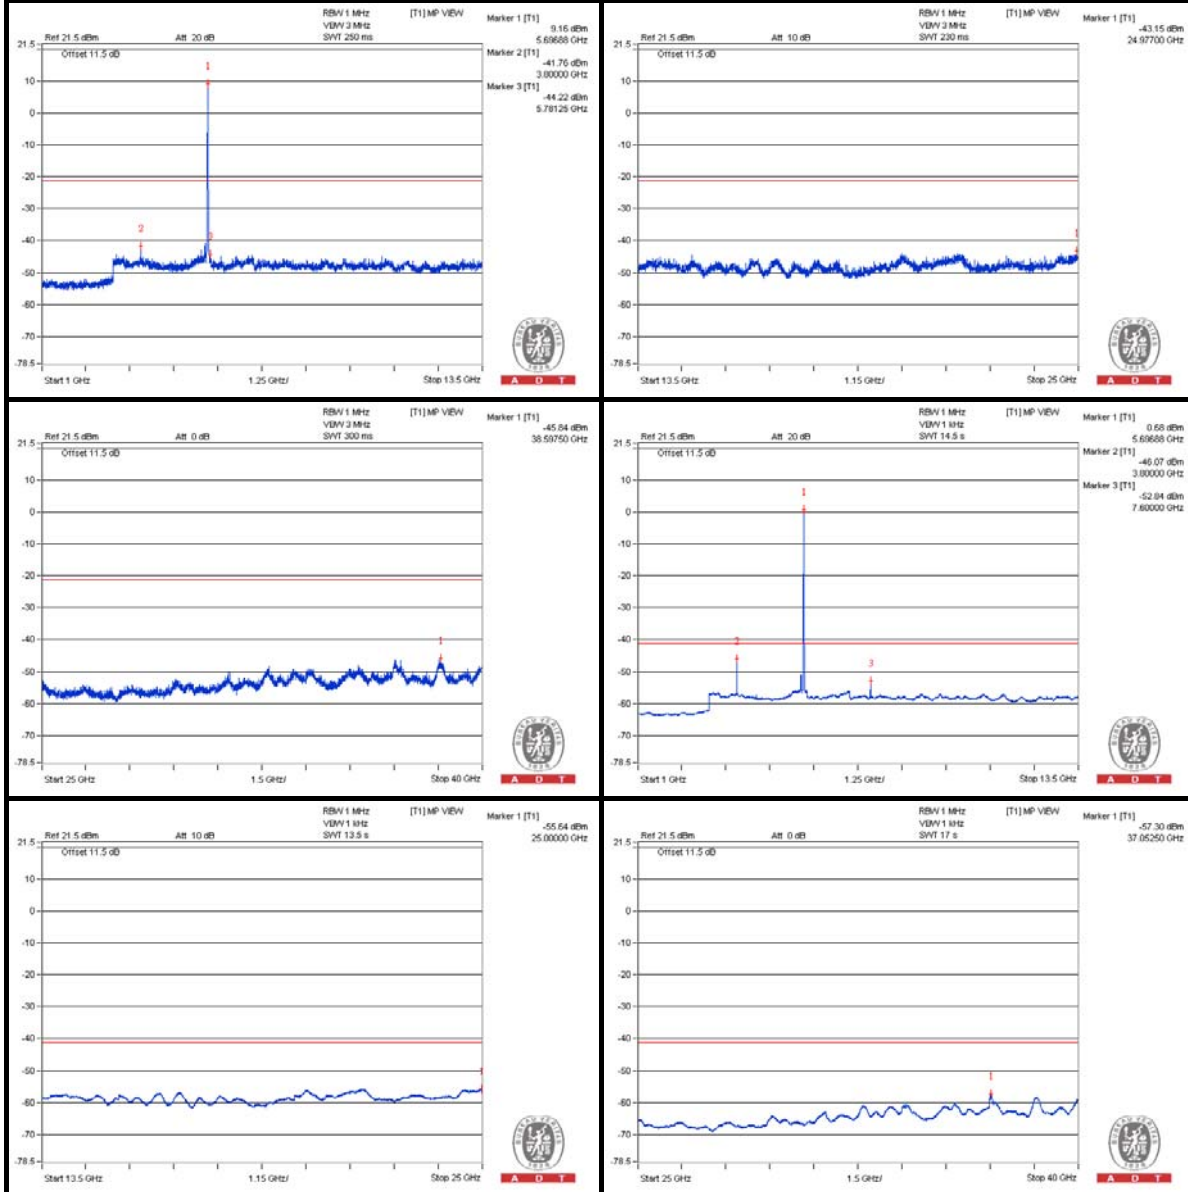

Chain (1)

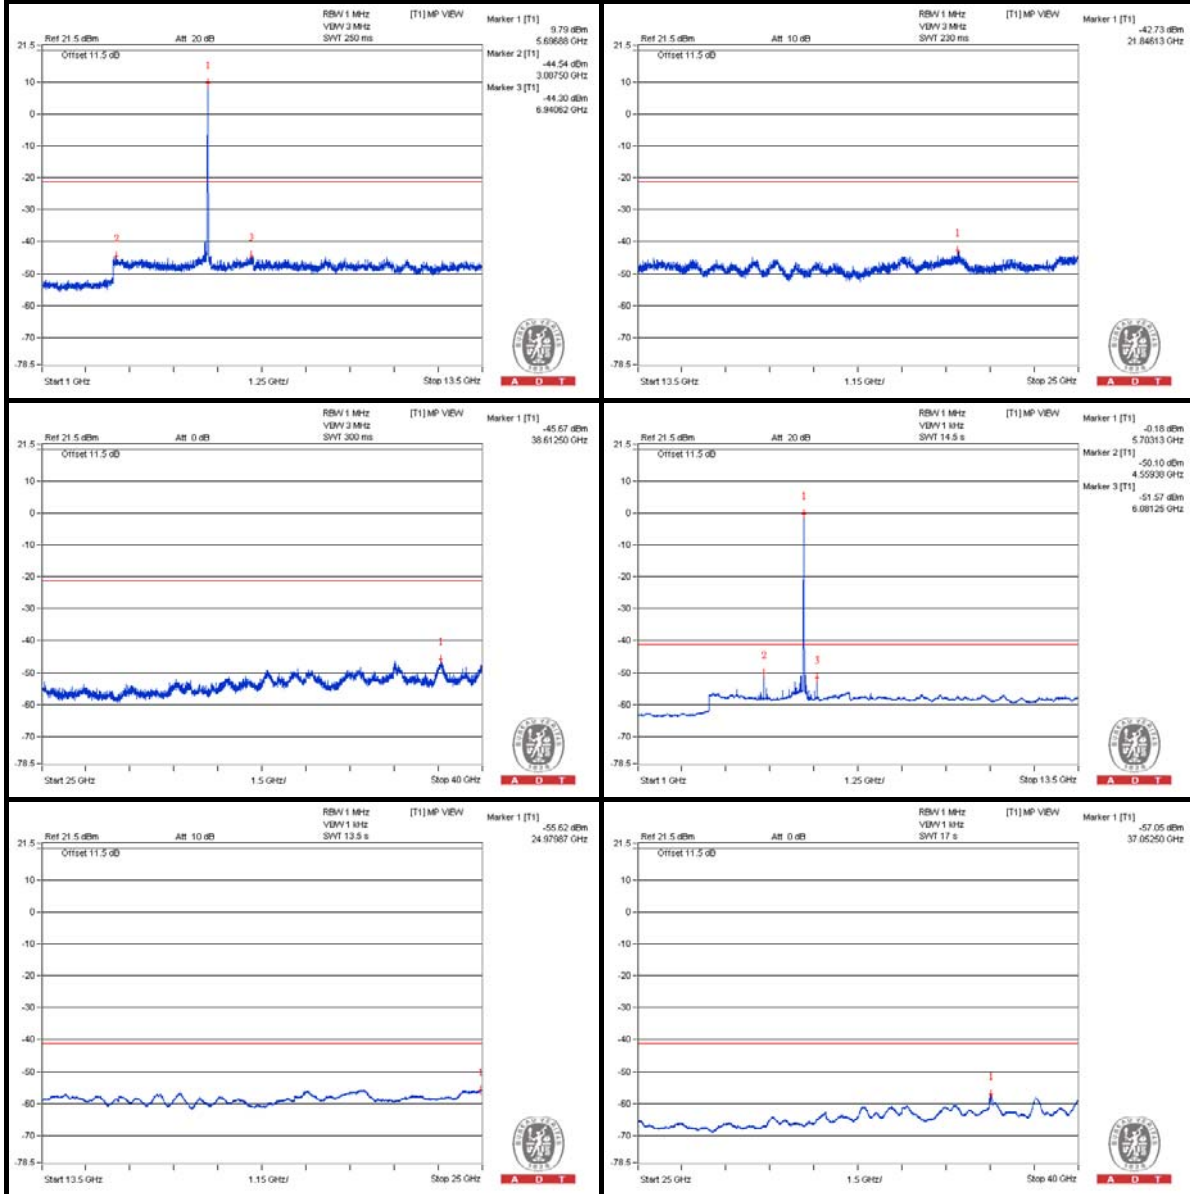


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725.4 PK	67.83	74	-6.17	-36.14	-43.61	7.99	-27.43
2	5759.8 AV	53.23	54	-0.77	-57.15	-50.96	7.99	-42.03


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

Chain (0)

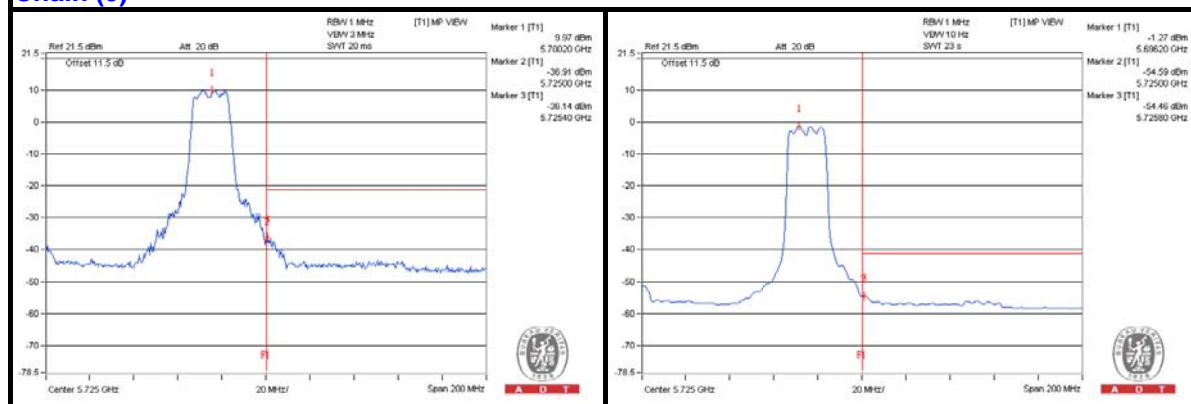

Chain (1)

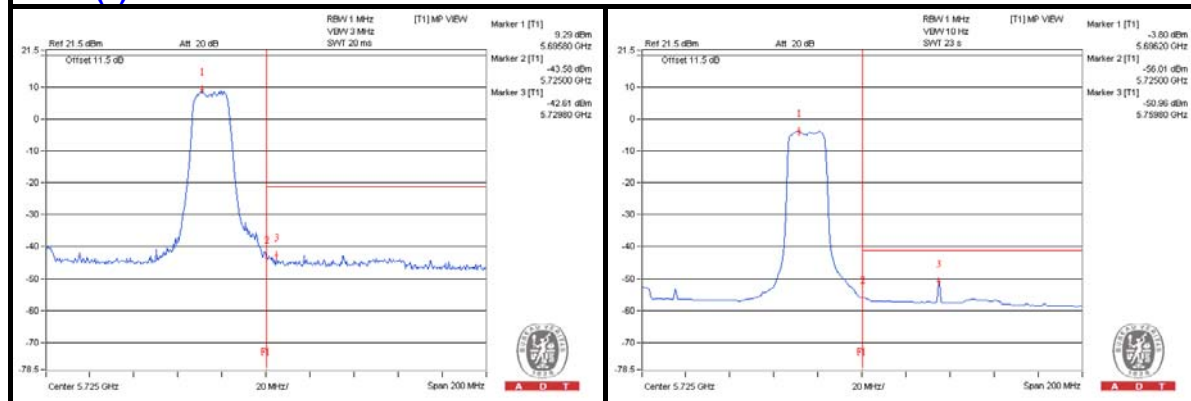



A D T

802.11n (HT20) – Channel 36

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3456.25 PK	60	74	-14	-44.95	-46.61	7.43	-35.26
2	3453.125 AV	48.83	54	-5.17	-56.03	-57.92	7.43	-46.43
3	6906.25 PK	60.2	74	-13.8	-44.81	-46.33	7.43	-35.06
4	6906.25 AV	49.35	54	-4.65	-56.27	-56.43	7.43	-45.91
5	10353.125 PK	58.81	74	-15.19	-46.42	-47.42	7.43	-36.45
6	10362.5 AV	48.03	54	-5.97	-57.83	-57.52	7.43	-47.23
7	15538.375 PK	58.85	74	-15.15	-48.23	-45.81	7.43	-36.41
8	15538.375 AV	47.93	54	-6.07	-57.78	-57.76	7.43	-47.33

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.