




A D T


Chain (0)



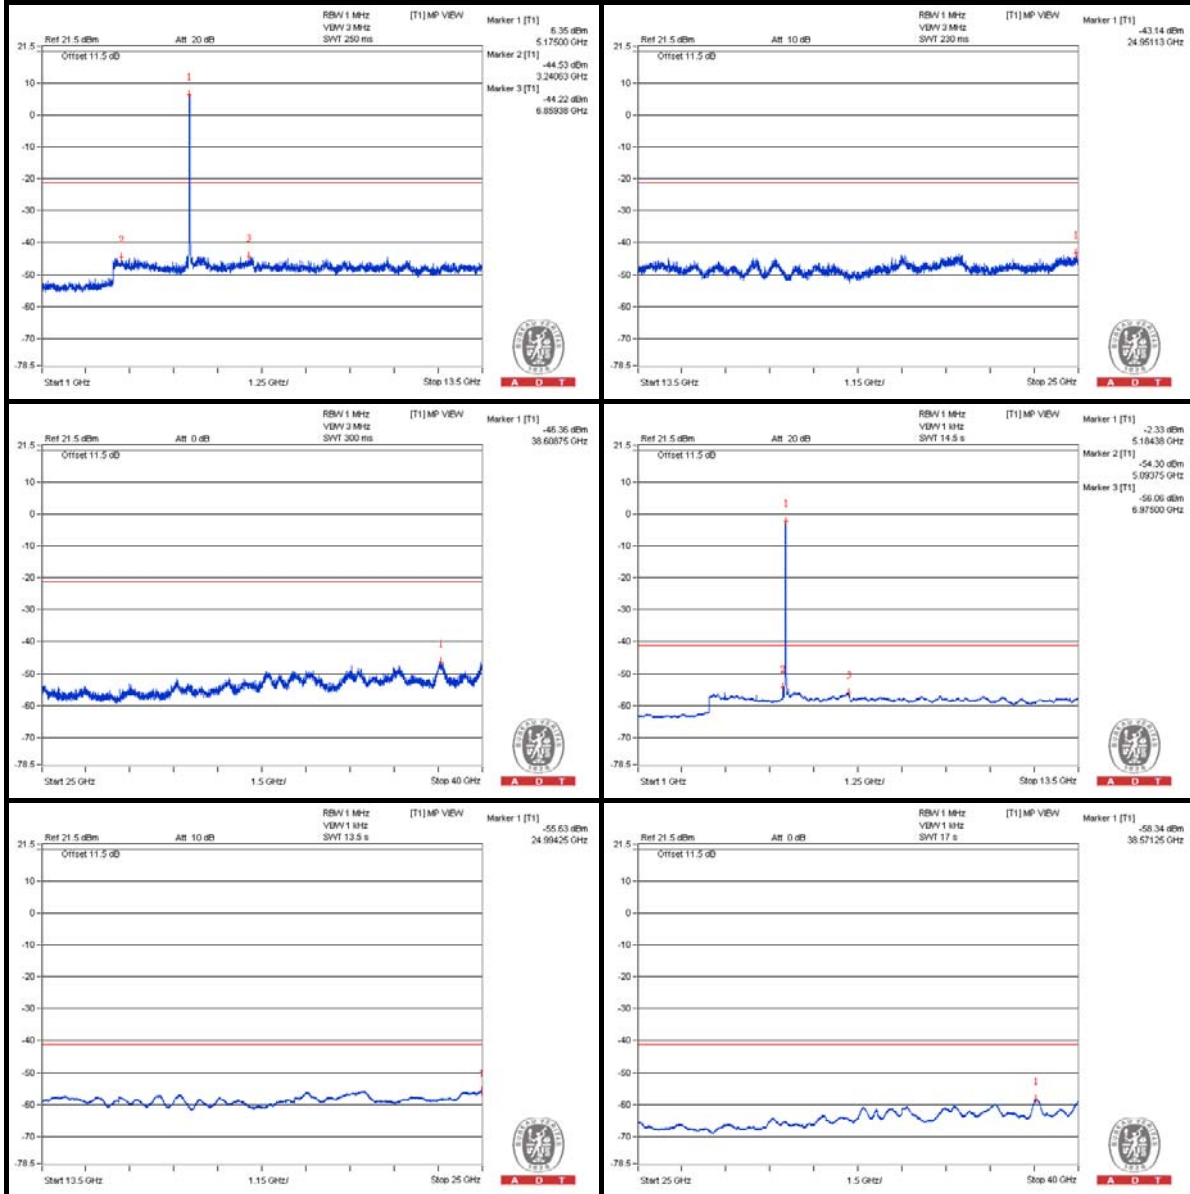

A D T

Chain (1)

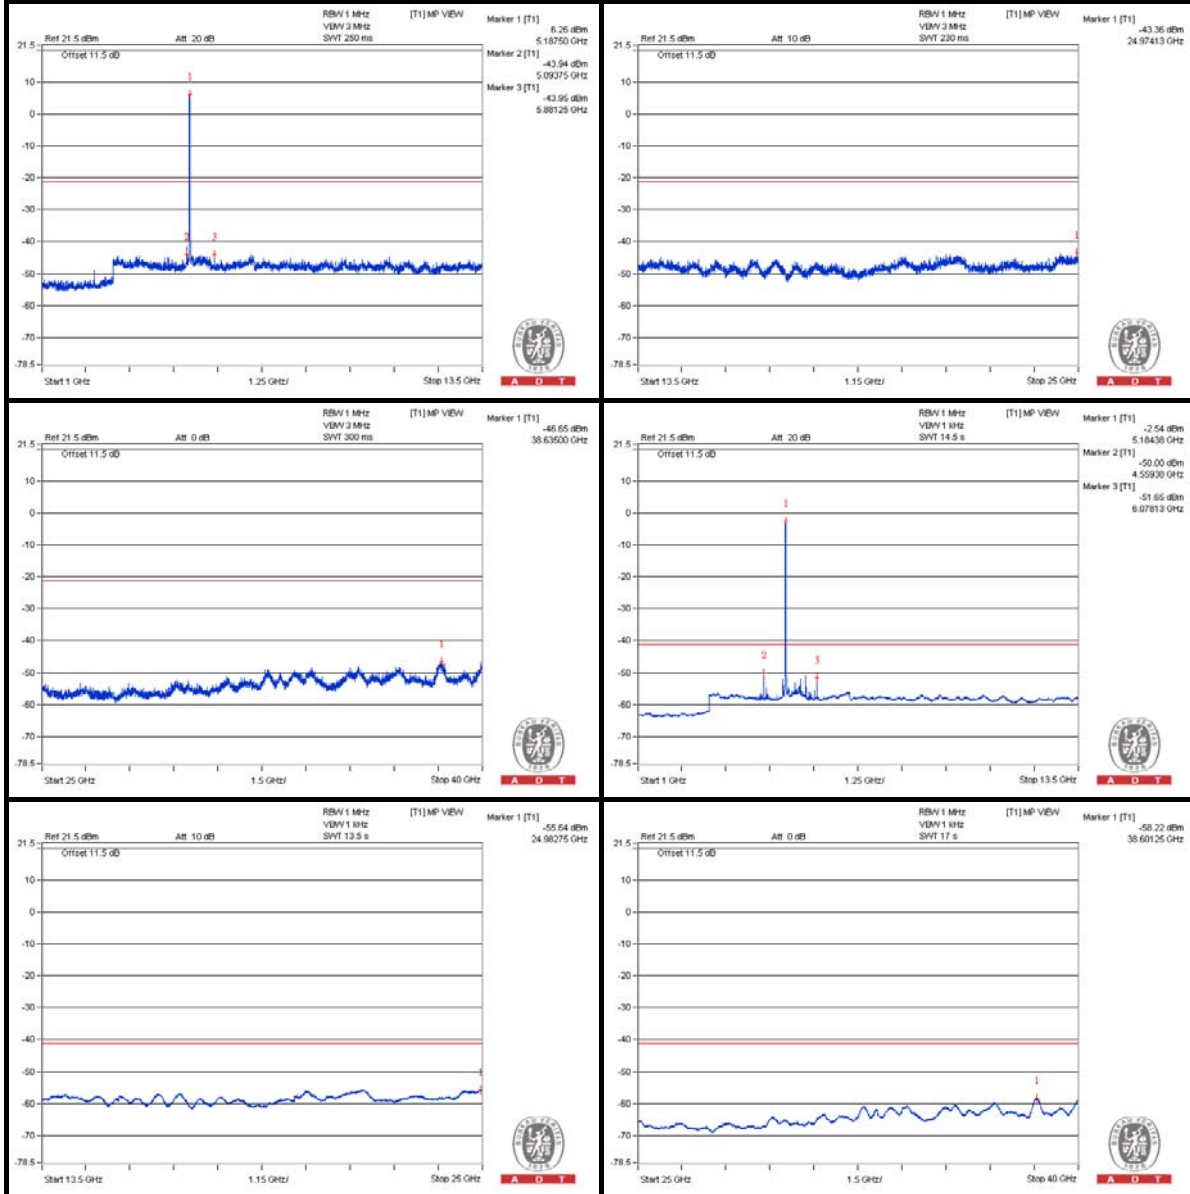


Bandedge table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5103.6 PK	63.93	74	-10.07	-42.44	-41.19	7.43	-31.33
2	5104 AV	52.38	54	-1.62	-54.19	-52.59	7.43	-42.88


Note :

Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

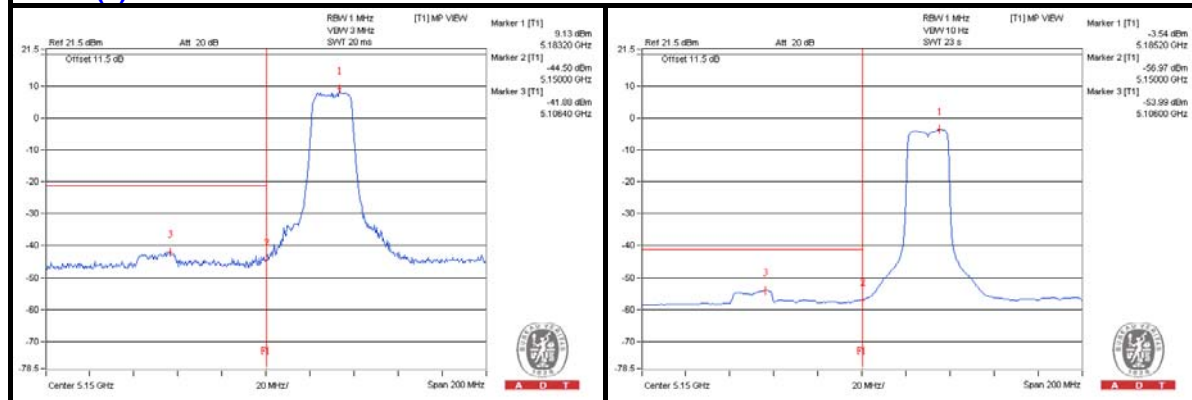

Chain (1)

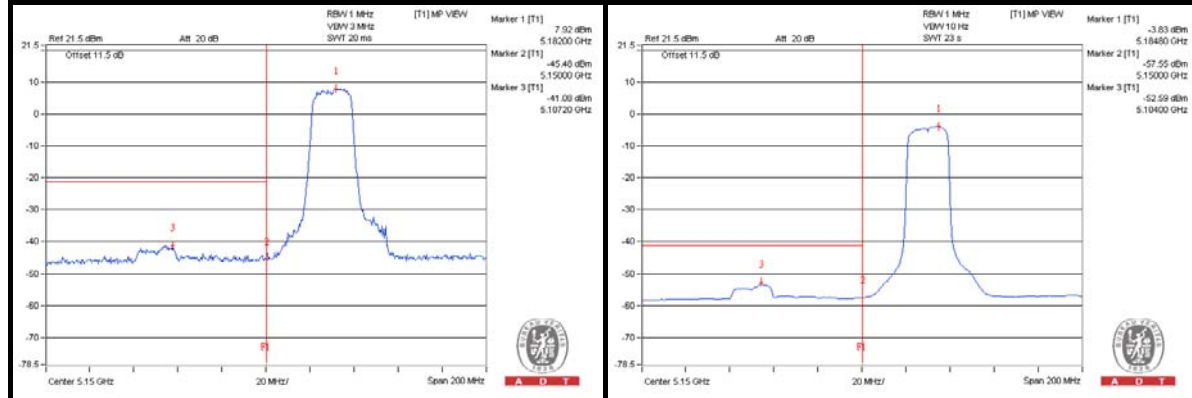



A D T

802.11n (HT20) – Channel 40

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3471.875 PK	58.57	74	-15.43	-46.55	-47.81	7.43	-36.69
2	3465.625 AV	48.96	54	-5.04	-56.01	-57.62	7.43	-46.3
3	6928.125 PK	60.18	74	-13.82	-45.4	-45.65	7.43	-35.08
4	6925 AV	49.23	54	-4.77	-56.48	-56.46	7.43	-46.03
5	10403.125 PK	58.68	74	-15.32	-47.29	-46.76	7.43	-36.58
6	10403.125 AV	47.93	54	-6.07	-57.82	-57.72	7.43	-47.33
7	15598.75 PK	58.93	74	-15.07	-47.11	-46.46	7.43	-36.33
8	15590.125 AV	47.57	54	-6.43	-58.25	-58.02	7.43	-47.69

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

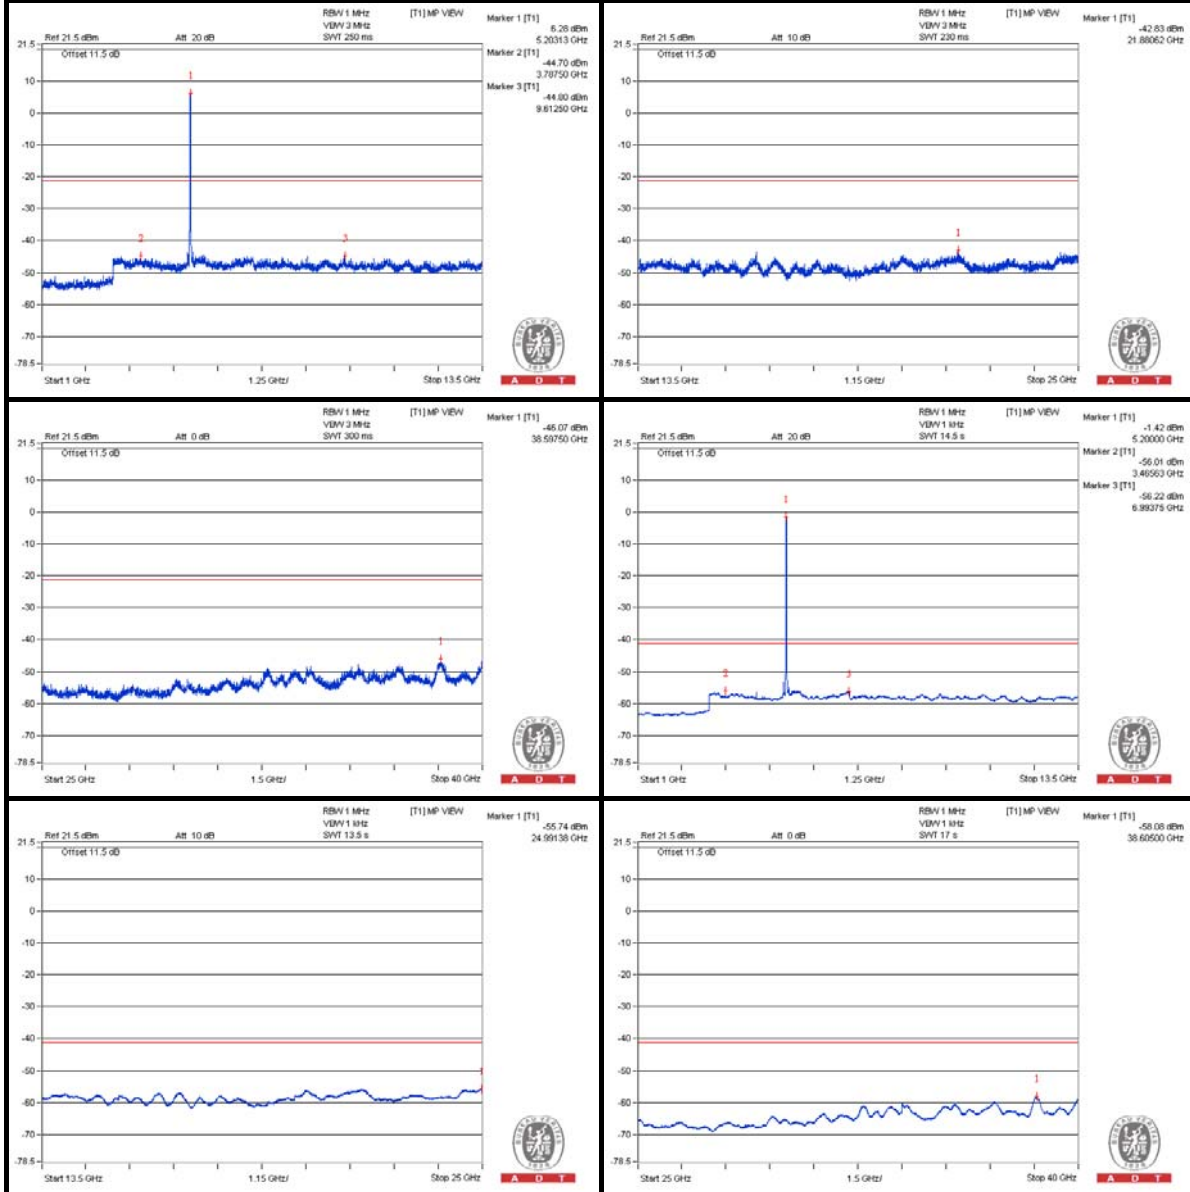

Chain (1)

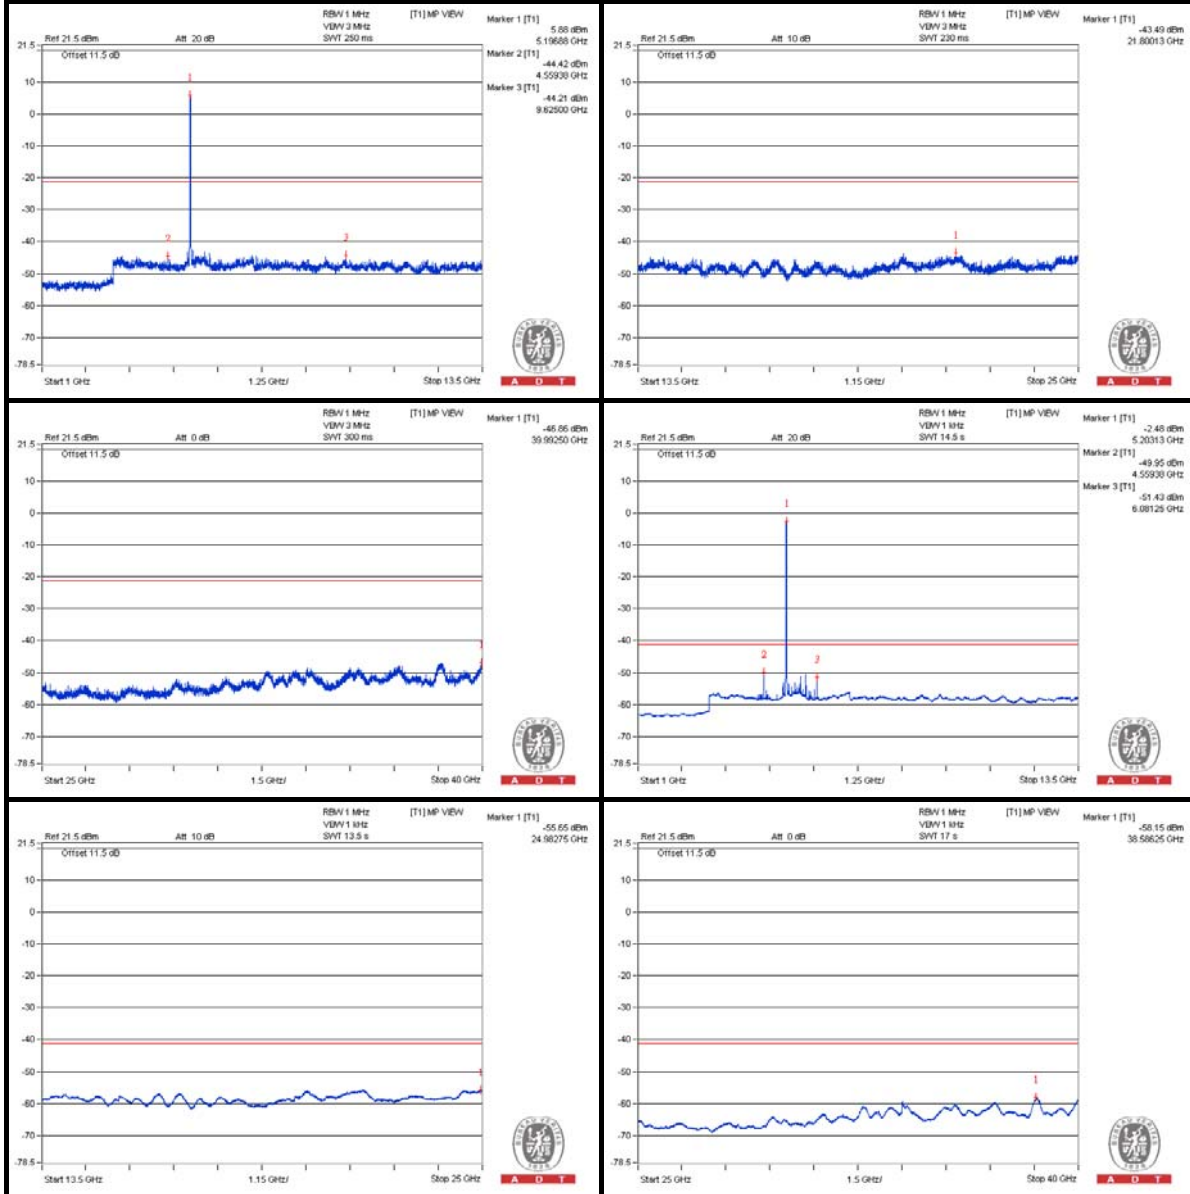



A D T

802.11n (HT20) - Channel 48

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3487.5 PK	58.11	74	-15.89	-48.05	-47.17	7.43	-37.15
2	3493.75 AV	48.64	54	-5.36	-56.22	-58.1	7.43	-46.62
3	6984.375 PK	60.8	74	-13.2	-45.05	-44.76	7.43	-34.46
4	6987.5 AV	49.48	54	-4.52	-56.12	-56.32	7.43	-45.78
5	10478.125 PK	58.51	74	-15.49	-46.42	-48.13	7.43	-36.75
6	10478.125 AV	47.69	54	-6.31	-57.64	-58.42	7.43	-47.57
7	15719.5 PK	57.88	74	-16.12	-48.25	-47.43	7.43	-37.38
8	15728.125 AV	46.69	54	-7.31	-59.15	-58.88	7.43	-48.57


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.



A D T


Chain (0)

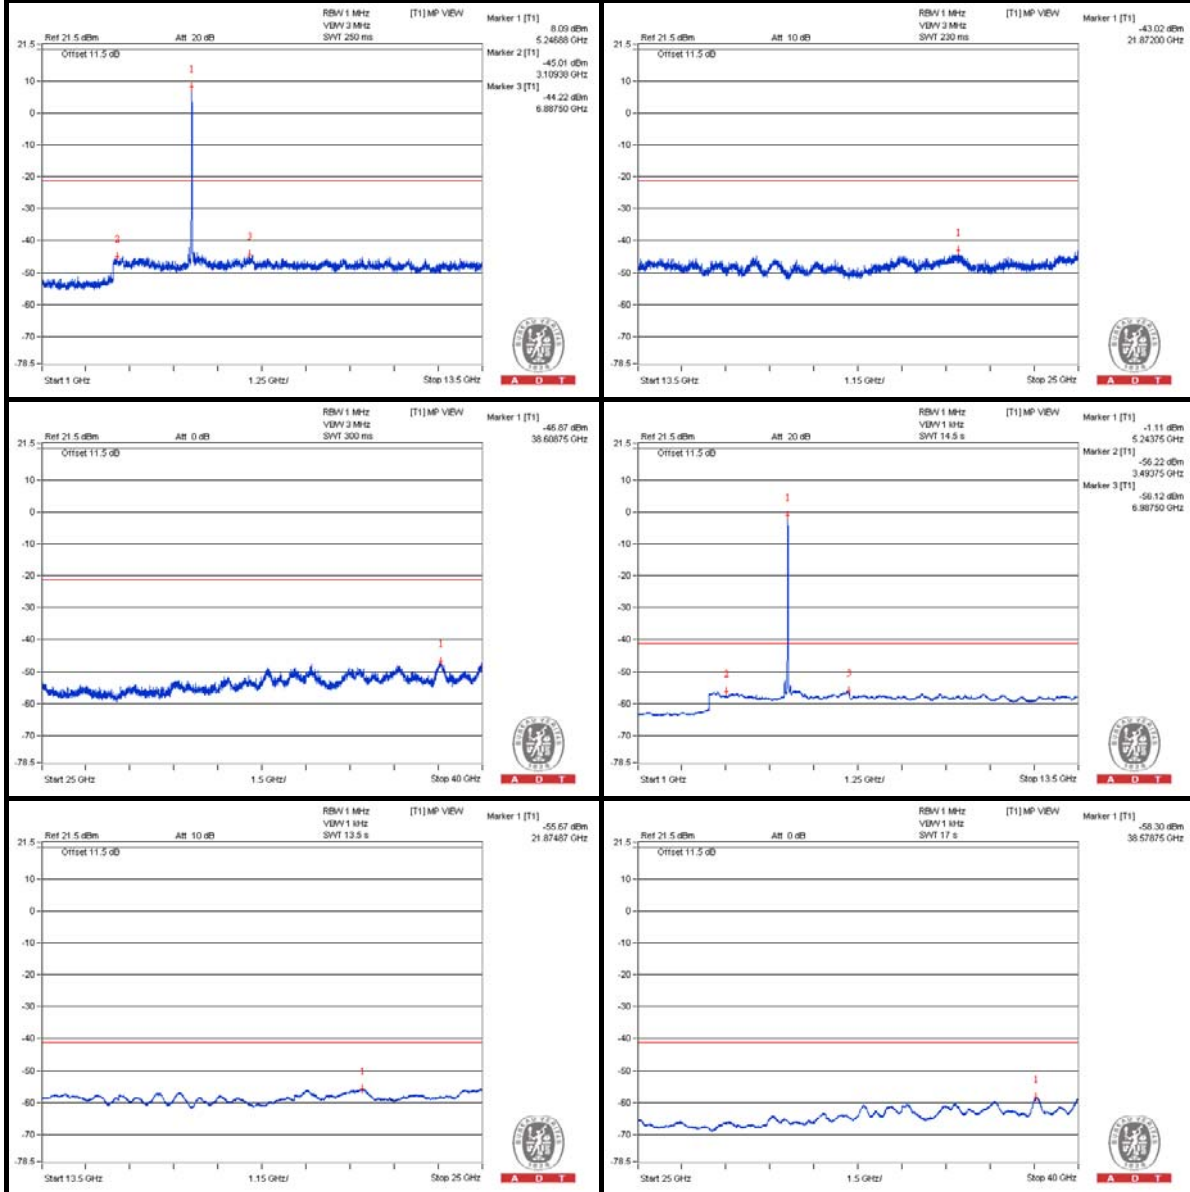



A D T

Chain (1)

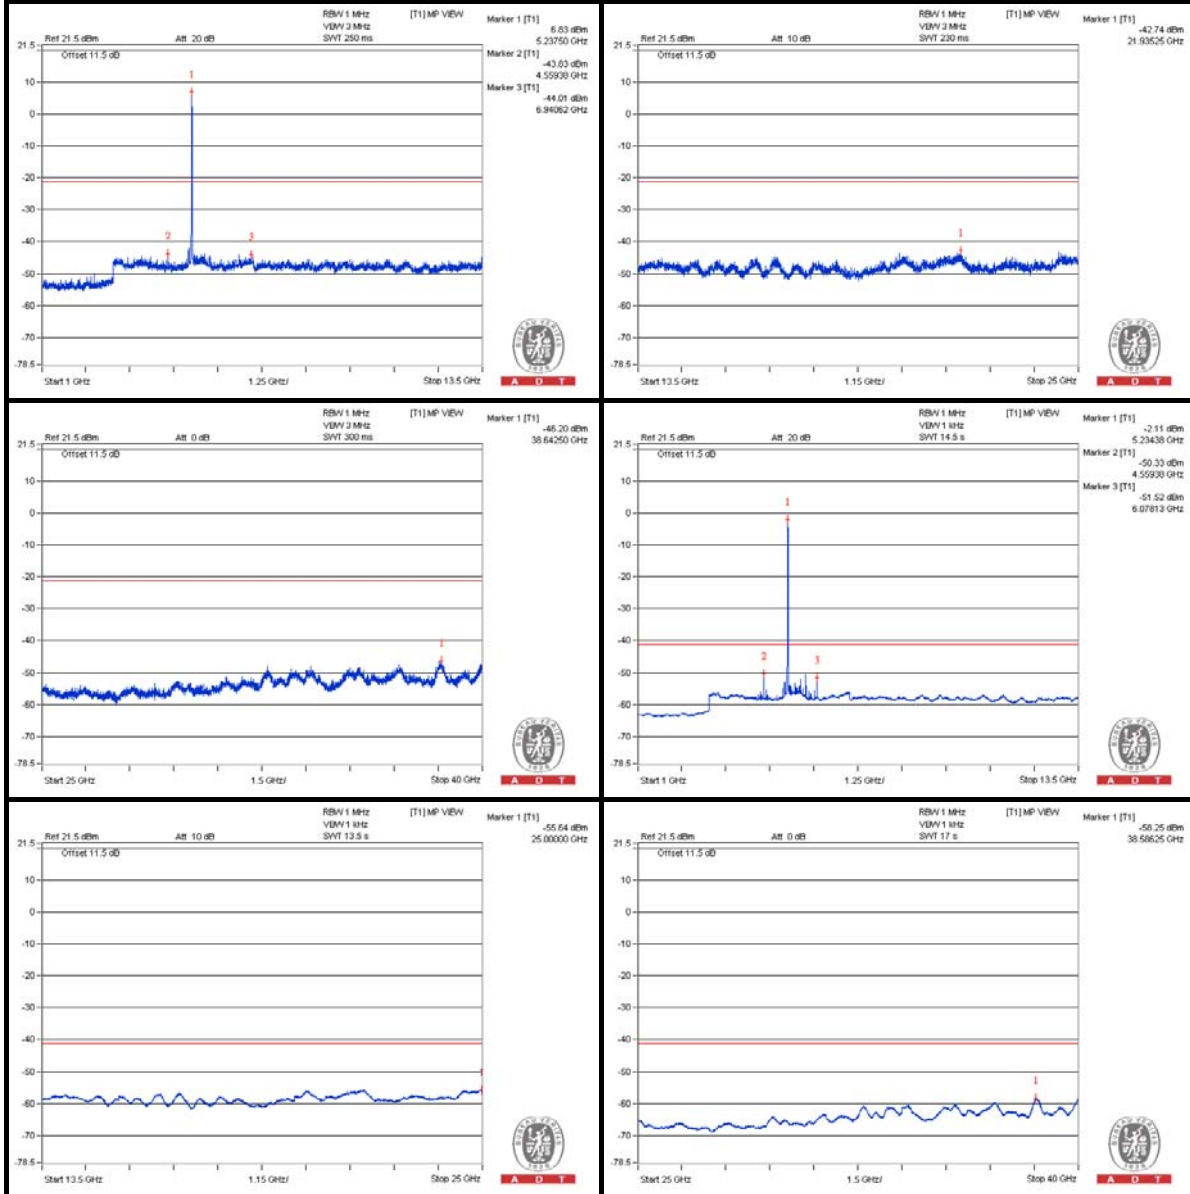



A D T

802.11n (HT20) – Channel 52

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3515.625 PK	58.83	74	-15.17	-46.63	-47.32	7.52	-36.43
2	3506.25 AV	48.55	54	-5.45	-56.76	-57.79	7.52	-46.71
3	7006.25 PK	60.17	74	-13.83	-44.75	-46.72	7.52	-35.09
4	7006.25 AV	48.67	54	-5.33	-57.07	-57.18	7.52	-46.59
5	10515.625 PK	63.48	74	-10.52	-42.47	-42.15	7.52	-31.78
6	10521.875 AV	51.31	54	-2.69	-55.22	-53.85	7.52	-43.95
7	15779.875 PK	57.76	74	-16.24	-48.72	-47.44	7.52	-37.5
8	15782.75 AV	47.36	54	-6.64	-58.92	-57.99	7.52	-47.9

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.



A D T


Chain (0)

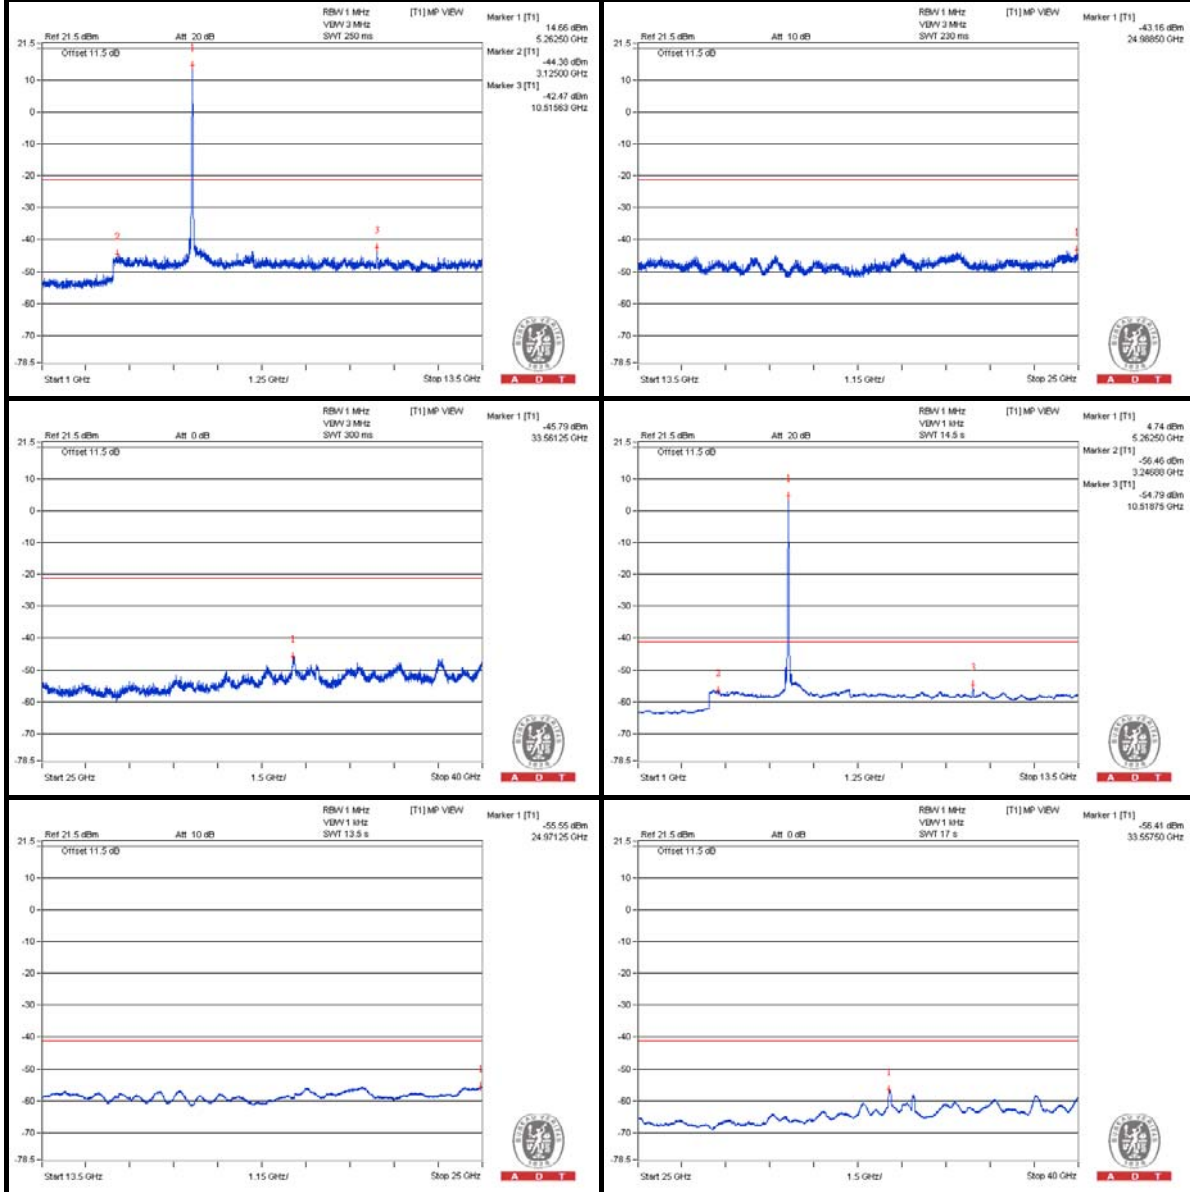



A D T

Chain (1)

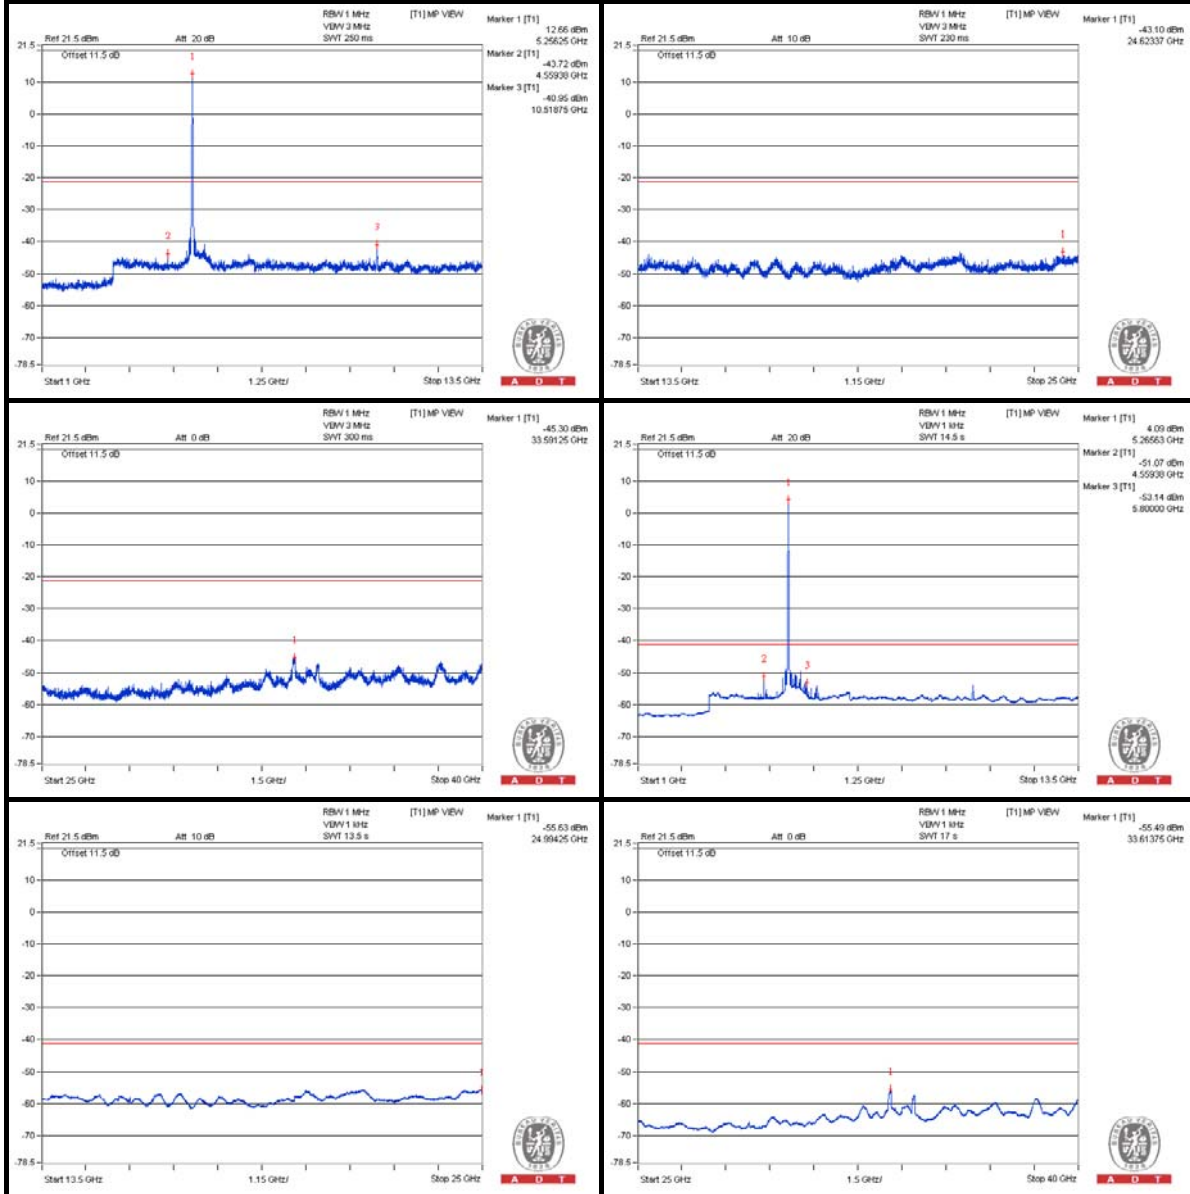



A D T

802.11n (HT20) – Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3540.625 PK	58.94	74	-15.06	-47.24	-46.5	7.52	-36.32
2	3531.25 AV	48.63	54	-5.37	-56.5	-57.95	7.52	-46.63
3	7065.625 PK	59.03	74	-14.97	-48.25	-45.66	7.52	-36.23
4	7068.75 AV	47.47	54	-6.53	-58.51	-58.13	7.52	-47.79
5	10596.875 PK	62.39	74	-11.61	-44.39	-42.6	7.52	-32.87
6	10600 AV	50.29	54	-3.71	-55.85	-55.17	7.52	-44.97
7	15894.875 PK	59.77	74	-14.23	-47.42	-44.97	7.52	-35.49
8	15897.75 AV	48.41	54	-5.59	-57.84	-56.97	7.52	-46.85

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

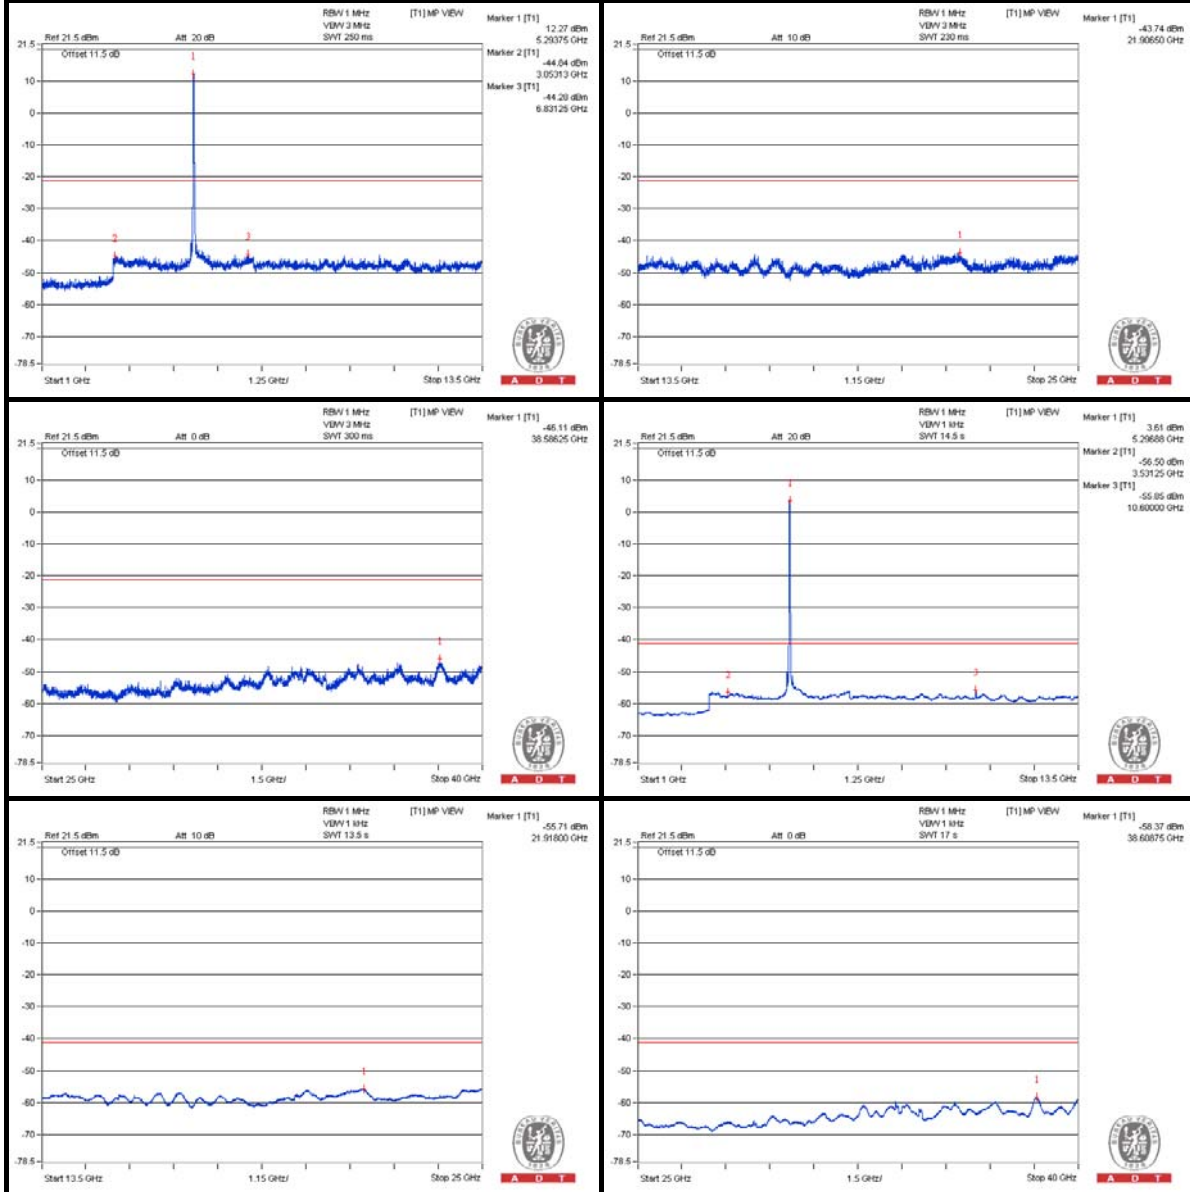

Chain (1)

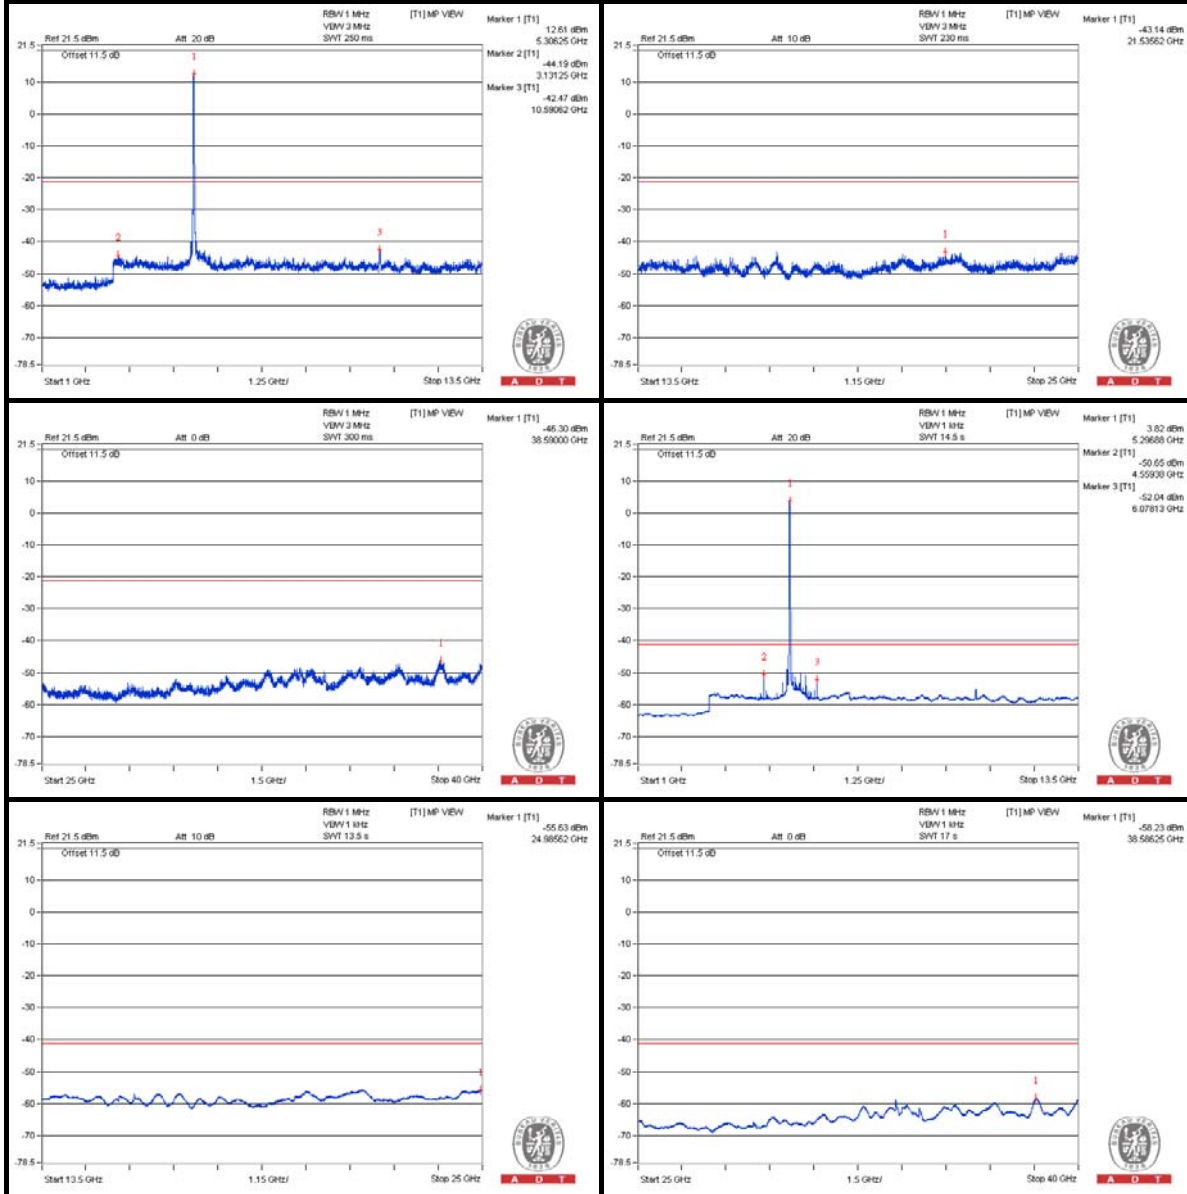

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5387.2 PK	64.91	74	-9.09	-41.1	-40.68	7.52	-30.35
2	5382 AV	52.38	54	-1.62	-53.46	-53.36	7.52	-42.88

Note :


$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

Chain (0)

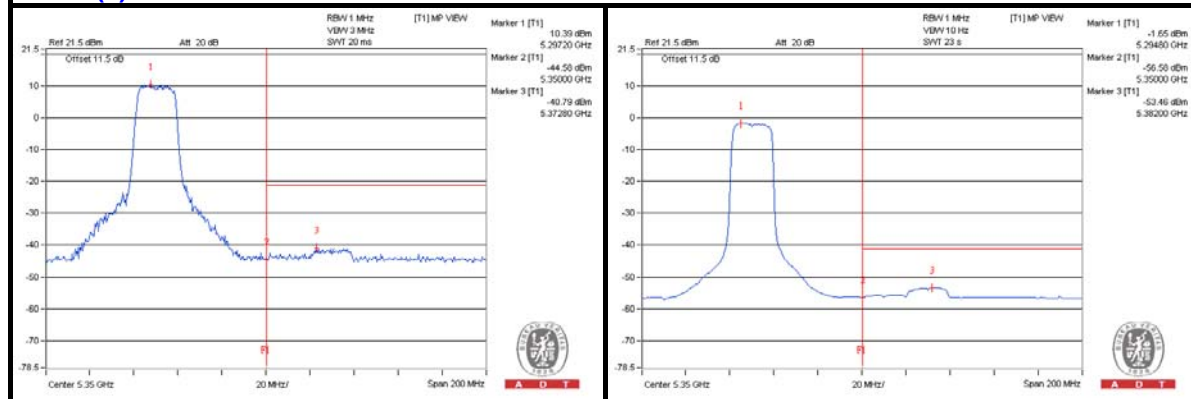

Chain (1)

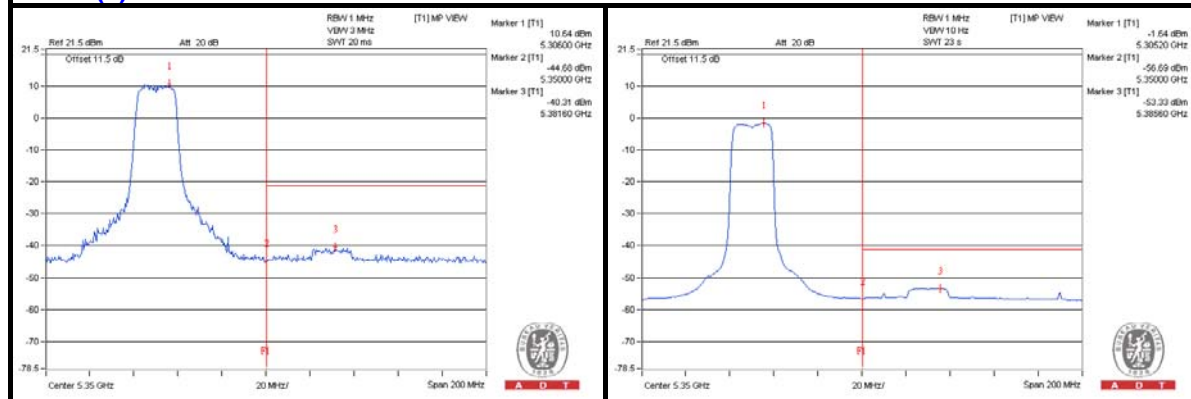



A D T

802.11n (HT20) – Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3556.25 PK	59.05	74	-14.95	-46.55	-46.94	7.52	-36.21
2	3546.875 AV	49.3	54	-4.7	-55.45	-57.87	7.52	-45.96
3	7100 PK	60.02	74	-13.98	-47.76	-44.41	7.52	-35.24
4	7093.75 AV	47.81	54	-6.19	-58.21	-57.76	7.52	-47.45
5	10634.375 PK	59.49	74	-14.51	-48.36	-44.91	7.52	-35.77
6	10640.625 AV	48.78	54	-5.22	-57.33	-56.71	7.52	-46.48
7	15966.75 PK	58.56	74	-15.44	-47.08	-47.38	7.52	-36.7
8	15952.375 AV	47.55	54	-6.45	-58.17	-58.32	7.52	-47.71

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

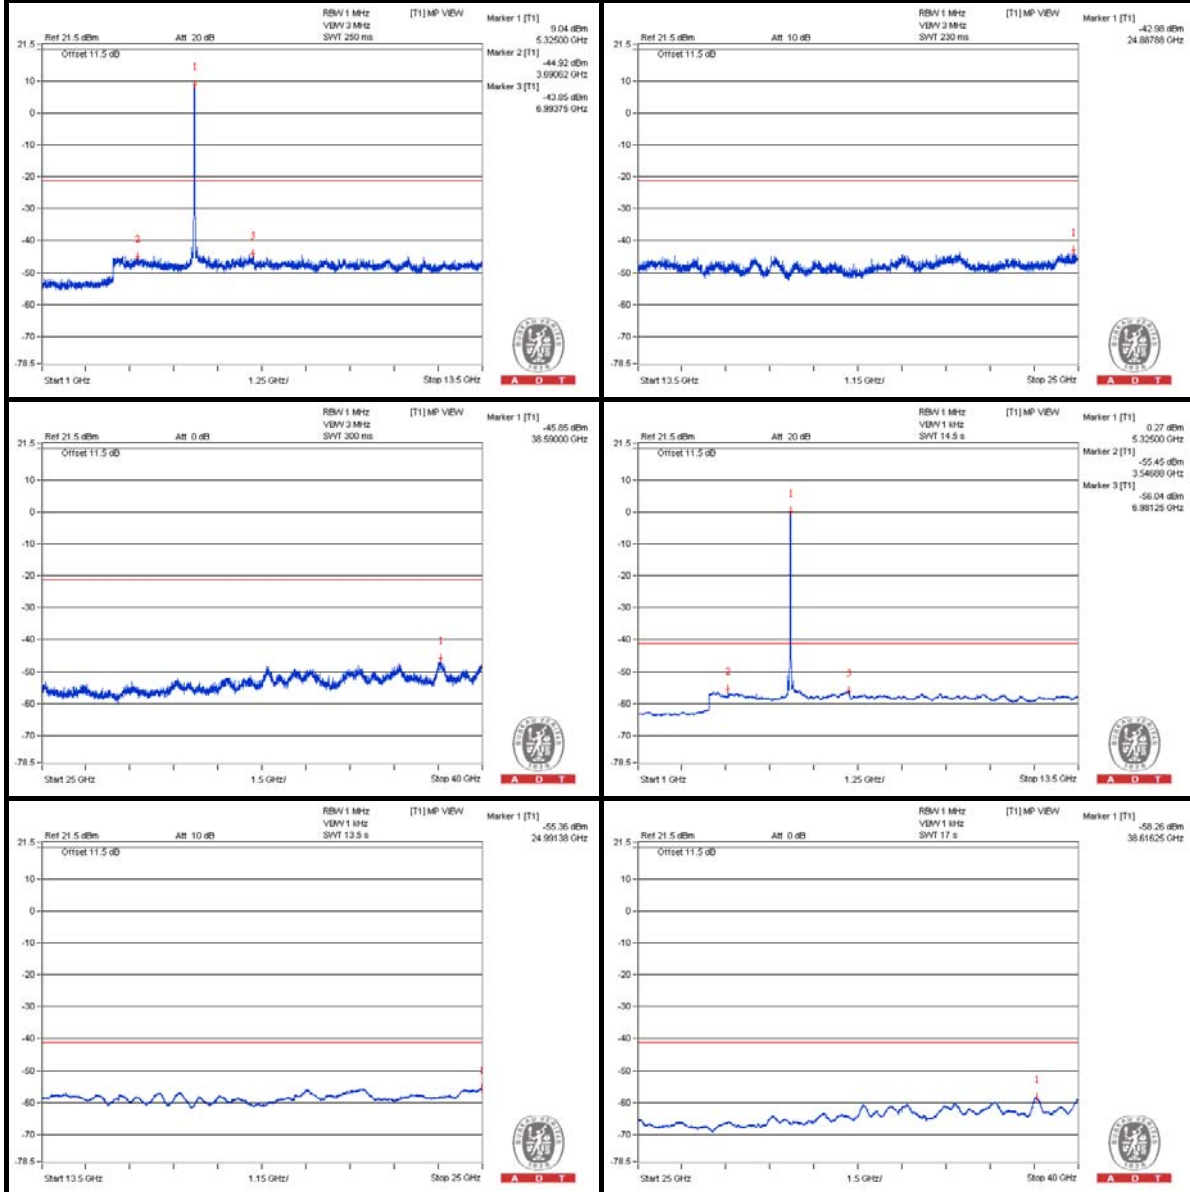

Chain (1)

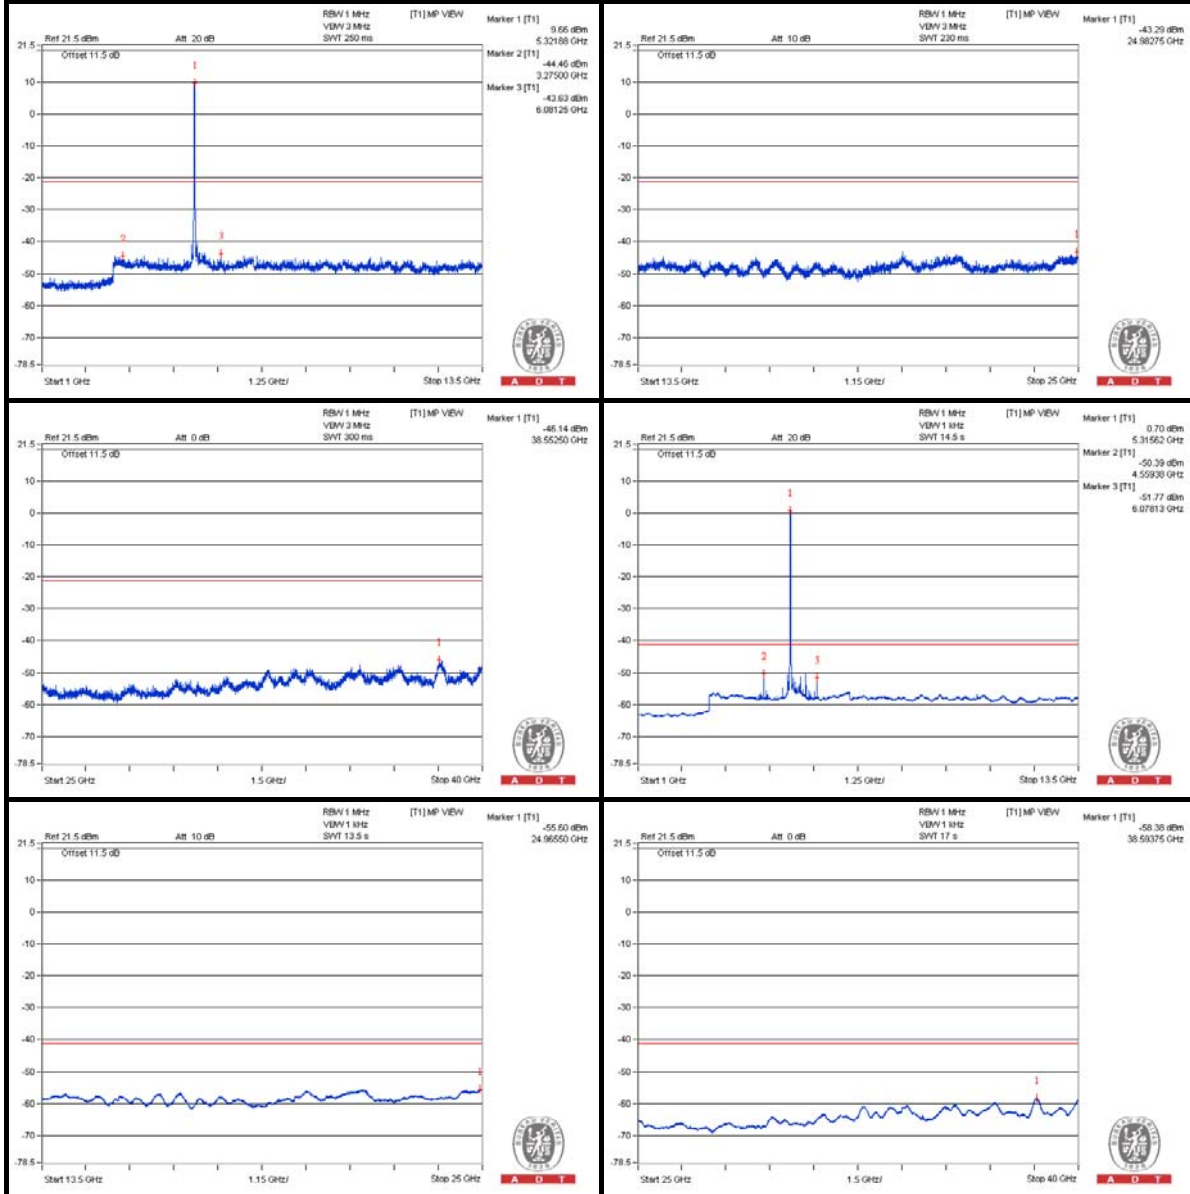


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350 PK	68.86	74	-5.14	-35.96	-38.18	7.52	-26.4
2	5396 AV	52.37	54	-1.63	-53.5	-53.35	7.52	-42.89


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

Chain (0)

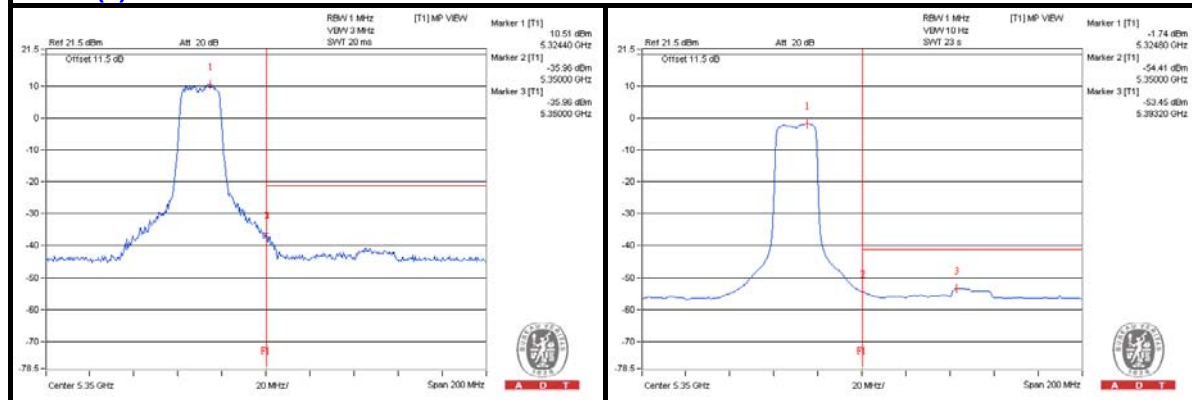

Chain (1)

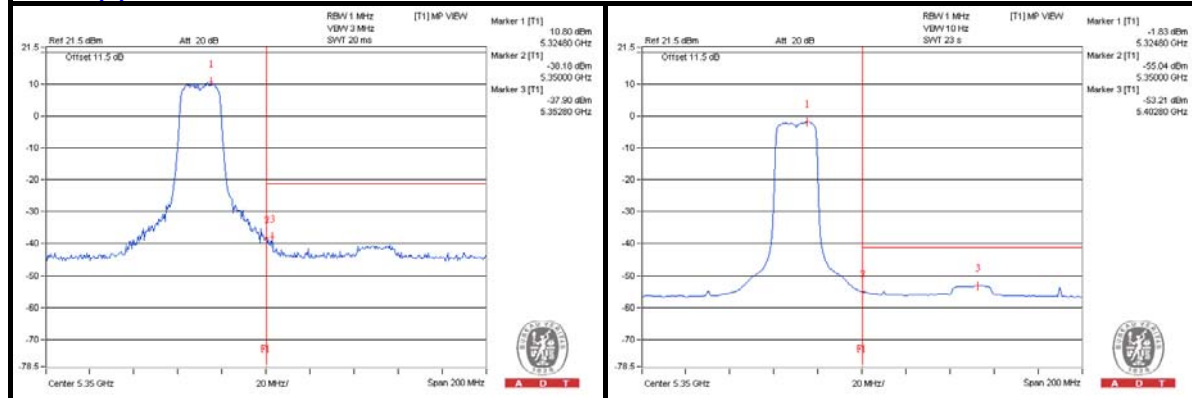



A D T


802.11n (HT20) – Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3665.625 PK	62.11	74	-11.89	-43.78	-44.55	7.99	-33.15
2	3665.625 AV	52.68	54	-1.32	-52.57	-54.9	7.99	-42.58
3	7337.5 PK	59.88	74	-14.12	-45.83	-47.01	7.99	-35.38
4	7334.375 AV	49.13	54	-4.87	-56.69	-57.62	7.99	-46.13
5	11009.375 PK	59.6	74	-14.4	-47.1	-46.27	7.99	-35.66
6	11000 AV	48.42	54	-5.58	-57.74	-57.95	7.99	-46.84
7	16495.75 PK	60.9	74	-13.1	-46.13	-44.7	7.99	-34.36
8	16495.75 AV	48.96	54	-5.04	-57.36	-57.24	7.99	-46.3

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

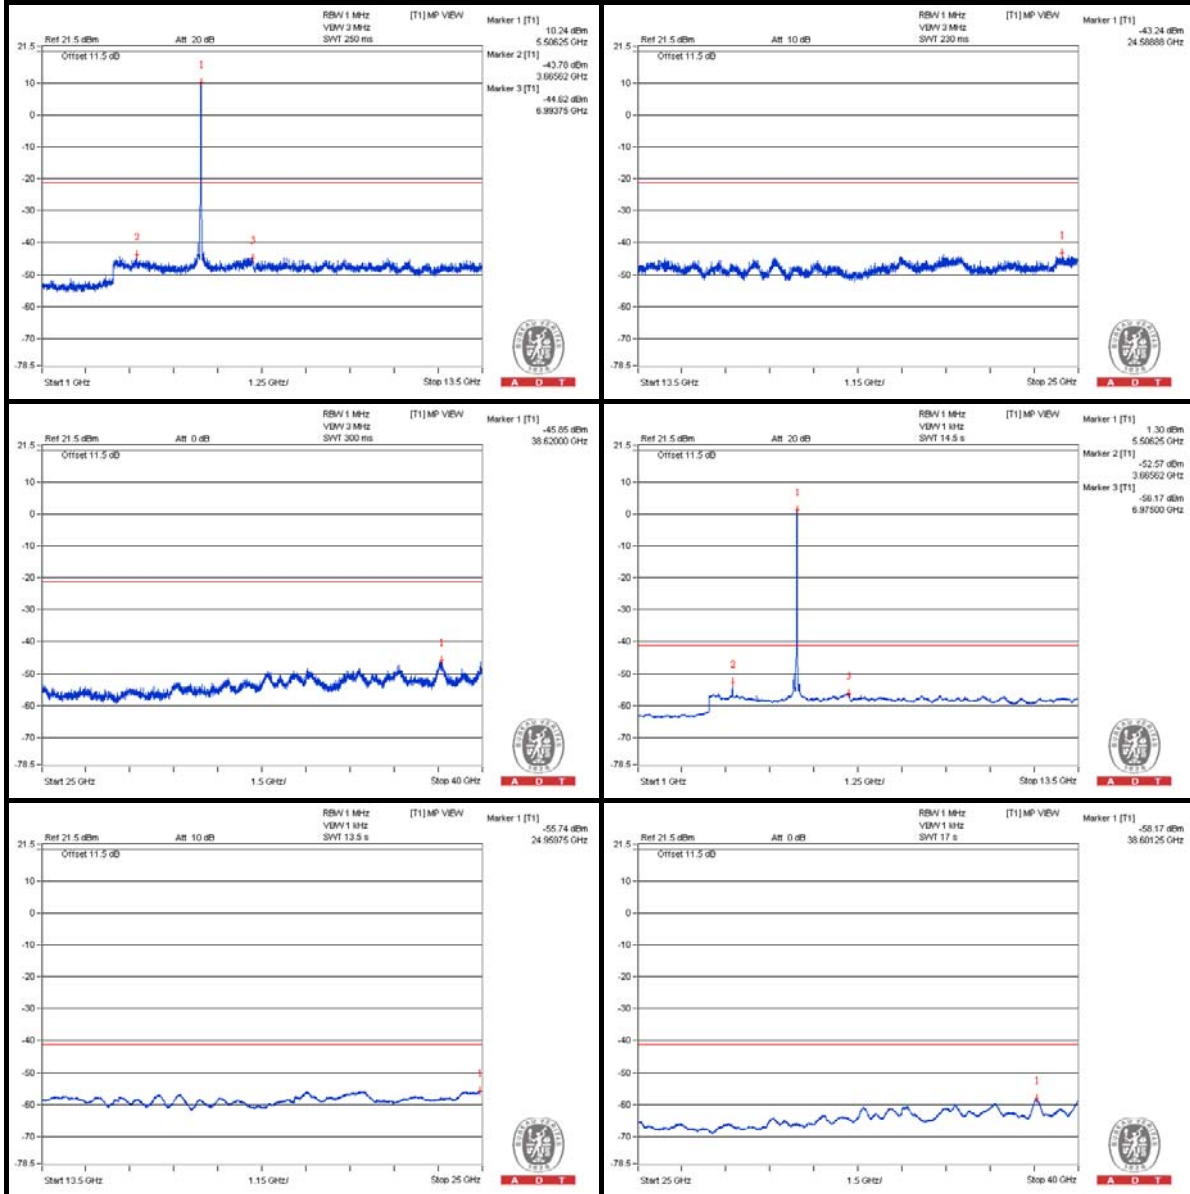Chain (0)

Chain (1)

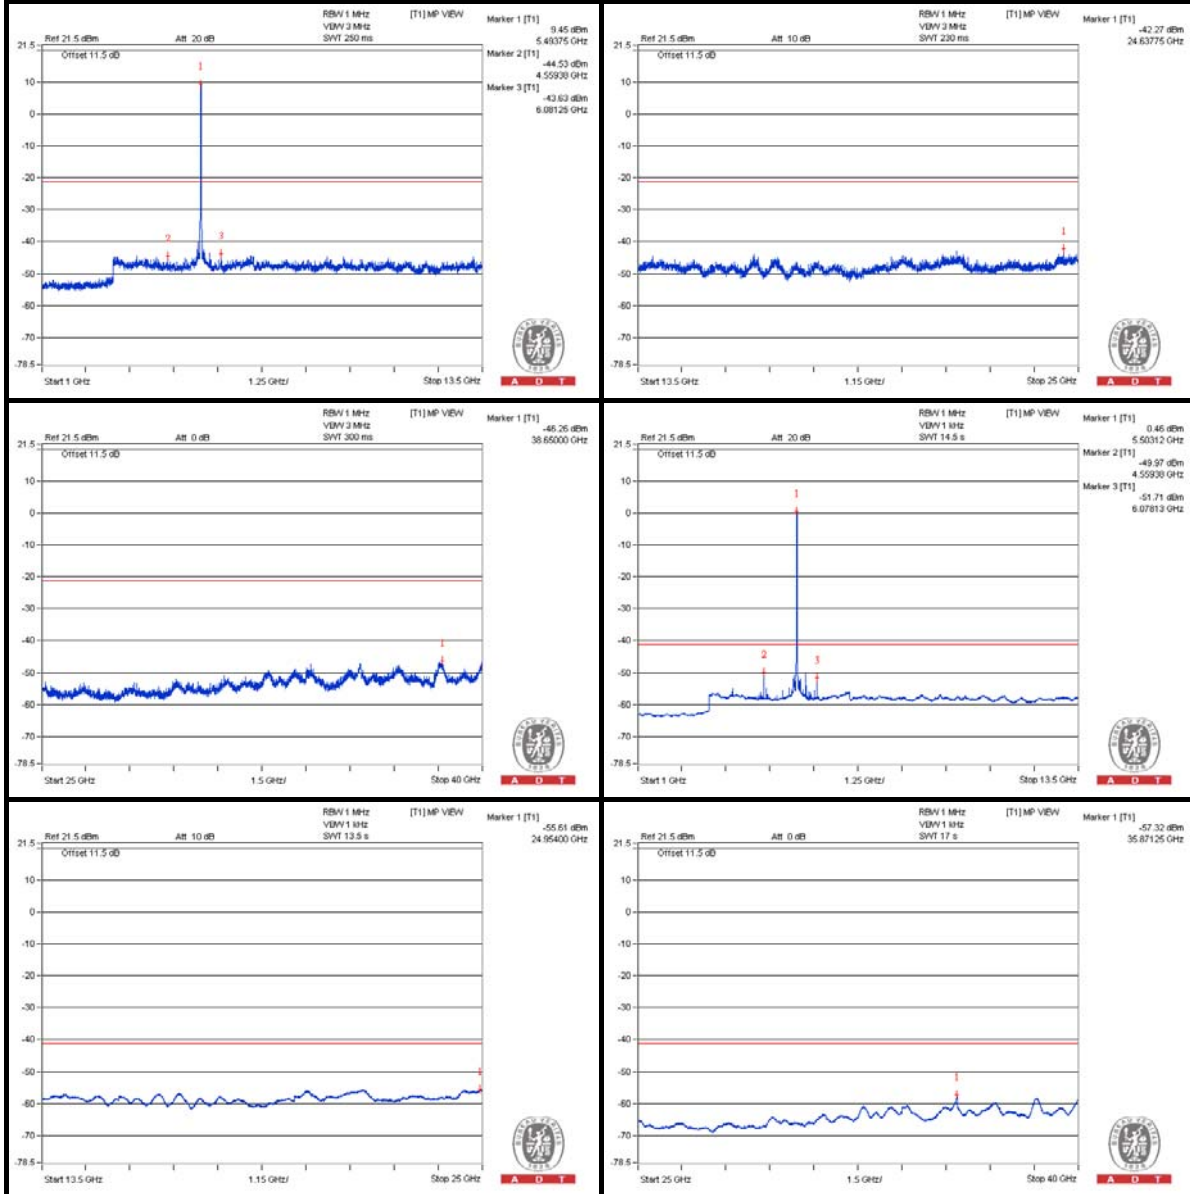


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5416.5 PK	65.79	74	-8.21	-40.02	-40.97	7.99	-29.47
2	5416 AV	53.26	54	-0.74	-52.72	-53.31	7.99	-42


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

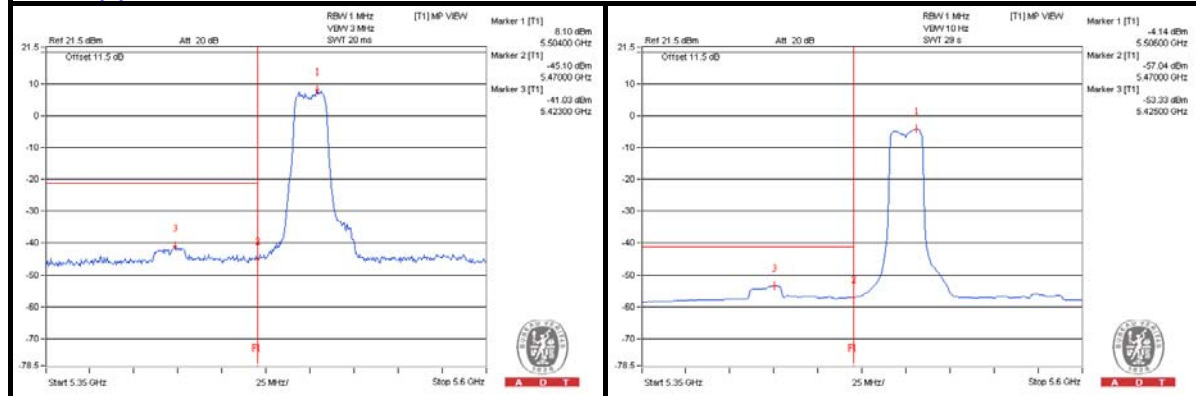

Chain (1)

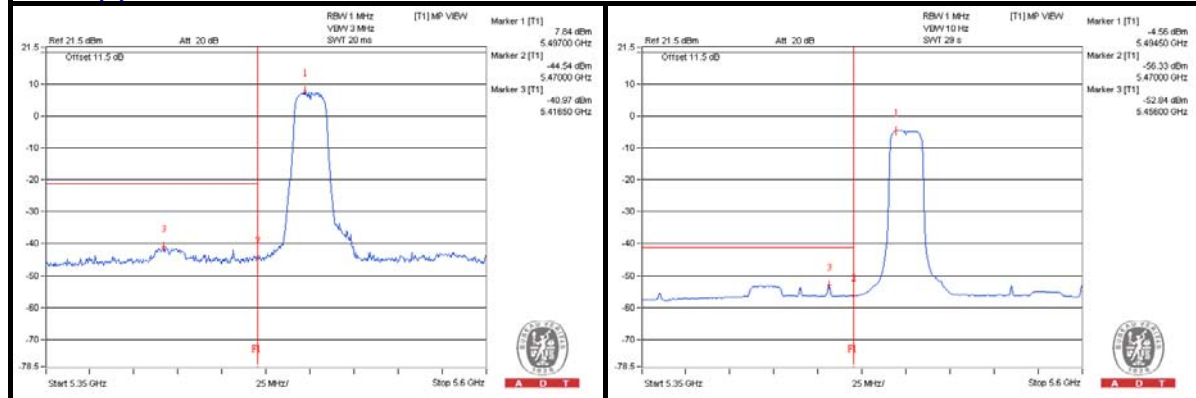



A D T

802.11n (HT20) – Channel 116

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3718.75 PK	60.83	74	-13.17	-44.11	-47.33	7.99	-34.43
2	3718.75 AV	53.42	54	-0.58	-51.19	-55.55	7.99	-41.84
3	7437.5 PK	59.69	74	-14.31	-46.09	-47.1	7.99	-35.57
4	7440.625 AV	50.69	54	-3.31	-54.49	-57	7.99	-44.57
5	11159.375 PK	64.93	74	-9.07	-38.96	-46.94	7.99	-30.33
6	11159.375 AV	52.43	54	-1.57	-51.85	-57.58	7.99	-42.83
7	16743 PK	59.74	74	-14.26	-49.79	-44.68	7.99	-35.52
8	16737.25 AV	48.9	54	-5.1	-59.61	-55.89	7.99	-46.36

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

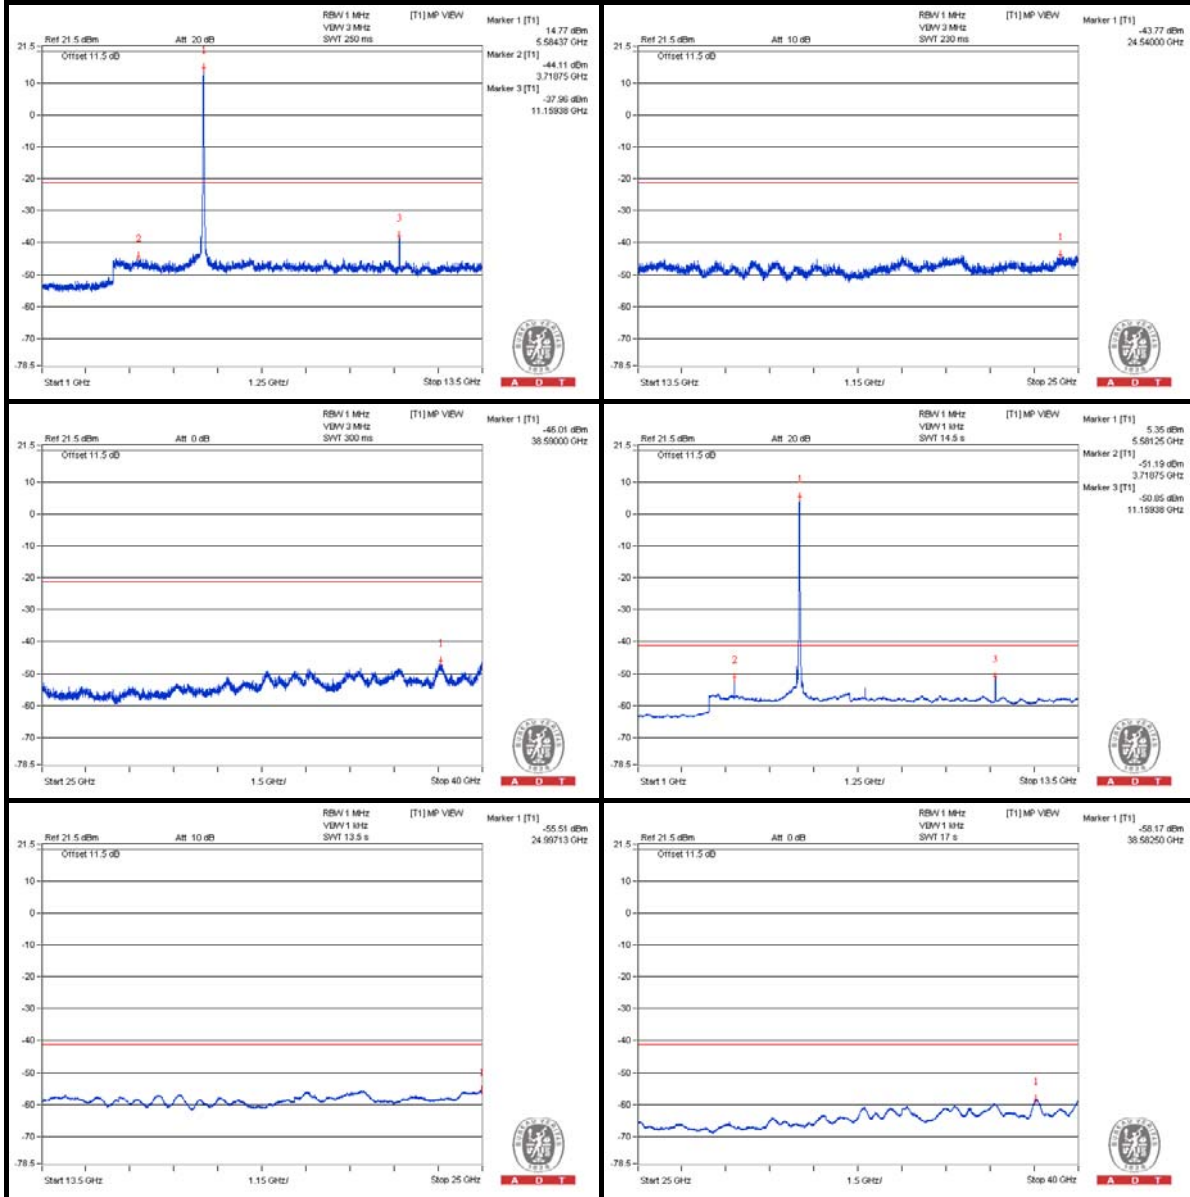

Chain (1)

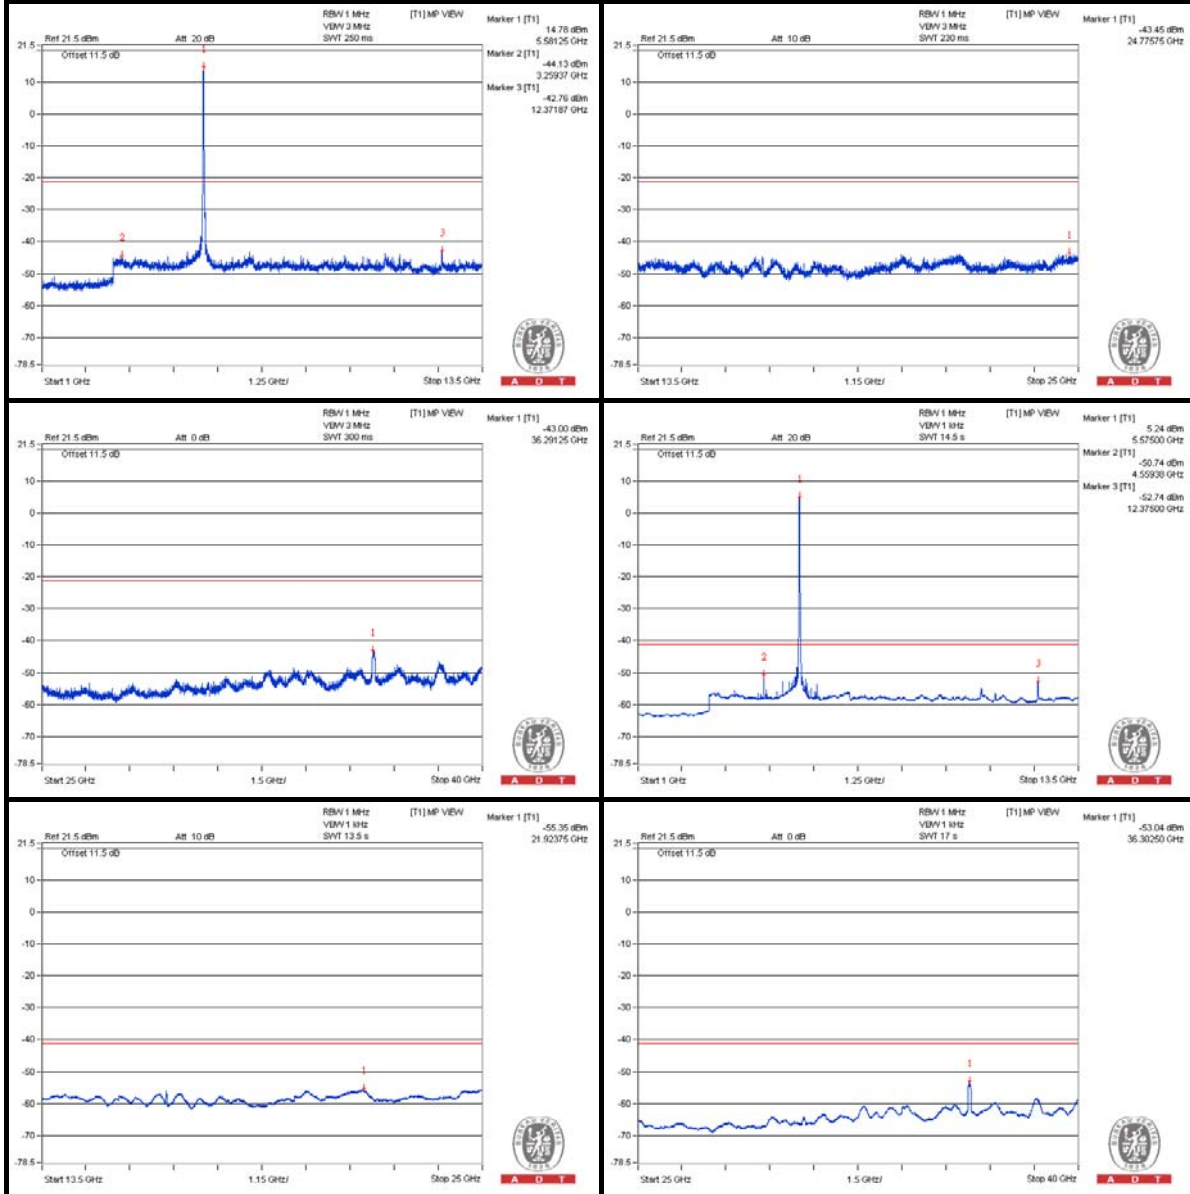

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5456.5 PK	65.19	74	-8.81	-40.6	-40.6	7.52	-30.07
2	5456 AV	55.25	54	* 1.25	-50.54	-50.54	7.52	-40.01


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer APPENDIX A)

Chain (0)

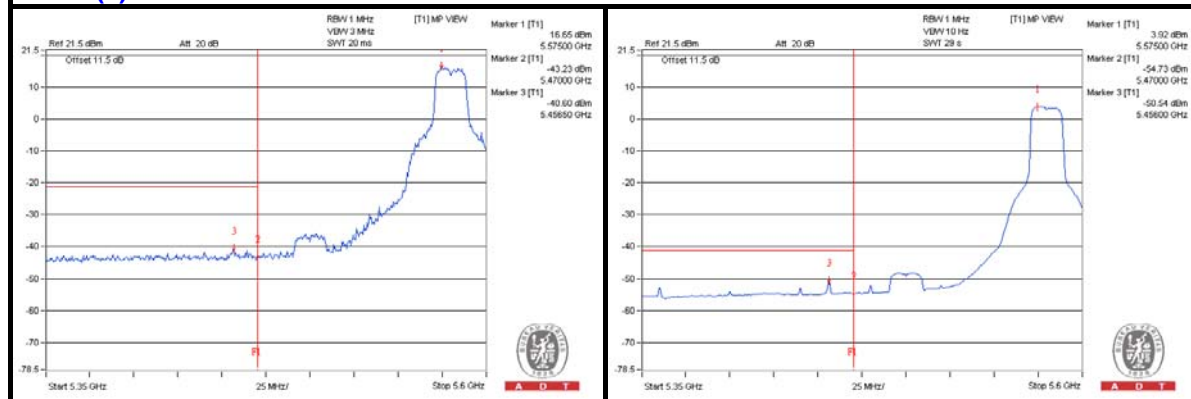

Chain (1)

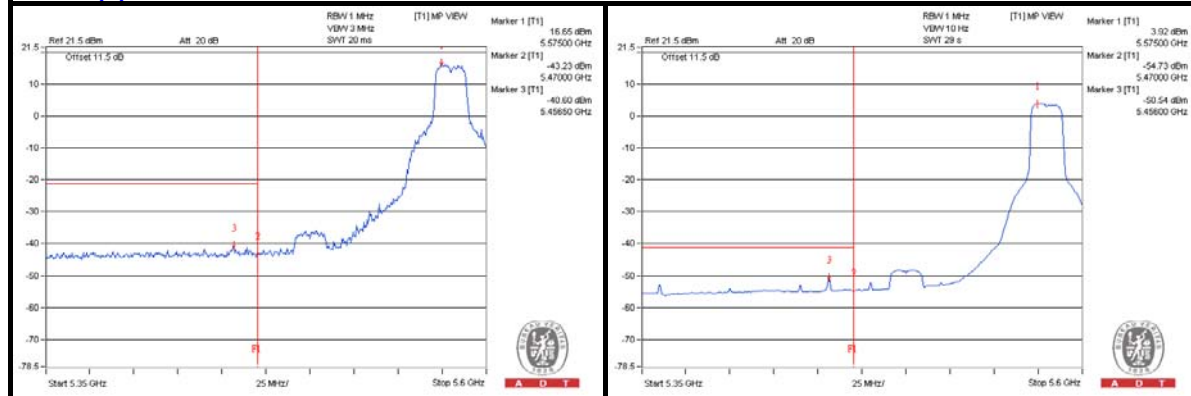



A D T

802.11n (HT20) – Channel 132

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3771.875 PK	62.68	74	-11.32	-42.69	-44.69	7.99	-32.58
2	3771.875 AV	56.21	54	* 2.21	-47.66	-55.77	7.99	-39.05
3	7540.625 PK	59.4	74	-14.6	-46.78	-46.95	7.99	-35.86
4	7546.875 AV	52.01	54	-1.99	-52.8	-56.43	7.99	-43.25
5	11318.75 PK	63.69	74	-10.31	-40.96	-45.17	7.99	-31.57
6	11321.875 AV	52.28	54	-1.72	-52.91	-55.39	7.99	-42.98
7	16984.5 PK	60.98	74	-13.02	-46.17	-44.54	7.99	-34.28
8	16984.5 AV	50.06	54	-3.94	-57.68	-55.1	7.99	-45.2

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX A)




A D T

Chain (0)

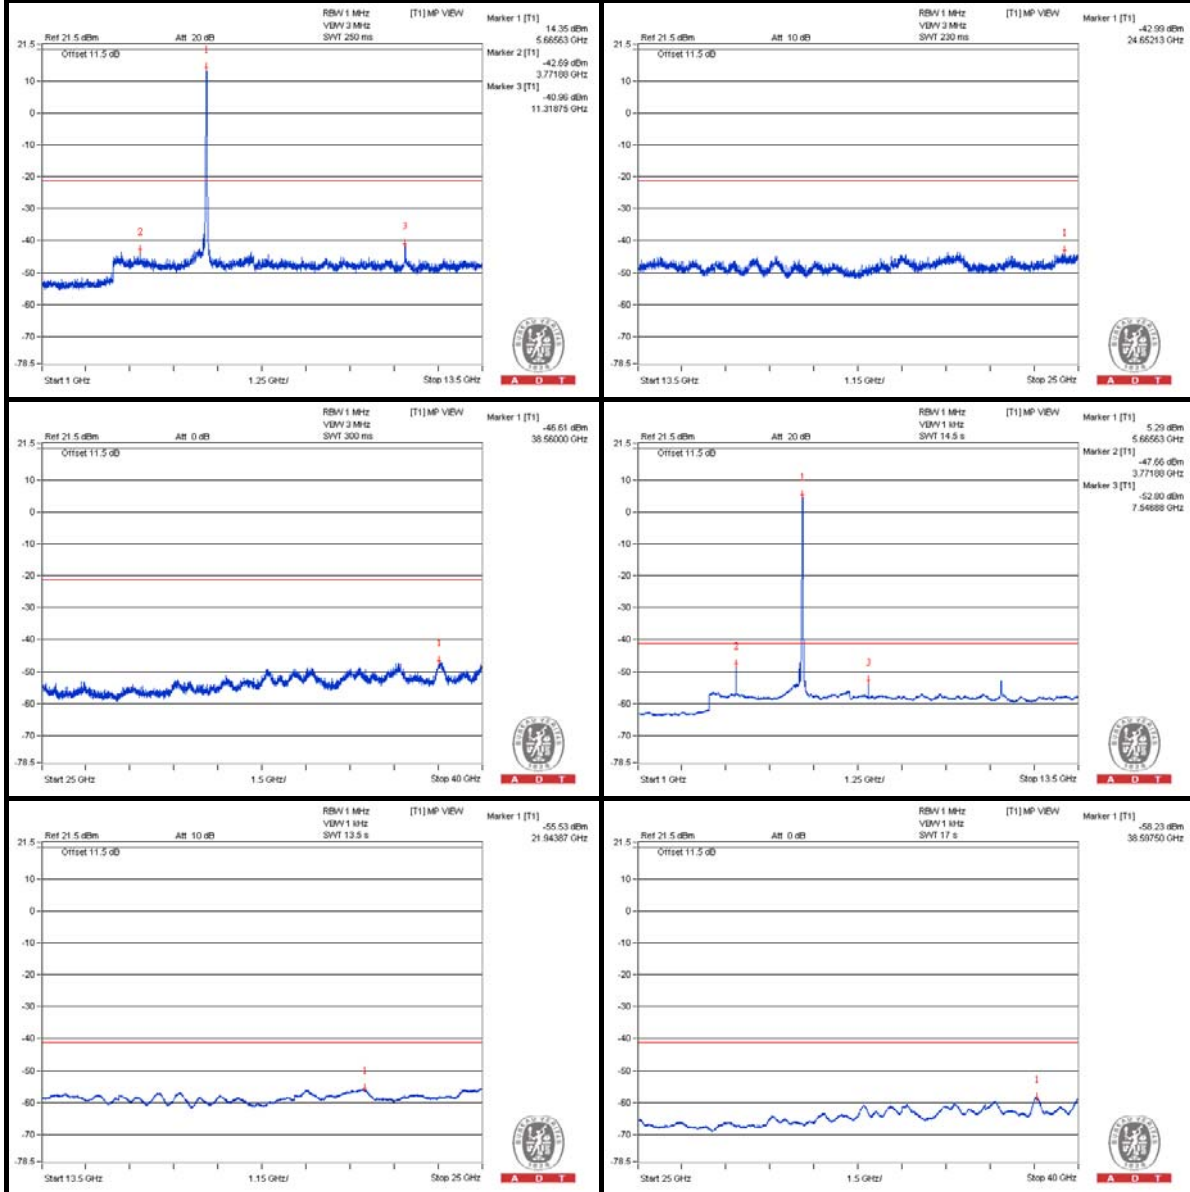

Chain (1)

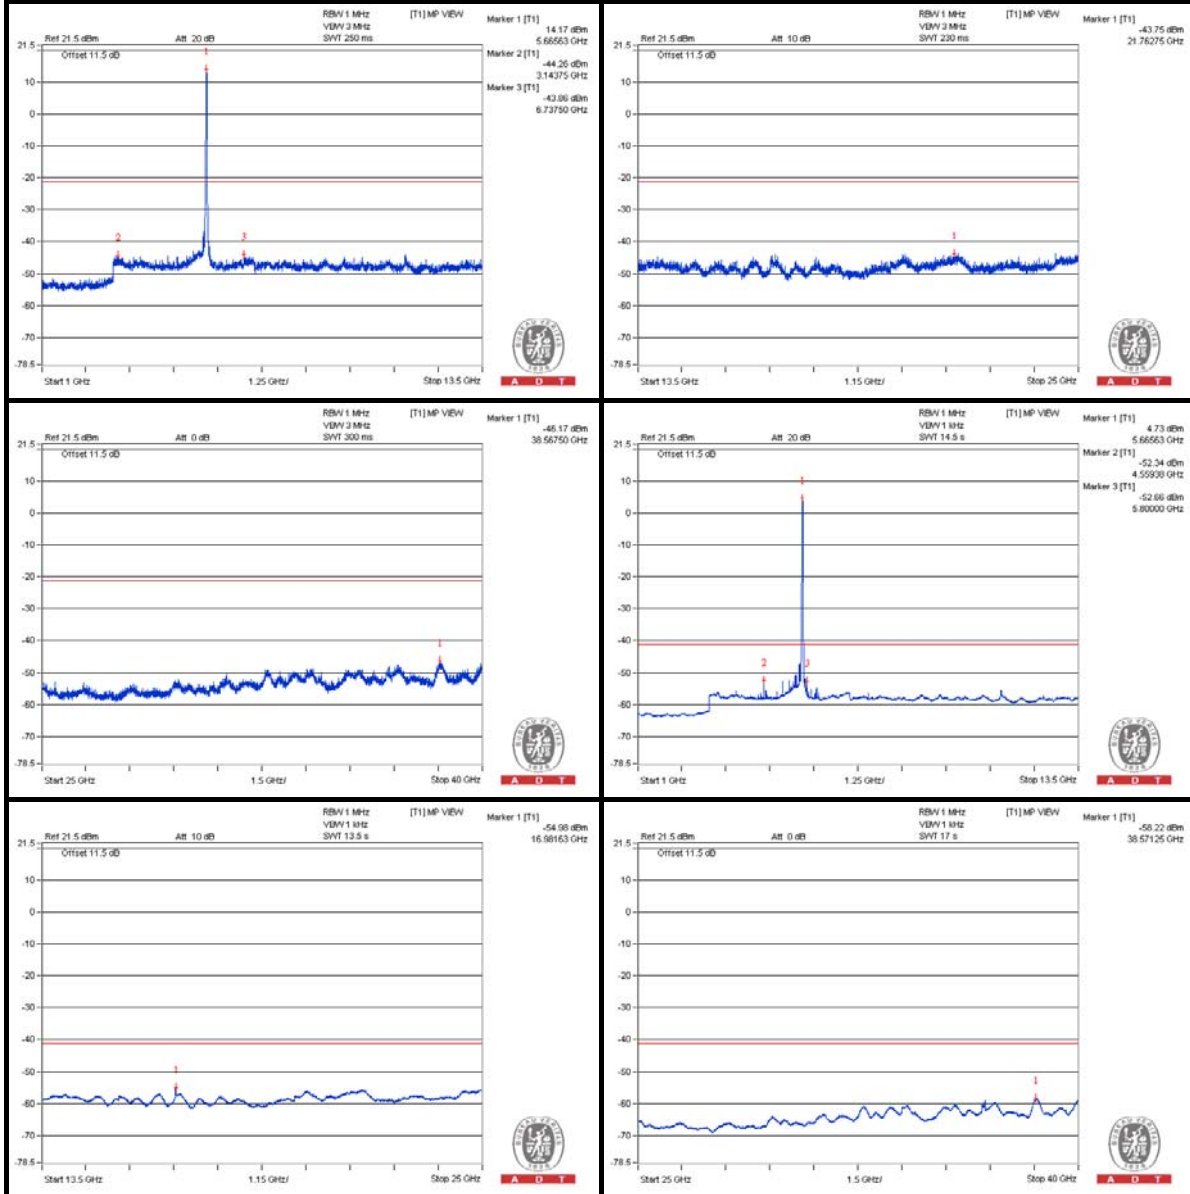


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5743 PK	65.56	74	-8.44	-40.41	-40.06	7.52	-29.7
2	5745.4 AV	52.83	54	-1.17	-53.34	-52.62	7.52	-42.43


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

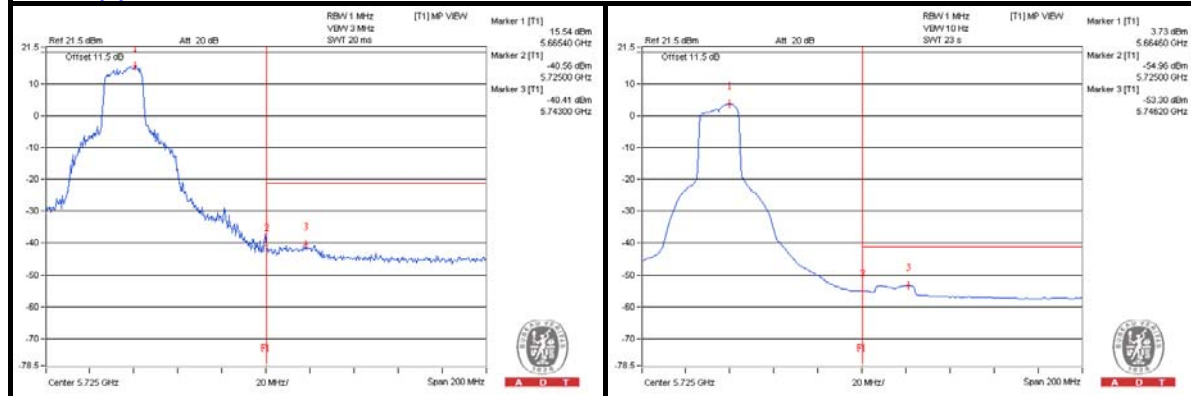

Chain (1)

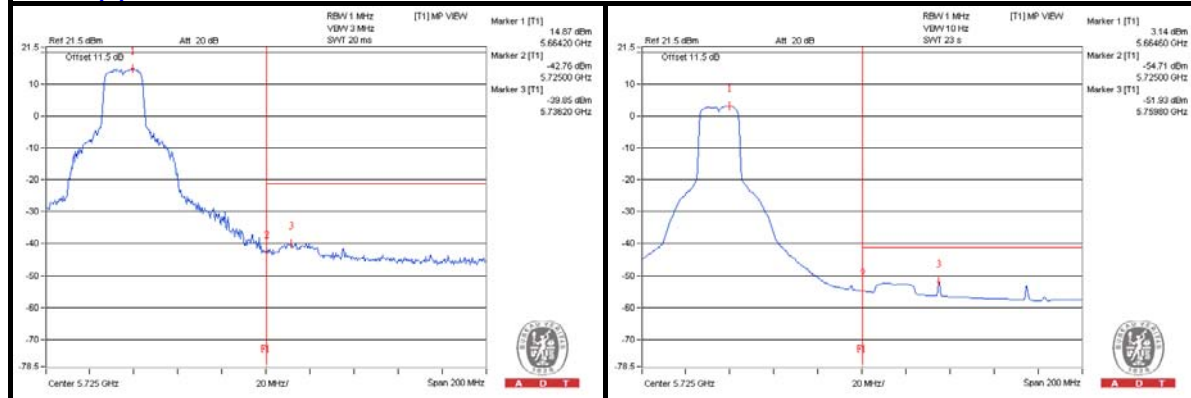



A D T

802.11n (HT20) – Channel 140

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3800 PK	63.11	74	-10.89	-41.48	-45.9	7.99	-32.15
2	3800 AV	58.13	54	* 4.13	-45.55	-55.42	7.99	-37.13
3	7600 PK	59.13	74	-14.87	-46.67	-47.65	7.99	-36.13
4	7600 AV	49.9	54	-4.1	-56	-56.75	7.99	-45.36
5	11409.375 PK	59.9	74	-14.1	-46.69	-46.05	7.99	-35.36
6	11396.875 AV	49.16	54	-4.84	-57.22	-56.98	7.99	-46.1
7	17099.5 PK	60.64	74	-13.36	-45.42	-45.84	7.99	-34.62
8	17099.5 AV	49.56	54	-4.44	-56.97	-56.45	7.99	-45.7

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX A)




A D T

Chain (0)

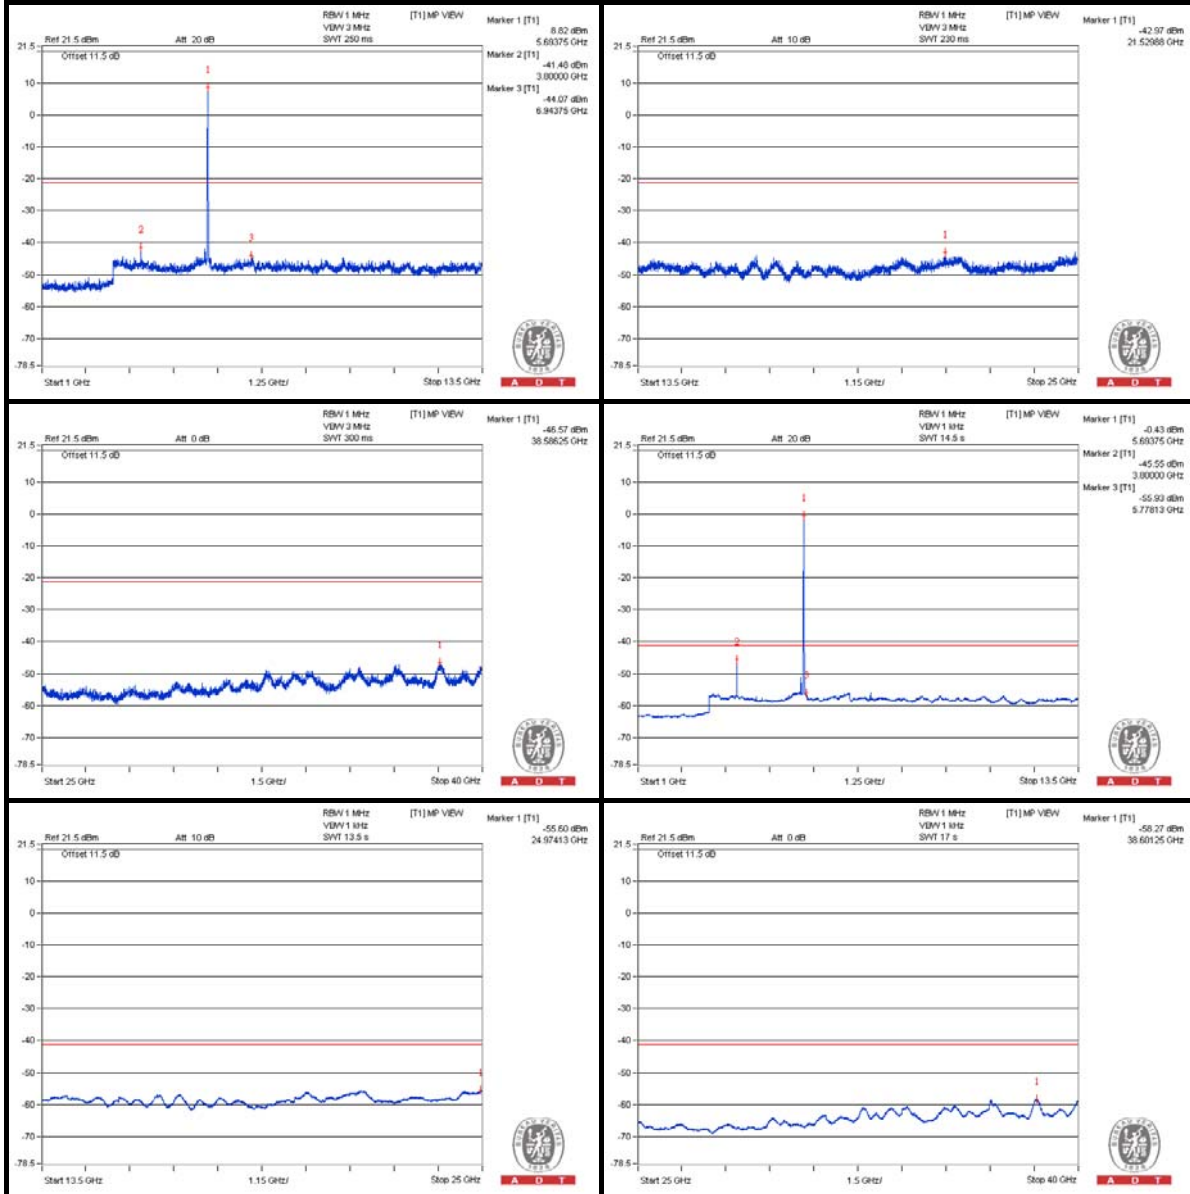

Chain (1)

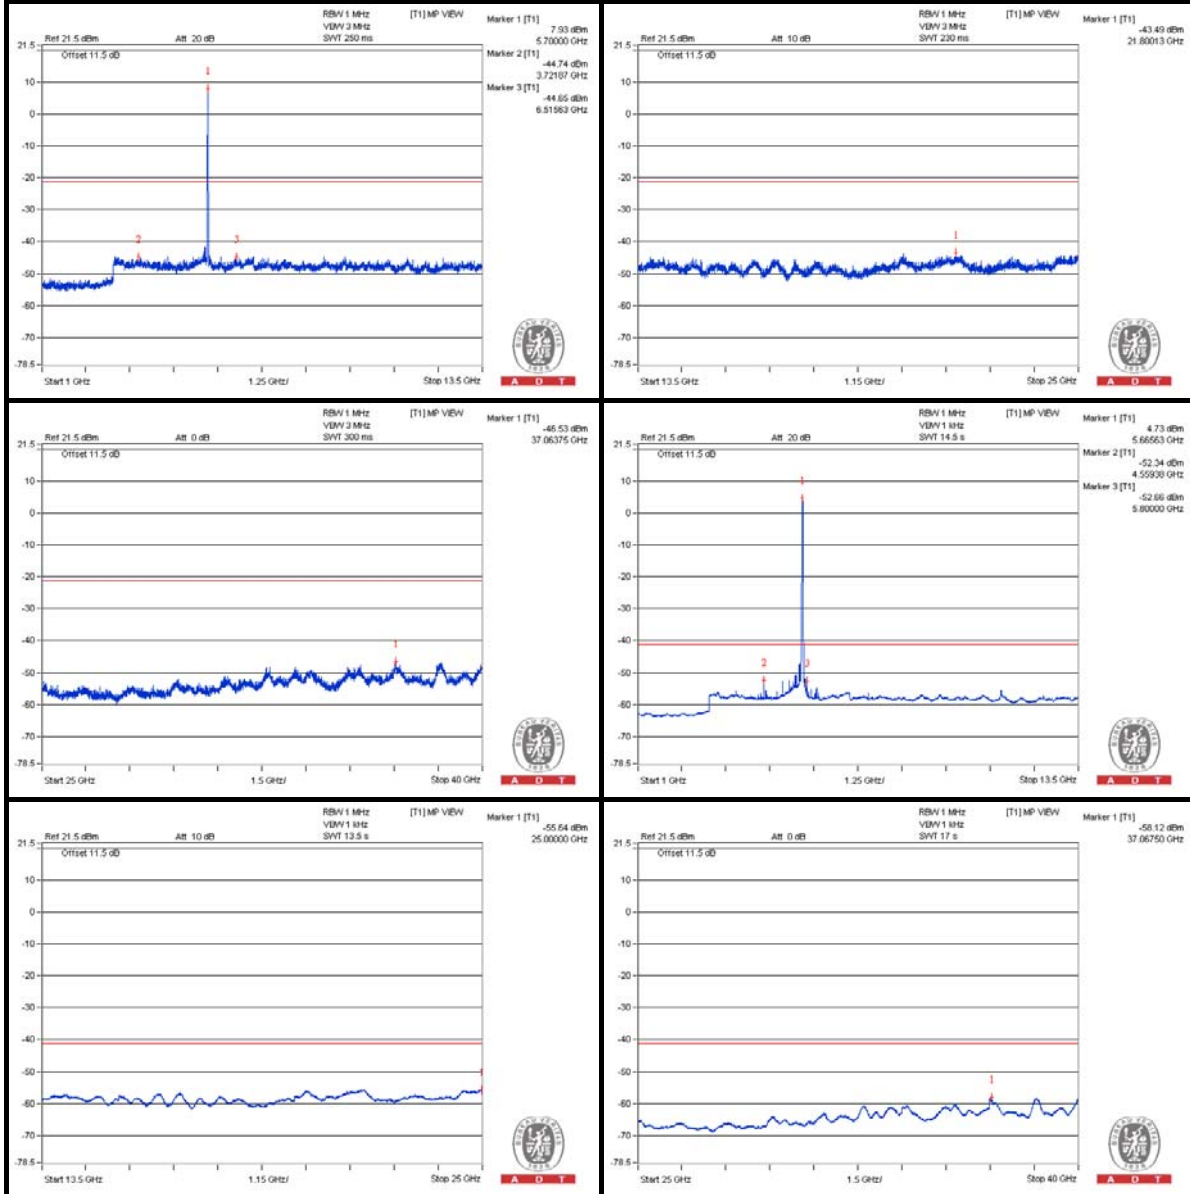


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725 PK	65.56	74	-8.44	-39.88	-41.7	7.99	-29.7
2	5760.2 AV	53.17	54	-0.83	-57.34	-50.98	7.99	-42.09


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

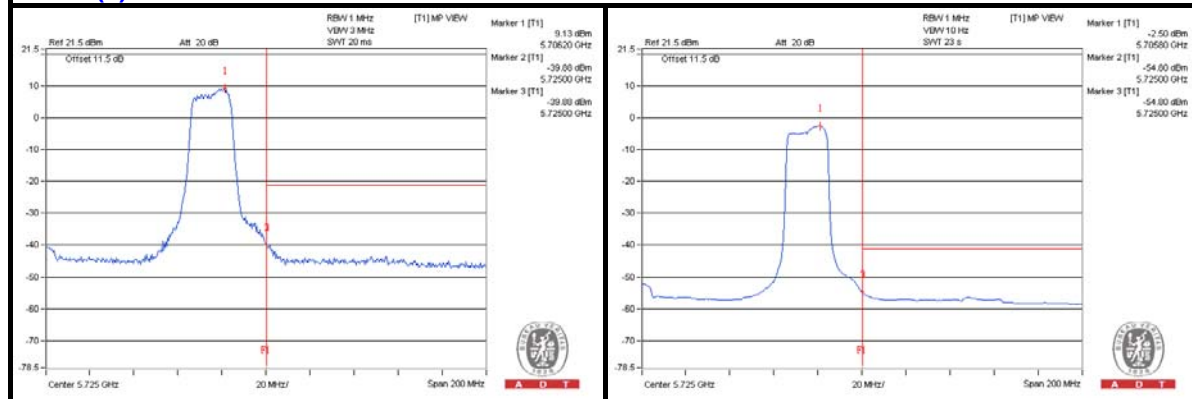

Chain (1)

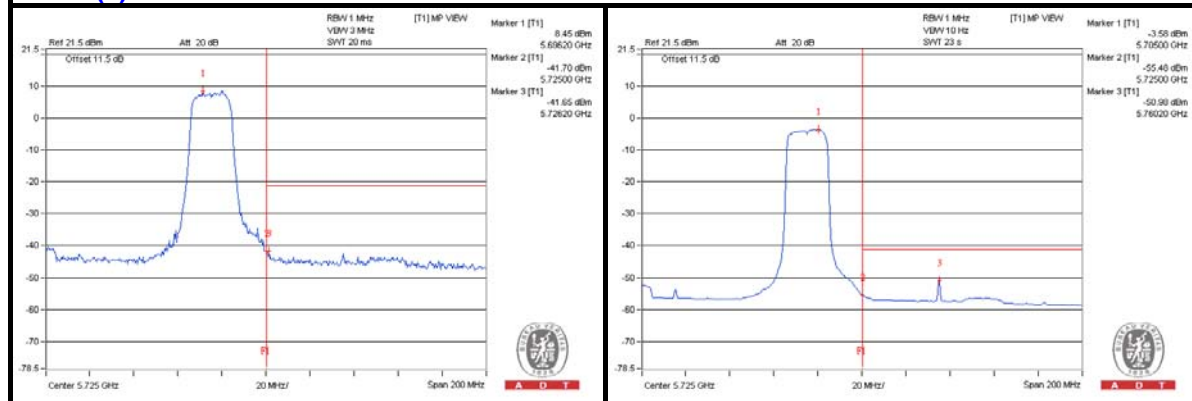



A D T

802.11n (HT40) – Channel 38

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3456.25 PK	58.78	74	-15.22	-46.6	-47.26	7.43	-36.48
2	3459.375 AV	48.71	54	-5.29	-56.28	-57.84	7.43	-46.55
3	6915.625 PK	60.23	74	-13.77	-44.7	-46.4	7.43	-35.03
4	6918.75 AV	49.6	54	-4.4	-55.98	-56.22	7.43	-45.66
5	10378.125 PK	58.51	74	-15.49	-47.24	-47.14	7.43	-36.75
6	10378.125 AV	47.81	54	-6.19	-57.99	-57.79	7.43	-47.45
7	15564.25 PK	57.89	74	-16.11	-47.93	-47.69	7.43	-37.37
8	15572.875 AV	47.77	54	-6.23	-57.79	-58.08	7.43	-47.49

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

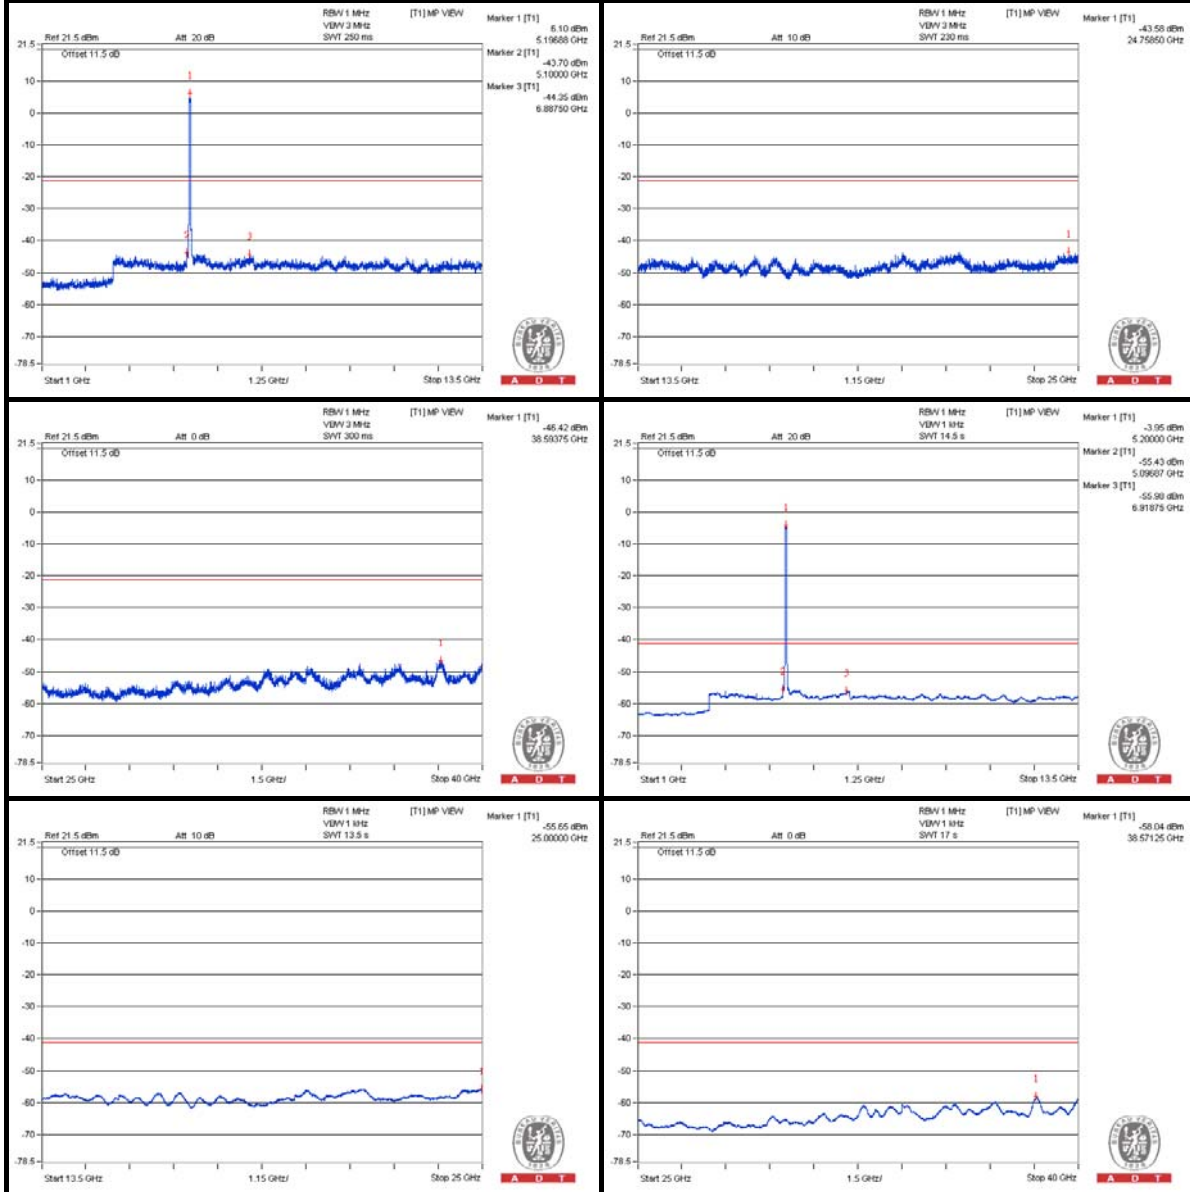

Chain (1)

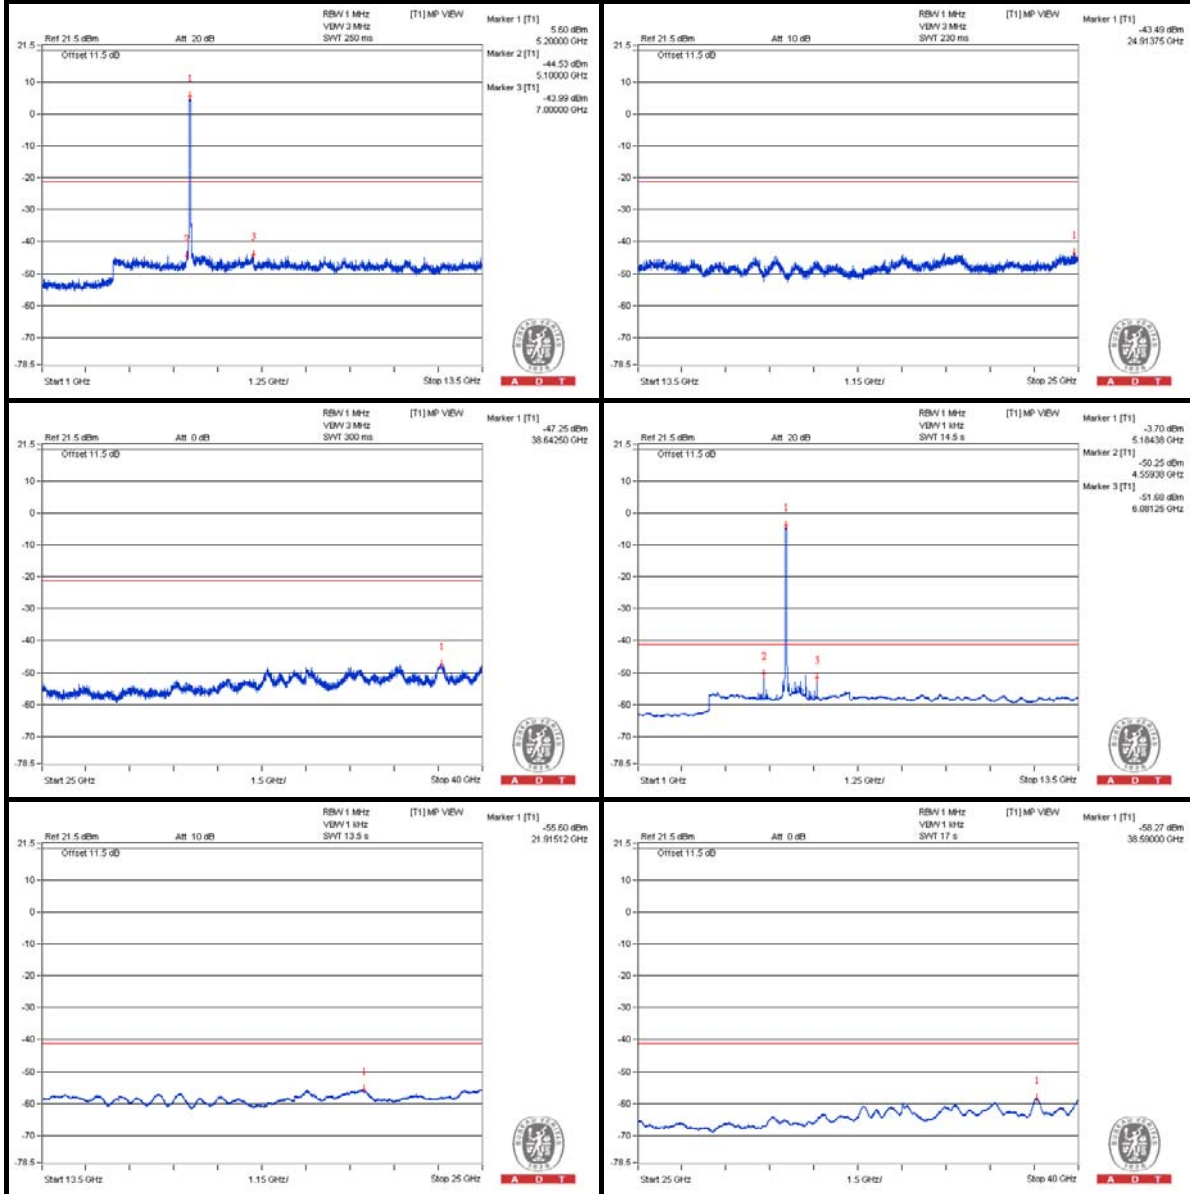



Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5150 PK	67.82	74	-6.18	-36.79	-39.33	7.43	-27.44
2	5150 AV	52.33	54	-1.67	-52.38	-54.66	7.43	-42.93

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

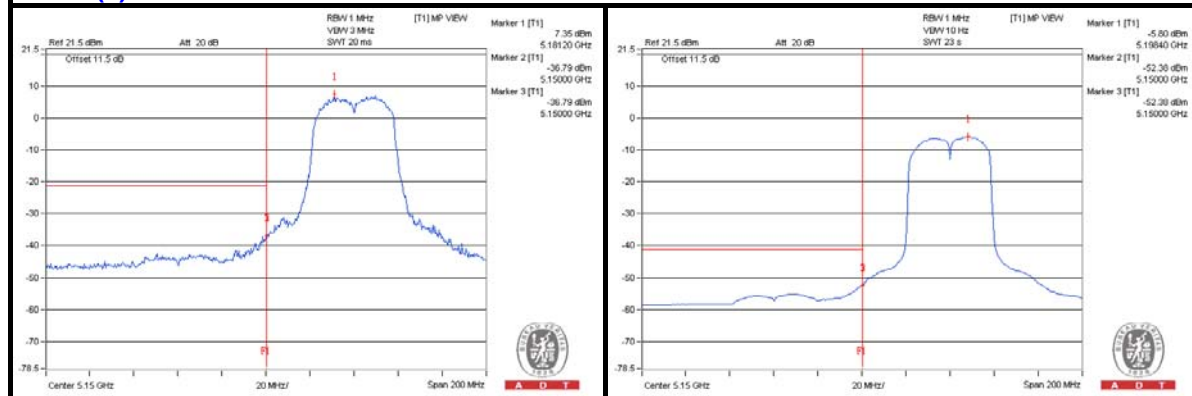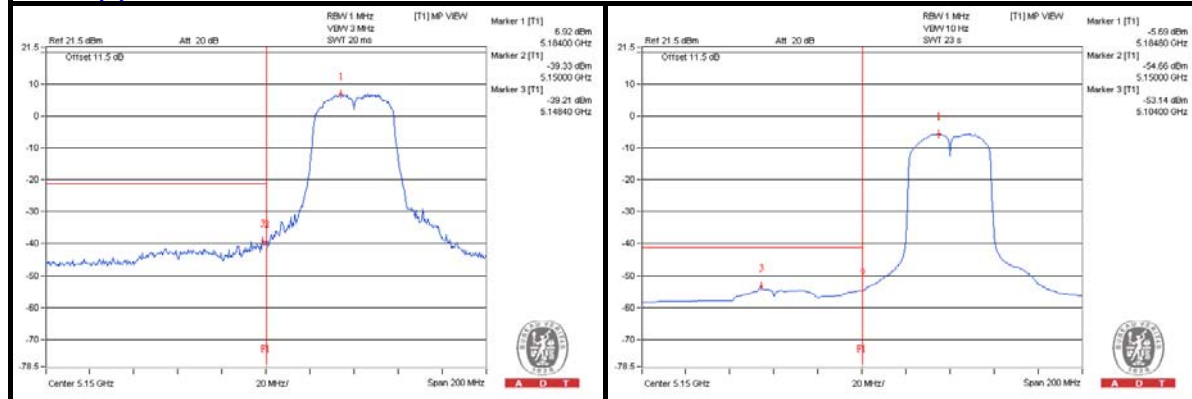Chain (0)

Chain (1)




A D T

802.11n (HT40) – Channel 46

Conducted spurious emission table







No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3487.5 PK	59.01	74	-14.99	-46.25	-47.17	7.43	-36.25
2	3484.375 AV	48.6	54	-5.4	-56.39	-57.94	7.43	-46.66
3	6971.875 PK	61.6	74	-12.4	-42.49	-46.67	7.43	-33.66
4	6971.875 AV	49.63	54	-4.37	-56.15	-55.99	7.43	-45.63
5	10459.375 PK	58.25	74	-15.75	-46.39	-48.85	7.43	-37.01
6	10456.25 AV	47.56	54	-6.44	-58.16	-58.13	7.43	-47.7
7	15687.875 PK	59.25	74	-14.75	-47.65	-45.51	7.43	-36.01
8	15682.125 AV	47.01	54	-6.99	-58.71	-58.67	7.43	-48.25

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

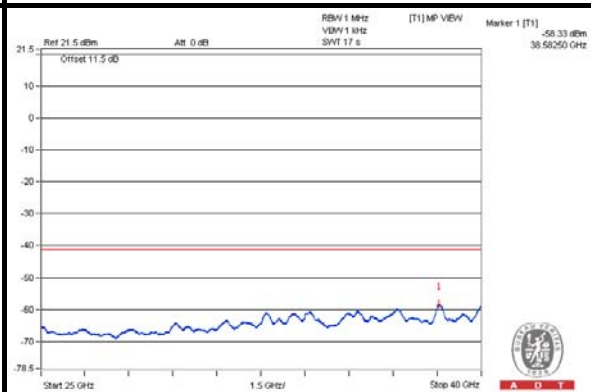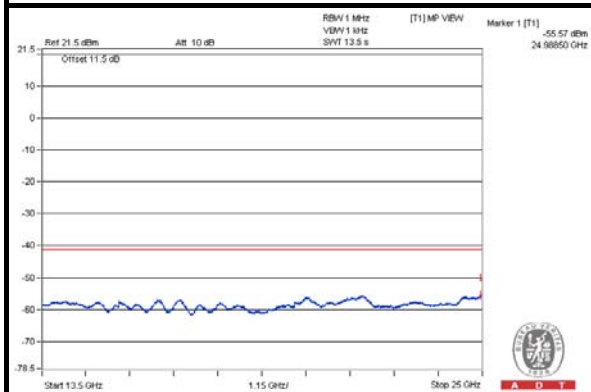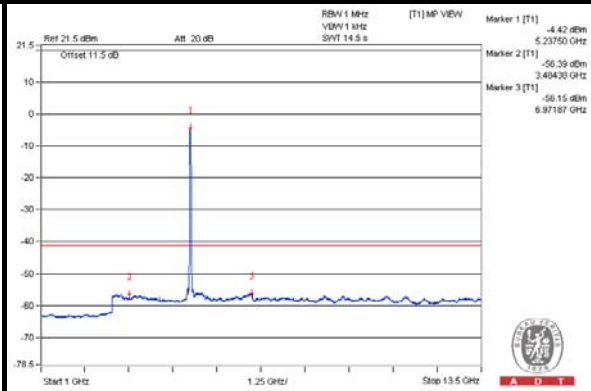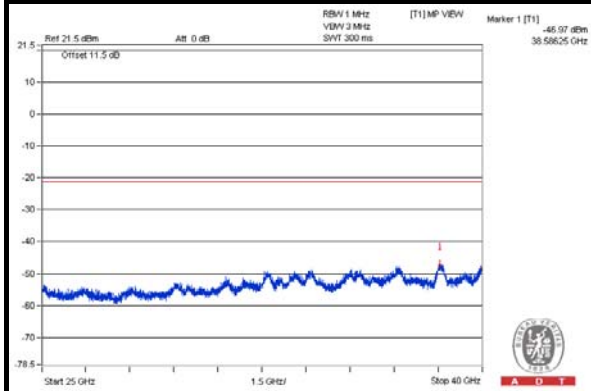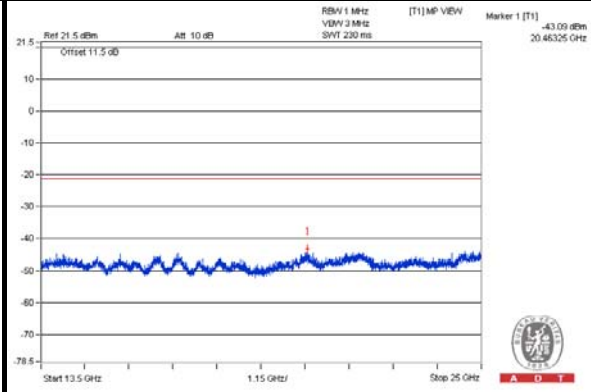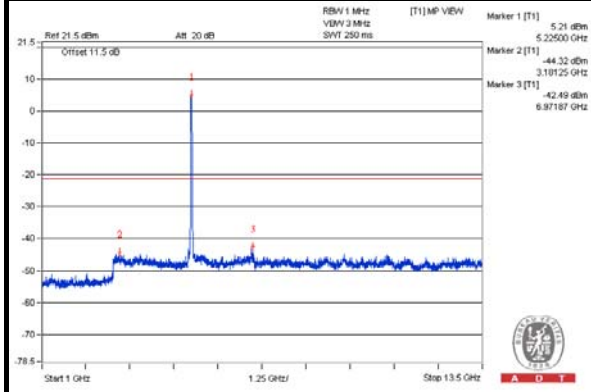

Chain (1)

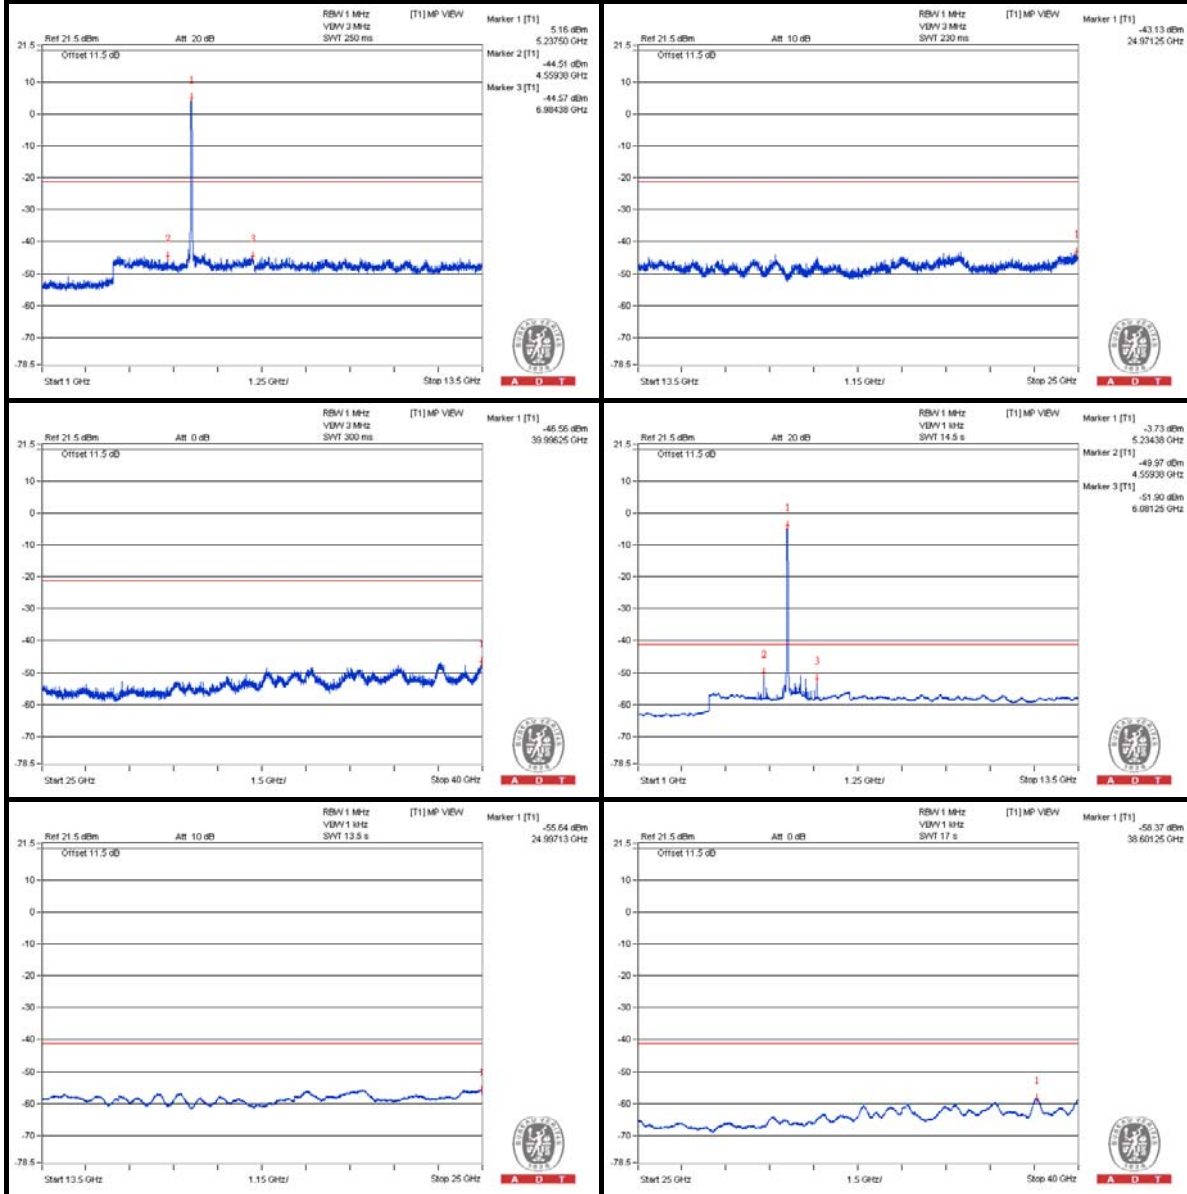



A D T

802.11n (HT40) – Channel 54

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3518.75 PK	58.8	74	-15.2	-47.88	-46.26	7.52	-36.46
2	3512.5 AV	48.76	54	-5.24	-56.29	-57.93	7.52	-46.5
3	7028.125 PK	59.24	74	-14.76	-45.6	-47.76	7.52	-36.02
4	7018.75 AV	47.84	54	-6.16	-58.11	-57.8	7.52	-47.42
5	10543.75 PK	60.23	74	-13.77	-45.23	-45.91	7.52	-35.03
6	10540.625 AV	48.35	54	-5.65	-57.52	-57.36	7.52	-46.91
7	15814.375 PK	56.68	74	-17.32	-49.42	-48.83	7.52	-38.58
8	15811.5 AV	46.31	54	-7.69	-59.78	-59.2	7.52	-48.95

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

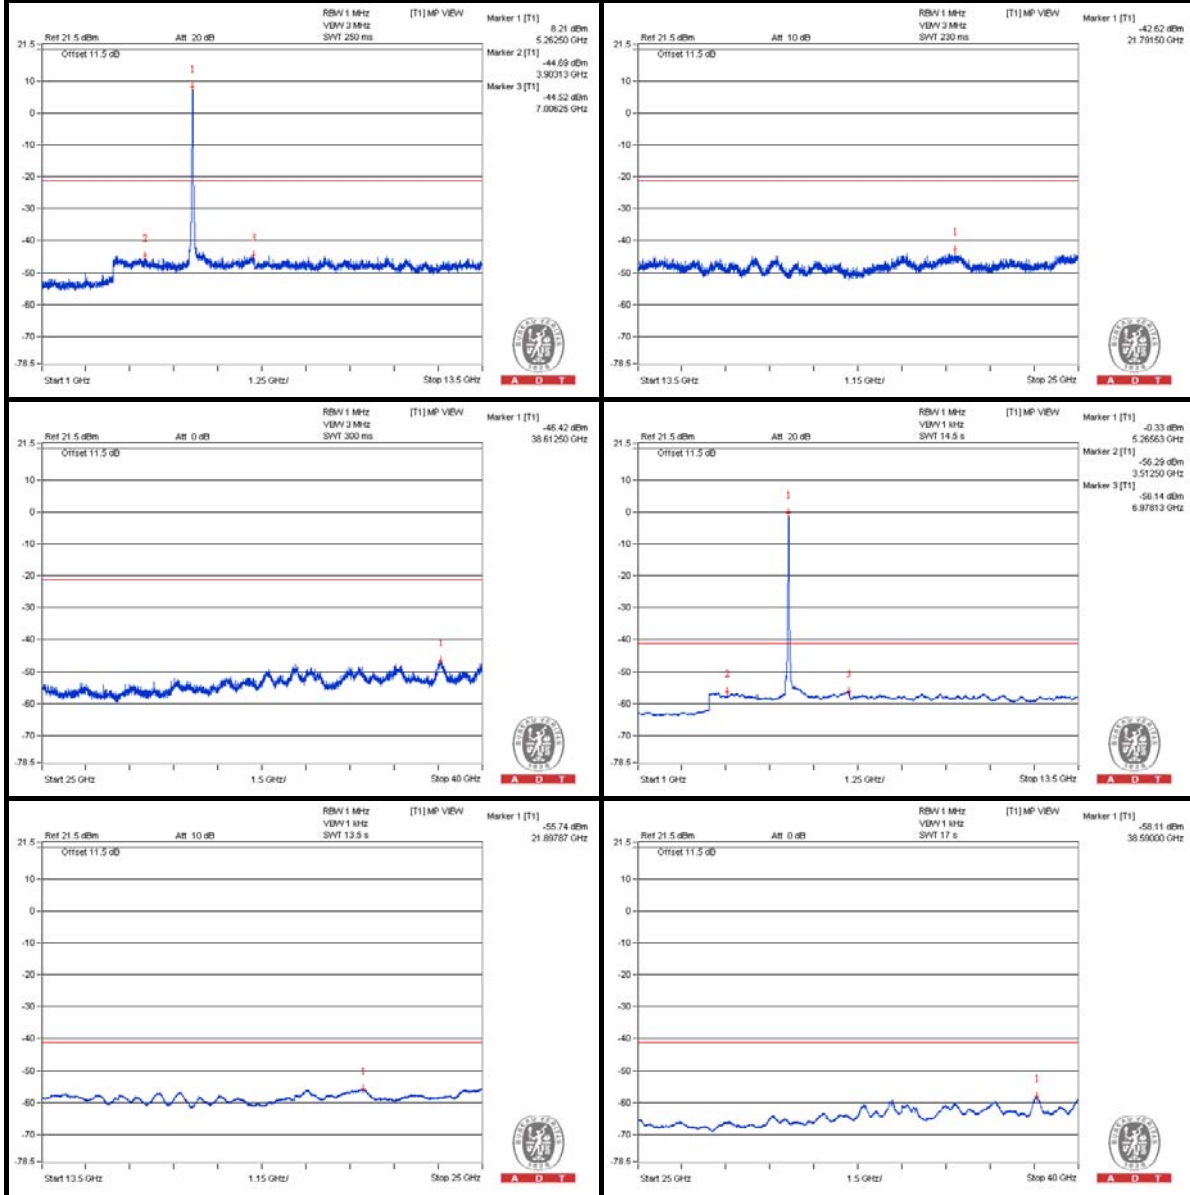

Chain (1)

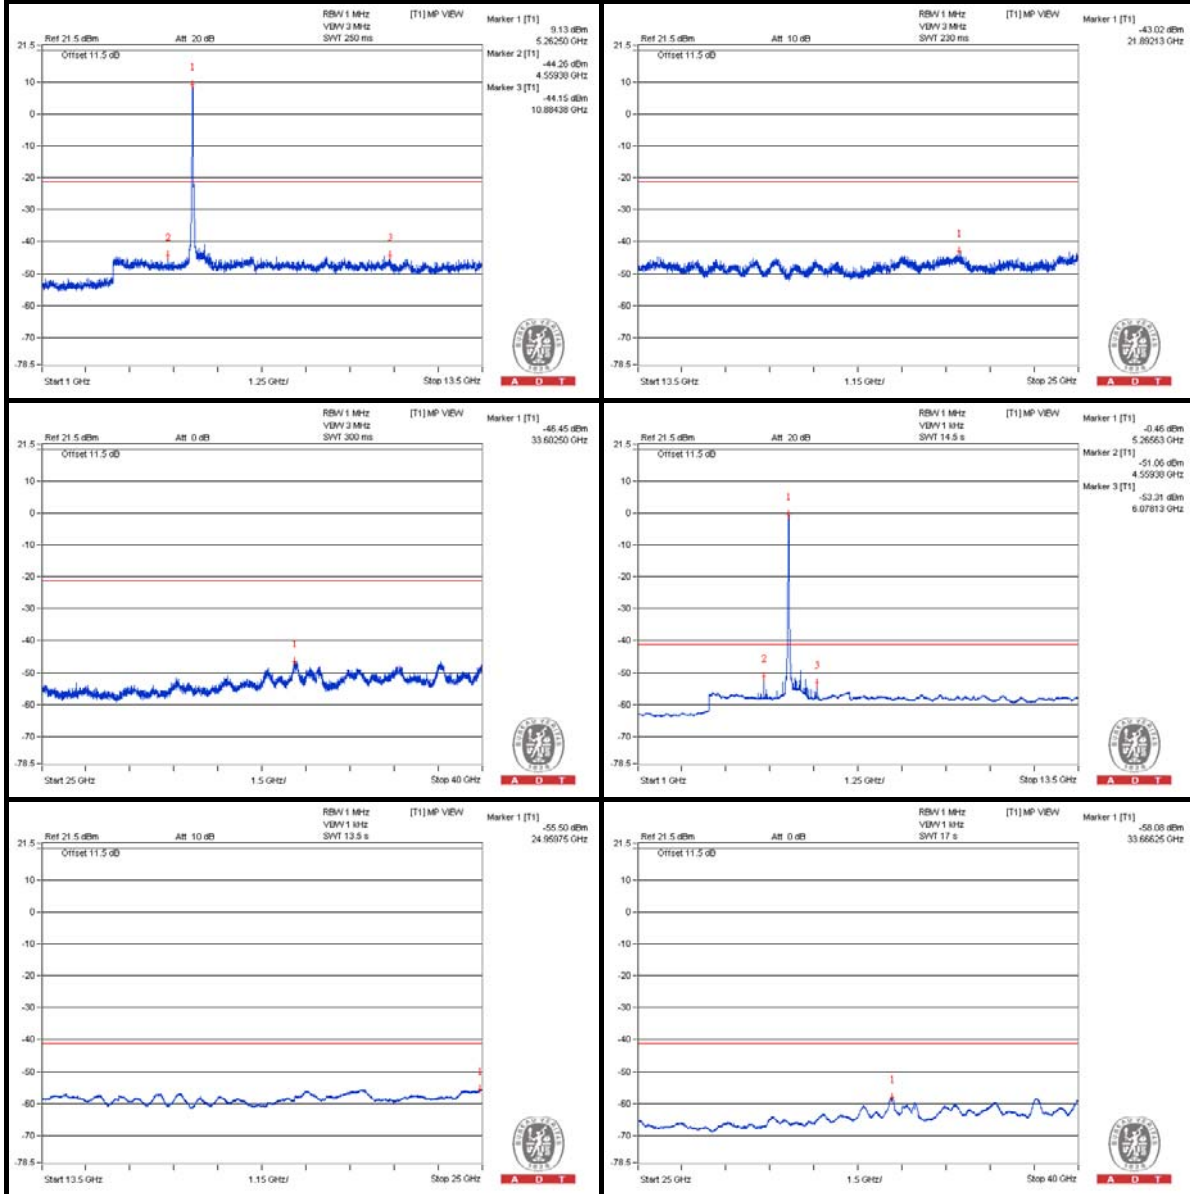


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5360.4 PK	64.38	74	-9.62	-41.82	-41.04	7.52	-30.88
2	5360 AV	52.18	54	-1.82	-54.61	-52.8	7.52	-43.08


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

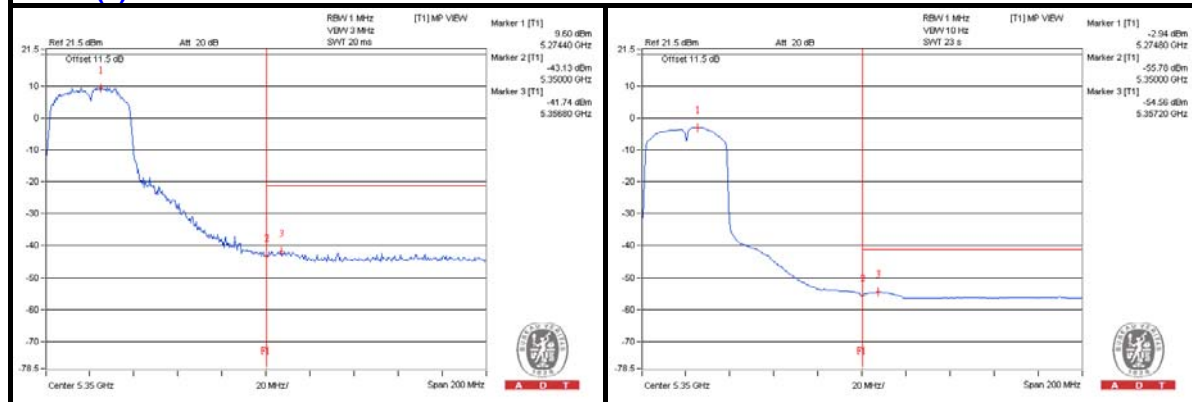

Chain (1)

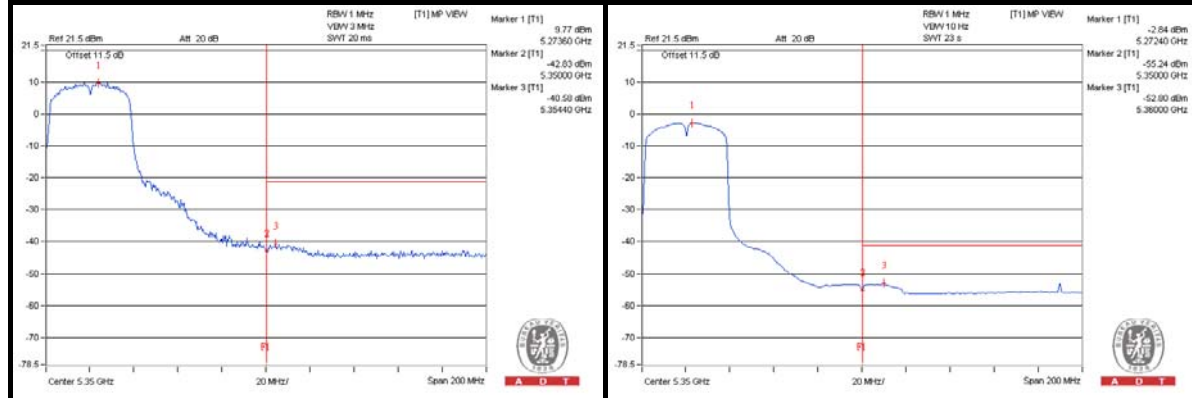



A D T

802.11n (HT40) – Channel 62

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3531.25 PK	59.39	74	-14.61	-45.74	-47.18	7.52	-35.87
2	3540.625 AV	49.24	54	-4.76	-55.6	-57.78	7.52	-46.02
3	7075 PK	58.67	74	-15.33	-46.79	-47.48	7.52	-36.59
4	7087.5 AV	47.57	54	-6.43	-58.32	-58.12	7.52	-47.69
5	10625 PK	59.01	74	-14.99	-48.08	-45.78	7.52	-36.25
6	10625 AV	47.7	54	-6.3	-58.22	-57.97	7.52	-47.56
7	15935.125 PK	58.82	74	-15.18	-47.1	-46.84	7.52	-36.44
8	15935.125 AV	47.42	54	-6.58	-58.57	-58.18	7.52	-47.84

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

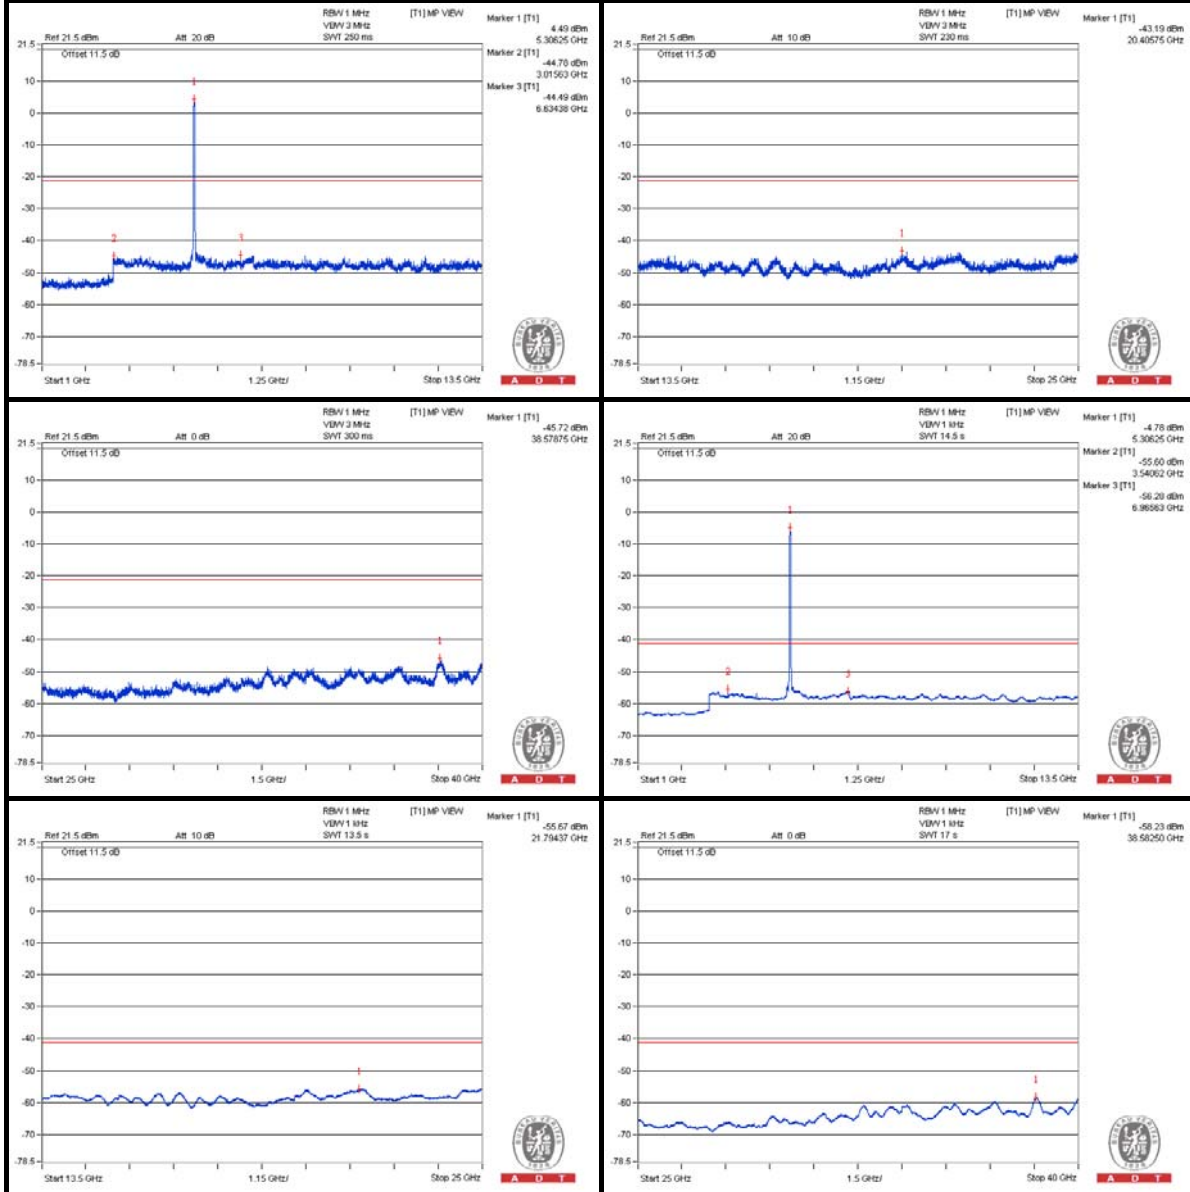

Chain (1)

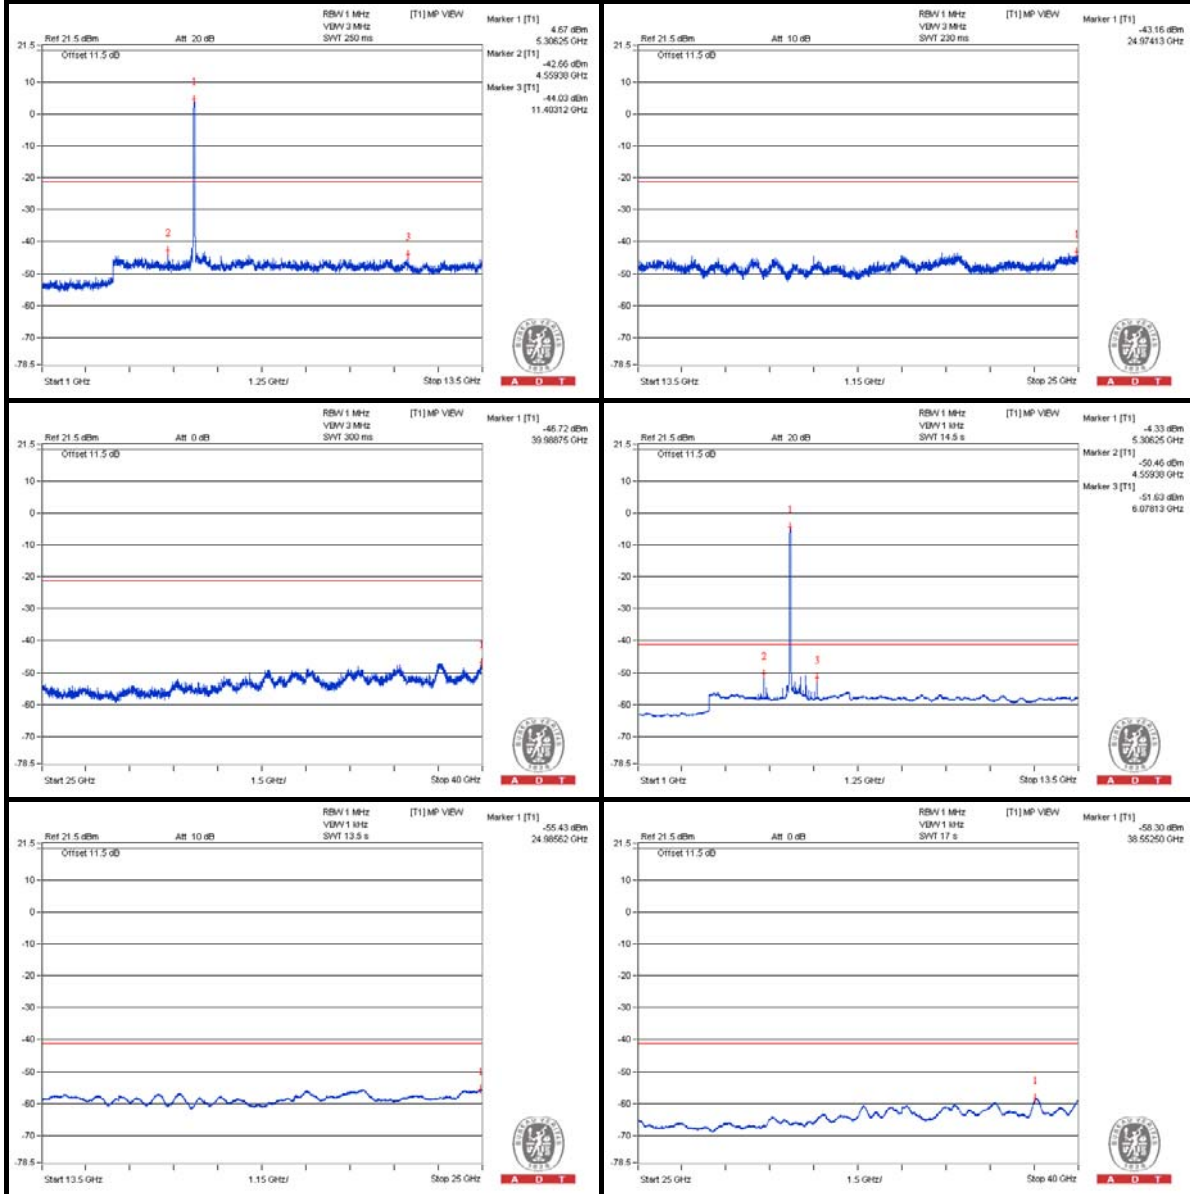

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.4 PK	66.87	74	-7.13	-37.26	-41.63	7.52	-28.39
2	5350 AV	52.33	54	-1.67	-52.37	-54.93	7.52	-42.93

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

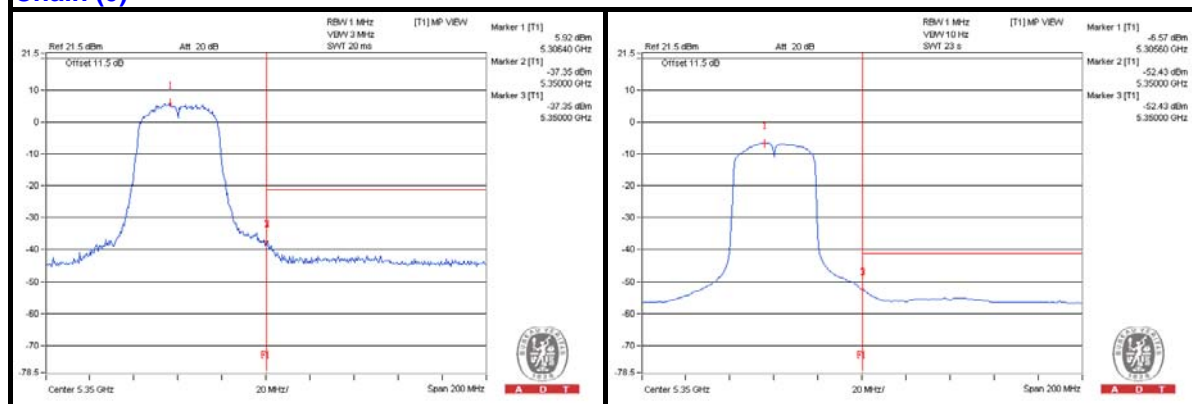

Chain (1)

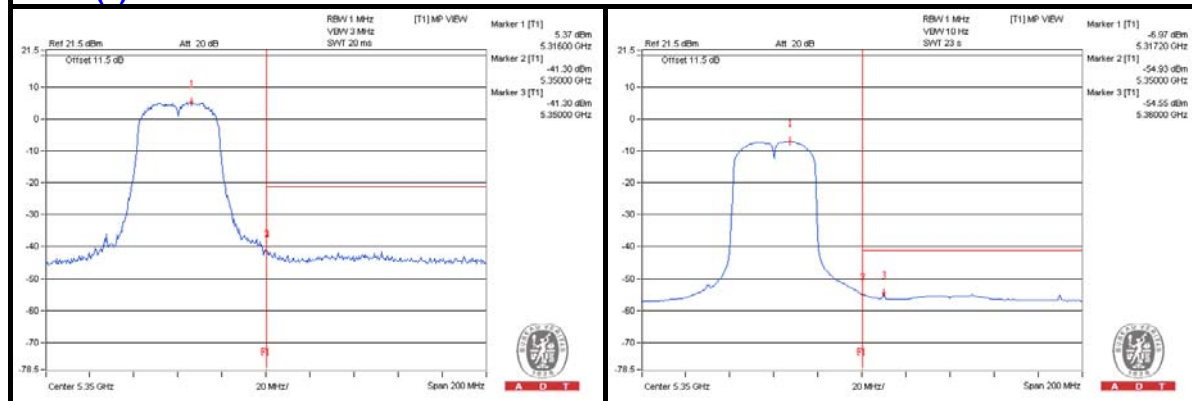



A D T

802.11n (HT40) – Channel 102

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3671.875 PK	60.81	74	-13.19	-45.34	-45.57	7.99	-34.45
2	3671.875 AV	52.91	54	-1.09	-52.2	-54.91	7.99	-42.35
3	7343.75 PK	59.15	74	-14.85	-46.82	-47.42	7.99	-36.11
4	7346.875 AV	49.08	54	-4.92	-56.7	-57.71	7.99	-46.18
5	11028.125 PK	58.17	74	-15.83	-47.38	-48.93	7.99	-37.09
6	11015.625 AV	47.77	54	-6.23	-58.51	-58.48	7.99	-47.49
7	16533.125 PK	60.36	74	-13.64	-45.19	-46.75	7.99	-34.9
8	16521.625 AV	48.93	54	-5.07	-57.4	-57.27	7.99	-46.33


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.




A D T

Chain (0)

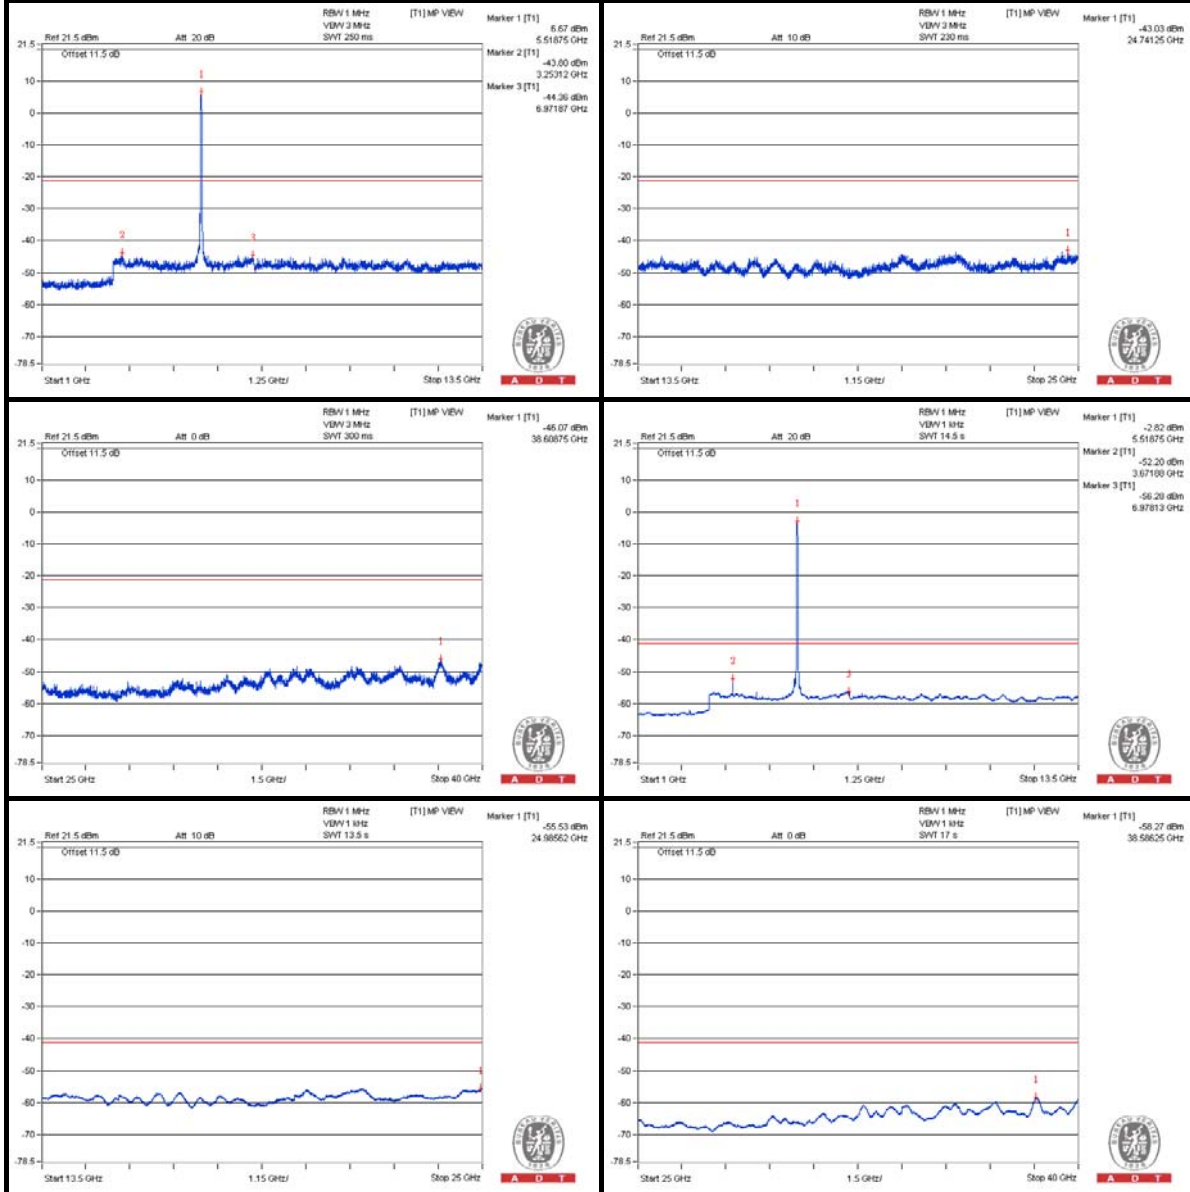

Chain (1)

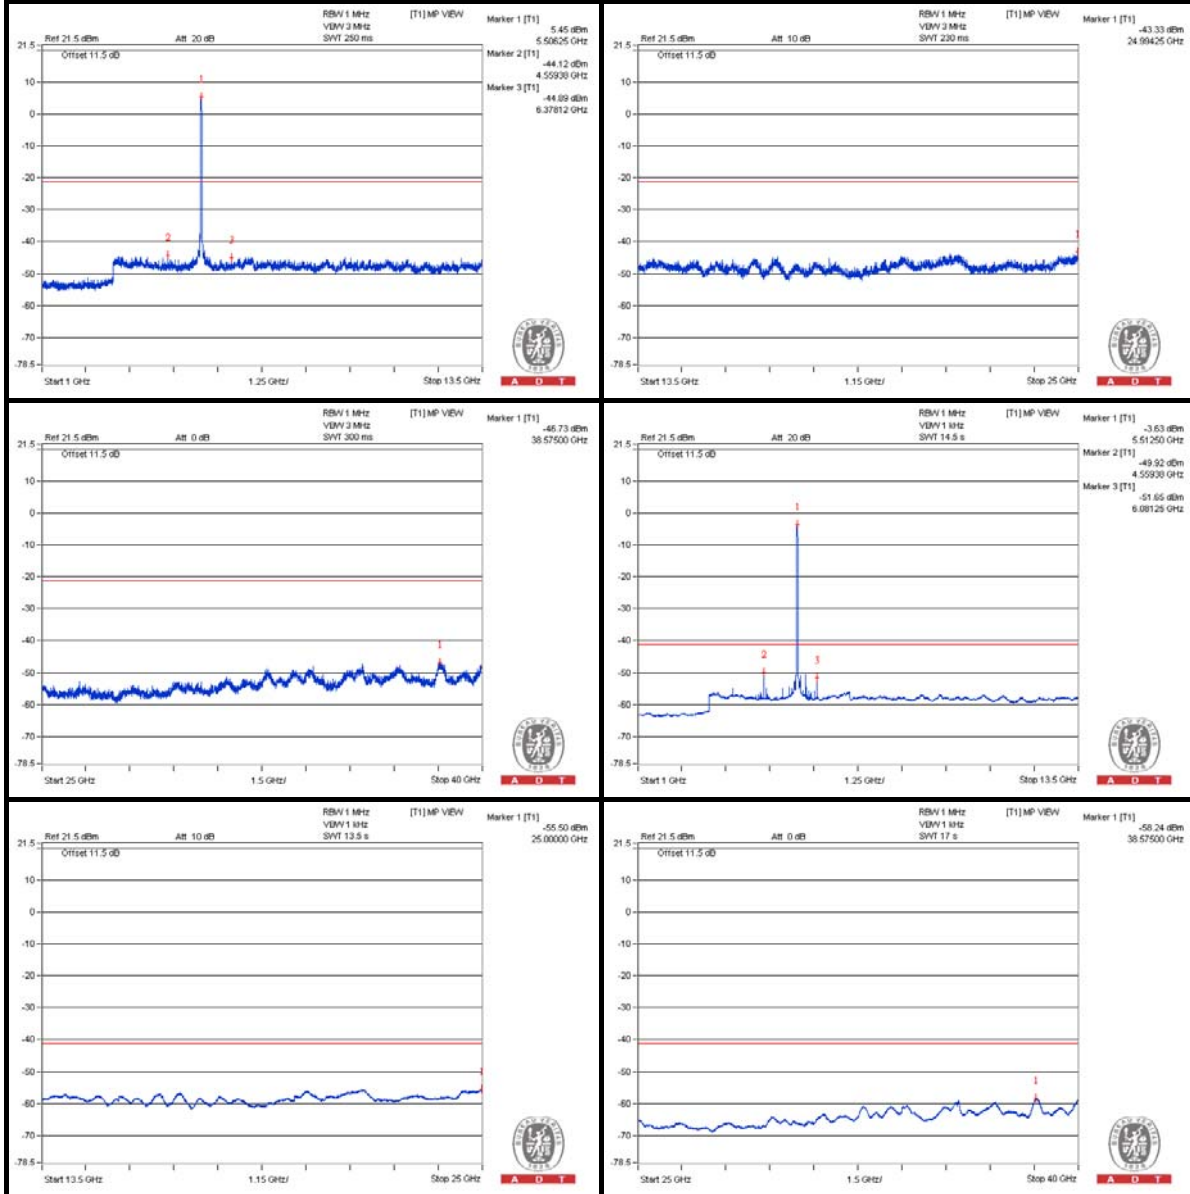


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5469.5 PK	66.42	74	-7.58	-38.12	-42.73	7.99	-28.84
2	5440 AV	53.23	54	-0.77	-53.27	-52.81	7.99	-42.03

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

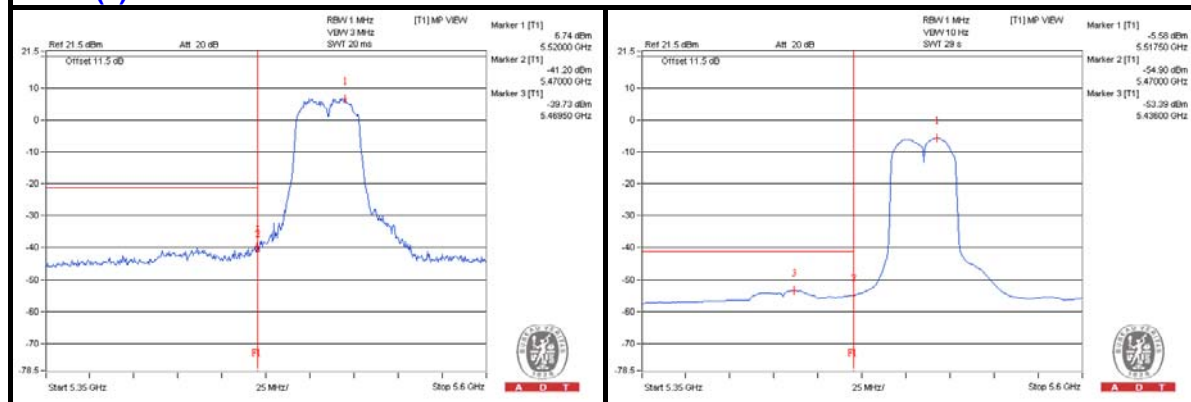

Chain (1)

