

FCC Test Report (WLAN)

Report No.: RF150226E05-1

FCC ID: PPD-QCA9008-TBD1

Test Model: QCA9008-TBD1

Received Date: Feb. 26, 2015

Test Date: Mar. 21 to July 02, 2015

Issued Date: July 15, 2015

Applicant: Qualcomm Atheros, Inc.

Address: 1700 Technology Drive, San Jose, CA 95110

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Antenna.....	10
3.3 Description of Test Modes.....	11
3.3.1 Test Mode Applicability and Tested Channel Detail.....	13
3.4 Duty Cycle of Test Signal.....	15
3.5 Description of Support Units.....	16
3.5.1 Configuration of System under Test.....	16
3.6 General Description of Applied Standard.....	17
4 Test Types and Results	18
4.1 Transmit Power Measurement.....	18
4.1.1 Limits of Transmit Power Measurement.....	18
4.1.2 Test Setup.....	18
4.1.3 Test Instruments.....	19
4.1.4 Test Procedures.....	20
4.1.5 Deviation from Test Standard.....	20
4.1.6 EUT Operating Conditions.....	20
4.1.7 Test Results.....	21
4.2 Peak Power Spectral Density Measurement.....	45
4.2.1 Limits of Peak Power Spectral Density Measurement.....	45
4.2.2 Test Setup.....	45
4.2.3 Test Instruments.....	45
4.2.4 Test Procedures.....	46
4.2.5 Deviation from Test Standard.....	46
4.2.6 EUT Operating Conditions.....	46
4.2.7 Test Results.....	47
4.3 6dB Bandwidth Measurement.....	70
4.3.1 Limits of 6dB Bandwidth Measurement.....	70
4.3.2 Test Setup.....	70
4.3.3 Test Instruments.....	70
4.3.4 Test Procedures.....	70
4.3.5 Deviation from Test Standard.....	70
4.3.6 EUT Operating Conditions.....	70
4.3.7 Test Results.....	71
4.4 Unwanted Emission (Radiated Versus Conducted).....	78
4.4.1 Limits of Unwanted Emission Measurement.....	78
4.4.2 Test Instruments.....	79
4.4.3 Test Procedure.....	81
4.4.4 Deviation from Test Standard.....	82
4.4.5 Test Setup.....	82
4.4.6 EUT Operating Condition.....	83
4.4.7 Test Results (Radiated Measurement).....	83
4.4.8 Test Results (Conducted Measurement).....	170
4.5 Frequency Stability Measurement.....	325
4.5.1 Limits of Frequency Stability Measurement.....	325
4.5.2 Test Setup.....	325
4.5.3 Test Instruments.....	325
4.5.4 Test Procedures.....	325

4.5.5	Deviation from Test Standard	326
4.5.6	EUT Operating Conditions.....	326
4.5.7	Test Results	327
4.6	Conducted Emission Measurement	328
4.6.1	Limits of Conducted Emission Measurement	328
4.6.2	Test Instruments	328
4.6.3	Test Procedure	329
4.6.4	Deviation from Test Standard	329
4.6.5	Test Setup.....	329
4.6.6	EUT Operating Condition	329
4.6.7	Test Results	330
5	Pictures of Test Arrangements.....	332
6	Appendix A – Radiated Emission Measurement	333
6.1.1	Limits of Radiated Emission Measurement.....	333
6.1.2	Test Instruments	334
6.1.3	Test Procedures.....	335
6.1.4	Deviation from Test Standard	335
6.1.5	Test Setup.....	336
6.1.6	EUT Operating Conditions.....	336
6.1.7	Test Results	337
7	Appendix B – Information on the Testing Laboratories.....	359



A D T

Release Control Record

Issue No.	Description	Date Issued
RF150226E05-1	Original release.	July 15, 2015




1 Certificate of Conformity

Product: 802.11abgn/ac/ad+BT module
Brand: Qualcomm Atheros
Test Model: QCA9008-TBD1
Sample Status: ENGINEERING SAMPLE
Applicant: Qualcomm Atheros, Inc.
Test Date: Mar. 21 to July 02, 2015
Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** July 15, 2015
Lori Chung / Specialist

Approved by :  , **Date:** July 15, 2015
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (SECTION 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -10.68dB at 0.20072MHz.
15.407(b)(1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -3.1dB at 5725.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6dB bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.43 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.72 dB
	6GHz ~ 18GHz	4.00 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	802.11abgn/ac/ad+BT module
Brand	Qualcomm Atheros
Test Model	QCA9008-TBD1
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	3.3Vdc from host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n : up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	For 15.407 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.50 ~ 5.72GHz, 5.745 ~ 5.825GHz For 15.247 2.412 ~ 2.472GHz
Number of Channel	For 15.407 25 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 12 for 802.11n (HT40), 802.11ac (VHT40) 6 for 802.11ac (VHT80) For 15.247 13 for 802.11b/g, 802.11n (HT20), VHT20 9 for 802.11n (HT40), VHT40
Output Power	For 15.407 802.11a: 71.132mW 802.11ac (VHT20): 75.315mW 802.11ac (VHT40): 57.081mW 802.11ac (VHT80): 36.807mW For 15.247 802.11b: 294.47mW 802.11g: 430.629mW VHT20: 439.601mW VHT40: 416.898mW
Antenna Type	See item 3.2
Antenna Connector	See item 3.2
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. There are Bluetooth technology and WLAN (2.4GHz, 5GHz & 60GHz) technology used for the EUT.
2. The EUT incorporates a 2T2R function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
VHT20	MCS 0~8, Nss=1	2TX	2RX
	MCS 0~8, Nss=2	2TX	2RX
VHT40	MCS 0~9, Nss=1	2TX	2RX
	MCS 0~9, Nss=2	2TX	2RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20)	MCS 0~8, Nss=1	2TX	2RX
	MCS 0~8, Nss=2	2TX	2RX
802.11ac (VHT40)	MCS 0~9, Nss=1	2TX	2RX
	MCS 0~9, Nss=2	2TX	2RX
802.11ac (VHT80)	MCS 0~9, Nss=1	2TX	2RX
	MCS 0~9, Nss=2	2TX	2RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.3.1)

3. The EUT was pre-tested under the following modes:

Test Mode	Data rate
Mode A	400ns GI
Mode B	800ns GI

From the above modes, the worst case was found in **Mode B**. Therefore only the test data of the mode was recorded in this report.

4. WLAN/BT coexistence mode:

◆ 2x2 WLAN + BT:

- 5GHz 802.11a/an (or 11ac) transmit concurrent with BT.
- 2.4GHz: timely shared coexistence. (2.4GHz & BT technology can't transmit at same time.)
- 2.4GHz & 5GHz technology can't transmit at same time.

5. The emission (conducted & radiated emission) of the simultaneous operation (WiFi <5GHz> & Bluetooth) have been evaluated and no non-compliance found. The detail combinations of transmitters / frequencies / modes as below table

Mode	Available Channel	Tested Channel	Modulation Technology
5 GHz (802.11a)	36 to 165	157	OFDM
+ Bluetooth (GFSK)	0 to 78	0	FHSS

6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Antenna

The antenna gain was declared by client; please refer to the following table:

Transmitter Circuit	Brand	Model	Ant. Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	2.4GHz Cable Loss (dBi)	5GHz Cable Loss (dBi)	Connector Type	Cable Length (mm)
Chain (0)	WNC	81-EBJ15.005	PIFA	3.00	5.15~5.35GHz: 2.56	1.15	5.15~5.35GHz: 1.70	IPEX	300
					5.47~5.725GHz: 4.76		5.47~5.725GHz: 1.74		
					5.725~5.85GHz: 4.76		5.725~5.85GHz: 1.79		
Chain (1)	WNC	81-EBJ15.005	PIFA	3.62	5.15~5.35GHz: 3.08	1.15	5.15~5.35GHz: 1.70	IPEX	300
					5.47~5.725GHz: 3.31		5.47~5.725GHz: 1.74		
					5.725~5.85GHz: 2.42		5.725~5.85GHz: 1.79		

Note: 1. Above antenna gains of antenna are Total (H+V).

For Testing, we select the highest gain on each frequency band for calculation and testing
The detail information as below:

Transmitter Circuit	Brand	Model	Ant. Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	2.4GHz Cable Loss (dBi)	5GHz Cable Loss (dBi)	Connector Type	Cable Length (mm)
Chain (0)+(1)	WNC	81-EBJ15.005	PIFA	3.62	5.15~5.35GHz: 3.08	1.15	5.15~5.35GHz: 1.70	IPEX	300
					5.47~5.725GHz: 4.76		5.47~5.725GHz: 1.74		
					5.725~5.85GHz: 4.76		5.725~5.85GHz: 1.79		

3.3 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11ac (VHT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11ac (VHT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11ac (VHT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11ac (VHT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
58	5290MHz

FOR 5500 ~ 5720MHz

12 channels are provided for 802.11a, 802.11ac (VHT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11ac (VHT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
106	5530MHz	138	5690 MHz
122	5610 MHz		

Note : The listed channels in the DFS band (5250~5350MHz and 5470~5725MHz) are passive scan only.

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11ac (VHT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11ac (VHT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.3.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	UE≥1G	UE<1G	PLC	APCM	
-	√	√	√	√	-

Where **UE≥1G**: Unwanted Emission above 1GHz **UE<1G**: Unwanted Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

Unwanted Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6
802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	13.5
802.11ac (VHT80)		42	42	OFDM	29.3
802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6
802.11ac (VHT20)		52 to 64	52, 60, 64	OFDM	6.5
802.11ac (VHT40)		54 to 62	54, 62	OFDM	13.5
802.11ac (VHT80)		58	58	OFDM	29.3
802.11a	5500-5720	100 to 144	100, 120, 140, 144	OFDM	6
802.11ac (VHT20)		100 to 144	100, 120, 140, 144	OFDM	6.5
802.11ac (VHT40)		102 to 142	102, 118, 134, 142	OFDM	13.5
802.11ac (VHT80)		106 to 138	106, 122, 138	OFDM	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6
802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	13.5
802.11ac (VHT80)		155	155	OFDM	29.3

Unwanted Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
802.11a	5745-5825	149 to 165	157	OFDM	6

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
802.11a	5745-5825	149 to 165	157	OFDM	6

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6
802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	13.5
802.11ac (VHT80)		42	42	OFDM	29.3
802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6
802.11ac (VHT20)		52 to 64	52, 60, 64	OFDM	6.5
802.11ac (VHT40)		54 to 62	54, 62	OFDM	13.5
802.11ac (VHT80)		58	58	OFDM	29.3
802.11a	5500-5720	100 to 144	100, 120, 140, 144	OFDM	6
802.11ac (VHT20)		100 to 144	100, 120, 140, 144	OFDM	6.5
802.11ac (VHT40)		102 to 142	102, 118, 134, 142	OFDM	13.5
802.11ac (VHT80)		106 to 138	106, 122, 138	OFDM	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6
802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	13.5
802.11ac (VHT80)		155	155	OFDM	29.3

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
UE≥1G	23deg. C, 70%RH	120Vac, 60Hz	Gary Cheng
UE<1G	24deg. C, 66%RH	120Vac, 60Hz	Robert Cheng
PLC	23deg. C, 65%RH	120Vac, 60Hz	Wythe Lin
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

3.4 Duty Cycle of Test Signal


Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11a: Duty cycle = 21.5 ms/21.637 ms = 0.994

802.11ac (VHT20): Duty cycle = 19.875 ms/19.968 ms = 0.995

802.11ac (VHT40): Duty cycle = 9.541 ms/9.691 ms = 0.985

802.11ac (VHT80): Duty cycle = 4.425 ms/4.515 ms = 0.98

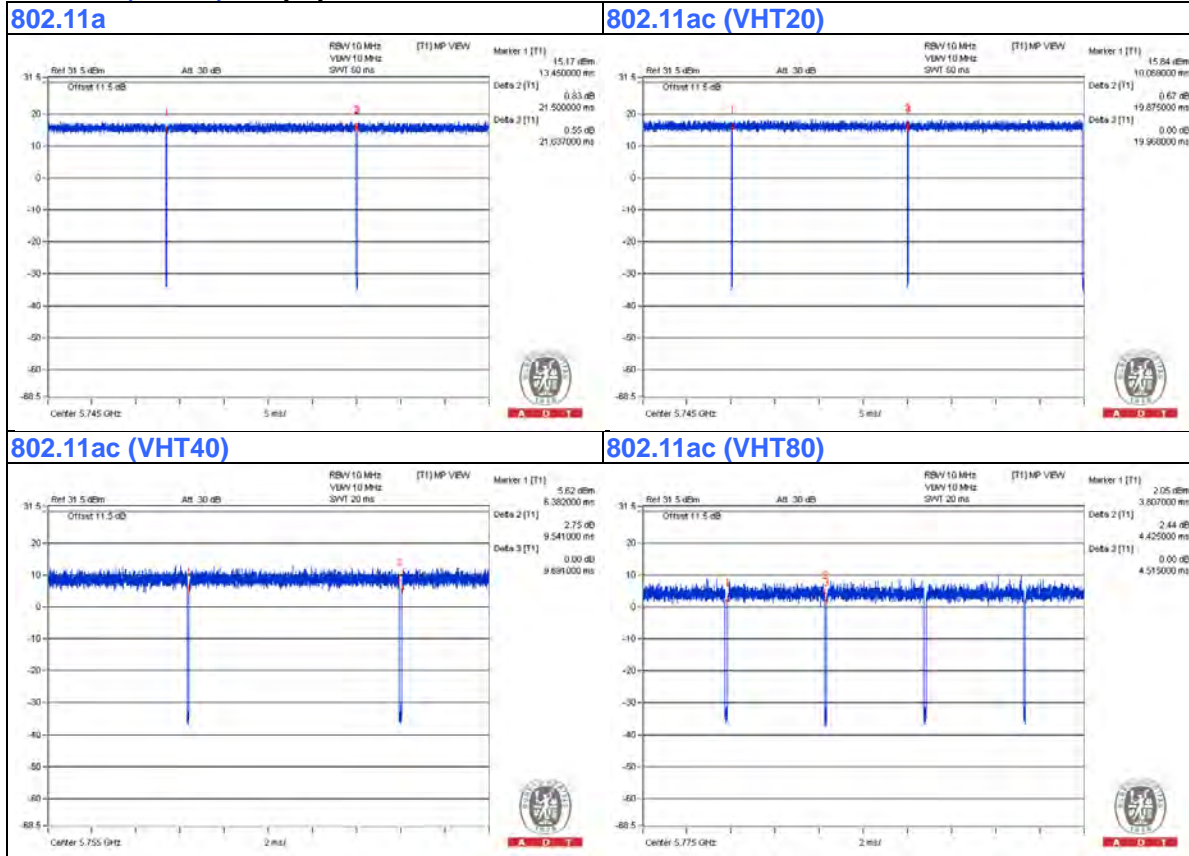


3.5 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID	Remark
A	NOTEBOOK COMPUTER	Lenovo	0769	NA	NA	Supplied by Client
B	PCI-E Test tool	Qualcomm Atheros	NA	NA	NA	Supplied by Client

NOTE: All power cords of the above support units are non-shielded (1.8 m).

3.5.1 Configuration of System under Test



3.6 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)
789033 D02 General UNII Test Procedure New Rules v01
662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10- 2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Transmit Power Measurement

4.1.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	√	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A		√	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C		√	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3		√	1 Watt (30 dBm)

Note: *B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.


4.1.2 Test Setup

FOR POWER OUTPUT MEASUREMENT


For channel straddling 5725MHz:



For other channels:



FOR 26dB OCCUPIED BANDWIDTH



4.1.3 Test Instruments

FOR POWER OUTPUT MEASUREMENT**For channel straddling 5725MHz:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 19, 2015

For other channels:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter Anritsu	ML2495A	1014008	Apr. 28, 2015	Apr. 27, 2016
Power Sensor Anritsu	MA2411B	0917122	Apr. 28, 2015	Apr. 27, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 19, 2015

FOR 26dB OCCUPIED BANDWIDTH

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 19, 2015

4.1.4 Test Procedures

FOR AVERAGE POWER MEASUREMENT

For channel straddling 5725MHz:

Follow FCC KDB 789033 UNII test procedure:

Method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW =1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Number of points in sweep ≥ 2 Span / RBW.
5. Sweep time = auto.
6. Set trigger to free run (duty cycle ≥ 98 percent) ; Set video trigger (duty cycle < 98 percent)
7. Detector = RMS.
8. Trace average at least 100 traces in power averaging mode
9. Compute power by integrating the spectrum across the 26 dB EBW of the signal.

For other channels:

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB OCCUPIED BANDWIDTH

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW $>$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.1.5 Deviation from Test Standard

No deviation.

4.1.6 EUT Operating Conditions

The software (QCRT-CONN30033.exe) provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.1.7 Test Results

802.11a

POWER OUTPUT

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	12.14	13.87	40.746	16.10	23.91	Pass
40	5200	15.30	15.14	66.543	18.23	23.91	Pass
48	5240	15.44	15.41	69.749	18.44	23.91	Pass
52	5260	15.36	15.52	70.001	18.45	23.91	Pass
60	5300	15.37	15.29	68.241	18.34	23.91	Pass
64	5320	11.72	12.84	34.09	15.33	23.91	Pass
100	5500	11.46	11.75	28.958	14.62	22.14	Pass
120	5600	15.20	15.11	65.547	18.17	22.23	Pass
140	5700	11.24	11.18	26.427	14.22	22.06	Pass
*144 (UNII-2c Band)	5720	11.13	11.42	26.84	14.29	22.23	Pass
*144 (UNII-3 Band)	5720	4.01	4.28	5.197	7.16	28.23	Pass
149	5745	13.74	12.89	43.113	16.35	28.23	Pass
157	5785	15.86	15.13	71.132	18.52	28.23	Pass
165	5825	14.46	14.26	54.594	17.37	28.23	Pass

- NOTE:**
1. 5150~5250MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi , therefore the limit needs to reduce, so the power limit shall be reduced to "Determined Conducted Limit-(6.09-6)"
 2. 5250~5350MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi, therefore the limit needs to reduce, so the power limit shall be reduced to "Determined Conducted Limit-(6.09-6)"
 3. 5470~5725MHz: Directional gain = 4.76dBi + 10log(2) = 7.77dBi > 6dB, therefore the limit needs to reduce, so the power limit shall be reduced to 30-(7.77-6).

* Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
*144	5720	32.037	15.06

Note: The total power was calculated through formula and record the value for reference only.


26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	19.81	20.06
40	5200	41.51	31.44
48	5240	42.42	36.76
52	5260	40.40	33.02
60	5300	40.47	33.11
64	5320	20.39	20.62
100	5500	19.99	19.57
120	5600	39.88	28.45
140	5700	19.90	19.23
144 (UNII-2c Band)	5720	26.70	23.03


Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
52	5260	33.02	26.18 > 24
60	5300	33.11	26.19 > 24
64	5320	20.39	24.09 > 24
100	5500	19.57	23.91 < 24
120	5600	28.45	25.54 > 24
140	5700	19.23	23.83 < 24
144 (UNII-2c Band)	5720	23.03	24.62 > 24


Chain 0 / CH36

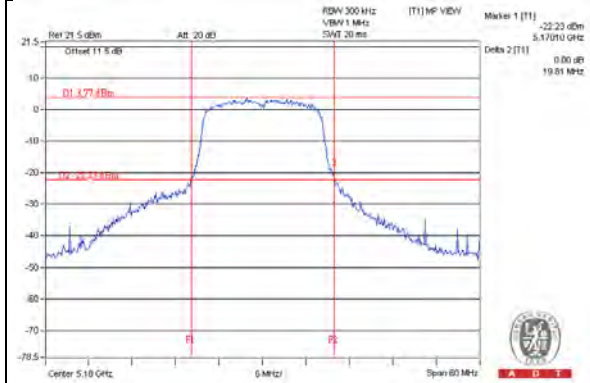


Chain 0 / CH40

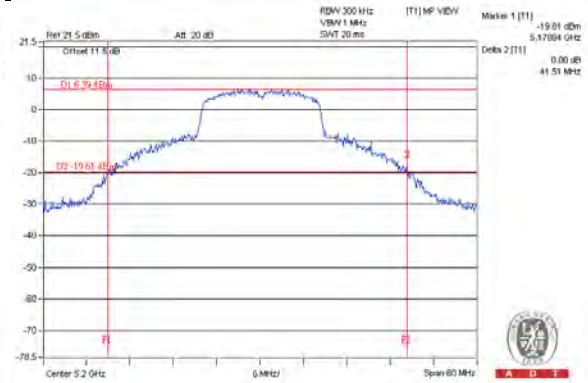


Chain 0 / CH48

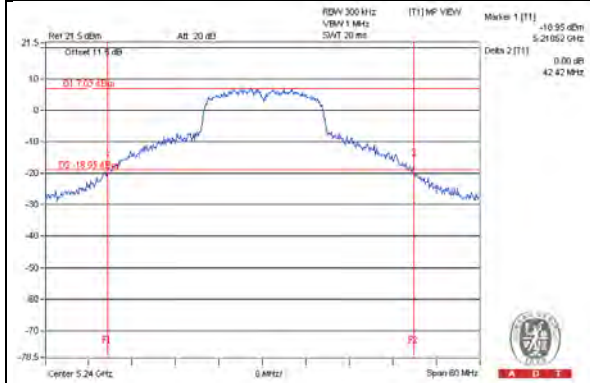


Chain 0 / CH52

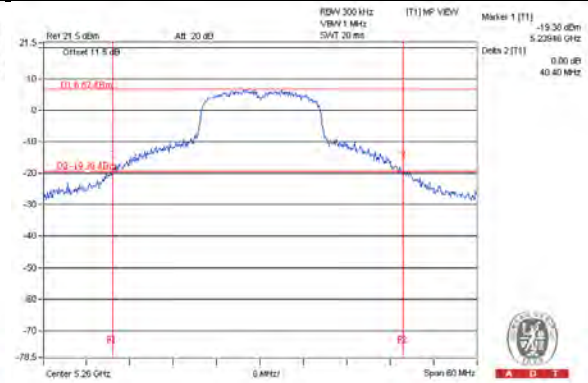


Chain 0 / CH60

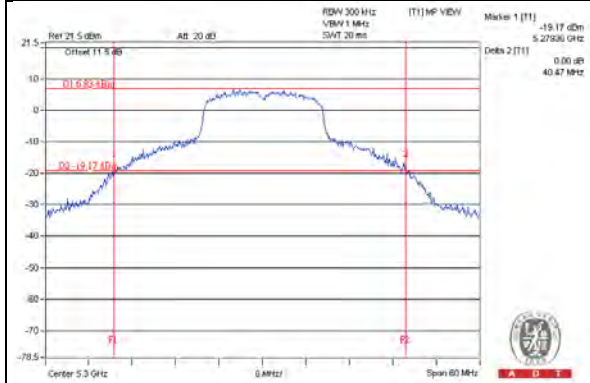


Chain 0 / CH64

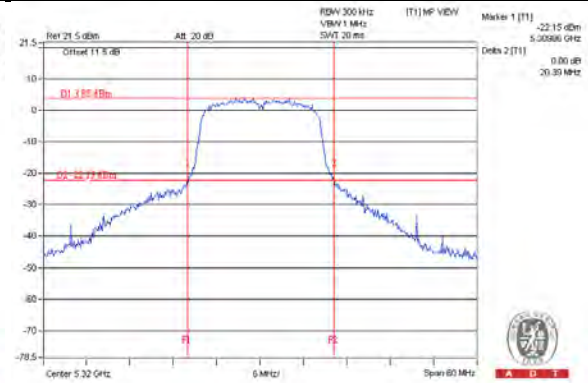


Chain 0 / CH100

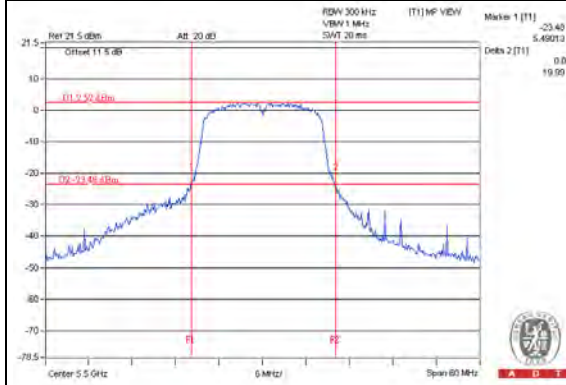


Chain 0 / CH120

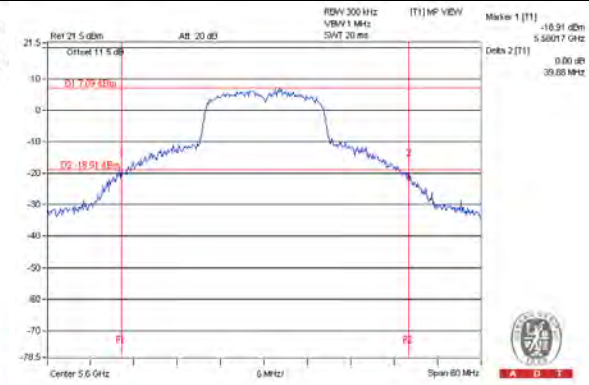

Chain 0 / CH140

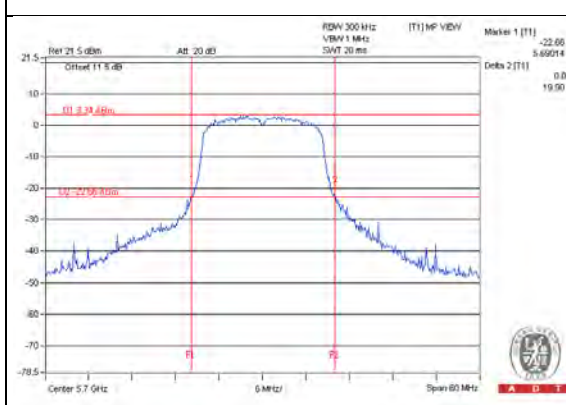


Chain 0 / CH144 (UNII-2c Band) / Chain 0 / CH144 (UNII-3 Band)

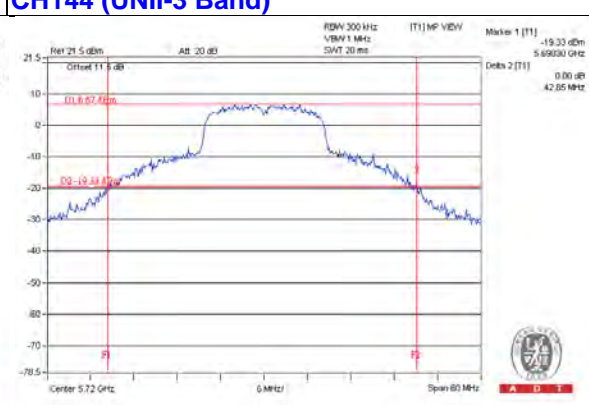


NOTE:

For CH144 (UNII-2c Band) = 5725MHz - Marker 1


Chain 1 / CH36

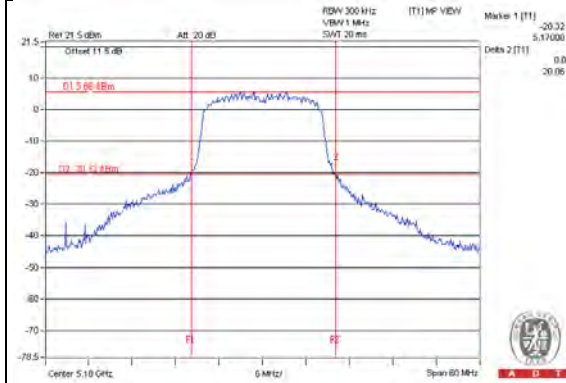


Chain 1 / CH40

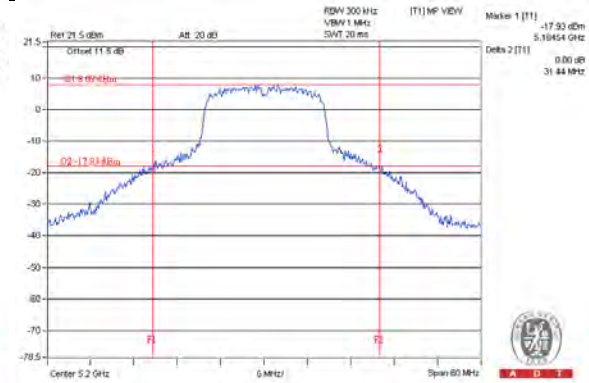


Chain 1 / CH48

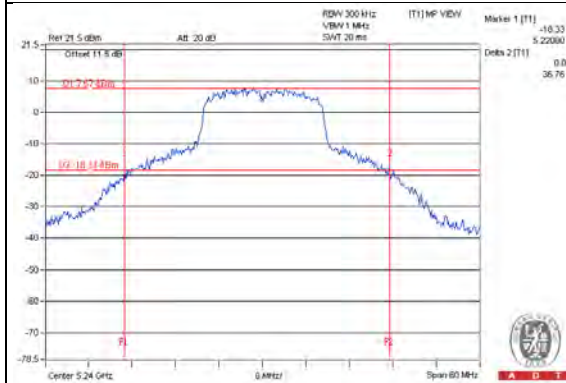


Chain 1 / CH52

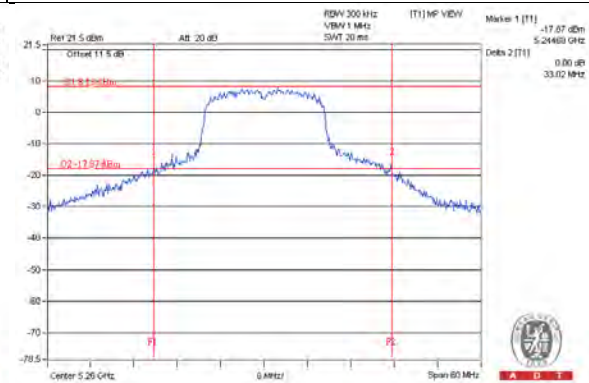


Chain 1 / CH60

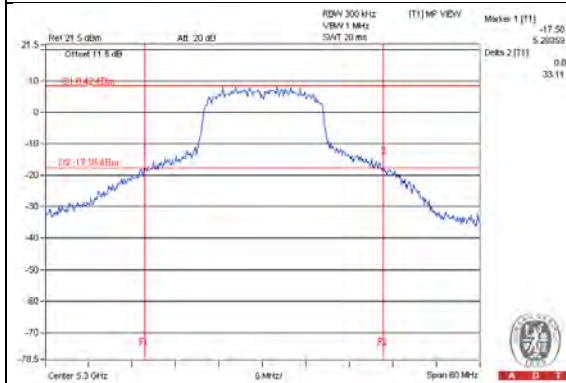


Chain 1 / CH64

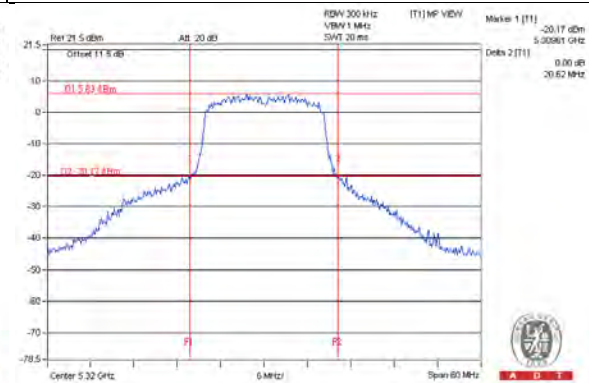


Chain 1 / CH100

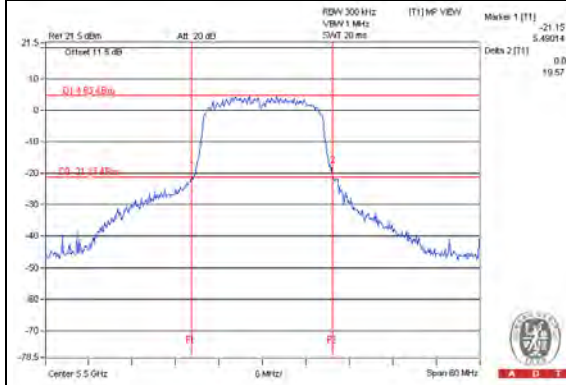


Chain 1 / CH120

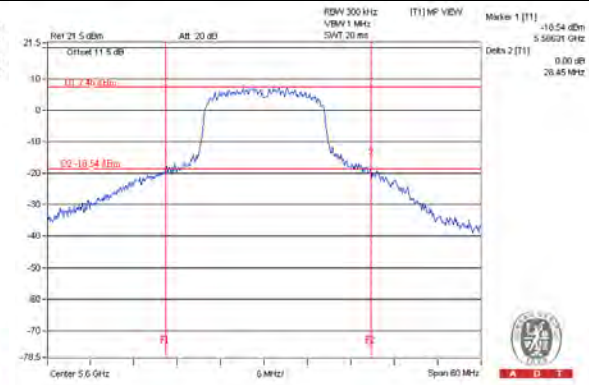

Chain 1 / CH140

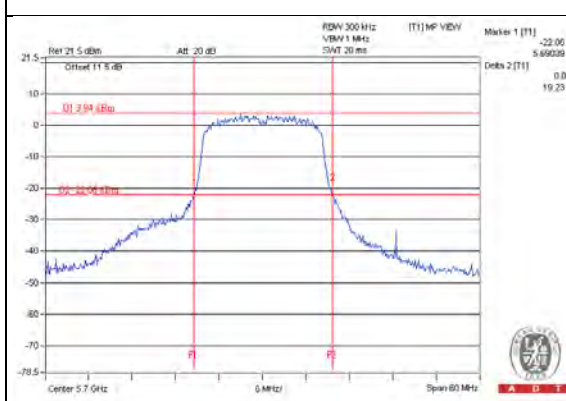

Chain 1 / CH144 (UNII-2c Band) / Chain 1 / CH144 (UNII-3 Band)

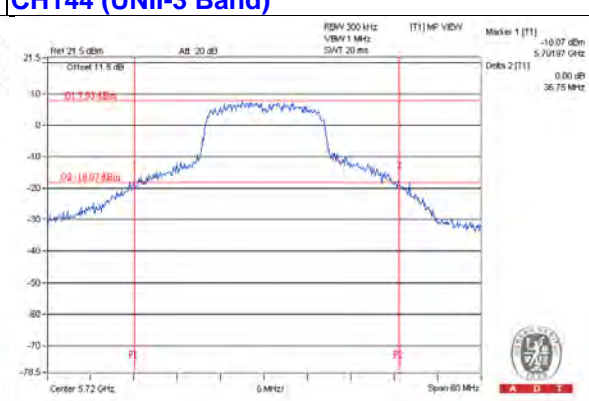

NOTE:

For CH144 (UNII-2c Band) = 5725MHz - Marker 1

For Reference only – Power meter value

The power value was measured by power meter with average sensor.

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
144	5720	15.36	15.42	69.19	18.40

Note: The total power was calculated through formula and record the value for reference only.

802.11ac (VHT20)
POWER OUTPUT

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	12.69	13.68	41.913	16.22	23.91	Pass
40	5200	15.45	15.56	71.05	18.52	23.91	Pass
48	5240	15.67	15.69	73.966	18.69	23.91	Pass
52	5260	15.58	15.93	75.315	18.77	23.91	Pass
60	5300	15.32	15.19	67.078	18.27	23.91	Pass
64	5320	11.64	12.81	33.687	15.27	23.91	Pass
100	5500	11.02	11.59	27.068	14.32	22.23	Pass
120	5600	15.29	15.56	69.781	18.44	22.23	Pass
140	5700	12.63	12.53	36.229	15.59	22.23	Pass
*144 (UNII-2c Band)	5720	10.80	11.29	25.482	14.06	22.23	Pass
*144 (UNII-3 Band)	5720	4.20	4.73	5.602	7.48	28.23	Pass
149	5745	13.23	11.74	35.966	15.56	28.23	Pass
157	5785	15.54	15.11	68.244	18.34	28.23	Pass
165	5825	14.00	13.47	47.352	16.75	28.23	Pass

NOTE: 1. 5150~5250MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi , therefore the limit needs to reduce, so the power limit shall be reduced to "Determined Conducted Limit-(6.09-6)"

2. 5250~5350MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi, therefore the limit needs to reduce, so the power limit shall be reduced to "Determined Conducted Limit-(6.09-6)"

3. 5470~5725MHz: Directional gain = 4.76dBi + 10log(2) = 7.77dBi > 6dB, therefore the limit needs to reduce, so the power limit shall be reduced to 30-(7.77-6).

* Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
*144	5720	31.084	14.93

Note: The total power was calculated through formula and record the value for reference only.


26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	22.52	21.47
40	5200	41.00	30.65
48	5240	43.74	34.25
52	5260	44.10	34.94
60	5300	38.82	28.69
64	5320	21.16	20.62
100	5500	20.66	20.92
120	5600	41.72	33.43
140	5700	21.40	20.34
144 (UNII-2c Band)	5720	26.51	26.67


Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
52	5260	34.94	26.43 > 24
60	5300	28.69	25.57 > 24
64	5320	20.62	24.14 > 24
100	5500	20.66	24.15 > 24
120	5600	33.43	26.24 > 24
140	5700	20.34	24.08 > 24
144 (UNII-2c Band)	5720	26.51	25.23 > 24


Chain 0 / CH36

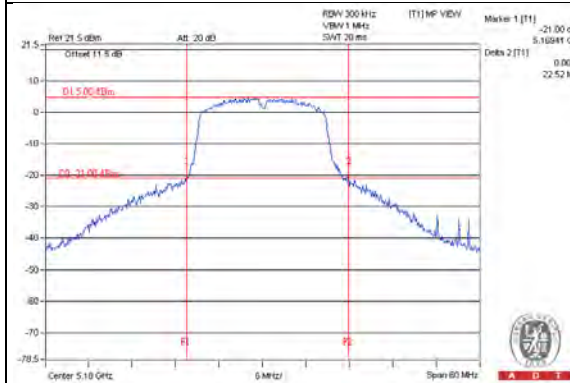


Chain 0 / CH40

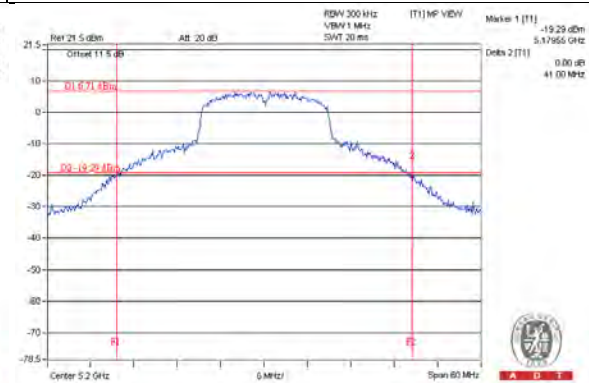


Chain 0 / CH48

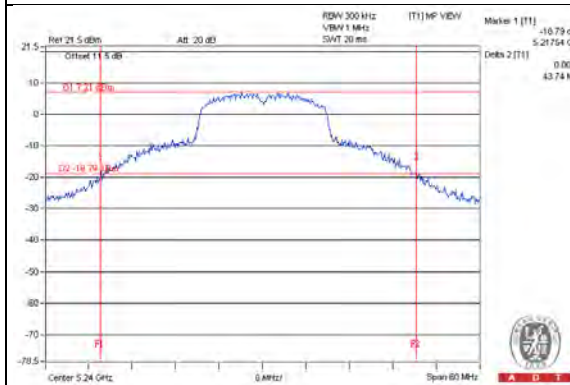


Chain 0 / CH52

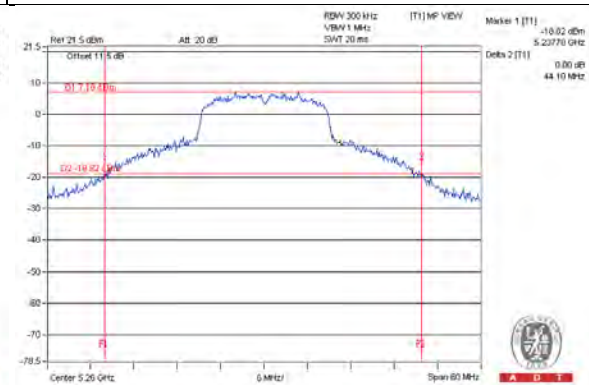


Chain 0 / CH60

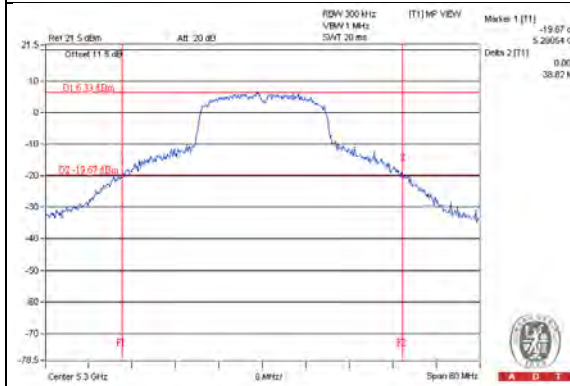


Chain 0 / CH64

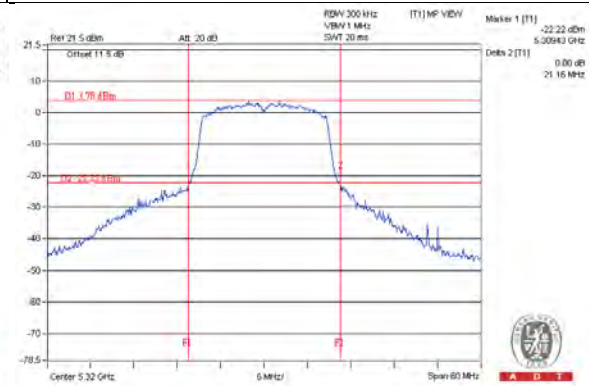


Chain 0 / CH100

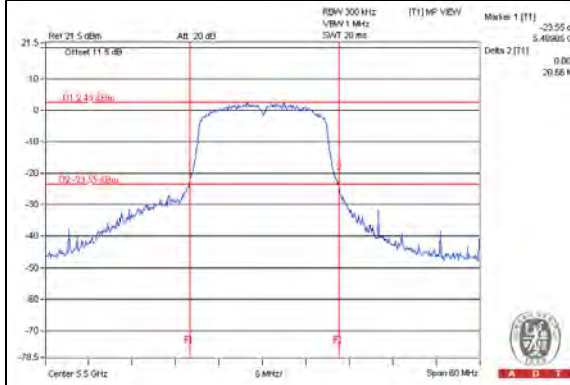


Chain 0 / CH120

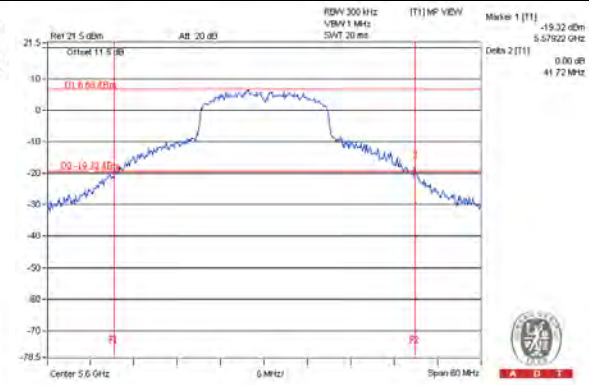

Chain 0 / CH140

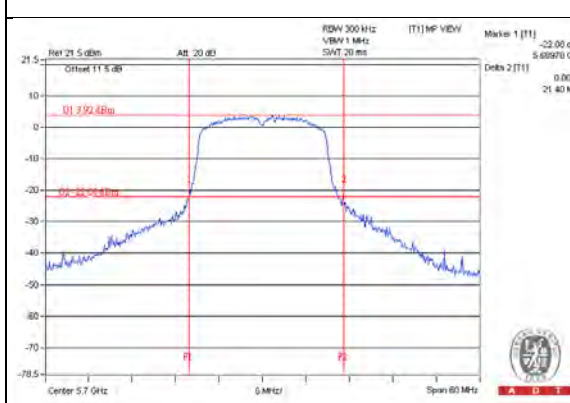


Chain 0 / CH144 (UNII-2c Band) / Chain 0 / CH144 (UNII-3 Band)

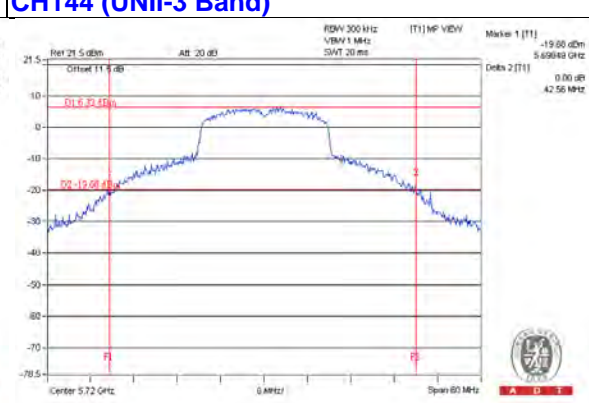


NOTE:

For CH144 (UNII-2c Band) = 5725MHz - Marker 1


Chain 1 / CH36

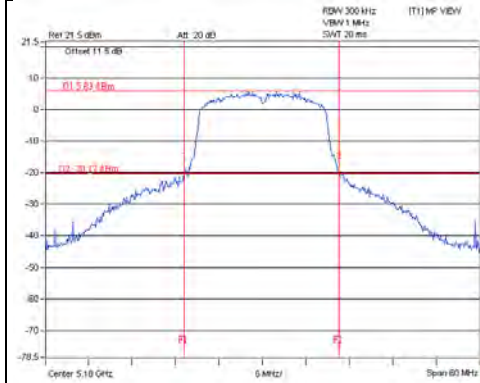


Chain 1 / CH40

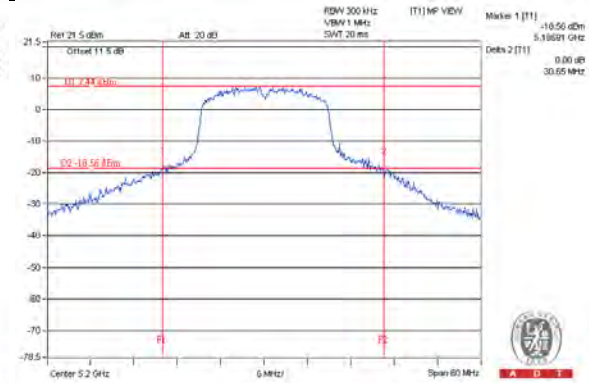


Chain 1 / CH48

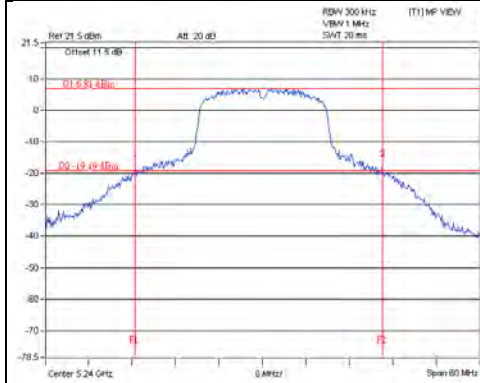


Chain 1 / CH52

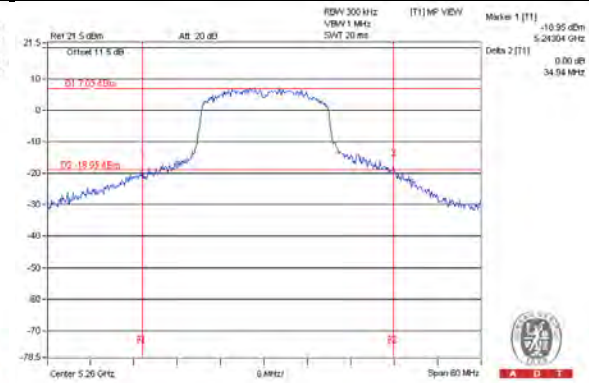


Chain 1 / CH60

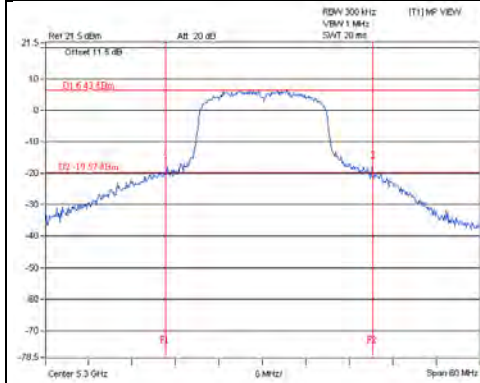


Chain 1 / CH64

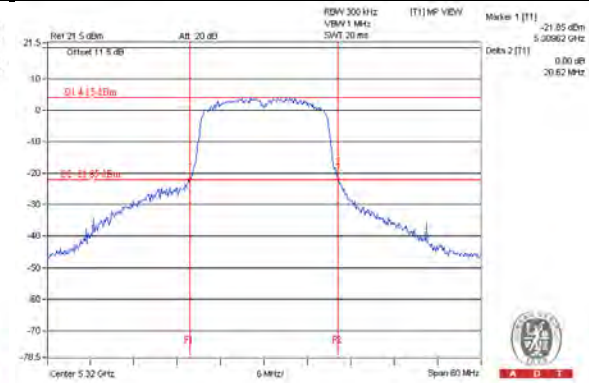


Chain 1 / CH100

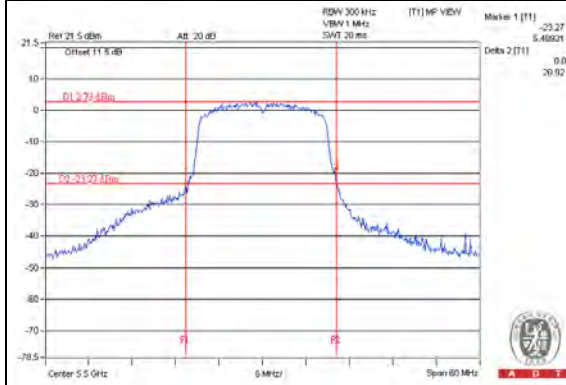


Chain 1 / CH120

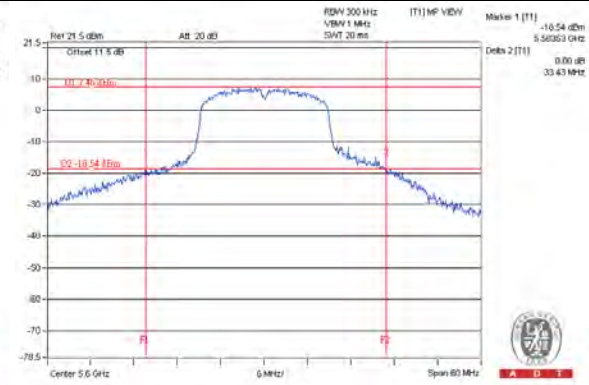

Chain 1 / CH140

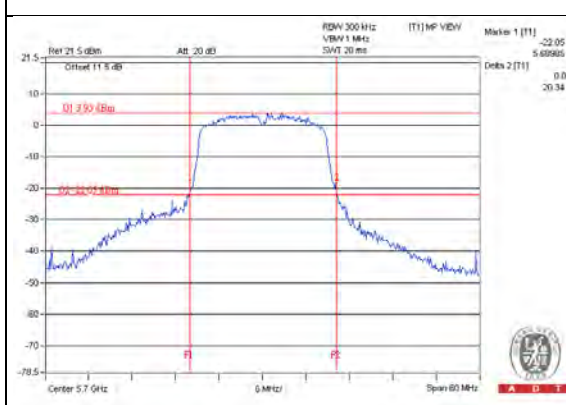

Chain 1 / CH144 (UNII-2c Band) / Chain 1 / CH144 (UNII-3 Band)

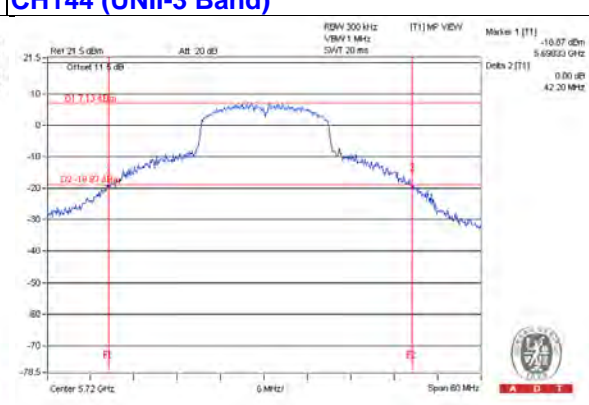

NOTE:

For CH144 (UNII-2c Band) = 5725MHz - Marker 1

For Reference only – Power meter value

The power value was measured by power meter with average sensor.

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
144	5720	15.13	15.33	66.703	18.24

Note: The total power was calculated through formula and record the value for reference only.

802.11ac (VHT40)
POWER OUTPUT

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	8.77	9.76	16.996	12.30	23.91	Pass
46	5230	14.35	14.75	57.081	17.56	23.91	Pass
54	5270	14.33	14.69	56.546	17.52	23.91	Pass
62	5310	9.68	10.88	21.536	13.33	23.91	Pass
102	5510	8.43	9.36	15.596	11.93	22.23	Pass
118	5590	14.42	14.31	54.646	17.38	22.23	Pass
134	5670	11.56	12.23	31.033	14.92	22.23	Pass
*142 (UNII-2c Band)	5710	10.51	10.91	23.577	13.72	22.23	Pass
*142 (UNII-3 Band)	5710	-1.69	-0.91	1.4886	1.73	28.23	Pass
151	5755	9.89	8.52	16.862	12.27	28.23	Pass
159	5795	13.58	13.28	44.084	16.44	28.23	Pass

NOTE:

1. 5150~5250MHz: Directional gain = $3.08\text{dBi} + 10\log(2) = 6.09\text{dBi} > 6\text{dBi}$, therefore the limit needs to reduce, so the power limit shall be reduced to "Determined Conducted Limit-(6.09-6)"
2. 5250~5350MHz: Directional gain = $3.08\text{dBi} + 10\log(2) = 6.09\text{dBi} > 6\text{dBi}$, therefore the limit needs to reduce, so the power limit shall be reduced to "Determined Conducted Limit-(6.09-6)"
3. 5470~5725MHz: Directional gain = $4.76\text{dBi} + 10\log(2) = 7.77\text{dBi} > 6\text{dB}$, therefore the limit needs to reduce, so the power limit shall be reduced to $30-(7.77-6)$.

* Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
*142	5710	25.0656	13.99

Note: The total power was calculated through formula and record the value for reference only.


26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	42.55	42.63
46	5230	81.22	70.45
54	5270	82.17	66.25
62	5310	42.42	44.86
102	5510	42.15	42.05
118	5590	79.90	72.85
134	5670	41.86	52.08
142 (UNII-2c Band)	5710	58.43	49.90


Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
54	5270	66.25	29.21 > 24
62	5310	42.42	27.27 > 24
102	5510	42.05	27.23 > 24
110	5550	72.85	29.62 > 24
134	5670	41.86	27.21 > 24
142 (UNII-2c Band)	5710	49.90	27.98 > 24


Chain 0 / CH38

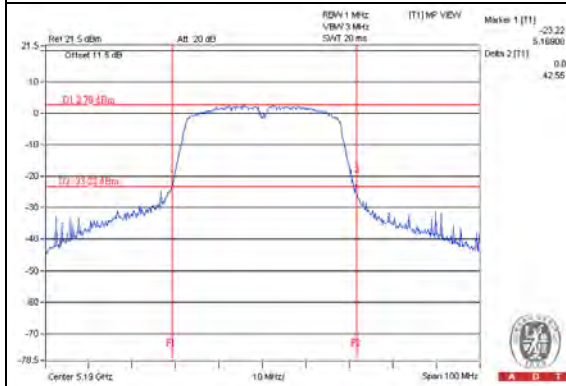


Chain 0 / CH46

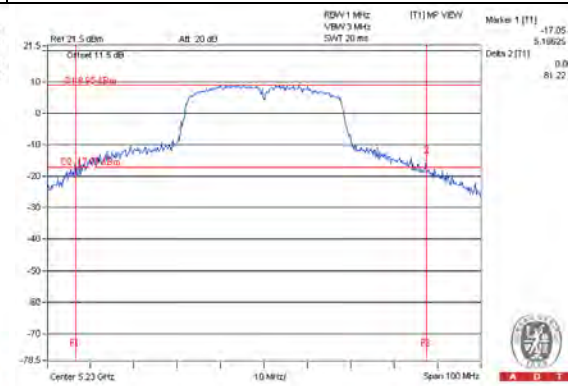


Chain 0 / CH54

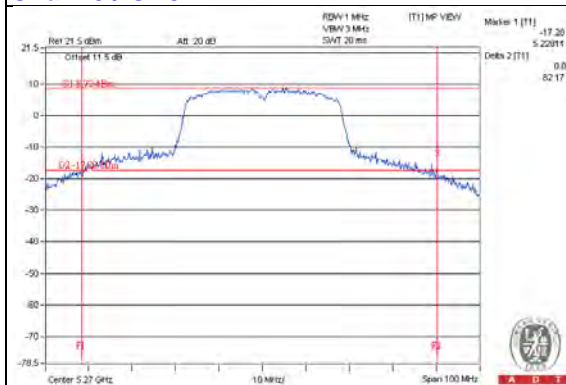


Chain 0 / CH62

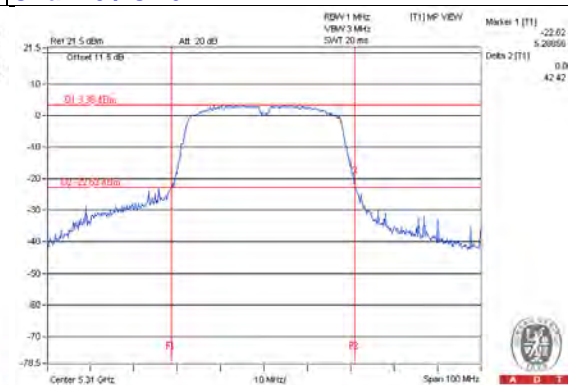


Chain 0 / CH102

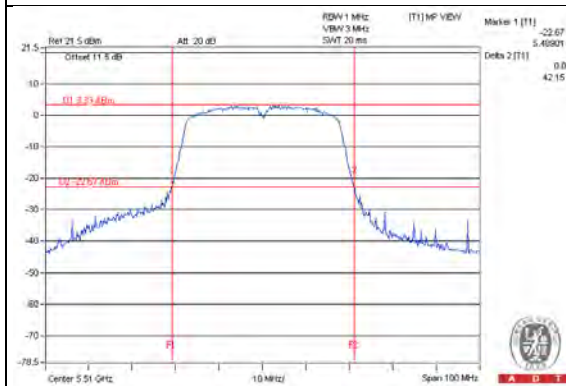


Chain 0 / CH118

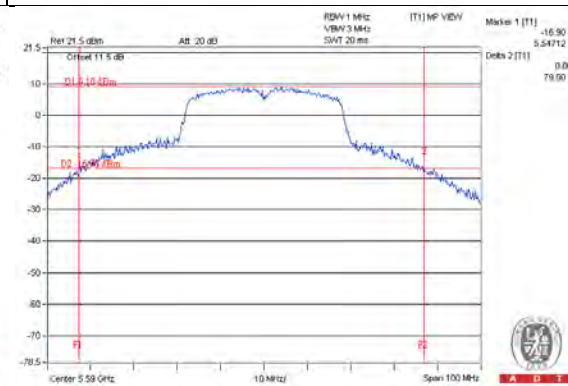

Chain 0 / CH134

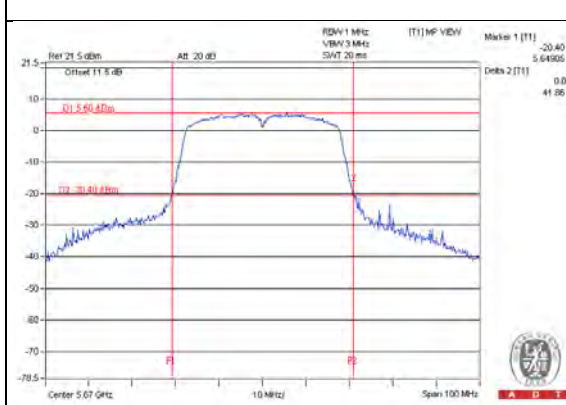


Chain 0 / CH142 (UNII-2c Band) / Chain 0 / CH142 (UNII-3 Band)

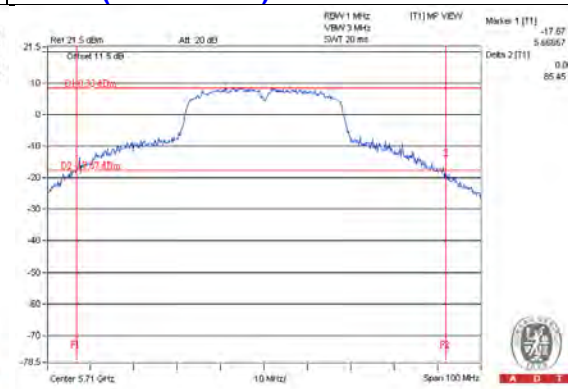


NOTE:

For CH142 (UNII-2c Band) = 5725MHz - Marker 1


Chain 1 / CH38

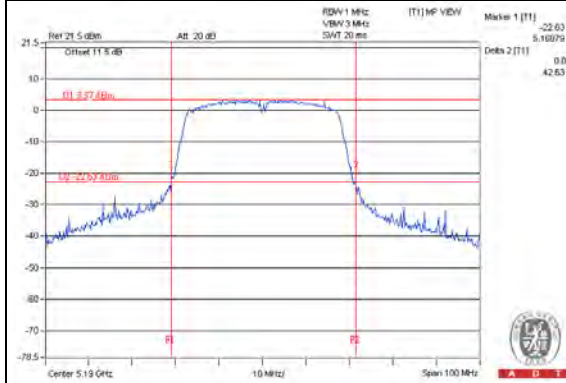


Chain 1 / CH46

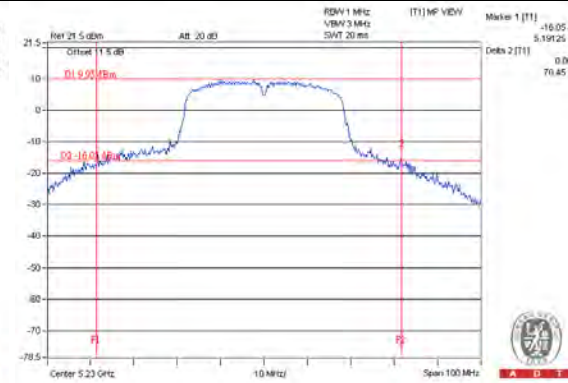


Chain 1 / CH54

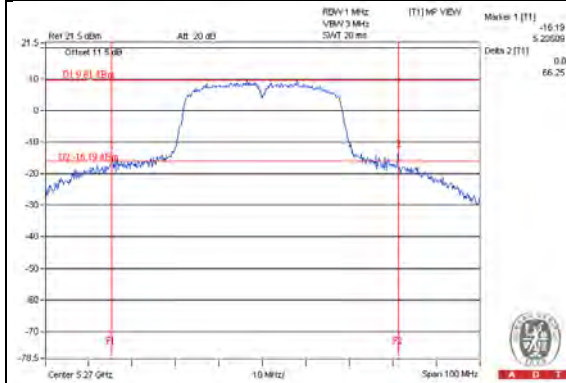


Chain 1 / CH62

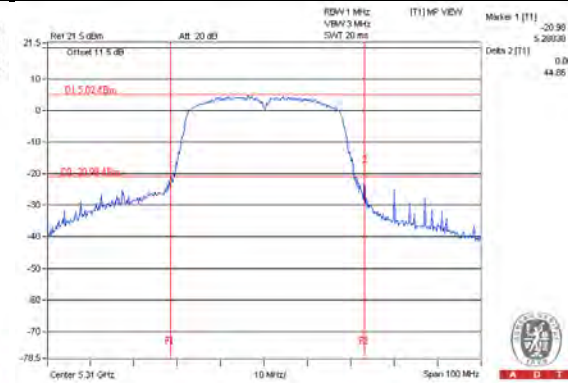


Chain 1 / CH102

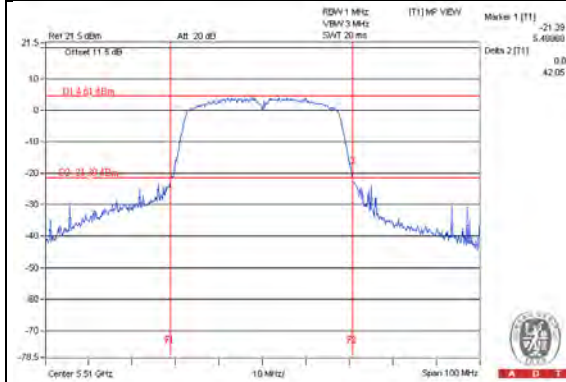


Chain 1 / CH118

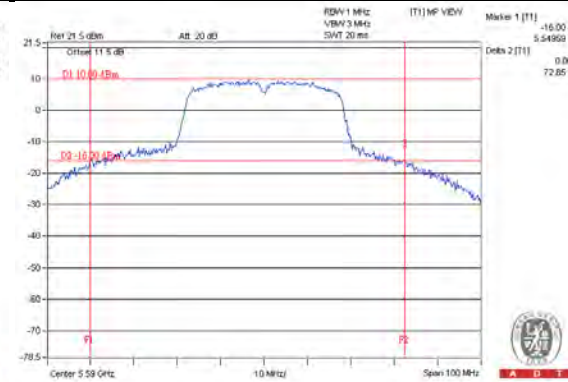

Chain 1 / CH134

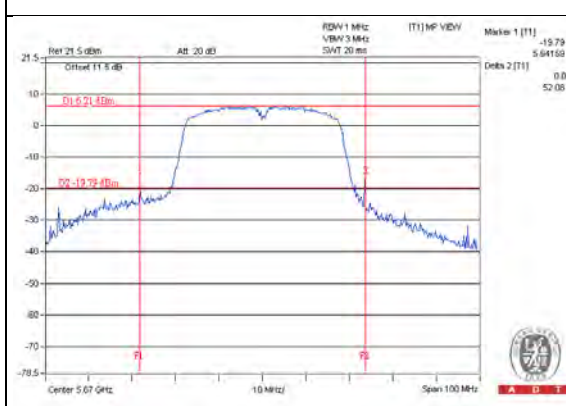

Chain 1 / CH142 (UNII-2c Band) / Chain 1 / CH142 (UNII-3 Band)

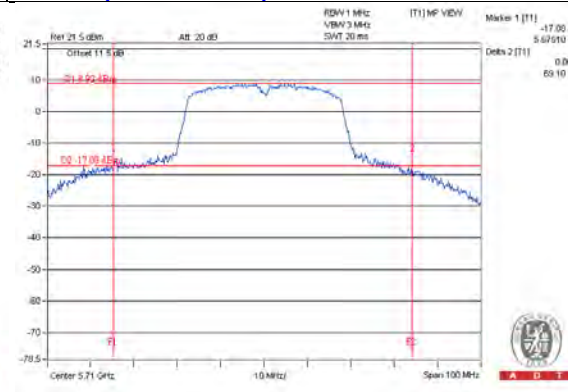

NOTE:

For CH142 (UNII-2c Band) = 5725MHz - Marker 1

For Reference only – Power meter value

The power value was measured by power meter with average sensor.

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
142	5710	14.47	14.51	56.239	17.50

Note: The total power was calculated through formula and record the value for reference only.

802.11ac (VHT80)
POWER OUTPUT

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	6.81	8.46	11.812	10.72	23.91	Pass
58	5290	7.75	9.22	14.313	11.56	23.91	Pass
106	5530	6.83	7.56	10.521	10.22	22.23	Pass
122	5610	12.36	12.92	36.807	15.66	22.23	Pass
*138 (UNII-2c Band)	5690	9.90	9.69	19.083	12.81	22.23	Pass
*138 (UNII-3 Band)	5690	-5.47	-6.75	0.4951	-3.05	28.23	Pass
155	5775	8.33	8.16	13.354	11.26	28.23	Pass

- NOTE:**
1. 5150~5250MHz: Directional gain = $3.08\text{dBi} + 10\log(2) = 6.09\text{dBi} > 6\text{dBi}$, therefore the limit needs to reduce, so the power limit shall be reduced to "Determined Conducted Limit-(6.09-6)"
 2. 5250~5350MHz: Directional gain = $3.08\text{dBi} + 10\log(2) = 6.09\text{dBi} > 6\text{dBi}$, therefore the limit needs to reduce, so the power limit shall be reduced to "Determined Conducted Limit-(6.09-6)"
 3. 5470~5725MHz: Directional gain = $4.76\text{dBi} + 10\log(2) = 7.77\text{dBi} > 6\text{dB}$, therefore the limit needs to reduce, so the power limit shall be reduced to 30-(7.77-6).

* Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
138	5690	19.5781	12.92

Note: The total power was calculated through formula and record the value for reference only.


26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	84.06	83.78
58	5290	83.99	83.91
106	5530	84.32	82.18
122	5610	117.56	108.06
138 (UNII-2c Band)	5690	113.42	96.45


Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
58	5290	83.91	30.23 > 24
106	5530	82.18	30.14 > 24
122	5610	108.06	31.33 > 24
138 (UNII-2c Band)	5690	96.45	30.84 > 24


Chain 0 / CH42

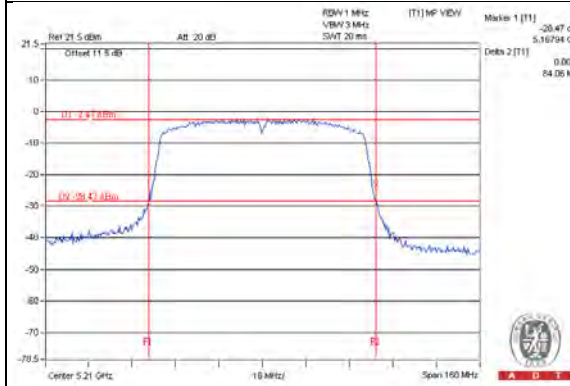


Chain 0 / CH58

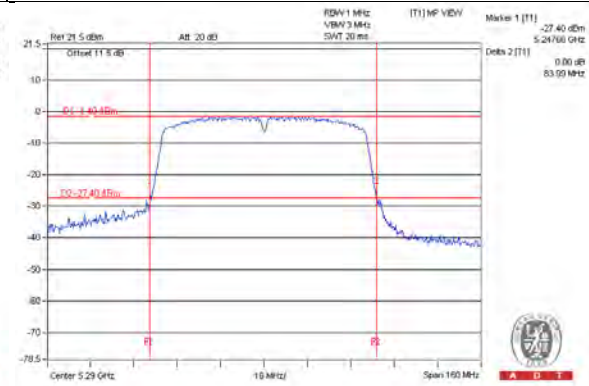


Chain 0 / CH106

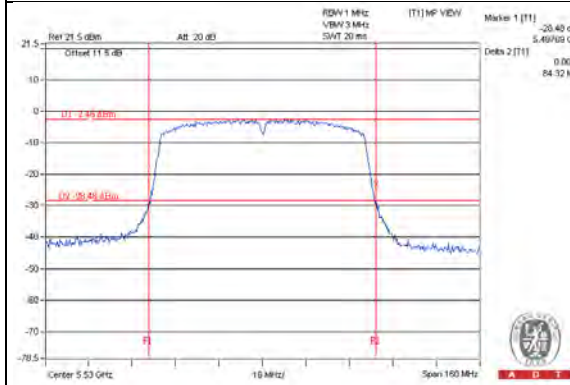

Chain 0 / CH122

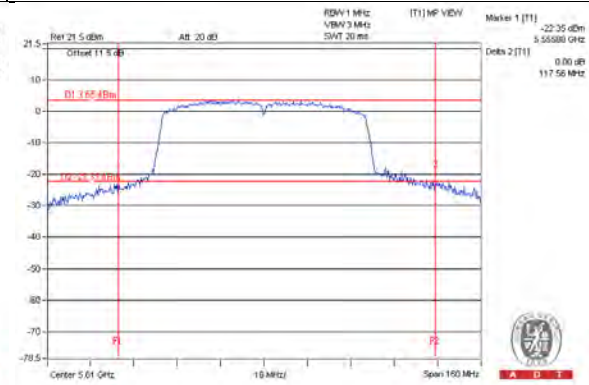


Chain 0 / CH138 (UNII-2c Band) / Chain 0 / CH138 (UNII-3 Band)

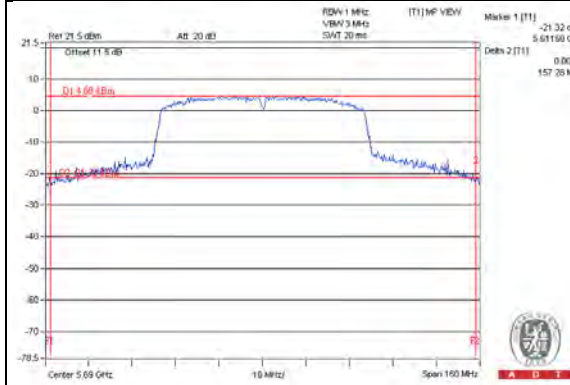


NOTE:

For CH138 (UNII-2c Band) = 5725MHz - Marker 1


Chain 1 / CH42

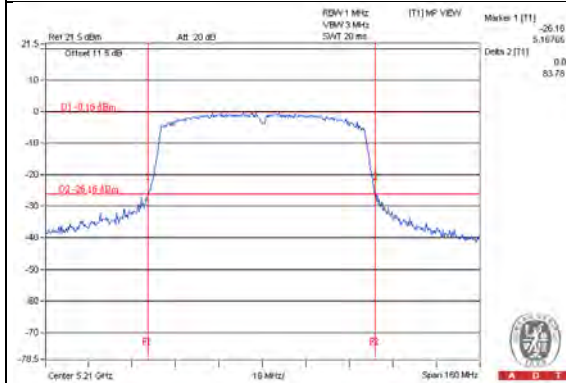


Chain 1 / CH58

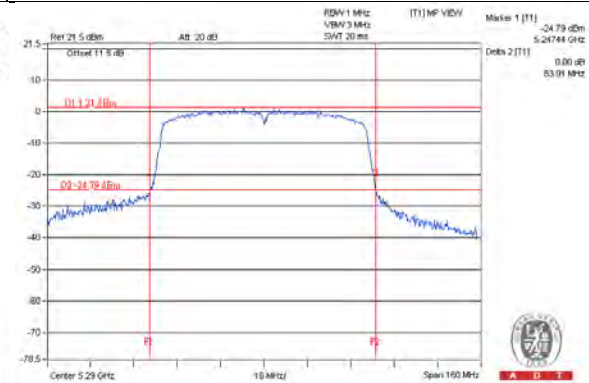


Chain 1 / CH106

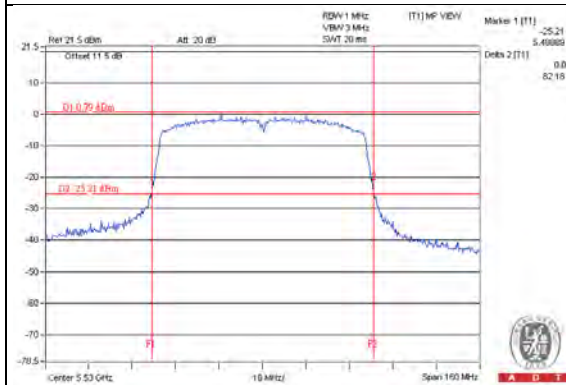

Chain 1 / CH122

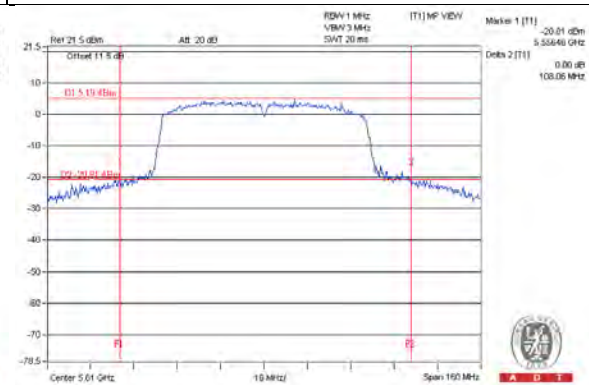

Chain 1 / CH138 (UNII-2c Band) / Chain 1 / CH138 (UNII-3 Band)

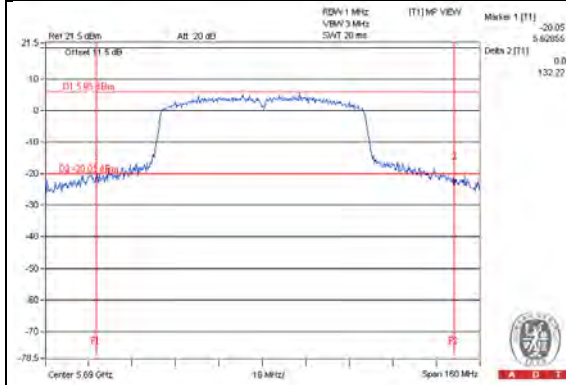

NOTE:

For CH138 (UNII-2c Band) = 5725MHz - Marker 1

For Reference only – Power meter value

The power value was measured by power meter with average sensor.

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
138	5690	13.94	13.66	48.001	16.81


Note: The total power was calculated through formula and record the value for reference only.

4.2 Peak Power Spectral Density Measurement

4.2.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Mobile and Portable client device	11dBm/ MHz
U-NII-2A		√	11dBm/ MHz
U-NII-2C		√	11dBm/ MHz
U-NII-3		√	30dBm/ 500kHz

4.2.2 Test Setup



4.2.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 19, 2015

4.2.4 Test Procedures

For U-NII-1, U-NII-2A & U-NII-2C:

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.







4.2.7 Test Results

For U-NII-1, U-NII-2A & U-NII-2C:


802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm)		Total Power Density (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
36	5180	-1.36	-0.18	2.28	10.91	Pass
40	5200	1.19	2.13	4.70	10.91	Pass
48	5240	1.41	1.98	4.71	10.91	Pass
52	5260	1.30	1.95	4.65	10.91	Pass
60	5300	1.20	2.07	4.67	10.91	Pass
64	5320	-1.47	0.03	2.35	10.91	Pass
100	5500	-2.52	-1.26	1.17	9.23	Pass
120	5600	1.21	1.61	4.42	9.23	Pass
140	5700	-2.01	-2.42	0.80	9.23	Pass
144 (UNII-2c Band)	5720	1.38	1.67	4.54	9.23	Pass


- NOTE:**
1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 2. 5150~5250MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi , so the power density limit shall be reduced to 11-(6.09-6) = 10.91dBm.
 3. 5250~5350MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi, so the power density limit shall be reduced to 11-(6.09-6) = 10.91dBm.
 4. 5470~5725MHz: Directional gain = 4.76dBi + 10log(2) = 7.77dBi > 6dB, so the power density limit shall be reduced to 11-(7.77-6) = 9.23dBm.

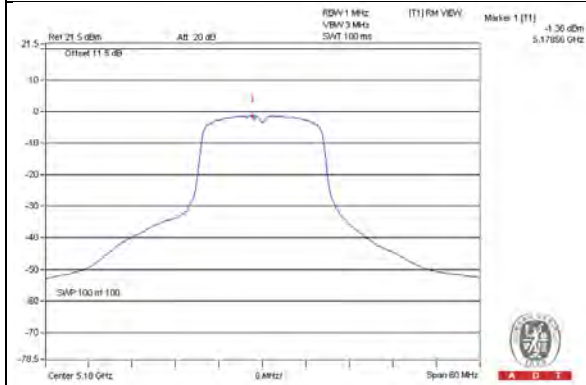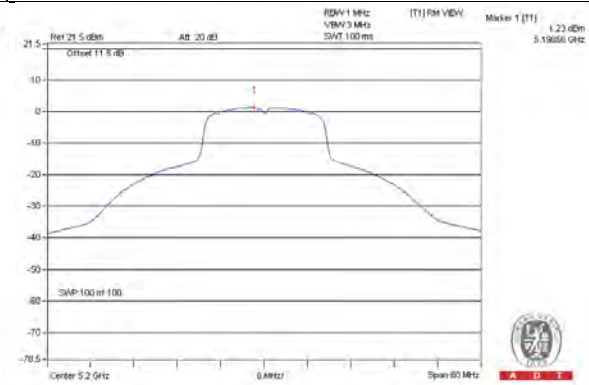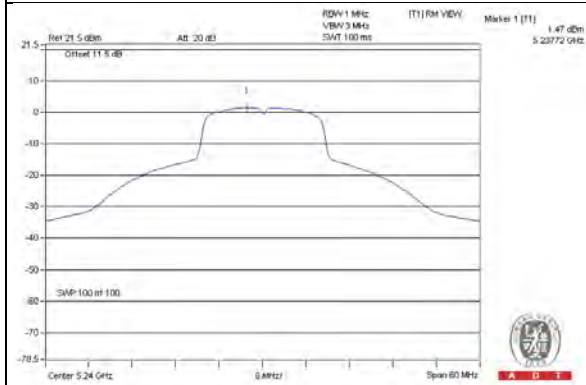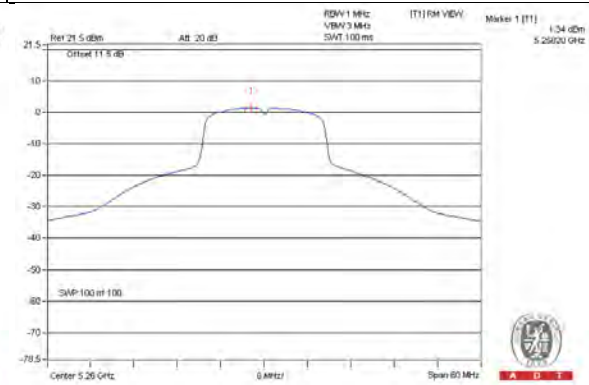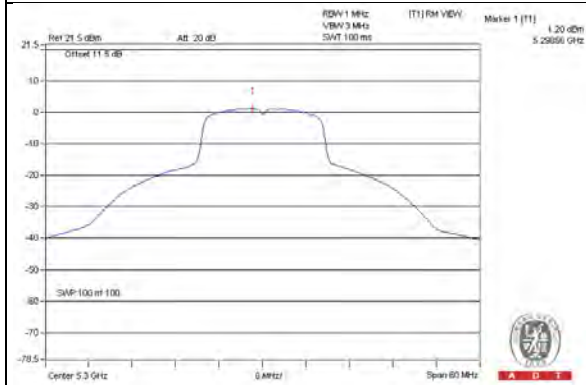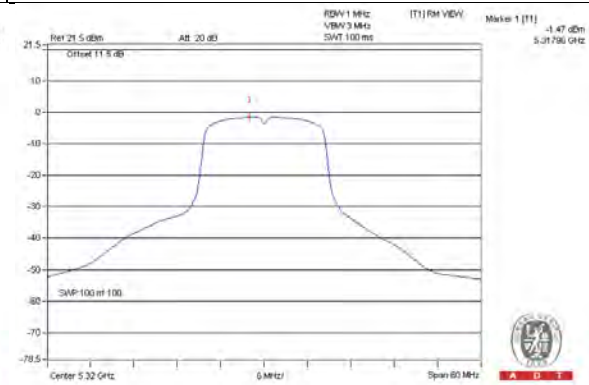Chain 0 / CH36**Chain 0 / CH40****Chain 0 / CH48****Chain 0 / CH52****Chain 0 / CH60****Chain 0 / CH64**


Chain 0 / CH100

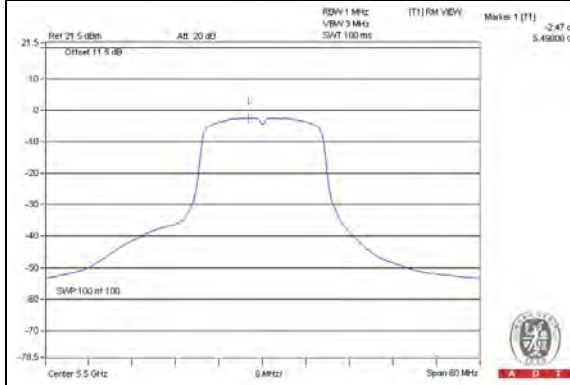


Chain 0 / CH120






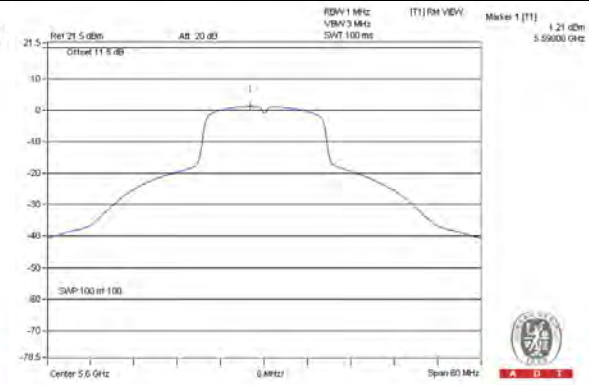


Chain 0 / CH140

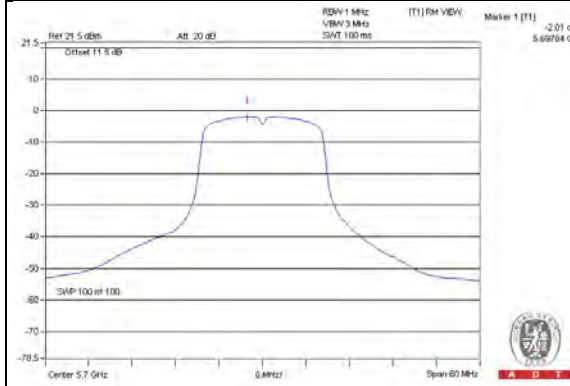


Chain 0 / CH144 (UNII-2c Band)

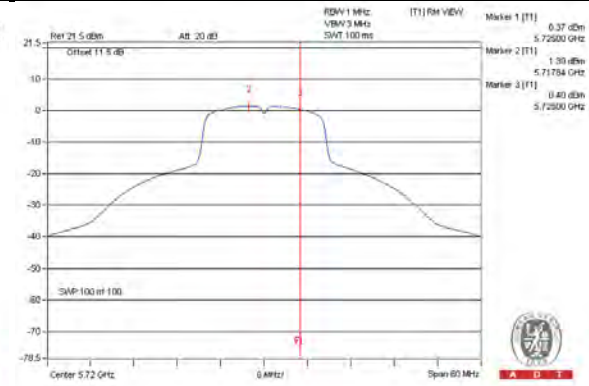


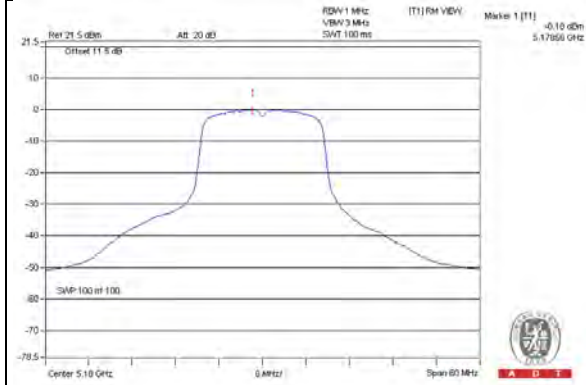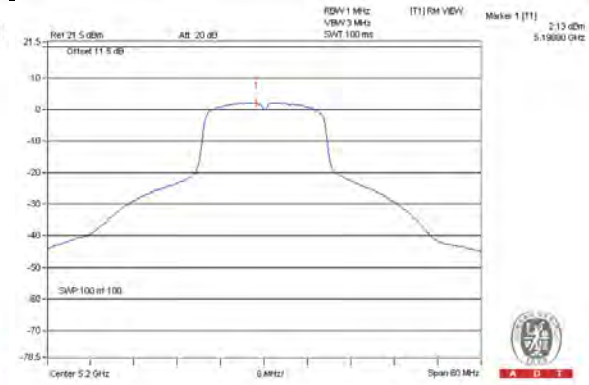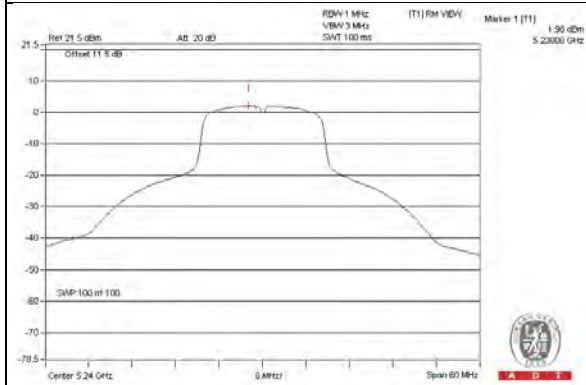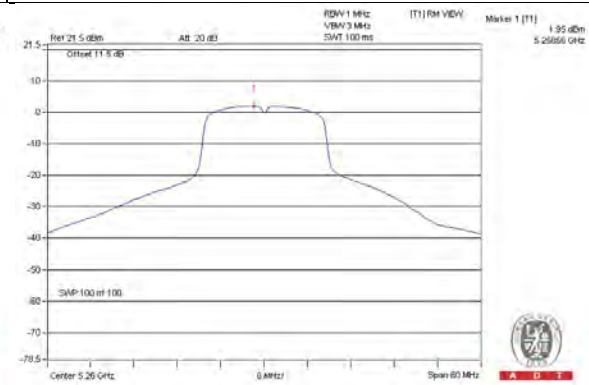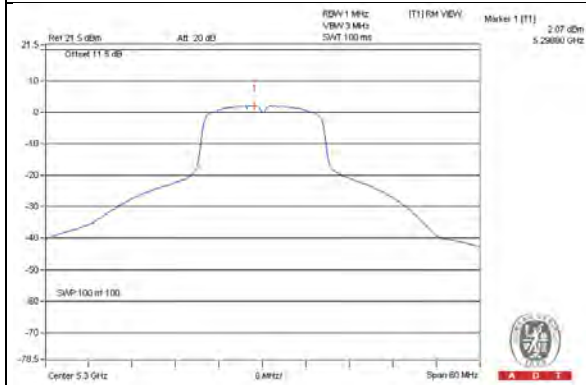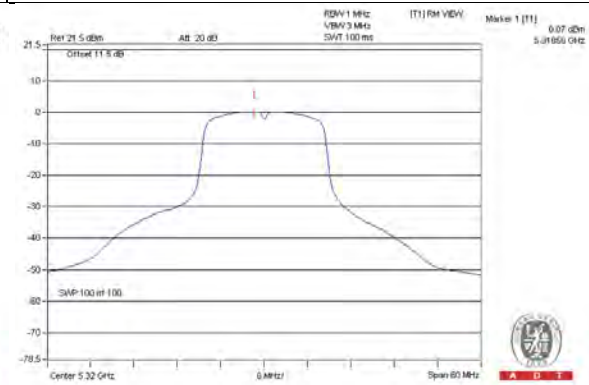Chain 1 / CH36**Chain 1 / CH40****Chain 1 / CH48****Chain 1 / CH52****Chain 1 / CH60****Chain 1 / CH64**


Chain 1 / CH100

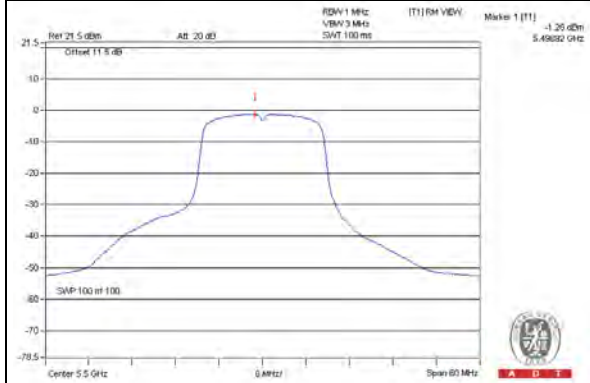


Chain 1 / CH120

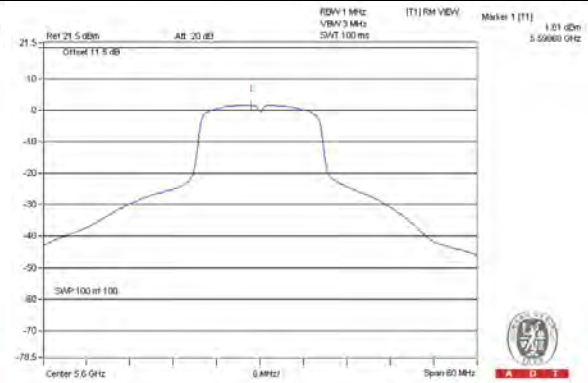

Chain 1 / CH140

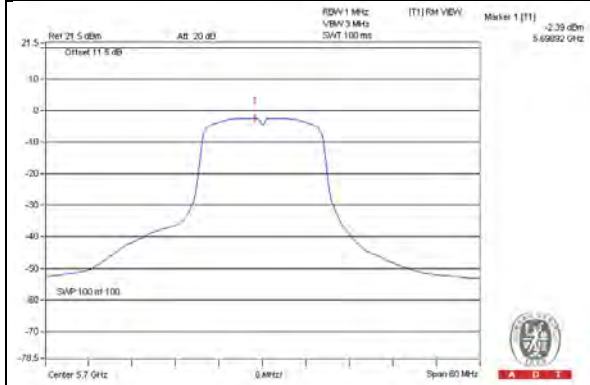

Chain 1 / CH144 (UNII-2c Band)

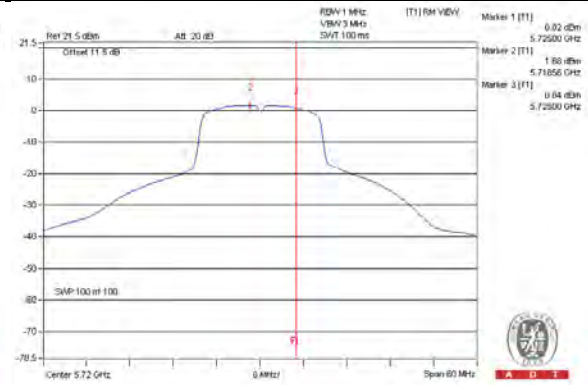


802.11ac (VHT20)


Chan.	Chan. Freq. (MHz)	PSD (dBm)		Total Power Density (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
36	5180	-1.15	0.22	2.60	10.91	Pass
40	5200	1.20	1.66	4.45	10.91	Pass
48	5240	1.47	1.79	4.64	10.91	Pass
52	5260	1.42	1.61	4.53	10.91	Pass
60	5300	1.04	1.29	4.18	10.91	Pass
64	5320	-1.87	-1.08	1.55	10.91	Pass
100	5500	-2.83	-2.67	0.26	9.23	Pass
120	5600	0.80	1.96	4.43	9.23	Pass
140	5700	-1.36	-1.62	1.52	9.23	Pass
144 (UNII-2c Band)	5720	1.10	1.60	4.37	9.23	Pass

- NOTE:**
1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 2. 5150~5250MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi , so the power density limit shall be reduced to 11-(6.09-6) = 10.91dBm.
 3. 5250~5350MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi, so the power density limit shall be reduced to 11-(6.09-6) = 10.91dBm.
 4. 5470~5725MHz: Directional gain = 4.76dBi + 10log(2) = 7.77dBi > 6dB, so the power density limit shall be reduced to 11-(7.77-6) = 9.23dBm.


Chain 0 / CH36

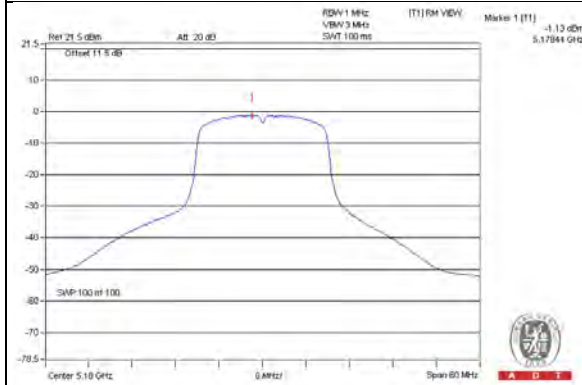


Chain 0 / CH40

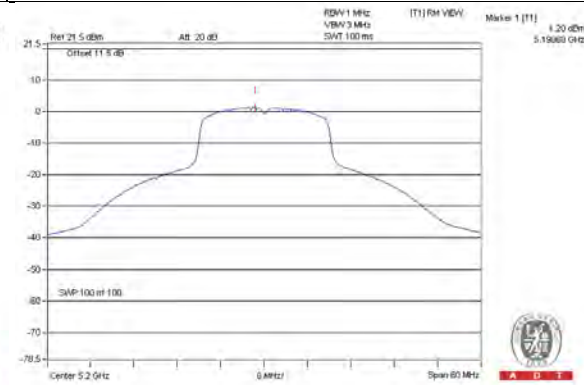


Chain 0 / CH48

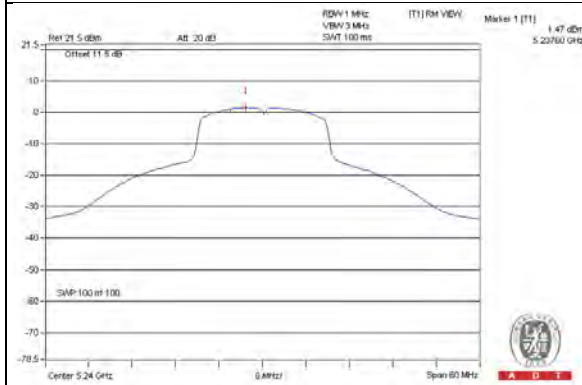


Chain 0 / CH52

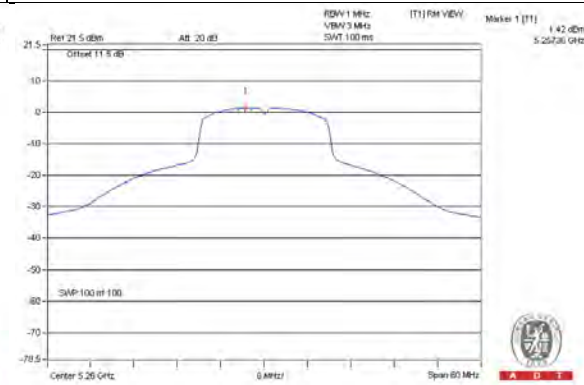


Chain 0 / CH60

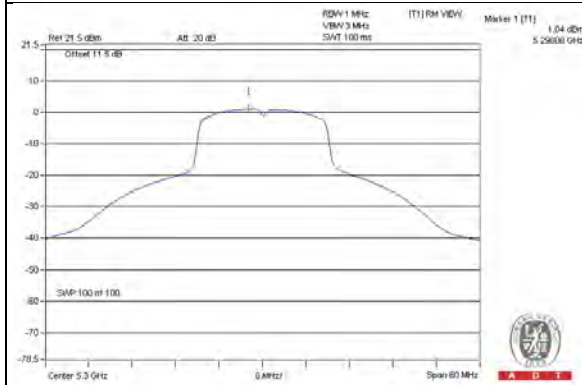


Chain 0 / CH64

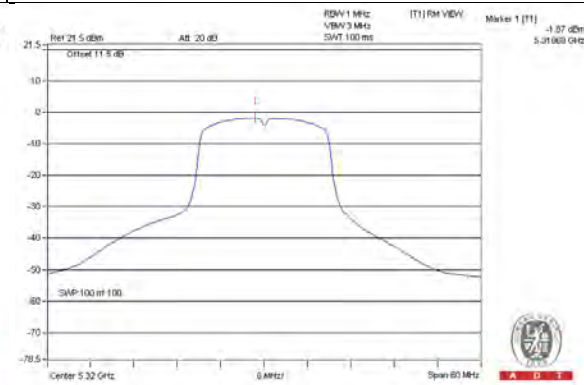


Chain 0 / CH100

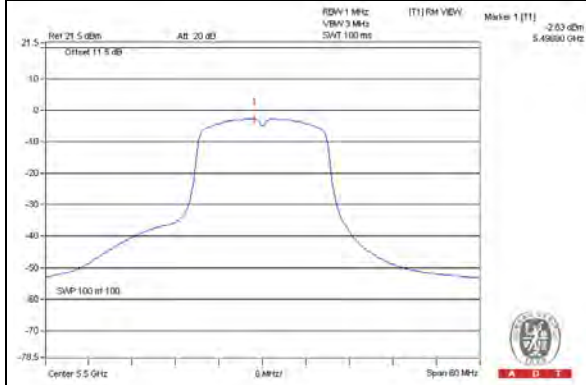


Chain 0 / CH120






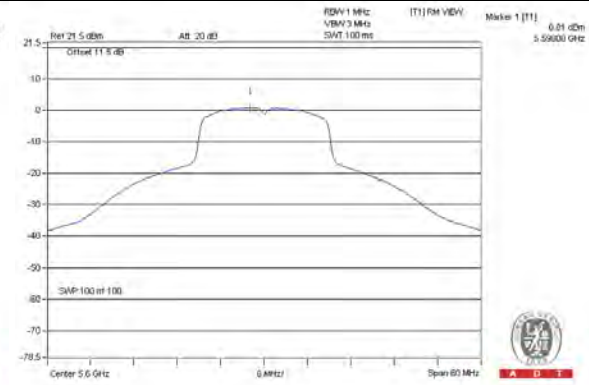


Chain 0 / CH140

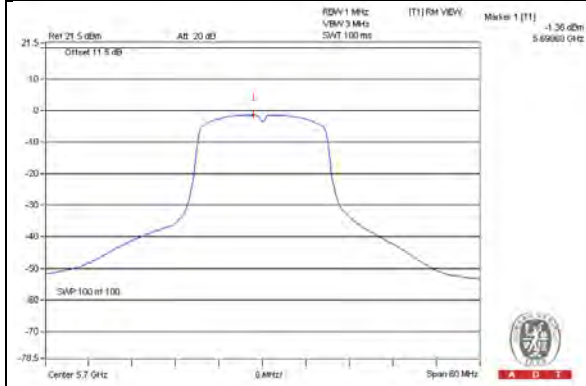


Chain 0 / CH144 (UNII-2c Band)

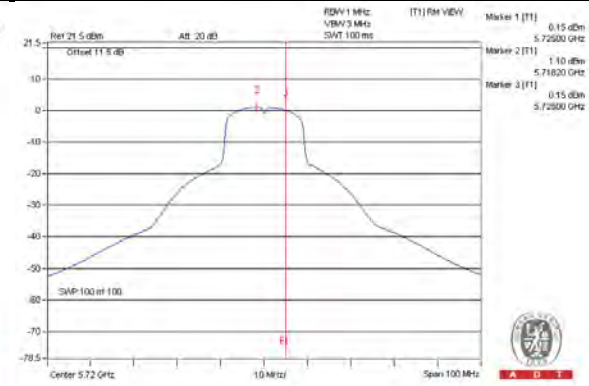


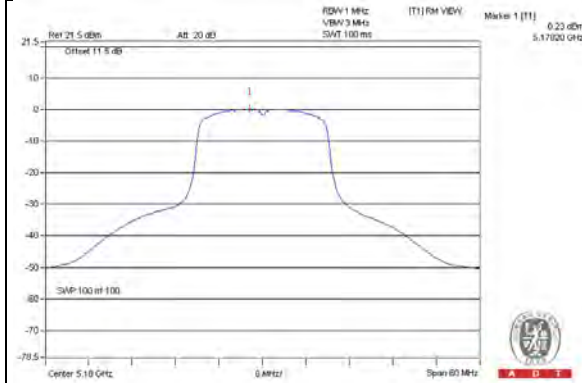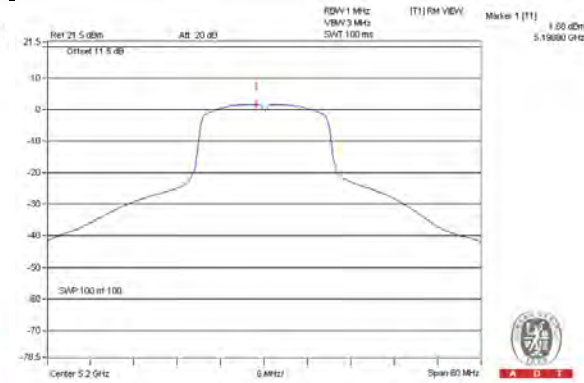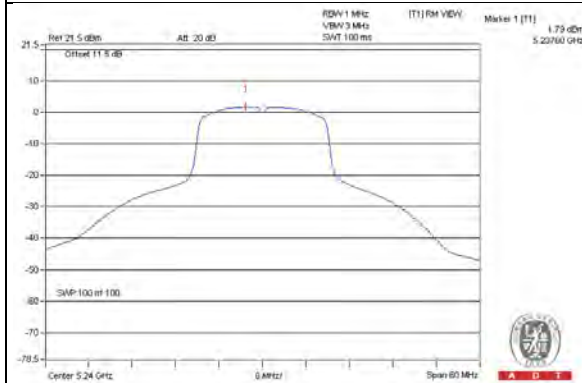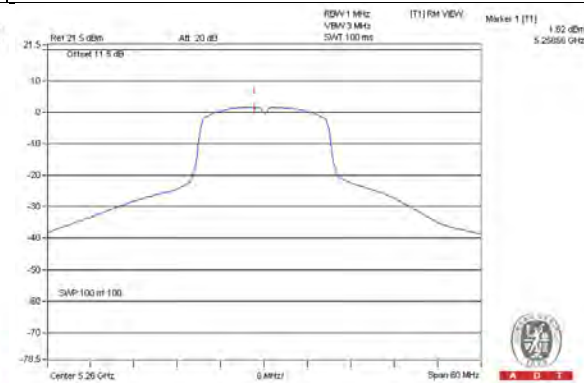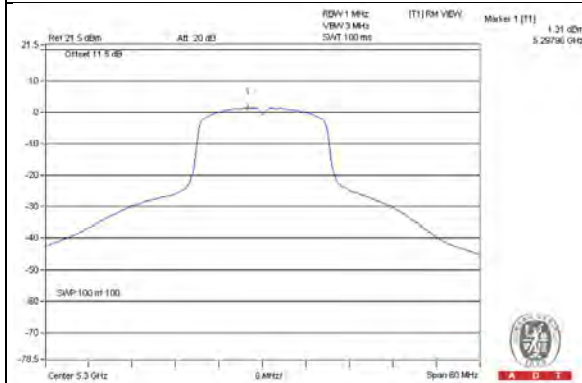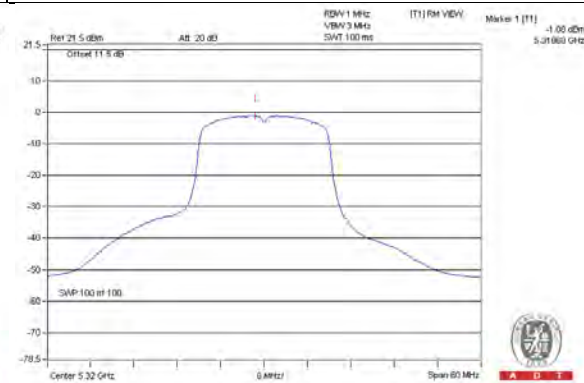Chain 1 / CH36**Chain 1 / CH40****Chain 1 / CH48****Chain 1 / CH52****Chain 1 / CH60****Chain 1 / CH64**


Chain 1 / CH100

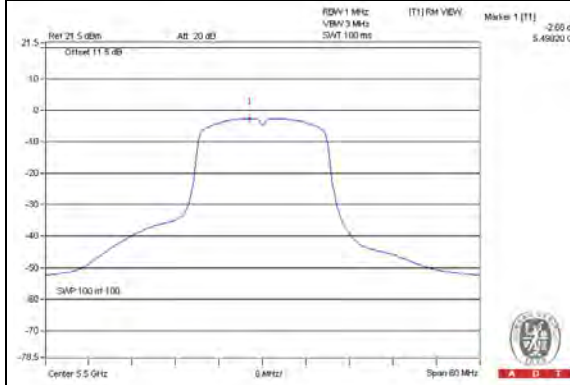


Chain 1 / CH120

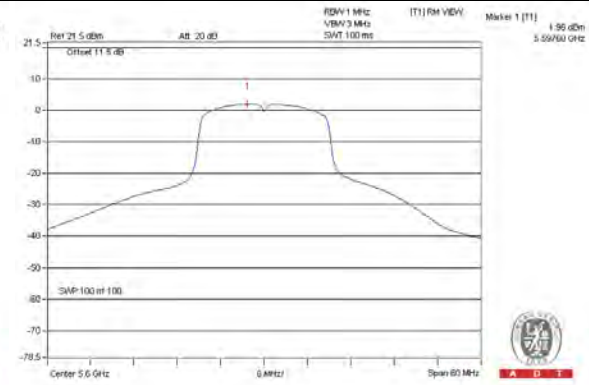

Chain 1 / CH140

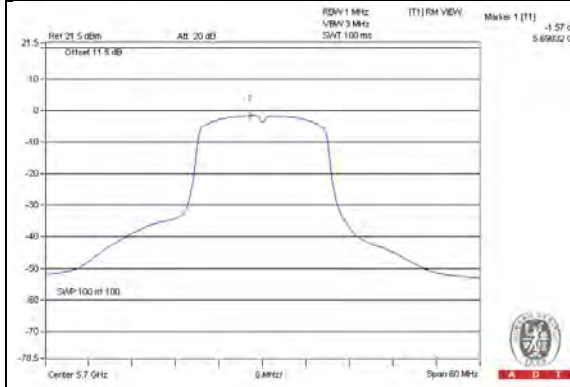









Chain 1 / CH144 (UNII-2c Band)

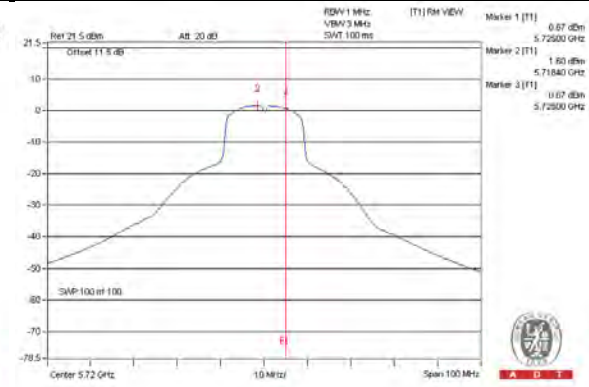


802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm)		Total Power Density (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
38	5190	-8.49	-7.60	-5.01	10.91	Pass
46	5230	-2.11	-1.82	1.05	10.91	Pass
54	5270	-2.49	-2.40	0.57	10.91	Pass
62	5310	-7.66	-6.66	-4.12	10.91	Pass
102	5510	-8.04	-7.12	-4.55	9.23	Pass
118	5590	-2.64	-1.77	0.83	9.23	Pass
134	5670	-5.78	-4.95	-2.34	9.23	Pass
142 (UNII-2c Band)	5710	-2.76	-2.33	0.47	9.23	Pass


- NOTE:**
1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 2. 5150~5250MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi , so the power density limit shall be reduced to 11-(6.09-6) = 10.91dBm.
 3. 5250~5350MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi, so the power density limit shall be reduced to 11-(6.09-6) = 10.91dBm.
 4. 5470~5725MHz: Directional gain = 4.76dBi + 10log(2) = 7.77dBi > 6dB, so the power density limit shall be reduced to 11-(7.77-6) = 9.23dBm.

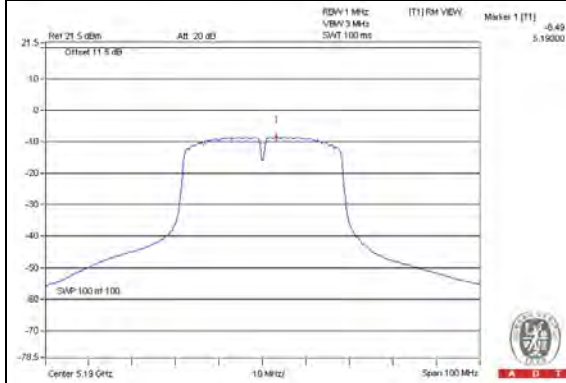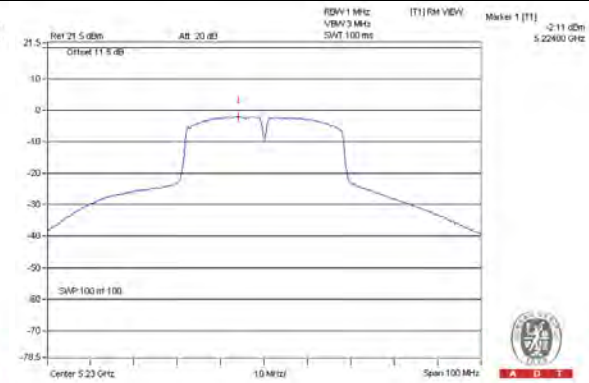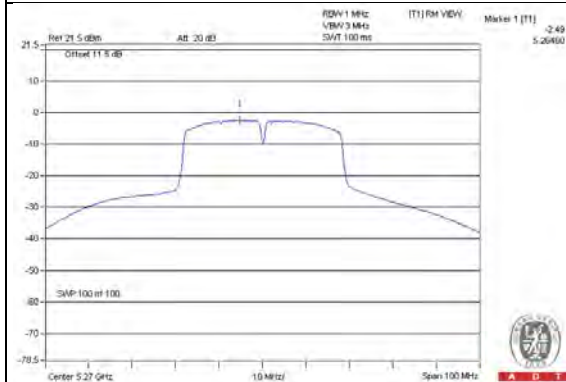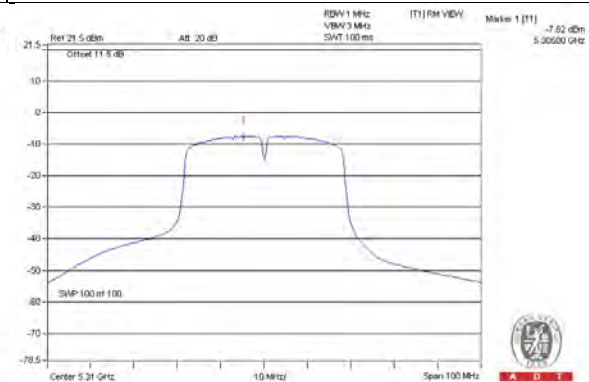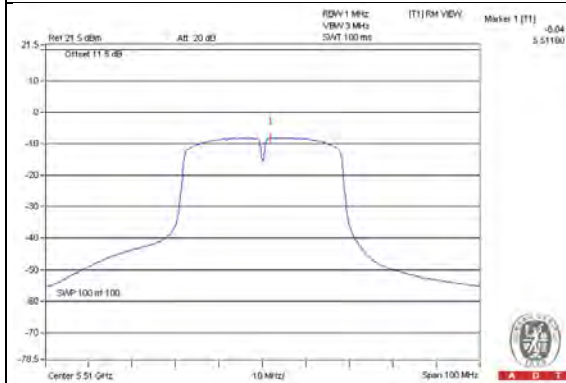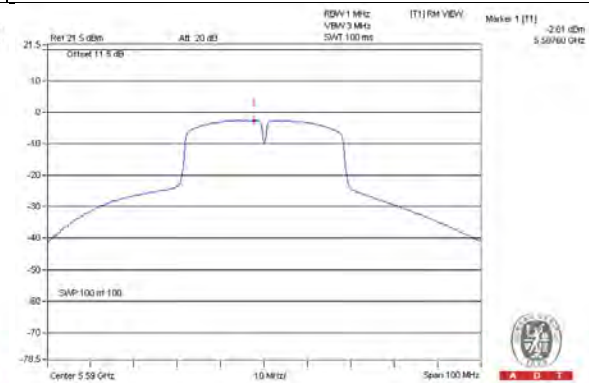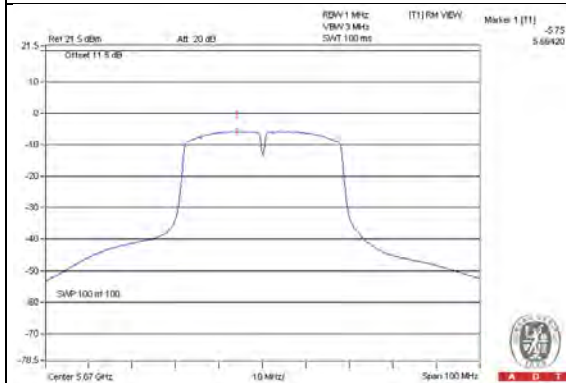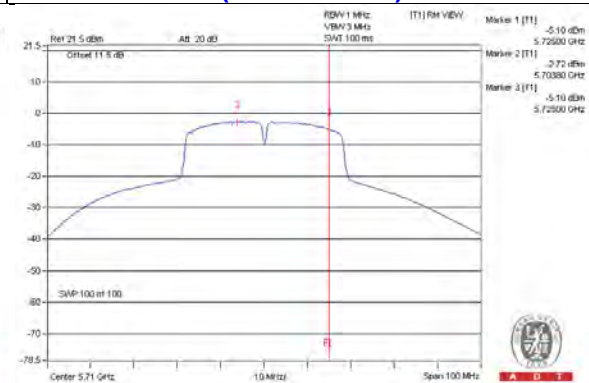Chain 0 / CH38

Chain 0 / CH46

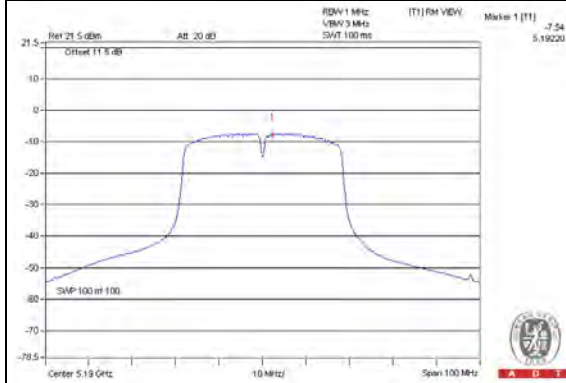Chain 0 / CH54

Chain 0 / CH62

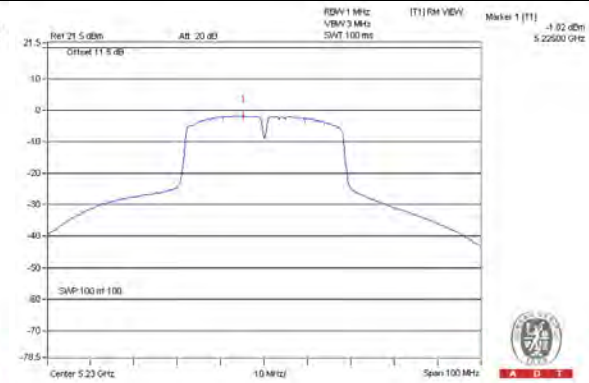Chain 0 / CH102

Chain 0 / CH118

Chain 0 / CH134

Chain 0 / CH142 (UNII-2c Band)


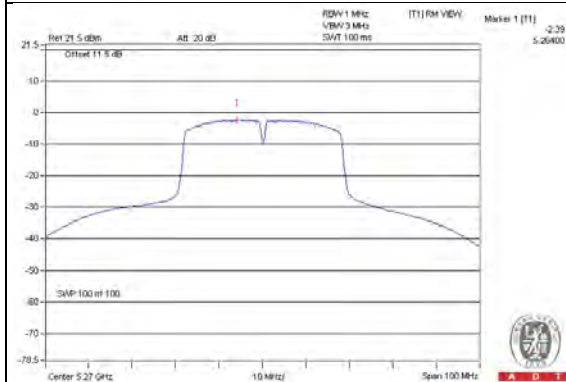
Chain 1 / CH38




Chain 1 / CH46




Chain 1 / CH54




Chain 1 / CH62

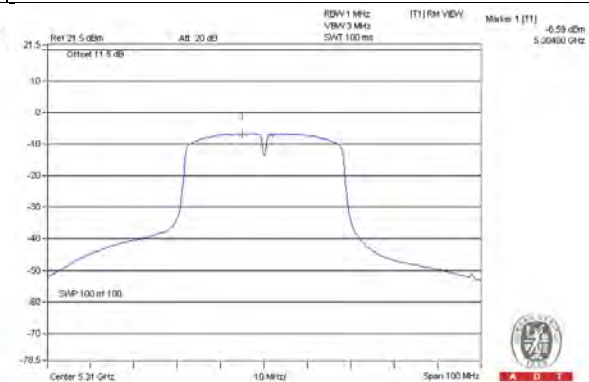


Chain 1 / CH102

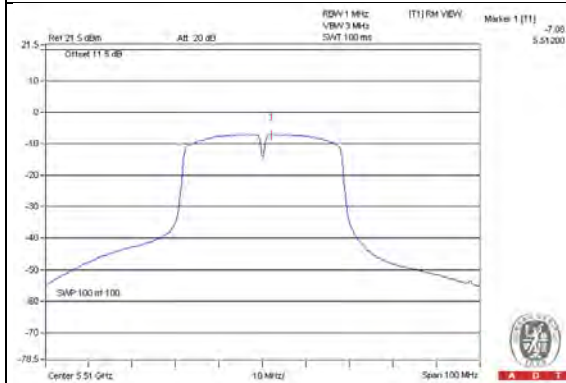


Chain 1 / CH118

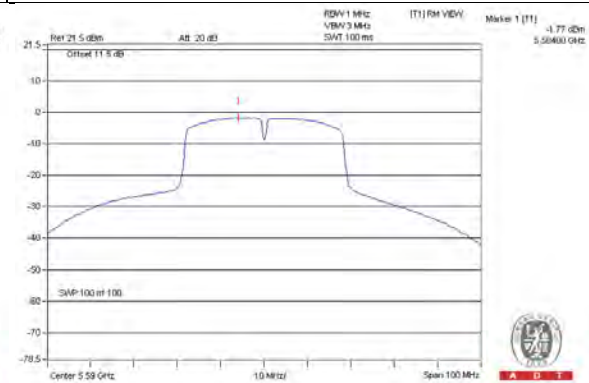

Chain 1 / CH134

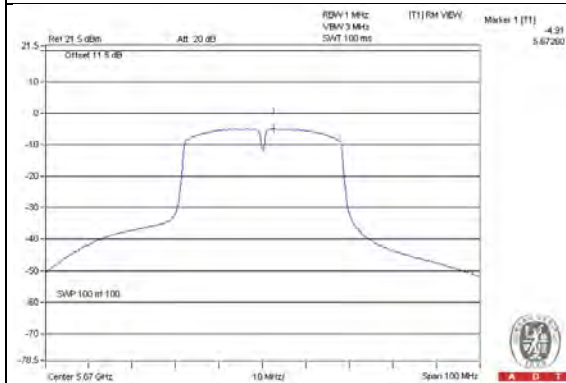

Chain 1 / CH142 (UNII-2c Band)

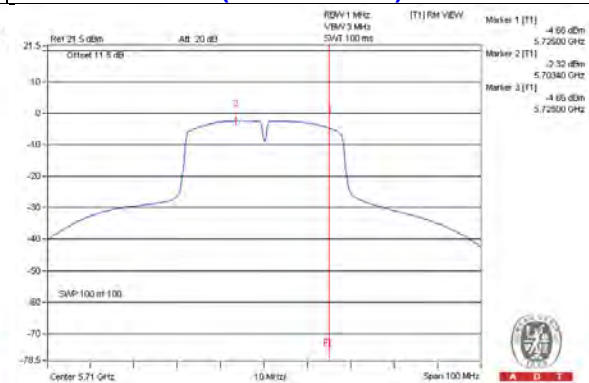


802.11ac (VHT80):


Chan.	Chan. Freq. (MHz)	PSD (dBm)		Total Power Density (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
42	5210	-13.58	-11.58	-9.45	10.91	Pass
58	5290	-12.84	-10.73	-8.65	10.91	Pass
106	5530	-13.63	-12.31	-9.91	9.23	Pass
122	5610	-7.65	-7.09	-4.35	9.23	Pass
138 (UNII-2c Band)	5690	-6.76	-6.75	-3.74	9.23	Pass

- NOTE:**
1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 2. 5150~5250MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi , so the power density limit shall be reduced to 11-(6.09-6) = 10.91dBm.
 3. 5250~5350MHz: Directional gain = 3.08dBi + 10log(2) = 6.09dBi > 6dBi, so the power density limit shall be reduced to 11-(6.09-6) = 10.91dBm.
 4. 5470~5725MHz: Directional gain = 4.76dBi + 10log(2) = 7.77dBi > 6dB, so the power density limit shall be reduced to 11-(7.77-6) = 9.23dBm.


Chain 0 / CH42

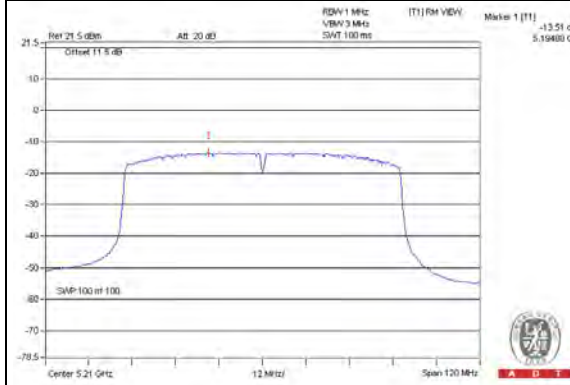


Chain 0 / CH58

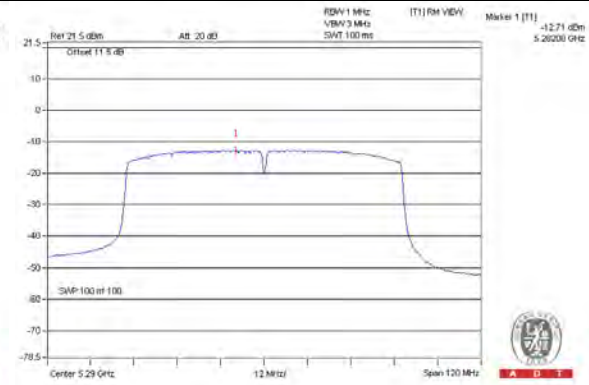


Chain 0 / CH106

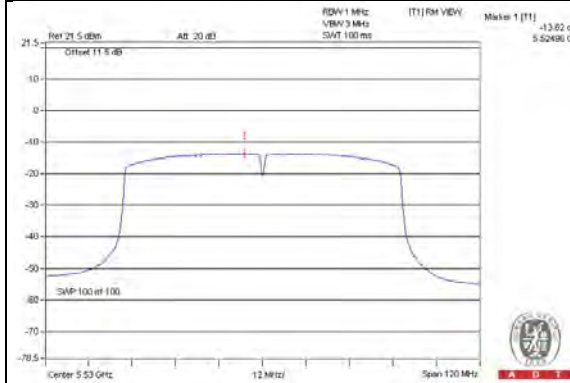


Chain 0 / CH122

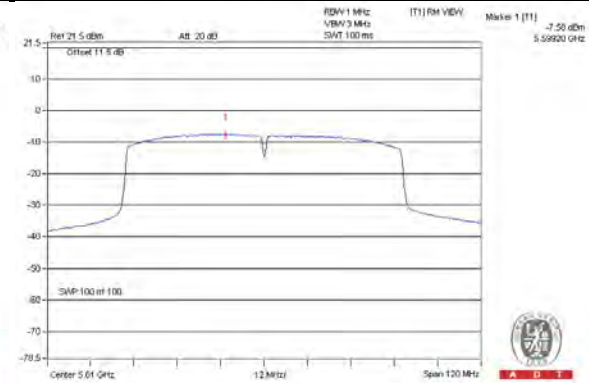


Chain 0 / CH138 (UNII-2c Band)

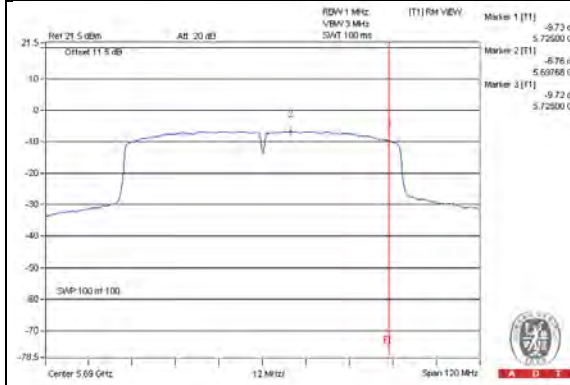


Chain 1 / CH42

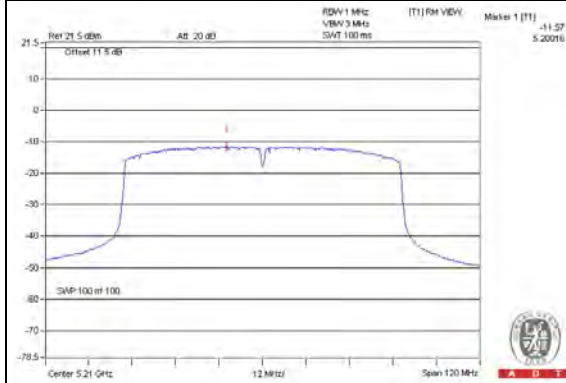


Chain 1 / CH58

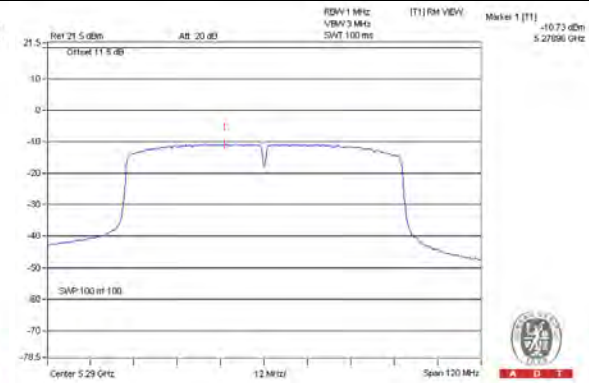


Chain 1 / CH106

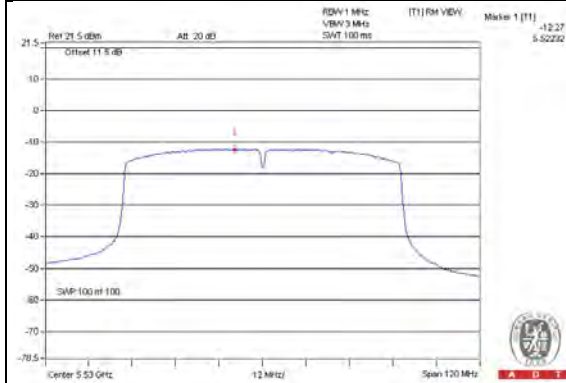

Chain 1 / CH122

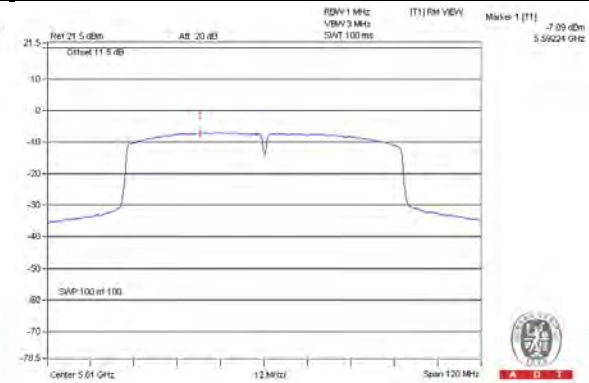

Chain 1 / CH138 (UNII-2c Band)

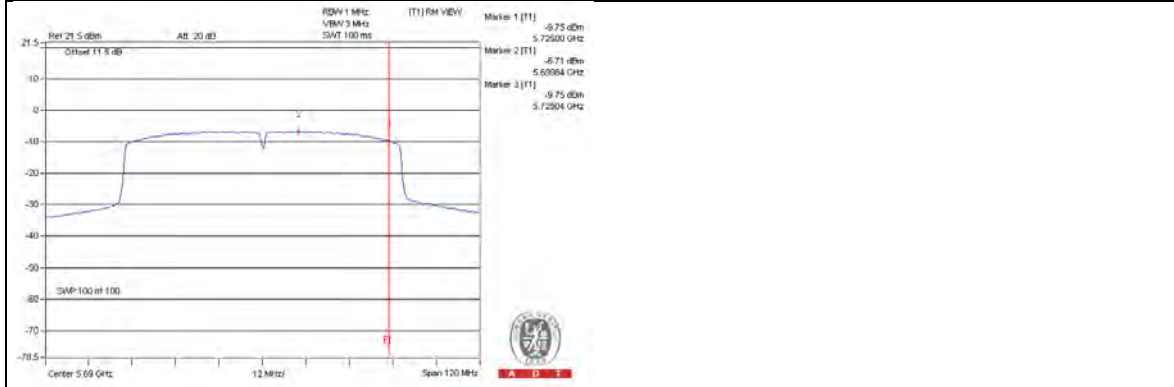


For U-NII-3:
802.11a


TX chain	Chan.	Chan. Freq. (MHz)	PSD		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	144 (UNII-3 Band)	5720	-7.48	-5.26	3.01	-2.25	28.23	Pass
	149	5745	-8.23	-6.01	3.01	-3.00	28.23	Pass
	157	5785	-6.51	-4.29	3.01	-1.28	28.23	Pass
	165	5825	-7.48	-5.26	3.01	-2.25	28.23	Pass
1	144 (UNII-3 Band)	5720	-7.90	-5.68	3.01	-2.67	28.23	Pass
	149	5745	-8.98	-6.76	3.01	-3.75	28.23	Pass
	157	5785	-6.53	-4.31	3.01	-1.30	28.23	Pass
	165	5825	-6.95	-4.73	3.01	-1.72	28.23	Pass

NOTE: 1. 5725~5850MHz: Directional gain = $4.76\text{dBi} + 10\log(2) = 7.77\text{dBi} > 6\text{dB}$, so the power density limit shall be reduced to $30 - (7.77 - 6) = 28.23\text{dBm}$.


Chain 0 / CH144 (UNII-3 Band)

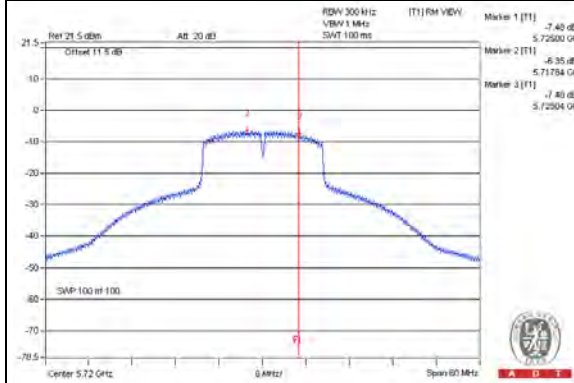


Chain 0 / CH149

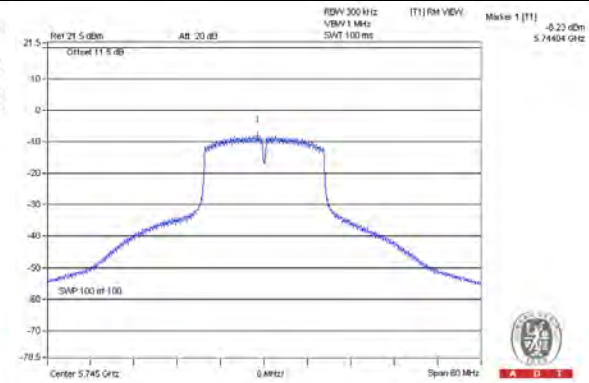


Chain 0 / CH157

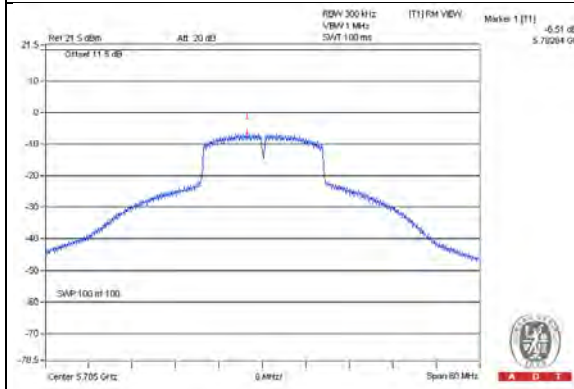


Chain 0 / CH165

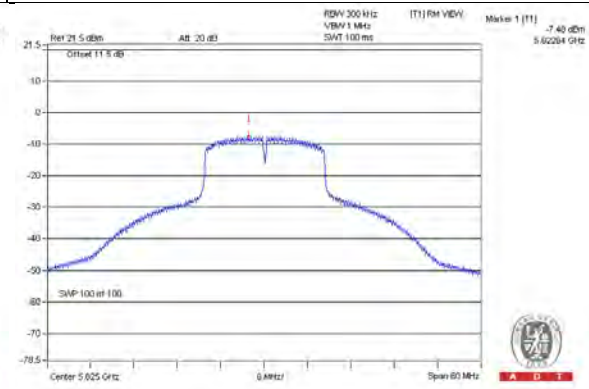


Chain 1 / CH144 (UNII-3 Band)

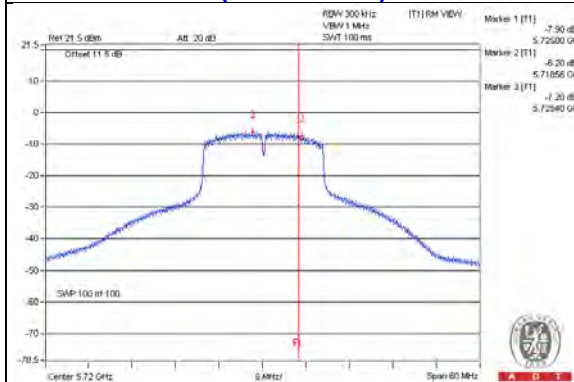


Chain 1 / CH149

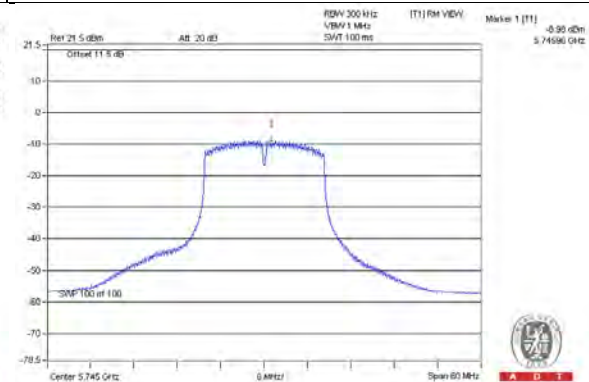

Chain 1 / CH157

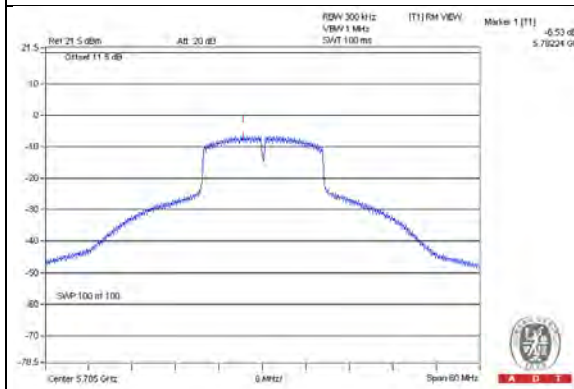

Chain 1 / CH165

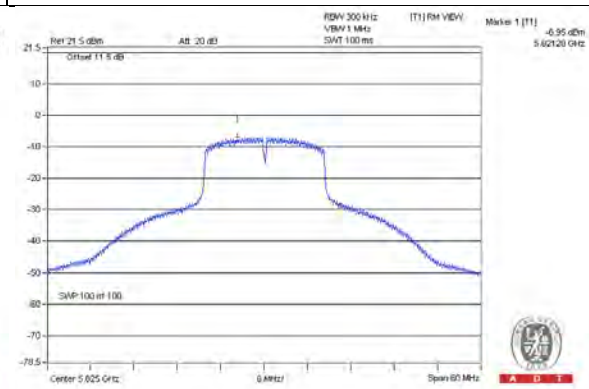


802.11ac (VHT20)


TX chain	Chan.	Chan. Freq. (MHz)	PSD		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	144 (UNII-3 Band)	5720	-8.40	-6.18	3.01	-3.17	28.23	Pass
	149	5745	-7.82	-5.60	3.01	-2.59	28.23	Pass
	157	5785	-6.22	-4.00	3.01	-0.99	28.23	Pass
	165	5825	-7.85	-5.63	3.01	-2.62	28.23	Pass
1	144 (UNII-3 Band)	5720	-7.95	-5.73	3.01	-2.72	28.23	Pass
	149	5745	-9.52	-7.30	3.01	-4.29	28.23	Pass
	157	5785	-6.18	-3.96	3.01	-0.95	28.23	Pass
	165	5825	-7.55	-5.33	3.01	-2.32	28.23	Pass

NOTE: 1. 5725~5850MHz: Directional gain = $4.76\text{dBi} + 10\log(2) = 7.77\text{dBi} > 6\text{dB}$, so the power density limit shall be reduced to $30-(7.77-6) = 28.23\text{dBm}$.


Chain 0 / CH144 (UNII-3 Band)

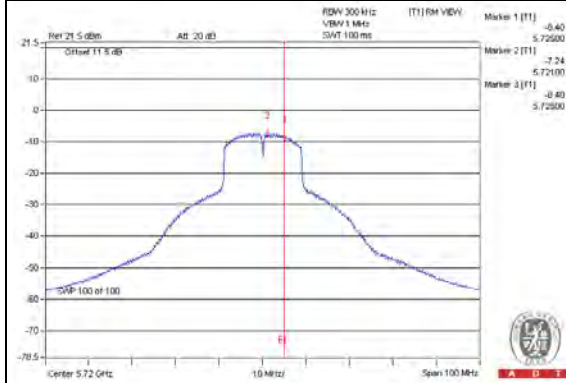


Chain 0 / CH149

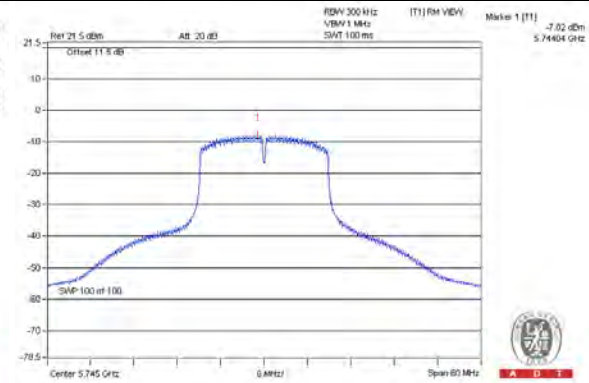


Chain 0 / CH157

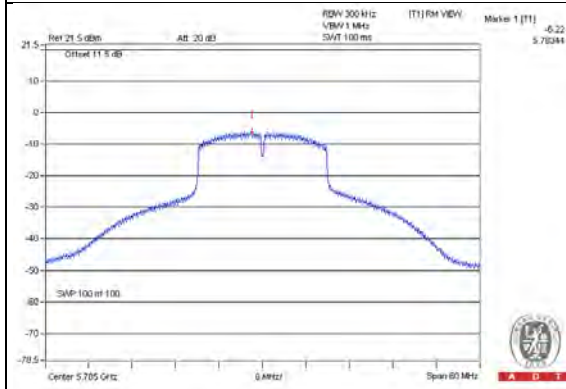


Chain 0 / CH165

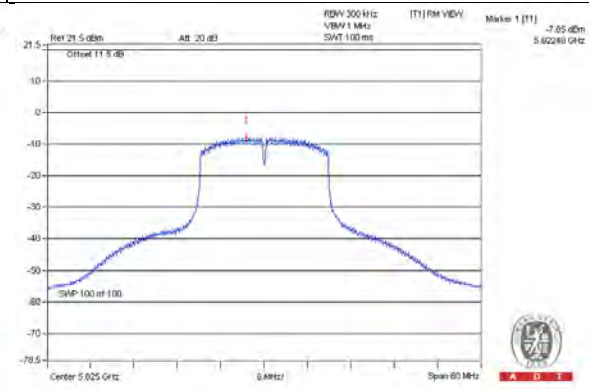


Chain 1 / CH144 (UNII-3 Band)

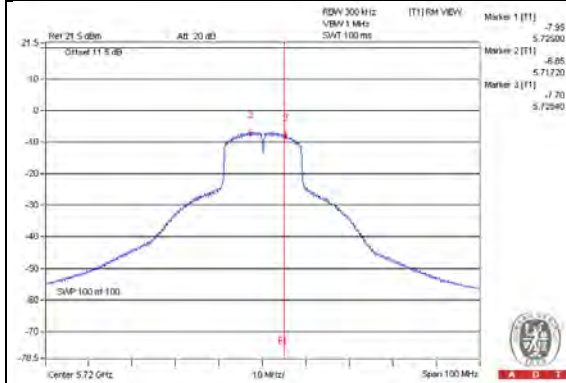


Chain 1 / CH149

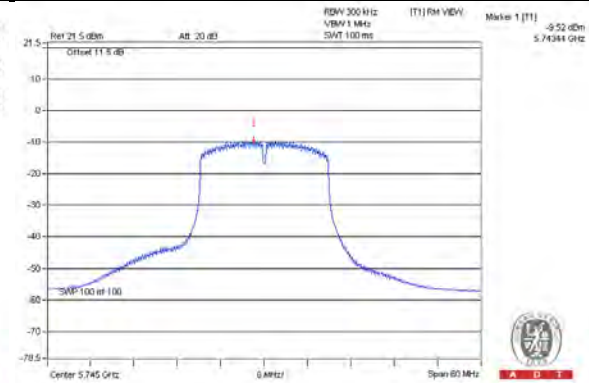

Chain 1 / CH157

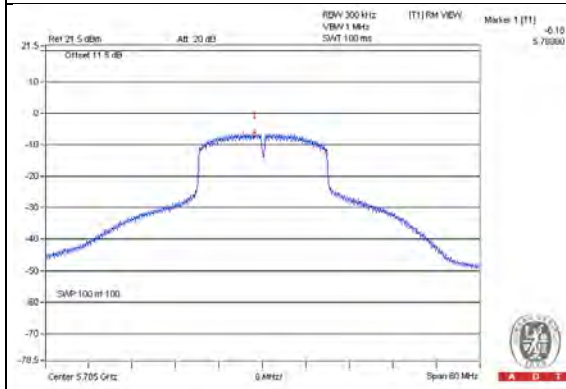

Chain 1 / CH165

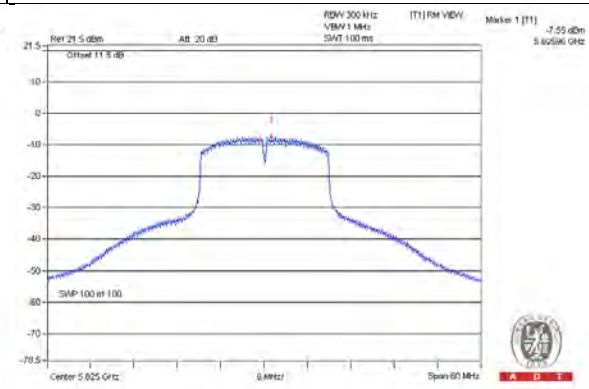


802.11ac (VHT40)


TX chain	Chan.	Chan. Freq. (MHz)	PSD		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	142 (UNII-3 Band)	5710	-13.51	-11.29	3.01	-8.28	28.23	Pass
	151	5755	-15.60	-13.38	3.01	-10.37	28.23	Pass
	159	5795	-11.76	-9.54	3.01	-6.53	28.23	Pass
1	142 (UNII-3 Band)	5710	-13.27	-11.05	3.01	-8.04	28.23	Pass
	151	5755	-16.75	-14.53	3.01	-11.52	28.23	Pass
	159	5795	-12.26	-10.04	3.01	-7.03	28.23	Pass

NOTE: 1. 5725~5850MHz: Directional gain = 4.76dBi + 10log(2) = 7.77dBi > 6dB, so the power density limit shall be reduced to 30-(7.77-6) = 28.23dBm.


Chain 0 / CH142 (UNII-3 Band)

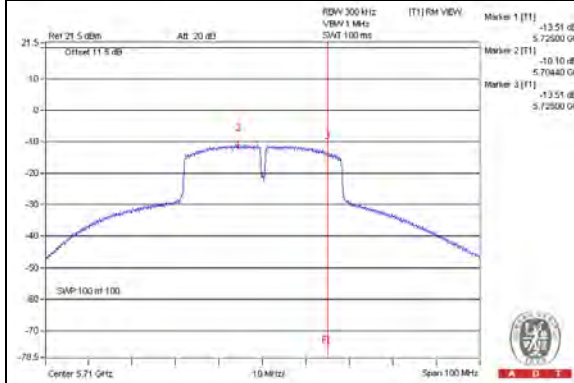


Chain 0 / CH151

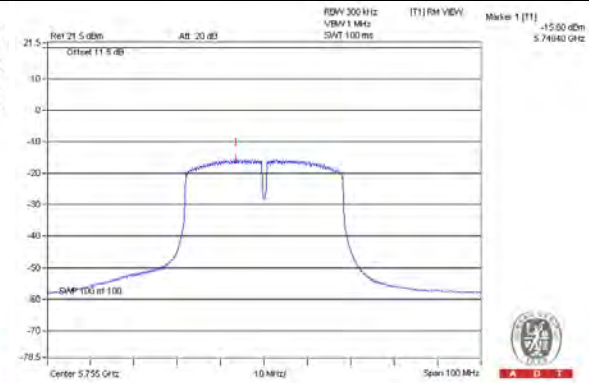


Chain 0 / CH159

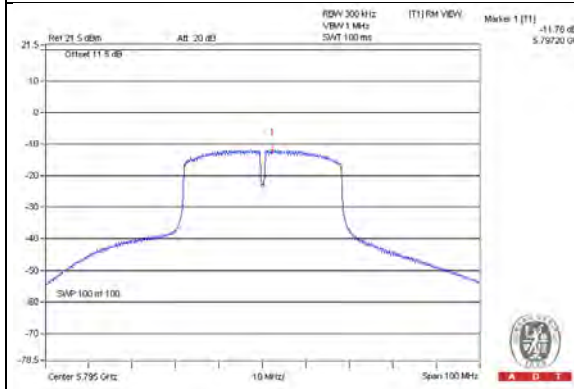


Chain 1 / CH142 (UNII-3 Band)

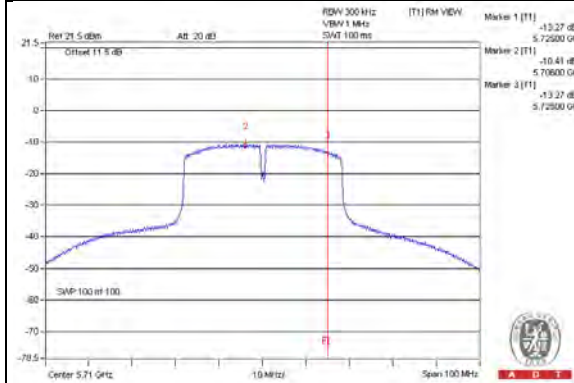

Chain 1 / CH151

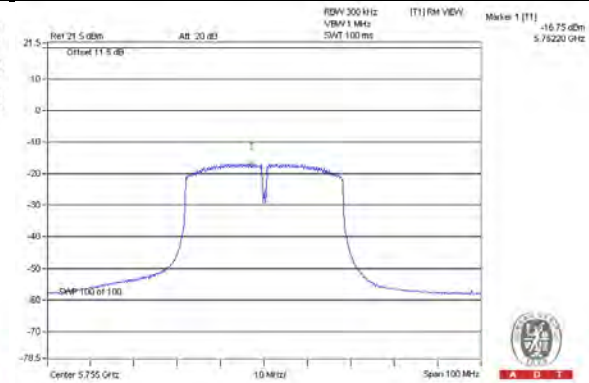





Chain 1 / CH159

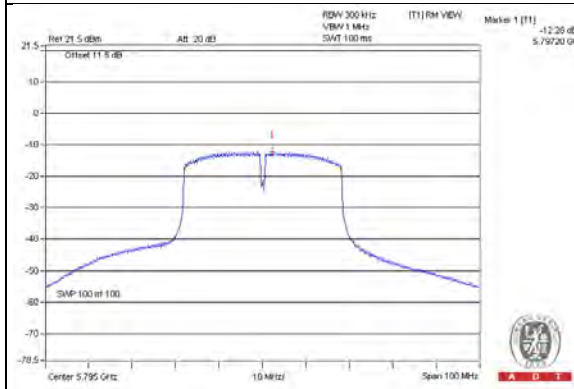

802.11ac (VHT80)

TX chain	Chan.	Chan. Freq. (MHz)	PSD		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	138 (UNII-3 Band)	5690	-18.44	-16.22	3.01	-13.21	28.23	Pass
	155	5775	-20.19	-17.97	3.01	-14.96	28.23	Pass
1	138 (UNII-3 Band)	5690	-18.55	-16.33	3.01	-13.32	28.23	Pass
	155	5775	-20.44	-18.22	3.01	-15.21	28.23	Pass

NOTE: 1. 5725–5850MHz: Directional gain = 4.76dBi + 10log(2) = 7.77dBi > 6dB, so the power density limit shall be reduced to 30-(7.77-6) = 28.23dBm.

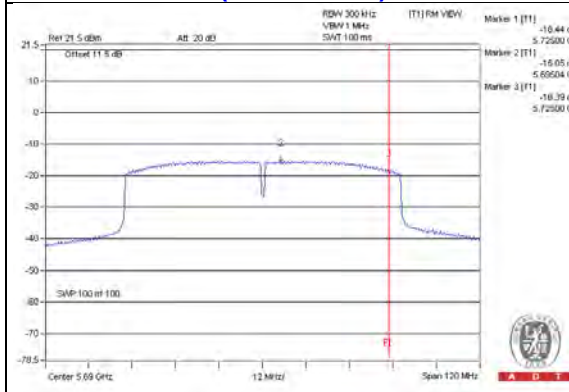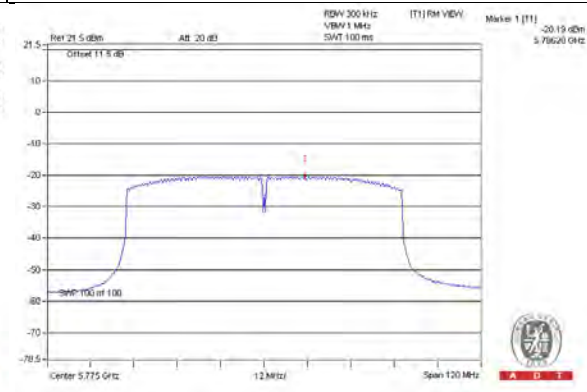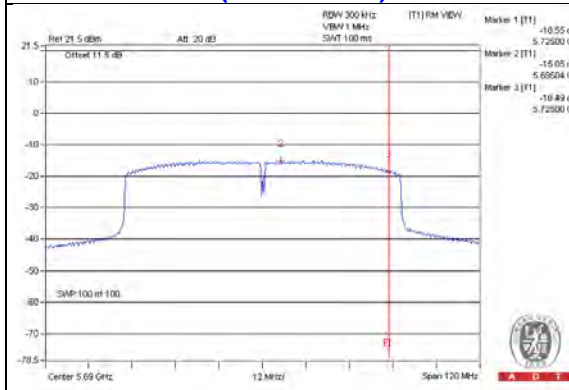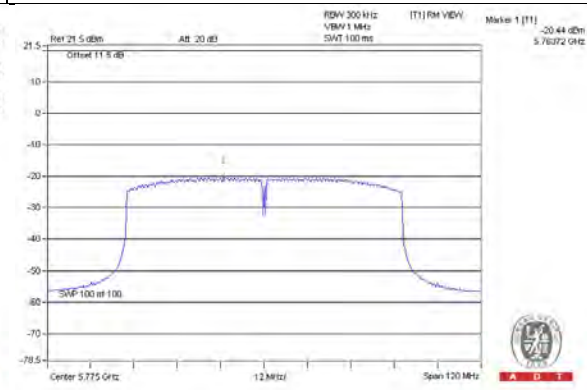
Chain 0 / CH138 (UNII-3 Band)

Chain 0 / CH155

Chain 1 / CH138 (UNII-3 Band)

Chain 1 / CH155


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 19, 2015

4.3.4 Test Procedures

MEASUREMENT PROCEDURE REF

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) ≥ 3 x RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results


802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
144 (UNII-3 Band)	5720	2.27	3.25	0.5	Pass
149	5745	15.67	15.12	0.5	Pass
157	5785	15.48	16.33	0.5	Pass
165	5825	15.11	15.14	0.5	Pass


NOTE:

The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz


Chain 0 / CH144 (UNII-3 Band)

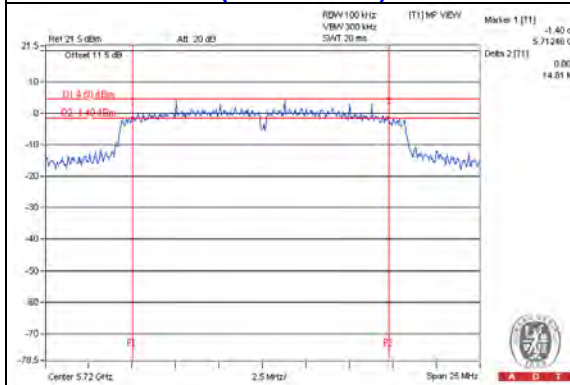


Chain 0 / CH149

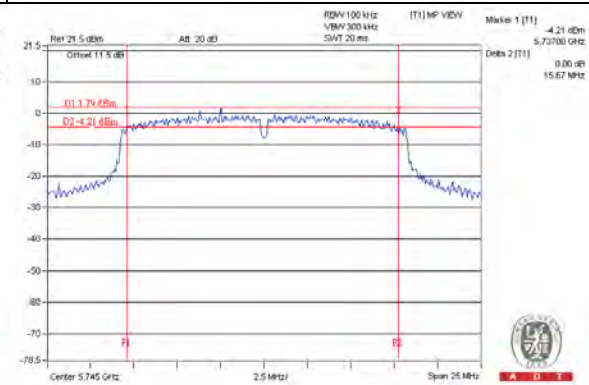


Chain 0 / CH157

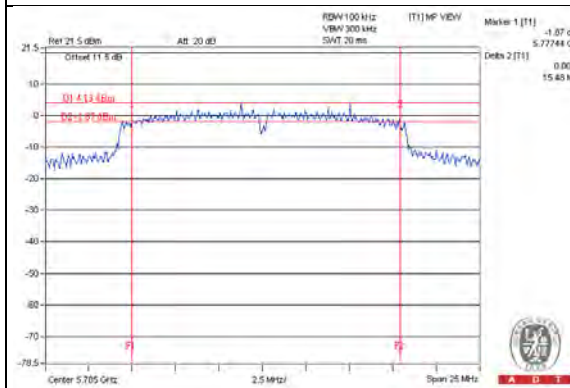


Chain 0 / CH165

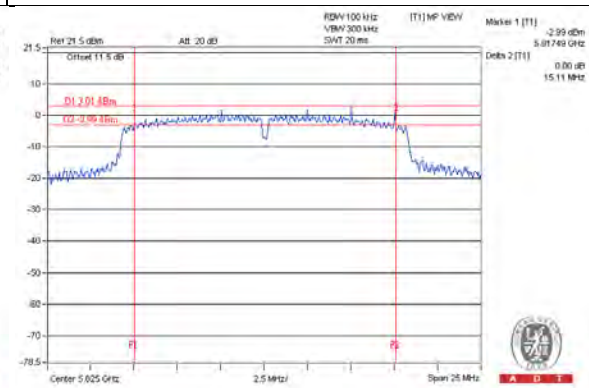


Chain 1 / CH144 (UNII-3 Band)

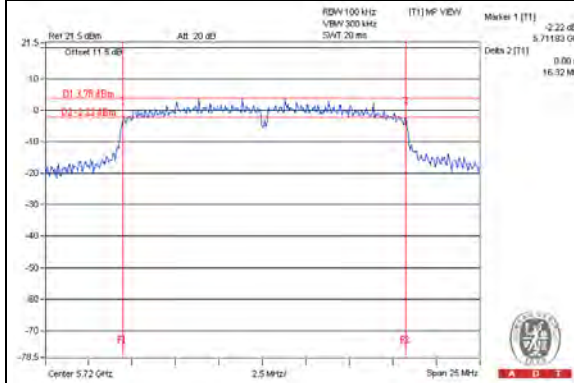


Chain 1 / CH149

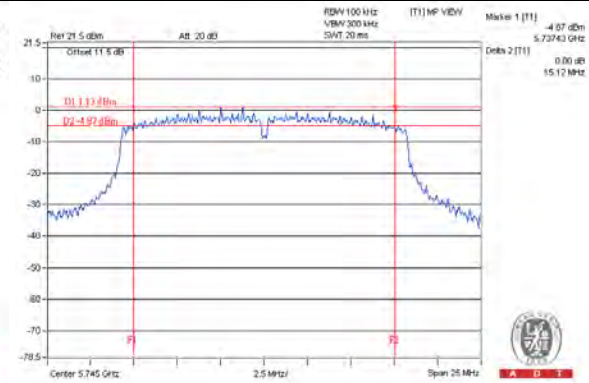

Chain 1 / CH157

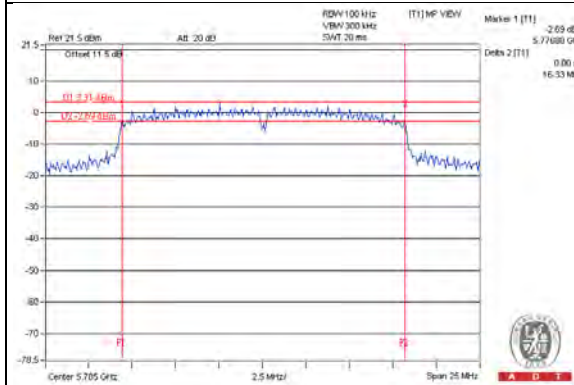

Chain 1 / CH165

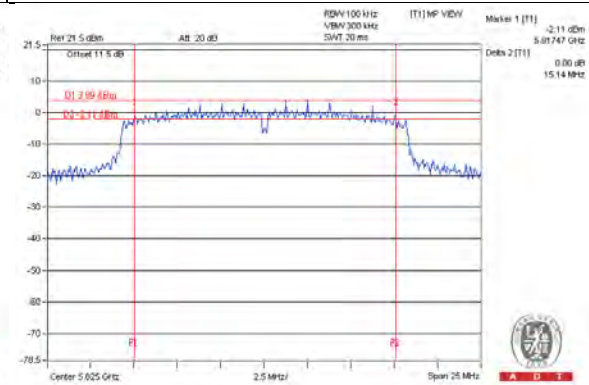


802.11ac (VHT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
144 (UNII-3 Band)	5720	2.22	3.23	0.5	Pass
149	5745	15.06	15.15	0.5	Pass
157	5785	15.31	14.33	0.5	Pass
165	5825	15.14	16.30	0.5	Pass


NOTE:

The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz


Chain 0 / CH144 (UNII-3 Band)

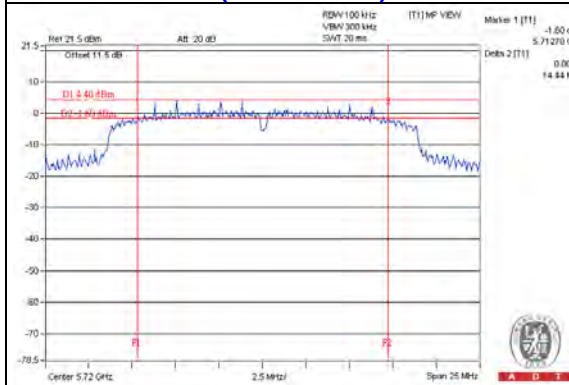


Chain 0 / CH149

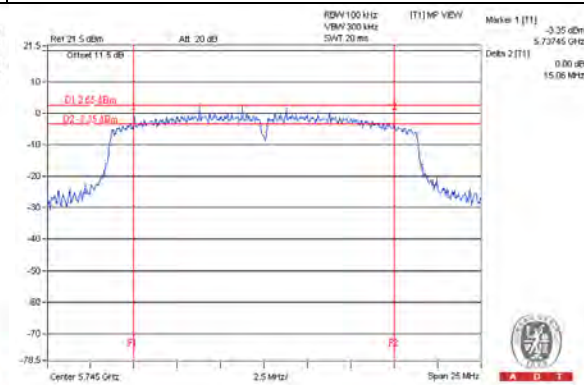


Chain 0 / CH157

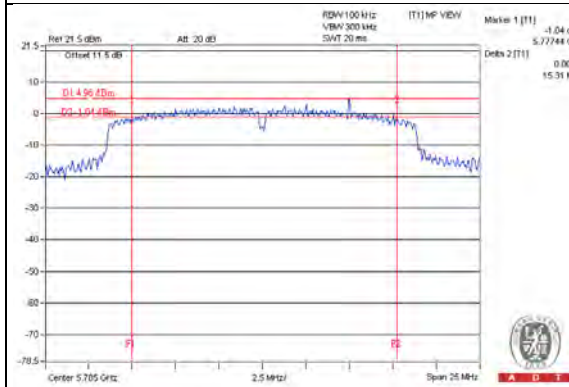


Chain 0 / CH165

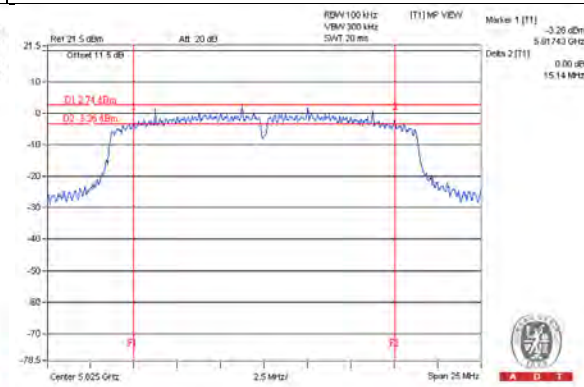


Chain 1 / CH144 (UNII-3 Band)

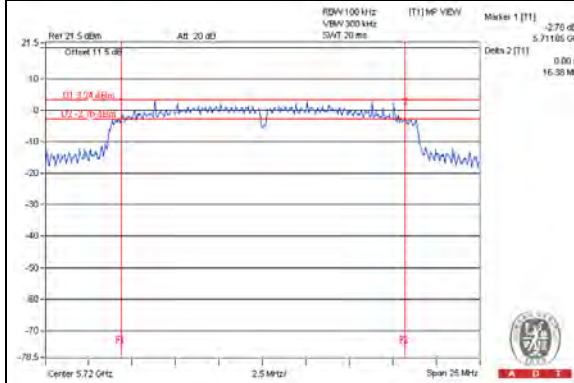


Chain 1 / CH149

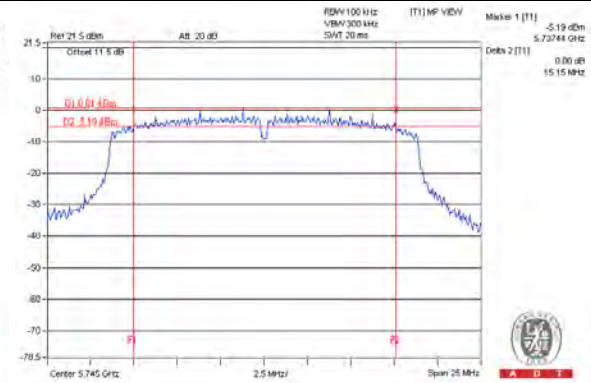

Chain 1 / CH157

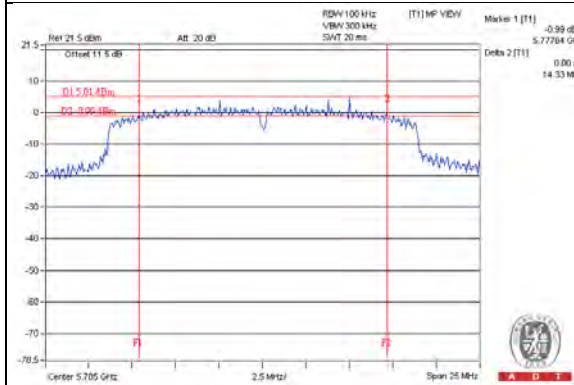

Chain 1 / CH165

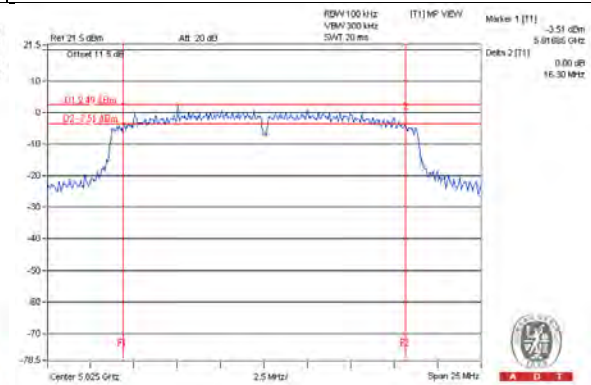


802.11ac (VHT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
142 (UNII-3 Band)	5710	0.61	2.60	0.5	Pass
151	5755	33.07	35.15	0.5	Pass
159	5795	34.47	34.17	0.5	Pass


NOTE:

The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz


Chain 0 / CH142 (UNII-3 Band)



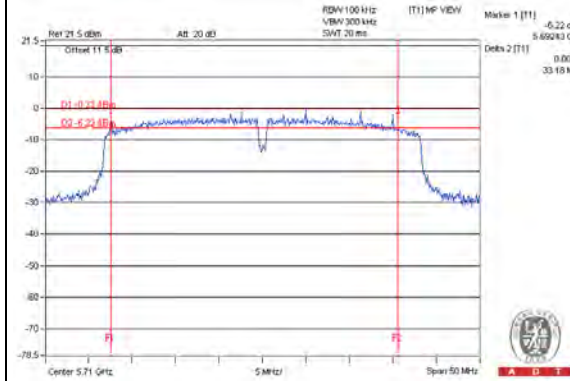


Chain 0 / CH151

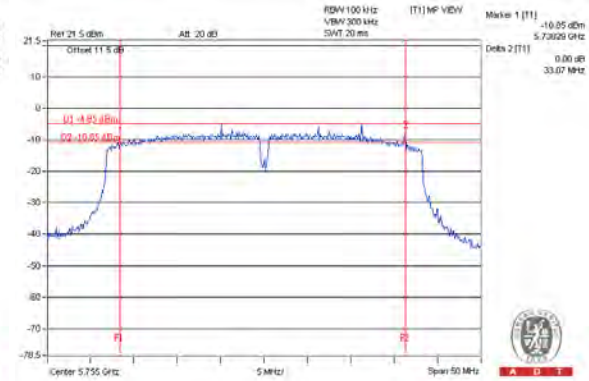

Chain 0 / CH159

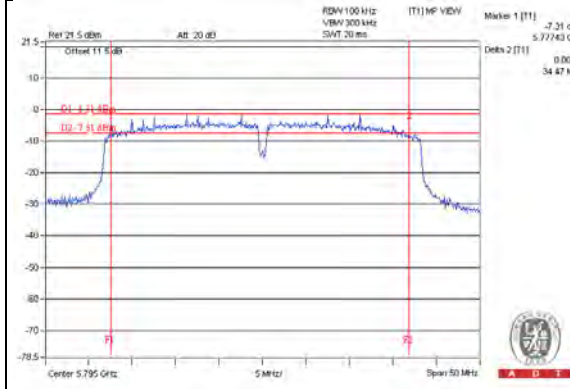

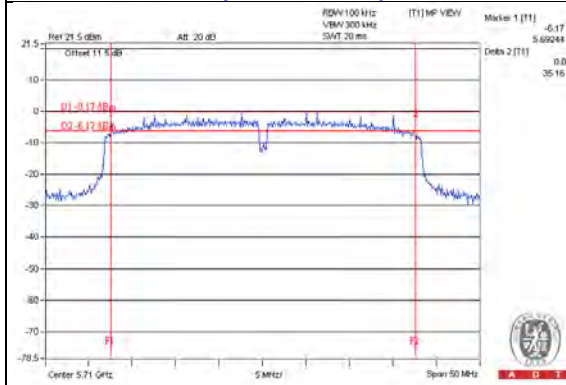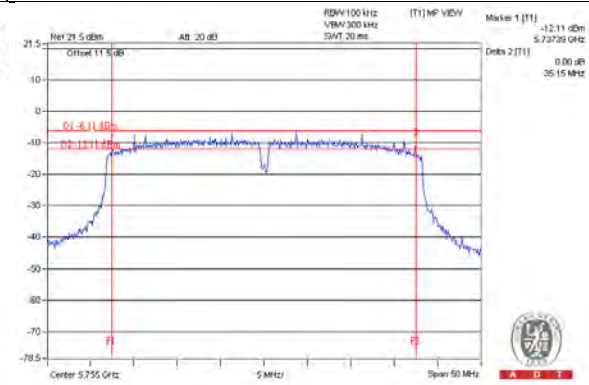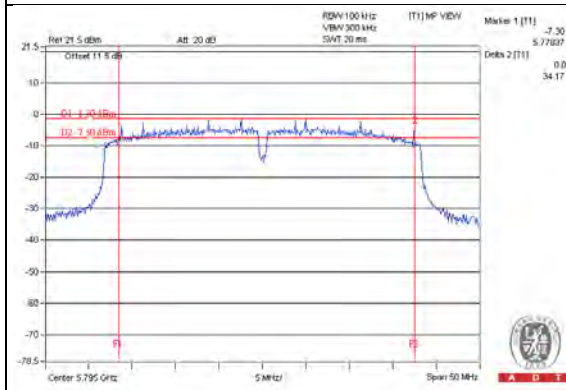Chain 1 / CH142 (UNII-3 Band)**Chain 1 / CH151****Chain 1 / CH159**


802.11ac (VHT80)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
138 (UNII-3 Band)	5690	1.47	2.62	0.5	Pass
155	5775	72.64	73.04	0.5	Pass


NOTE:

The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz


Chain 0 / CH138 (UNII-3 Band)

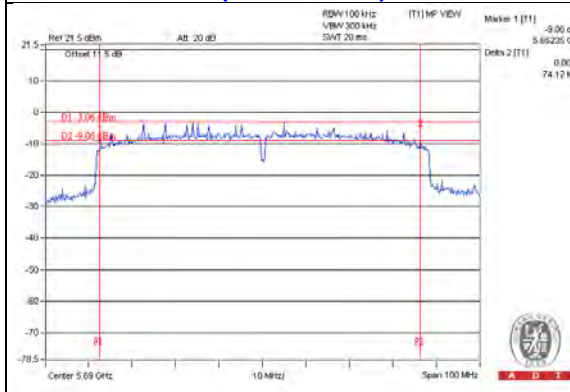


Chain 0 / CH155

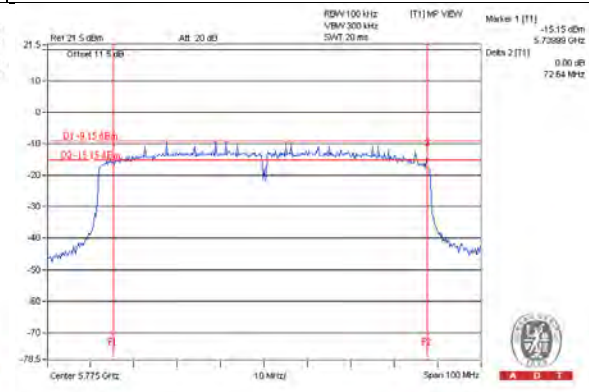

Chain 1 / CH138 (UNII-3 Band)

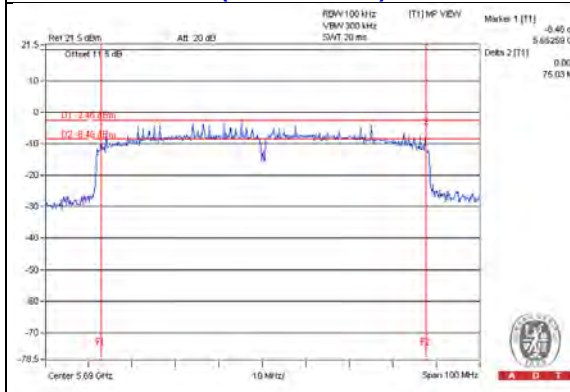

Chain 1 / CH155

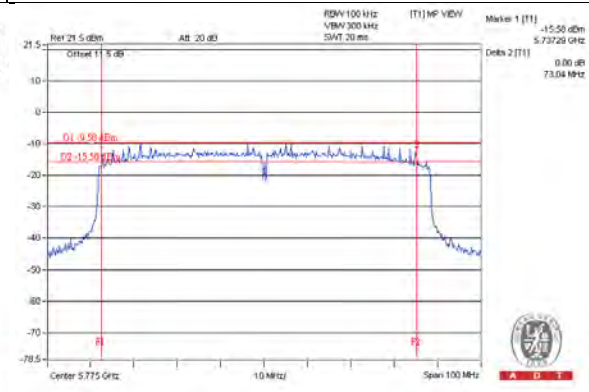

4.4 Unwanted Emission (Radiated Versus Conducted)

4.4.1 Limits of Unwanted Emission Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedure New Rules v01	FIELD STRENGTH AT 3m	
	PK:74 (dBµV/m)	AV:54 (dBµV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBµV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) ^{*1} PK:-17 (dBm/MHz) ^{*2}	PK: 68.2(dBµV/m) ^{*1} PK:78.2 (dBµV/m) ^{*2}

NOTE: ^{*1} beyond 10MHz of the band edge ^{*2} within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).$$

4.4.2 Test Instruments

For above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	Aug. 11, 2014	Aug. 10, 2015
Horn_Antenna AISI	AIH.8018	0000220091110	Feb. 06, 2015	Feb. 05, 2016
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 28, 2014	Oct. 27, 2015
RF Cable	NA	131206 131213 131215 SNMY23685/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 12, 2014	Dec. 11, 2015
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Feb. 05, 2015	Feb. 04, 2016
RF Cable	NA	329751/4 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. H.
3. The FCC Site Registration No. is 797305.
4. The CANADA Site Registration No. is IC 7450H-3.
5. Tested Date: June 18, 2015

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	Aug. 11, 2014	Aug. 10, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Feb. 09, 2015	Feb. 08, 2016
RF Cable	8D-FB	CHHCAB-001-1	Oct. 05, 2014	Oct. 04, 2015
		CHHCAB-001-2		
	RF-141	CHHCAB-004	Oct. 05, 2014	Oct. 04, 2015
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. H.
3. The FCC Site Registration No. is 797305.
4. The CANADA Site Registration No. is IC 7450H-3.
5. Tested Date: Mar. 21, 2015

4.4.3 Test Procedure

Following FCC KDB 789033 D02 General UNII Test Procedures:
Radiated versus Conducted Measurements.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- e. For all of Radiation emission test
 - e-1. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
 - e-2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - e-3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - e-4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - e-5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - e-6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


4.4.4 Deviation from Test Standard

No deviation.


4.4.5 Test Setup

For radiated configuration:


<Frequency Range below 1GHz>

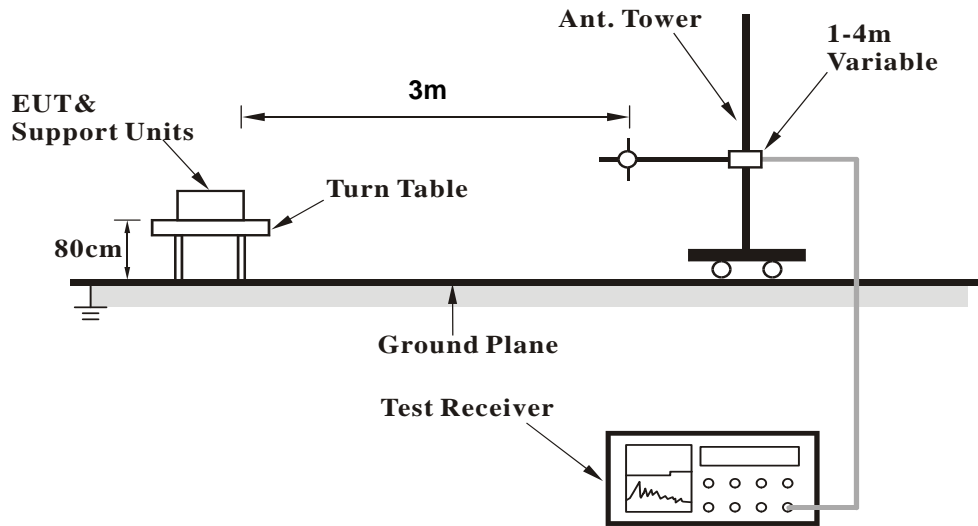

<Frequency Range above 1GHz>

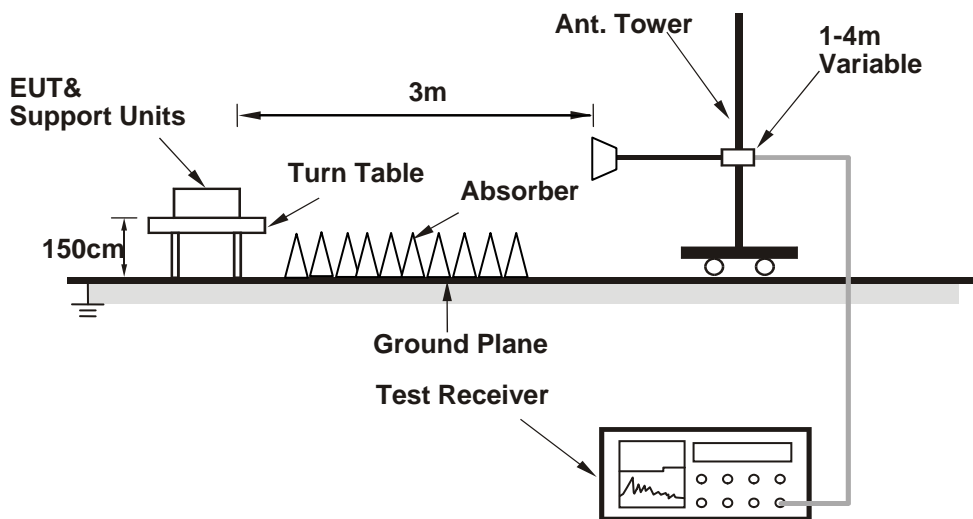

For conducted configuration:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.4.6 EUT Operating Condition

1. Connect the EUT with the support unit A (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program "QCRT-CONN30033.exe" to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.4.7 Test Results (Radiated Measurement)

Radiated versus Conducted Measurement	
<input type="checkbox"/> Conducted measurement	<input checked="" type="checkbox"/> Radiated measurement
<u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)	
<u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).	

Radiated test was done with 50ohm terminator on antenna port

Above 1GHz Data:


802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	58.0 PK	74.0	-16.0	1.83 H	273	43.79	14.21
2	#10360.00	46.4 AV	54.0	-7.6	1.83 H	273	32.19	14.21
3	15540.00	58.2 PK	74.0	-15.8	1.52 H	243	39.44	18.76
4	15540.00	48.6 AV	54.0	-5.4	1.52 H	243	29.84	18.76

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

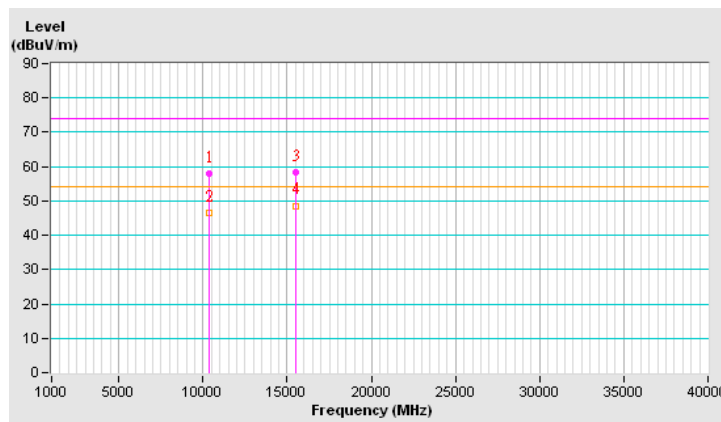


CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	58.9 PK	74.0	-15.1	1.98 V	81	44.69	14.21
2	#10360.00	48.0 AV	54.0	-6.0	1.98 V	81	33.79	14.21
3	15540.00	59.6 PK	74.0	-14.4	1.76 V	146	40.84	18.76
4	15540.00	49.4 AV	54.0	-4.6	1.76 V	146	30.64	18.76

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

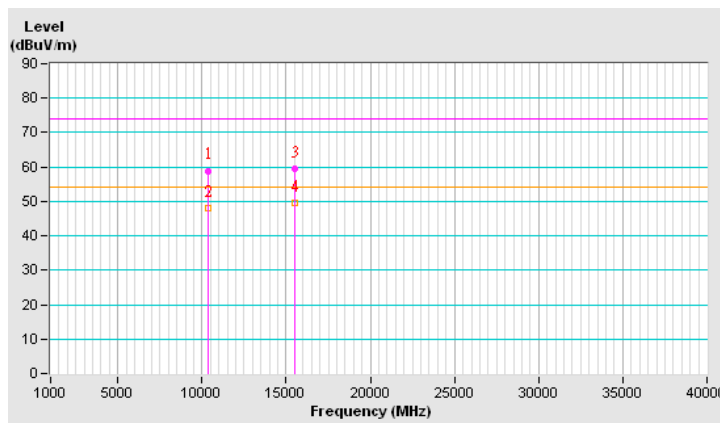


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	58.0 PK	74.0	-16.0	1.79 H	259	43.78	14.22
2	#10400.00	46.2 AV	54.0	-7.8	1.79 H	259	31.98	14.22
3	15600.00	58.5 PK	74.0	-15.5	1.54 H	230	40.16	18.34
4	15600.00	48.8 AV	54.0	-5.2	1.54 H	230	30.46	18.34

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. "#": The radiated frequency is out of the restricted band.

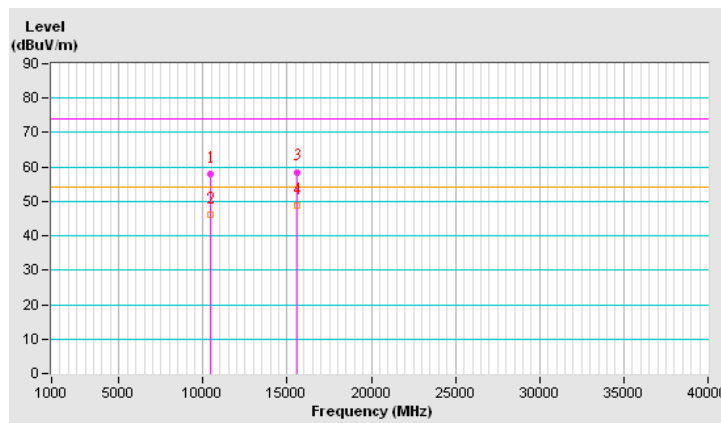


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	59.3 PK	74.0	-14.7	2.00 V	80	45.08	14.22
2	#10400.00	48.3 AV	54.0	-5.7	2.00 V	80	34.08	14.22
3	15600.00	60.0 PK	74.0	-14.0	1.76 V	155	41.66	18.34
4	15600.00	49.9 AV	54.0	-4.1	1.76 V	155	31.56	18.34

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

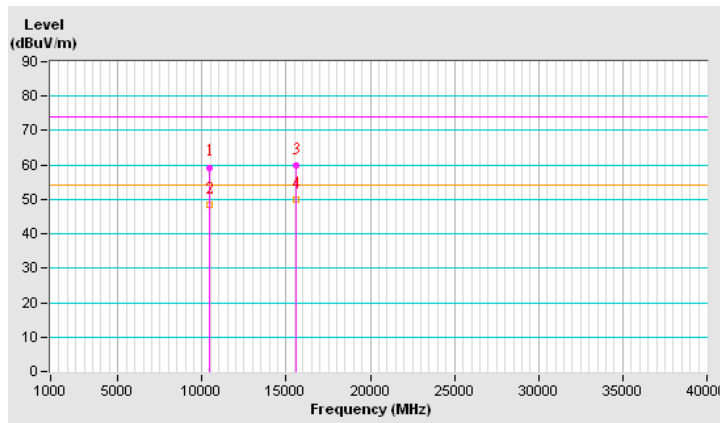


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	57.6 PK	74.0	-16.4	1.88 H	279	43.61	13.99
2	#10480.00	46.1 AV	54.0	-7.9	1.88 H	279	32.11	13.99
3	15720.00	58.1 PK	74.0	-15.9	1.49 H	254	39.07	19.03
4	15720.00	48.4 AV	54.0	-5.6	1.49 H	254	29.37	19.03

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. "#": The radiated frequency is out of the restricted band.

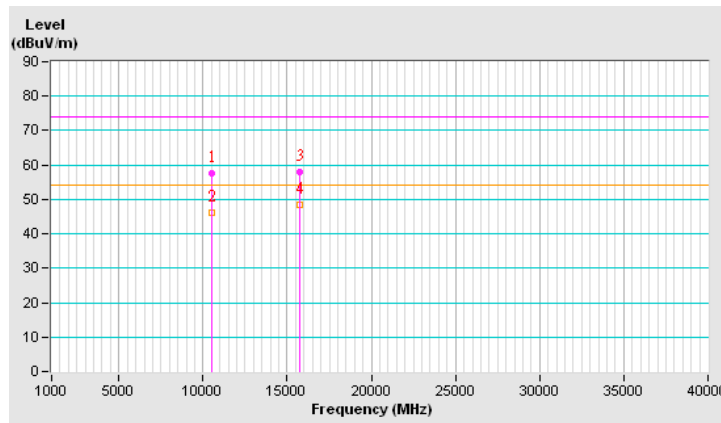


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	59.0 PK	74.0	-15.0	1.97 V	69	45.01	13.99
2	#10480.00	48.0 AV	54.0	-6.0	1.97 V	69	34.01	13.99
3	15720.00	59.9 PK	74.0	-14.1	1.70 V	169	40.87	19.03
4	15720.00	50.0 AV	54.0	-4.0	1.70 V	169	30.97	19.03

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

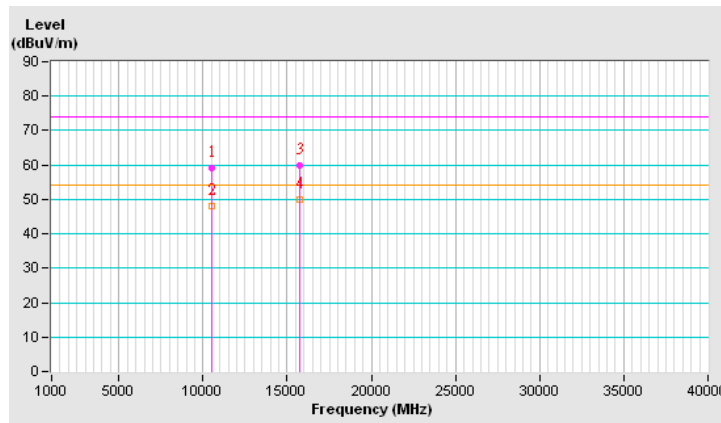


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	57.9 PK	74.0	-16.1	1.84 H	263	44.07	13.83
2	#10520.00	46.3 AV	54.0	-7.7	1.84 H	263	32.47	13.83
3	15780.00	58.6 PK	74.0	-15.4	1.48 H	254	39.24	19.36
4	15780.00	48.7 AV	54.0	-5.3	1.48 H	254	29.34	19.36

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

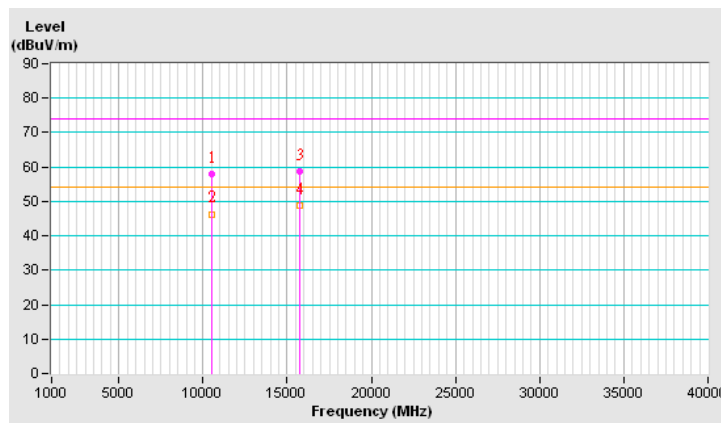


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	59.7 PK	74.0	-14.3	2.03 V	87	45.87	13.83
2	#10520.00	48.7 AV	54.0	-5.3	2.03 V	87	34.87	13.83
3	15780.00	60.2 PK	74.0	-13.8	1.71 V	142	40.84	19.36
4	15780.00	49.9 AV	54.0	-4.1	1.71 V	142	30.54	19.36

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

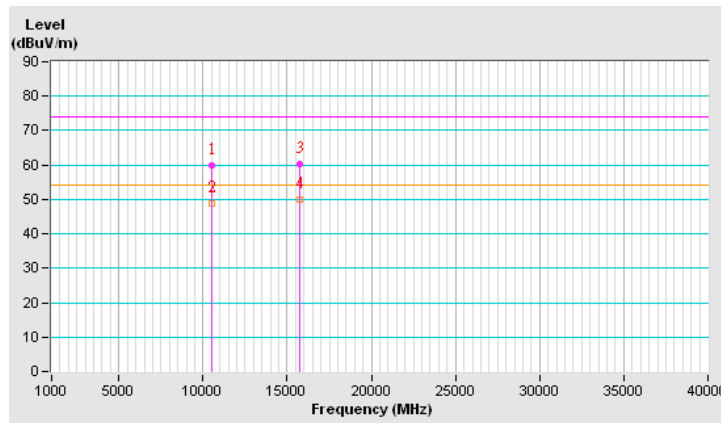


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	58.1 PK	74.0	-15.9	1.83 H	258	44.66	13.44
2	10600.00	46.8 AV	54.0	-7.2	1.83 H	258	33.36	13.44
3	15900.00	58.4 PK	74.0	-15.6	1.54 H	232	39.39	19.01
4	15900.00	48.5 AV	54.0	-5.5	1.54 H	232	29.49	19.01

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

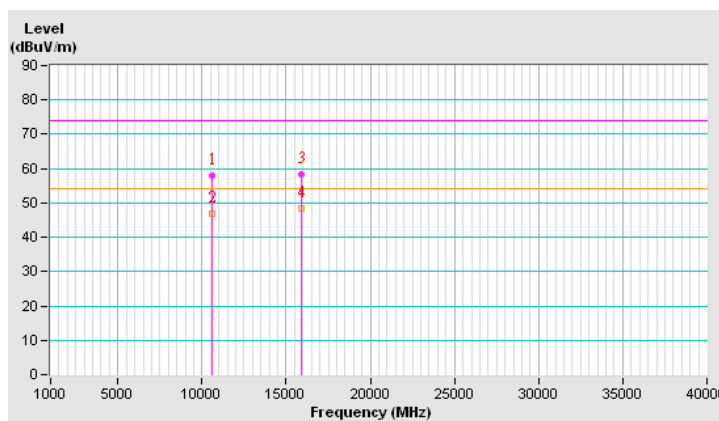


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	59.6 PK	74.0	-14.4	2.05 V	68	46.16	13.44
2	10600.00	48.6 AV	54.0	-5.4	2.05 V	68	35.16	13.44
3	15900.00	60.1 PK	74.0	-13.9	1.71 V	153	41.09	19.01
4	15900.00	50.1 AV	54.0	-3.9	1.71 V	153	31.09	19.01

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

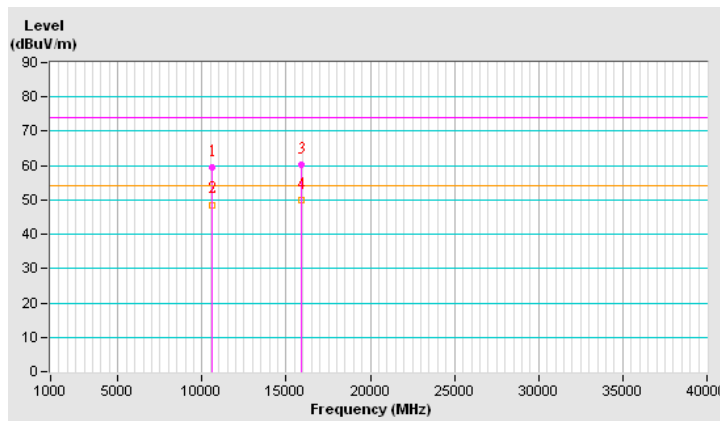


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	58.4 PK	74.0	-15.6	1.83 H	287	44.73	13.67
2	10640.00	46.7 AV	54.0	-7.3	1.83 H	287	33.03	13.67
3	15960.00	57.8 PK	74.0	-16.2	1.51 H	227	38.96	18.84
4	15960.00	48.2 AV	54.0	-5.8	1.51 H	227	29.36	18.84

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

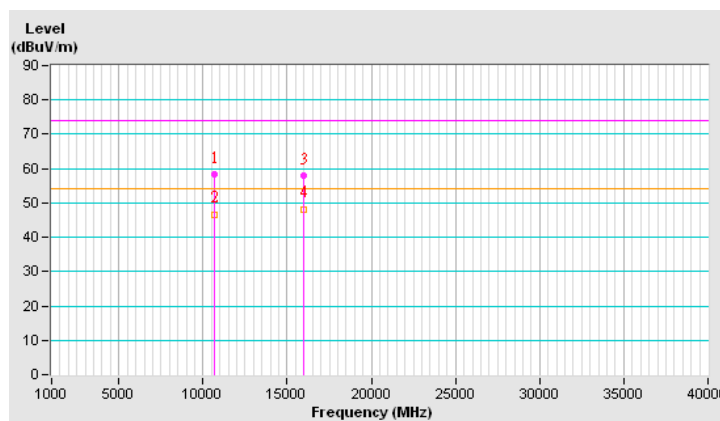


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	59.0 PK	74.0	-15.0	1.98 V	76	45.33	13.67
2	10640.00	47.8 AV	54.0	-6.2	1.98 V	76	34.13	13.67
3	15960.00	60.0 PK	74.0	-14.0	1.81 V	143	41.16	18.84
4	15960.00	50.1 AV	54.0	-3.9	1.81 V	143	31.26	18.84

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

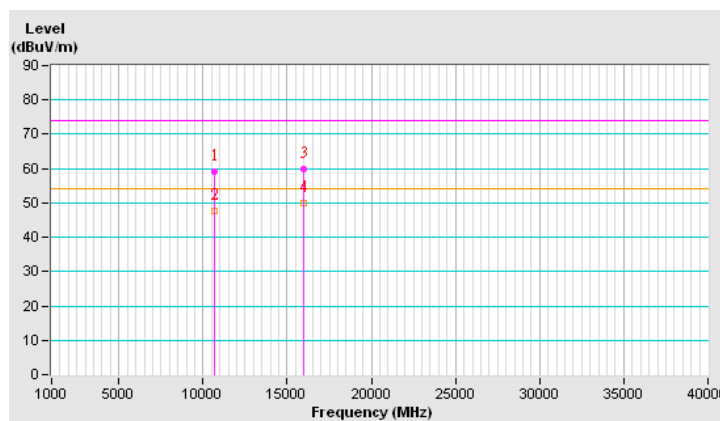


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	58.3 PK	74.0	-15.7	1.83 H	283	44.07	14.23
2	11000.00	46.5 AV	54.0	-7.5	1.83 H	283	32.27	14.23
3	#16500.00	58.2 PK	74.0	-15.8	1.47 H	245	37.23	20.97
4	#16500.00	48.3 AV	54.0	-5.7	1.47 H	245	27.33	20.97

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

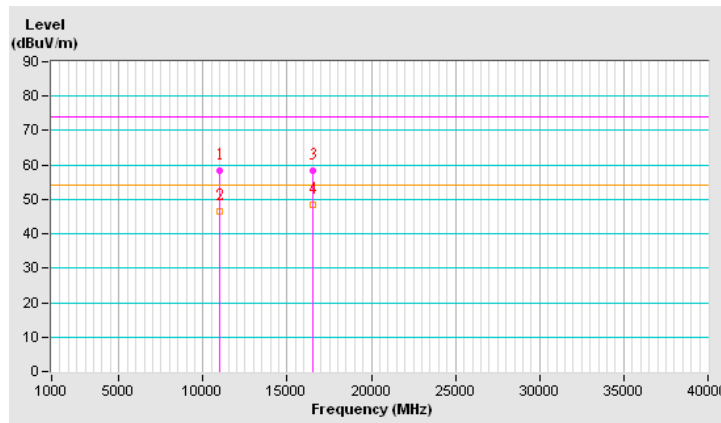


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	58.7 PK	74.0	-15.3	2.06 V	96	44.47	14.23
2	11000.00	48.0 AV	54.0	-6.0	2.06 V	96	33.77	14.23
3	#16500.00	59.8 PK	74.0	-14.2	1.71 V	140	38.83	20.97
4	#16500.00	49.5 AV	54.0	-4.5	1.71 V	140	28.53	20.97

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

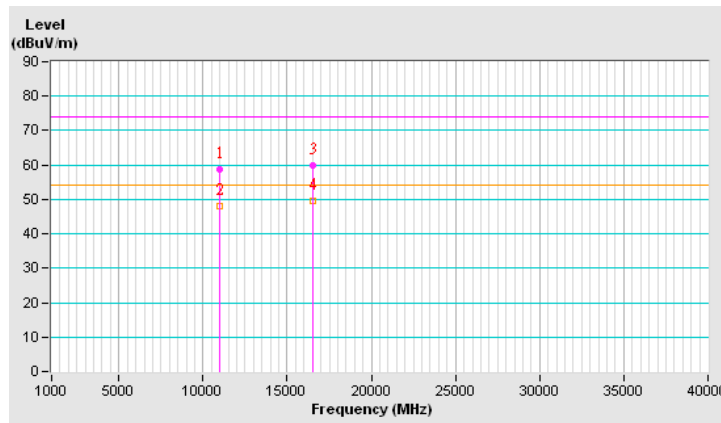


CHANNEL	TX Channel 120	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11200.00	57.9 PK	74.0	-16.1	1.87 H	283	43.43	14.47
2	11200.00	46.1 AV	54.0	-7.9	1.87 H	283	31.63	14.47
3	#16800.00	58.0 PK	74.0	-16.0	1.46 H	234	35.90	22.10
4	#16800.00	48.2 AV	54.0	-5.8	1.46 H	234	26.10	22.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

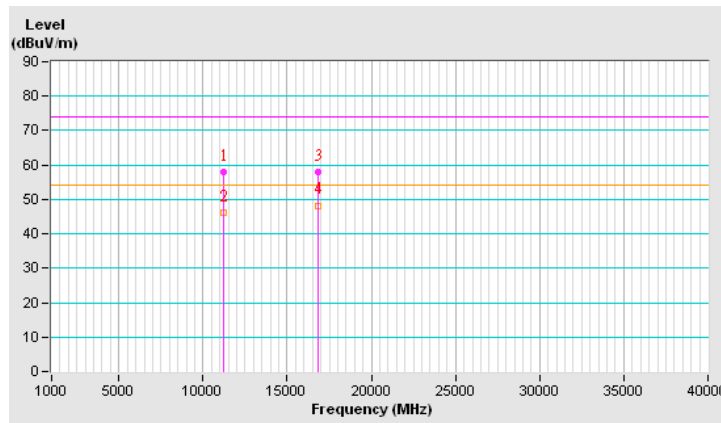


CHANNEL	TX Channel 120	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11200.00	59.7 PK	74.0	-14.3	2.01 V	93	45.23	14.47
2	11200.00	48.5 AV	54.0	-5.5	2.01 V	93	34.03	14.47
3	#16800.00	60.1 PK	74.0	-13.9	1.80 V	157	38.00	22.10
4	#16800.00	49.8 AV	54.0	-4.2	1.80 V	157	27.70	22.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

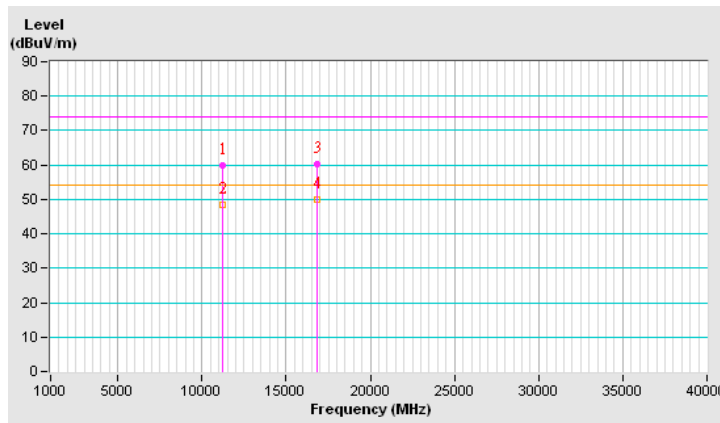


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	58.3 PK	74.0	-15.7	1.80 H	280	43.44	14.86
2	11400.00	46.8 AV	54.0	-7.2	1.80 H	280	31.94	14.86
3	#17100.00	57.9 PK	74.0	-16.1	1.47 H	252	34.91	22.99
4	#17100.00	48.2 AV	54.0	-5.8	1.47 H	252	25.21	22.99

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

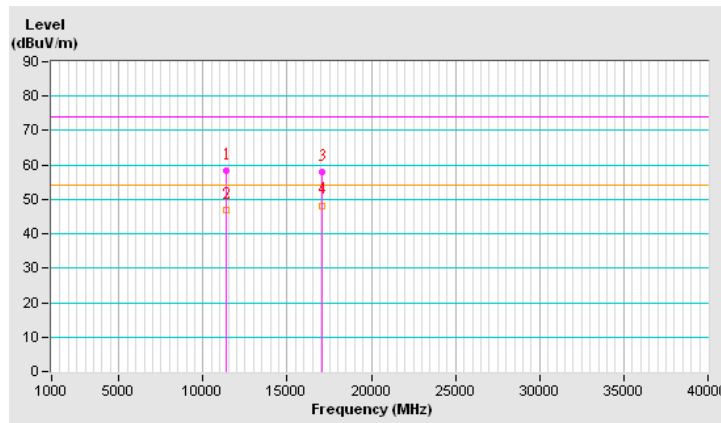


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	59.5 PK	74.0	-14.5	1.98 V	83	44.64	14.86
2	11400.00	48.4 AV	54.0	-5.6	1.98 V	83	33.54	14.86
3	#17100.00	59.5 PK	74.0	-14.5	1.72 V	165	36.51	22.99
4	#17100.00	49.4 AV	54.0	-4.6	1.72 V	165	26.41	22.99

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

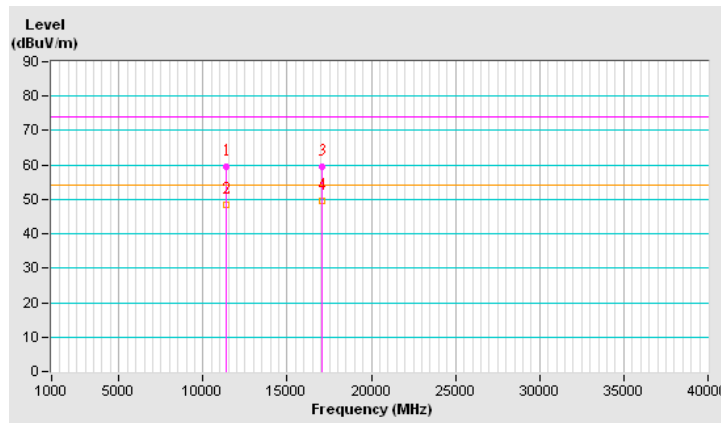


CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	58.2 PK	74.0	-15.8	1.80 H	262	43.48	14.72
2	11440.00	46.4 AV	54.0	-7.6	1.80 H	262	31.68	14.72
3	#17160.00	57.8 PK	74.0	-16.2	1.53 H	233	34.18	23.62
4	#17160.00	48.2 AV	54.0	-5.8	1.53 H	233	24.58	23.62

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

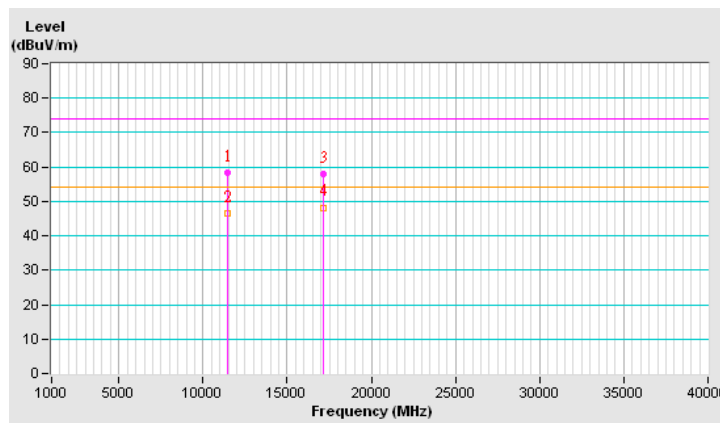


CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	59.3 PK	74.0	-14.7	2.04 V	82	44.58	14.72
2	11440.00	48.2 AV	54.0	-5.8	2.04 V	82	33.48	14.72
3	#17160.00	59.6 PK	74.0	-14.4	1.70 V	150	35.98	23.62
4	#17160.00	49.5 AV	54.0	-4.5	1.70 V	150	25.88	23.62

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

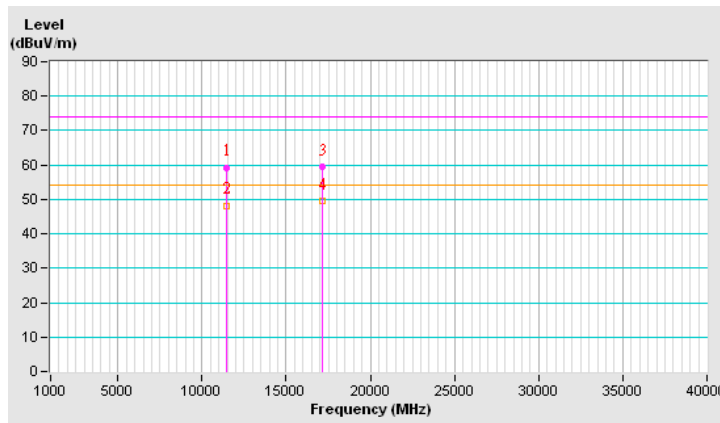


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	57.8 PK	74.0	-16.2	1.92 H	245	43.28	14.52
2	11490.00	46.4 AV	54.0	-7.6	1.92 H	245	31.88	14.52
3	#17235.00	57.0 PK	74.0	-17.0	1.58 H	238	33.24	23.76
4	#17235.00	47.4 AV	54.0	-6.6	1.58 H	238	23.64	23.76

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

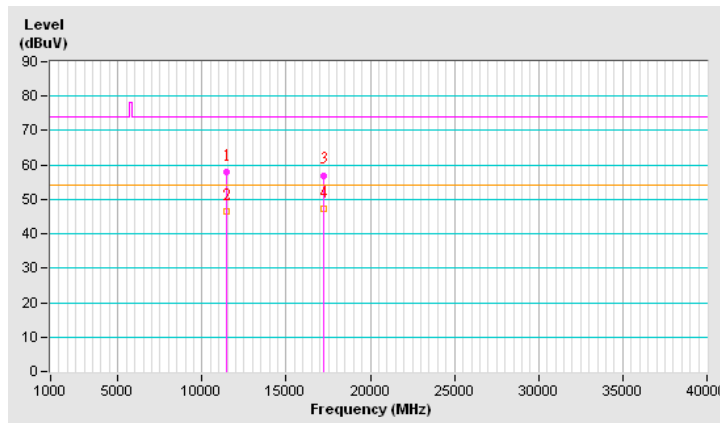


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	59.3 PK	74.0	-14.7	2.01 V	83	44.78	14.52
2	11490.00	48.3 AV	54.0	-5.7	2.01 V	83	33.78	14.52
3	#17235.00	58.7 PK	74.0	-15.3	1.80 V	160	34.94	23.76
4	#17235.00	48.6 AV	54.0	-5.4	1.80 V	160	24.84	23.76

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

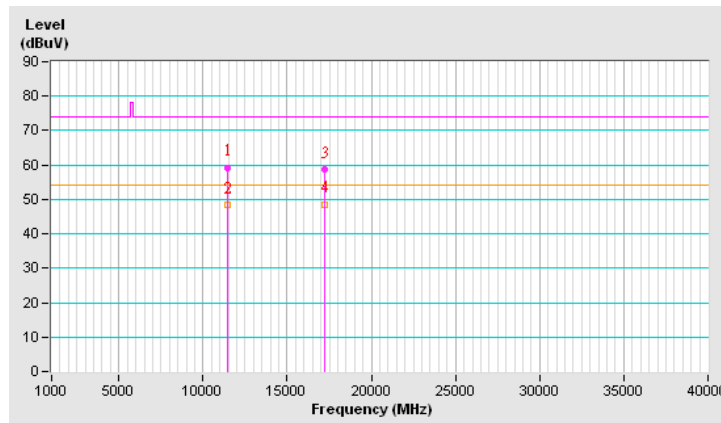


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	57.1 PK	74.0	-16.9	1.90 H	245	42.53	14.57
2	11570.00	45.7 AV	54.0	-8.3	1.90 H	245	31.13	14.57
3	#17355.00	57.9 PK	74.0	-16.1	1.55 H	223	33.84	24.06
4	#17355.00	48.2 AV	54.0	-5.8	1.55 H	223	24.14	24.06

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

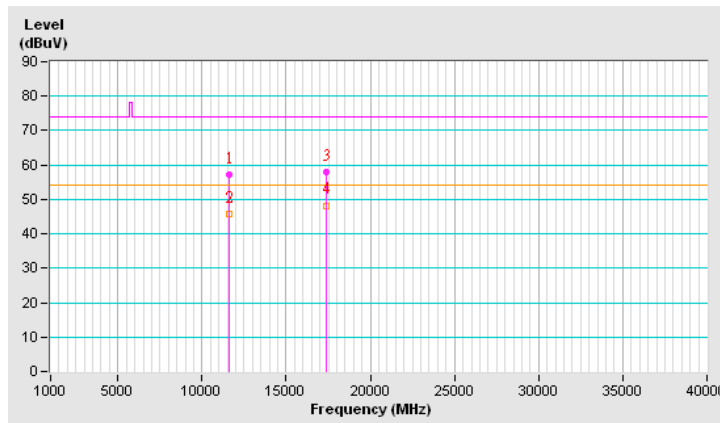


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	59.5 PK	74.0	-14.5	2.04 V	97	44.93	14.57
2	11570.00	48.8 AV	54.0	-5.2	2.04 V	97	34.23	14.57
3	#17355.00	59.5 PK	74.0	-14.5	1.72 V	173	35.44	24.06
4	#17355.00	49.4 AV	54.0	-4.6	1.72 V	173	25.34	24.06

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

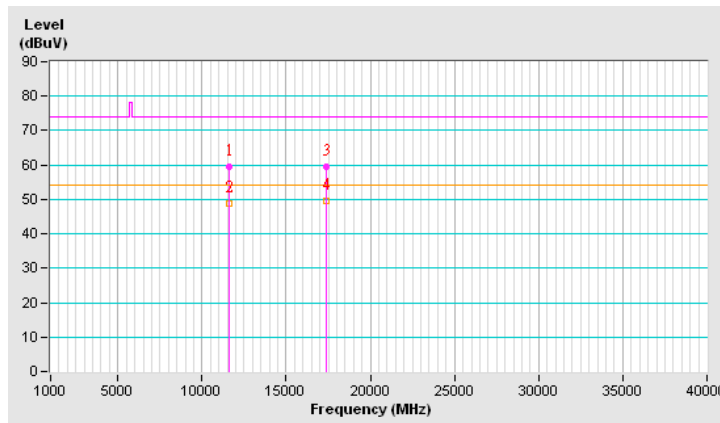


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	57.2 PK	74.0	-16.8	1.85 H	255	42.53	14.67
2	11650.00	45.9 AV	54.0	-8.1	1.85 H	255	31.23	14.67
3	#17475.00	57.5 PK	74.0	-16.5	1.61 H	233	33.48	24.02
4	#17475.00	47.4 AV	54.0	-6.6	1.61 H	233	23.38	24.02

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

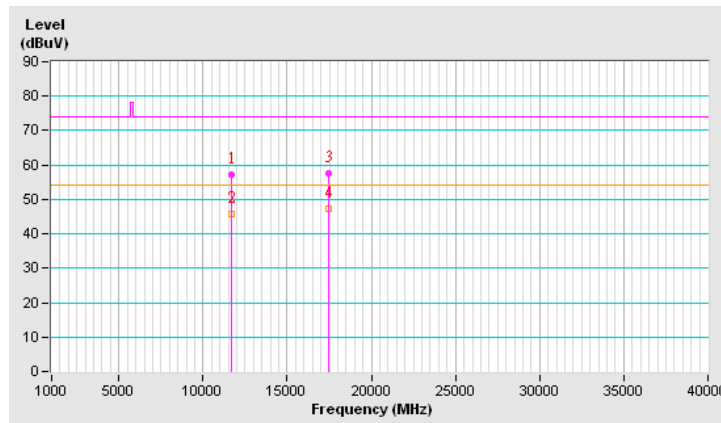


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	60.3 PK	74.0	-13.7	1.93 V	96	45.63	14.67
2	11650.00	49.2 AV	54.0	-4.8	1.93 V	96	34.53	14.67
3	#17475.00	59.4 PK	74.0	-14.6	1.79 V	148	35.38	24.02
4	#17475.00	49.1 AV	54.0	-4.9	1.79 V	148	25.08	24.02

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

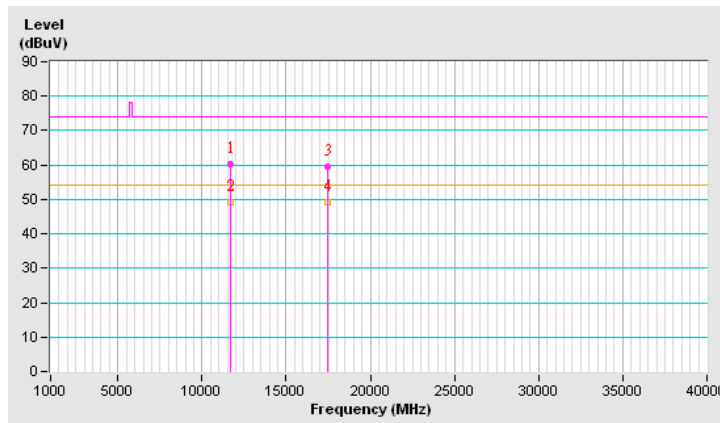


802.11ac (VHT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	58.4 PK	74.0	-15.6	1.78 H	288	44.19	14.21
2	#10360.00	46.7 AV	54.0	-7.3	1.78 H	288	32.49	14.21
3	15540.00	58.4 PK	74.0	-15.6	1.58 H	248	39.64	18.76
4	15540.00	48.9 AV	54.0	-5.1	1.58 H	248	30.14	18.76

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

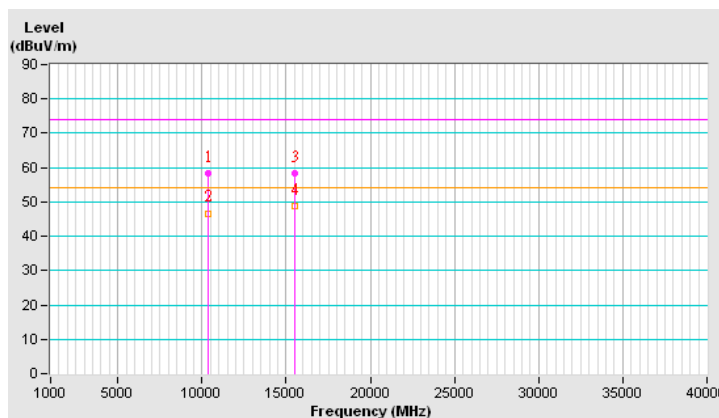


CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	60.0 PK	74.0	-14.0	1.97 V	80	45.79	14.21
2	#10360.00	48.9 AV	54.0	-5.1	1.97 V	80	34.69	14.21
3	15540.00	59.1 PK	74.0	-14.9	1.75 V	165	40.34	18.76
4	15540.00	49.1 AV	54.0	-4.9	1.75 V	165	30.34	18.76

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

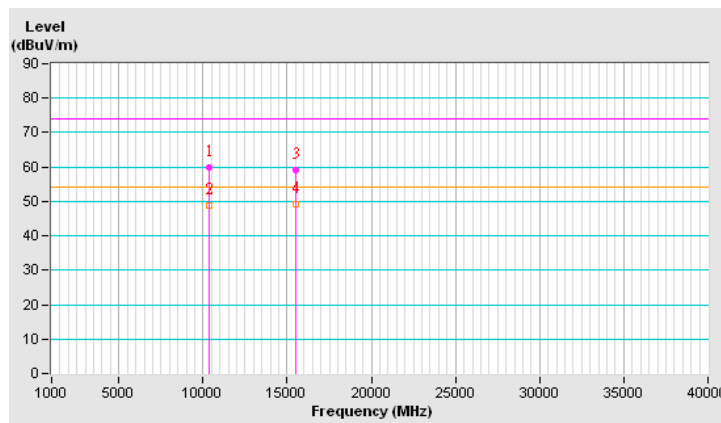


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	58.3 PK	74.0	-15.7	1.82 H	265	44.08	14.22
2	#10400.00	46.9 AV	54.0	-7.1	1.82 H	265	32.68	14.22
3	15600.00	57.8 PK	74.0	-16.2	1.51 H	229	39.46	18.34
4	15600.00	48.3 AV	54.0	-5.7	1.51 H	229	29.96	18.34

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

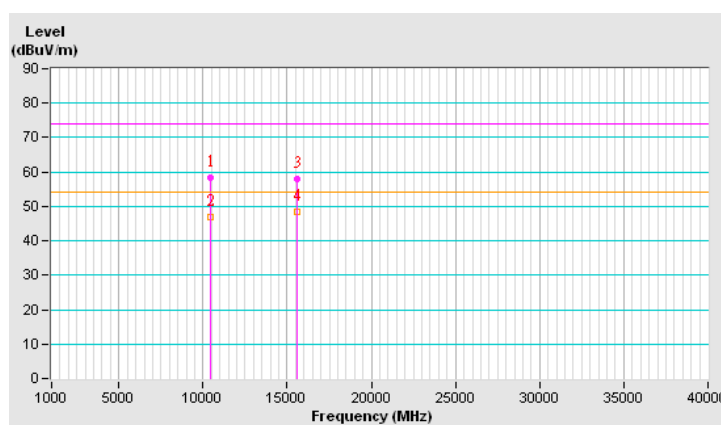


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	60.1 PK	74.0	-13.9	2.03 V	97	45.88	14.22
2	#10400.00	48.8 AV	54.0	-5.2	2.03 V	97	34.58	14.22
3	15600.00	58.9 PK	74.0	-15.1	1.75 V	168	40.56	18.34
4	15600.00	49.1 AV	54.0	-4.9	1.75 V	168	30.76	18.34

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

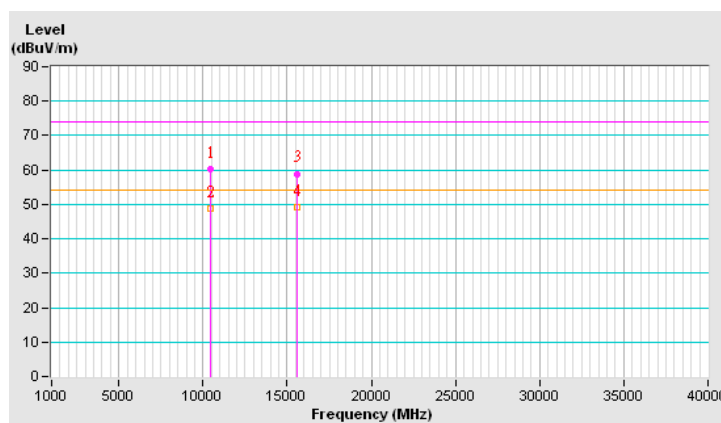


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	58.6 PK	74.0	-15.4	1.81 H	280	44.61	13.99
2	#10480.00	46.9 AV	54.0	-7.1	1.81 H	280	32.91	13.99
3	15720.00	58.2 PK	74.0	-15.8	1.50 H	259	39.17	19.03
4	15720.00	48.6 AV	54.0	-5.4	1.50 H	259	29.57	19.03

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. "#": The radiated frequency is out of the restricted band.

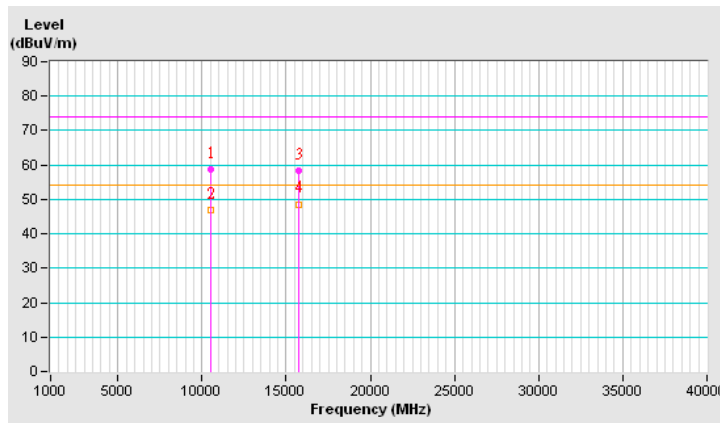


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	59.2 PK	74.0	-14.8	2.03 V	87	45.21	13.99
2	#10480.00	48.1 AV	54.0	-5.9	2.03 V	87	34.11	13.99
3	15720.00	59.2 PK	74.0	-14.8	1.67 V	177	40.17	19.03
4	15720.00	49.2 AV	54.0	-4.8	1.67 V	177	30.17	19.03

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

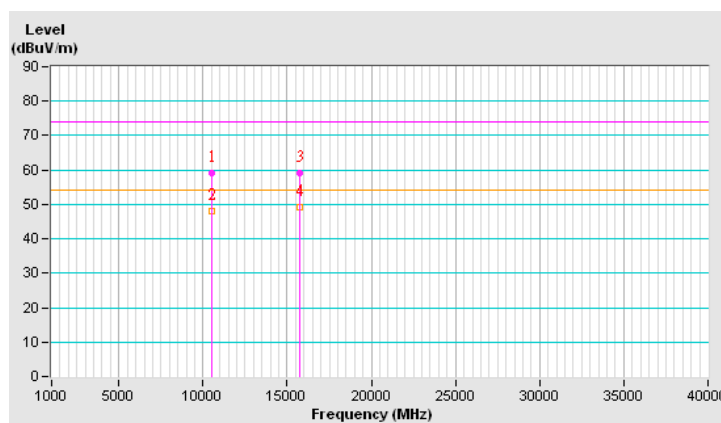


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	58.4 PK	74.0	-15.6	1.89 H	264	44.57	13.83
2	#10520.00	46.8 AV	54.0	-7.2	1.89 H	264	32.97	13.83
3	15780.00	57.7 PK	74.0	-16.3	1.55 H	255	38.34	19.36
4	15780.00	48.1 AV	54.0	-5.9	1.55 H	255	28.74	19.36

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

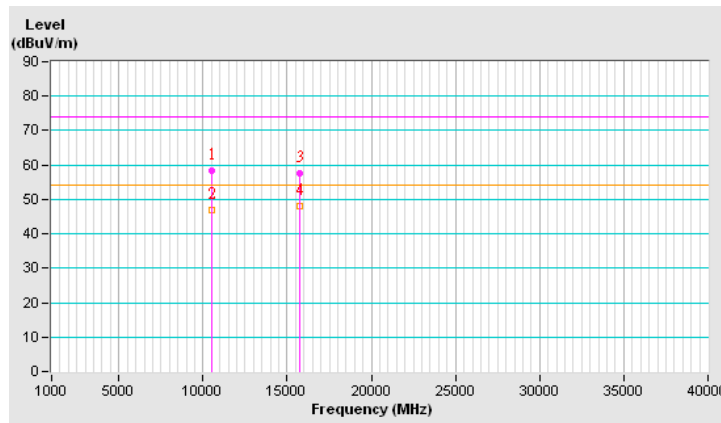


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	59.6 PK	74.0	-14.4	1.98 V	78	45.77	13.83
2	#10520.00	48.3 AV	54.0	-5.7	1.98 V	78	34.47	13.83
3	15780.00	60.0 PK	74.0	-14.0	1.72 V	153	40.64	19.36
4	15780.00	49.8 AV	54.0	-4.2	1.72 V	153	30.44	19.36

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

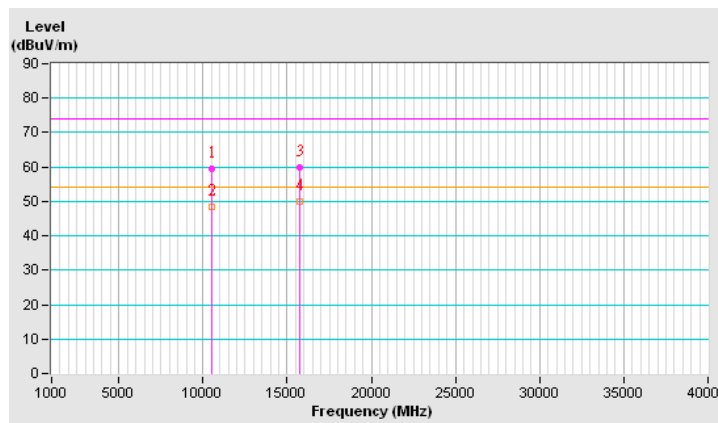


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	58.1 PK	74.0	-15.9	1.80 H	269	44.66	13.44
2	10600.00	46.3 AV	54.0	-7.7	1.80 H	269	32.86	13.44
3	15900.00	58.4 PK	74.0	-15.6	1.58 H	243	39.39	19.01
4	15900.00	49.1 AV	54.0	-4.9	1.58 H	243	30.09	19.01

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

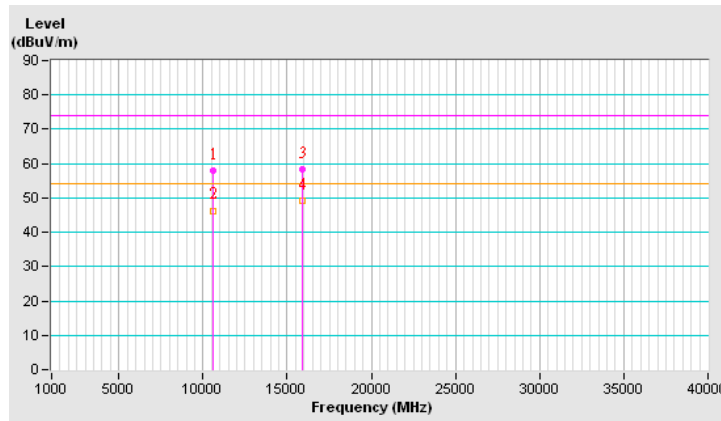


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	59.9 PK	74.0	-14.1	1.94 V	92	46.46	13.44
2	10600.00	48.6 AV	54.0	-5.4	1.94 V	92	35.16	13.44
3	15900.00	59.7 PK	74.0	-14.3	1.72 V	169	40.69	19.01
4	15900.00	49.6 AV	54.0	-4.4	1.72 V	169	30.59	19.01

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

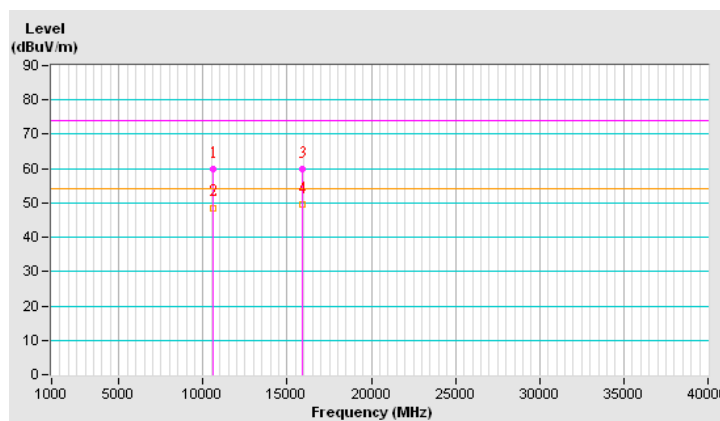


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	58.2 PK	74.0	-15.8	1.81 H	289	44.53	13.67
2	10640.00	46.8 AV	54.0	-7.2	1.81 H	289	33.13	13.67
3	15960.00	58.6 PK	74.0	-15.4	1.55 H	233	39.76	18.84
4	15960.00	48.9 AV	54.0	-5.1	1.55 H	233	30.06	18.84

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

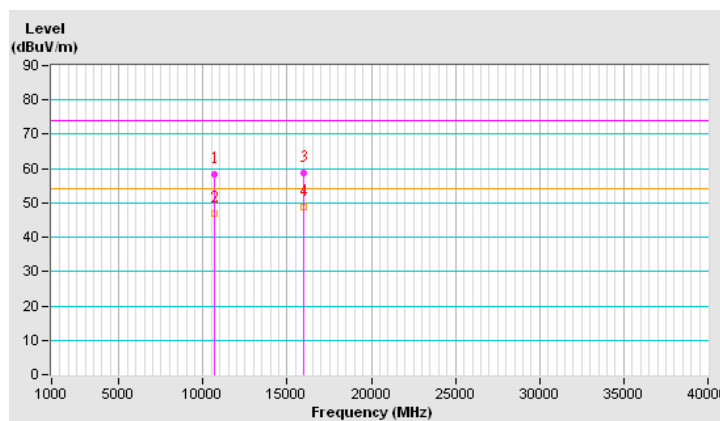


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	59.7 PK	74.0	-14.3	1.99 V	78	46.03	13.67
2	10640.00	48.7 AV	54.0	-5.3	1.99 V	78	35.03	13.67
3	15960.00	59.1 PK	74.0	-14.9	1.77 V	157	40.26	18.84
4	15960.00	49.2 AV	54.0	-4.8	1.77 V	157	30.36	18.84

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

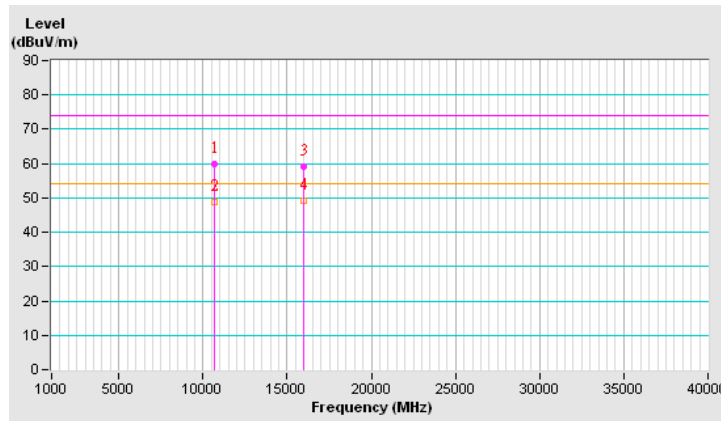


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	58.0 PK	74.0	-16.0	1.77 H	261	43.77	14.23
2	11000.00	46.2 AV	54.0	-7.8	1.77 H	261	31.97	14.23
3	#16500.00	58.0 PK	74.0	-16.0	1.50 H	239	37.03	20.97
4	#16500.00	48.2 AV	54.0	-5.8	1.50 H	239	27.23	20.97

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

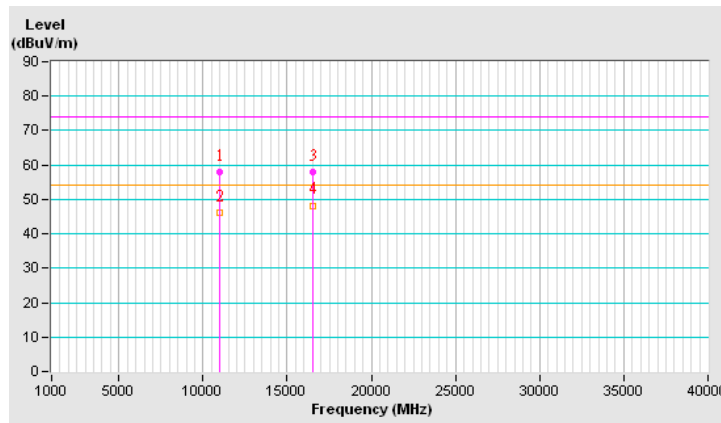


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	59.3 PK	74.0	-14.7	1.95 V	87	45.07	14.23
2	11000.00	48.4 AV	54.0	-5.6	1.95 V	87	34.17	14.23
3	#16500.00	59.0 PK	74.0	-15.0	1.71 V	167	38.03	20.97
4	#16500.00	49.0 AV	54.0	-5.0	1.71 V	167	28.03	20.97

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

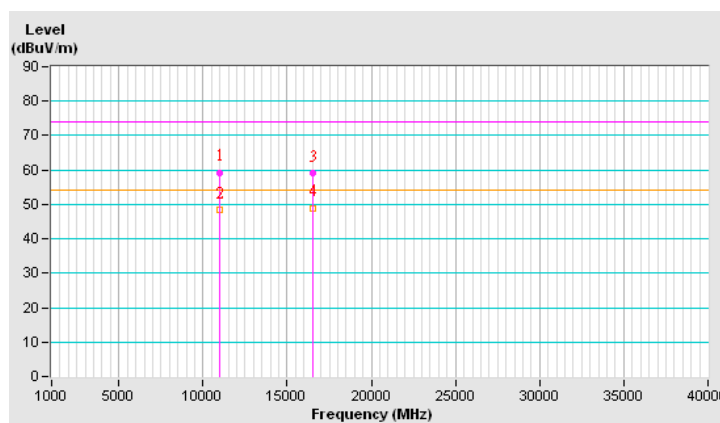


CHANNEL	TX Channel 120	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11200.00	58.4 PK	74.0	-15.6	1.86 H	268	43.93	14.47
2	11200.00	46.8 AV	54.0	-7.2	1.86 H	268	32.33	14.47
3	#16800.00	58.1 PK	74.0	-15.9	1.49 H	237	36.00	22.10
4	#16800.00	48.2 AV	54.0	-5.8	1.49 H	237	26.10	22.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

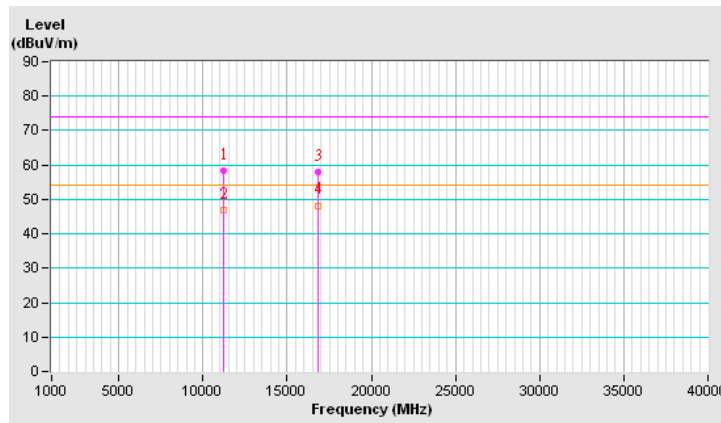


CHANNEL	TX Channel 120	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11200.00	59.7 PK	74.0	-14.3	1.99 V	72	45.23	14.47
2	11200.00	48.6 AV	54.0	-5.4	1.99 V	72	34.13	14.47
3	#16800.00	59.5 PK	74.0	-14.5	1.70 V	160	37.40	22.10
4	#16800.00	49.3 AV	54.0	-4.7	1.70 V	160	27.20	22.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

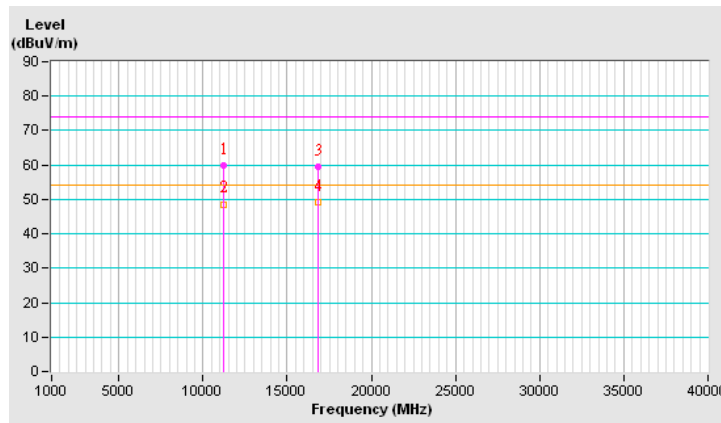


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	57.5 PK	74.0	-16.5	1.86 H	244	42.64	14.86
2	11400.00	46.1 AV	54.0	-7.9	1.86 H	244	31.24	14.86
3	#17100.00	57.7 PK	74.0	-16.3	1.56 H	232	34.71	22.99
4	#17100.00	47.9 AV	54.0	-6.1	1.56 H	232	24.91	22.99

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

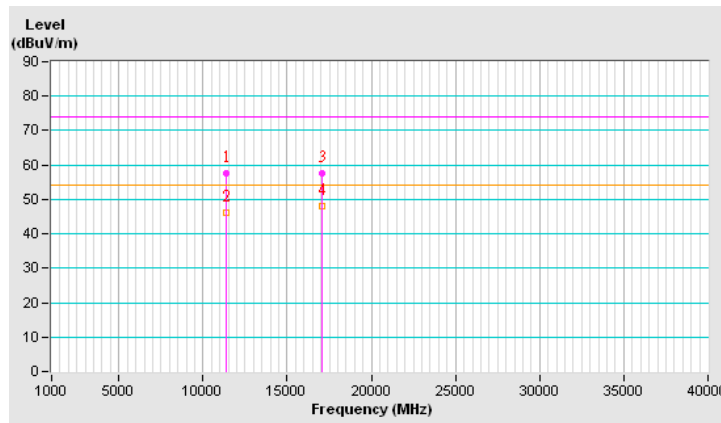


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	59.7 PK	74.0	-14.3	1.99 V	93	44.84	14.86
2	11400.00	48.8 AV	54.0	-5.2	1.99 V	93	33.94	14.86
3	#17100.00	59.3 PK	74.0	-14.7	1.74 V	162	36.31	22.99
4	#17100.00	49.0 AV	54.0	-5.0	1.74 V	162	26.01	22.99

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

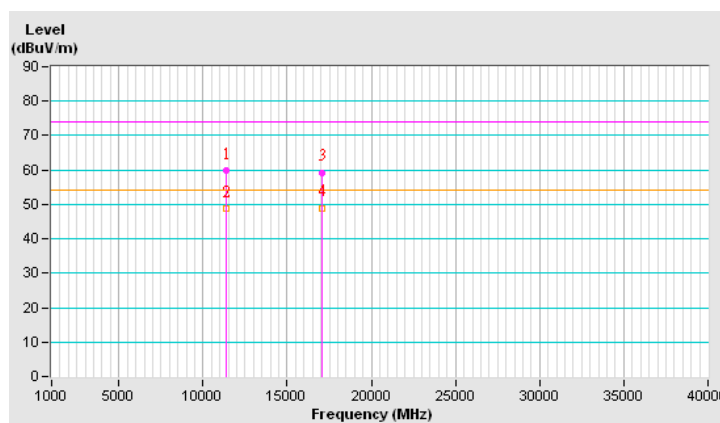


CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	57.9 PK	74.0	-16.1	1.84 H	257	43.18	14.72
2	11440.00	46.4 AV	54.0	-7.6	1.84 H	257	31.68	14.72
3	#17160.00	57.6 PK	74.0	-16.4	1.50 H	220	33.98	23.62
4	#17160.00	47.9 AV	54.0	-6.1	1.50 H	220	24.28	23.62

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

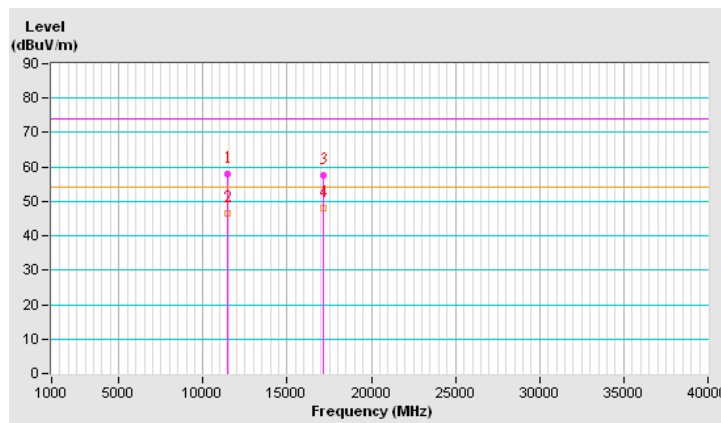


CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	59.4 PK	74.0	-14.6	2.00 V	93	44.68	14.72
2	11440.00	48.5 AV	54.0	-5.5	2.00 V	93	33.78	14.72
3	#17160.00	59.2 PK	74.0	-14.8	1.73 V	159	35.58	23.62
4	#17160.00	49.2 AV	54.0	-4.8	1.73 V	159	25.58	23.62

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

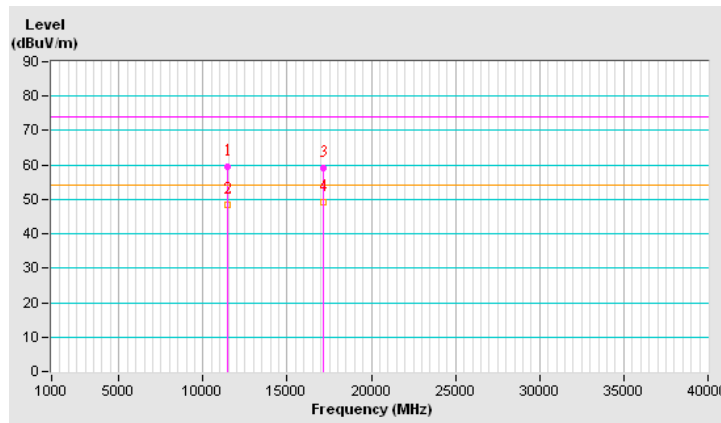


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	57.2 PK	74.0	-16.8	1.81 H	244	42.68	14.52
2	11490.00	45.6 AV	54.0	-8.4	1.81 H	244	31.08	14.52
3	#17235.00	57.3 PK	74.0	-16.7	1.50 H	241	33.54	23.76
4	#17235.00	47.7 AV	54.0	-6.3	1.50 H	241	23.94	23.76

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

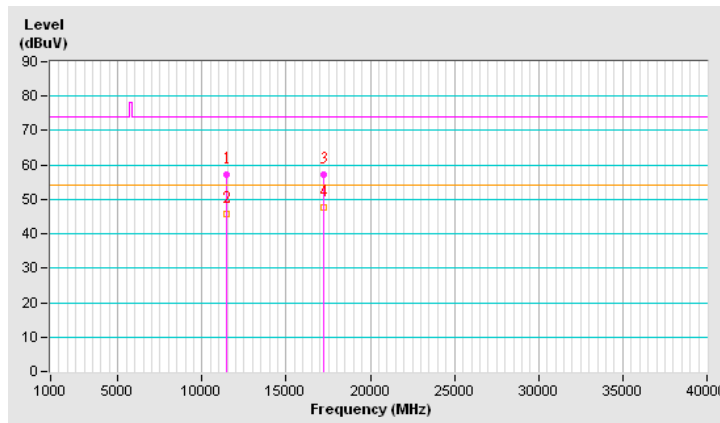


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	59.9 PK	74.0	-14.1	2.04 V	101	45.38	14.52
2	11490.00	48.8 AV	54.0	-5.2	2.04 V	101	34.28	14.52
3	#17235.00	59.4 PK	74.0	-14.6	1.75 V	161	35.64	23.76
4	#17235.00	49.0 AV	54.0	-5.0	1.75 V	161	25.24	23.76

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

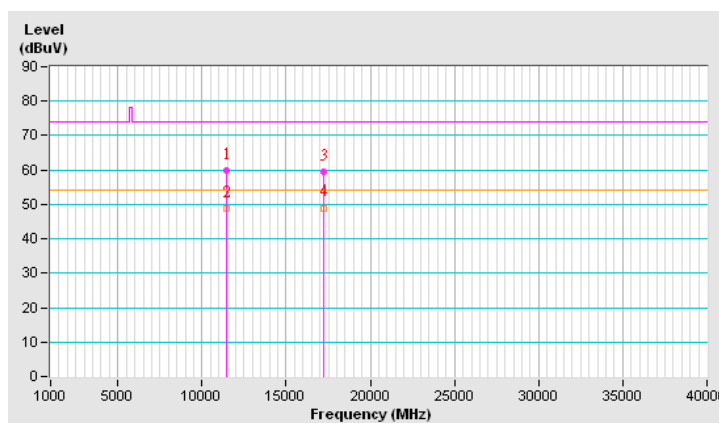


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	57.3 PK	74.0	-16.7	1.87 H	243	42.73	14.57
2	11570.00	45.7 AV	54.0	-8.3	1.87 H	243	31.13	14.57
3	#17355.00	57.4 PK	74.0	-16.6	1.61 H	218	33.34	24.06
4	#17355.00	47.6 AV	54.0	-6.4	1.61 H	218	23.54	24.06

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

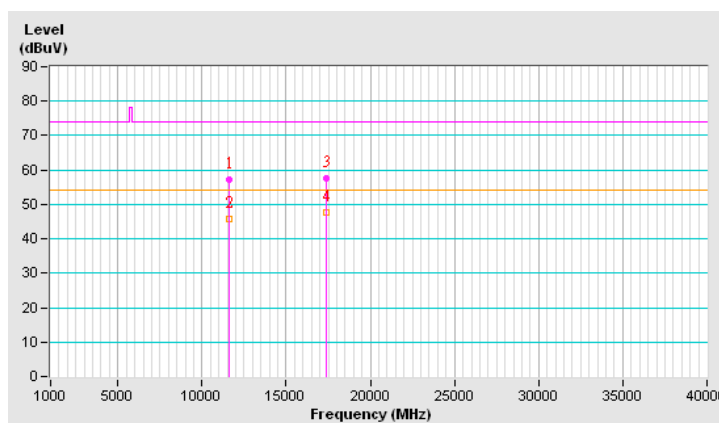


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	59.3 PK	74.0	-14.7	2.04 V	101	44.73	14.57
2	11570.00	48.7 AV	54.0	-5.3	2.04 V	101	34.13	14.57
3	#17355.00	59.2 PK	74.0	-14.8	1.78 V	151	35.14	24.06
4	#17355.00	49.1 AV	54.0	-4.9	1.78 V	151	25.04	24.06

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

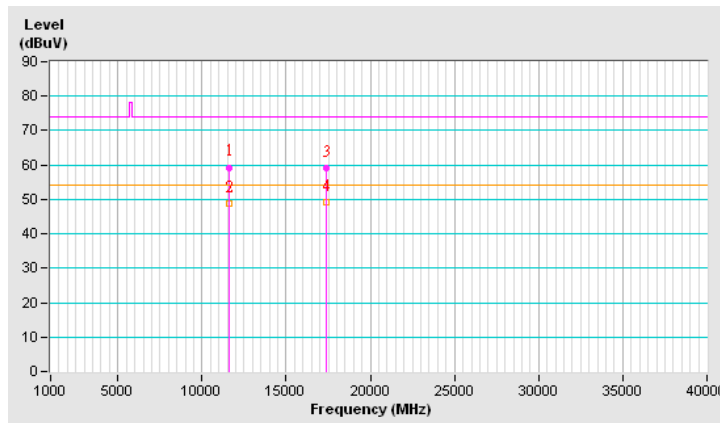


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	57.3 PK	74.0	-16.7	1.85 H	254	42.63	14.67
2	11650.00	45.9 AV	54.0	-8.1	1.85 H	254	31.23	14.67
3	#17475.00	58.0 PK	74.0	-16.0	1.56 H	241	33.98	24.02
4	#17475.00	48.0 AV	54.0	-6.0	1.56 H	241	23.98	24.02

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

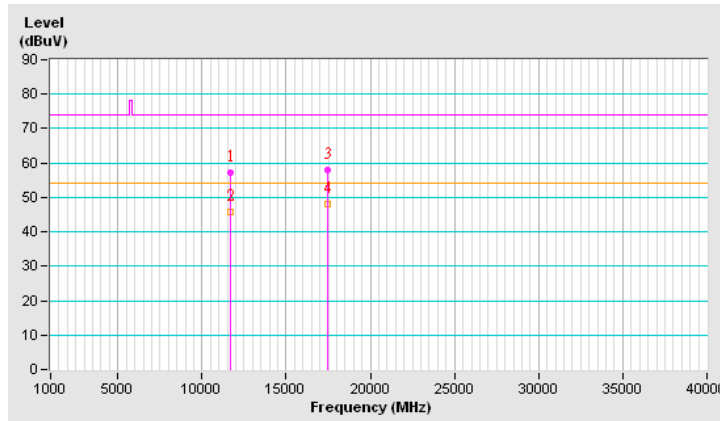


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	59.3 PK	74.0	-14.7	1.99 V	100	44.63	14.67
2	11650.00	48.5 AV	54.0	-5.5	1.99 V	100	33.83	14.67
3	#17475.00	58.9 PK	74.0	-15.1	1.77 V	166	34.88	24.02
4	#17475.00	48.8 AV	54.0	-5.2	1.77 V	166	24.78	24.02

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

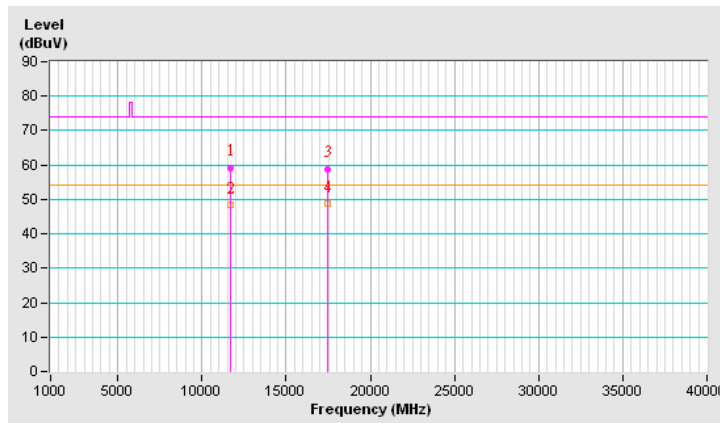

802.11ac (VHT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10380.00	55.4 PK	74.0	-18.6	1.83 H	250	41.19	14.21
2	#10380.00	44.3 AV	54.0	-9.7	1.83 H	250	30.09	14.21
3	15570.00	56.4 PK	74.0	-17.6	1.54 H	225	37.85	18.55
4	15570.00	46.4 AV	54.0	-7.6	1.54 H	225	27.85	18.55

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

