



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

802.11n + BT MODULE

MODEL NUMBER: WCN3660

FCC ID: PPD-WCN3660

IC: 4104A-WCN3660

REPORT NUMBER: 12U14222-10

ISSUE DATE: JUNE 11, 2012

Prepared for
**QUALCOMM Atheros, INC.
1700 TECHNOLOGY DRIVE
SAN JOSE, CA 95110, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	06/11/12	Initial Issue	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MODIFICATIONS</i>	6
5.3. <i>MAXIMUM OUTPUT POWER</i>	6
5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	7
5.5. <i>SOFTWARE AND FIRMWARE</i>	7
5.6. <i>WORST-CASE CONFIGURATION AND MODE</i>	7
5.7. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ANTENNA PORT TEST RESULTS	11
7.1. <i>6 dB BANDWIDTH</i>	11
7.2. <i>99% BANDWIDTH</i>	15
7.3. <i>OUTPUT POWER</i>	19
7.4. <i>AVERAGE POWER</i>	23
7.5. <i>POWER SPECTRAL DENSITY</i>	24
7.6. <i>CONDUCTED SPURIOUS EMISSIONS</i>	28
8. RADIATED TEST RESULTS	35
8.1. <i>LIMITS AND PROCEDURE</i>	35
8.2. <i>TRANSMITTER ABOVE 1 GHz</i>	36
8.3. <i>WORST-CASE BELOW 1 GHz</i>	45
9. AC POWER LINE CONDUCTED EMISSIONS	48
10. SETUP PHOTOS	53

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: QUALCOMM ATHEROS, INC.
1700 TECHNOLOGY DRIVE
SAN JOSE, CA, 95110, U.S.A.

EUT DESCRIPTION: 802.11n + BT MODULE

MODEL: WCN3660

SERIAL NUMBER: N10FXDC9 and N10G84TRF

DATE TESTED: March 27, 2012 -June 7, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



FRANK IBRAHIM
EMC SUPERVISOR
UL CCS

Tested By:



DENNIS HUANG
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is Qualcomm Atheros 802.11n + Bluetooth Adapter supports 802.11a/b/g/n and Bluetooth v2.1 + EDR/ Bluetooth 3.0/ Bluetooth 4.0 LE operation.

The test platform contains the WCN3660 module and the Qualcomm APQ8060A host processor which serves as the WLAN and BT baseband.

The radio module is manufactured by Qualcomm Atheros.

5.2. MODIFICATIONS

The manufacturer declares the following modification in order to pass 2nd harmonic:

“We have identified a source of leakage for the 2nd harmonic as the 1.8V bias line from the WCN3660 chip. We implemented a notch filter on this line inside the module to filter the harmonic and achieve compliance. This filter will be used in the production version of the module. It was added at the output of chip inside the Y0253 module on Vdd 1p8 LDO net.

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2.4GHz BLUETOOTH LOW ENERGY			
Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Bluetooth LE	8.56	7.18

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes **WCN3660 WLAN/BT** antenna with the following specification:

Band of operation (MHz)	2400-2483.5	5.15-5.35	5.47-5.725	5.725-5.850
Antenna Type	PIFA	PIFA	PIFA	PIFA
Antenna model	EBJ Aux	ED4 Main	ED4 Aux	ED4 Main
Antenna Gain (dBi)	3.62	5.6	5.3	4.8

5.5. SOFTWARE AND FIRMWARE

The test utility software used during testing was QRCT, Version 2.4.74.0.

5.6. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1 GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

All Radiated Emissions tests were tested with a new modified module (see Section 5.2 for Client's Description of changes).

All Antenna port tests were tested with the original RF module and verified with the new modified module to ensure its compliance performance.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Lenovo	2007-64U	L3-5C76D	DoC
Laptop 1	HP	EliteBook 8460P	CNU20326PD	Doc
Laptop 1 AC/DC Adapter	HP	PPP012D-S	608428-003	Doc
AC/DC Combo Adapter	Lenovo	40Y7649	670044390K	DoC
Host (MTP Test Platform)	Qualcomm	N10G1DJYG	7415BA7C	None
JTAG & Power Supply Adapter Board	Qualcomm	1DN14ASSY20-N6859	N10G1C4WW	None
Module Test Board	Qualcomm	1DN14ASSY20-Y0122	N10G3JMG8	None
DC power supply	Lambda	LA-300	783974	None
DC power supply	Xantrex	XHR 60-18	27519	None


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US 115V	Shielded	1	N/A
2	DC	1	DC	Un-shielded	1.85	Ferrite at laptop's end
3	USB	1	USB	Un-shielded	1.8	N/A
4	AC	1	US 115V	Shielded	1.85	N/A
5	DC	1	DC	Un-shielded	1	N/A

TEST SETUP

The EUT is soldered on a test board that is mounted on the MTP Test Platform. The back cover of the MTP is removed so that the EUT is totally exposed, outside of the host platform. Test software exercised the EUT.

SETUP DIAGRAM FOR TESTS

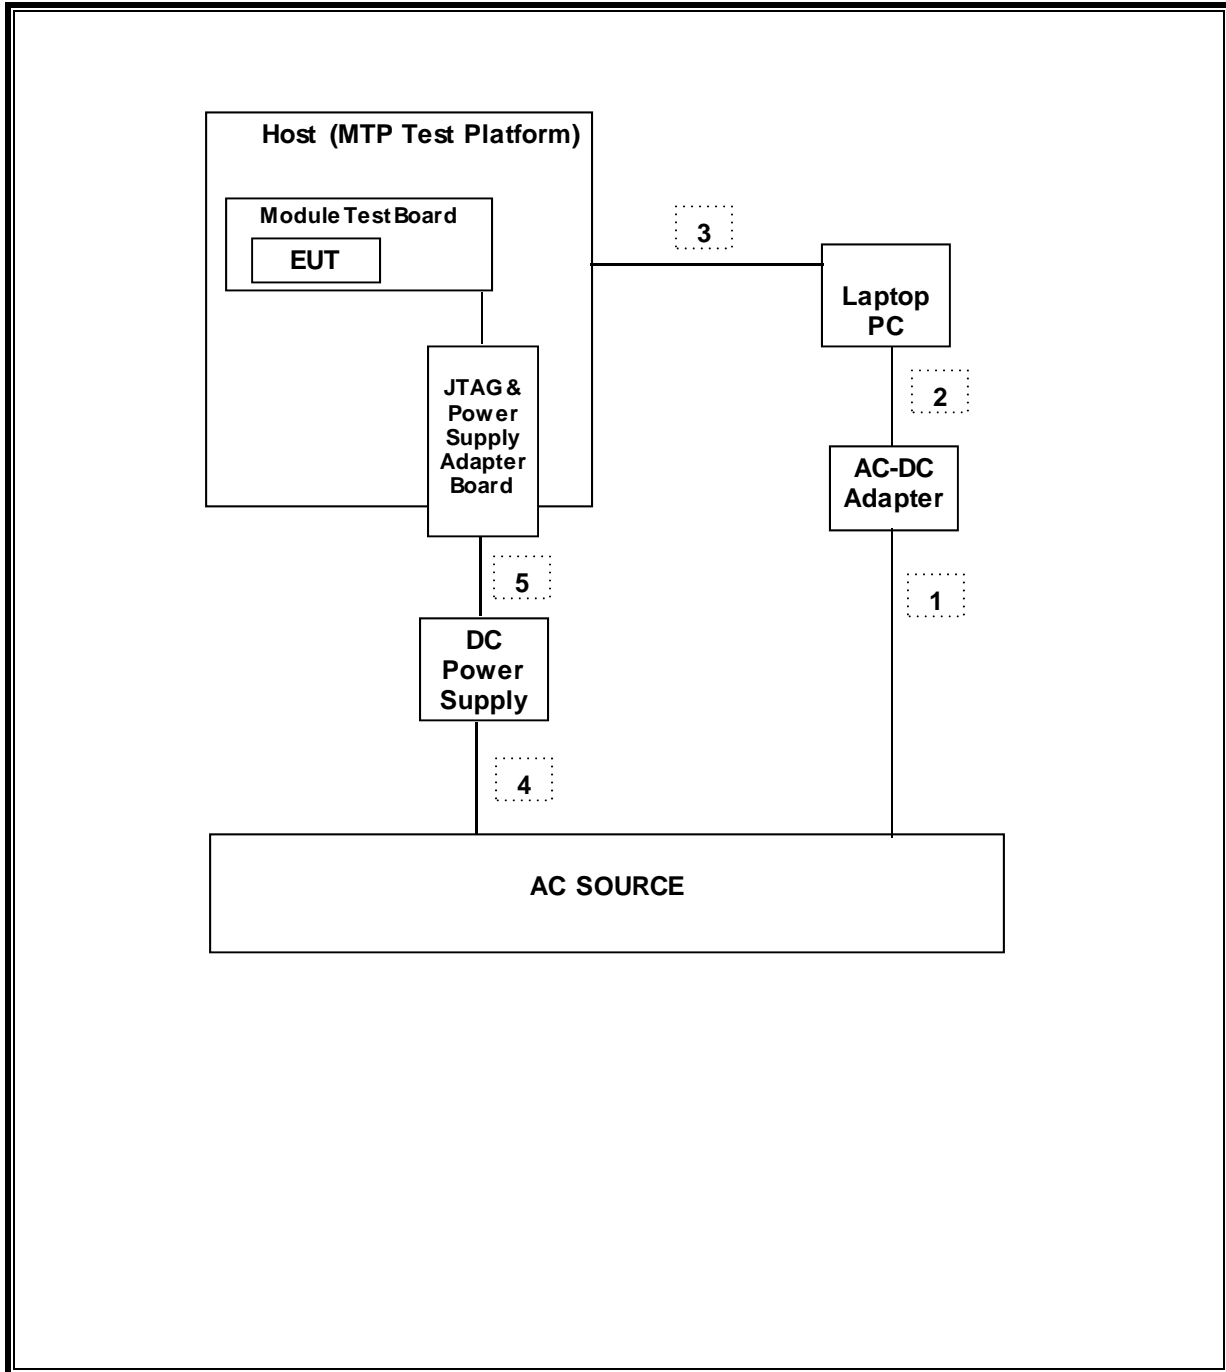

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due Date
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	07/14/12
Antenna, Horn, 18 GHz	EMCO	3115	C00945	06/29/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	11/11/12
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	07/12/12
Horn Antenna, 26.5 GHz	ARA	MWH-1826/B	C00589	07/28/12
Horn Antenna, 40 GHz	ARA	MWH-2640/B	C00981	06/14/12
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	03/14/13
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00986	03/22/13
Power Meter	Agilent / HP	437B	N02778	08/11/12
Power Sensor, 18 GHz	Agilent / HP	8481A	N02782	07/29/12
High pass Filter, 7.6 GHz	Micro-Tronics	HPM13195	N02682	CNR
Reject Notch Filter, 2.4 GHz	Micro-Tronics	-	-	CNR
EMI Test Receiver	R & S	ESHS 20	N02396	08/19/13
LISN	FCC	FCC-LISN-50/250	C00626	12/13/12

7. ANTENNA PORT TEST RESULTS

7.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE


KDB 558074 D01 DTS Measurement Guidance V01 dated 01-18-12.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.6655	0.5
Middle	2440	0.6620	0.5
High	2480	0.6600	0.5

6 dB BANDWIDTH

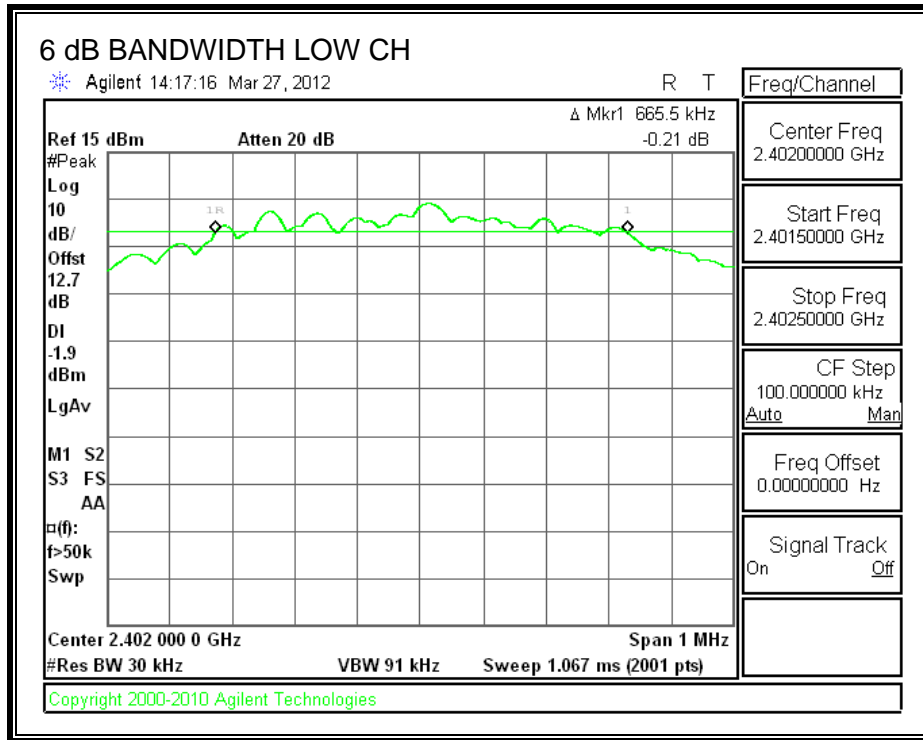

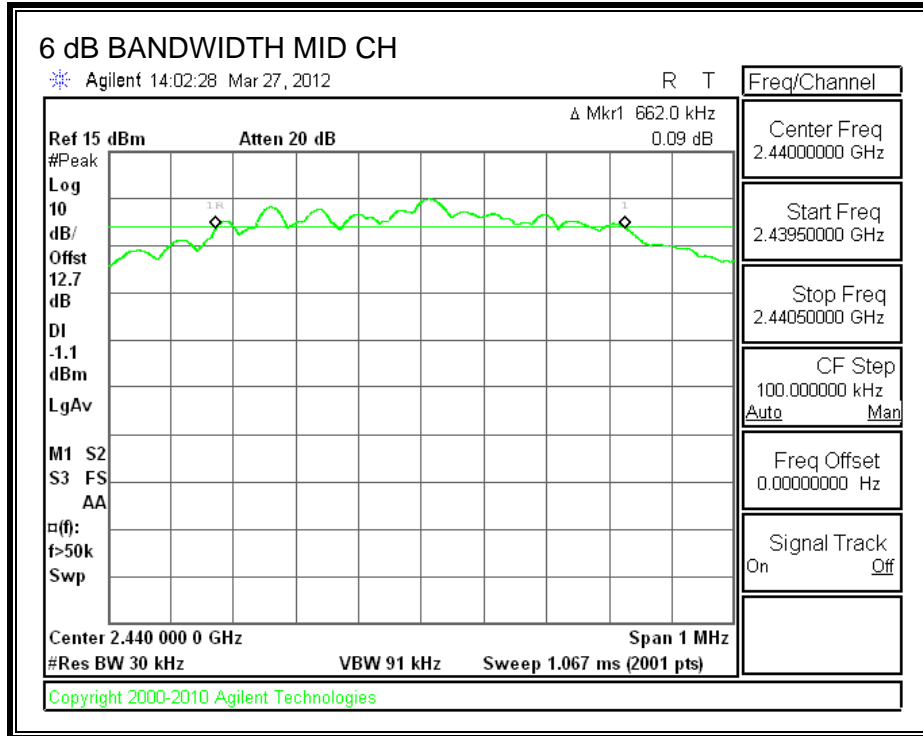

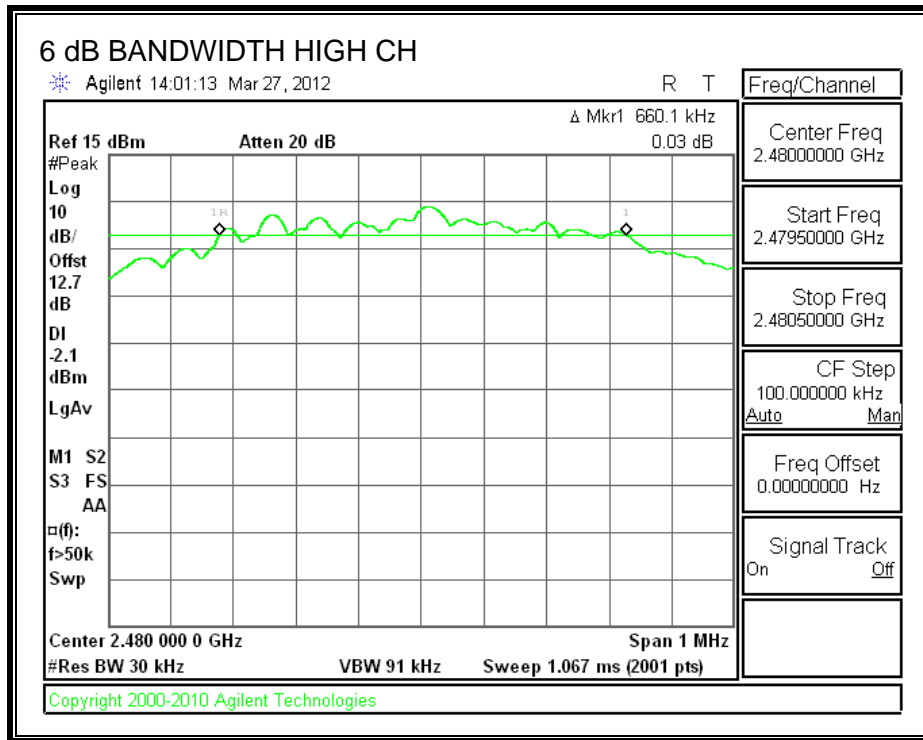

7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	1.0805
Middle	2437	1.0781
High	2462	1.0789

99% BANDWIDTH

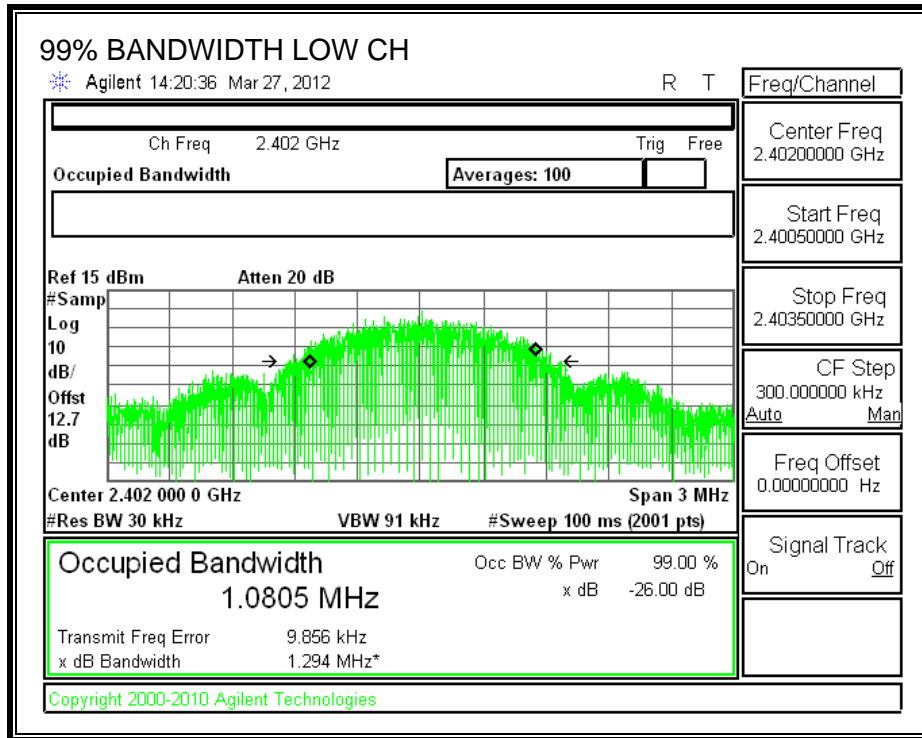

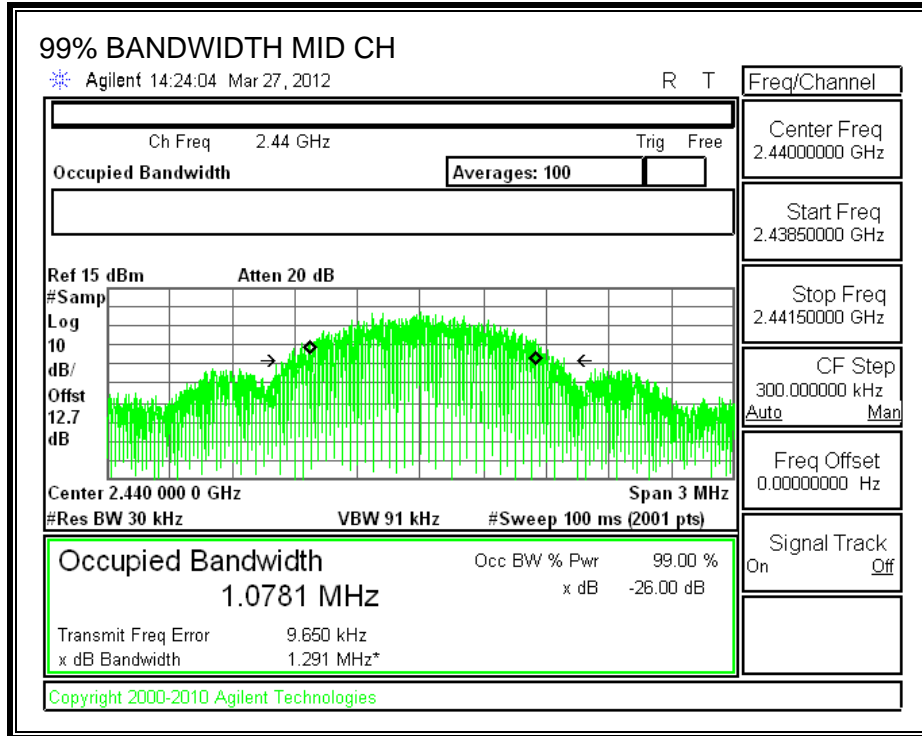

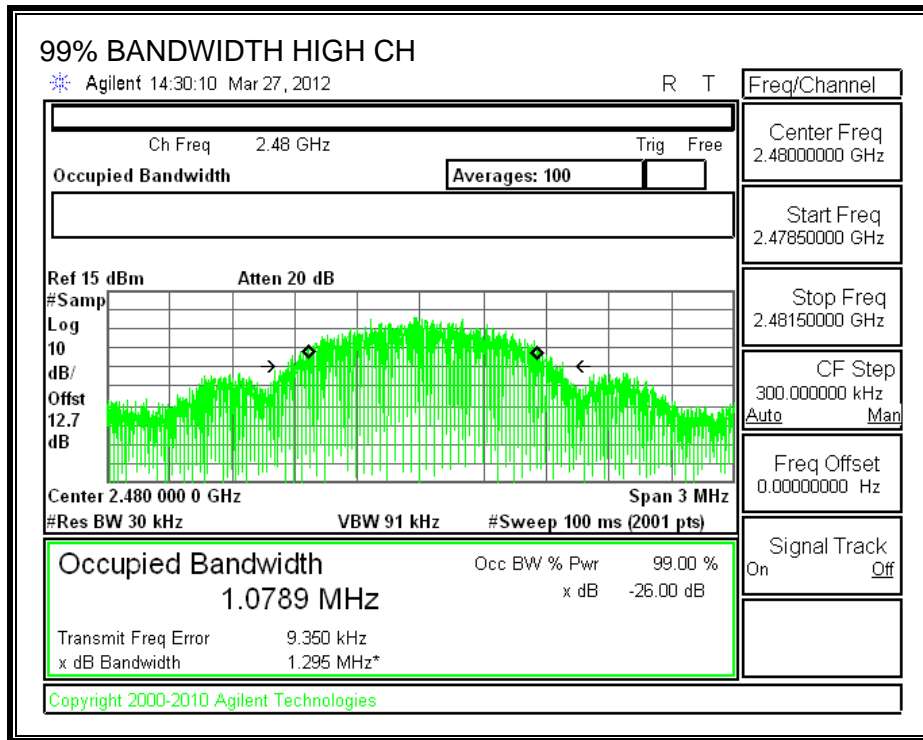

7.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


KDB 558074 D01 DTS Measurement Guidance V01 dated 01-18-12.


RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	7.77	30	-22.23
Middle	2440	8.56	30	-21.44
High	2480	7.49	30	-22.51

OUTPUT POWER

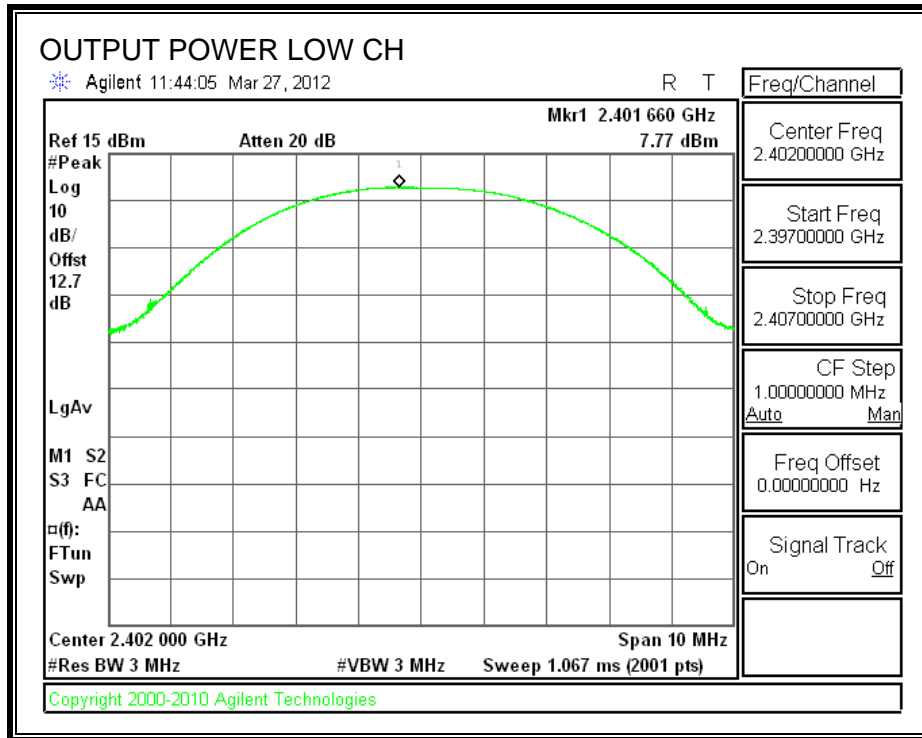

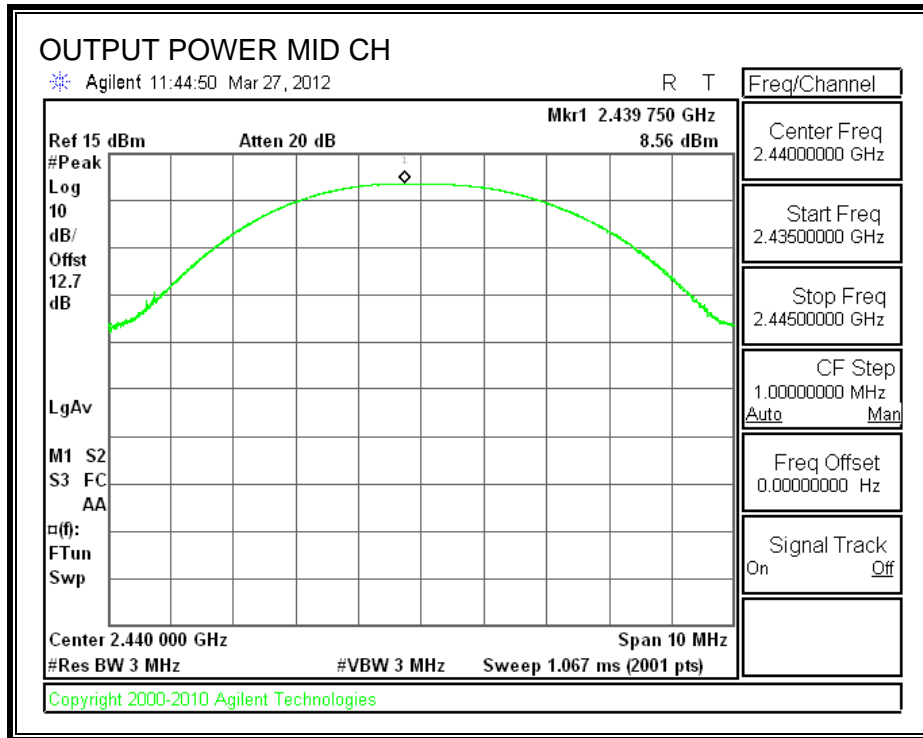

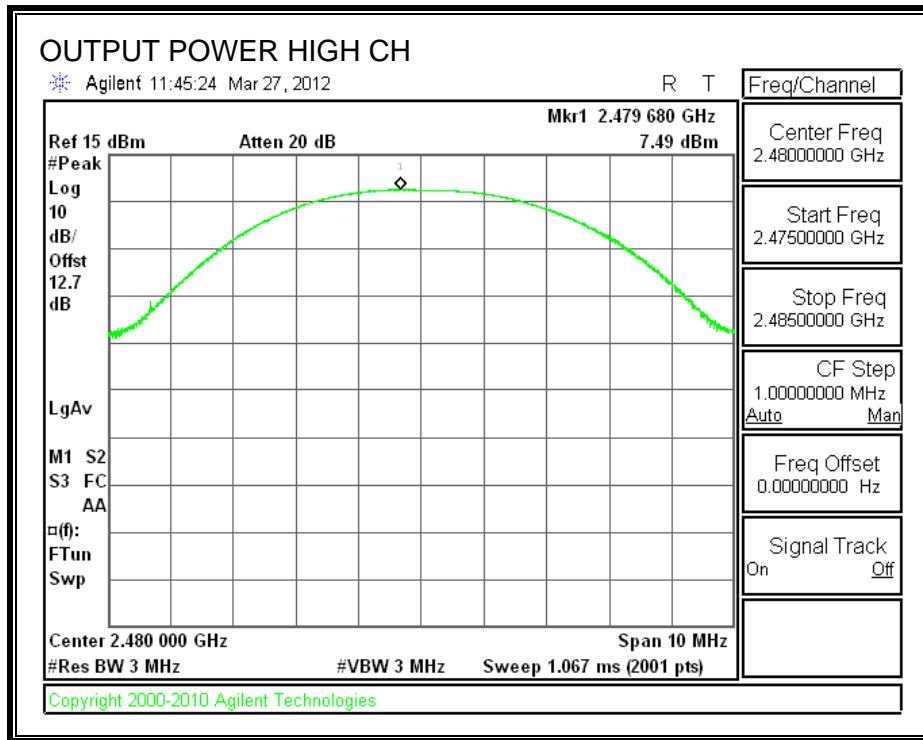

7.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 12.7 dB (including 12 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2402	6.30
Middle	2400	7.00
High	2480	6.00

7.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

TEST PROCEDURE


KDB 558074 D01 DTS Measurement Guidance V01 dated 01-18-12.


RESULTS


Note: analyzer offset = cable loss + attenuator + 10 log (3/100 kHz) = -2.5 dB

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-8.07	8	-16.07
Middle	2440	-7.30	8	-15.30
High	2480	-8.33	8	-16.33

POWER SPECTRAL DENSITY

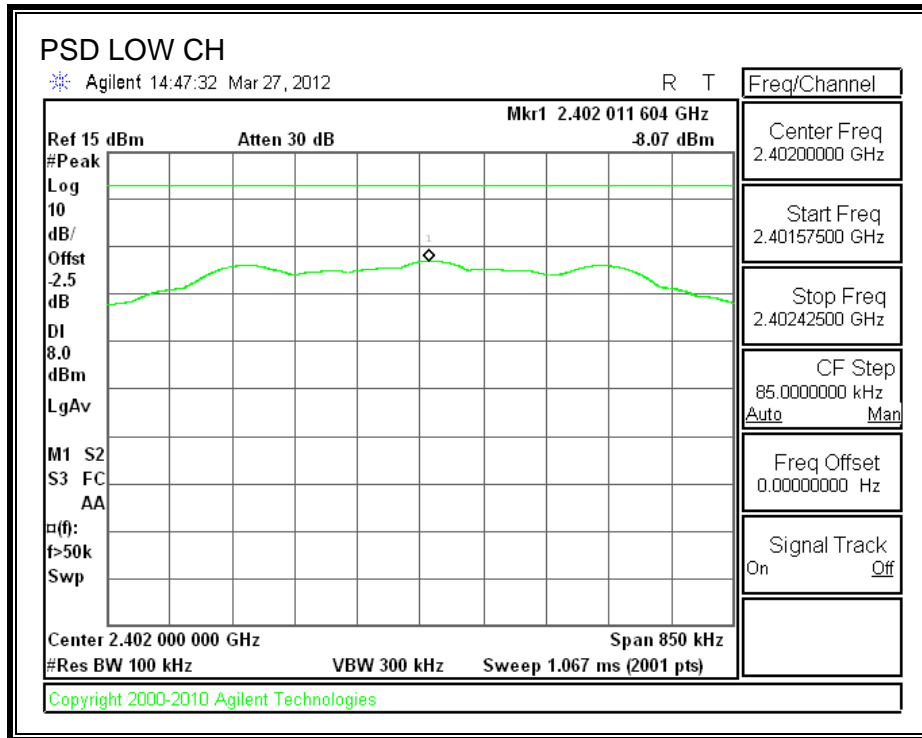

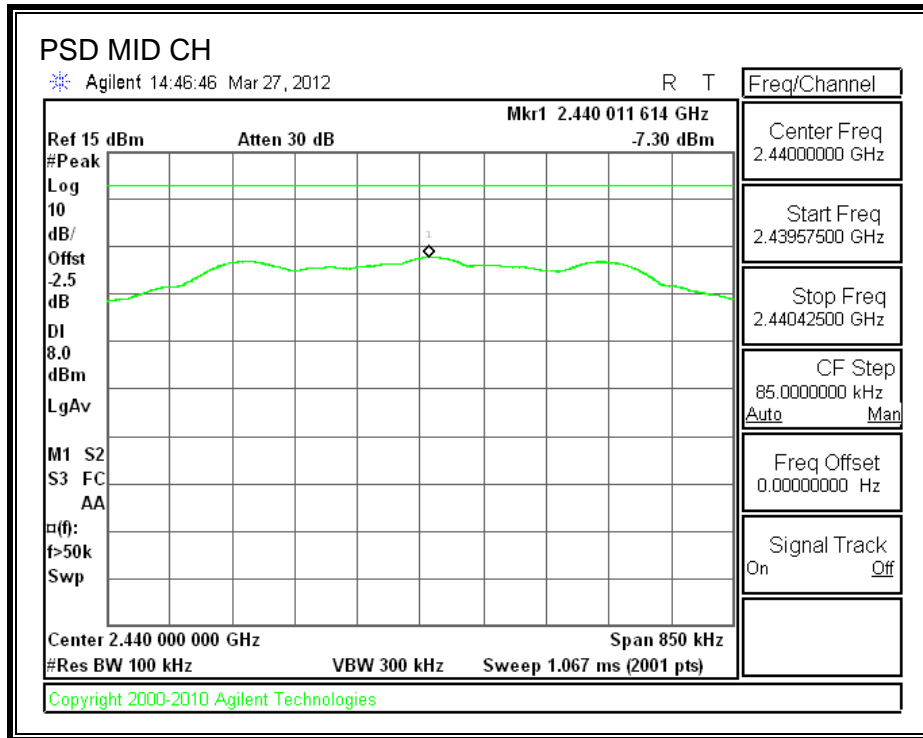

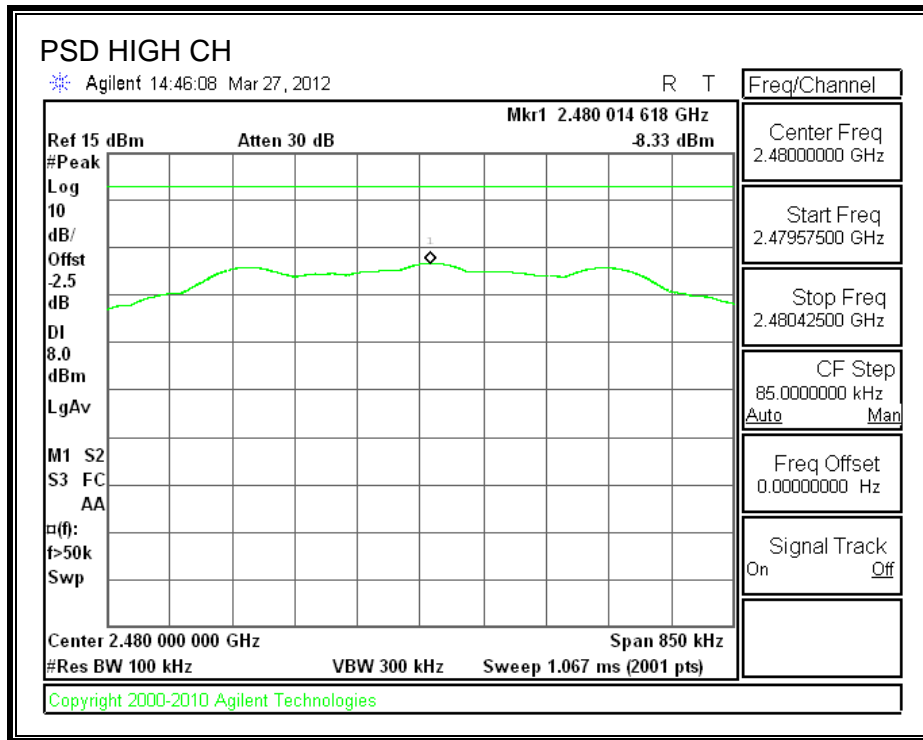

7.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5


Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE

KDB 558074 D01 DTS Measurement Guidance V01 dated 01-18-12.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

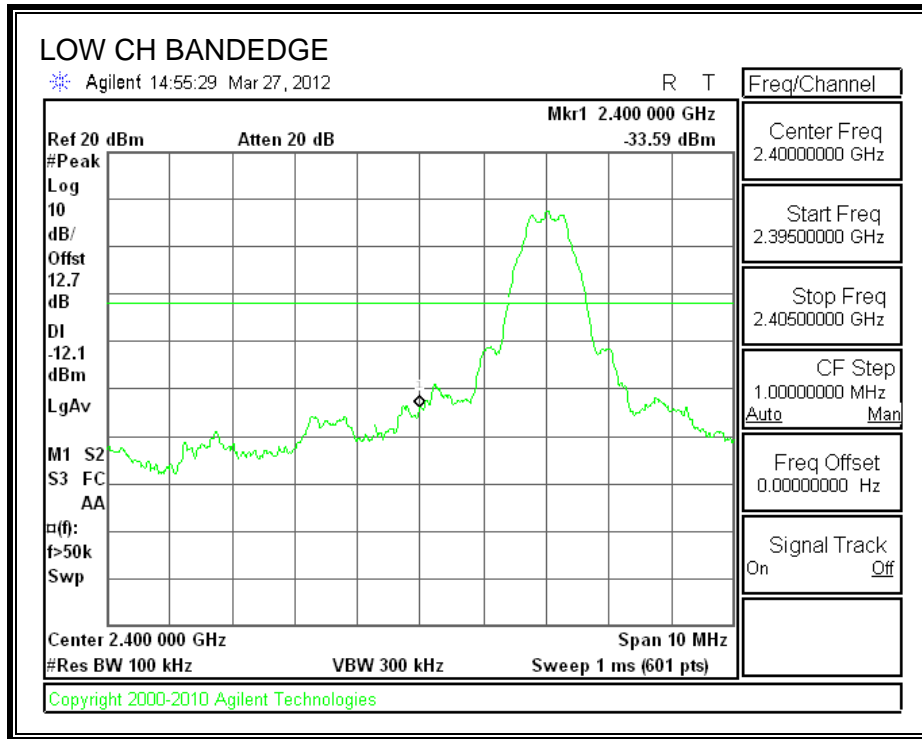

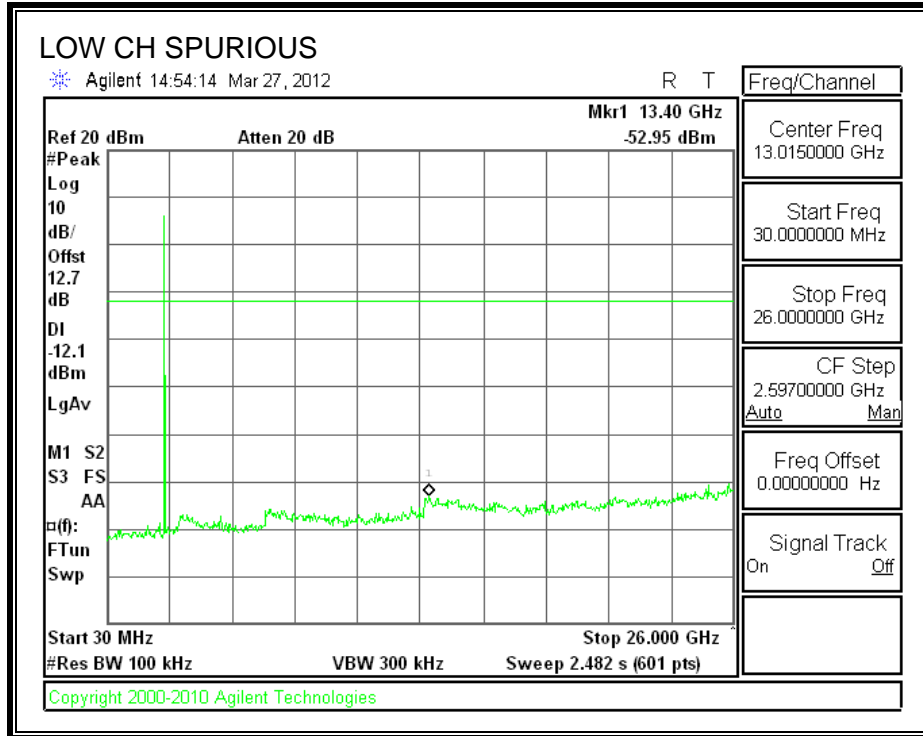



SPURIOUS EMISSIONS, MID CHANNEL

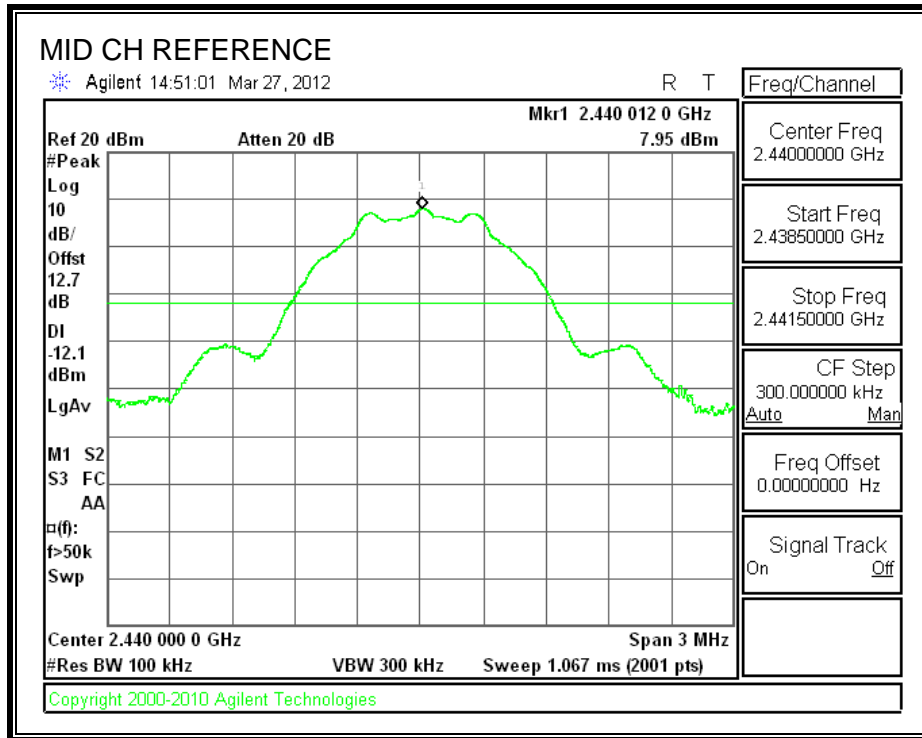

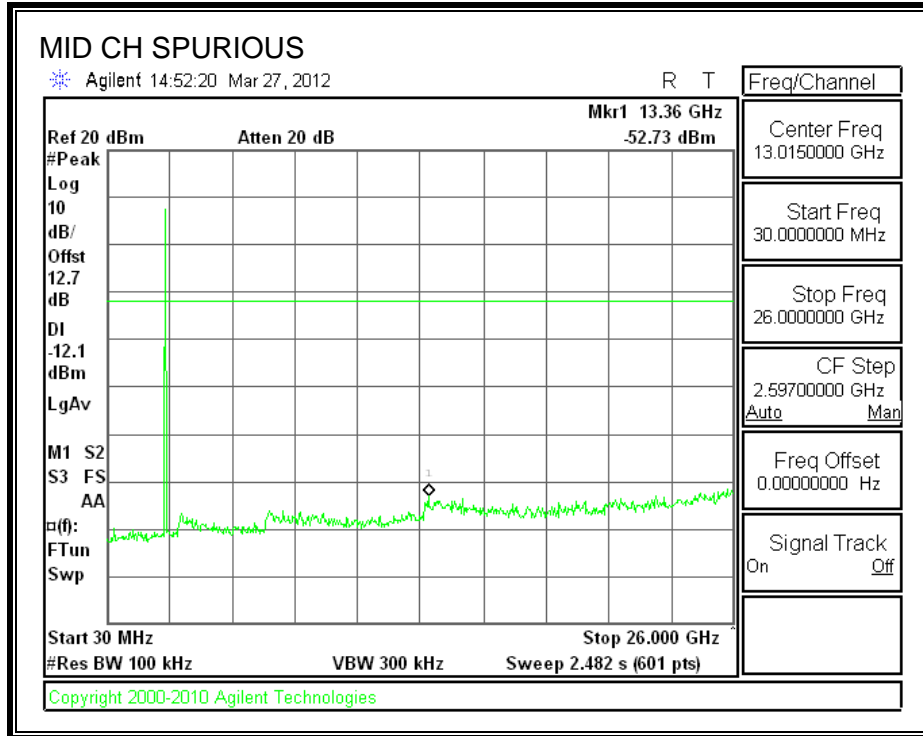

SPURIOUS EMISSIONS, HIGH CHANNEL

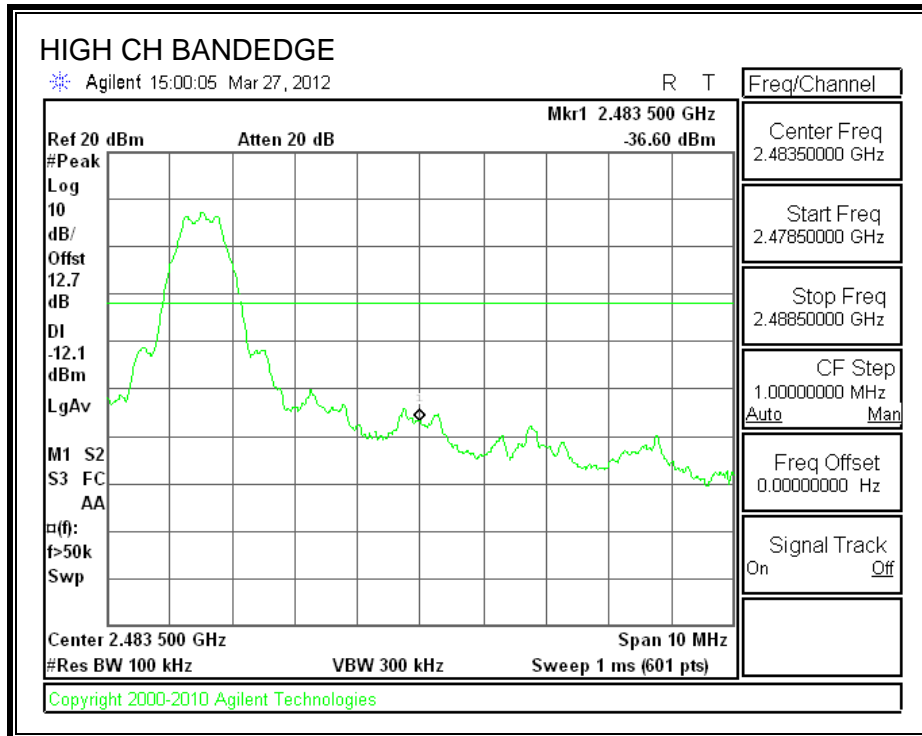

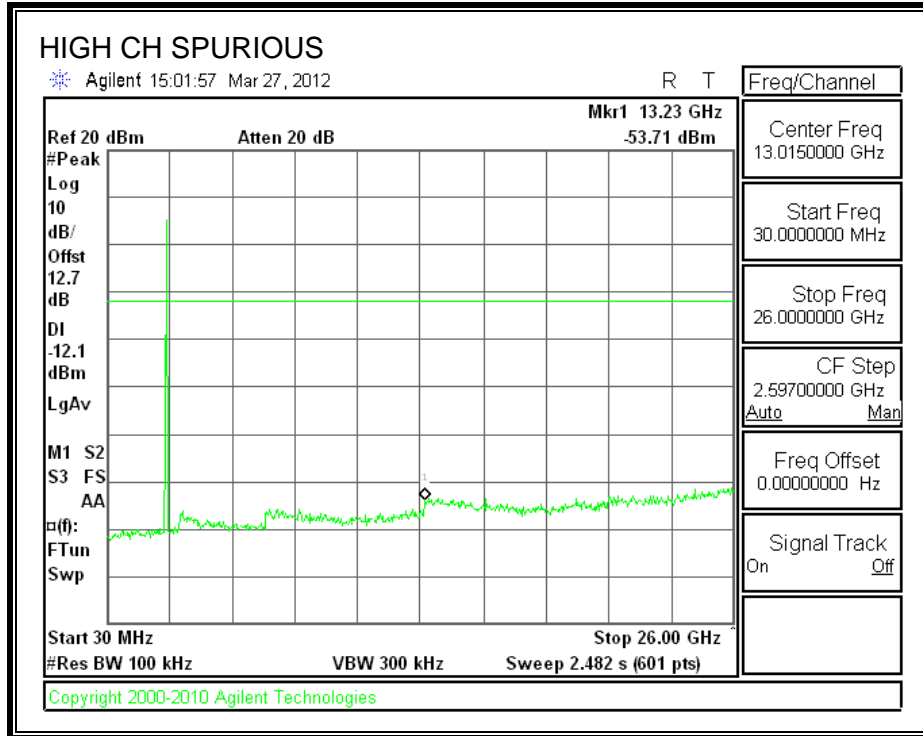

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


8.2. TRANSMITTER ABOVE 1 GHz


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

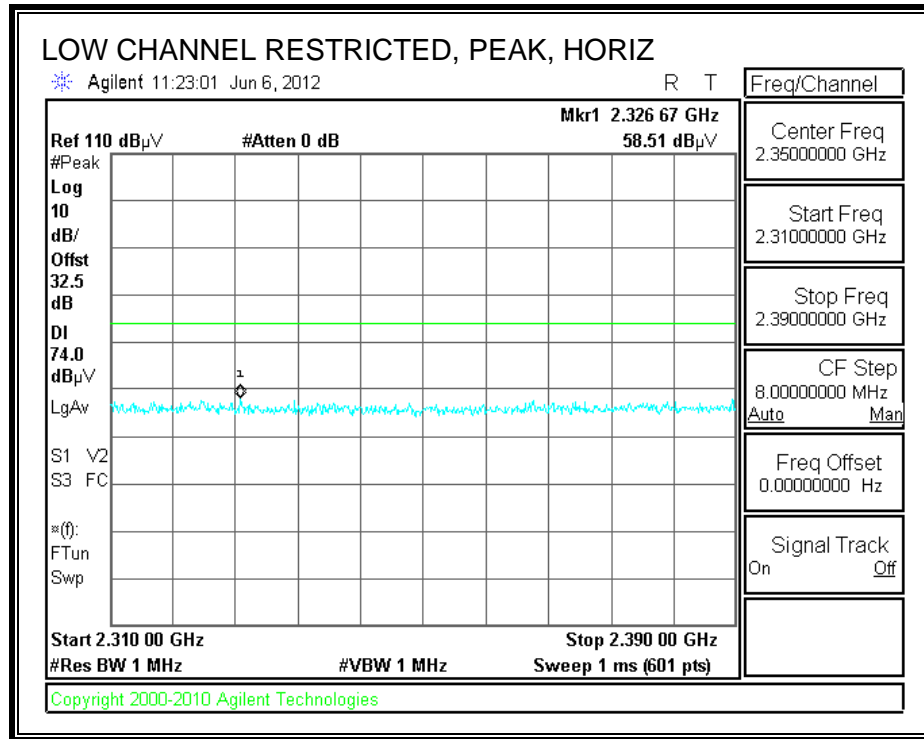

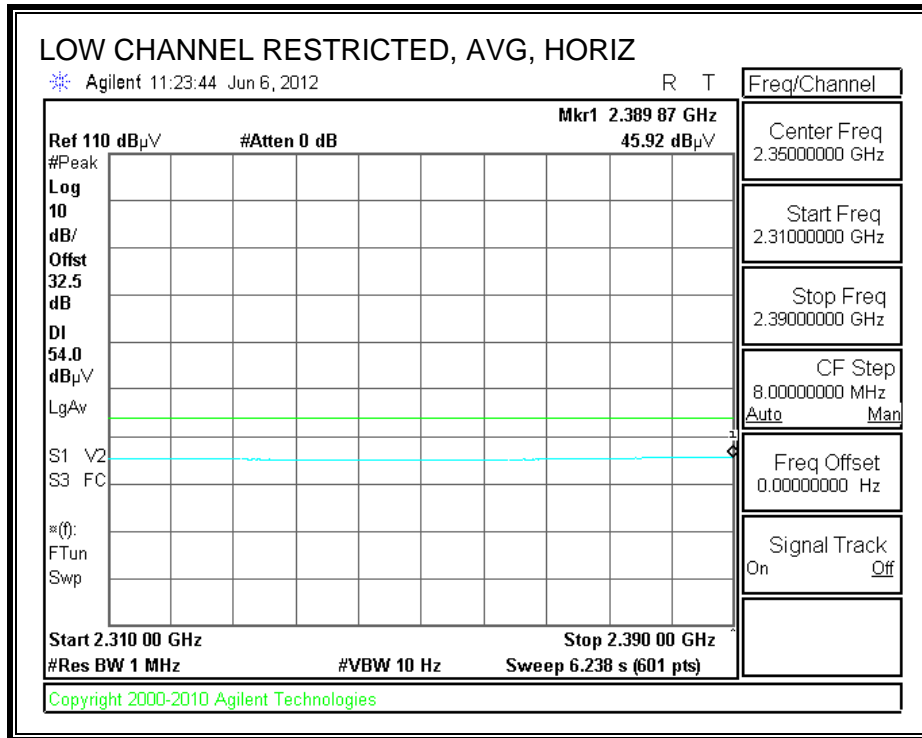



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

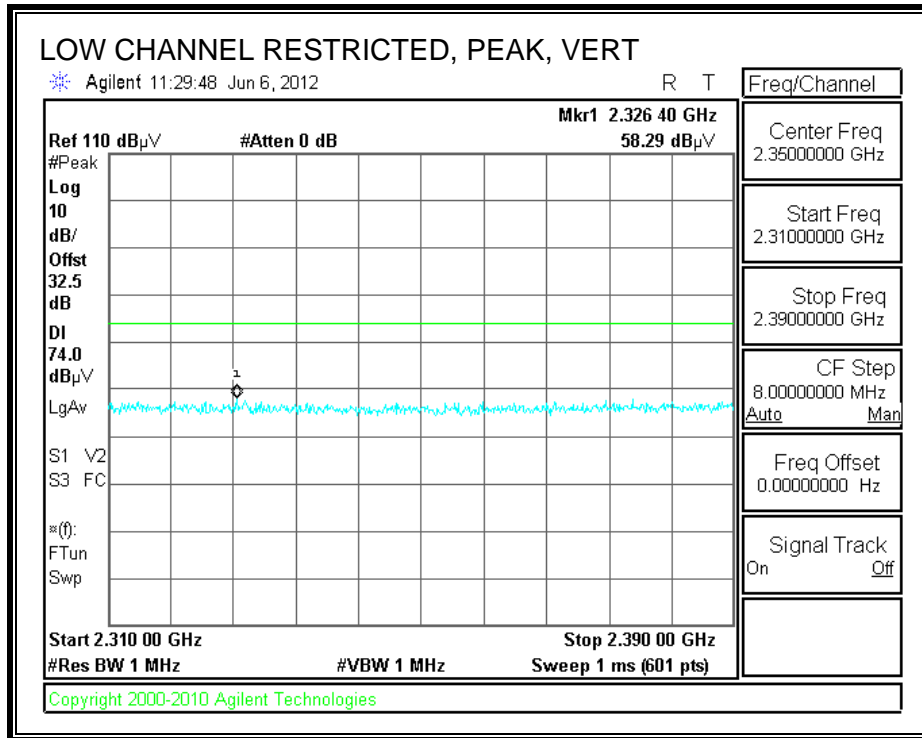

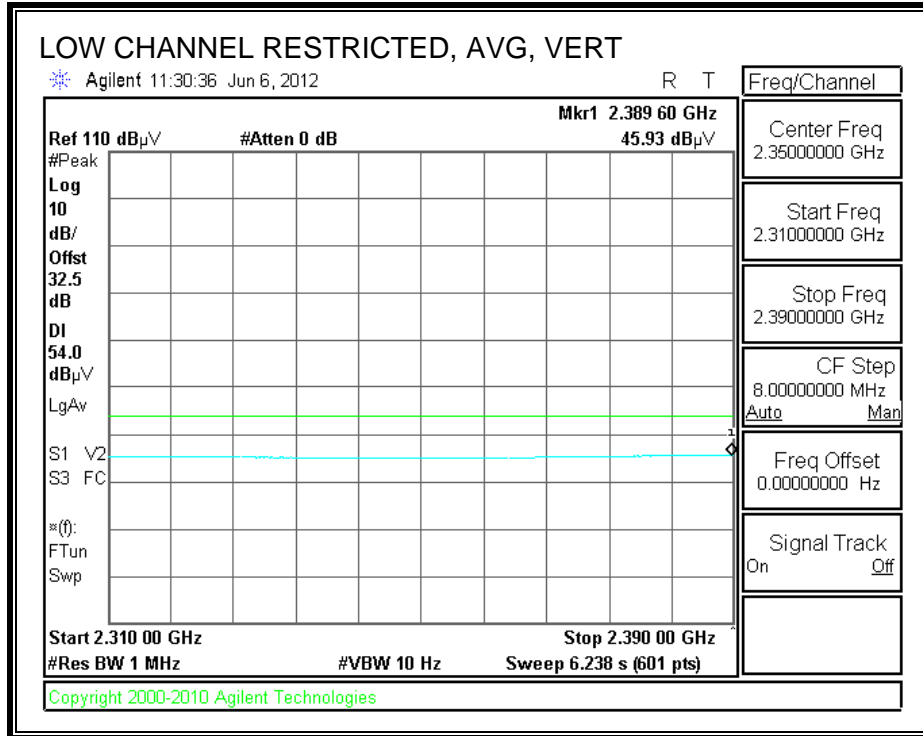



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

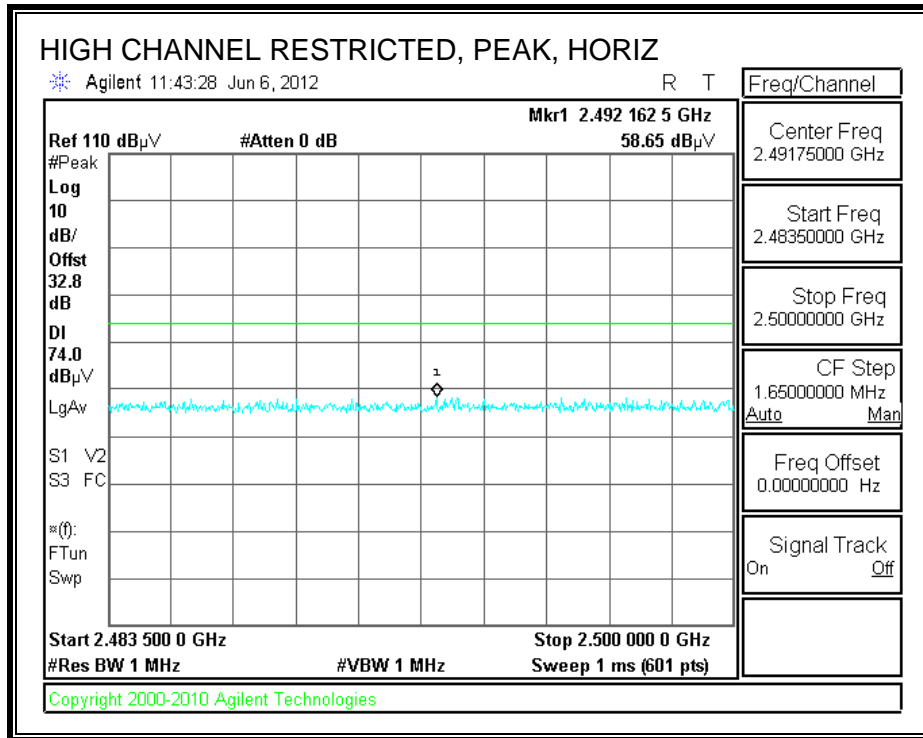

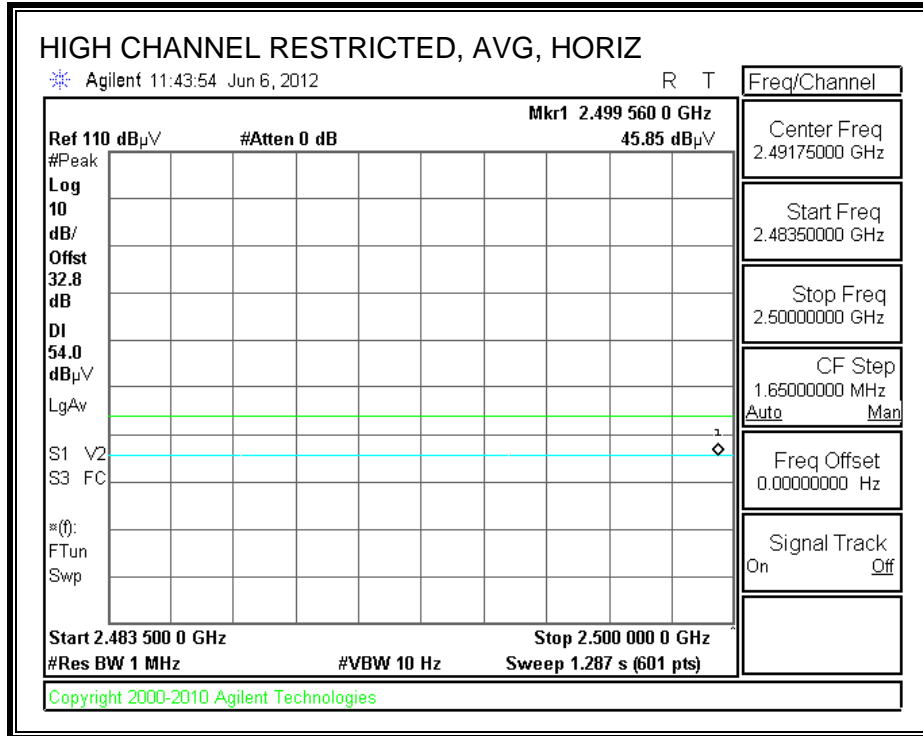

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

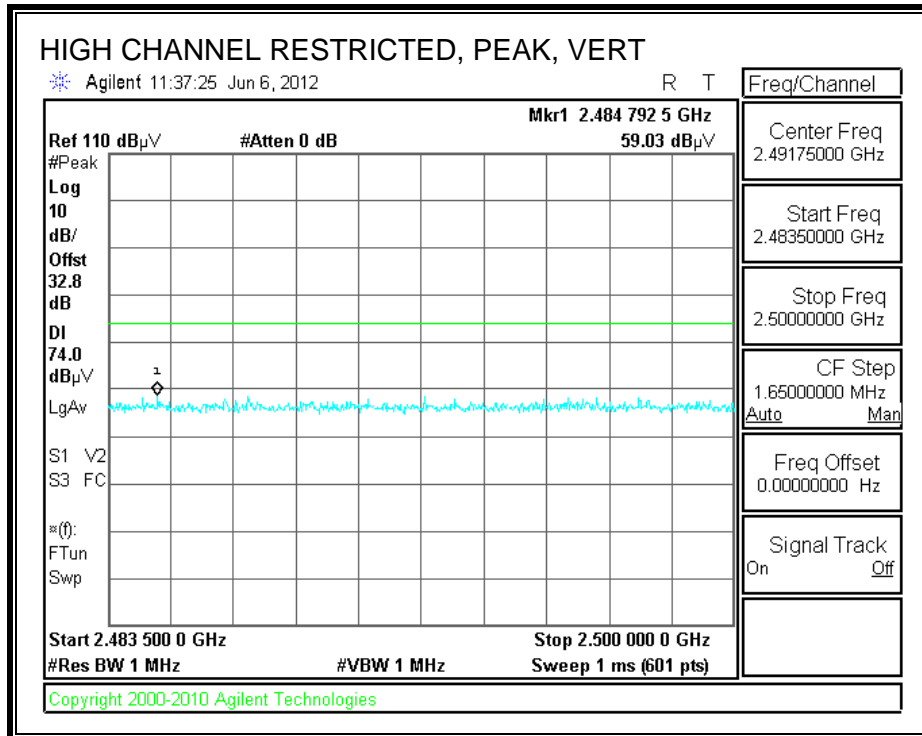

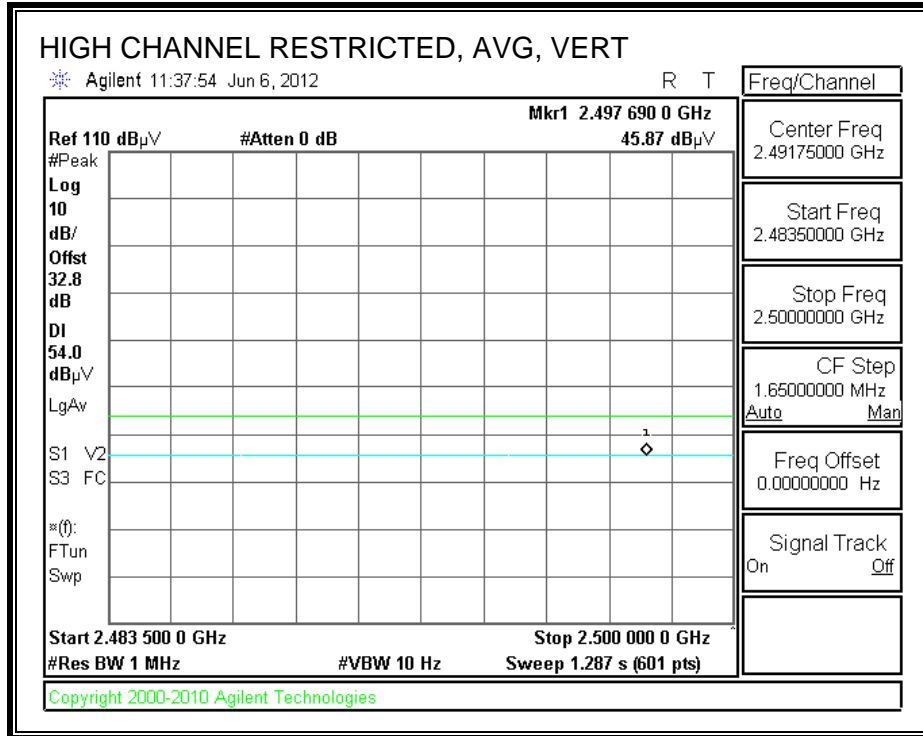


HARMONICS AND SPURIOUS EMISSIONS


High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Test Engr:		Oliver Su													
Date:		06/05/12													
Project #:		12U14222													
Company:		Qualcomm Atheros													
Test Target:		FCC 15 205													
Mode Oper:		EUT was attached to a host phone with open cover, connected to Antenna of EUT, Bluetooth LE, Tx													
<p>f Measurement Frequency Amp Preamp Gain Average Field Strength Limit Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit CL Cable Loss HPF High Pass Filter</p>															
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant.High cm	Table Angle Degree	Notes
Low Ch															
4.804	3.0	36.6	33.1	6.8	-34.1	0.0	0.0	42.4	74.0	-31.6	H	P	103.0	52.0	
4.804	3.0	24.3	33.1	6.8	-34.1	0.0	0.0	30.1	54.0	-23.9	H	A	103.0	52.0	
4.804	3.0	36.5	33.1	6.8	-34.1	0.0	0.0	42.3	74.0	-31.7	V	P	101.0	325.0	
4.804	3.0	25.0	33.1	6.8	-34.1	0.0	0.0	30.9	54.0	-23.1	V	A	101.0	325.0	
12.010	3.0	33.3	39.4	11.9	-32.5	0.0	0.0	52.1	74.0	-21.9	V	P	144.0	154.0	
12.010	3.0	21.4	39.4	11.9	-32.5	0.0	0.0	40.2	54.0	-13.8	V	A	144.0	154.0	
12.010	3.0	33.6	39.4	11.9	-32.5	0.0	0.0	52.4	74.0	-21.6	H	P	137.0	172.0	
12.010	3.0	21.3	39.4	11.9	-32.5	0.0	0.0	40.1	54.0	-13.9	H	A	137.0	172.0	
Mid Ch															
4.880	3.0	37.0	33.2	6.8	-34.0	0.0	0.0	42.9	74.0	-31.1	H	P	149.0	93.0	
4.880	3.0	23.9	33.2	6.8	-34.0	0.0	0.0	29.8	54.0	-24.2	H	A	149.0	93.0	
4.880	3.0	35.8	33.2	6.8	-34.0	0.0	0.0	41.8	74.0	-32.2	V	P	190.0	131.0	
4.880	3.0	24.0	33.2	6.8	-34.0	0.0	0.0	29.9	54.0	-24.1	V	A	190.0	131.0	
7.320	3.0	35.1	36.3	9.1	-33.1	0.0	0.0	47.4	74.0	-26.6	V	P	121.0	0.0	
7.320	3.0	22.6	36.3	9.1	-33.1	0.0	0.0	34.9	54.0	-19.1	V	A	121.0	0.0	
7.320	3.0	35.0	36.3	9.1	-33.1	0.0	0.0	47.3	74.0	-26.7	H	P	116.0	45.0	
7.320	3.0	33.9	36.3	9.1	-33.1	0.0	0.0	46.2	54.0	-7.8	H	A	116.0	45.0	
High Ch															
4.960	3.0	37.2	33.2	6.9	-34.0	0.0	0.0	43.3	74.0	-30.7	H	P	187.0	235.0	
4.960	3.0	23.5	33.2	6.9	-34.0	0.0	0.0	29.6	54.0	-24.4	H	A	187.0	235.0	
4.960	3.0	35.3	33.2	6.9	-34.0	0.0	0.0	41.4	74.0	-32.6	V	P	118.0	318.0	
4.960	3.0	23.3	33.2	6.9	-34.0	0.0	0.0	29.4	54.0	-24.6	V	A	118.0	318.0	
7.440	3.0	34.6	36.5	9.1	-33.0	0.0	0.0	47.2	74.0	-26.8	V	P	151.0	299.0	
7.440	3.0	22.2	36.5	9.1	-33.0	0.0	0.0	34.7	54.0	-19.3	V	A	151.0	299.0	
7.440	3.0	35.4	36.5	9.1	-33.0	0.0	0.0	47.9	74.0	-26.1	H	P	98.0	288.0	
7.440	3.0	22.3	36.5	9.1	-33.0	0.0	0.0	34.9	54.0	-19.1	H	A	98.0	288.0	
Rev. 4.1.2.7															
Note: No other emissions were detected above the system noise floor.															

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

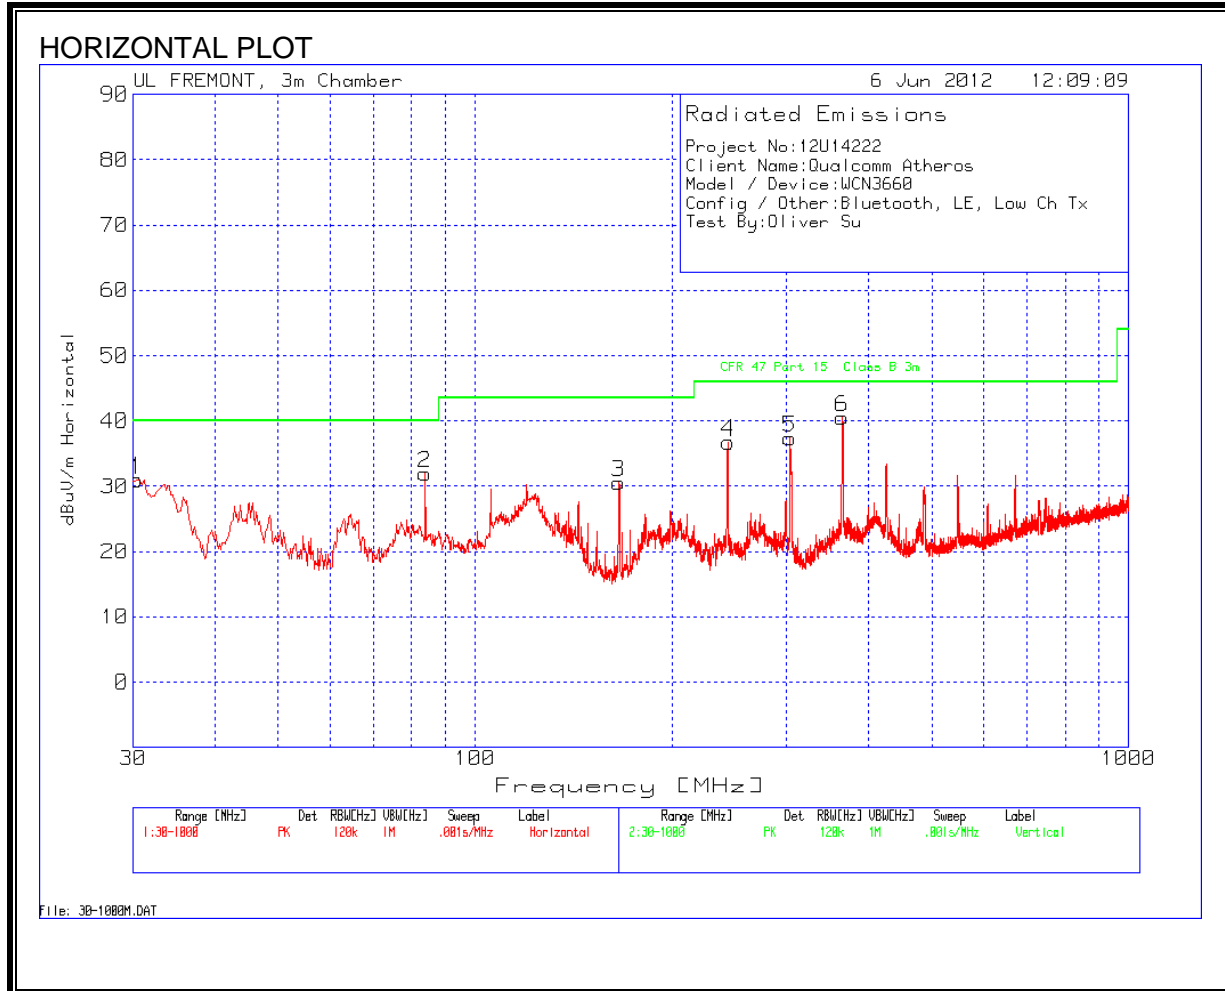

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

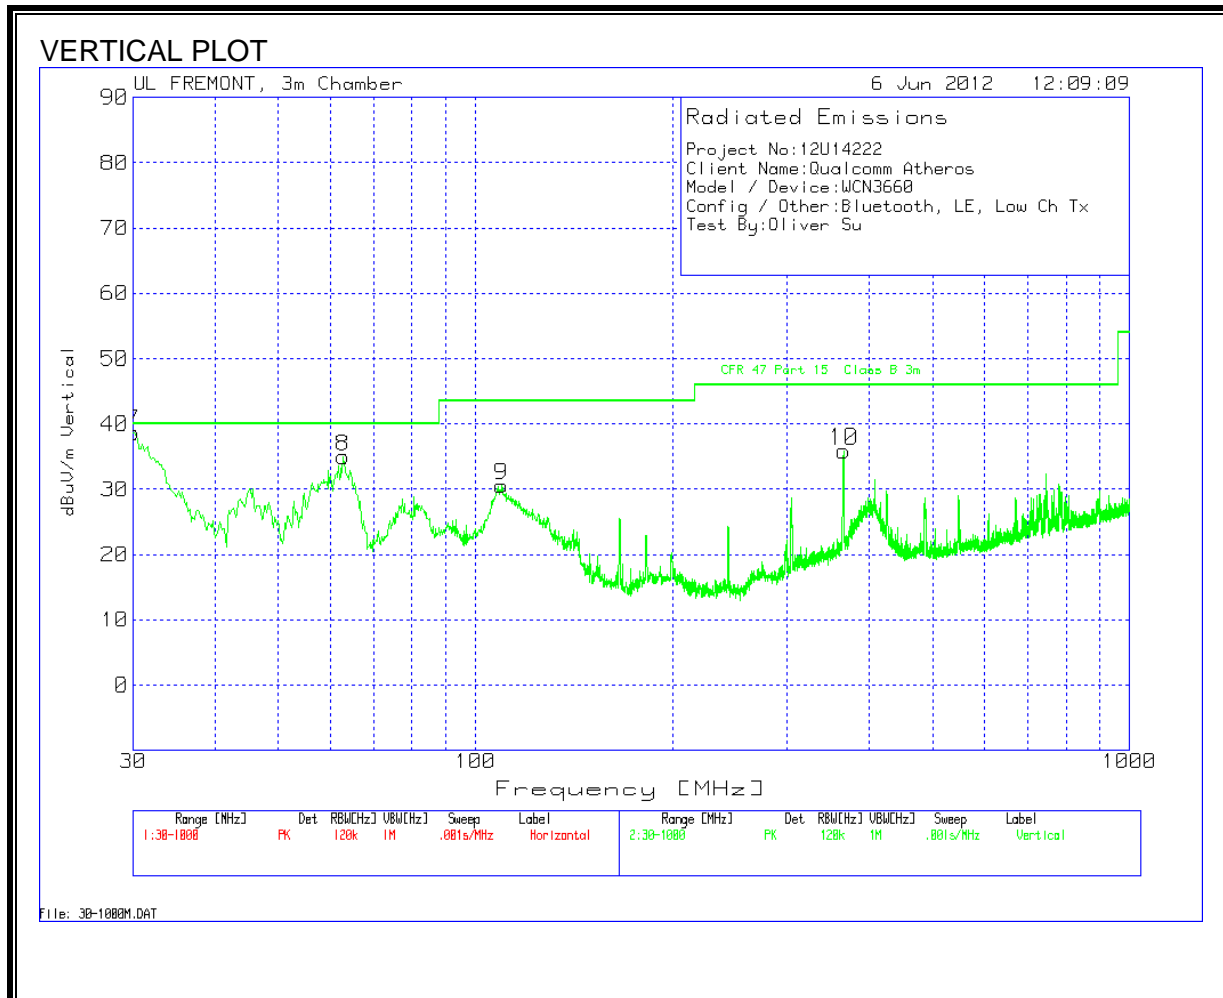

HORIZONTAL AND VERTICAL DATA

Project No:12U14222									
Client Name:Qualcomm Atheros									
Model / Device:WCN3660									
Config / Other:Bluetooth, LE, Low Ch Tx									
Test By:Oliver Su									
Horizontal 30-1000MHz									
Test Frequency	Meter Reading	Detector	25MHz-1GHz Chambr 3m Amplified (dB)	Antenna T185 (dB)	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity
30.3877	37.62	PK	-27.5	20.9	31.02	40	-8.98	100	Horz
83.8889	51.52	PK	-27	7.4	31.92	40	-8.08	300	Horz
165.8853	44.95	PK	-26.2	11.8	30.55	43.5	-12.95	200	Horz
244.0048	50.5	PK	-25.4	11.7	36.8	46	-9.2	100	Horz
303.5152	49.19	PK	-25.2	13.4	37.39	46	-8.61	100	Horz
364.3825	51.05	PK	-25.4	14.9	40.55	46	-5.45	100	Horz
Vertical 30-1000MHz									
Test Frequency	Meter Reading	Detector	25MHz-1GHz Chambr 3m Amplified (dB)	Antenna T185 (dB)	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity
32.71	44.97	PK	-27.5	21.2	38.67	40	-1.33	99	Vert
32.7121	37.41	QP	-27.5	19.2	29.11	40	-10.89	101	Vert
62.7598	54.68	PK	-27.2	7.5	34.98	40	-5.02	99	Vert
109.6703	44.98	PK	-26.7	12.3	30.58	43.5	-12.92	99	Vert
365.7394	46.38	PK	-25.4	14.9	35.88	46	-10.12	201	Vert
PK - Peak detector									
QP - Quasi-Peak detector									

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4

LINE 1 RESULTS

6 WORST EMISSIONS


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dB(uVolts)	CFR 47 Part 15 Class B QP	Margin to Limit (dB)	CFR 47 Part 15 Class B Avg	Margin to Limit (dB)
1	.15	59.62	PK	.1	0	59.72	66	-6.28	-	-
2	.15	41.48	Av	.1	0	41.58	-	-	56	-14.42
3	.186	57.92	PK	.1	0	58.02	64.2	-6.18	-	-
4	.186	50.33	Av	.1	0	50.43	-	-	54.2	-3.77
5	.249	44.01	PK	.1	0	44.11	61.8	-17.69	-	-
6	.249	35.5	Av	.1	0	35.6	-	-	51.8	-16.2
7	28.518	56.73	PK	.5	.3	57.53	60	-2.47	-	-
8	28.518	48.01	Av	.5	.3	48.81	-	-	50	-1.19
9	28.77	57.13	PK	.5	.3	57.93	60	-2.07	-	-
10	28.77	44.96	Av	.5	.3	45.76	-	-	50	-4.24
11	29.2695	56.7	PK	.5	.3	57.5	60	-2.5	-	-
12	29.2695	45	Av	.5	.3	45.8	-	-	50	-4.2
13	29.5215	57.57	PK	.5	.3	58.37	60	-1.63	-	-
14	29.5215	44.1	Av	.5	.3	44.9	-	-	50	-5.1

PK - Peak detector

Av - average detection

LINE 1 RESULTS

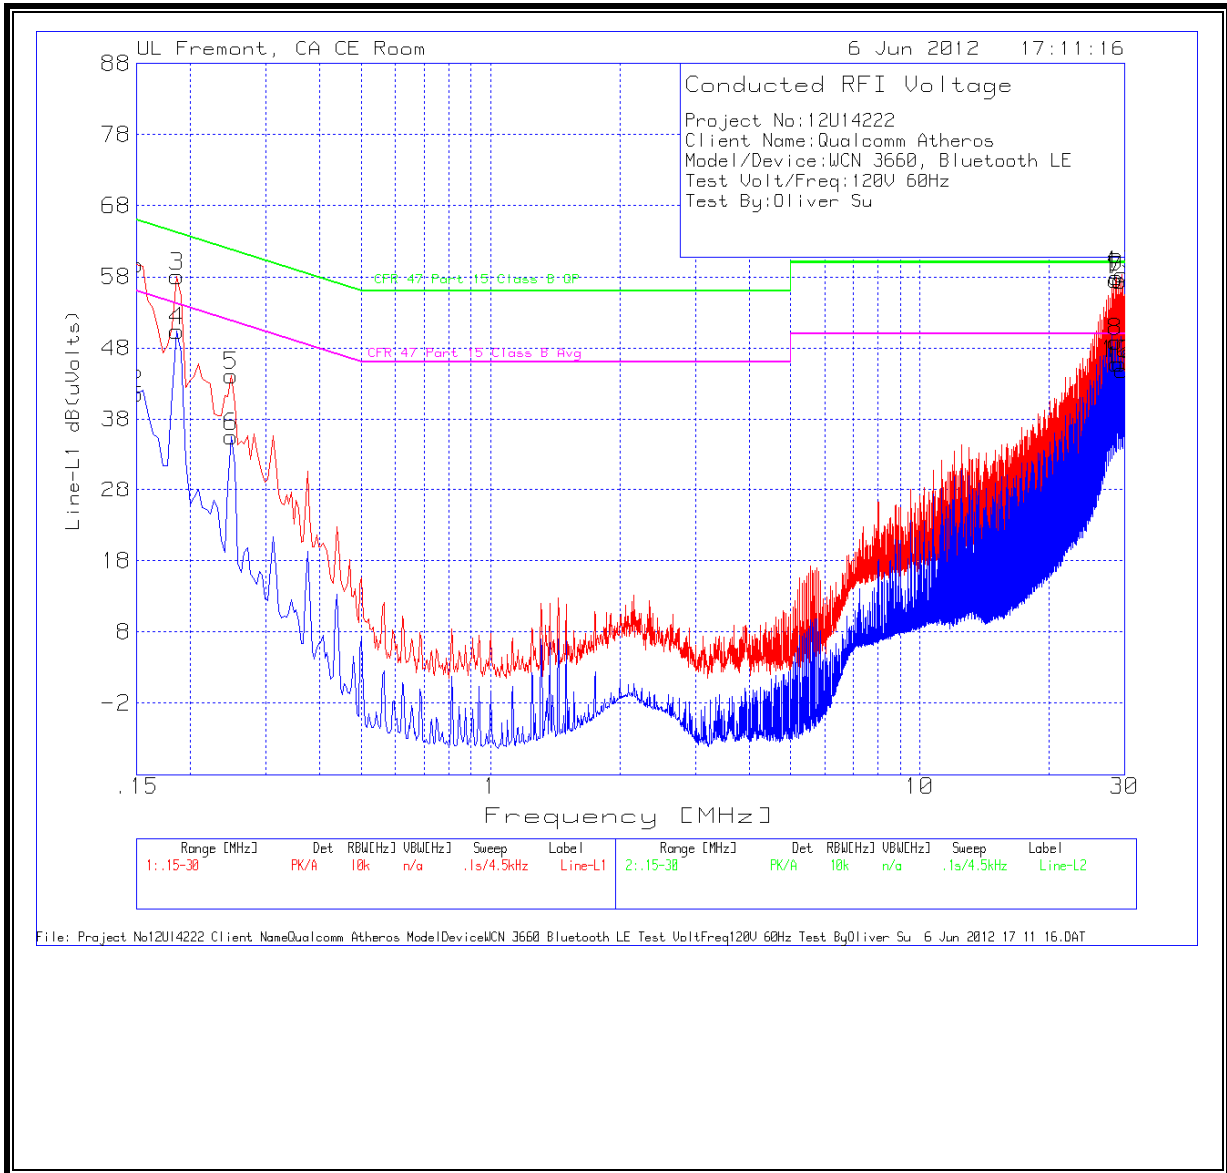

LINE 2 RESULTS

6 WORST EMISSIONS

Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dB(uVolts)	CFR 47 Part 15 Class B QP	Margin to Limit (dB)	CFR 47 Part 15 Class B Avg	Margin to Limit (dB)
15	.15	58.64	PK	.1	0	58.74	66	-7.26	-	-
16	.15	39.41	Av	.1	0	39.51	-	-	56	-16.49
17	.186	56.83	PK	.1	0	56.93	64.2	-7.27	-	-
18	.186	52.46	Av	.1	0	52.56	-	-	54.2	-1.64
19	.249	43.99	PK	.1	0	44.09	61.8	-17.71	-	-
20	.249	37.69	Av	.1	0	37.79	-	-	51.8	-14.01
21	28.518	55.5	PK	.5	.3	56.3	60	-3.7	-	-
22	28.518	47.33	Av	.5	.3	48.13	-	-	50	-1.87
23	28.77	55.96	PK	.5	.3	56.76	60	-3.24	-	-
24	28.77	43.45	Av	.5	.3	44.25	-	-	50	-5.75
25	29.2695	55.54	PK	.5	.3	56.34	60	-3.66	-	-
26	29.2695	43.92	Av	.5	.3	44.72	-	-	50	-5.28
27	29.5215	55.82	PK	.5	.3	56.62	60	-3.38	-	-
28	29.5215	43.76	Av	.5	.3	44.56	-	-	50	-5.44
29	29.769	56.12	PK	.5	.3	56.92	60	-3.08	-	-
30	29.769	42.65	Av	.5	.3	43.45	-	-	50	-6.55

PK - Peak detector

Av - average detection

LINE 2 RESULTS

