

---

## FCC Test Report for RH-37

**Test Report no.:** DTX11193  
**Number of pages:** 10

**Date of Report:** 6/13/ 2004  
**Customer's  
Contact person:** Jukka Pekkala  
**Responsible  
Test engineer:** Ruben Hansen

**Testing laboratory:** TCC Copenhagen  
Nokia Danmark A/S  
Frederikskaj  
DK-1790 Copenhagen V  
Denmark  
Tel. +45 33 29 29 29  
Fax. +45 33 29 20 01  
FCC Reg. # 99059, June 2003  
IC File # 4820, January 2004  
IC File # 4820-1, February 2004

**Client:** Nokia Corporation  
Lise Meitner Strasse 10  
89081 ULM  
Germany  
  
Tel. +49 731 1754 0  
Fax. +49 731 1754 6800

**Tested devices/  
accessories:** **Phone: RH-37 and Battery: BL- 5B**

**Supplement reports:**

**Testing has been  
carried out in  
accordance with:** The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 15 and IC standard ICES-003.

**Documentation:** The documentation of the testing performed on the tested devices is archived for 15 years at TCC Copenhagen.

**Test Results:** The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.

**Date and signature  
for the contents:**

6/13/2004



**Ruben Hansen  
EMC Team Leader**

---

## CONTENTS

<b>1. EUT AND ACCESSORY INFORMATION .....</b>	<b>3</b>
1.1. EUT description.....	3
1.2. EUT and accessories .....	3
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>4</b>
<b>3. STANDARDS AND MEASUREMENT METHODS .....</b>	<b>5</b>
<b>4. TEST RESULTS.....</b>	<b>6</b>
4.1. Radiated emissions .....	6
<b>5. Test equipment.....</b>	<b>9</b>
5.1. Radiated measurements .....	9

---

## 1. EUT AND ACCESSORY INFORMATION

### 1.1. EUT description

The EUT is a triple band GSM phone, GSM 900/1800/1900 MHz.

The highest internal frequency of the EUT is 3896 MHz

### 1.2. EUT and accessories

The table below lists all EUTs and accessories used in the tests. Later in this test report, only numbers in the last column are used to refer to the devices in each test.

	Name	Type	HW	Number
EUT	GSM Phone	RH-37	4167	233839
Accessories	Battery	BL-5B		233829

---

## 2. SUMMARY OF TEST RESULTS

Section in CFR 47	Section in ICES-003		Result
15.109,a	5.5	Radiated emissions	PASS

---

### 3. STANDARDS AND MEASUREMENT METHODS

The tests were performed in guidance of CFR 47 Part 15 Subpart B, ANSI C63.4 (2001), ICES-003 and CISPR 22. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method".

## 4. TEST RESULTS

### 4.1. Radiated emissions

<b>EUT with DUT number</b>	RH-37 Dut # 233839
<b>Accessories with DUT numbers</b>	BL-5B Dut # 233829
<b>Result</b>	Passed
<b>FCC rule part</b>	§15.109
<b>ICES-003 section</b>	5.5
<b>Temp °C / Humidity RH %</b>	24.5°C / 45.7 %RH
<b>Date of measurements</b>	6/13/2004
<b>Measured by</b>	Ruben Hansen

#### 4.1.1 Test method and level, 30MHz – 1000MHz

The test was made according to ANSI C63.4 (2001) with following exceptions and additions:

- 1) The measurement was made in semi-anechoic chamber at measurement distance of 3m. The chamber had ferrite and absorber lining in all walls and ceiling, the floor was metal covered.
- 2) The measurement was divided in two parts; prescan and final measurement.

#### 4.1.2 Test method and level, 1000MHz – 8500MHz

The test was made according to ANSI C63.4 (2001) with following exceptions and additions:

- 1) The measurement was made in semi-anechoic chamber at measurement distance of 1m. The chamber had ferrite and absorber lining in all walls and ceiling, the floor was metal covered.
- 2) The measurement was divided in two parts; prescan and final measurement.

#### 4.1.3 Prescan

- a) The EUT was set on the turntable and measuring antenna in horizontal polarization at 1m.
- b) The turntable was set to 0 degrees.
- c) The receiver was set to record the maximum level using peak detector.
- d) The antenna was raised from 1m to 4m in 1 meter steps.
- e) For each antenna height the table was rotated full turn in 30 degree steps.
- f) Antenna polarization was changed to vertical and phases b - e repeated.
- g) All suspect frequencies were recorded in a file.
- h) At every suspect frequency the turntable was rotated around, antenna scanned and the polarization changed to find the maximum levels.

#### 4.1.4 Final measurement

- a) The final measurement was run at suspect frequencies only using peak, quasipeak and average detector.
- b) The turntable was rotated full turn to find out the worst azimuth.

- c) On those azimuths obtained in b, the antenna was scanned from 1m to 4m to find out the worst elevation.
- d) Phases b and c were repeated with another antenna polarization.
- e) Obtained values were reported


**CISPR 22 Class B limit (3m measuring distance)**

Frequency band (MHz)	Quasi-peak limit (dB $\mu$ V/m)
30 – 230	40
230 – 1000	47

**Class B limit (3m measuring distance)**

Frequency band (MHz)	Limit ( $\mu$ V/m)	Limit (dB $\mu$ V/m)	Detector
1000-8500	500 / 5000	54 / 74	AV / PK

**4.1.5 EUT test setup**

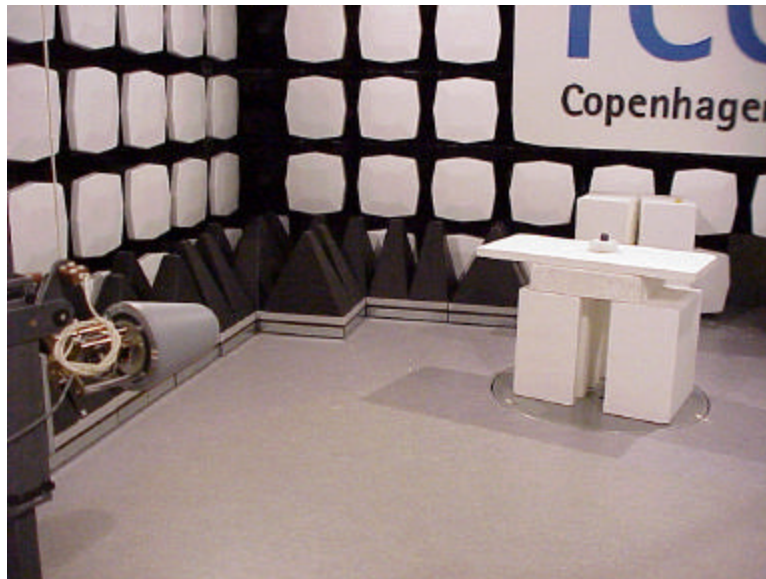

#### 4.1.6 EUT operation mode

EUT operation mode	GSM 1900, Idle
EUT operation voltage	Battery

#### 4.1.7 Emission measurement data, 30MHz - 8500 MHz

The measurement results were obtained as described below.

$$E[\mu V / m] = U_{RX} + A_{CABLE} + AF - G_{PREAMP} - C_{1m}$$

Where

$U_{RX}$  receiver reading

$A_{CABLE}$  Attenuation of the cable

$AF$  Antenna factor

$G_{PREAMP}$  Gain of the preamplifier

$C_{1m}$  Correction factor due to 1m measurement distance

Freq [MHz]	EMI PK [dBmV/m]	EMI AVG [dBmV/m]	Polarization
3896	42.85	38.28	Vertical
3896	40.65	36.65	Horizontal



## 5. Test equipment

Each test equipment is calibrated once a year, except antennas which are calibrated every second year.

### 5.1. Radiated measurements

Equipment #	Equipment	Type	Serial #	Manufacturer
	10 meter OATS			
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	847124/001	Rohde&Schwarz
15191	Turntable Controller Unit	G-800SDX	ONO10000	YAESU
14900	Antenna Controller	HD100	100/552	HD GmbH
18792	Multi Device Controller	2090	1606	ETS-EMCO
13829	Turntable Controller	4630-100	100/510	Comtest
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	571131	Miteq/NMP Cph
13668	BiLog Antenna 30- 2000MHz	BiLog-CBL6112A	2259	Chase
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	833362/004	Rohde&Schwarz
12679	Dual Log Periodic Antenna 1 -26.5 GHz	HL025	-----	Rohde&Schwarz
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	100154	Rohde&Schwarz
18773	Shielded Chamber	RFD-100	2420	ETS-Lindgren
18774	Shielded Chamber	RFSD-F/A-100	2425	ETS-Lindgren
18324	High Pass Filter 3GHz SMA f Conn	WHJS3000-10SS	1	Wainwright
14114	Highpass Filter 1000MHz-4500MHz	WHK1000-12SS	1	Wainwright
13918	Highpass Filter 2000-4000MHz 50OHM SMA Conn	WHKS2000-10SS		Wainwright Instruments
13937	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40- 6SS		Wainwright Instruments
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5 - 0.2/40-10SS		Wainwright Instruments
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0 - 0.2/40-10SS		Wainwright Instruments

