

SAR Compliance Test Report

Test report no.:	DTX12468-EN	Date of report:	November 25, 2004
Template version:	2	Number of pages:	22
Testing laboratory:	TCC Copenhagen Nokia Danmark A/S Frederikskaj DK-1790 Copenhagen V Denmark Tel. +45 33 29 29 29 Fax. +45 33 29 20 01	Client:	Nokia Germany/Ulm Lise Meitner Strasse 10 89081 ULM Germany Tel. +49-731-1754-0 Fax. +49-731-1754-6800
Responsible test engineer:	Leif Funch Klysner	Product contact person:	Timo P. Seppala
Measurements made by:	Leif Funch Klysner		
Tested device:	RM-31		
FCC ID:	PPIRM-31	IC:	661U-RM31
Supplement reports:	-		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Copenhagen.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		

Date and signatures:

November 25, 2004

For the contents:


Leif Funch Klysner
Test Engineer

CONTENTS

1. SUMMARY OF SAR TEST REPORT.....	3
1.1 TEST DETAILS.....	3
1.2 MAXIMUM RESULTS.....	3
1.2.1 Head Configuration.....	3
1.2.2 Body Worn Configuration	3
1.2.3 Maximum Drift	4
1.2.4 Measurement Uncertainty	4
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	5
2.1 PICTURE OF THE DEVICE.....	5
2.2 DESCRIPTION OF THE ANTENNA	6
3. TEST CONDITIONS	6
3.1 TEMPERATURE AND HUMIDITY	6
3.2 TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER	6
4. DESCRIPTION OF THE TEST EQUIPMENT	6
4.1 MEASUREMENT SYSTEM AND COMPONENTS	6
4.1.1 Isotropic E-field Probe 1813.....	8
4.2 PHANTOMS	8
4.3 SIMULATING LIQUIDS	9
4.3.1 Liquid Recipes.....	9
4.3.2 Verification of the System.....	10
4.3.3 Tissue Simulants used in the Measurements.....	11
5. DESCRIPTION OF THE TEST PROCEDURE	12
5.1 DEVICE HOLDER.....	12
5.2 TEST POSITIONS.....	13
5.2.1 Against Phantom Head.....	13
5.2.2 Body Worn Configuration	13
5.3 SCAN PROCEDURES.....	14
5.4 SAR AVERAGING METHODS.....	14
6. MEASUREMENT UNCERTAINTY	15
7. RESULTS	16
APPENDIX A: VALIDATION SCANS	19
APPENDIX B: MEASUREMENT SCANS.....	20
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	21
APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)	22

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	October 7, 2004 – November 18, 2004
SN, HW and SW numbers of tested device	IMEI: 004400/38/177624/2 HW: 3006 SW: 3.01 DUT#234726
Batteries used in testing	BL-5B, DUT#234727, DUT#234728, DUT#234729
Headsets used in testing	HS-8, DUT#234730
Other accessories used in testing	
State of sample	Prototype unit
Notes	

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / f (MHz)	ERP/EIRP	Position	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
GSM850	251 / 848.8	29.21 dBm	Right, Cheek	1.6 W/kg	0.75 W/kg	PASSED
GPRS1900	512 / 1850.2	28.75 dBm	Left, Tilt	1.6 W/kg	0.80 W/kg	PASSED

1.2.2 Body Worn Configuration

Mode	Ch / f (MHz)	ERP/EIRP	Separation distance	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
GPRS850	190 / 836.6	26.09 dBm	2.2 cm	1.6 W/kg	0.60 W/kg	PASSED
GPRS1900	512 / 1850.2	28.75 dBm	2.2 cm	1.6 W/kg	0.40 W/kg	PASSED

1.2.3 Maximum Drift

Maximum drift during measurements	-0.30 dB
-----------------------------------	----------

1.2.4 Measurement Uncertainty

Extended Uncertainty (k=2) 95%	$\pm 29.1 \%$
--------------------------------	---------------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population/uncontrolled

Modes and Bands of Operation	GSM 850	GSM 1900	GPRS (GSM)	EGPRS(EDGE)
Modulation Mode	GMSK	GMSK	GMSK	8PSK
Duty Cycle	1/8	1/8	1/8 or 2/8	
Transmitter Frequency Range (MHz)	824.2 – 848.8	1850.2 - 1909.8	824.2 – 848.8 / 1850.2 - 1909.8	824.2 – 848.8 / 1850.2 - 1909.8

Outside of USA and Canada, the transmitter of the device is capable of operating also in GSM1800, which is not part of this filing.

This device has Push-to-Talk/Voice-over-IP capability for use at the ear. Therefore, SAR for 2-slot GPRS mode was also evaluated against the head profile of the phantom.

2.1 Picture of the Device



2.2 Description of the Antenna

The device has an internal patch antenna.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Period of measurement (dd.mm.yyyy):	07.10.2004 – 18.11.2004
Ambient temperature (°C):	21 ±1
Ambient humidity (RH %):	45 ±10

3.2 Test Signal, Frequencies, and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The power output was measured by a separate test laboratory on the same unit as used for SAR testing.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY 4 software version 4.3 and 4.4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements on the device was the 'worst-case extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE3	339	12 months	08/2005
E-field Probe ET3DV6	1813	12 months	09/2005
Dipole Validation Kit, D835V2	476	24 months	02/2005
Dipole Validation Kit, D1900V2	5d026	24 months	02/2005

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SMIQ03B	826046/034	36 months	02/2007
Amplifier	ZHL-42W	E012903	-	-
Power Meter	NRVD	840297/008	24 months	11/2005
Power Sensor	NRV-Z51	100184	24 months	11/2005
Call Tester	4400M	0411216	-	-
Call Tester	CMU200	105900	-	-
Vector Network Analyzer	AT8753ES	MY40001091	12 months	08/2005
Dielectric Probe Kit	HP85070B	US33020403	-	-

4.1.1 Isotropic E-field Probe 1813

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both validation testing and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

Validation tests were performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Simulating Liquids

Recommended values for the dielectric parameters of the simulating liquids are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using liquids whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the liquid was 15.0 ± 0.5 cm measured from the ear reference point during validation and device measurements.

4.3.1 Liquid Recipes

The following recipes were used for Head and Body liquids:

800MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	39.74	55.97
HEC	0.25	1.21
Sugar	58.31	41.76
Preservative	0.15	0.27
Salt	1.55	0.79

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

4.3.2 Verification of the System

The manufacturer calibrates the probes annually. Dielectric parameters of the simulating liquids were measured every day using the dielectric probe kit and the network analyser. A SAR measurement was made following the determination of the dielectric parameters of the liquids, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The validation results (dielectric parameters and SAR values) are given in the table below.

System verification, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.41	41.5	0.89	N/A
	± 10% window	2.17 – 2.65			
	October 7, 2004	2.57	40.4	0.89	21.8
	October 8, 2004	2.50	40.1	0.89	21.0
	November 5, 2004	2.49	41.6	0.91	21.4
	November 18, 2004	2.50	42.1	0.90	21.1
1900	Reference result	10.4	38.6	1.46	N/A
	± 10% window	9.36 – 11.44			
	October 25, 2004	10.3	38.6	1.48	21.6
	November 9, 2004	9.62	39.0	1.47	21.0
	November 15, 2004	9.98	38.7	1.45	21.6

System verification, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.53	54.0	0.96	N/A
	± 10% window	2.28 – 2.78			
	October 12, 2004	2.56	52.8	0.94	21.5
1900	Reference result	10.6	51.2	1.59	N/A
	± 10% window	9.54 – 11.66			
	October 26, 2004	10.3	51.0	1.61	20.9

Plots of the Verification scans are given in Appendix A.

4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836	Recommended value	41.5	0.90	N/A
	$\pm 5\%$ window	39.4 – 43.6	0.86 – 0.95	
	October 7, 2004	40.4	0.89	21.8
	October 8, 2004	40.1	0.89	21.0
	November 5, 2004	41.6	0.91	21.4
	November 18, 2004	42.1	0.89	21.1
1880	Recommended value	40.0	1.40	N/A
	$\pm 5\%$ window	38.0 – 42.0	1.33 – 1.47	
	October 25, 2004	38.7	1.46	21.6
	November 9, 2004	39.0	1.45	21.0
	November 15, 2004	38.7	1.43	21.6

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836	Recommended value	55.2	0.97	N/A
	$\pm 5\%$ window	52.4 – 58.0	0.92 – 1.02	
	October 12, 2004	52.8	0.94	21.5
1880	Recommended value	53.3	1.52	N/A
	$\pm 5\%$ window	50.6 – 56.0	1.44 – 1.60	
	October 26, 2004	51.0	1.59	20.9

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

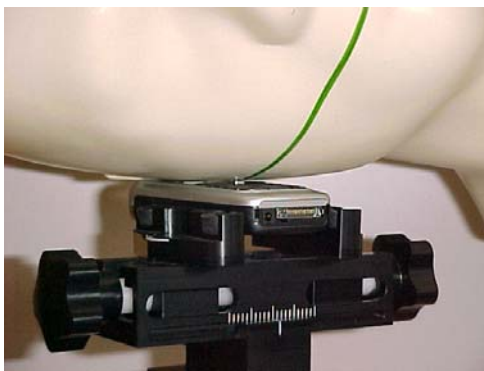


Photo of the device in “cheek” position



Photo of the device in “tilt” position

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its antenna facing the phantom since this orientation gave higher results.



Photo of the device positioned for Body SAR measurement. The spacer was removed for the tests.

5.3 Scan Procedures

First coarse scans were used for determination of the field distribution. Next a cube scan, 7x7x7 points covering a volume of 30x30x30mm was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the coarse scan and again at the end of the cube scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the cube scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the cube scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	G_i	$G_i \cdot U_i$ (%)	V_i
Measurement System							
Probe Calibration	E2.1	±6.3	N	1	1	±6.3	∞
Axial Isotropy	E2.2	±4.7	R	√3	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	√3	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±8.3	R	√3	1	±4.8	∞
Linearity	E2.4	±4.7	R	√3	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6	∞
Readout Electronics	E2.6	±1.0	N	1	1	±1.0	∞
Response Time	E2.7	±0.8	R	√3	1	±0.5	∞
Integration Time	E2.8	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	√3	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.4	R	√3	1	±0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	±2.9	R	√3	1	±1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5.2	±3.9	R	√3	1	±2.3	∞
Test sample Related							
Test Sample Positioning	E4.2.1	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1.1	±5.0	N	1	1	±5.0	7
Output Power Variation - SAR drift measurement	6.6.3	±7.2	R	√3	1	±4.2	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±4.0	R	√3	1	±2.3	∞
Liquid Conductivity Target - tolerance	E3.2	±5.0	R	√3	0.64	±1.8	∞
Liquid Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.64	±3.5	5
Liquid Permittivity Target tolerance	E3.2	±5.0	R	√3	0.6	±1.7	∞
Liquid Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
Combined Standard Uncertainty			RSS			±14.6	188
Coverage Factor for 95%			k=2				
Expanded Standard Uncertainty						±29.1	

7. RESULTS

The measured Head SAR values for the test device are tabulated below:

GSM850 Head SAR results

Position		SAR, averaged over 1g (W/kg)		
		Ch 128 824.8 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
Power level		27.98 dBm	28.8 dBm	29.21 dBm
Left	Cheek	-	0.65	-
	Tilt	-	0.37	-
Right	Cheek	0.59	0.67	0.75
	Tilt	-	0.29	-

GPRS850 (Dual slot) Head SAR results

Position		SAR, averaged over 1g (W/kg)		
		Ch 128 824.8 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
Power level		25.39 dBm	26.09 dBm	26.85 dBm
Left	Cheek	-	-	-
	Tilt	-	-	-
Right	Cheek	0.60	0.61	0.69
	Tilt	-	-	-

EDGE850 (Dual slot) Head SAR results

Position		SAR, averaged over 1g (W/kg)		
		Ch 128 824.8 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
Power level		25.05 dBm	24.81 dBm	25.32 dBm
Left	Cheek	-	-	-
	Tilt	-	-	-
Right	Cheek	-	-	0.31
	Tilt	-	-	-

GPRS1900 (Dual slot) Head SAR results

Position		SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
Power level		28.75 dBm	26.88 dBm	27.78 dBm
Left	Cheek	-	0.68	-
	Tilt	0.80	0.69	0.58
Right	Cheek	-	0.60	-
	Tilt	-	0.55	-

GSM1900 Head SAR results

Position		SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
Power level		30.07 dBm	28.42 dBm	29.53 dBm
Left	Cheek	-	-	-
	Tilt	0.57	-	-
Right	Cheek	-	-	-
	Tilt	-	-	-

EDGE1900 (Dual slot) Head SAR results

Position		SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
Power level		28.43 dBm	26.35 dBm	27.4 dBm
Left	Cheek	-	-	-
	Tilt	0.45	-	-
Right	Cheek	-	-	-
	Tilt	-	-	-

The measured Body SAR values for the test device are tabulated below:

GPRS850 (Dual slot) Body SAR results

Body-worn location setup	SAR, averaged over 1g (W/kg)		
	Ch 128 824.8 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
Power level	25.39 dBm	26.09 dBm	26.85 dBm
Without headset	0.51	0.60	0.60
Headset HS-8	0.28	0.27	0.38

GSM850 Body SAR results

Body-worn location setup	SAR, averaged over 1g (W/kg)		
	Ch 128 824.8 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
Power level	27.98 dBm	28.8 dBm	29.21 dBm
Without headset	-	0.59	-
Headset HS-8	-	-	-

GPRS1900 (Dual slot) Body SAR results

Body-worn location setup	SAR, averaged over 1g (W/kg)		
	Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
Power level	28.75 dBm	26.88 dBm	27.78 dBm
Without headset	0.40	0.37	0.36
Headset HS-8	0.40	0.34	0.33

GSM1900 Body SAR results

Body-worn location setup	SAR, averaged over 1g (W/kg)		
	Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
Power level	30.07 dBm	28.42 dBm	29.53 dBm
Without headset	0.31	-	-
Headset HS-8	-	-	-

Plots of the Measurement scans are given in Appendix B.

APPENDIX A: VALIDATION SCANS

See the following pages.

TCC

Copenhagen

DUT: Dipole 835 MHz; Type: D835V2; Serial: 476

Communication System: Continuous Wave; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850 Medium parameters used: $f = 835$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 40.4$; $\rho =$

1000 kg/m^3 Medium temperature: 21.8°C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813; ConvF(6.37, 6.37, 6.37); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.82 mW/g



d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.1 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 3.84 W/kg

SAR(1 g) = 2.57 mW/g; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 2.78 mW/g

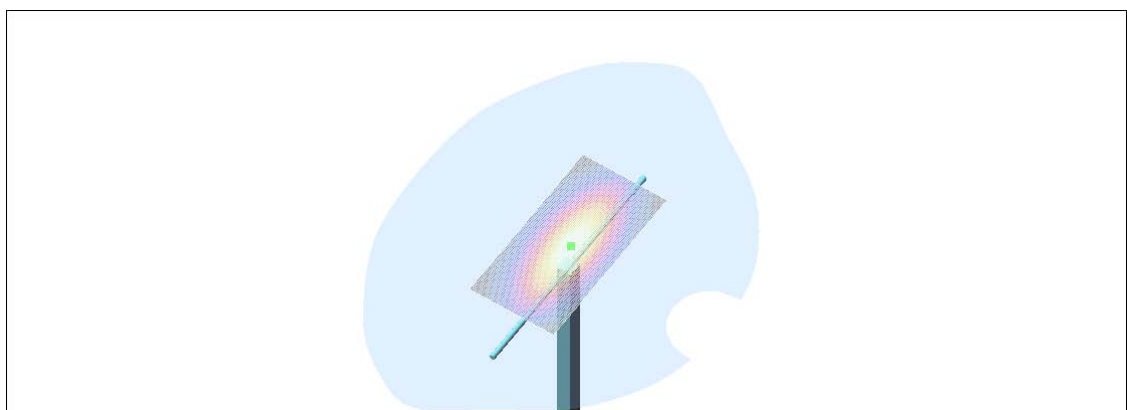

TCC

Copenhagen

DUT: Dipole 835 MHz; Type: D835V2; Serial: 476

Communication System: Continuous Wave; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850 Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 40.1$; $\rho =$

1000 kg/m^3 Medium temperature: 21.0°C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813; ConvF(6.37, 6.37, 6.37); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.72 mW/g



d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58 V/m ; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 2.5 mW/g ; SAR(10 g) = 1.63 mW/g

Maximum value of SAR (measured) = 2.72 mW/g

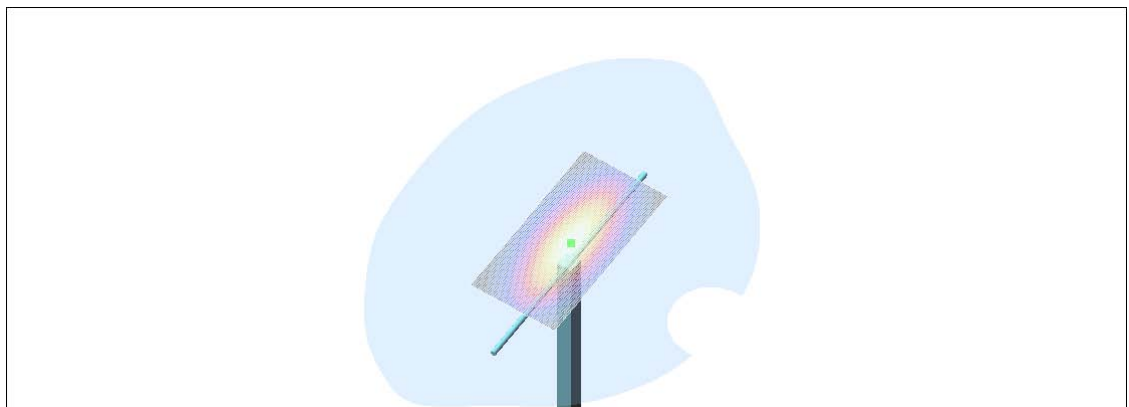

TCC

Copenhagen

DUT: Dipole 835 MHz; Type: D835V2; Serial: 476

Communication System: Continuous Wave; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850 Medium parameters used: $f = 835$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 41.6$; $\rho =$

1000 kg/m^3 Medium temperature: 21.4°C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813; ConvF(6.37, 6.37, 6.37); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 130

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.67 mW/g



d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.3 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 3.77 W/kg

SAR(1 g) = 2.49 mW/g; SAR(10 g) = 1.61 mW/g

Maximum value of SAR (measured) = 2.7 mW/g

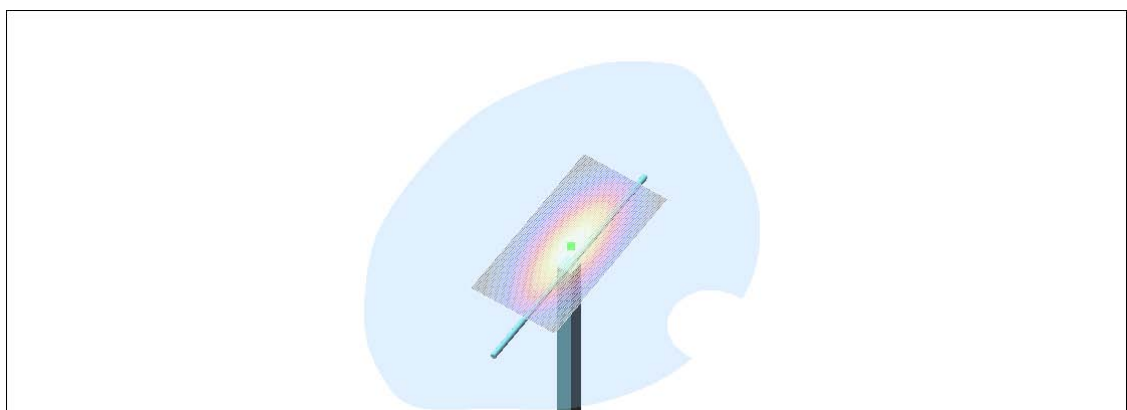

TCC

Copenhagen

DUT: Dipole 835 MHz; Type: D835V2; Serial: 476

Communication System: Continuous Wave; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850 Medium parameters used: $f = 835$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 42.1$; $\rho =$

1000 kg/m^3 Medium temperature: 21.1°C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813; ConvF(6.37, 6.37, 6.37); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Low Band; Type: QD000P40CB; Serial: TP-1302
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.71 mW/g



d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.1 V/m ; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.5 mW/g ; SAR(10 g) = 1.63 mW/g

Maximum value of SAR (measured) = 2.71 mW/g

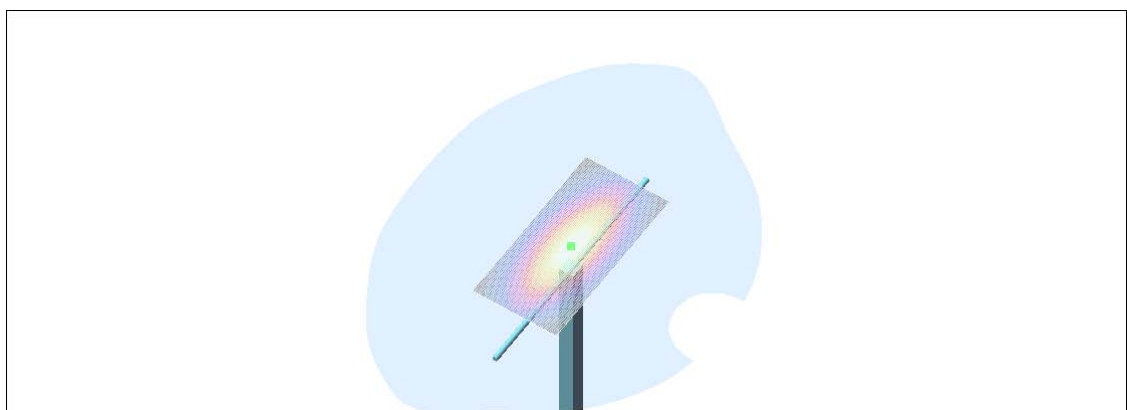

TCC

Copenhagen

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d026

Communication System: Continuous Wave; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 38.6$; ρ

$= 1000$ kg/m³ Medium temperature: 21.6 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813; ConvF(4.96, 4.96, 4.96); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.8 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:



dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.2 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.4 mW/g

Maximum value of SAR (measured) = 11.8 mW/g

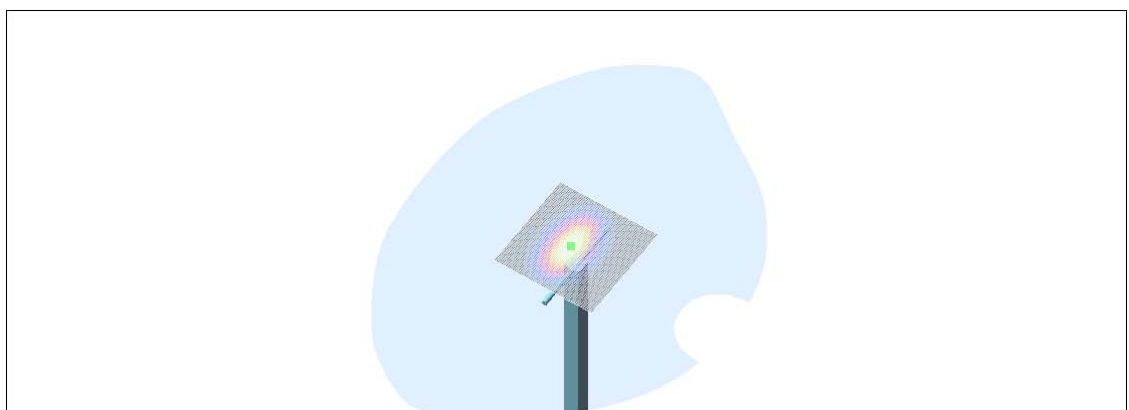

TCC

Copenhagen

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d026

Communication System: Continuous Wave; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 39$; $\rho =$

1000 kg/m^3 Medium temperature: 21.0°C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813; ConvF(4.96, 4.96, 4.96); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 130

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:



dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.5 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.62 mW/g; SAR(10 g) = 5.03 mW/g

Maximum value of SAR (measured) = 10.9 mW/g

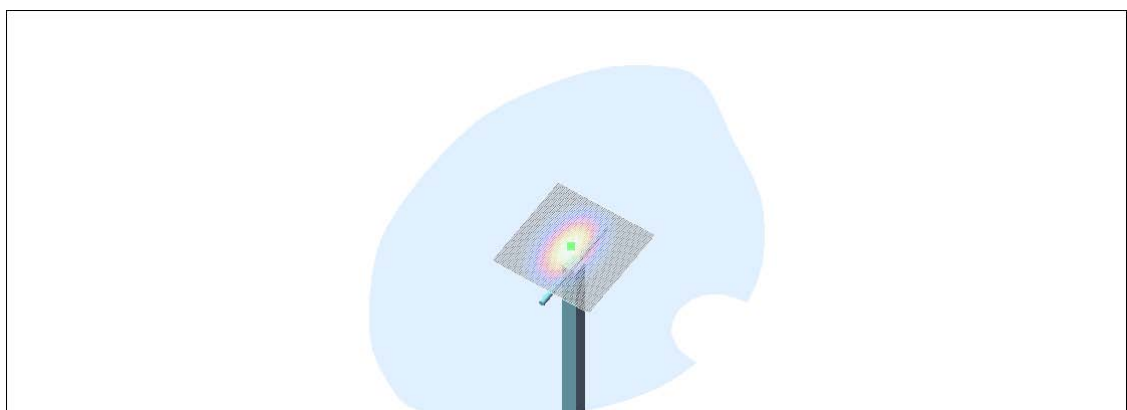

TCC

Copenhagen

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d026

Communication System: Continuous Wave; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.7$; ρ

$= 1000$ kg/m³ Medium temperature: 21.6 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813; ConvF(4.96, 4.96, 4.96); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.4 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:



dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.5 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.98 mW/g; SAR(10 g) = 5.22 mW/g

Maximum value of SAR (measured) = 11.4 mW/g

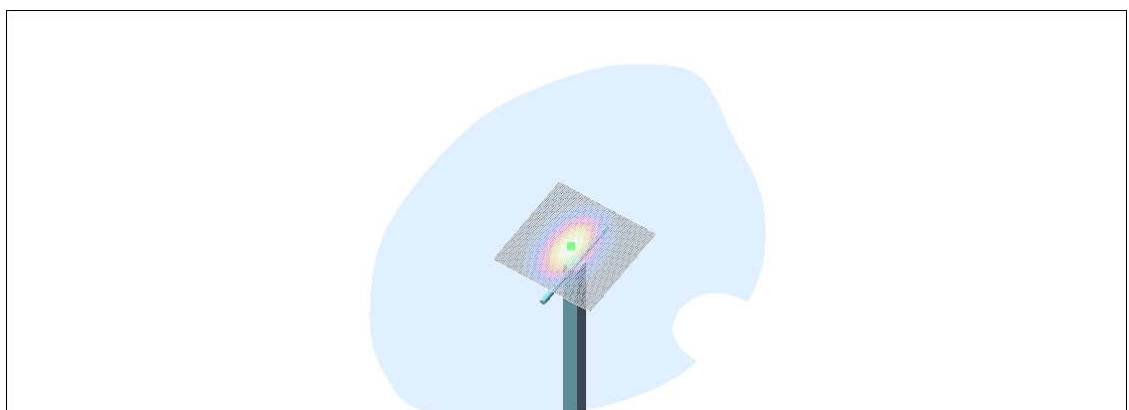

TCC

Copenhagen

DUT: Dipole 835 MHz; Type: D835V2; Serial: 476

Communication System: Continuous Wave; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 850 Medium parameters used: $f = 835$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 52.8$; $\rho =$

1000 kg/m³ Medium temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813; ConvF(6.17, 6.17, 6.17); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 130

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.76 mW/g



d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.2 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 3.75 W/kg

SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 2.79 mW/g

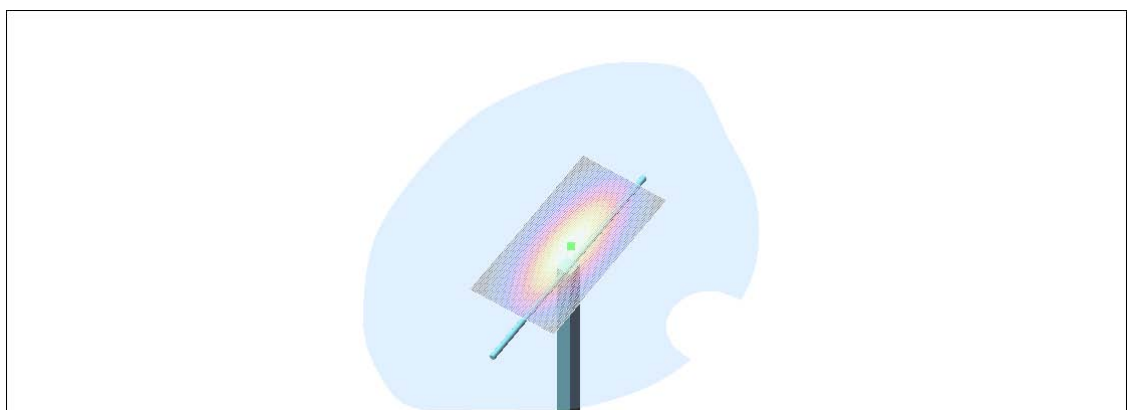

TCC

Copenhagen

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d026

Communication System: Continuous Wave; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Body 1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.61$ mho/m; $\epsilon_r = 51$; $\rho =$

1000 kg/m^3 Medium temperature: 20.9°C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813; ConvF(4.41, 4.41, 4.41); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 130

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.8 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:



dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.4 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.39 mW/g

Maximum value of SAR (measured) = 11.8 mW/g

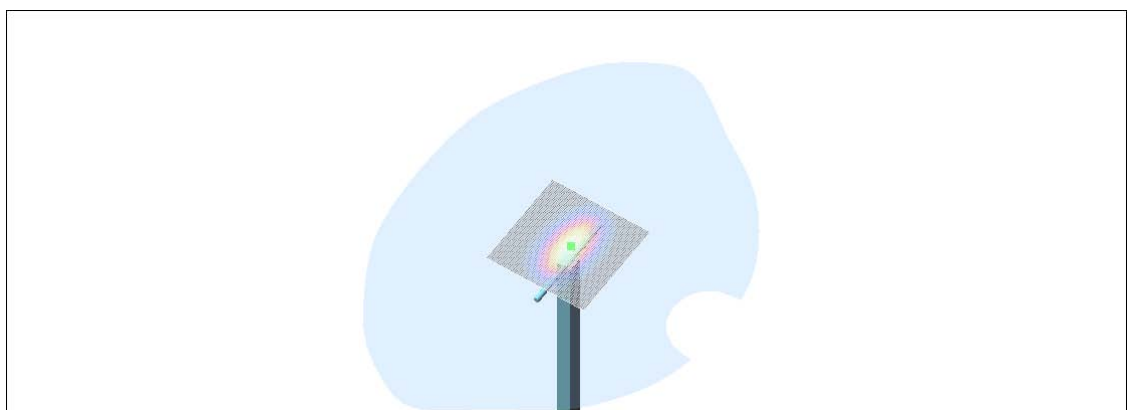

APPENDIX B: MEASUREMENT SCANS

See the following pages.

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$

mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³ Medium temperature: 21.8 °C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(6.37, 6.37, 6.37); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.701 mW/g

Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 22 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 0.968 W/kg

SAR(1 g) = 0.649 mW/g; SAR(10 g) = 0.422 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.681 mW/g

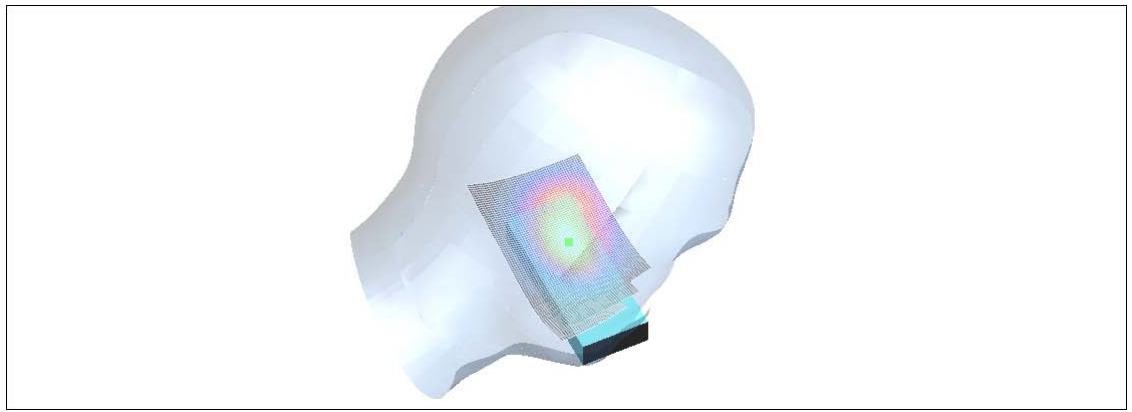

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$

mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³ Medium temperature: 21.8 °C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(6.37, 6.37, 6.37); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Tilt position - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.377 mW/g

Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.5 V/m; Power Drift = 0.005 dB



Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.367 mW/g; SAR(10 g) = 0.222 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.397 mW/g

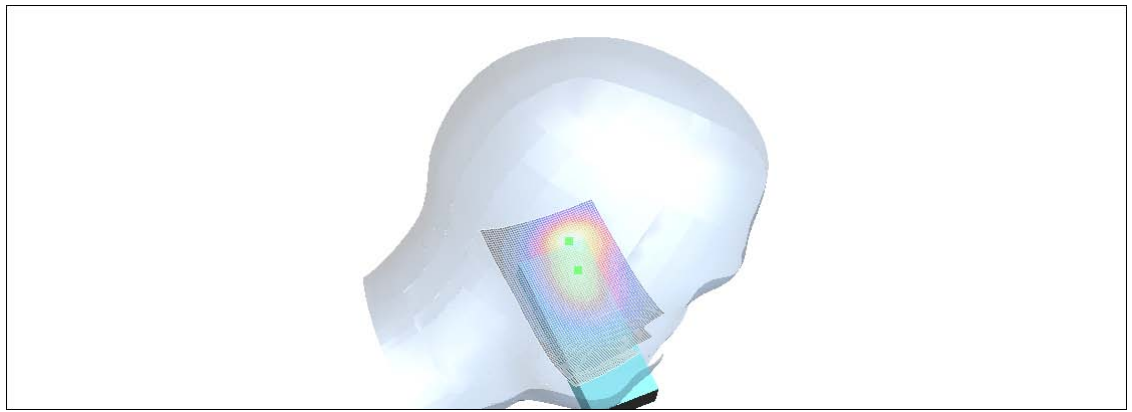

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 Medium parameters used (interpolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.902$

mho/m ; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$ Medium temperature: $21.8 \text{ }^\circ\text{C}$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(6.37, 6.37, 6.37); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.814 mW/g

Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$



Reference Value = 23.4 V/m ; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 1.2 W/kg

SAR(1 g) = 0.750 mW/g ; SAR(10 g) = 0.498 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.800 mW/g

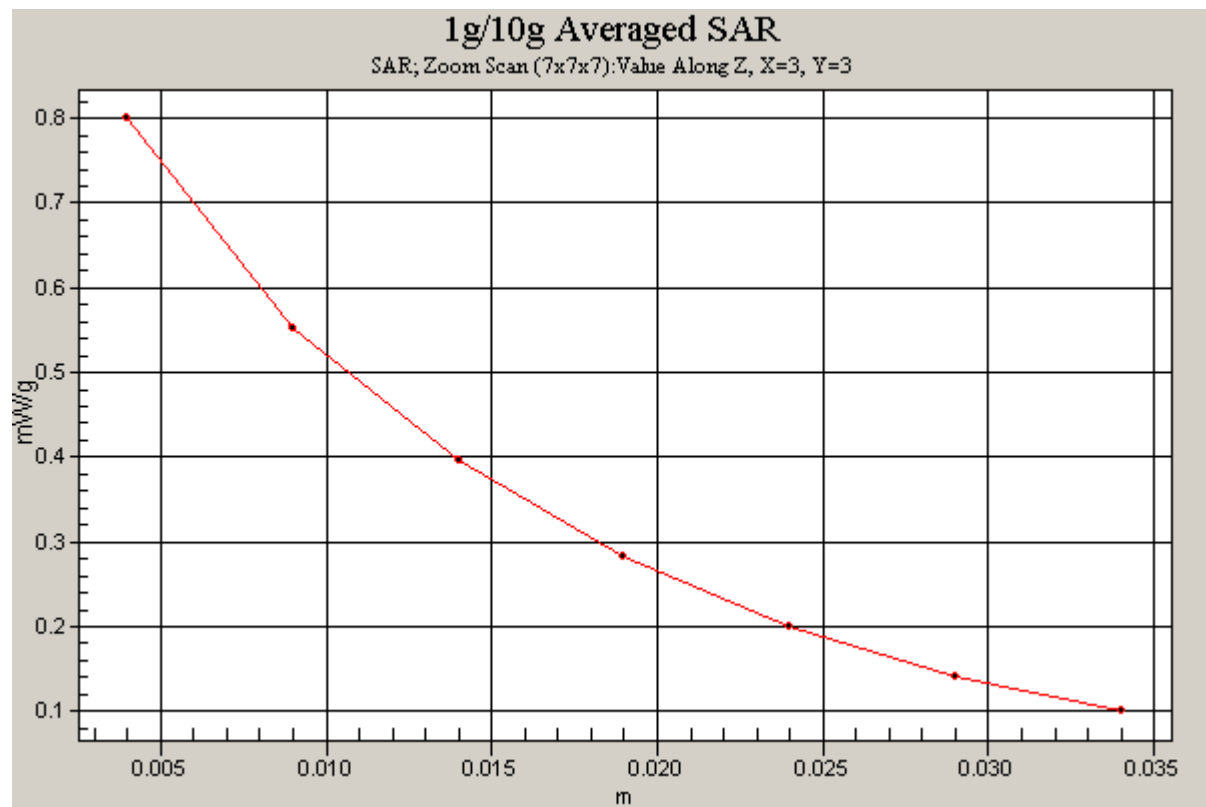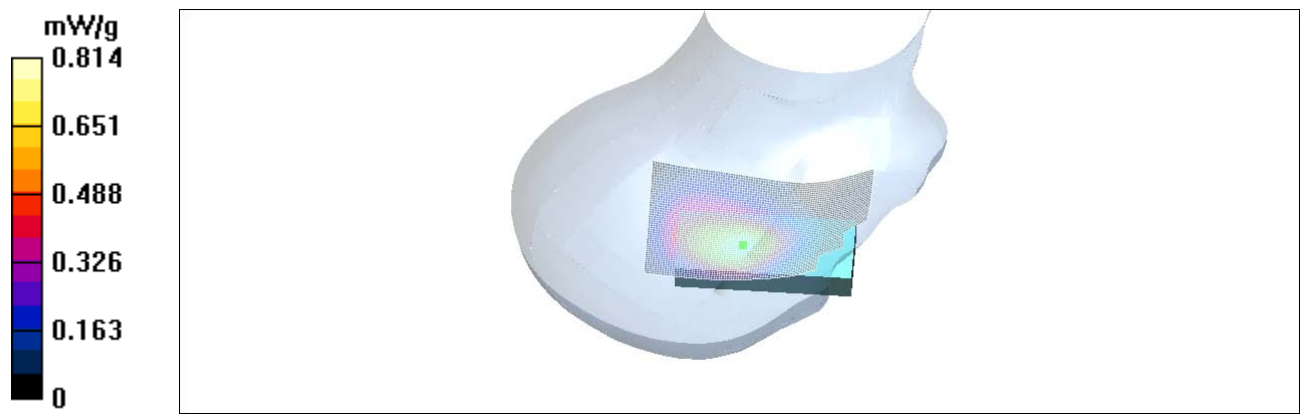

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$

mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³ Medium temperature: 21.8 °C

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(6.37, 6.37, 6.37); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Tilt position - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.312 mW/g

Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.8 V/m; Power Drift = -0.0 dB



Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.294 mW/g; SAR(10 g) = 0.188 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.319 mW/g

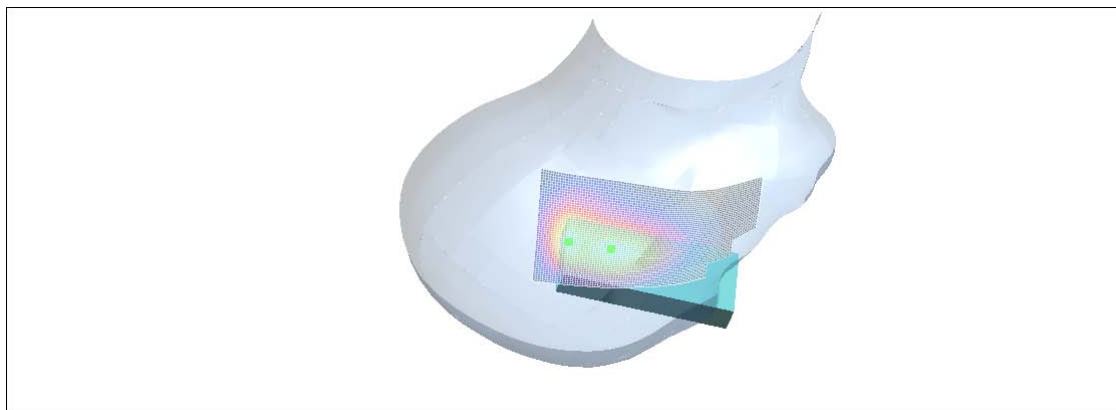

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: GPRS 850 Dual Slot; Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Head 850 Medium parameters used (interpolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.918$

mho/m ; $\epsilon_r = 41.4$; $\rho = 1000 \text{ kg/m}^3$ Medium temperature: $21.4 \text{ }^\circ\text{C}$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(6.37, 6.37, 6.37); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.730 mW/g

Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$



Reference Value = 21.6 V/m ; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.685 mW/g ; SAR(10 g) = 0.446 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.741 mW/g

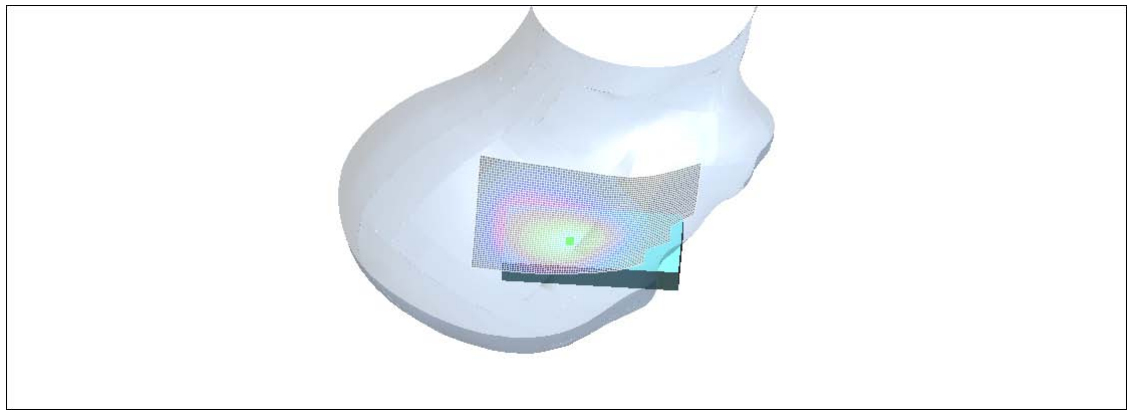

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: 1900 - GPRS - Dual slot; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.7$; ρ

$= 1000$ kg/m³ Medium temperature: 21.6 °C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(4.96, 4.96, 4.96); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.752 mW/g



Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.678 mW/g; SAR(10 g) = 0.363 mW/g

Maximum value of SAR (measured) = 0.734 mW/g

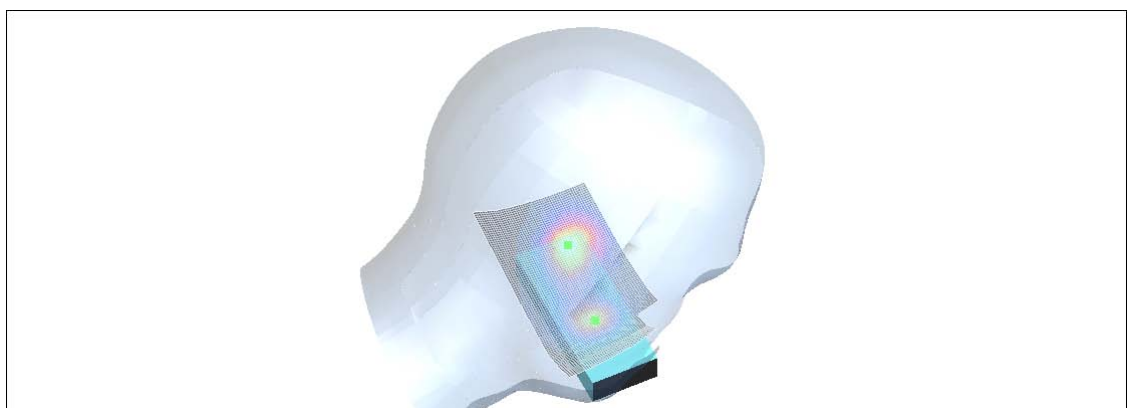

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: 1900 - GPRS - Dual slot; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Head 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³ Medium temperature: 21.0 °C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(4.96, 4.96, 4.96); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Tilt position - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.875 mW/g

Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 24.2 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.7 W/kg

SAR(1 g) = 0.798 mW/g; SAR(10 g) = 0.416 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.868 mW/g

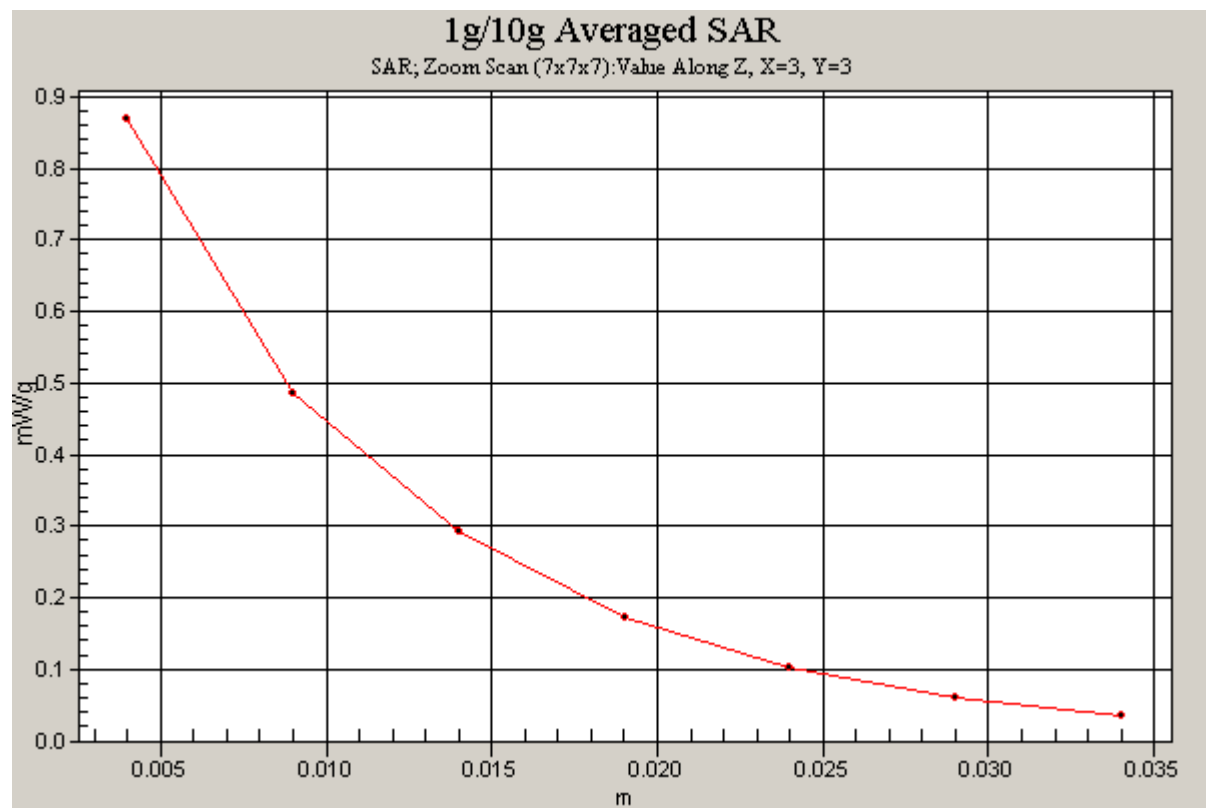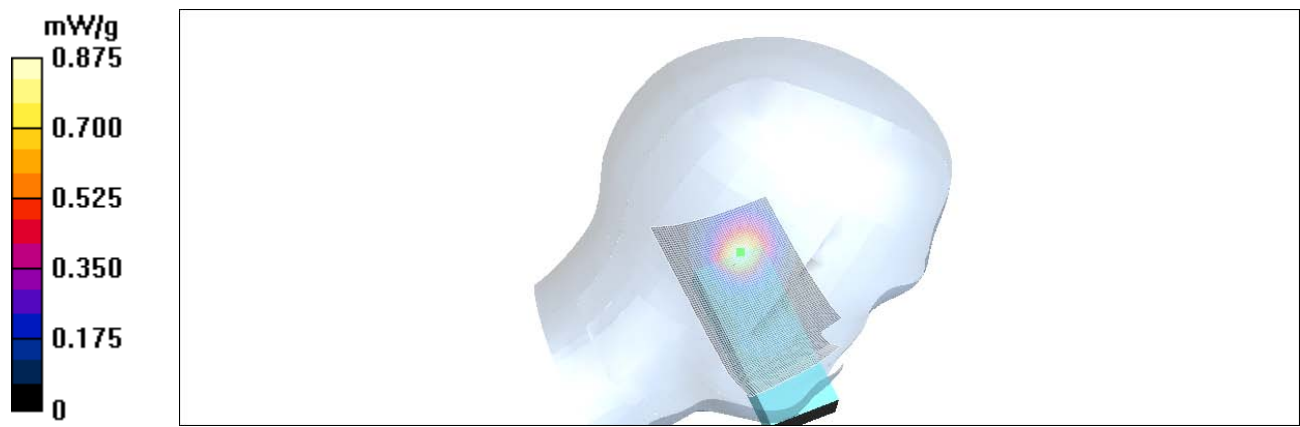

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: 1900 - GPRS - Dual slot; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.7$; ρ

$= 1000$ kg/m³ Medium temperature: 21.6 °C

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(4.96, 4.96, 4.96); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.672 mW/g



Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.7 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.597 mW/g; SAR(10 g) = 0.335 mW/g

Maximum value of SAR (measured) = 0.651 mW/g

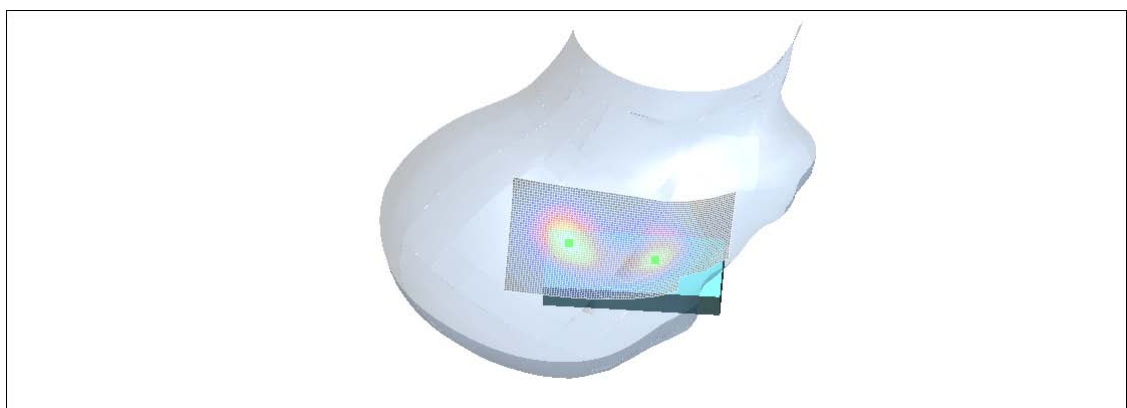

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: 1900 - GPRS - Dual slot; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.7$; ρ

$= 1000$ kg/m³ Medium temperature: 21.6 °C

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(4.96, 4.96, 4.96); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Tilt position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.641 mW/g

Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:



$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.7 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.554 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.604 mW/g

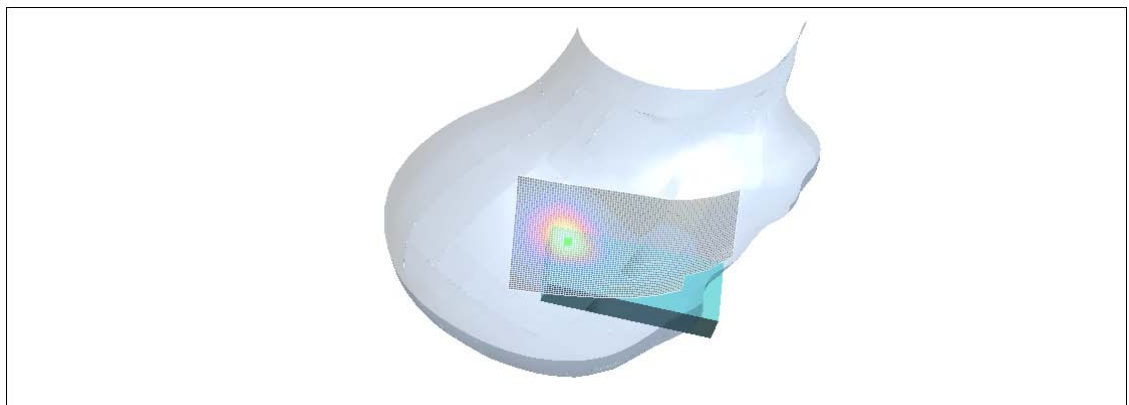

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³ Medium temperature: 21.6 °C
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(4.96, 4.96, 4.96); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Tilt position - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.616 mW/g

Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 19.6 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.299 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.620 mW/g

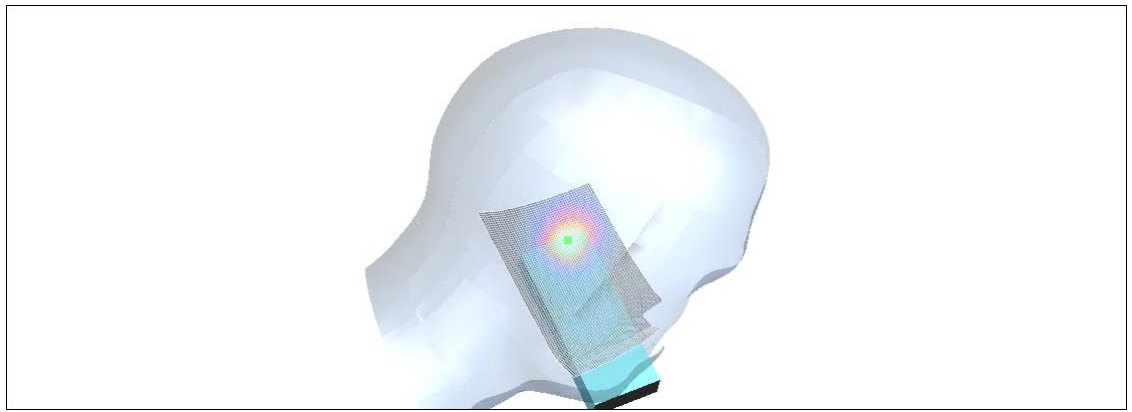

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: GSM 850 (GPRS) 2UL; Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: Body 850 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.945$

$\mu\text{ho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$ Medium temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(6.17, 6.17, 6.17); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Body - Middle - No Accessory/Area Scan (71x131x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.641 mW/g

Body - Middle - No Accessory/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$



Reference Value = 17.6 V/m ; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.599 mW/g ; SAR(10 g) = 0.419 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.628 mW/g

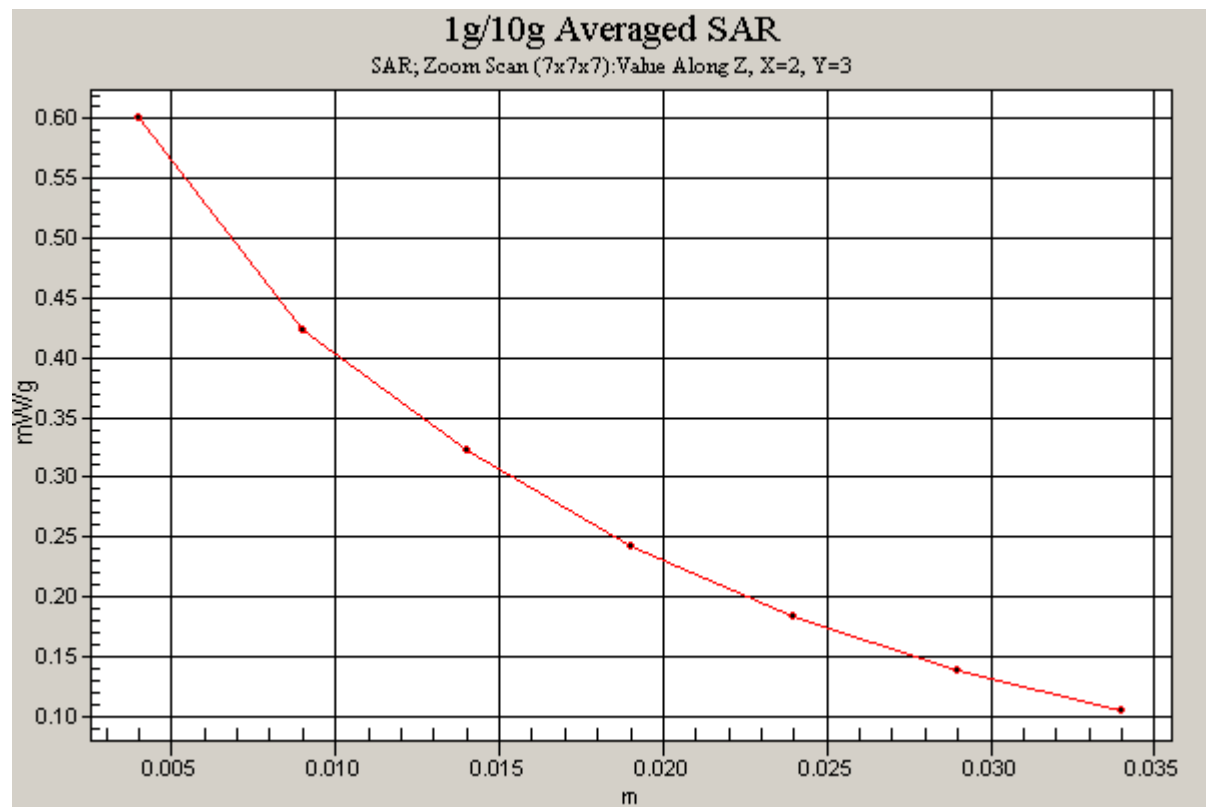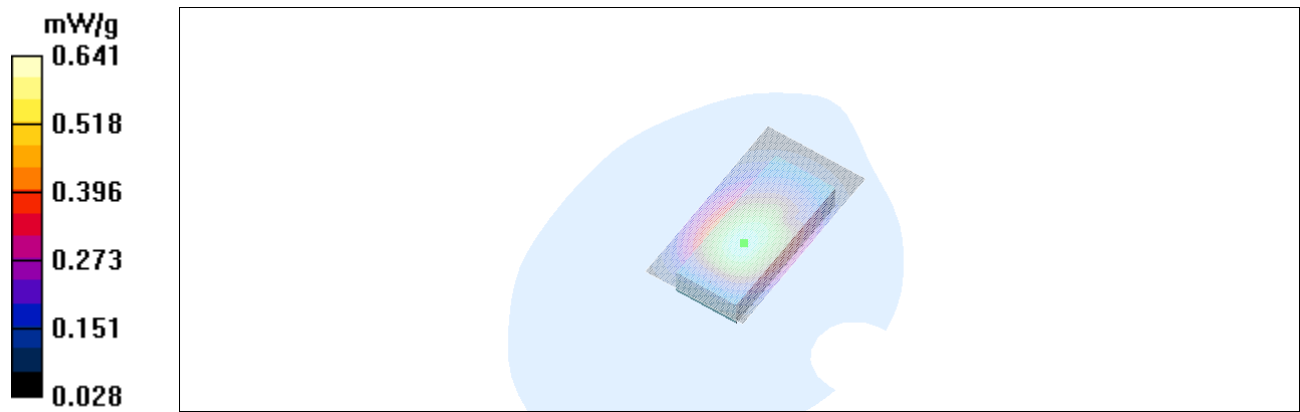

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Body 850 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.945$

mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³ Medium temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(6.17, 6.17, 6.17); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Body - Middle - No Accessory/Area Scan (71x131x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.616 mW/g

Body - Middle - No Accessory/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 17.6 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.878 W/kg

SAR(1 g) = 0.588 mW/g; SAR(10 g) = 0.416 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.617 mW/g

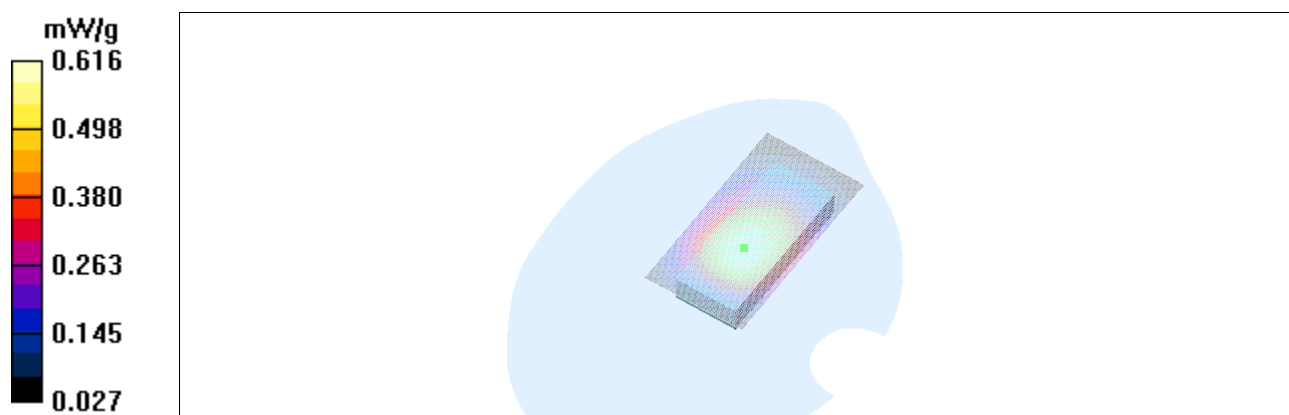

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: GPRS 1900 - Dual Slot; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Body 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.56$

mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³ Medium temperature: 20.9 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(4.41, 4.41, 4.41); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Body - Low - No Accessory/Area Scan (71x131x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.432 mW/g

Body - Low - No Accessory/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 14.9 V/m; Power Drift = -0.3 dB

Peak SAR (extrapolated) = 0.893 W/kg

SAR(1 g) = 0.401 mW/g; SAR(10 g) = 0.230 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.413 mW/g

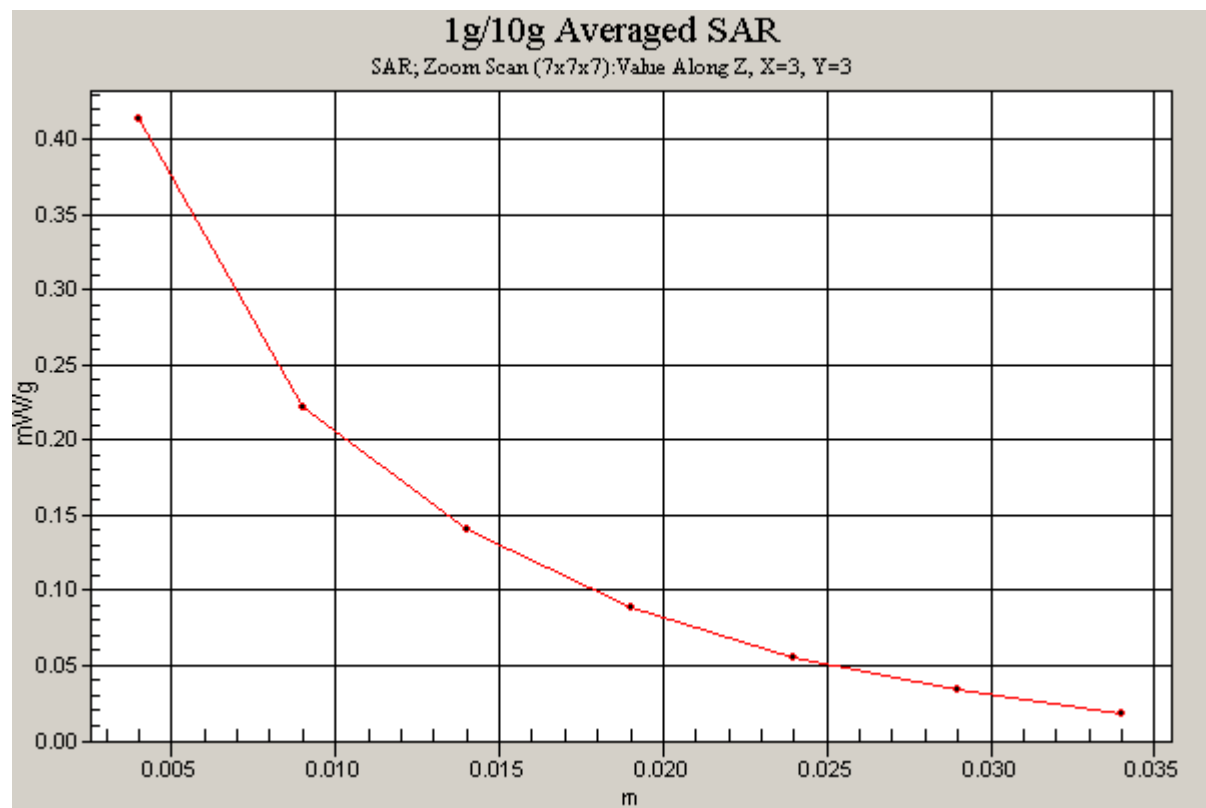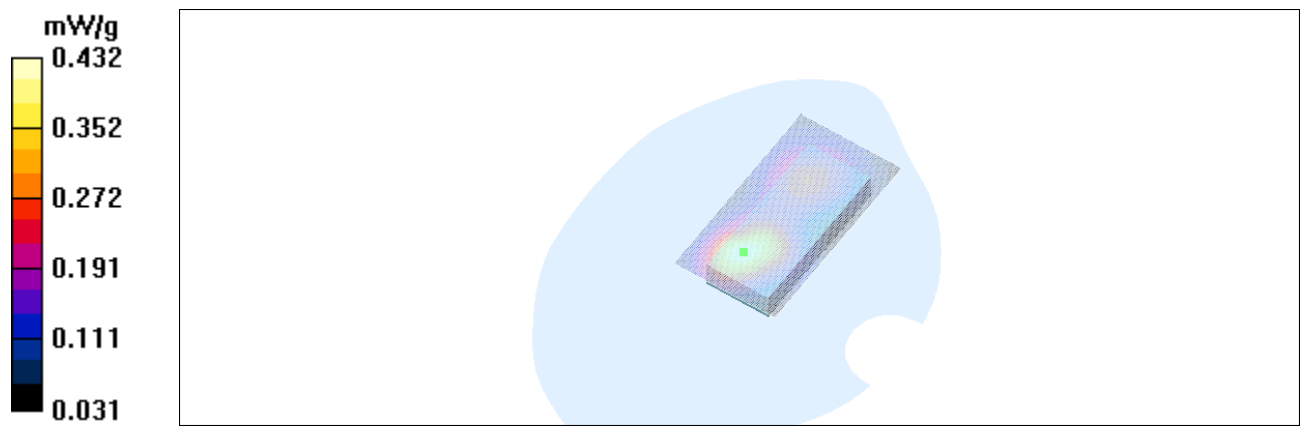

TCC

Copenhagen

DUT: 234726; Type: RM-31; Serial: 004400/38/177624/2

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Body 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³ Medium temperature: 20.9 °C
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1813 - WCE; ConvF(4.41, 4.41, 4.41); Calibrated: 30.09.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 30.08.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Body - Low - No Accessory/Area Scan (71x131x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.324 mW/g

Body - Low - No Accessory/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 13 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 0.654 W/kg

SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.177 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.321 mW/g

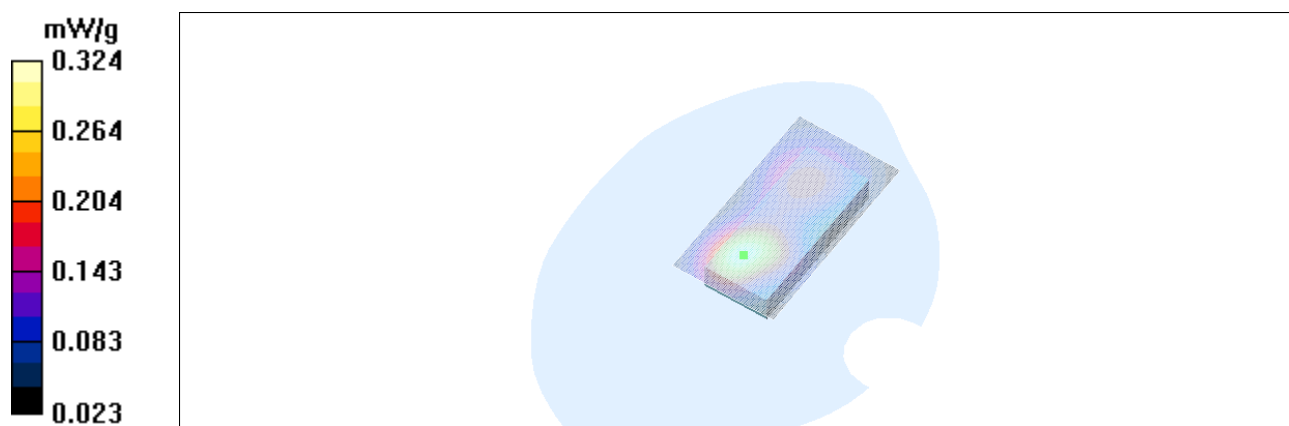

APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

See the following pages.

19368

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 108**

Client **Nokia (NMP / Copenhagen)**

Certificate No: **ET3-1813_Sep04**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1813**

Calibration procedure(s) **QA CAL-01.v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 30, 2004**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	3-Apr-03 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	3-Apr-03 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN:3013	8-Jan-04 (SPEAG, No. ES3-3013_Jan04)	Jan-05
DAE4	SN: 617	26-May-04 (SPEAG, No. DAE4-617_May04)	May-05



Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Nov 04

	Name	Function	Signature
Calibrated by:	Nico Vetterli	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: October 1, 2004

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Conversion Factor Assessment

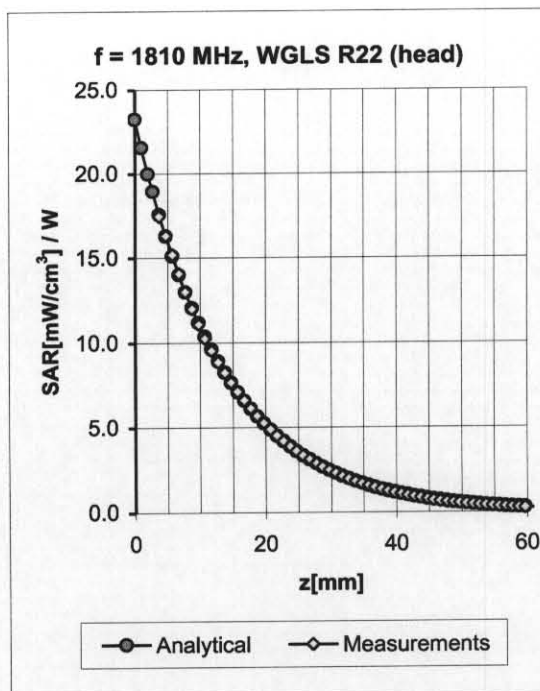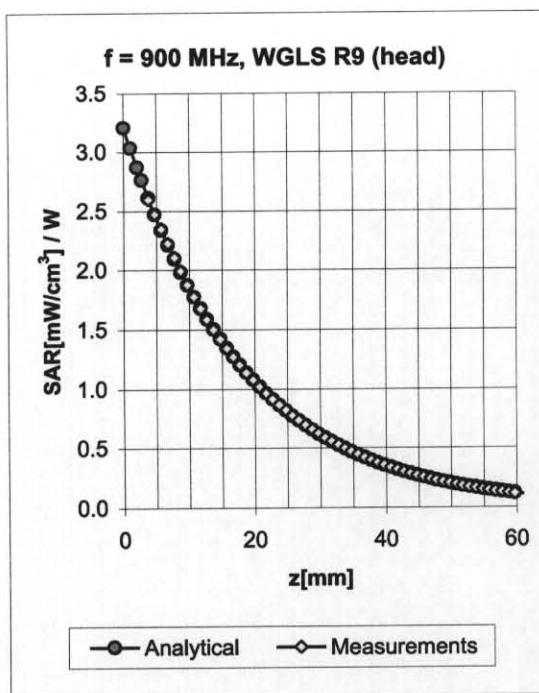

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	1.02	1.53	6.37 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.96	1.59	6.17 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.58	2.33	5.13 ± 11.0% (k=2)
1900	± 50 / ± 101	Head	40.0 ± 5%	1.40 ± 5%	0.55	2.52	4.96 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.50	2.77	4.75 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.62	2.37	4.50 ± 11.8% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.99	1.58	6.17 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.93	1.65	5.95 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.53	2.77	4.55 ± 11.0% (k=2)
1900	± 50 / ± 101	Body	53.3 ± 5%	1.52 ± 5%	0.53	2.96	4.41 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.53	2.67	4.42 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.59	2.30	4.21 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY 4.3 B17 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)

See the following pages.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client

Nokia Danmark A/S

CALIBRATION CERTIFICATE

Object(s) **D835V2 - SN:476**

Calibration procedure(s) **QA CAL-05.v2
Calibration procedure for dipole validation kits**

Calibration date: **February 25, 2003**



Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02	Oct-03
Network Analyzer HP 8753E	US38432426	3-May-00	In house check: May 03

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Laboratory Director	
Approved by:	Niels Kuster	Quality Manager	

Date issued: February 26, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Date/Time: 02/25/03 17:45:15

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN476_SN1507_HSL835_250203.da4

DUT: Dipole 835 MHz; Serial: D835V2 - SN476
Program: Dipole Calibration

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: HSL 835 MHz; ($\sigma = 0.89$ mho/m, $\epsilon_r = 41.5$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.7, 6.7, 6.7); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 23; Postprocessing SW: SEMCAD, V1.6 Build 105

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm



Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.2 V/m

Peak SAR = 3.57 W/kg

SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.55 mW/g

Power Drift = 0.03 dB

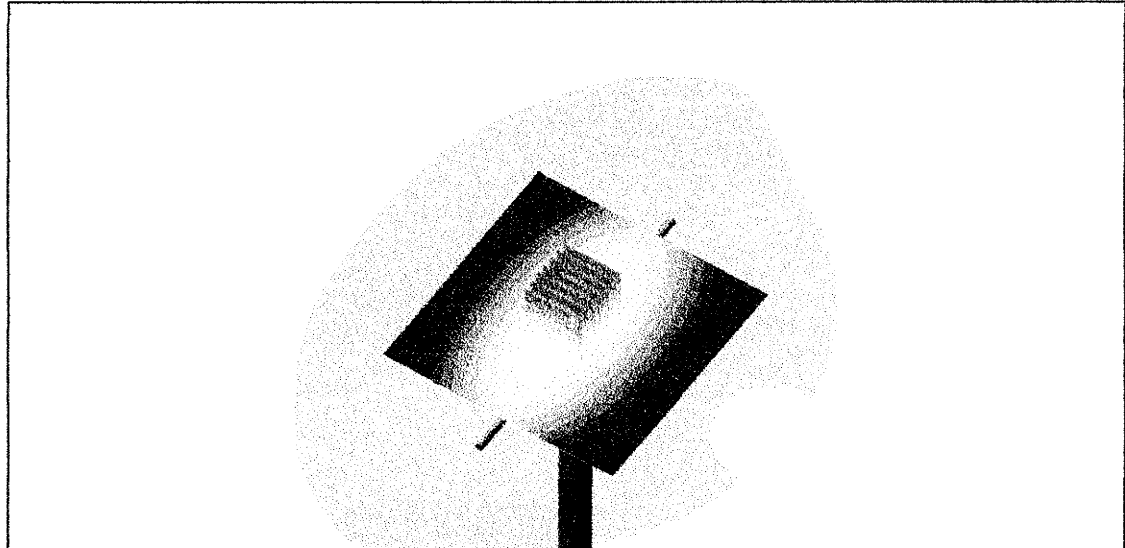

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland

Client

Nokia Danmark A/S

CALIBRATION CERTIFICATE

Object(s) **D835V2 - SN:476**

Calibration procedure(s) **QA CAL-05.v2
Calibration procedure for dipole validation kits**

Calibration date: **April 7, 2003**



Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02	Oct-03
Network Analyzer HP 8753E	US38432426	3-May-00	In house check: May 03

	Name	Function	Signature
Calibrated by:	Judith Mueller	Technician	
Approved by:	Katja Pokovic	Laboratory Director	

Date issued: April 11, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Date/Time: 04/07/03 13:58:59

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN476_SN1507_M835_070403.da4

DUT: Dipole 835 MHz; Serial: D835V2 - SN476
Program: Dipole Calibration

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: Muscle 835 MHz; ($\sigma = 0.96$ mho/m, $\epsilon_r = 54.03$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.3, 6.3, 6.3); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 33; Postprocessing SW: SEMCAD, V1.6 Build 109

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.4 V/m

Peak SAR = 3.6 W/kg

SAR(1 g) = 2.53 mW/g; SAR(10 g) = 1.67 mW/g

Power Drift = 0.02 dB

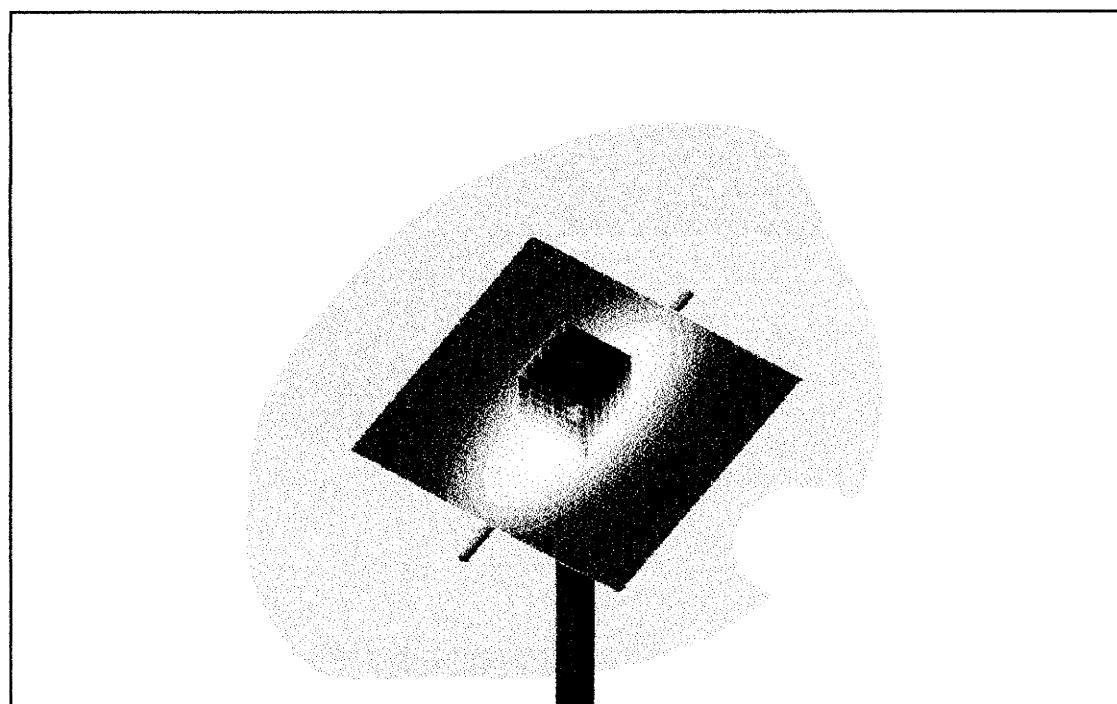

Client

Nokia Danmark A/S

CALIBRATION CERTIFICATE

Object(s)

D1900V2 - SN:5d026

Calibration procedure(s)

QA CAL-05.v2
 Calibration procedure for dipole validation kits

Calibration date:

February 26, 2003

Condition of the calibrated item

In Tolerance (according to the specific calibration document)

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02	Oct-03
Network Analyzer HP 8753E	US38432426	3-May-00	In house check: May 03

Calibrated by:


Name

Katja Pokovic

Function

Laboratory Director

Signature



Approved by:

Niels Kuster

Quality Manager



Date issued: February 26, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Date/Time: 02/26/03 17:17:26

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN5d026 SN1507 HSL1900 260203.da4

DUT: Dipole 1900 MHz; Serial: D1900V2 - SN5d026
Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz; ($\sigma = 1.46$ mho/m, $\epsilon_r = 38.6$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 25; Postprocessing SW: SEMCAD, V1.6 Build 105

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.2 V/m

Peak SAR = 18.6 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.31 mW/g

Power Drift = 0.04 dB

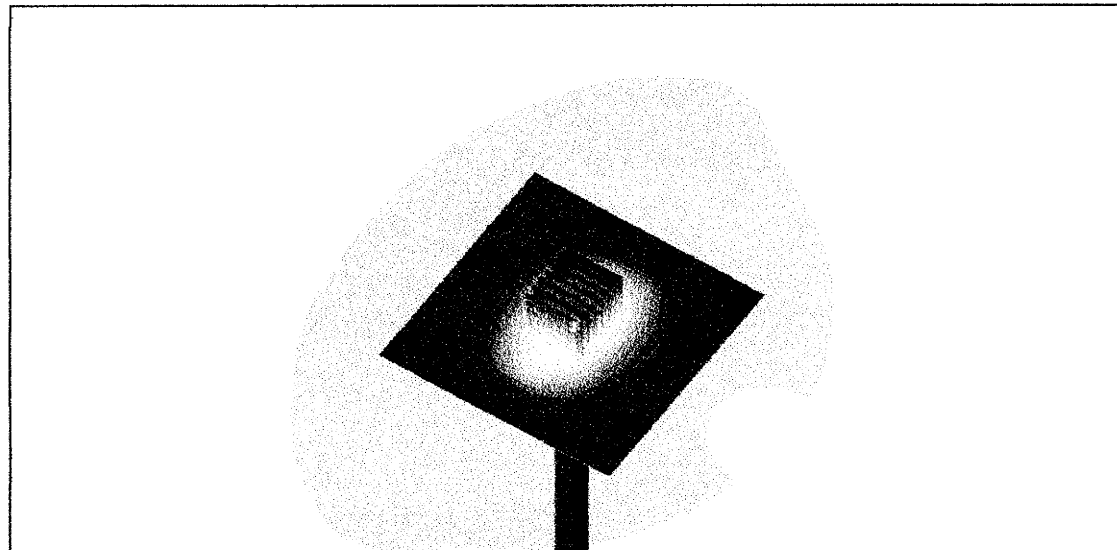

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client

Nokia Danmark A/S

CALIBRATION CERTIFICATE

Object(s) D1900V2 - SN:5d026

Calibration procedure(s) QA CAL-05.v2
Calibration procedure for dipole validation kits

Calibration date: April 8, 2003



Condition of the calibrated item In Tolerance (according to the specific calibration document)

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02	Oct-03
Network Analyzer HP 8753E	US38432426	3-May-00	In house check: May 03

	Name	Function	Signature
Calibrated by:	Judith Mueller	Technician	
Approved by:	Katja Pokovic	Laboratory Director	

Date issued: April 12, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Date/Time: 04/08/03 13:41:14

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN5d026 SN1507 M1900 080403.da4

DUT: Dipole 1900 MHz; Serial: D1900V2 - SN5d026
Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: Muscle 1900 MHz; ($\sigma = 1.59$ mho/m, $\epsilon_r = 51.2$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.8, 4.8, 4.8); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 33; Postprocessing SW: SEMCAD, V1.6 Build 109

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.2 V/m

Peak SAR = 18.6 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.51 mW/g

Power Drift = 0.09 dB

