

FCC Part 15B Compliance Test Report

Test Report no.:	Cph_FCC_0806_23.doc	Date of Report:	08-Feb-2008
Number of pages:	10	Customer's Contact person:	Thomas Reitmayer
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	99059		
IC recognition no.:	661AD-1		
Tested devices/ accessories:	Phone; RM-337, Battery; BL-4C, AC-Charger; AC-5E, Headset; HS-47		
FCC ID:	PPIRM-337	IC:	661U-RM337
Supplement reports:	This Test Report is based on Test Report No.: Cph_FCC_0734_07		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132, RSS-133 and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Allan F. Henriksen, Engineer

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	15-08-2007
Testing completed	22-08-2007
The customer's contact person	Thomas Reitmayer
Test Plan referred to	T:\Projects\RM-337\TestPlan_RS\RS_Testplan_RM-337.xls
Notes	The Test results in this Test Report is a copy from RM-322 Test Report No.: Cph_FCC_0734_07.doc
Document name	T:\Projects\RM-337\EMC\Results\FCC\Cph_FCC_0806_23.doc

1.1. EUT and Accessory Information

The EUT is a 3-band (GSM900/1800/1900) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. GSM band is tested in idle mode. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-322	004401/01/363534/3	0211	-	pr3.50.1	27199
Phone	RM-322	004401/01/363491/6	0211	-	pr3.50.1	27198
Battery	BL-4C	0670389382066N524F1AW00979	-	-	-	27187
Battery	BL-4C	0670389382066N524F1AW00261	-	-	-	27194
AC-Charger	AC-5E	3943497104090614544;0675540	-	-	-	27186
AC Charger	AC-5E	3943497104090614625;0675540	-	-	-	27192
Headset	HS-47	0694579706512111703	-	-	-	27193

1.2. Summary of Test Results

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	Passed
15.109, a	5.5 (9)	Radiated emissions	Passed

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 1900 Test results	5
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)	6
3.1. Test setup	6
3.2. Test method and limit	6
3.3. GSM 1900 Test results	7
4. Test Equipment.....	9
4.1. Conducted measurements	9
4.2. Radiated measurements	9

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-322 Dut 27198
Accessories with DUT numbers	BL-4C Dut 27187 + AC-5E Dut 27186 + HS-47 Dut 27193
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24.3 / 53.5 101.8
Date of measurements	22-08-2007
Measured by	Allan F. Henriksen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. GSM 1900 Test results

RX mode, channel 661 / 1960.0 MHz

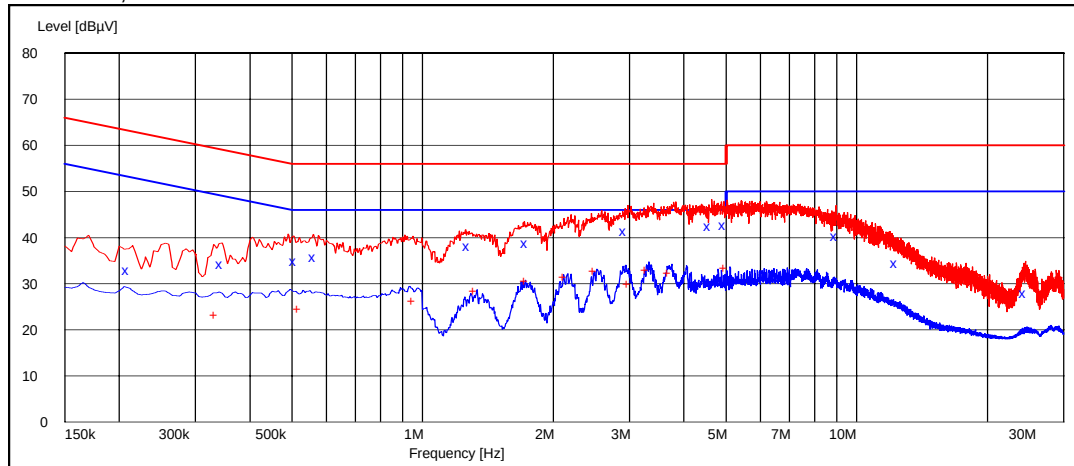

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.210000	33.00	L1	Passed
0.345000	34.30	L1	Passed
0.510000	34.90	L1	Passed
0.565000	35.70	L1	Passed
1.280000	38.10	L1	Passed
1.740000	38.80	N	Passed
2.940000	41.40	N	Passed
4.600000	42.50	N	Passed
4.980000	42.80	N	Passed
8.985000	40.40	L1	Passed
12.380000	34.50	L1	Passed
24.520000	27.90	N	Passed


Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.335000	23.20	L1	Passed
0.520000	24.60	N	Passed
0.955000	26.20	N	Passed
1.325000	28.40	N	Passed
1.735000	30.50	N	Passed
2.130000	31.50	N	Passed
2.500000	32.70	N	Passed
2.990000	29.90	N	Passed
3.295000	33.00	N	Passed
3.700000	32.30	N	Passed
4.995000	33.30	N	Passed

3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)

EUT with DUT number	RM-322 Dut 27199
Accessories with DUT numbers	BL-4C Dut 27194 + AC-5E Dut 27192 + HS-47 Dut 27193
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	FM receiver active during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24.3 / 53.5 101.8
Date of measurements	22-08-2007
Measured by	Allan F. Henriksen

3.1. Test setup

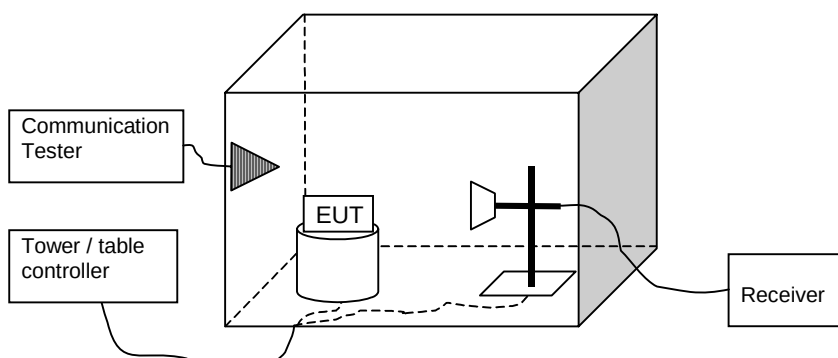

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

3.3. GSM 1900 Test results

RX mode, channel 512 / 1930.2 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	41.30	116.14	41.60	-0.3	VERTICAL	Passed
7720.000000	45.40	186.21	36.90	8.5	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	28.40	26.30	28.70	-0.3	VERTICAL	Passed
7720.000000	29.50	29.85	21.00	8.5	VERTICAL	Passed

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
38.197796	32.40	41.69	44.40	-12.0	VERTICAL	Passed
60.981563	24.60	16.98	49.10	-24.5	VERTICAL	Passed
85.913026	14.30	5.19	34.40	-20.1	HORIZONTAL	Passed
190.980561	12.40	4.17	33.60	-21.2	VERTICAL	Passed
195.890180	10.80	3.47	32.00	-21.2	VERTICAL	Passed
918.537675	22.40	13.18	27.60	-5.2	HORIZONTAL	Passed

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3919.839679	43.70	153.11	44.10	-0.4	HORIZONTAL	Passed
7840.179359	45.80	194.98	36.90	8.9	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2940.889780	40.50	105.93	29.00	11.5	VERTICAL	Passed
3919.839679	28.90	27.86	29.30	-0.4	HORIZONTAL	Passed
7839.679359	30.70	34.28	21.80	8.9	HORIZONTAL	Passed

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	39.90	98.86	40.30	-0.4	VERTICAL	Passed
7960.000000	46.50	211.35	37.40	9.1	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	26.90	22.13	27.30	-0.4	VERTICAL	Passed
7960.000000	30.10	31.99	21.00	9.1	VERTICAL	Passed

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24, 15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24, 15C, 15B
14963	RF Preampifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
19830	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24, 15C, 15B
19151	High Pass Filter 3GHz WHK3.0/18G-10ss	WHJS3000-10SS	Wainwright	22/24, 15C, 15B
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright Instruments	22/24, 15C, 15B
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	22/24, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483- 2390/2493-35/10SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 4 filter	WRCG1737/1743- 1733/1747-40/6SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 5&6 filter	WRCG832/83/-825/845- 40/5SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 8 filter	WRCG894.6/900.6- 890.6/904.6-40/80SS	Wainwright	22/24, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953- 1940/1960-40/6SS	Wainwright	22/24, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24, 15C, 15B
15190	Infra Red Remote Control Unit	4630	Emco	22/24, 15C, 15B
14993	EMI Test Receiver 9KHz- 2750MHz	ESCS30	Rohde&Schwarz	22/24, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24, 15C, 15B
15105	Attenuator 30dB DC-1000MHz 50 Ohm Nf - Nm	NAT-30	Mini-Circuits	22/24, 15C, 15B
13302	Spectrum Analyzer 9KHz- 12.8GHz	HP8596E	Hewlett Packard	22/24, 15C, 15B
11584	Spectrum analyzer 50Hz- 6,5GHz	HP8561B	Hewlett Packard	22/24, 15C, 15B
13134	Tracking generator	HP85645A	Hewlett Packard	22/24, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
11487	Network analyzer 300KHz- 3,0GHz	HP8753A	Hewlett Packard	22/24, 15C, 15B
14807	S - Parameter Test Set 300KHz- 6GHz	HP85047A	Hewlett Packard	22/24, 15C, 15B
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22/24, 15C, 15B