

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-640_19.docx	Date of Report:	15-July-2010
Number of pages:	27	Customer's Contact person:	Vivian Kill-Tollnek
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	99059		
IC recognition no.:	661AL-1		
Tested devices/ accessories:	Phone RM-640 / Battery BL-5CT / Charger AC-8 / Headset WH-102		
FCC ID:	PPIRM-640	IC:	661U-RM640
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Ruben Hansen, System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	11-Jun-2010
Testing completed	12-July-2010
The customer's contact person	Vivian Kill-Tollnek
Test Plan referred to	T:\Projects\RM-640\TestPlan\RS_testplan_RM-640_CR_HW0211.xls
Notes	None
Document name	FCC15C_RM-640_19.docx

1.1. EUT and Accessory Information

The EUT is a Bluetooth and WLAN device. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-640	004402/13/036326/4	0211	-	re 5.04	24206
Battery	BL-5CT	3820669492155081047;0670555	-	-	-	24263
AC-Charger	AC-8E	4090499301040501804;0675387	-	-	-	24250
Headset	WH-102	06943239431A4102160	-	-	-	24247
Phone	RM-640	004402/13/036325/6	0211	-	re 5.04	24209
Battery	BL-5CT	3820669492155081023;0670555	-	-	-	24256
AC-Charger	AC-8E	4090499301040501808;0675387	-	-	-	24255
Headset	WH-102	06943239431A4102158	-	-	-	24240

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	NP
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Copenhagen Laboratory.

CONTENTS

1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Radiated test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2)).....	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	6
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)	10
4.1. Test method and limit.....	10
4.2. Bluetooth Test results	11
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)	16
5.1. Test method and limit.....	16
5.2. Bluetooth Test results	17
7. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	21
7.1. Test method and limit.....	21
7.2. Bluetooth Test results	22
8. Test Equipment	26
8.1. Conducted measurements	26
8.2. Radiated measurements	26

2. Test setups


2.1. Conducted RF test setup

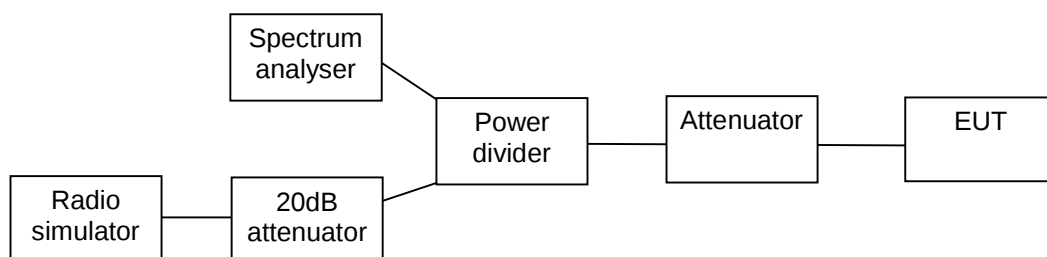

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

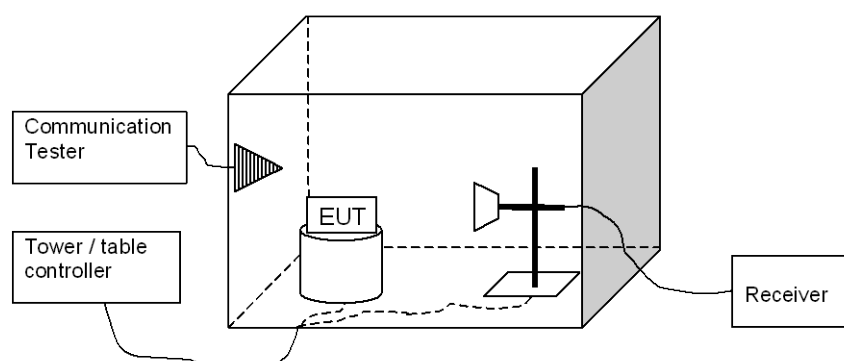

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-640 DUT 24206
Accessories with DUT numbers	BL-5CT DUT 24263; AC-8 DUT 24250; WH-102 DUT 24247
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 46 / 1012
Date of measurements	8-July-2010
Measured by	Ruben Hansen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	6.00	3.981	PASSED
40 / 2442	6.80	4.786	PASSED
78 / 2480	7.20	5.248	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

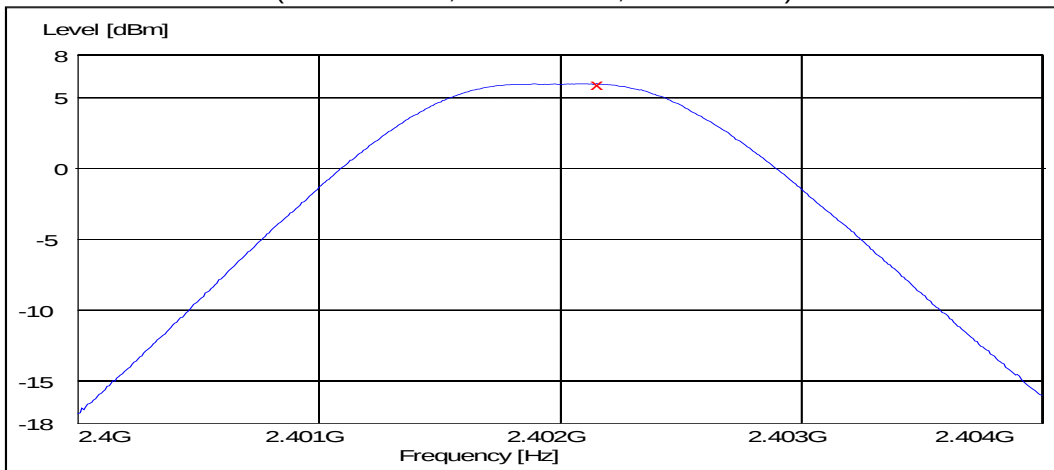

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

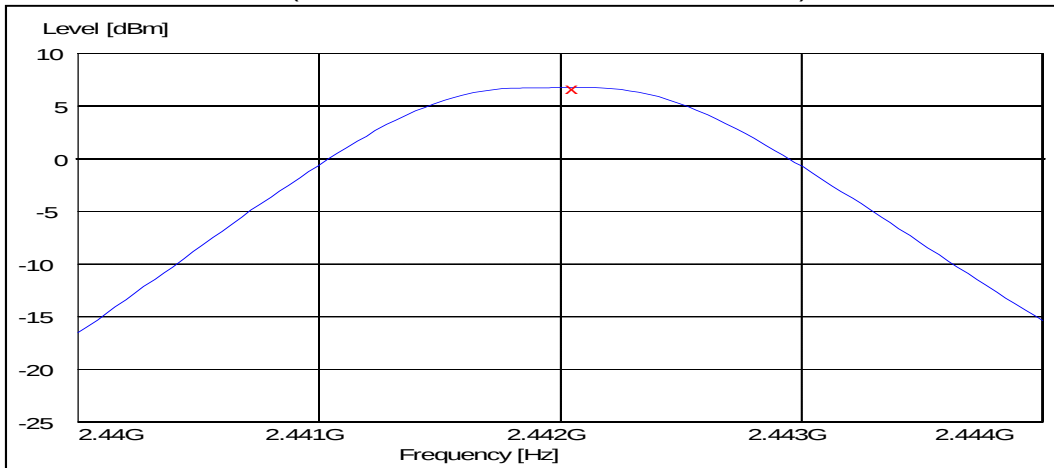


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

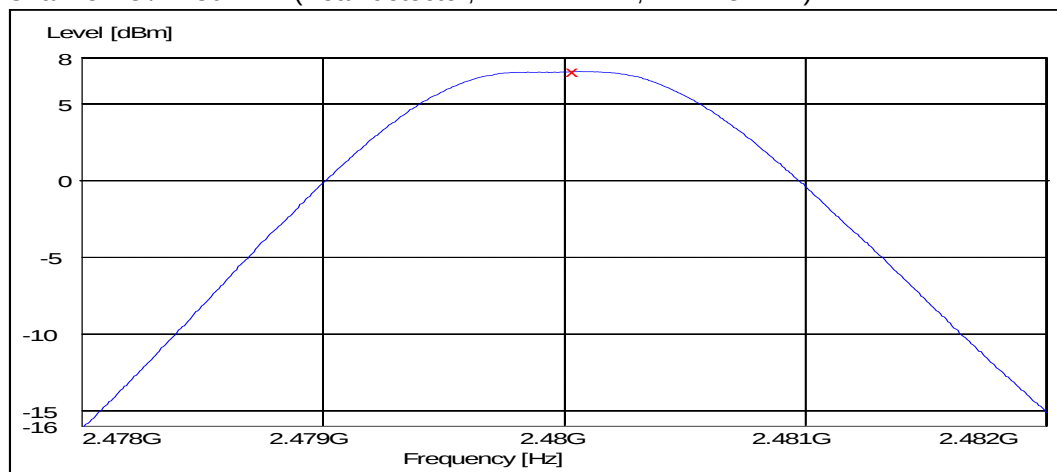


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	6.10	4.074	PASSED
40 / 2442	6.70	4.677	PASSED
78 / 2480	7.00	5.012	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

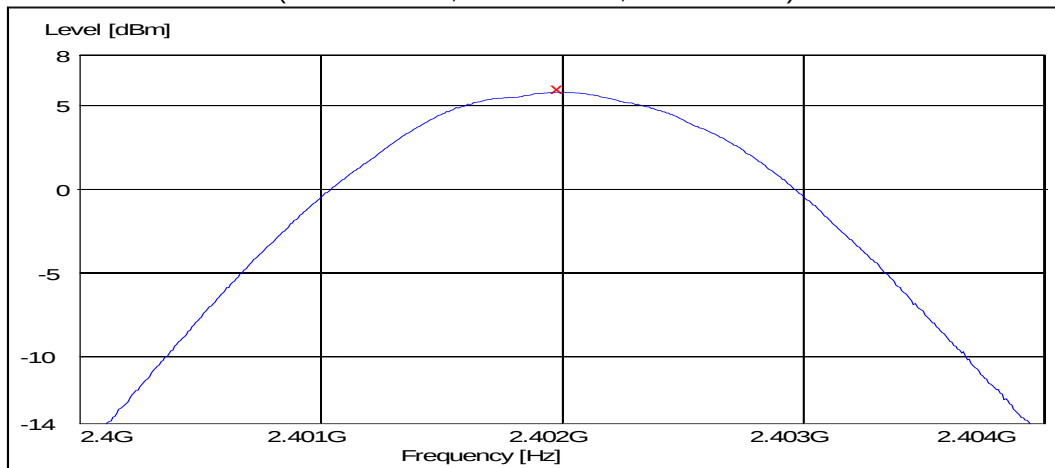

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

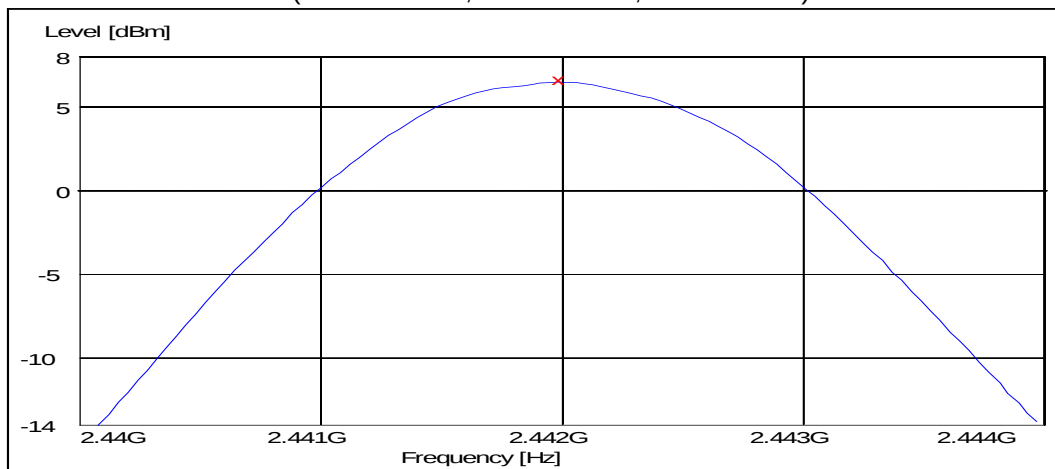

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

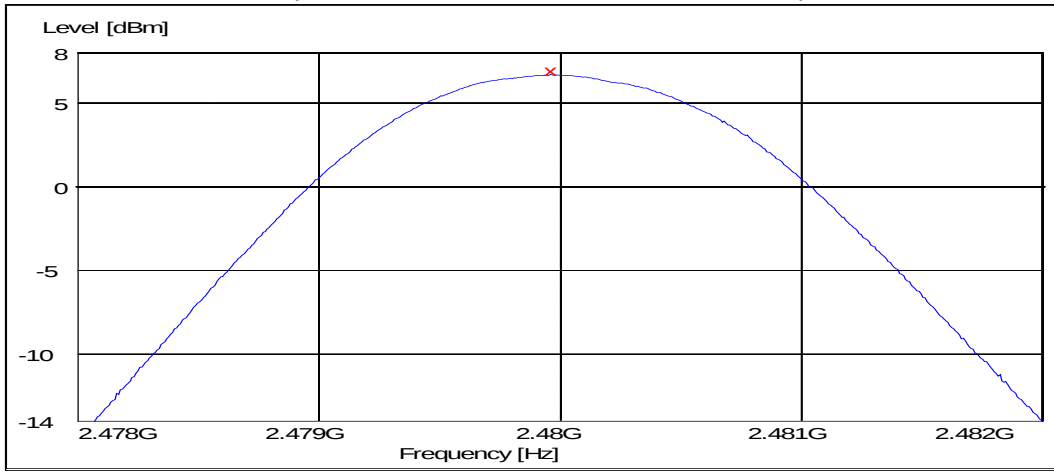

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-640, DUT 24209
Accessories with DUT numbers	BL-5CT, DUT 24256; AC-8 DUT 24255; WH-102 DUT 24240
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 45
Date of measurements	07-Jul-2010
Measured by	Ruben Hansen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results

4.2.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	46.23	204.883	47.85	-1.62	PASSED
Hopping on, low end	47.2	228.957	48.82	-1.62	PASSED
78 / 2480	53.98	500.197	55.22	-1.24	PASSED
Hopping on, high end	53.32	463.485	54.56	-1.24	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	58.3	822.152	59.92	-1.62	PASSED
Hopping on, low end	57.69	766.126	59.31	-1.62	PASSED
78 / 2480	59.97	997.068	61.21	-1.24	PASSED
Hopping on, high end	59.34	926.392	60.58	-1.24	PASSED


GFSK mode. Channel 0 / 2402 MHz

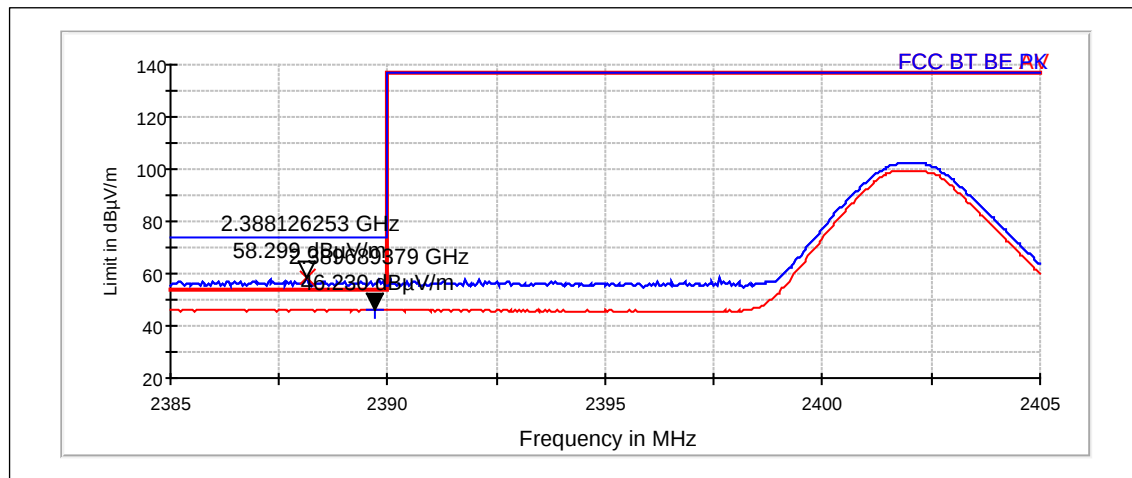


GFSK mode. Hopping on, low end

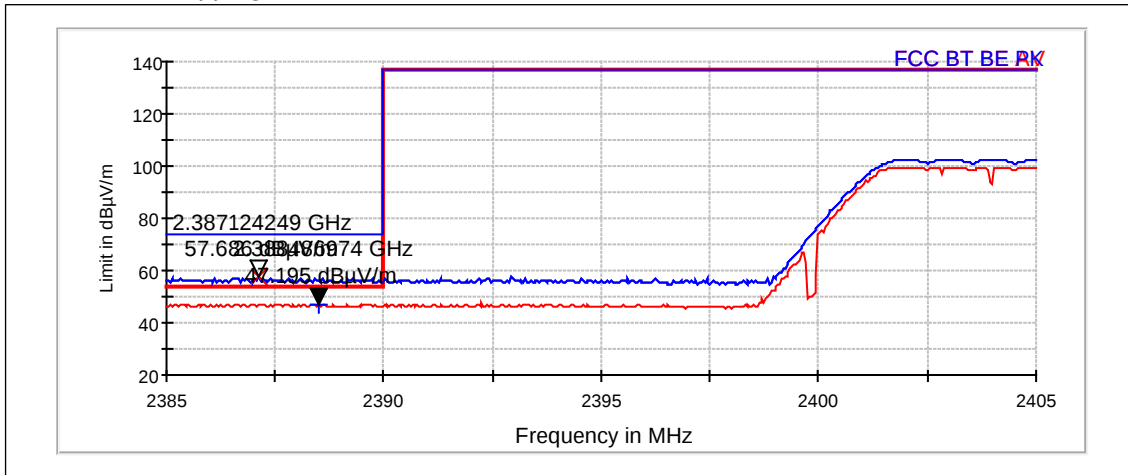

GFSK mode. Channel 78 / 2480 MHz

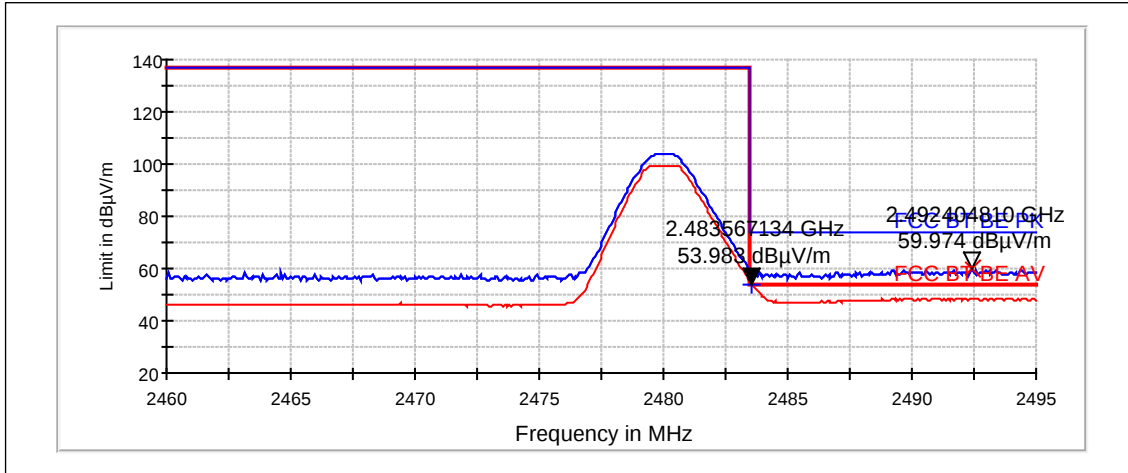

GFSK mode. Hopping on, high end

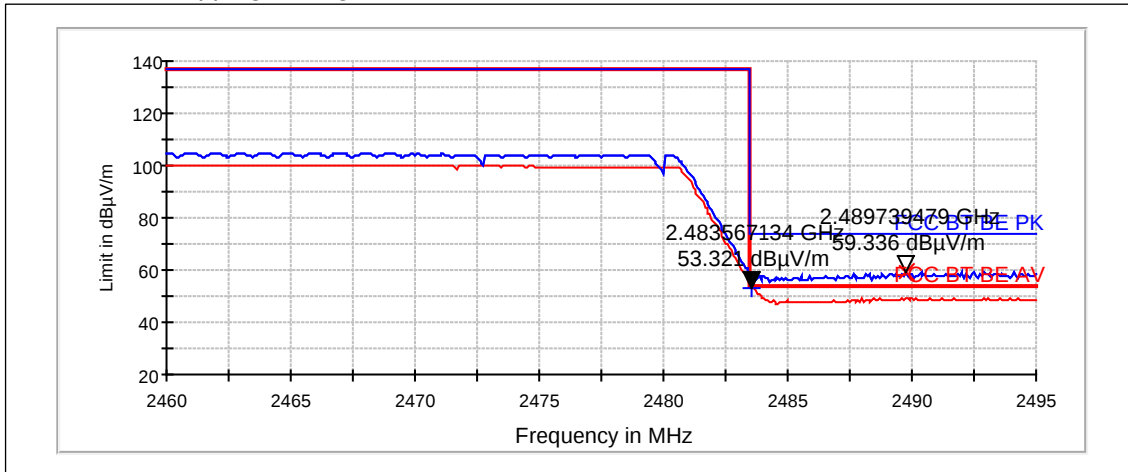

4.2.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	46.46	210.478	48.08	-1.62	PASSED
Hopping on, low end	47.14	227.613	48.76	-1.62	PASSED
78 / 2480	53.63	480.312	54.87	-1.24	PASSED
Hopping on, high end	53.98	500.197	55.22	-1.24	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	57.8	775.921	59.42	-1.62	PASSED
Hopping on, low end	57.23	726.9	58.85	-1.62	PASSED
78 / 2480	60.36	1042.531	61.6	-1.24	PASSED
Hopping on, high end	60.04	1004.675	61.28	-1.24	PASSED


8DPSK mode. Channel 0 / 2402 MHz

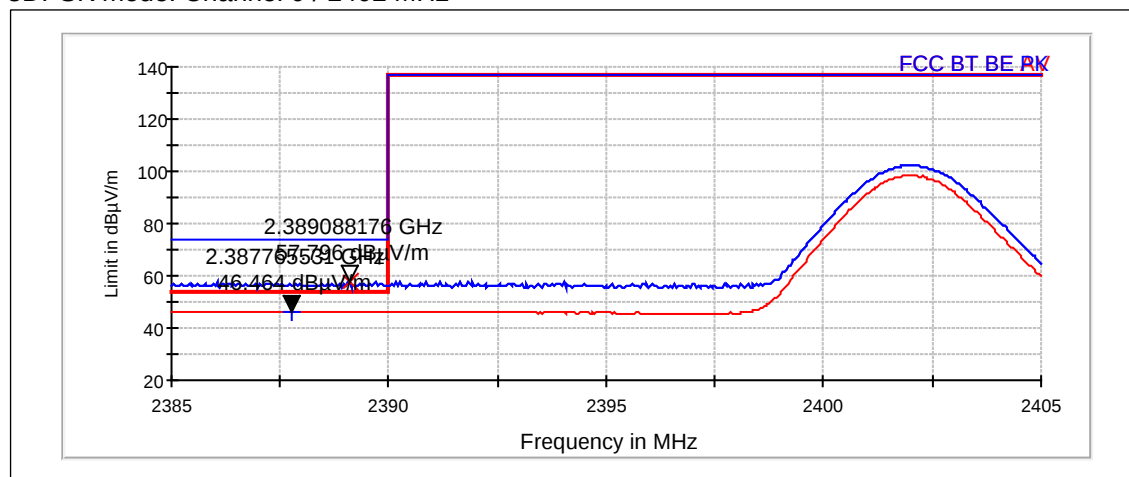


8DPSK mode. Hopping on, low end

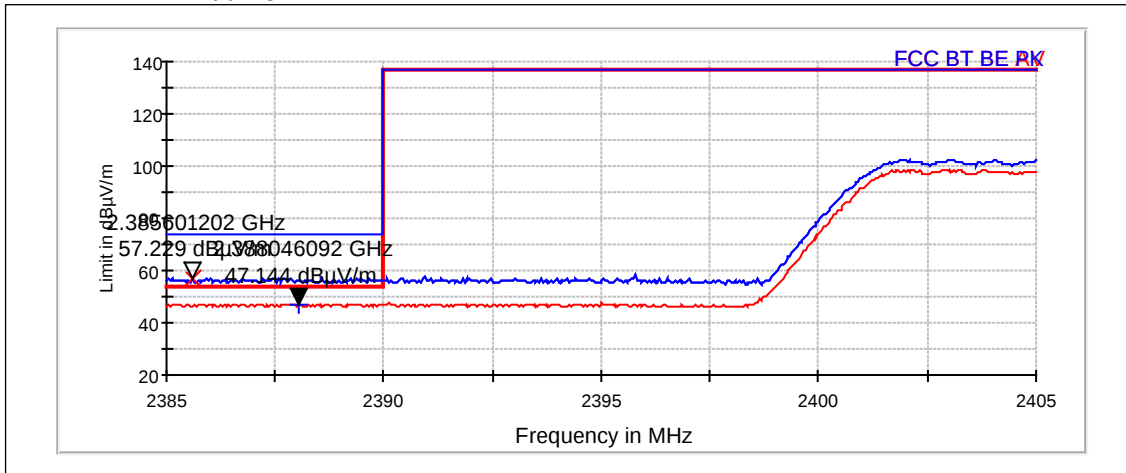

8DPSK mode. Channel 78 / 2480 MHz

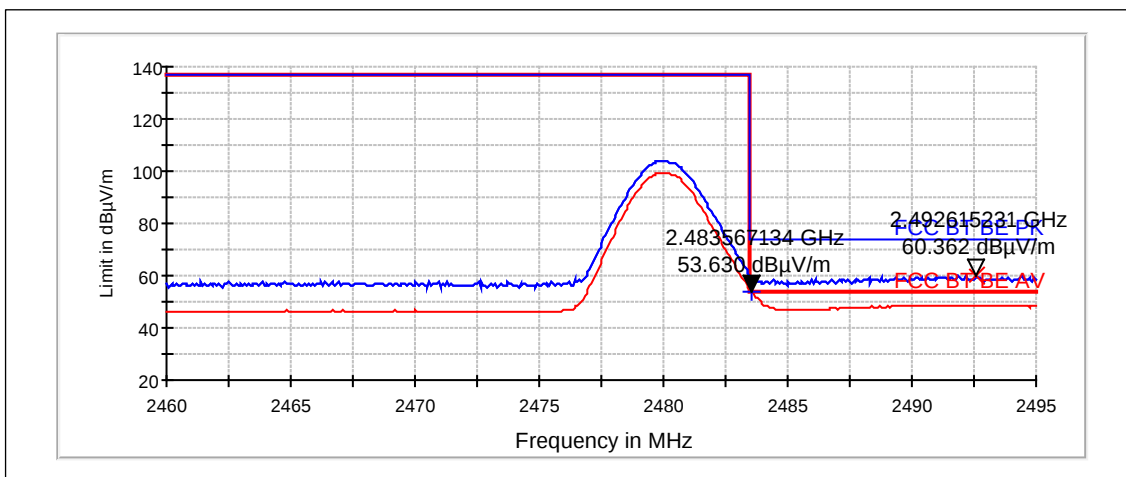

8DPSK mode. Hopping on, high end

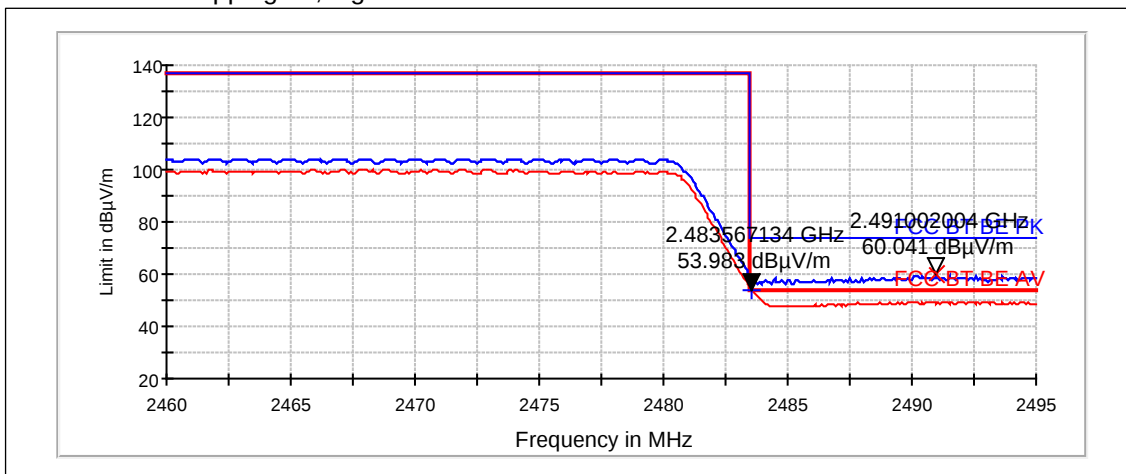

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-640 DUT 24206
Accessories with DUT numbers	BL-5CT DUT 24263; AC-8 DUT 24250; WH-102 DUT 24247
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 46 / 1012
Date of measurements	8-July-2010
Measured by	Ruben Hansen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

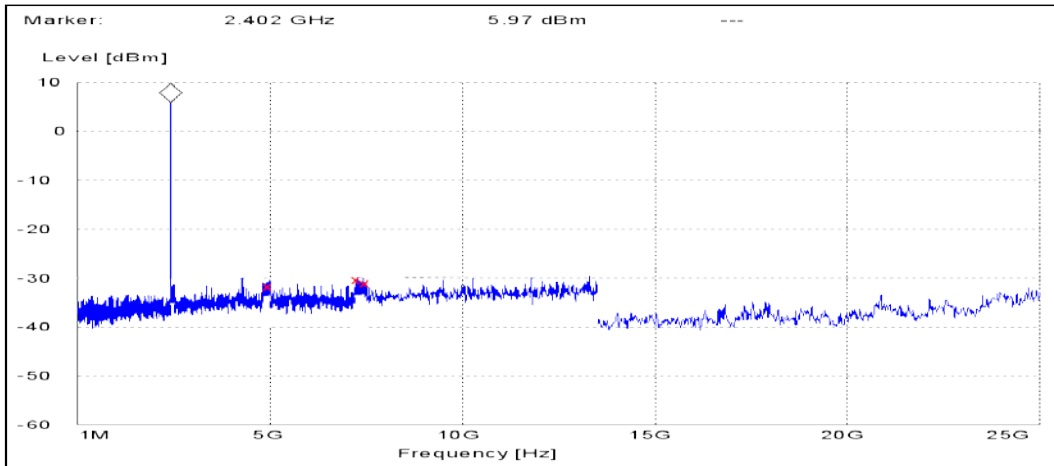

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4972.800000	-37.671603	PASSED
7253.400000	-36.371603	PASSED
7500.000000	-36.971603	PASSED


Channel 40 / 2442 MHz

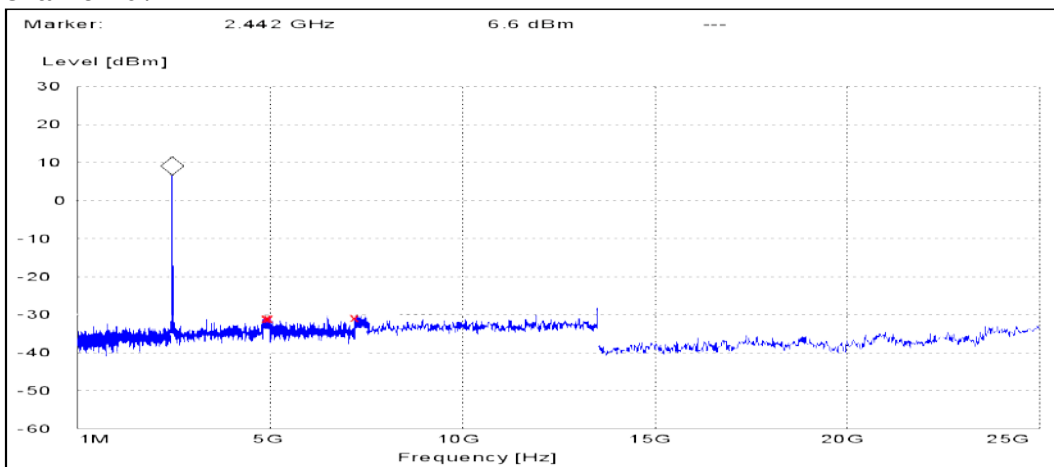

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4944.800000	-37.704225	PASSED
5000.000000	-37.704225	PASSED
7238.400000	-37.504225	PASSED

Channel 78 / 2480 MHz

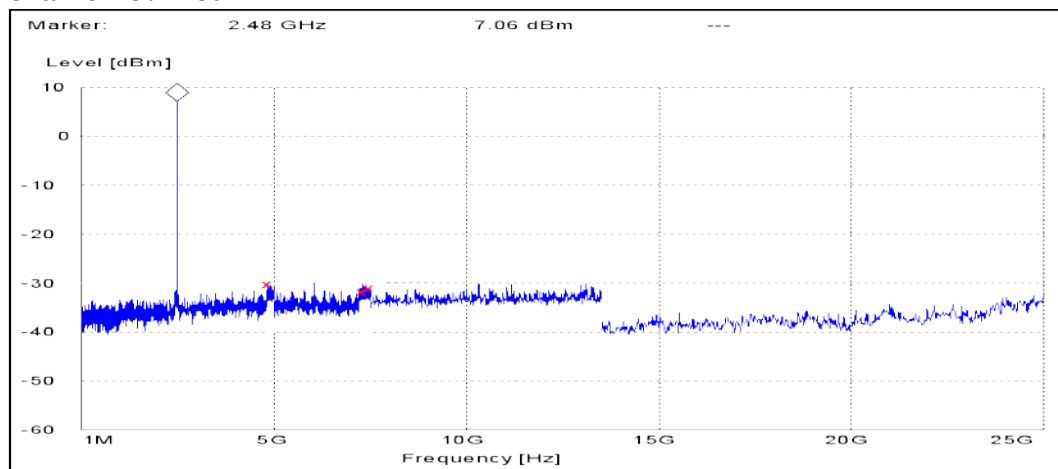


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4839.600000	-37.259738	PASSED
7305.000000	-38.859738	PASSED
7500.000000	-38.059738	PASSED

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

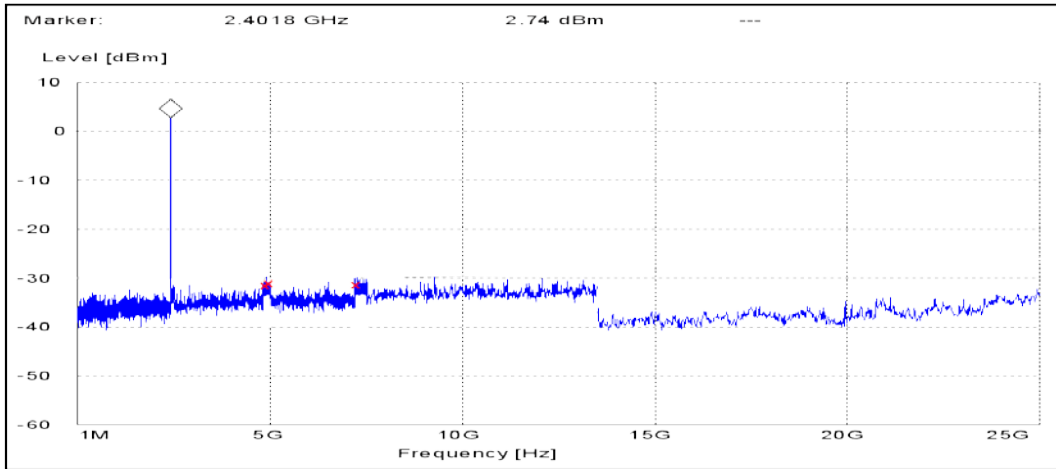

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4905.600000	-34.136320	PASSED
5000.000000	-33.736320	PASSED
7252.800000	-34.036320	PASSED


Channel 40 / 2442 MHz

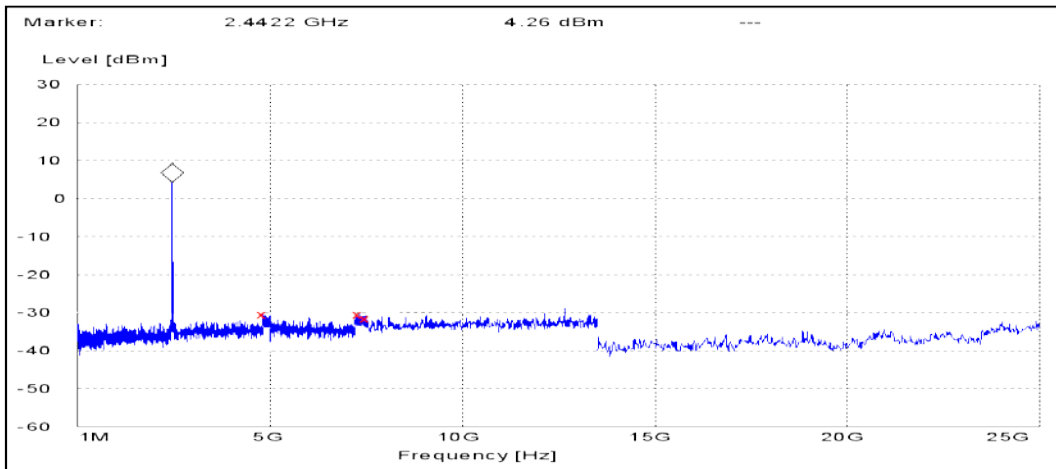

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4817.200000	-34.659720	PASSED
7318.800000	-34.859720	PASSED
7500.000000	-35.859720	PASSED

Channel 78 / 2480 MHz

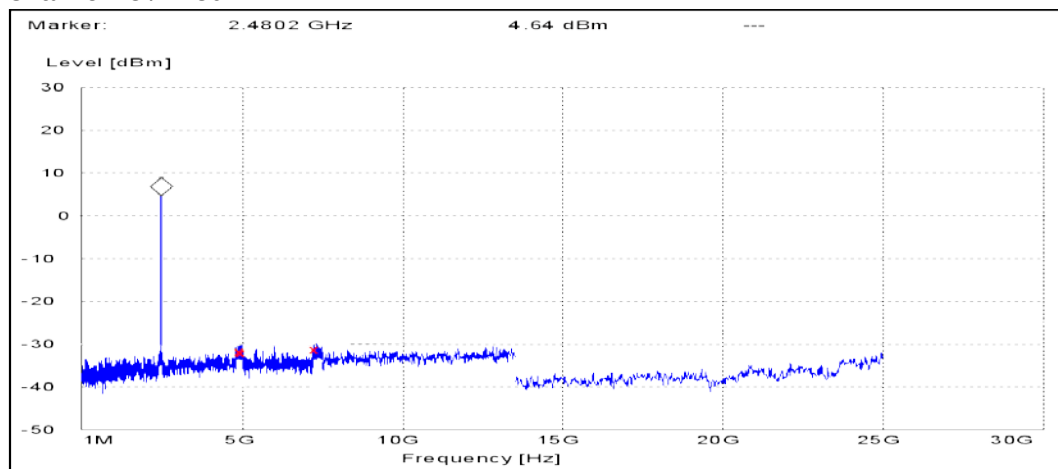

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4964.000000	-36.343013	PASSED
5000.000000	-36.643013	PASSED
7303.800000	-35.843013	PASSED

7. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-640, DUT 24209
Accessories with DUT numbers	BL-5CT, DUT 24256; AC-8 DUT 24255; WH-102 DUT 24240
Operation Voltage [V] / [Hz]	115 V / 60 Hz
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 45
Date of measurements	07-Jul-2010
Measured by	Ruben Hansen

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Average(RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4805.4	27.78	24.499	25.99	1.79	HORIZONTAL	PASSED
7207.5	35.62	60.381	24.21	11.41	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4805.4	41.28	115.851	39.49	1.79	HORIZONTAL	PASSED
7207.5	48.57	268.133	37.16	11.41	VERTICAL	PASSED

Average(RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
2497.734	32.65	42.889	30.78	1.87	VERTICAL	PASSED
3904.409	24.5	16.788	25.58	-1.08	HORIZONTAL	PASSED
10650.401	41.76	122.504	24.12	17.64	VERTICAL	PASSED

Quasi peak (RBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
43.233	16.04	6.342	29.87	-13.83	VERTICAL	PASSED
43.599	27.87	24.734	41.94	-14.07	VERTICAL	PASSED
43.826	16.74	6.871	30.96	-14.22	VERTICAL	PASSED
44.319	28.53	26.693	43.08	-14.55	VERTICAL	PASSED
104.137	8.82	2.762	26.37	-17.55	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2497.734	50.62	339.703	48.75	1.87	VERTICAL	PASSED
3904.409	37.02	70.933	38.1	-1.08	HORIZONTAL	PASSED
10650.401	55.07	566.631	37.43	17.64	VERTICAL	PASSED

Channel 78 / 2480 MHz

Average(RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4958.6	30.28	32.663	27.92	2.36	HORIZONTAL	PASSED
7440.7	35.63	60.492	24.04	11.59	HORIZONTAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4958.6	42.71	136.553	40.35	2.36	HORIZONTAL	PASSED
7440.7	48.35	261.577	36.76	11.59	HORIZONTAL	PASSED

7.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Average(RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4805.8	27.59	23.972	25.8	1.79	VERTICAL	PASSED
7205.8	35.7	60.982	24.26	11.44	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4805.8	40.65	107.771	38.86	1.79	VERTICAL	PASSED
7205.8	49	281.903	37.56	11.44	VERTICAL	PASSED

Average(RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2498.556	32.36	41.51	30.62	1.74	VERTICAL	PASSED
10603.406	42.41	131.917	24.3	18.11	VERTICAL	PASSED
11356.011	42.21	128.959	24.13	18.08	VERTICAL	PASSED

Quasi peak (RBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
43.988	28.75	27.375	43.08	-14.33	VERTICAL	PASSED
44.449	29.6	30.2	44.23	-14.63	VERTICAL	PASSED
44.567	17.82	7.781	32.53	-14.71	VERTICAL	PASSED
44.586	29.23	28.94	43.95	-14.72	VERTICAL	PASSED
83.636	8.97	2.808	27.23	-18.26	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2498.556	48.09	253.834	46.35	1.74	VERTICAL	PASSED
10603.406	55.53	597.723	37.42	18.11	VERTICAL	PASSED
11356.011	55.37	586.746	37.29	18.08	VERTICAL	PASSED

Channel 78 / 2480 MHz

Average(RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959	30.18	32.274	27.83	2.35	VERTICAL	PASSED
7438.6	35.74	61.214	24.19	11.55	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4959	42.7	136.458	40.35	2.35	VERTICAL	PASSED
7438.6	48.84	276.758	37.29	11.55	VERTICAL	PASSED

8. Test Equipment

8.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	Receiver	ESPC	Rohde&Schwarz	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B

8.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18792	Mast/turntable controller	2090	ETS-EMCO	22/24/27, 15C, 15B
18416	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18861	Receiver	EMI Test Receiver 20Hz-26,5GHz ESI	Rohde&Schwarz	22/24/27, 15C, 15B
18860	Antenna	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
14114	Highpass Filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
14187	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16633	Band reject filter	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-40/5SS	Wainwright	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schwarz	15C, 15B
13799	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B