

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-722_14.docx	Date of Report:	10-Dec-2010
Number of pages:	15	Customer's Contact person:	Tobias Cremer
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	99059		
IC recognition no.:	661AL-1		
Tested devices/ accessories:	Phone RM-722 / Headset WH-102 / AC-Charger AC-3E / Battery BL-5C		
FCC ID:	PPIRM-722	IC:	661U-RM722
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Christian Andersen, System Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	25-Nov-2010
Testing completed	07-Dec-2010
The customer's contact person	12-Nov-10
Test Plan referred to	T:\Projects\RM-722\TestPlan\RS_testplan_RM-722_CR_HW0320.xls
Notes	-
Document name	T:\Projects\RM-722\EMC\FCC15C_RM-722_14.docx

1.1. EUT and Accessory Information

The EUT is a 8-band (GSM850/900/1800/1900) and WCDMA Band (I/II(1900)/V(850)/V(850)) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-722	004402/13/348377/0	0320	-	Vp jn09w09_10w41	23902
Headset	WH-102	06943230293H2606470	-	-	-	23898
AC-Charger	AC-3E	4090495175921006300;0675370	-	-	-	23896
Battery	BL-5C	0670400382066Q14105DR77262	-	-	-	23914

1.2. Summary of Test Results

PASSED	The EUT complies with the essential requirements in the standard.
FAILED	The EUT does not comply with the essential requirements in the standard.
NP	The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)	4
2.2. Test method and limit	4
2.3. Bluetooth Test results	5
3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	9
3.2. Test method and limit	9
3.3. Bluetooth Test results	11
4. Test Equipment	14
4.1. Conducted measurements	14
4.2. Radiated measurements	14

2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-722, DUT 23902
Accessories with DUT numbers	WH-102, DUT 23898 ; AC-3E, DUT 23896 ; BL-5C, DUT 23914
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 35 / 99.8
Date of measurements	06-Dec-2010
Measured by	Christian Andersen

2.1.1 Test Setup

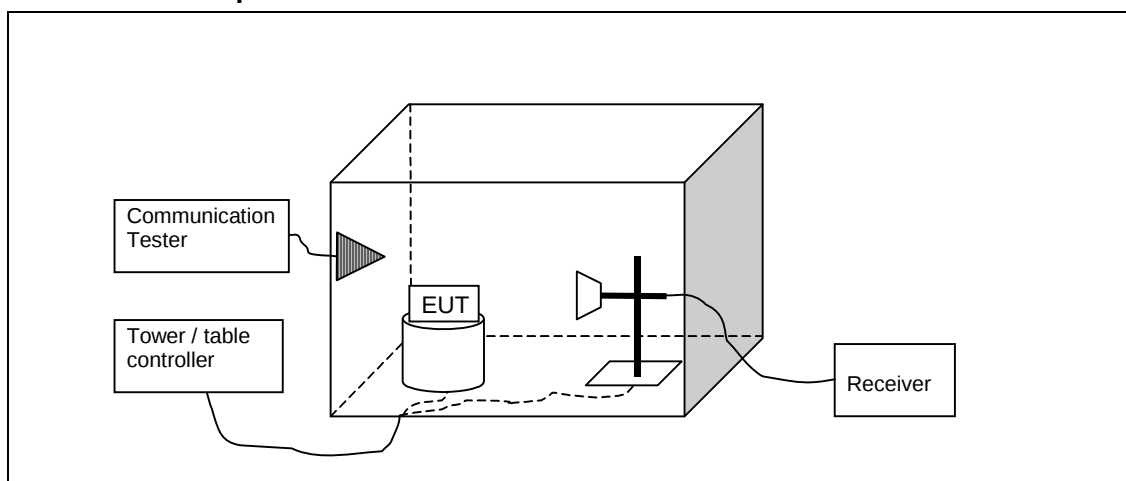

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

2.3. Bluetooth Test results

2.3.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	36.39	66.006	36.77	-0.38	Passed
Hopping on, low end	38.19	81.216	38.57	-0.38	Passed
78 / 2480	52.72	432.495	52.17	0.55	Passed
Hopping on, high end	53.27	460.949	52.72	0.55	Passed


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	54.8	549.643	55.18	-0.38	Passed
Hopping on, low end	55.11	569.273	55.49	-0.38	Passed
78 / 2480	71.02	3555.819	70.47	0.55	Passed
Hopping on, high end	70.54	3366.505	69.99	0.55	Passed


GFSK mode. Channel 0 / 2402 MHz

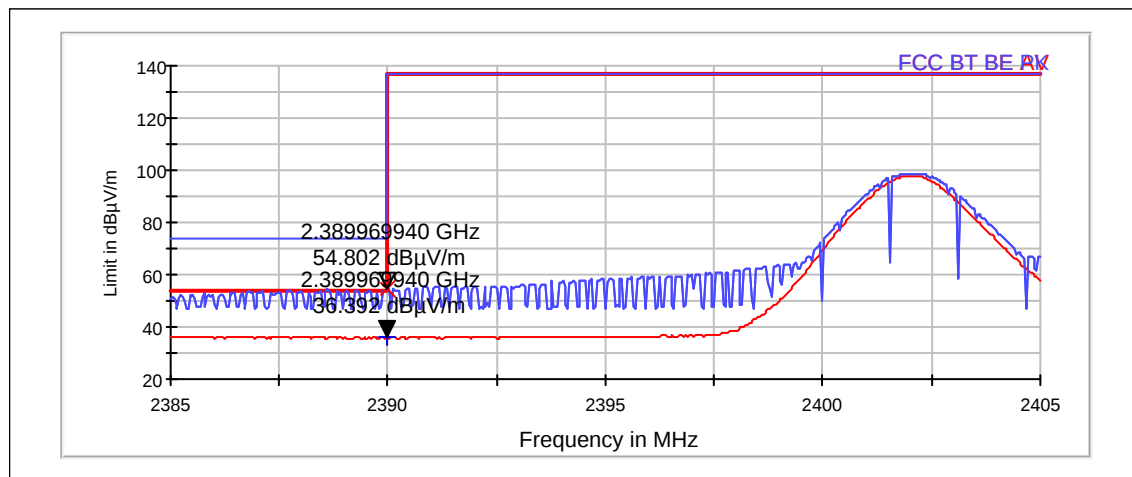


GFSK mode. Hopping on, low end

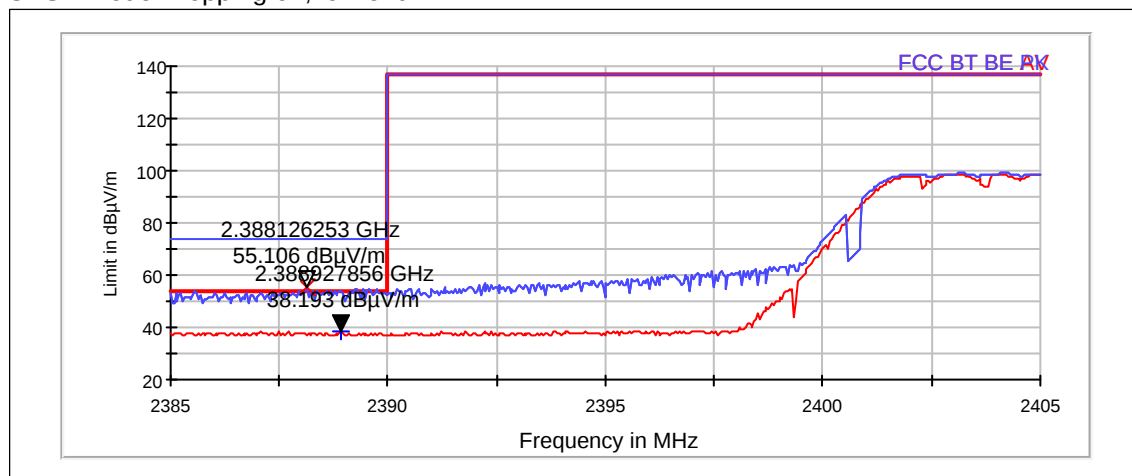

GFSK mode. Channel 78 / 2480 MHz

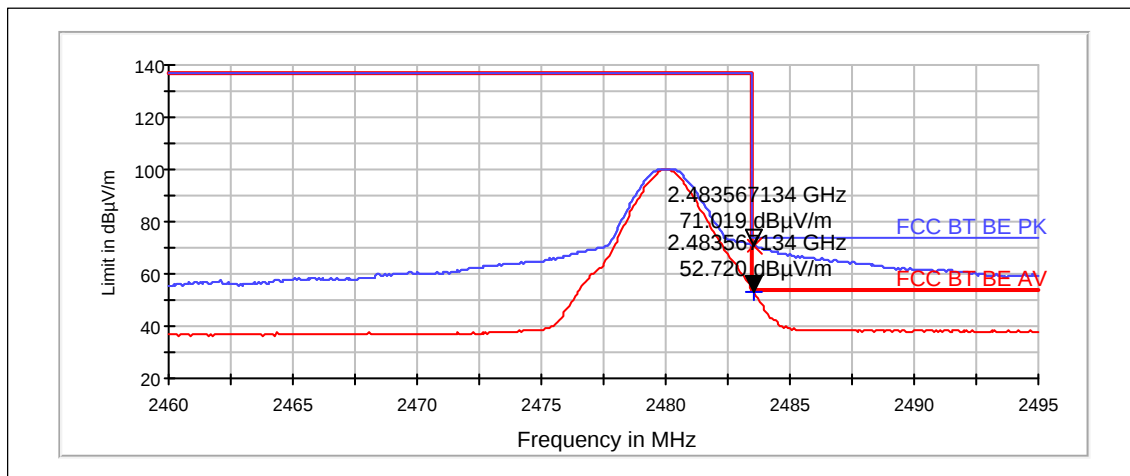

GFSK mode. Hopping on, high end

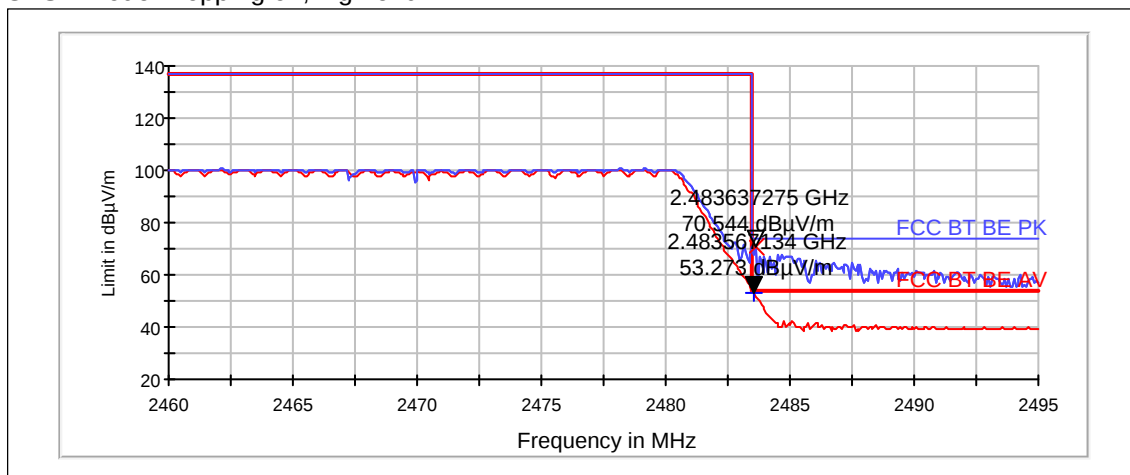

2.3.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	36.39	66.005	36.77	-0.38	Passed
Hopping on, low end	37.63	76.152	38.01	-0.38	Passed
78 / 2480	52.72	432.495	52.17	0.55	Passed
Hopping on, high end	53.06	449.568	52.51	0.55	Passed


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	53.43	469.295	53.81	-0.38	Passed
Hopping on, low end	51.54	377.594	51.92	-0.38	Passed
78 / 2480	66.47	2106.526	65.92	0.55	Passed
Hopping on, high end	64.67	1711.625	64.12	0.55	Passed


8DPSK mode. Channel 0 / 2402 MHz

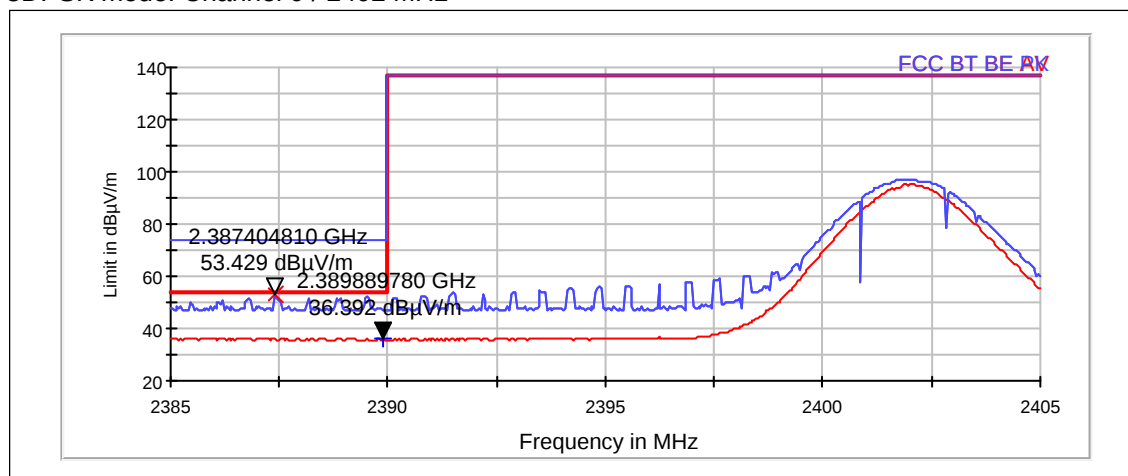


8DPSK mode. Hopping on, low end

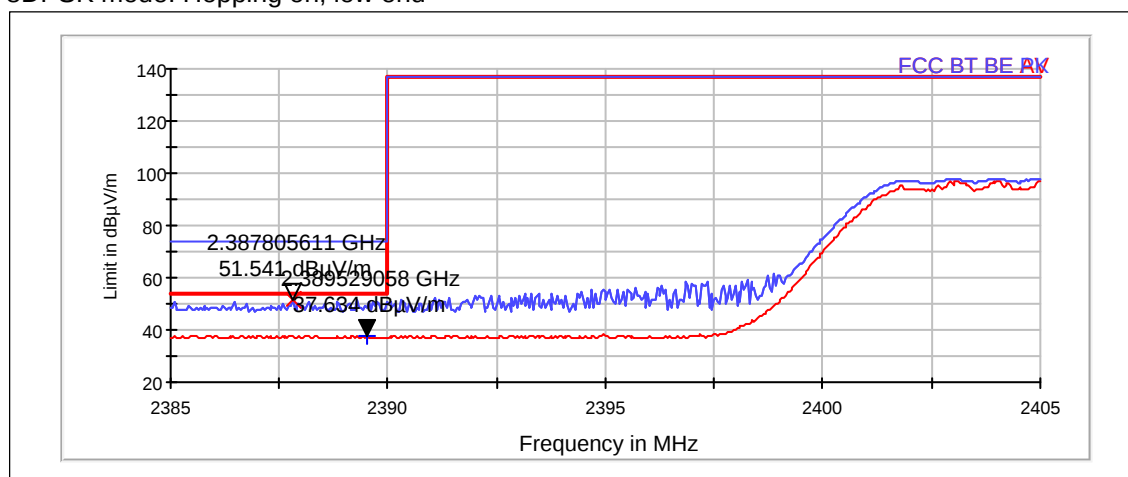

8DPSK mode. Channel 78 / 2480 MHz

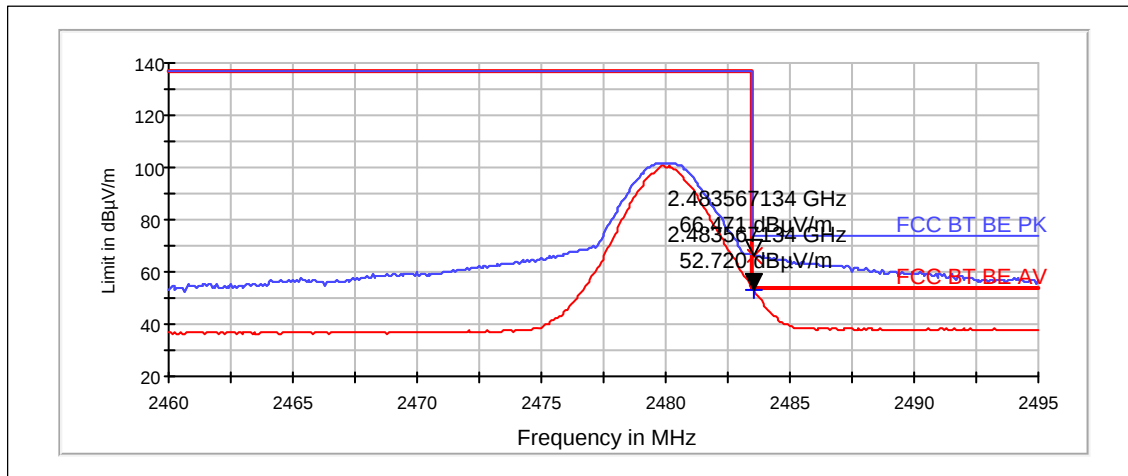


8DPSK mode. Hopping on, high end

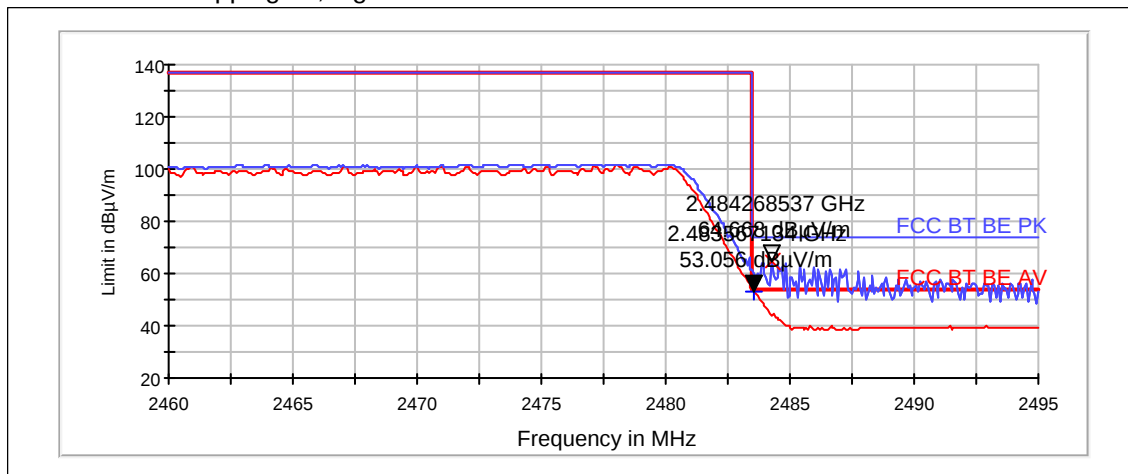

3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-722, DUT 23902
Accessories with DUT numbers	WH-102, DUT 23898 ; AC-3E, DUT 23896 ; BL-5C, DUT 23914
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 35 / 99.8
Date of measurements	06-Dec-2010
Measured by	Christian Andersen

3.1.1 Test Setup

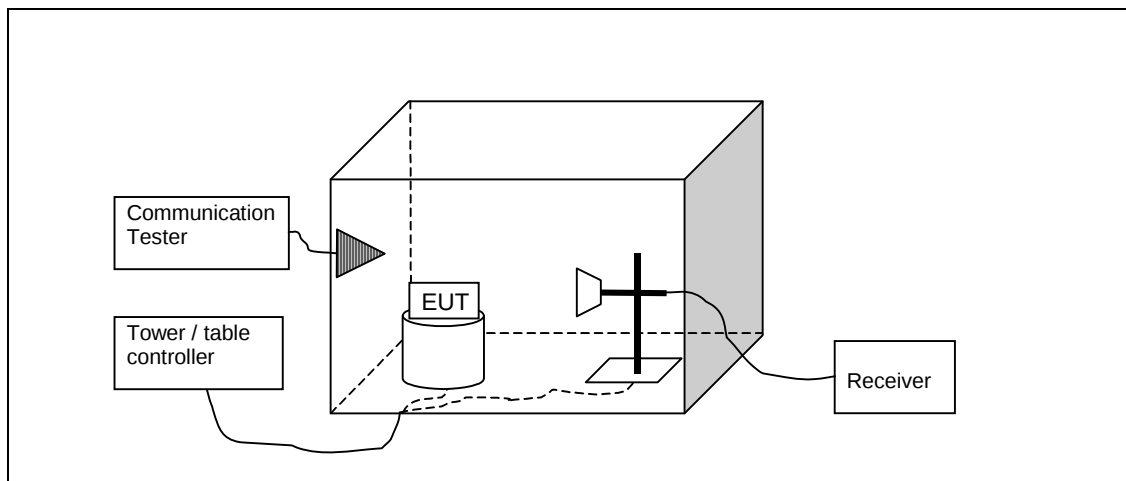

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 - 216	150	43.5	Quasi peak
216 - 960	200	46	Quasi peak
960 - 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4802.7	40.9	110.917	38.86	2.04	HORIZONTAL	Passed
7204.9	48.19	256.596	37.15	11.04	HORIZONTAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4802.7	28.38	26.239	26.34	2.04	HORIZONTAL	Passed
7204.9	35.34	58.459	24.3	11.04	HORIZONTAL	Passed

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
36.122	34.71	54.375	45.39	-10.68	VERTICAL	Passed
36.224	34.08	50.559	44.82	-10.74	VERTICAL	Passed
36.823	34.23	51.475	45.33	-11.1	VERTICAL	Passed
37.022	32.59	42.619	43.81	-11.22	VERTICAL	Passed
37.203	31.99	39.783	43.32	-11.33	VERTICAL	Passed

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
2494.411	59.24	915.693	54.68	4.56	HORIZONTAL	Passed
2875.251	48.94	279.866	41.86	7.08	HORIZONTAL	Passed
11522.344	56.31	653.507	37.01	19.3	HORIZONTAL	Passed
11621.544	56.89	698.876	37.82	19.07	HORIZONTAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
2494.411	35.01	56.267	30.45	4.56	HORIZONTAL	Passed
2875.251	36.32	65.426	29.24	7.08	HORIZONTAL	Passed
11522.344	43.55	150.487	24.25	19.3	HORIZONTAL	Passed
11621.544	43.64	152.02	24.57	19.07	HORIZONTAL	Passed

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4958.9	43.81	154.989	41.36	2.45	HORIZONTAL	Passed
7438.9	49.64	303.319	37.82	11.82	VERTICAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4958.9	30.61	33.908	28.16	2.45	HORIZONTAL	Passed
7438.9	35.89	62.316	24.07	11.82	VERTICAL	Passed

3.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.3	41.1	113.501	38.99	2.11	HORIZONTAL	Passed
7206.8	47.72	243.08	36.62	11.1	HORIZONTAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.3	28.41	26.324	26.3	2.11	HORIZONTAL	Passed
7206.8	35.37	58.675	24.27	11.1	HORIZONTAL	Passed

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
36.124	34.29	51.832	44.97	-10.68	VERTICAL	Passed
36.882	32.52	42.247	43.66	-11.14	VERTICAL	Passed
36.893	34.84	55.195	45.98	-11.14	VERTICAL	Passed
36.973	34.81	55.03	46	-11.19	VERTICAL	Passed
37.173	31.88	39.274	43.19	-11.31	VERTICAL	Passed

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2494.522	56.7	683.754	52.27	4.43	HORIZONTAL	Passed
2497.145	53.25	459.462	49.52	3.73	HORIZONTAL	Passed
11349.901	55.85	620.44	37	18.85	VERTICAL	Passed
11510.72	56.87	697.509	37.27	19.6	VERTICAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
2494.522	34.87	55.367	30.44	4.43	HORIZONTAL	Passed
2497.145	34.17	51.115	30.44	3.73	HORIZONTAL	Passed
11349.901	42.79	137.895	23.94	18.85	VERTICAL	Passed
11510.72	43.81	154.971	24.21	19.6	VERTICAL	Passed

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4962	43.7	153.073	41.23	2.47	HORIZONTAL	Passed
7441.6	48.85	277.077	37	11.85	HORIZONTAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4962	30.63	33.998	28.16	2.47	HORIZONTAL	Passed
7441.6	35.88	62.216	24.03	11.85	HORIZONTAL	Passed

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	Receiver	ESPC	Rohde&Schwarz	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18792	Mast/turntable controller	2090	ETS-EMCO	22/24/27, 15C, 15B
18416	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
1999	Receiver	EMI Test Receiver 20Hz-26,5GHz ESI	Rohde&Schwarz	22/24/27, 15C, 15B
18860	Antenna	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
14114	Highpass Filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
14188	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16633	Band reject filter	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-40/5SS	Wainwright	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schwarz	15C, 15B
13799	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B