

FCC Part 22/24 Compliance Test Report

Test Report no.:	FCC22&24_RM-776_10.docx	Date of Report:	13-May-2011
Number of pages:	13	Customer's Contact person:	Vivian Kill-Tollnek
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	99059		
IC recognition no.:	661AL-1		
Tested devices/ accessories:	Phone RM-776 / Battery BL-5CT / Charger AC-8 / Headset WH-102		
FCC ID:	PPIRM-776	IC:	661U-RM776
Supplement reports:	This test report is a copy of FCC22&24_RM-640_02		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-C-2004 and IC standards RSS-GEN (Issue 2, June 2007), RSS-132 (Issue 2, September 2005) and RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	3-June-2010
Testing completed	7-June-2010
The customer's contact person	Vivian Kill-Tollnek
Test Plan referred to	T:\Projects\RM-640\TestPlan\RS_testplan_RM-640.xls
Notes	None
Document name	FCC22&24_RM-640_02

1.1. EUT and Accessory Information

The EUT is a 8-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/V(850)/VIII) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-640	004402/13/036920/4	0210	-	re 5.04	24269
Battery	BL-5CT	3820669492155081047;0670555	-	-	-	24263
Charger	AC-8	4090499301040501804;0675387	-	-	-	24250
Headset	WH-102	06943239431A4102160	-	-	-	24247

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	Passed
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	Passed
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM 1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	Passed
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	Passed
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP

§2.1049(h)	4.6.1	99 % occupied bandwidth	Passed
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	Passed
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Copenhagen Laboratory.

The test results of PPIRM-640 are re-used for certification of the PPIRM-776. The table above indicates the results, which will be re-used.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
3. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)	5
3.1. Test setup	5
3.2. Test method and limit	5
3.3. GSM 850 Test results.....	6
3.4. GSM 1900 Test results.....	7
3.5. WCDMA 850 Test results	8
3.6. WCDMA 1900 Test results	9
5. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3).....	10
5.1. Test setup	10
5.2. Test method and limit	10
5.3. GSM 850 Test results.....	11
5.4. GSM 1900 Test results.....	11
6. Test Equipment	12
6.1. Conducted measurements	12
6.2. Radiated measurements	12

3. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)

EUT with DUT number	RM-640 DUT 24269
Accessories with DUT numbers	BL-5CT DUT 24263 AC-8 DUT 24250 WH-102 DUT 24247
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 43 /1013
Date of measurements	7-June-2010
Measured by	Ruben Hansen

3.1. Test setup

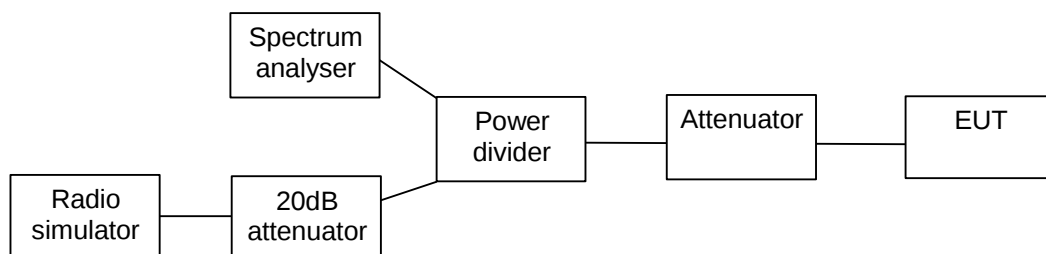


3.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standard RSS-GEN.

3.3. GSM 850 Test results


Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	240
EGPRS	236

GSM mode, channel 190 / 836.6 MHz

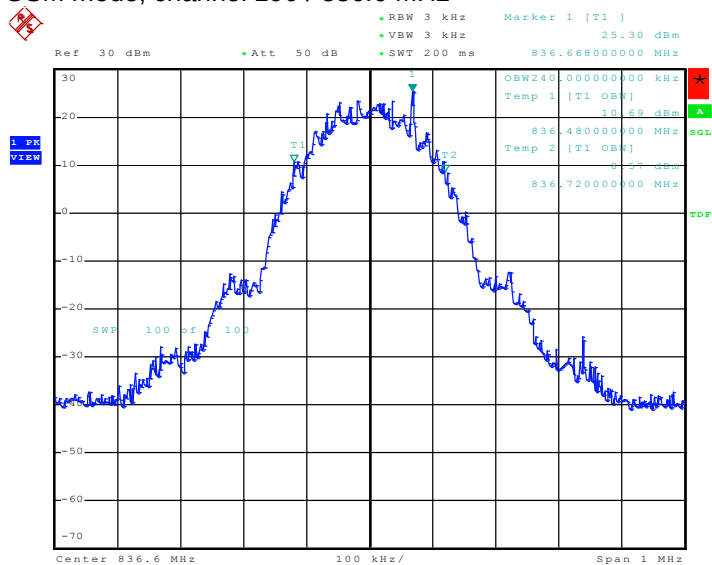

Date: 7.JUN.2010 13:12:31

EGPRS mode, channel 190 / 836.6 MHz

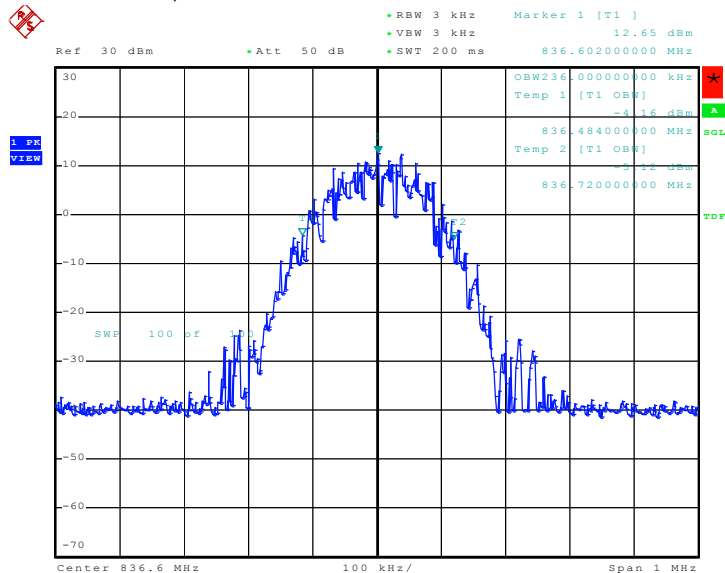


Date: 7.JUN.2010 13:13:33

3.4. GSM 1900 Test results


Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	244
EGPRS	240

GSM mode, channel 661 / 1880.0 MHz

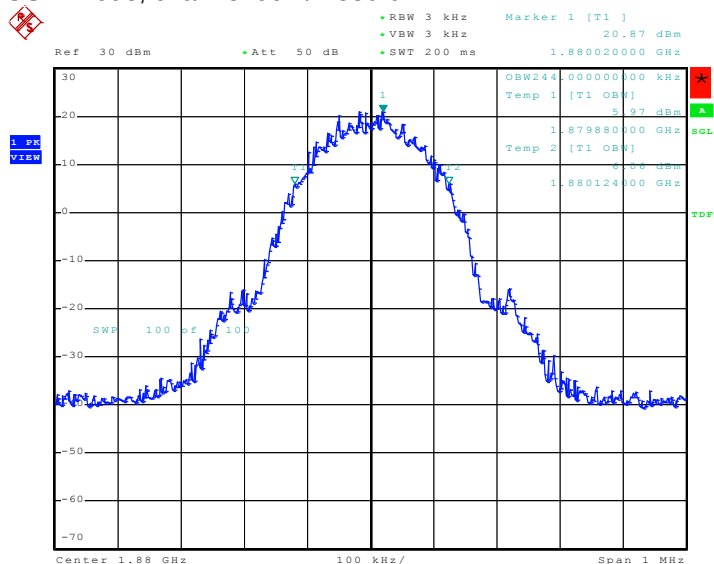

Date: 8.JUN.2010 09:38:46

EGPRS mode, channel 661 / 1880.0 MHz

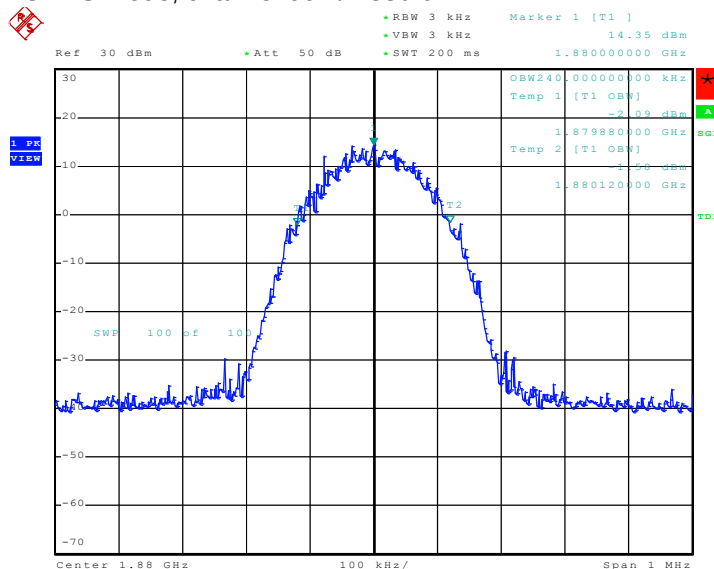


Date: 8.JUN.2010 09:40:35

3.5. WCDMA 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4160

Channel 4175 / 835.0 MHz

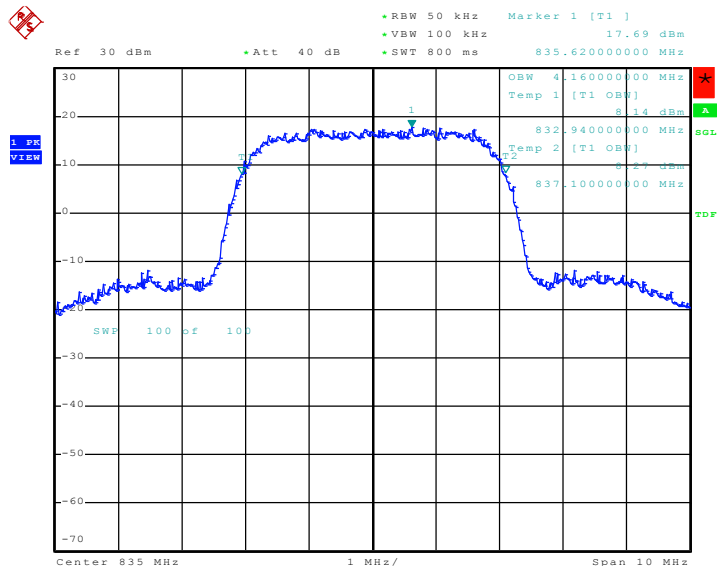


Date: 8.JUN.2010 11:43:32

3.6. WCDMA 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4140

Channel 9400 / 1880.0 MHz

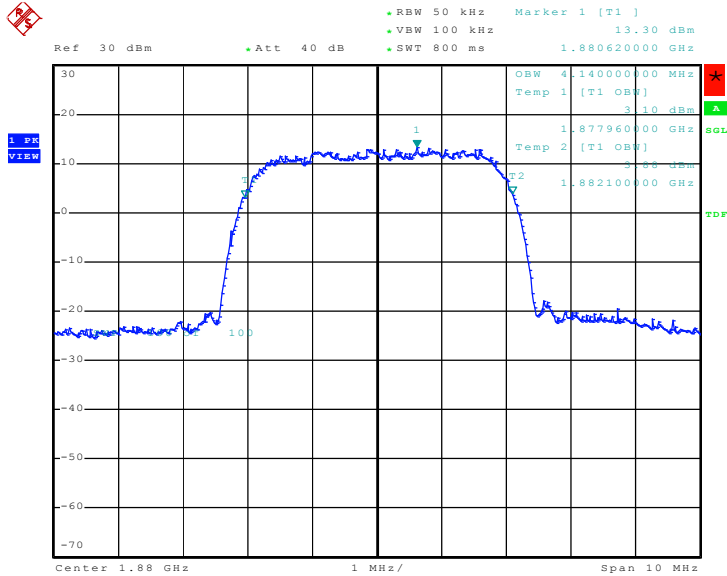


Date: 8.JUN.2010 12:37:15

5. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3)

EUT with DUT number	RM-640 DUT 24269
Accessories with DUT numbers	BL-5CT DUT 24263 AC-8 DUT 24250 WH-102 DUT 24247
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 43 / 1013
Date of measurements	7-June-2010
Measured by	Ruben Hansen

5.1. Test setup

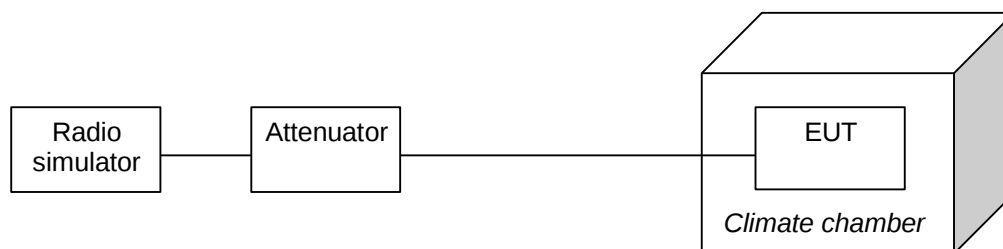

5.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-132 and RSS-133 as follows:

The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize. The EUT is placed in the chamber.

The EUT is set in idle mode for 15 minutes.

The EUT is set to transmit.

The transmit frequency error was measured immediately.

The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

5.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-18	-0.0215
40	31	0.0371
30	-19	-0.0227
20	31	0.0371
10	-15	-0.0179
0	-11	-0.0131
-10	-14	-0.0167
-20	0	0.0000

5.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-22	-0.0117
40	-40	-0.0213
30	-37	-0.0197
20	27	0.0144
10	60	0.0319
0	71	0.0378
-10	47	0.0250
-20	31	0.0165
-30	27	0.0144

6. Test Equipment

6.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	Receiver	ESPC	Rohde&Schwarz	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B

6.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18792	Mast/turntable controller	2090	ETS-EMCO	22/24/27, 15C, 15B
18416	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18861	Receiver	EMI Test Receiver 20Hz-26,5GHz ESI	Rohde&Schwarz	22/24/27, 15C, 15B
18860	Antenna	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
14114	Highpass Filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
16633	Band reject filter	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-40/5SS	Wainwright	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schwarz	15C, 15B
13799	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B