

SAR Compliance Test Report

Test report no.:	Cph_SAR_0521_2	Date of report:	2005-06-03
Template version:	4	Number of pages:	22
Testing laboratory:	TCC Copenhagen Nokia Danmark A/S Frederikskaj DK-1790 Copenhagen V Denmark Tel. +45 33 29 29 29 Fax. +45 33 29 20 01	Client:	Nokia Ulm Lise Meitner Strasse 10 89081 Ulm Germany Tel. +49 731 1754 6728 Fax. +49 731 1754 6806
Responsible test engineer:	Leif Funch Klysner	Product contact person:	Thomas Reitmayer
Measurements made by:	Leif Funch Klysner		
Tested device:	RM-77		
FCC ID:	PPIRM-77X	IC:	661U-RM77
Supplement reports:	-		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		

Date and signatures: 2005-06-03

For the contents:


Leif Funch Klysner
Test Engineer

CONTENTS

1. SUMMARY OF SAR TEST REPORT.....	3
1.1 TEST DETAILS.....	3
1.2 MAXIMUM RESULTS.....	3
1.2.1 Head Configuration.....	3
1.2.2 Body Worn Configuration	3
1.2.3 Maximum Drift	4
1.2.4 Measurement Uncertainty	4
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	5
2.1 PICTURE OF THE DEVICE.....	5
2.2 DESCRIPTION OF THE ANTENNA	6
3. TEST CONDITIONS	6
3.1 TEMPERATURE AND HUMIDITY	6
3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER.....	6
4. DESCRIPTION OF THE TEST EQUIPMENT	6
4.1 MEASUREMENT SYSTEM AND COMPONENTS	6
4.1.1 Isotropic E-field Probe 1786 and 1807	7
4.2 PHANTOMS	8
4.3 TISSUE SIMULANTS	8
4.3.1 Tissue Simulant Recipes	9
4.3.2 System Checking	9
4.3.3 Tissue Simulants used in the Measurements.....	11
5. DESCRIPTION OF THE TEST PROCEDURE	12
5.1 DEVICE HOLDER.....	12
5.2 TEST POSITIONS.....	12
5.2.1 Against Phantom Head.....	12
5.2.2 Body Worn Configuration	13
5.3 SCAN PROCEDURES.....	13
5.4 SAR AVERAGING METHODS.....	14
6. MEASUREMENT UNCERTAINTY	15
7. RESULTS	16
APPENDIX A: SYSTEM CHECKING SCANS.....	19
APPENDIX B: MEASUREMENT SCANS.....	20
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	21
APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)	22

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2005-05-17 to 2005-05-27
SN, HW and SW numbers of tested device	IMEI:004400/63/179554/7 HW:3830 SW:3.03 DUT#28738 (V9) IMEI:004400/63/179761/8 HW:3830 SW:3.03 DUT#28739 (V10)
Batteries used in testing	BL-4C DUT#28758, 28759, 28760, 28761, 28762, 28763
Headsets used in testing	HS-6, DUT#28767
Other accessories used in testing	
State of sample	Prototype unit
Notes	

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Sample	Mode	Ch / f (MHz)	Radiated power	Position	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
V10	GSM850	251 / 848.8	30.4 dBm ERP	Left, Cheek	1.6 W/kg	0.66 W/kg	PASSED
V9	GPRS1900	810 / 1909.8	29.2 dBm EIRP	Right, Cheek	1.6 W/kg	0.97 W/kg	PASSED

1.2.2 Body Worn Configuration

Sample	Mode	Ch / f (MHz)	Radiated power	Separation distance	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
V10	GPRS850	251 / 848.8	27.9 dBm ERP	2.2 cm	1.6 W/kg	0.91 W/kg	PASSED
V10	GPRS1900	810 / 1909.8	29.6 dBm EIRP	2.2 cm	1.6 W/kg	0.74 W/kg	PASSED

1.2.3 Maximum Drift

Maximum drift during measurements	0.27 dB
-----------------------------------	---------

1.2.4 Measurement Uncertainty

Extended Uncertainty (k=2) 95%	$\pm 29.8 \%$
--------------------------------	---------------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

Modes and Bands of Operation	GSM	GPRS	EGPRS
	850 / 1900	850 / 1900	850 / 1900
Modulation Mode	GMSK	GMSK	8PSK
Duty Cycle	1/8	1/8 or 2/8	1/8 or 2/8
Transmitter Frequency Range (MHz)	824 – 849 1850 - 1910	824 – 849 1850 - 1910	824 – 849 1850 - 1910

Outside of USA and Canada, the transmitter of the device is capable of operating also in GSM1800, which is not part of this filing.

The device V9 has Push to Talk/Voice-over-IP capability for use at the ear. Therefore, SAR for 2-slot GPRS mode was evaluated against the head profile of the phantom.

The device V10 does not have Push to Talk/Voice-over-IP capability for use at the ear. Therefore, SAR for 2-slot GPRS mode was not evaluated against the head profile of the phantom for this device.

2.1 Picture of the Device



2.2 Description of the Antenna

The device has an external Helix antenna.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	20.5 to 22.5
Ambient humidity (RH %):	35 to 55

3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The radiated output power of the device was measured by a separate test laboratory on the same unit as used for SAR testing.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY4 software version 4.4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements on the device was the 'worst-case extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE3	501	12 months	2006-01
DAE3	573	12 months	2005-09
E-field Probe ET3DV6	1786	12 months	2006-01
E-field Probe ET3DV6	1807	12 months	2006-01
Dipole Validation Kit, D835V2	476	24 months	2007-01
Dipole Validation Kit, D1900V2	5d026	24 months	2007-01

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SMIQ03B	826046/034	36 months	2007-02
Amplifier	ZHL-42W	E012903	-	-
Power Meter	NRVD	840297/008	24 months	2005-11
Power Sensor	NRV-Z51	100184	24 months	2005-11
Call Tester	4400M	0411216	-	-
Call Tester	4400M	0211008	-	-
Vector Network Analyzer	AT8753ES	MY40001091	12 months	2005-08
Dielectric Probe Kit	HP85070B	US33020403	-	-

4.1.1 Isotropic E-field Probe 1786 and 1807

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)

Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: $\pm$ 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm
Application	Distance from probe tip to dipole centers: 2.7 mm General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both system checking and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within $\pm$ 5% of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.

4.3.1 Tissue Simulant Recipes

The following recipes were used for Head and Body tissue simulants:

800MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	39.74	55.97
HEC	0.25	1.21
Sugar	58.31	41.76
Preservative	0.15	0.27
Salt	1.55	0.79

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

4.3.2 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

System checking, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.27	42.0	0.91	
	$\pm 10\%$ window	2.04 – 2.50			
	2005-05-17	2.42	40.8	0.89	21.9
	2005-05-18	2.33	40.7	0.89	21.9
	2005-05-27	2.38	41.1	0.90	21.6
1900	Reference result	9.49	39.5	1.46	
	$\pm 10\%$ window	8.54 – 10.44			
	2005-05-24	10.2	39.5	1.45	21.3
	2005-05-26	10.3	39.4	1.46	21.2

System checking, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.47	54.9	1.01	
	$\pm 10\%$ window	2.22 – 2.72			
	2005-05-24	2.42	54.8	0.98	21.5
	2005-05-26	2.42	54.5	0.96	21.5
1900	Reference result	9.65	52.2	1.57	
	$\pm 10\%$ window	8.69 – 10.62			
	2005-05-23	10.4	50.6	1.60	21.3
	2005-05-26	10.2	52.6	1.60	21.5

Plots of the system checking scans are given in Appendix A.

4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836	Recommended value	41.5	0.90	
	$\pm 5\%$ window	39.4 – 43.6	0.86 – 0.95	
	2005-05-17	40.9	0.89	21.9
	2005-05-18	40.7	0.89	21.9
	2005-05-27	41.1	0.90	21.6
1880	Recommended value	40.0	1.40	
	$\pm 5\%$ window	38.0 – 42.0	1.33 – 1.47	
	2005-05-24	39.6	1.42	21.3
	2005-05-26	39.5	1.43	21.2

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836	Recommended value	55.2	0.97	
	$\pm 5\%$ window	52.4 – 58.0	0.92 – 1.02	
	2005-05-24	54.8	0.98	21.5
	2005-05-26	54.5	0.96	21.5
1880	Recommended value	53.3	1.52	
	$\pm 5\%$ window	50.6 – 56.0	1.44 – 1.60	
	2005-05-23	50.7	1.58	21.3
	2005-05-26	52.7	1.58	21.5

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

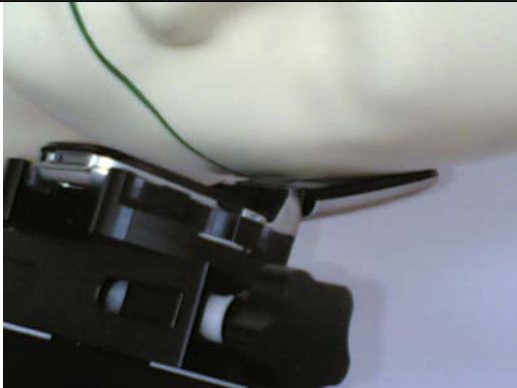


Photo of the device in "cheek" position



Photo of the device in "tilt" position

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its antenna facing the phantom since this orientation gives higher results.



Photo of the device positioned for Body SAR measurement.
The spacer was removed for the tests.

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	G_i	$G_i \cdot U_i$ (%)	V_i
Measurement System							
Probe Calibration	E2.1	±5.8	N	1	1	±5.8	∞
Axial Isotropy	E2.2	±4.7	R	√3	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	√3	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±8.3	R	√3	1	±4.8	∞
Linearity	E2.4	±4.7	R	√3	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6	∞
Readout Electronics	E2.6	±1.0	N	1	1	±1.0	∞
Response Time	E2.7	±0.8	R	√3	1	±0.5	∞
Integration Time	E2.8	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	√3	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.4	R	√3	1	±0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	±2.9	R	√3	1	±1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5.2	±3.9	R	√3	1	±2.3	∞
Test sample Related							
Test Sample Positioning	E4.2.1	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1.1	±5.0	N	1	1	±5.0	7
Output Power Variation - SAR drift measurement	6.6.3	±10.0	R	√3	1	±5.8	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±4.0	R	√3	1	±2.3	∞
Conductivity Target - tolerance	E3.2	±5.0	R	√3	0.64	±1.8	∞
Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.64	±3.5	5
Permittivity Target - tolerance	E3.2	±5.0	R	√3	0.6	±1.7	∞
Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
Combined Standard Uncertainty			RSS			±14.9	206
Coverage Factor for 95%			k=2				
Expanded Standard Uncertainty						±29.8	

7. RESULTS

The measured Head SAR values for the test device are tabulated below:

850 MHz Head SAR results

Hardware ID	Mode	Test configuration		SAR, averaged over 1g (W/kg)		
				Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
HWID 3830 (V9)	GSM	Power		27.6 dBm	29.0 dBm	28.9 dBm
		Left	Cheek	0.47	0.58	0.62
			Tilt		0.17	
		Right	Cheek		0.53	
			Tilt		0.18	
	2-Slot GPRS	Power		27.9 dBm	24.9 dBm	26.3 dBm
		Left	Cheek	0.39	0.49	0.55
HWID 3830 (V10)	GSM	Power		32.0 dBm	31.1 dBm	30.4 dBm
		Left	Cheek	0.46	0.60	0.66
			Tilt		0.16	
		Right	Cheek		0.51	
			Tilt		0.16	
HWID 3830 (V9)	2-slot EGPRS	Power		24.4 dBm	26.8 dBm	26.8 dBm
		Highest SAR value measurement in this band repeated in EDGE mode				0.38

1900 MHz Head SAR results

Hardware ID	Mode	Test configuration		SAR, averaged over 1g (W/kg)		
				Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
HWID 3830 (V9)	2-Slot GPRS	Power		28.1 dBm	28.9 dBm	29.2 dBm
		Left	Cheek		0.60	
			Tilt		0.12	
		Right	Cheek	0.84	0.84	0.97
			Tilt		0.17	
	GSM	Power		30.1 dBm	30.0 dBm	29.3 dBm
		Right	Cheek	0.50	0.51	0.55
HWID 3830 (V10)	GSM	Power		27.2 dBm	30.5 dBm	28.2 dBm
		Left	Cheek		0.39	
			Tilt		0.079	
		Right	Cheek	0.64	0.64	0.69
			Tilt		0.12	
HWID 3830 (V9)	2-slot EGPRS	Power		27.6 dBm	28.3 dBm	28.0 dBm
		Highest SAR value measurement in this band repeated in EDGE mode				0.39

The measured Body SAR values for the test device are tabulated below

850 MHz Body SAR results

Hardware ID	Mode	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
HWID 3830 (V9)	GSM	Power	23.6 dBm	25.7 dBm	26.8 dBm
		Without headset	0.32	0.43	0.49
		Headset HS-6	0.23	0.31	0.36
	2-Slot GPRS	Power	23.7 dBm	25.7 dBm	26.8 dBm
		Without headset	0.28	0.35	0.40
HWID 3830 (V10)	2-Slot GPRS	Power	29.8 dBm	29.8 dBm	27.9 dBm
		Without headset	0.53	0.80	0.91
		Headset HS-6	0.38	0.45	0.56
	GSM	Power	29.1 dBm	29.7 dBm	28.2 dBm
		Without headset	0.31	0.42	0.49

1900 MHz Body SAR results

Hardware ID	Mode	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
HWID 3830 (V9)	2-Slot GPRS	Power	30.1 dBm	29.9 dBm	29.7 dBm
		Without headset	0.55	0.57	0.64
		Headset HS-6	0.51	0.56	0.61
	GSM	Power	31.1 dBm	31.1 dBm	32.0 dBm
		Without headset	0.37	0.39	0.41
HWID 3830 (V10)	2-Slot GPRS	Power	27.8 dBm	29.5 dBm	29.6 dBm
		Without headset	0.67	0.72	0.73
		Headset HS-6	0.67	0.67	0.74
	GSM	Power	28.2 dBm	29.1 dBm	29.2 dBm
		Headset HS-6	0.32	0.36	0.37

Plots of the Measurement scans are given in Appendix B.

APPENDIX A: SYSTEM CHECKING SCANS

See the following pages.

Date/Time: 05/17/05 10:29:15

Test Laboratory: TCC Copenhagen

Type: D835V2; DUT: Dipole 835 MHz; Serial: 476

Communication System: Continuous Wave; Communication System Notes: -

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.9$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.893$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes:
- ConvF(6.56, 6.56, 6.56); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=15mm, Pin=250mW 2/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.64 mW/g


d=15mm, Pin=250mW 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.3 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 3.6 W/kg

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.57 mW/g

Maximum value of SAR (measured) = 2.6 mW/g

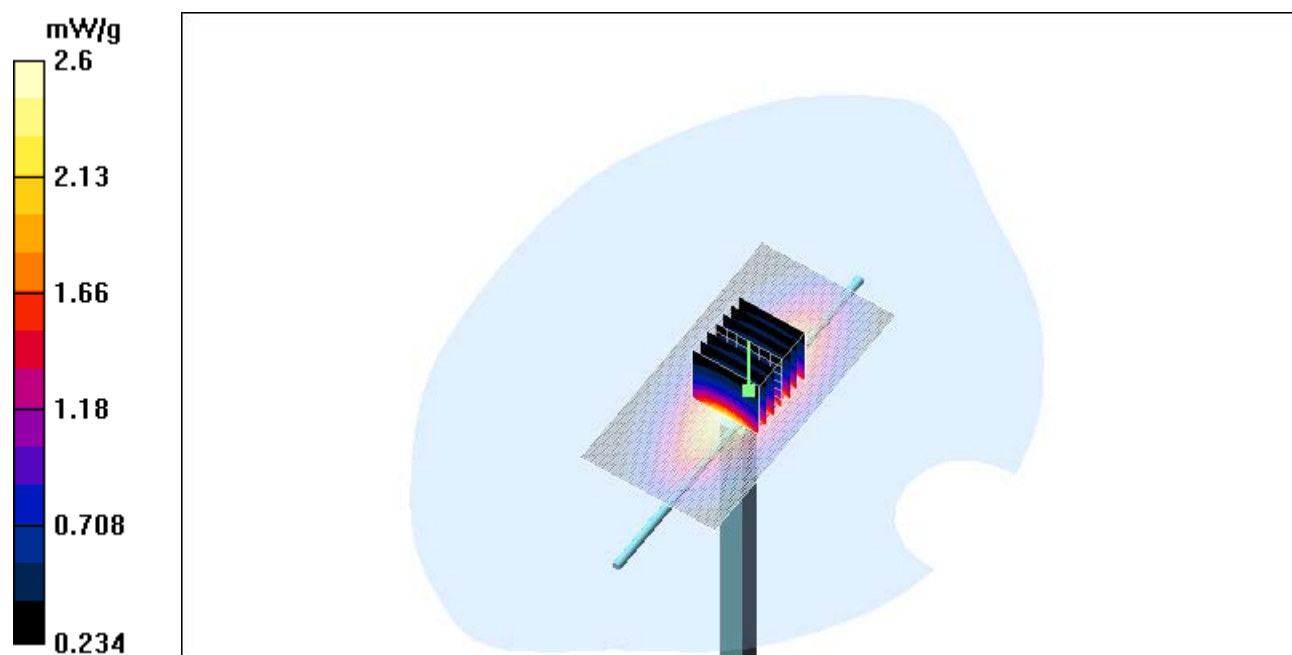

Date/Time: 05/18/05 10:01:33

Test Laboratory: TCC Copenhagen

Type: D835V2; DUT: Dipole 835 MHz; Serial: 476

Communication System: Continuous Wave; Communication System Notes: -

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.9$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.893$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes:
- ConvF(6.56, 6.56, 6.56); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.5 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.1 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 2.33 mW/g; SAR(10 g) = 1.52 mW/g

Maximum value of SAR (measured) = 2.52 mW/g

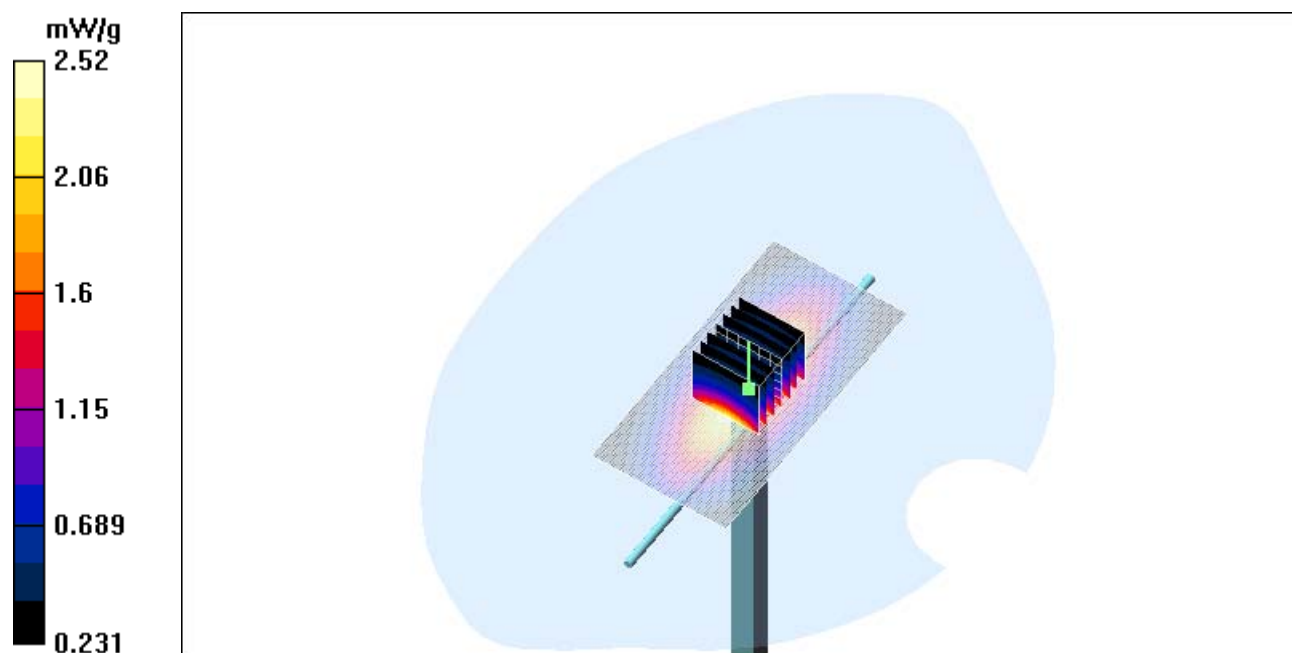

Date/Time: 05/27/05 11:42:26

Test Laboratory: TCC Copenhagen

Type: D835V2; DUT: Dipole 835 MHz; Serial: 476

Communication System: Continuous Wave; Communication System Notes: -

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 850; Medium Notes: Medium Temperature: $t = 21.6$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes:
- ConvF(6.56, 6.56, 6.56); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.59 mW/g



d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.3 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.54 mW/g

Maximum value of SAR (measured) = 2.58 mW/g

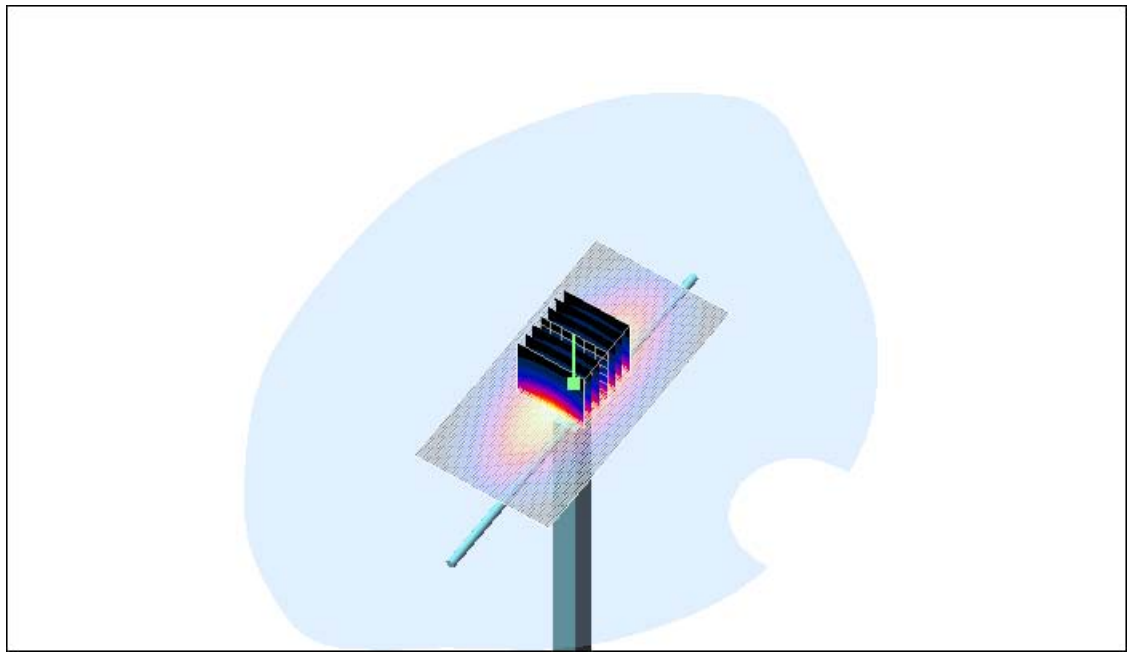

Date/Time: 05/24/05 21:58:08

Test Laboratory: TCC Copenhagen

Type: D1900V2; DUT: Dipole 1900 MHz; Serial: D1900V2 - SN:5d026

Communication System: Continuous Wave; Communication System Notes: -

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes:
- ConvF(5.04, 5.04, 5.04); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 24.01.2005
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.8 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.34 mW/g

Maximum value of SAR (measured) = 11.7 mW/g

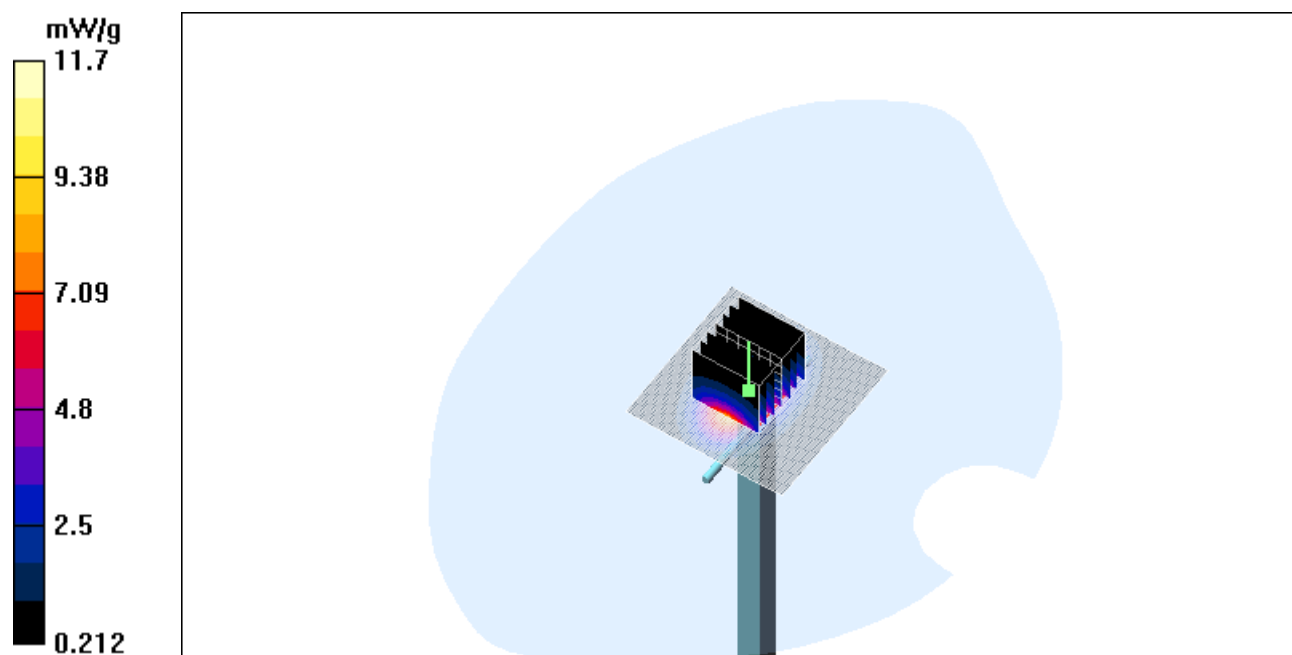

Date/Time: 05/26/05 18:30:05

Test Laboratory: TCC Copenhagen

Type: D1900V2; DUT: Dipole 1900 MHz; Serial: D1900V2 - SN:5d026

Communication System: Continuous Wave; Communication System Notes: -

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.2$ C

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Advanced Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 24.01.2005
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.9 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.6 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 18 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.36 mW/g

Maximum value of SAR (measured) = 11.8 mW/g

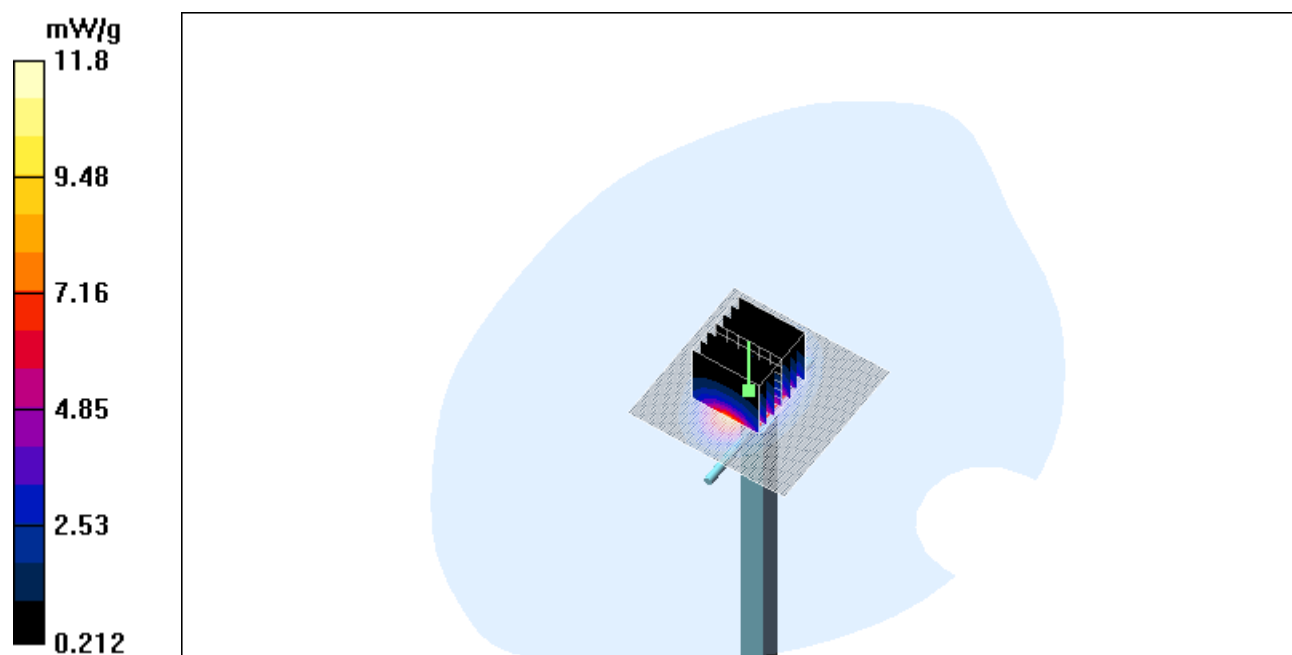

Date/Time: 05/24/05 14:35:27

Test Laboratory: TCC Copenhagen

Type: D835V2; DUT: Dipole 835 MHz; Serial: 476

Communication System: Continuous Wave; Communication System Notes: -

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 850; Medium Notes: Medium Temperature: $t = 21.5$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.976$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes:
- ConvF(6.38, 6.38, 6.38); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.61 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.1 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.59 mW/g

Maximum value of SAR (measured) = 2.61 mW/g

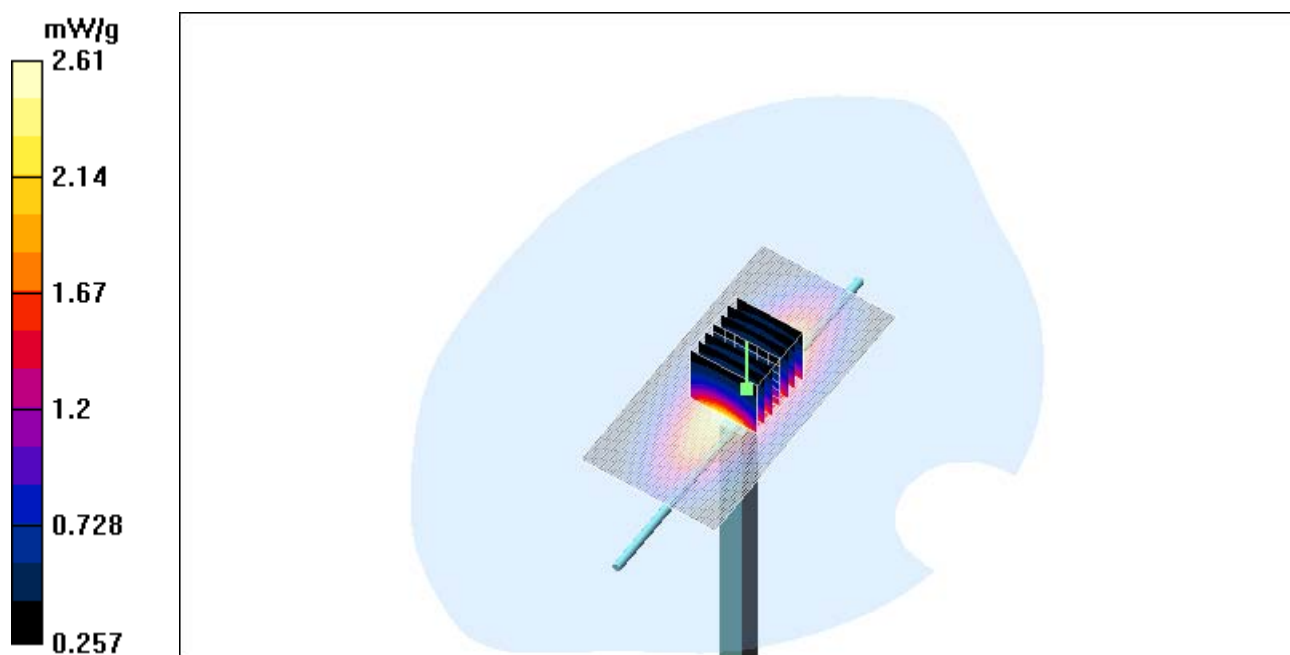

Date/Time: 05/26/05 15:44:34

Test Laboratory: TCC Copenhagen

Type: D835V2; DUT: Dipole 835 MHz; Serial: 476

Communication System: Continuous Wave; Communication System Notes: -

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 850; Medium Notes: Medium Temperature: $t = 21.5$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.964$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes:
- ConvF(6.38, 6.38, 6.38); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.63 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.3 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.6 mW/g

Maximum value of SAR (measured) = 2.62 mW/g

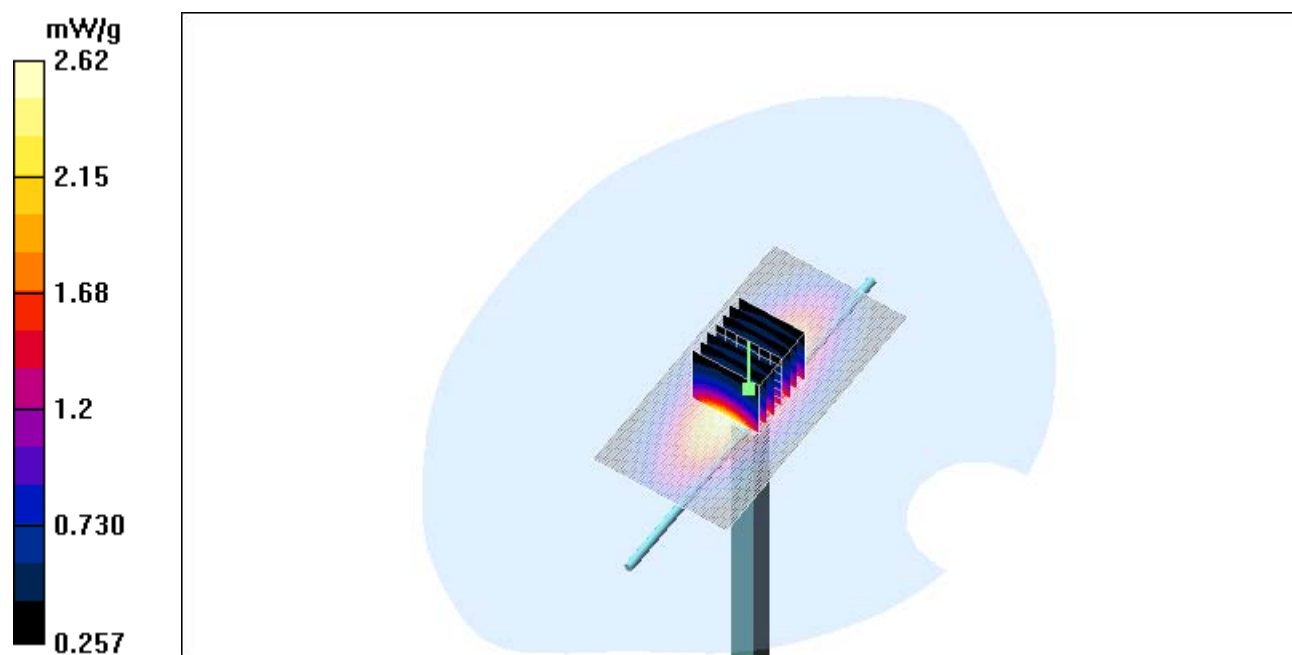

Date/Time: 05/23/05 10:47:21

Test Laboratory: TCC Copenhagen

Type: D1900V2; DUT: Dipole 1900 MHz; Serial: D1900V2 - SN:5d026

Communication System: Continuous Wave; Communication System Notes: -

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Body 1900; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.6$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes:
- ConvF(4.52, 4.52, 4.52); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm,
dy=10mm

Maximum value of SAR (interpolated) = 12.1 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.5 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.42 mW/g

Maximum value of SAR (measured) = 12 mW/g

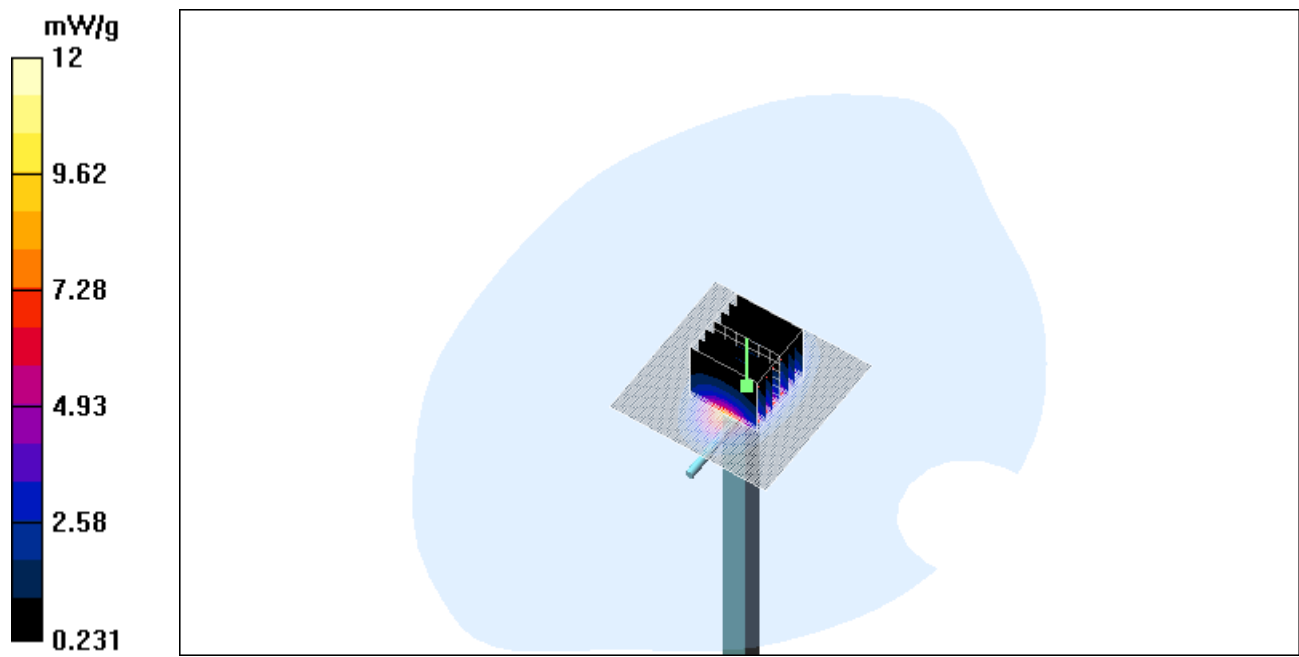

Date/Time: 05/26/05 23:58:19

Test Laboratory: TCC Copenhagen

Type: D1900V2; DUT: Dipole 1900 MHz; Serial: D1900V2 - SN:5d026

Communication System: Continuous Wave; Communication System Notes: -

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Body 1900; Medium Notes: Medium Temperature: $t=21.5$ C

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.6$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes:
- ConvF(4.52, 4.52, 4.52); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm,
dy=10mm

Maximum value of SAR (interpolated) = 11.9 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.9 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.39 mW/g

Maximum value of SAR (measured) = 11.7 mW/g

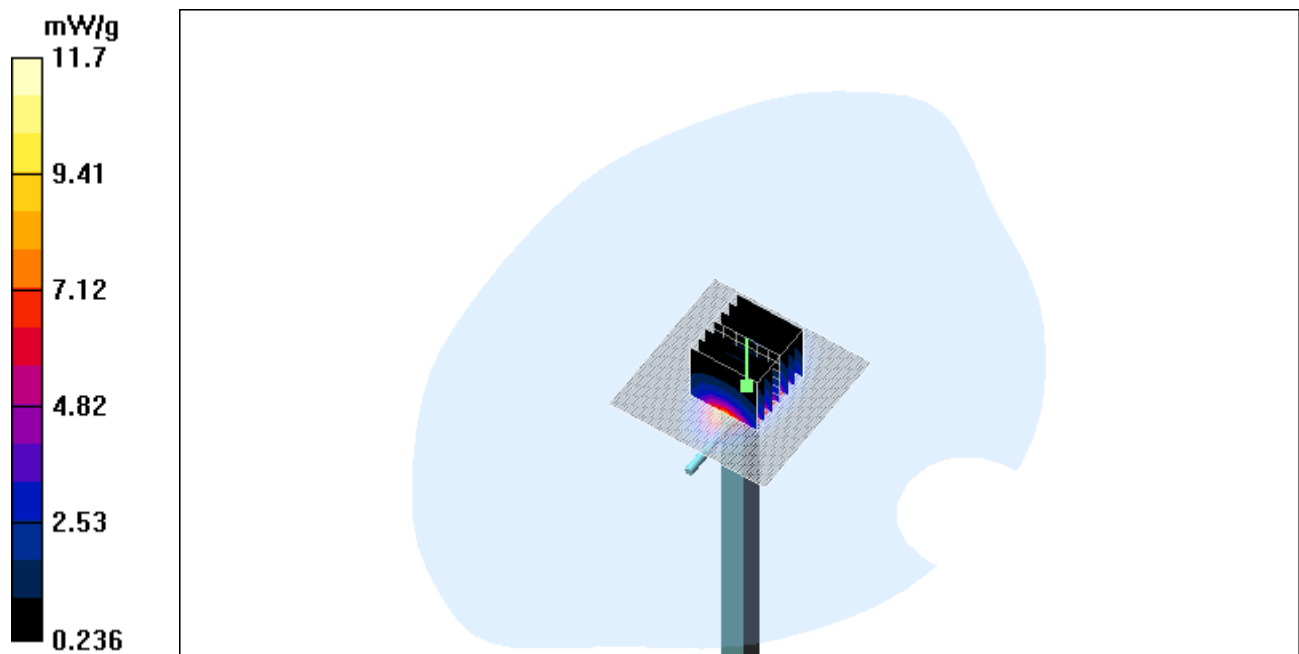

APPENDIX B: MEASUREMENT SCANS

See the following pages.

Date/Time: 05/17/05 15:06:39

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28739 (V10); Serial: 004400/63/179761/8

Communication System: GSM 850; Communication System Notes: -

Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.9$ C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes: Worst Case Extrapolation.
- ConvF(6.56, 6.56, 6.56); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - High/Area Scan (51x121x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.696 mW/g

Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm



Reference Value = 4.5 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.655 mW/g; SAR(10 g) = 0.447 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.681 mW/g

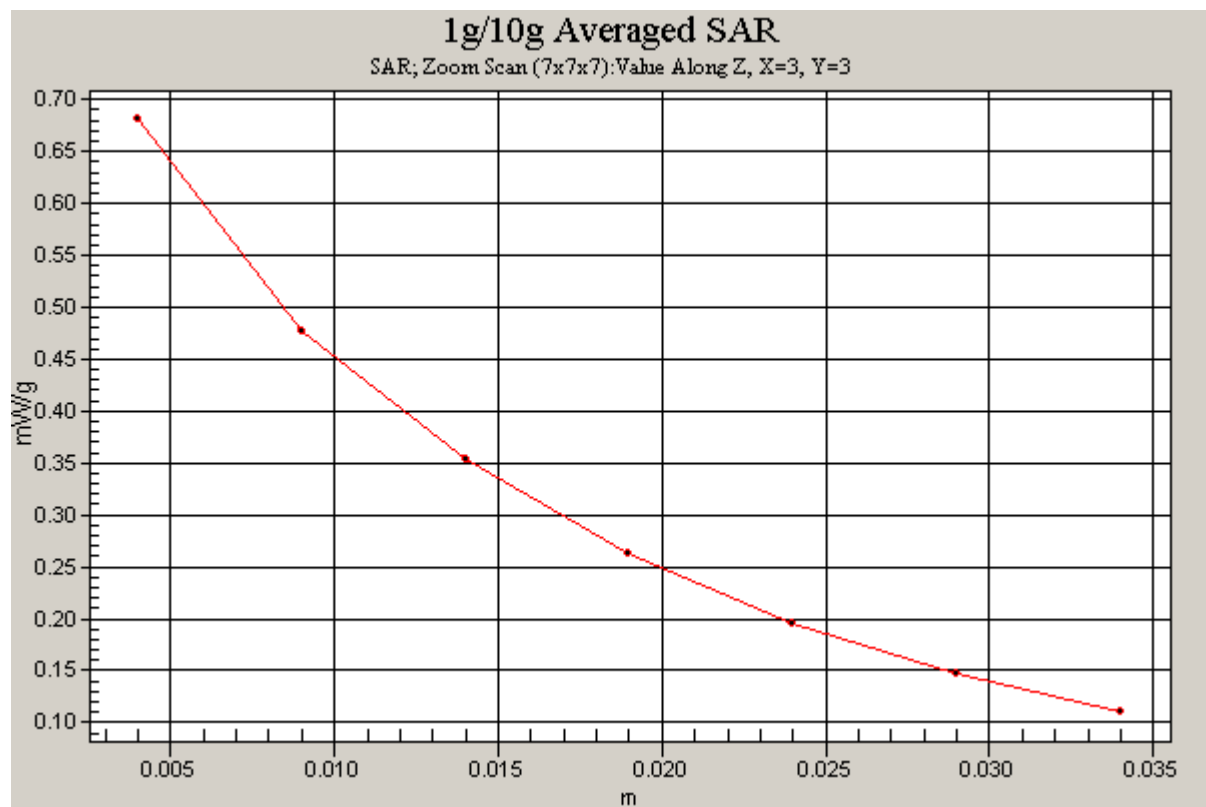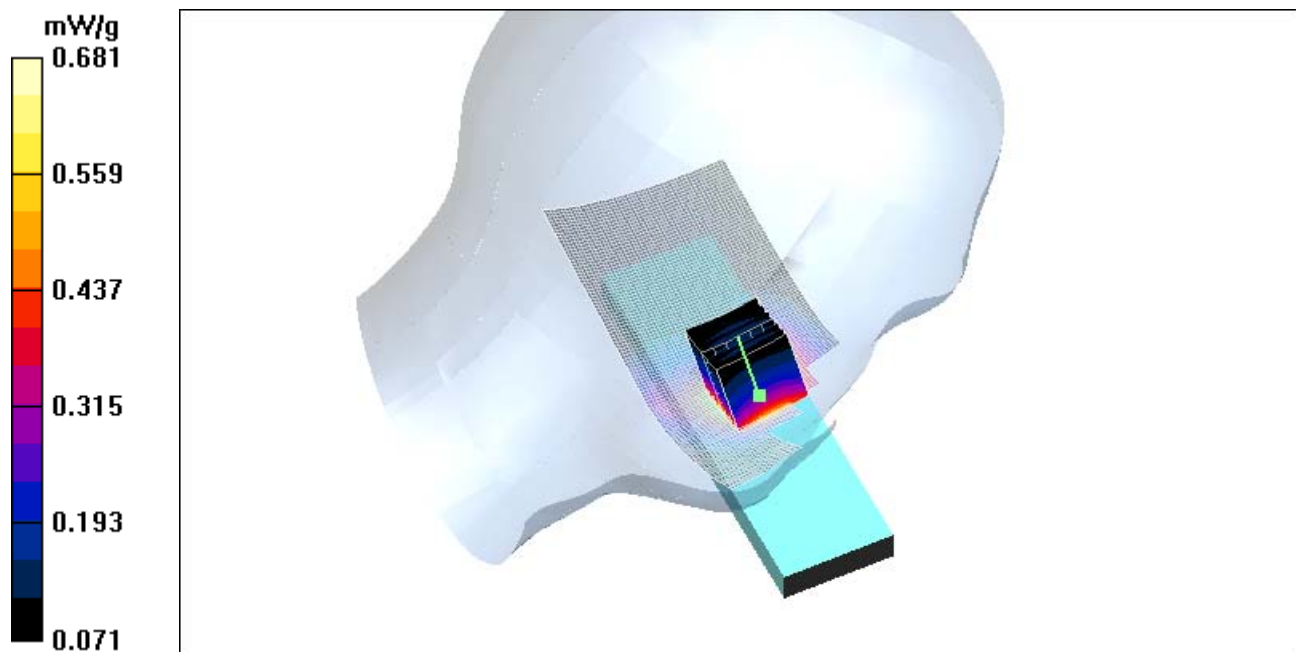

Date/Time: 05/18/05 10:03:08

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28739 (V10); Serial: 004400/63/179761/8

Communication System: GSM 850; Communication System Notes: -

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.9$ C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes: Worst Case Extrapolation.
- ConvF(6.56, 6.56, 6.56); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Tilt position - Middle/Area Scan (51x121x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.162 mW/g

Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

$dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 9.27 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.116 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.161 mW/g

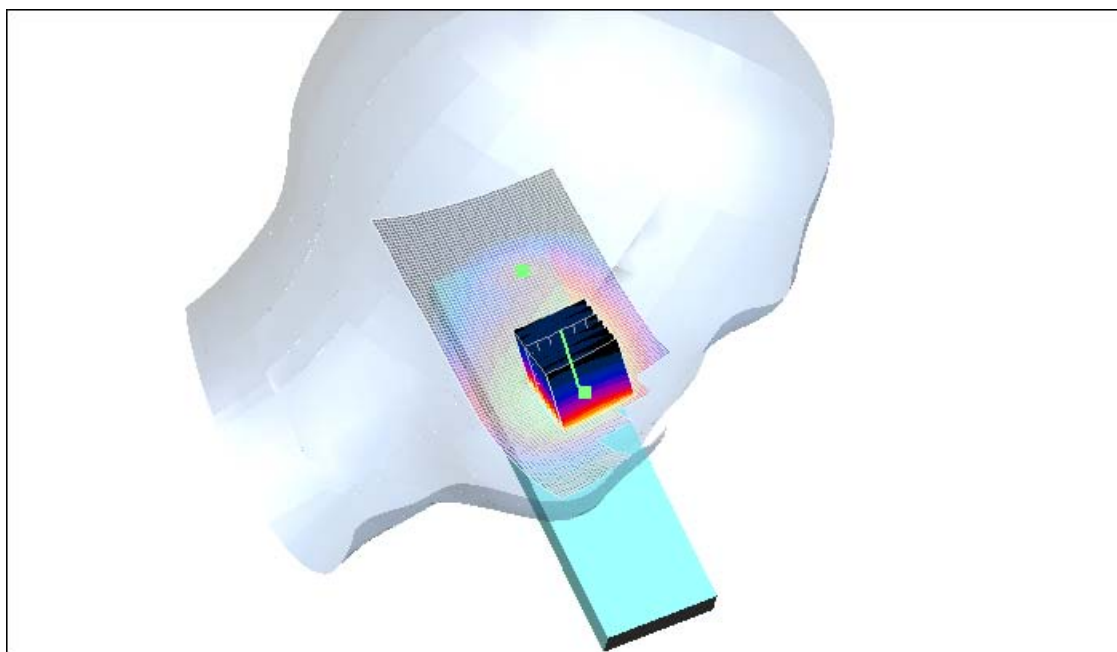

Date/Time: 05/18/05 15:10:29

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28739 (V10); Serial: 004400/63/179761/8

Communication System: GSM 850; Communication System Notes: -

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.9$ C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 40.7$; $\rho =$

1000 kg/m^3

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes: Worst Case Extrapolation.
- ConvF(6.56, 6.56, 6.56); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - Middle/Area Scan (51x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.547 mW/g

Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 2.93 V/m ; Power Drift = 0.2 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.514 mW/g ; SAR(10 g) = 0.354 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.546 mW/g

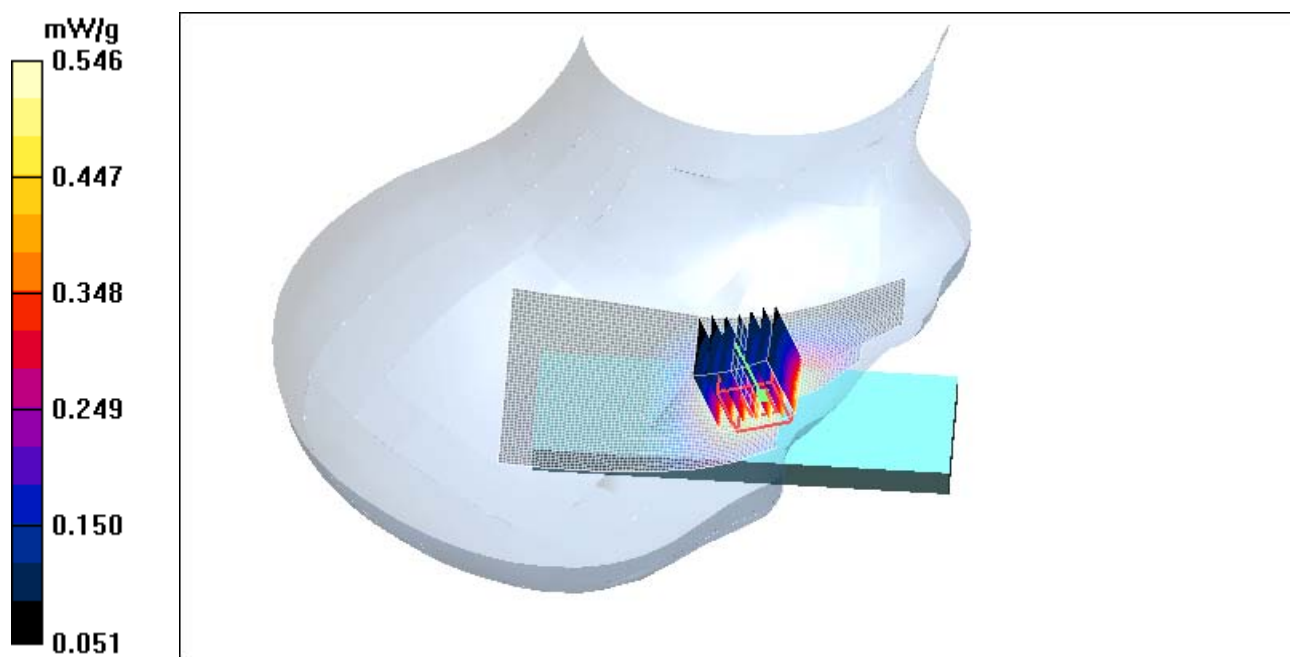

Date/Time: 05/18/05 15:10:29

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28739 (V10); Serial: 004400/63/179761/8

Communication System: GSM 850; Communication System Notes: -

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.9$ C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes: Worst Case Extrapolation.
- ConvF(6.56, 6.56, 6.56); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Tilt position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.167 mW/g

Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

$dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 8.92 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.161 mW/g; SAR(10 g) = 0.120 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.168 mW/g

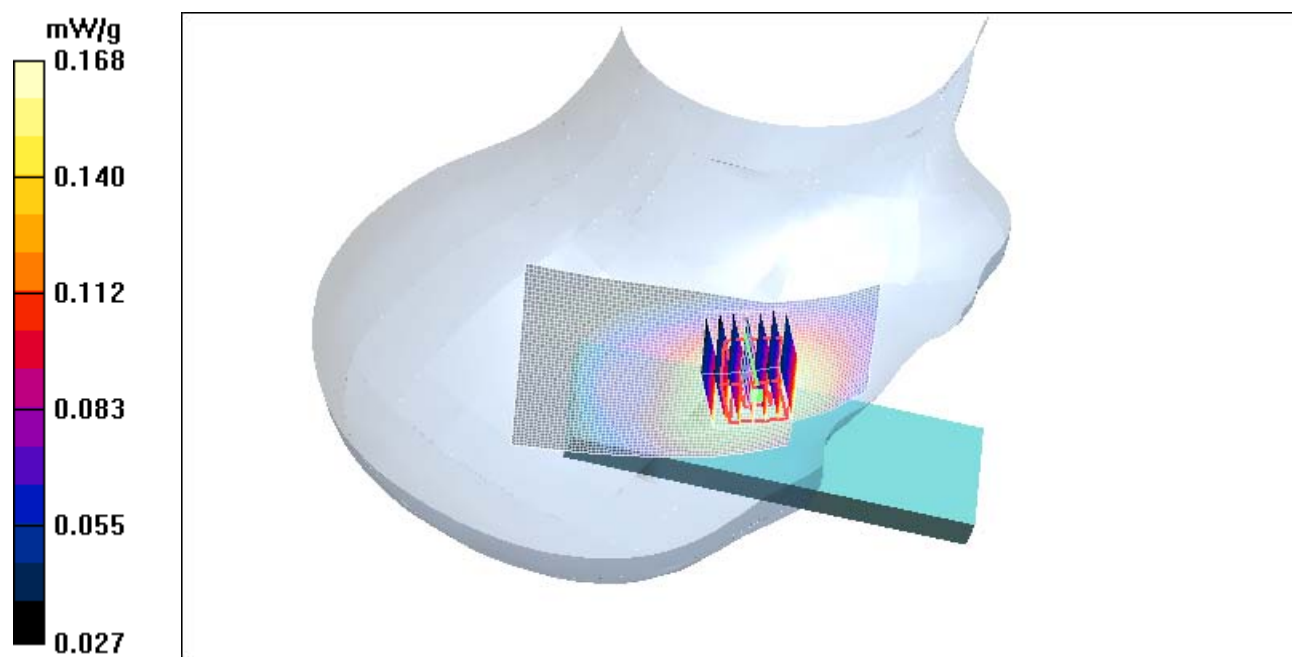

Date/Time: 05/17/05 15:03:06

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28738 (V9); Serial: 004400/63/179554/7

Communication System: 850 - GPRS - Dual slot; Communication System Notes: -

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.9$ C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes: Worst Case Extrapolation.
- ConvF(6.56, 6.56, 6.56); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - High/Area Scan (51x121x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.590 mW/g

Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 3.17 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.820 W/kg

SAR(1 g) = 0.545 mW/g; SAR(10 g) = 0.370 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.566 mW/g

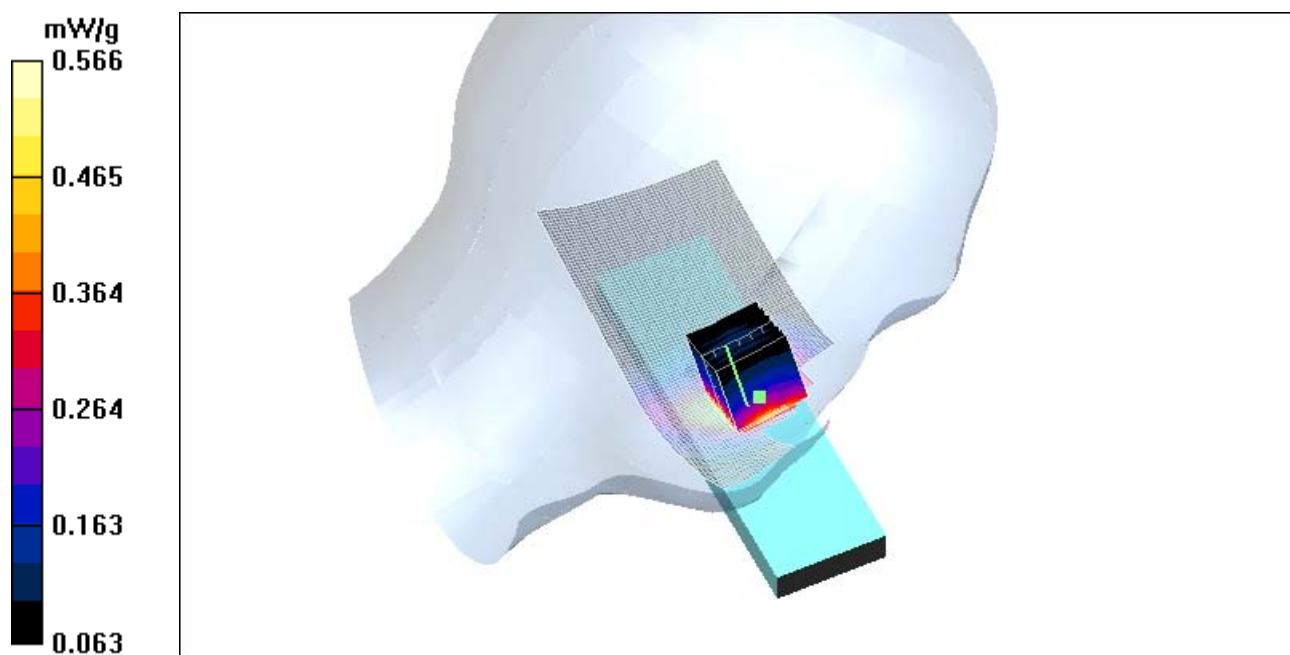

Date/Time: 05/27/05 11:52:25

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28738 (V9); Serial: 004400/63/179554/7

Communication System: 850 - EDGE - Dual Slot; Communication System Notes: -

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: $t=21.6$ C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes: Worst Case Extrapolation.
- ConvF(6.56, 6.56, 6.56); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Low band; Type: Twin Phantom; Serial: TP-1037
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - High/Area Scan (51x121x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.410 mW/g

Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 3 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.259 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.397 mW/g

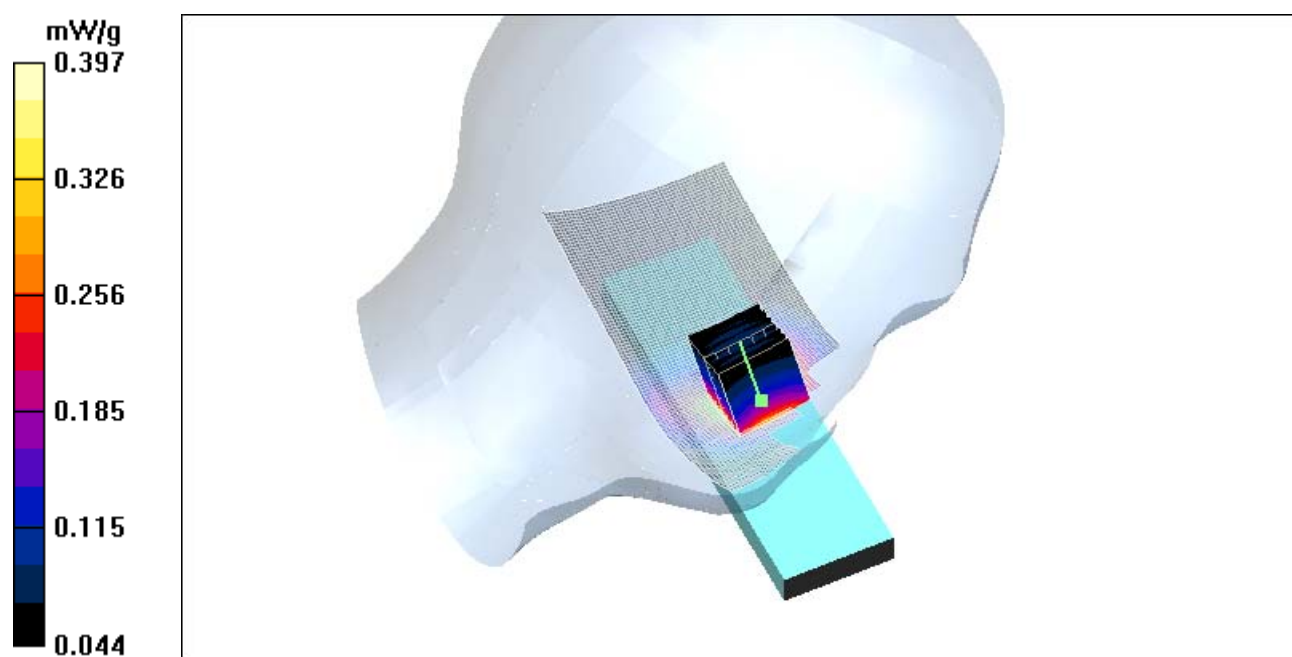

Date/Time: 05/24/05 23:00:30

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28738 (V9); Serial: 004400/63/179554/7

Communication System: GPRS 1900 - Dual Slot; Communication System Notes: -

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 24.01.2005
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - Middle/Area Scan (51x121x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.616 mW/g

Touch position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.81 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.997 W/kg

SAR(1 g) = 0.593 mW/g; SAR(10 g) = 0.368 mW/g

Maximum value of SAR (measured) = 0.609 mW/g

Touch position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 1: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.81 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.602 mW/g; SAR(10 g) = 0.333 mW/g

Maximum value of SAR (measured) = 0.640 mW/g

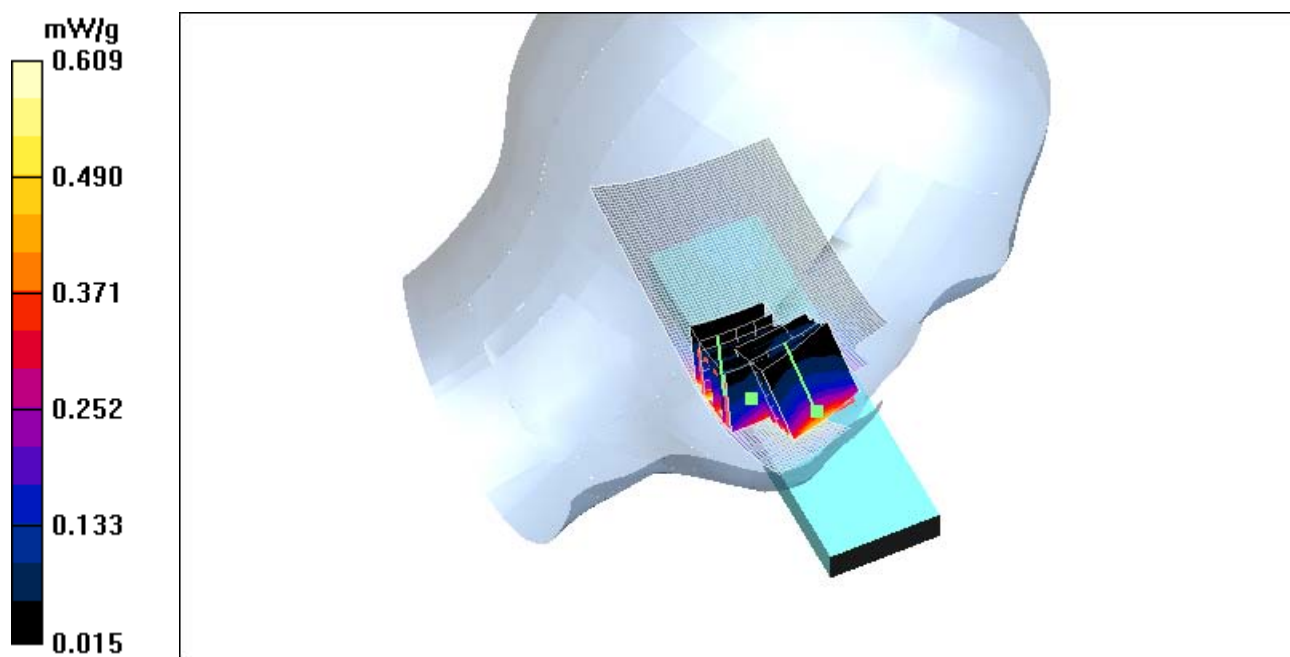

Date/Time: 05/24/05 23:00:30

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28738 (V9); Serial: 004400/63/179554/7

Communication System: GPRS 1900 - Dual Slot; Communication System Notes: -

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 24.01.2005
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Tilt position - Middle/Area Scan (51x121x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.131 mW/g

Tilt position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 8.65 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.131 mW/g

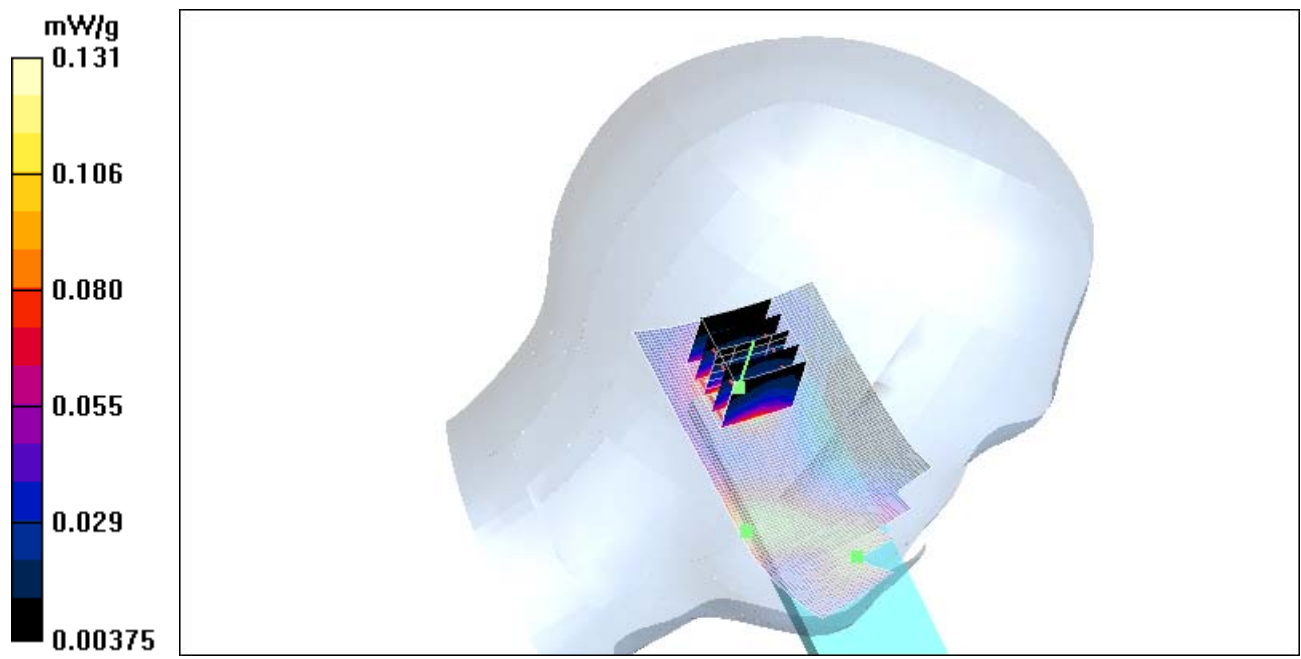

Date/Time: 05/25/05 00:56:45

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28738 (V9); Serial: 004400/63/179554/7

Communication System: GPRS 1900 - Dual Slot; Communication System Notes: -

Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 24.01.2005
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - High/Area Scan (51x121x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 1.02 mW/g

Touch position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm



Reference Value = 8.28 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.974 mW/g; SAR(10 g) = 0.584 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.01 mW/g

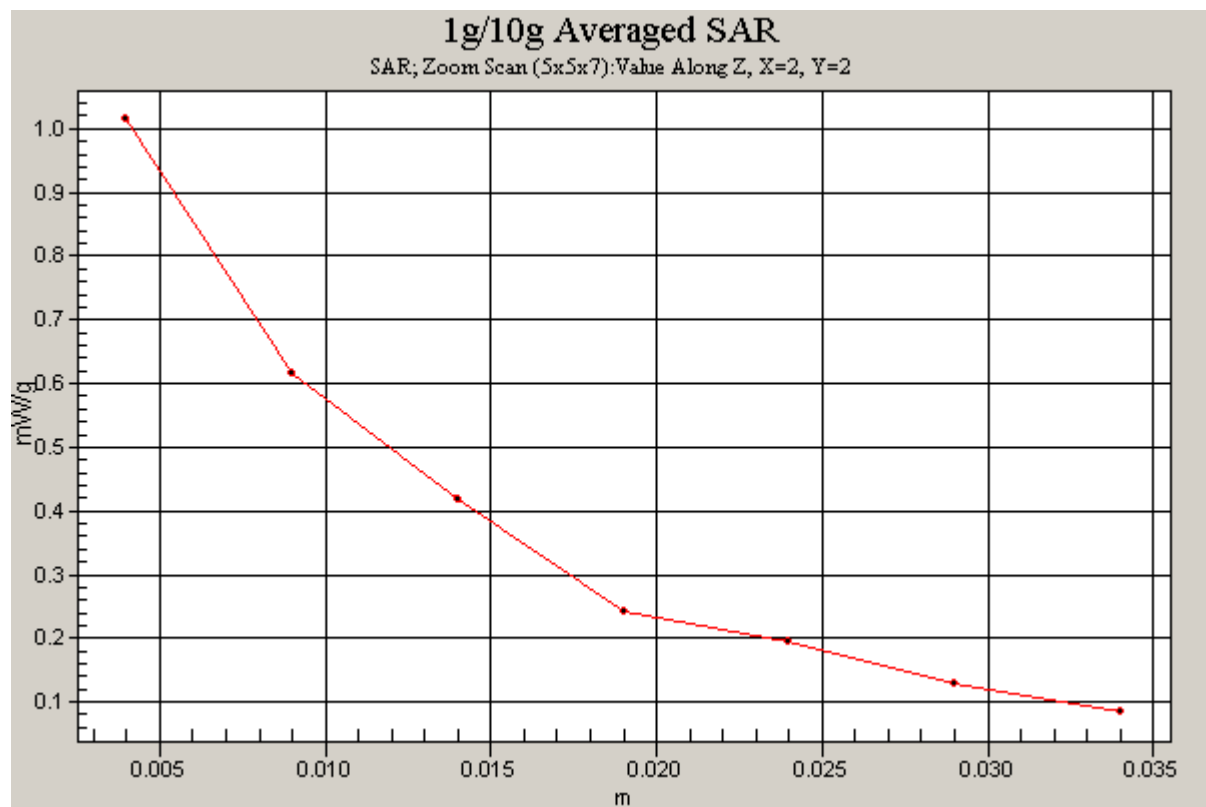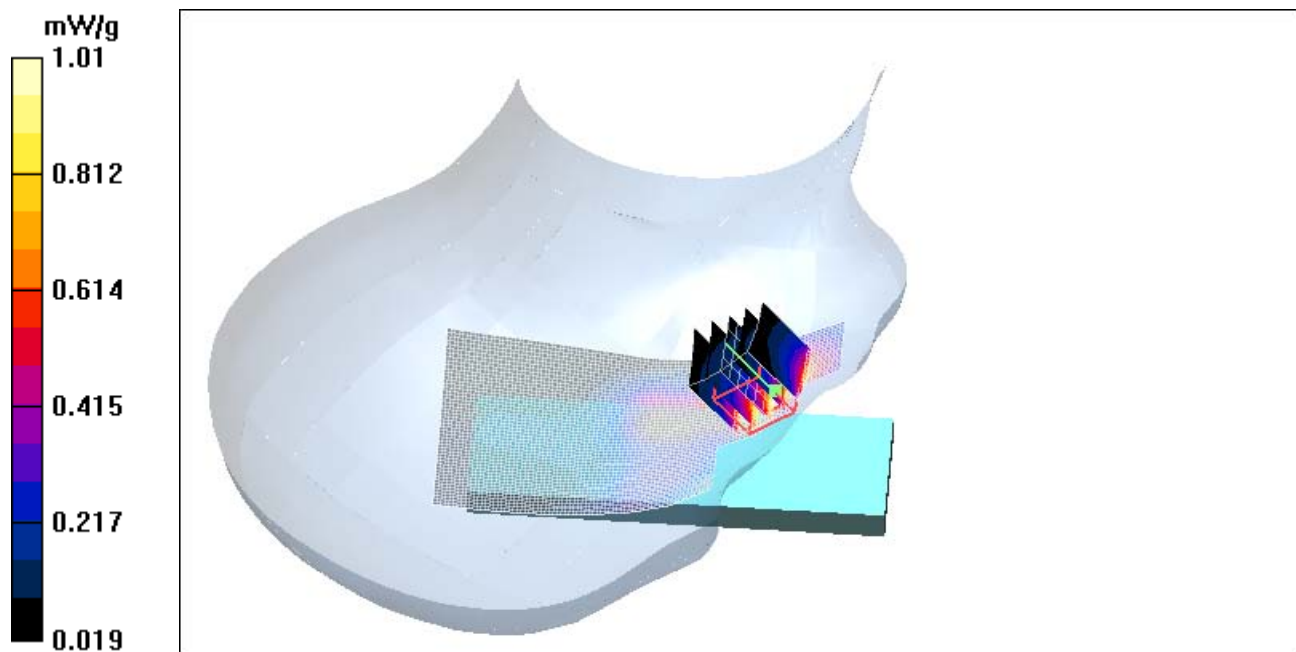

Date/Time: 05/25/05 00:56:45

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28738 (V9); Serial: 004400/63/179554/7

Communication System: GPRS 1900 - Dual Slot; Communication System Notes: -

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.3$ C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 24.01.2005
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Tilt position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.179 mW/g

Tilt position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:


$dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 9.87 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.170 mW/g; SAR(10 g) = 0.093 mW/g

Maximum value of SAR (measured) = 0.181 mW/g

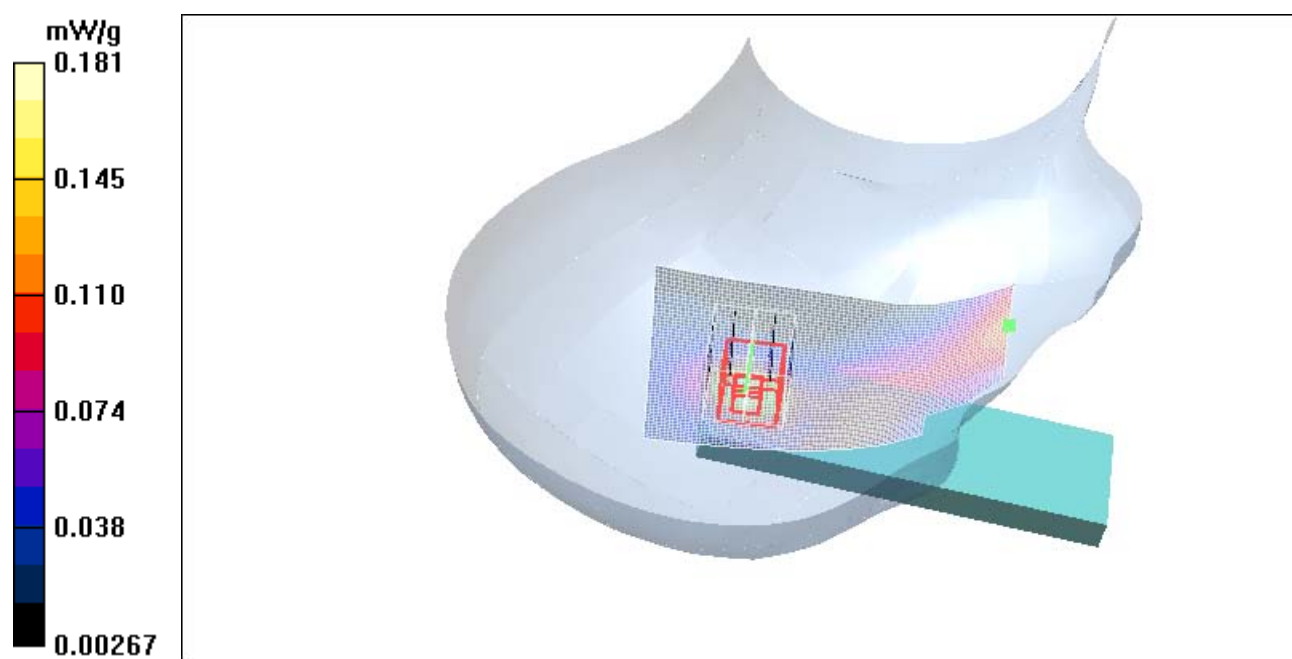

Date/Time: 05/27/05 01:25:05

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28738 (V9); Serial: 004400/63/179554/7

Communication System: GSM 1900; Communication System Notes: -

Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.2$ C

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 24.01.2005
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - High/Area Scan (51x121x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.571 mW/g

Touch position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm


Reference Value = 6.65 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 0.985 W/kg

SAR(1 g) = 0.545 mW/g; SAR(10 g) = 0.331 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.577 mW/g

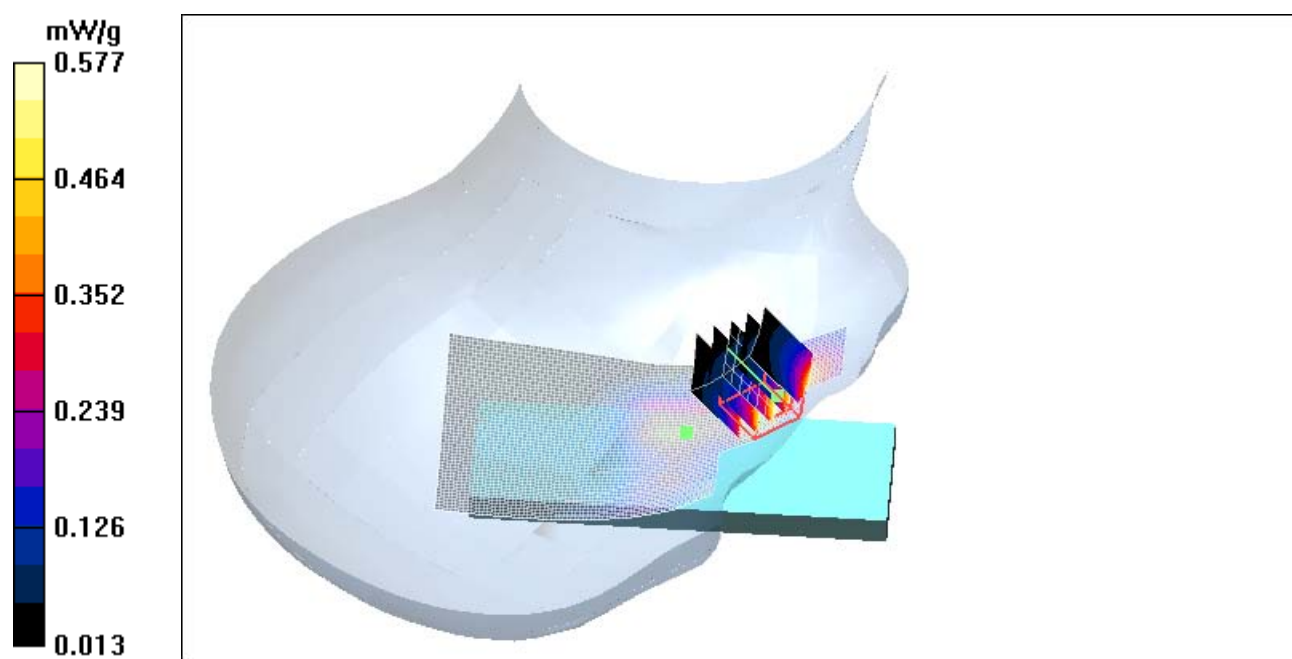

Date/Time: 05/27/05 02:21:30

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28738 (V9); Serial: 004400/63/179554/7

Communication System: 1900 - EDGE - Dual Slot; Communication System Notes: -

Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: $t=21.2$ C

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 24.01.2005
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - High/Area Scan (51x121x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.420 mW/g

Touch position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm


Reference Value = 5.37 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.389 mW/g; SAR(10 g) = 0.235 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.418 mW/g

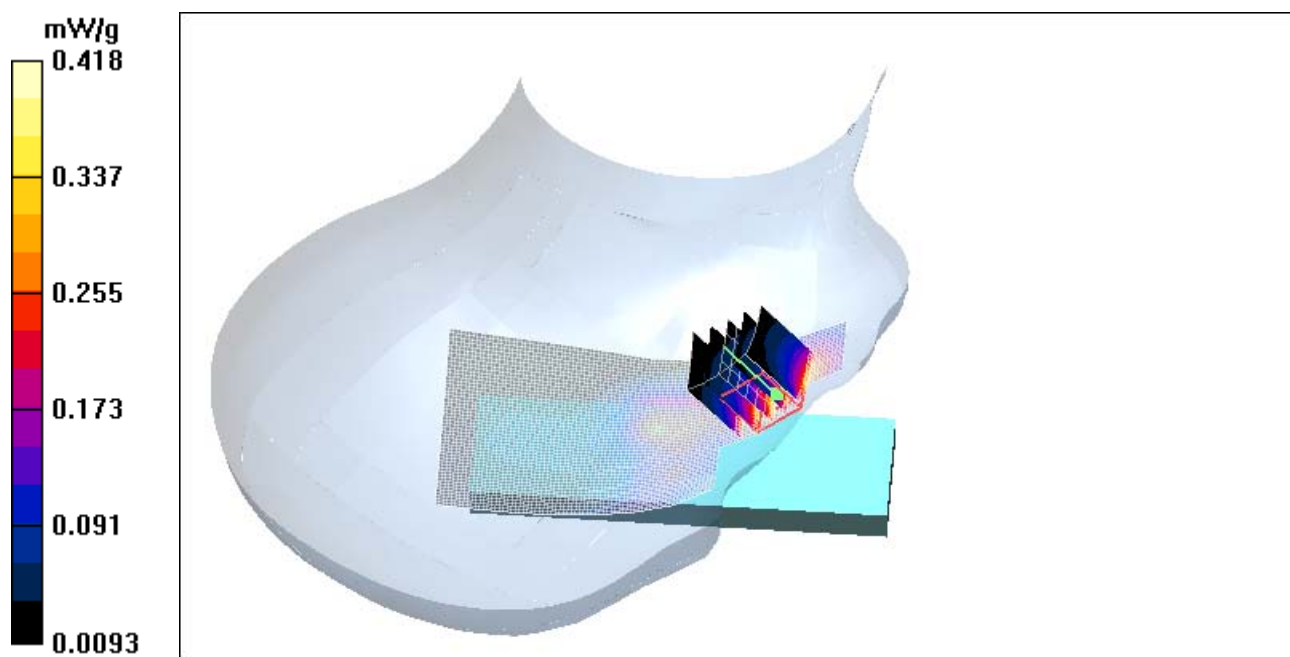

Date/Time: 05/24/05 14:59:36

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28739 (V10); Serial: 004400/63/179761/8

Communication System: 850 - GPRS - Dual slot; Communication System Notes: -

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Body 850; Medium Notes: Medium Temperature: $t = 21.5$ C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.7$; $\rho =$

1000 kg/m^3

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes: Worst Case Extrapolation.
- ConvF(6.38, 6.38, 6.38); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Body - High - No Accessory/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.963 mW/g

Body - High - No Accessory/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$



Reference Value = 29 V/m ; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.905 mW/g ; SAR(10 g) = 0.629 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.960 mW/g

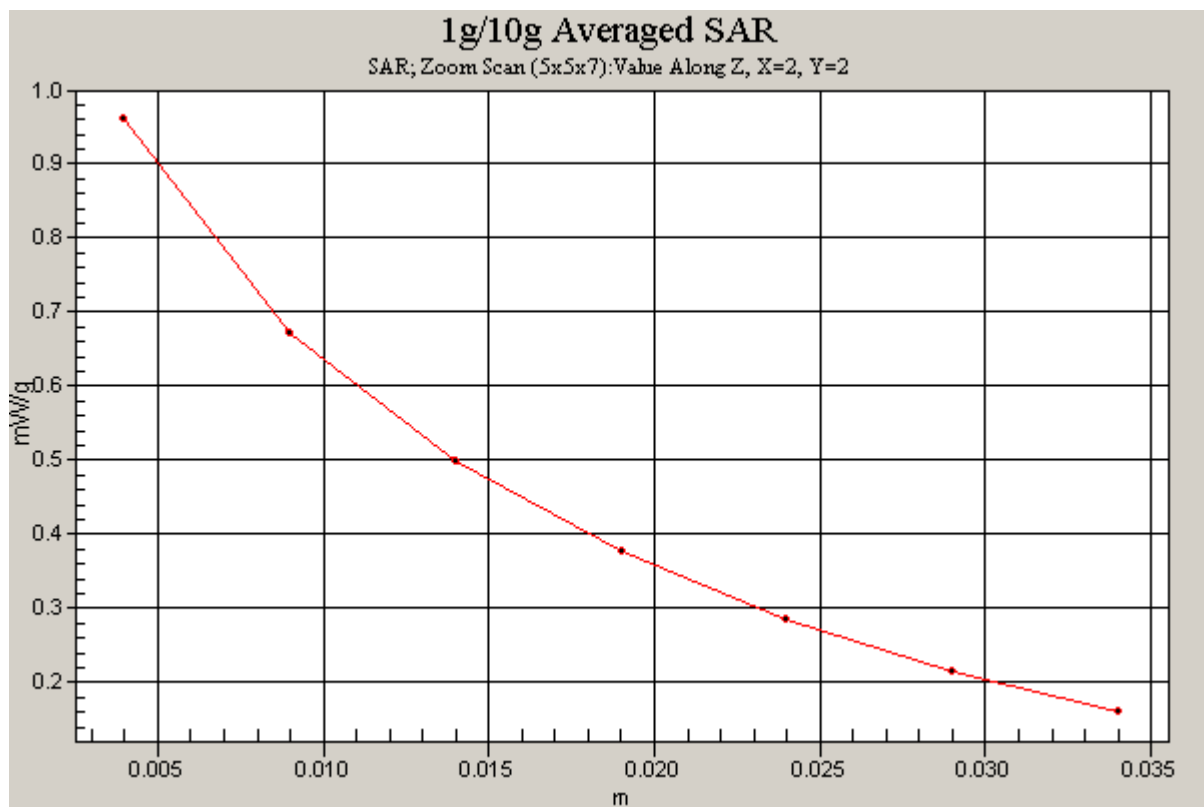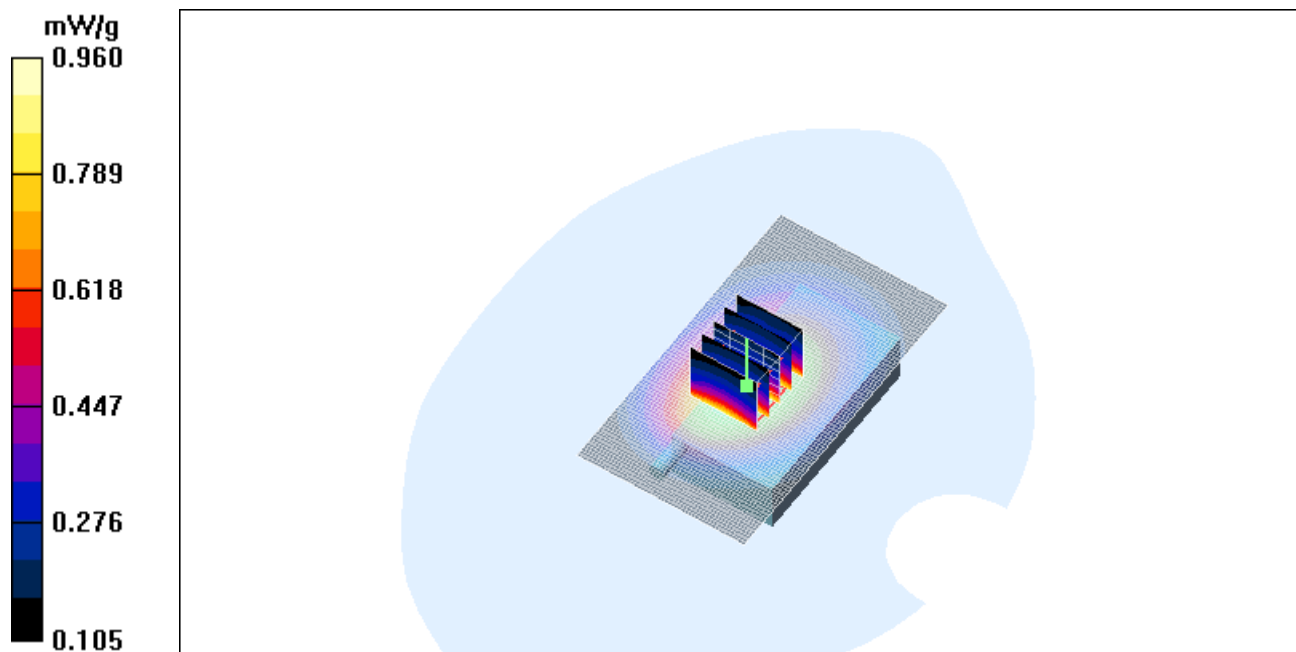

Date/Time: 05/24/05 14:59:36

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28739 (V10); Serial: 004400/63/179761/8

Communication System: 850 - GPRS - Dual slot; Communication System Notes: -

Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium: Body 850; Medium Notes: Medium Temperature: $t = 21.5$ C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.7$; $\rho =$

1000 kg/m^3

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes: Worst Case Extrapolation.
- ConvF(6.38, 6.38, 6.38); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Body - High + HS-6/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.584 mW/g

Body - High + HS-6/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.1 V/m ; Power Drift = 0.0 dB


Peak SAR (extrapolated) = 0.863 W/kg

SAR(1 g) = 0.561 mW/g ; SAR(10 g) = 0.387 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.588 mW/g

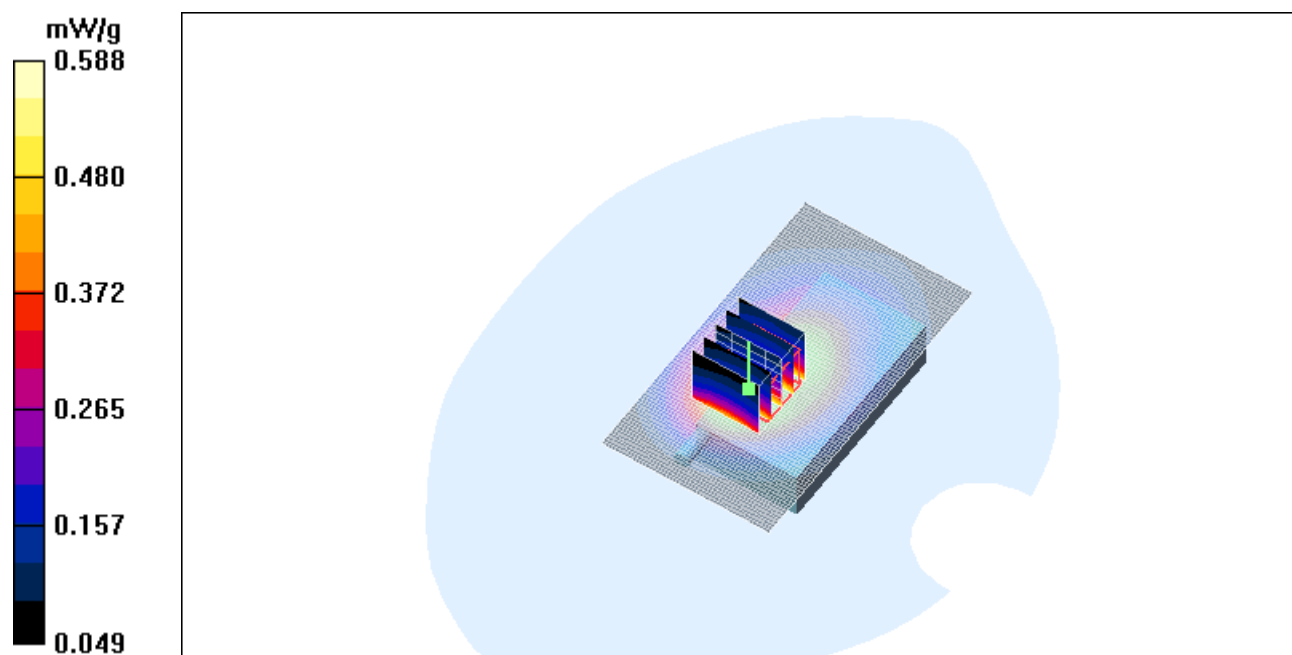

Date/Time: 05/26/05 22:20:02

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28739 (V10); Serial: 004400/63/179761/8

Communication System: GPRS 1900 - Dual Slot; Communication System Notes: -

Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

Medium: Body 1900; Medium Notes: Medium Temperature: $t=21.5$ C

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.61$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes: Worst Case Extrapolation.
- ConvF(4.52, 4.52, 4.52); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Body - High - No Accessory/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.785 mW/g

Body - High - No Accessory/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm


Reference Value = 21.4 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.731 mW/g; SAR(10 g) = 0.432 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.761 mW/g

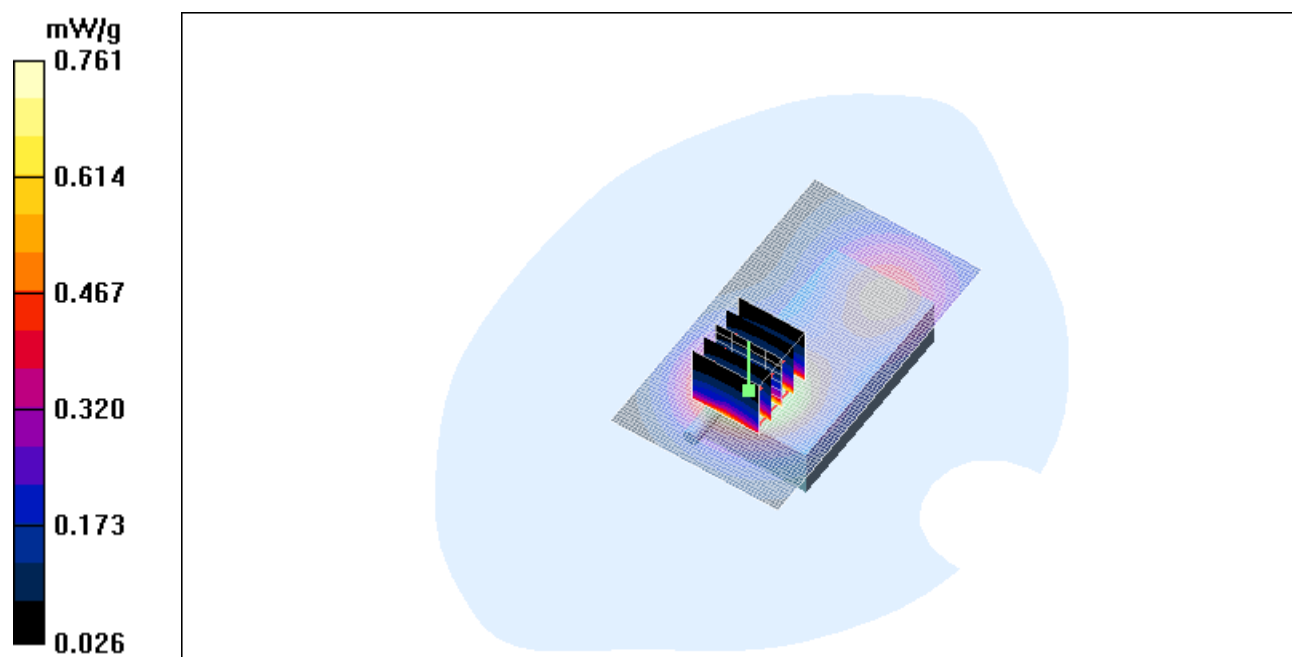

Date/Time: 05/26/05 22:20:02

Test Laboratory: TCC Copenhagen

Type: RM-77; DUT: 28739 (V10); Serial: 004400/63/179761/8

Communication System: GPRS 1900 - Dual Slot; Communication System Notes: -

Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

Medium: Body 1900; Medium Notes: Medium Temperature: $t=21.5$ C

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.61$ mho/m; $\epsilon_r = 52.6$; $\rho =$

1000 kg/m^3

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1786; Probe Notes: Worst Case Extrapolation.
- ConvF(4.52, 4.52, 4.52); Calibrated: 21.01.2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Body - High + HS-6/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (interpolated) = 0.779 mW/g

Body - High + HS-6/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$



Reference Value = 21.6 V/m ; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.740 mW/g ; SAR(10 g) = 0.438 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.764 mW/g

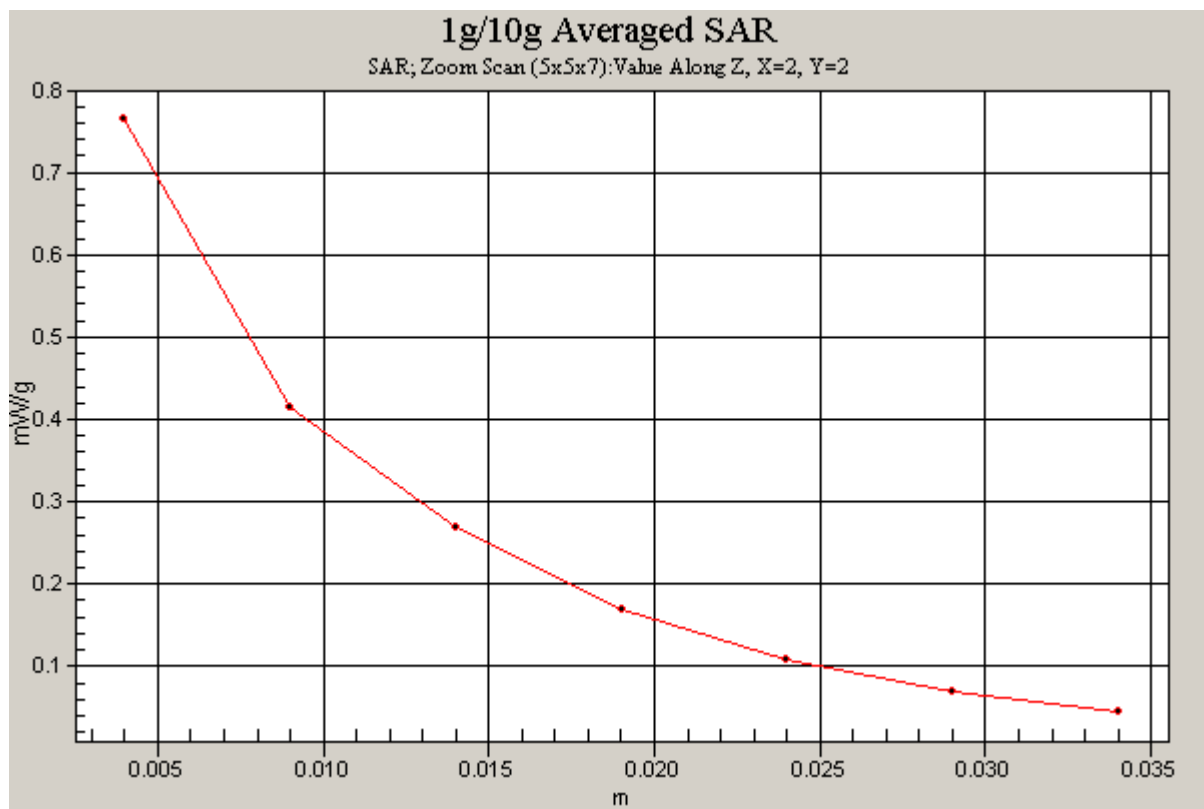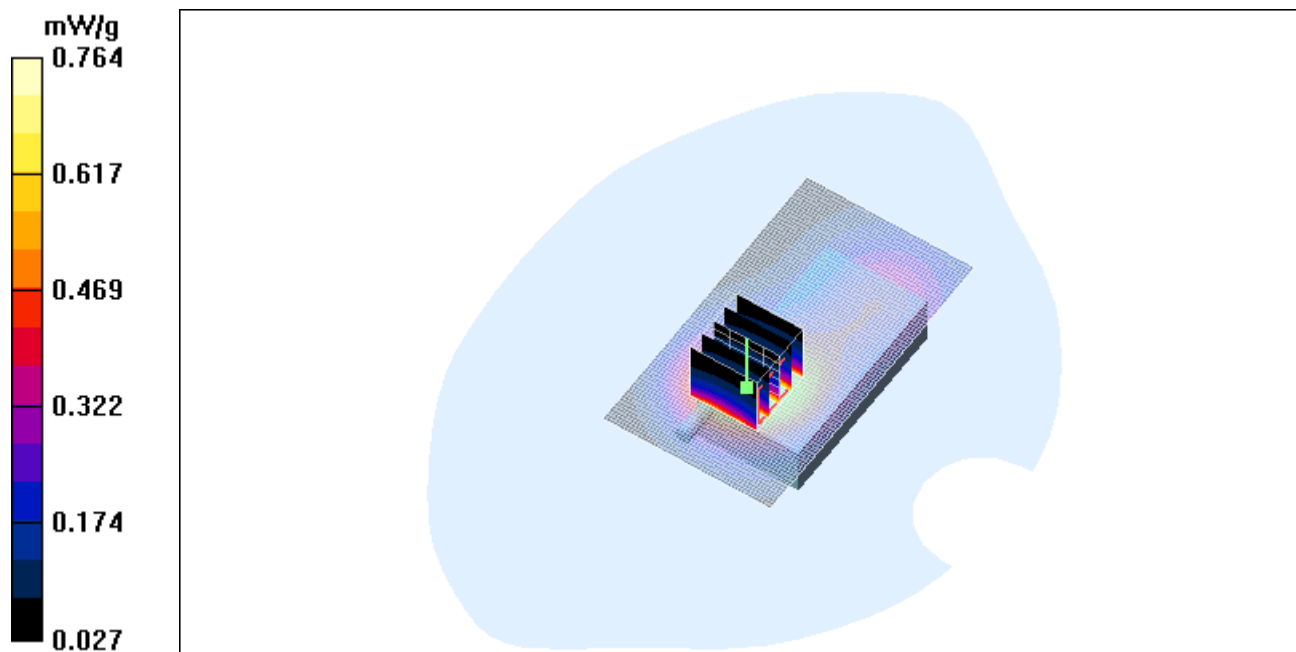

APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

See the following pages.

18976

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia DK**

Certificate No: **ET3-1786_Jan05**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1786**

Calibration procedure(s) **QA CAL-01.v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 21, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
DAE4	SN: 617	29-Sep-04 (SPEAG, No. DAE4-617_Sep04)	Sep-05
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05



	Name	Function	Signature
Calibrated by:	Nico Vetterli	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 21, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

28/1-05
HL

Conversion Factor Assessment

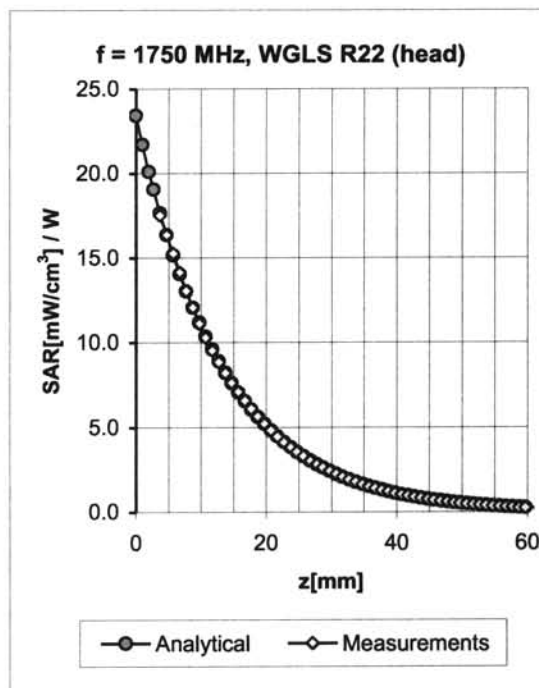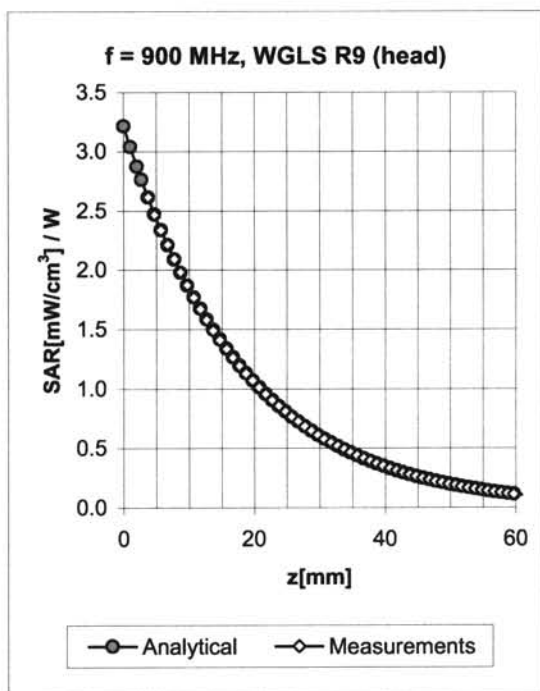

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.67	1.74	6.56 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.59	1.86	6.36 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.62	2.23	5.29 ± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.59	2.40	5.11 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.57	2.59	4.74 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.71	2.10	4.55 ± 11.8% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.59	1.91	6.38 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.47	2.19	6.06 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.57	2.68	4.68 ± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.57	2.82	4.52 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.62	2.45	4.41 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.72	2.03	4.20 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

19227

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia DK**

Certificate No: **ET3-1807_Jan05**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1807**

Calibration procedure(s) **QA CAL-01.v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 21, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
DAE4	SN: 617	29-Sep-04 (SPEAG, No. DAE4-617_Sep04)	Sep-05

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05



	Name	Function	Signature
Calibrated by:	Nico Vetterli	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 21, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

28/1-05
JK

Conversion Factor Assessment

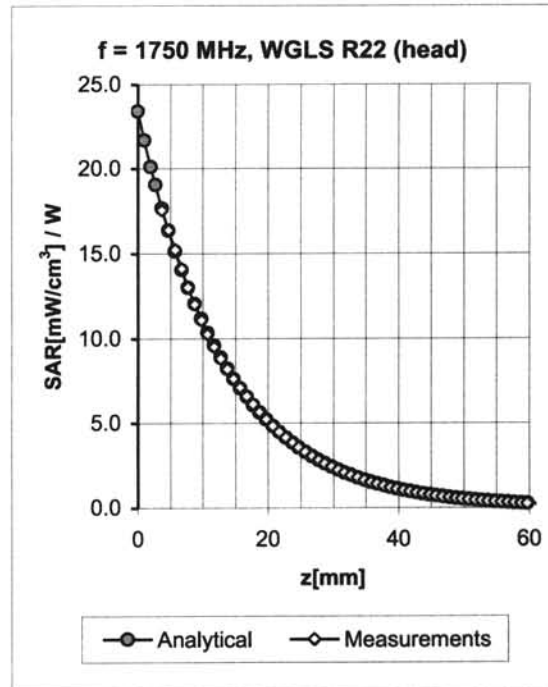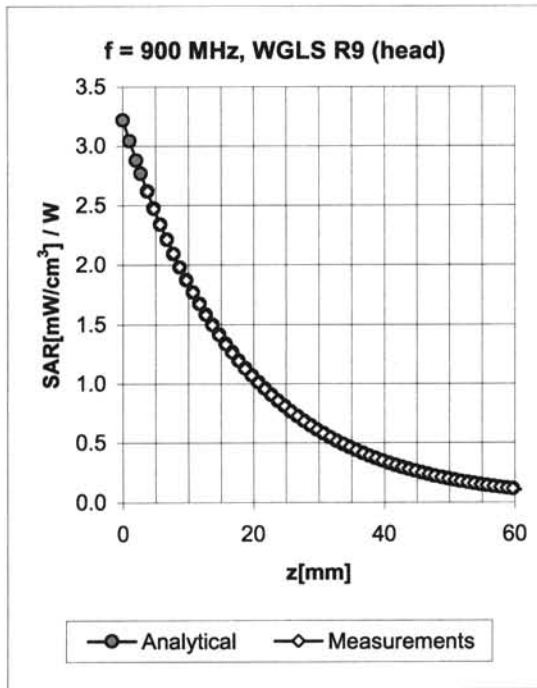

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.68	1.75	6.46 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.64	1.81	6.25 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.56	2.34	5.19 ± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.51	2.58	5.04 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.53	2.68	4.70 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.62	2.29	4.47 ± 11.8% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.50	2.07	6.26 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.49	2.15	5.97 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.50	2.86	4.59 ± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.51	2.94	4.44 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.55	2.63	4.35 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.63	2.18	4.12 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)

See the following pages.

18308

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia DK 2**

Certificate No: **D835V2-476_Jan05**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 476**

Calibration procedure(s) **QA CAL-05.v6
Calibration procedure for dipole validation kits**

Calibration date: **January 18, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference Probe ET3DV6	SN 1507	26-Oct-04 (SPEAG, No. ET3-1507_Oct04)	Oct-05
DAE4	SN 601	07-Jan-05 (SPEAG, No. DAE4-601_Jan05)	Jan-06
DAE4	SN 907	03-May-04 (SPEAG, No. DAE4-907_May04)	May-05
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-03)	In house check: Oct-05
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05

Calibrated by: **Judith Müller** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: January 19, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

18/1-05
DL

DASY4 Validation Report for Head TSL

Date/Time: 01/18/05 14:32:56

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN476

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz;

Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.24, 6.24, 6.24); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom half size; Type: QD000P49AA; Serial: SN:1001;
- Measurement SW: DASY4, V4.4 Build 11; Postprocessing SW: SEMCAD, V1.8 Build 133

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.47 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.32 W/kg

SAR(1 g) = 2.27 mW/g; SAR(10 g) = 1.49 mW/g

Maximum value of SAR (measured) = 2.46 mW/g

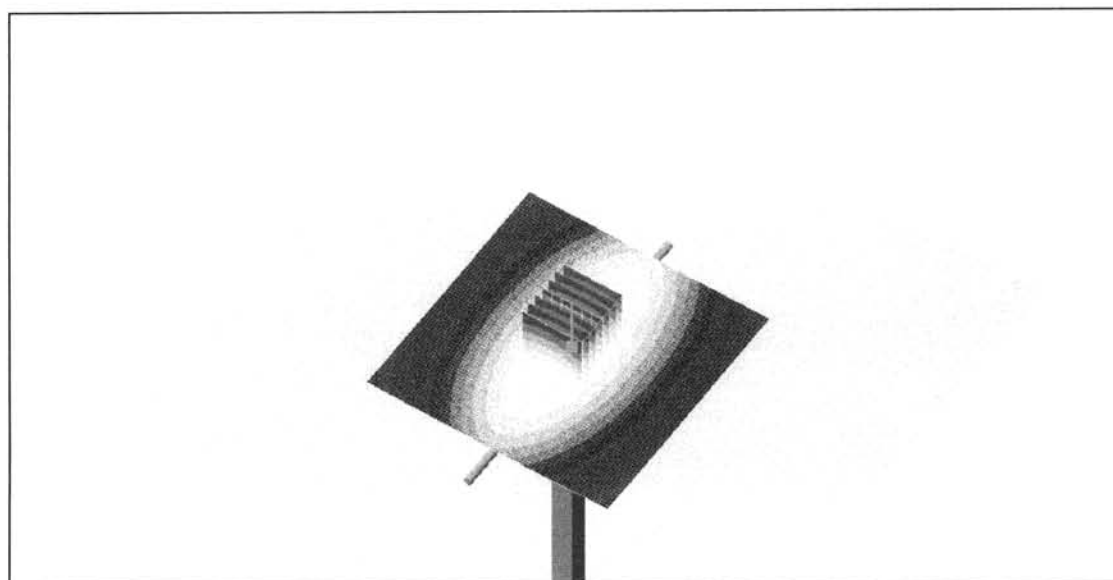

0 dB = 2.46mW/g

DASY4 Validation Report for Body TSL

Date/Time: 01/11/05 10:36:02

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN476

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL 900 MHz;

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.98, 5.98, 5.98); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn907; Calibrated: 03.05.2004
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001;
- Measurement SW: DASY4, V4.4 Build 10; Postprocessing SW: SEMCAD, V1.8 Build 133

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.68 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.7 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.47 mW/g; SAR(10 g) = 1.62 mW/g

Maximum value of SAR (measured) = 2.67 mW/g

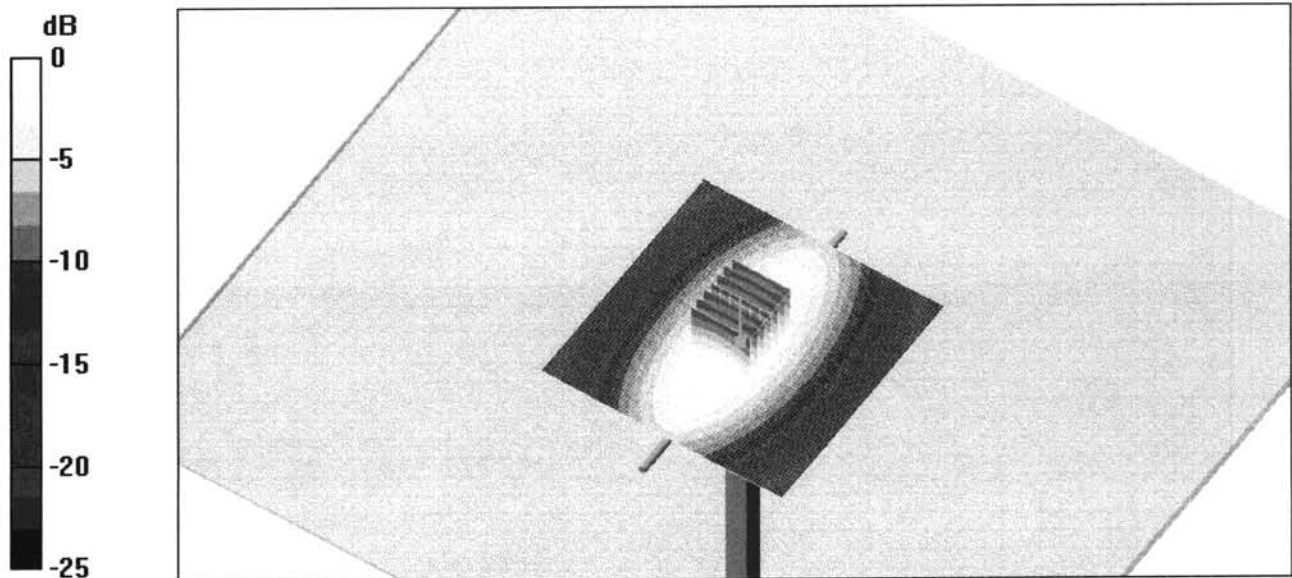

0 dB = 2.67mW/g

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia DK2**

Certificate No: **D1900V2-5d026_Jan05**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d026**

Calibration procedure(s) **QA CAL-05.v6**
Calibration procedure for dipole validation kits

Calibration date: **January 17, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference Probe ET3DV6	SN 1507	26-Oct-04 (SPEAG, No. ET3-1507_Oct04)	Oct-05
DAE4	SN 601	07-Jan-05 (SPEAG, No. DAE4-601_Jan05)	Jan-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-03)	In house check: Oct-05
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05

	Name	Function	Signature
Calibrated by:	Judith Müller	Laboratory Technician	

	Name	Function
Approved by:	Katja Pokovic	Technical Manager

Issued: January 20, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY4 Validation Report for Head TSL

Date/Time: 01/17/05 15:43:59

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d026

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 24.01.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0; Type: QD000P50AA; Serial: 1001;
- Measurement SW: DASY4, V4.4 Build 11; Postprocessing SW: SEMCAD, V1.8 Build 133

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 10.8 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.9 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.49 mW/g; SAR(10 g) = 4.94 mW/g

Maximum value of SAR (measured) = 10.7 mW/g

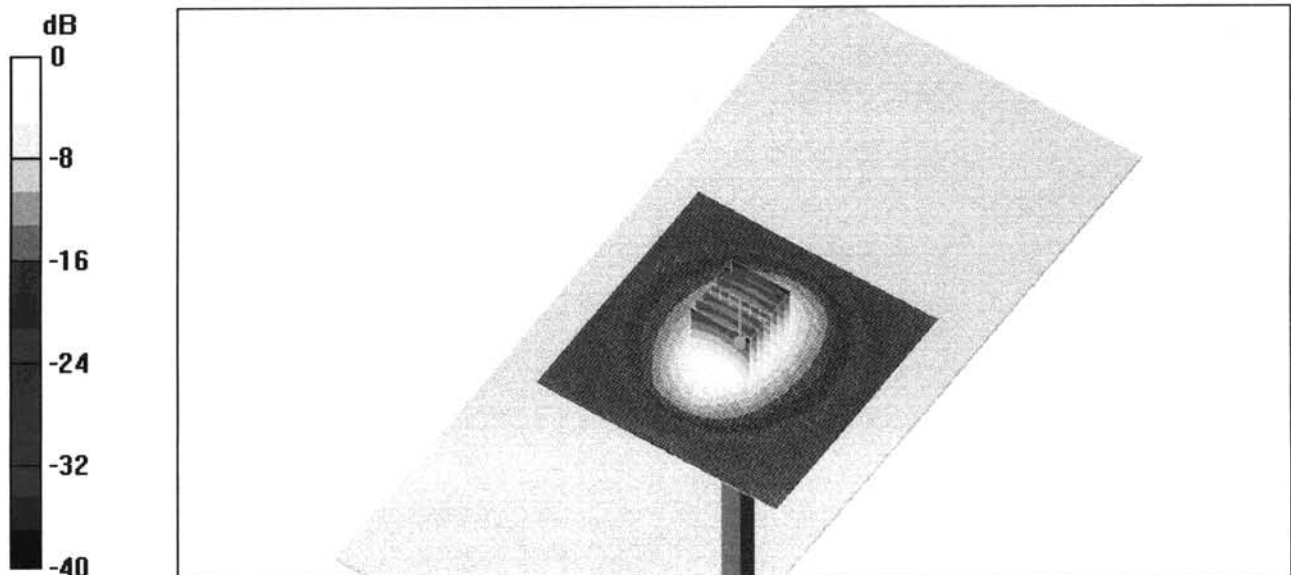

DASY4 Validation Report for Body TSL

Date/Time: 01/12/05 18:39:42

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:51d026

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1800 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.43, 4.43, 4.43); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0; Type: QD000P50AA; Serial: 1001;
- Measurement SW: DASY4, V4.4 Build 11; Postprocessing SW: SEMCAD, V1.8 Build 133

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 11.1 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.5 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.65 mW/g; SAR(10 g) = 5.11 mW/g

Maximum value of SAR (measured) = 11 mW/g

