

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CWLAN_RM-884_07.docx	Date of Report:	26-Jun-2012
Number of pages:	14	Customer's Contact person:	Tobias Cremer
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-884 / Battery BL-5J / AC charger AC-11E / Headset WH-102		
FCC ID:	PPIRM-884	IC:	-
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Kalle Hannila, Engineer, EMC & SAR

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	03-Oct-2011
Testing completed	07-Oct-2011
The customer's contact person	Tobias Cremer
Test Plan referred to	T:\Projects\RM-813\TestPlan\RS_testplan_RM-813.xls
Notes	-
Document name	T:\Projects\RM-813\EMC\FCC15CWLAN_RM-813_09.docx

1.1. EUT and Accessory Information

The EUT is a 10-band mobile phone:

GSM850/900/1800/1900/GPRS/EGPRS/Monopole without GND reflector (GSM/WCDMA)

WCDMA I/II(1900)/V(850)/VIII/HSDPA/HSUPA/Monopole without GND reflector (GSM/WCDMA)

WLAN/Bluetooth

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-813	004402136622101	0150	-	jc13.32	42686
Battery	BL-5J	4175351253D10101414;0670573	-	-	-	42688
AC charger	AC-11E	4090491212970501626;0675479	-	-	-	42689
Headset	WH-102	06943231163V4121358	-	-	-	42690

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	NP
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8.2 (a)	6dB(bandwidth)	NP
15.247(e)	A8.2 (b)	Power spectral density	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Laboratory.

The test results of PPIRM-813 are re-used for certification of the PPIRM-884. The table above indicates the results, which will be re-used.

CONTENTS

1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2).....	4
2.1. Test method and limit	4
2.2. WLAN Test results	5
3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	6
3.2. Test method and limit	6
3.3. WLAN Test results	8
4. Test Equipment	13
4.1. Conducted measurements	13
4.2. Radiated measurements	13

2. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-813, DUT 42686
Accessories with DUT numbers	BL-5J, DUT 42688 ; AC-11E, DUT 42689 ; WH-102, DUT 42690
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 46 / 98.4
Date of measurements	07-Oct-2011
Measured by	Hannu Söderholm

2.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.2. WLAN Test results

TX mode, channel 7 / 2442 MHz

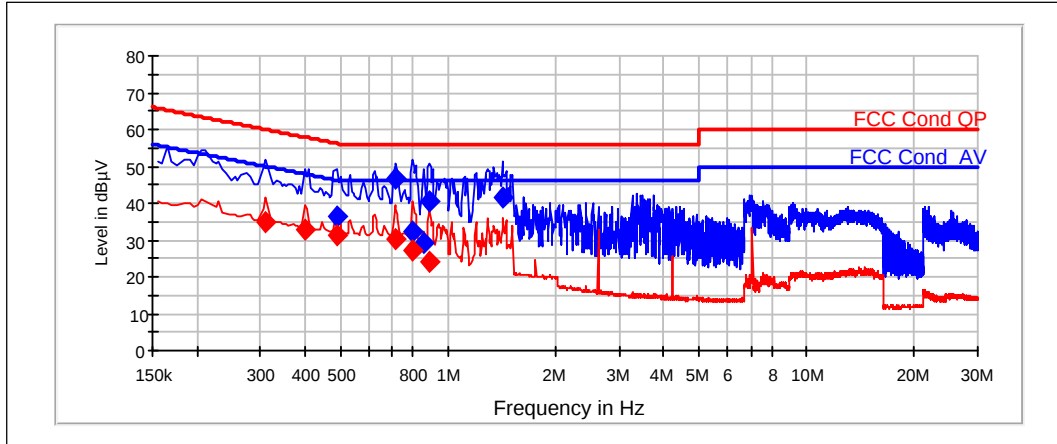

Quasi peak

Frequency [MHz]	Level [dBμV]	IF-BW[kHz]	Line	Margin	Result
0.49	36.39	10	L1	19.77	PASSED
0.715	46.77	10	L1	9.2	PASSED
0.8	32.3	10	N	23.7	PASSED
0.86	29.46	10	N	26.5	PASSED
0.89	40.56	10	L1	15.4	PASSED
1.425	41.54	10	L1	14.5	PASSED


Average

Frequency [MHz]	Level [dBμV]	IF-BW[kHz]	Line	Margin	Result
0.31	34.64	10	L1	15.37	PASSED
0.4	32.64	10	N	15.25	PASSED
0.49	31.41	10	N	14.77	PASSED
0.71	30.11	10	L1	15.9	PASSED
0.8	27.28	10	N	18.7	PASSED
0.89	24.25	10	N	21.8	PASSED

3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-813, DUT 42686
Accessories with DUT numbers	BL-5J, DUT 42688 ; AC-11E, DUT 42689 ; WH-102, DUT 42690
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 49 / 99.5
Date of measurements	04-Oct-2011
Measured by	Jari Jantunen

3.1.1 Test Setup

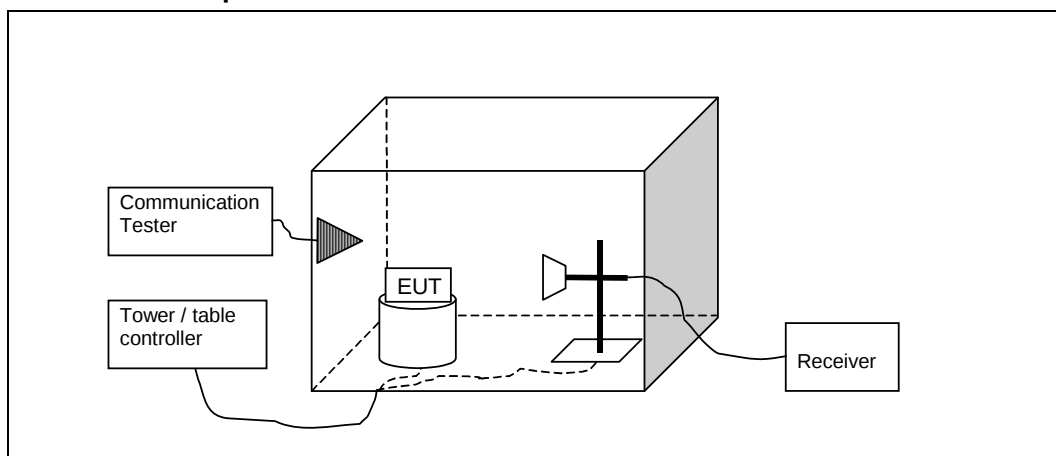

3.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. WLAN Test results

3.3.1 802.11n HT20 MCS0

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4823	48.09	253.746	50.46	-2.37	HORIZONTAL	PASSED
7236.6	43.63	151.95	42.07	1.56	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4823	31.74	38.646	34.11	-2.37	HORIZONTAL	PASSED
7236.6	31.06	35.731	29.5	1.56	HORIZONTAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
43.387	24.08	16.001	50.87	-26.79	VERTICAL	PASSED
44.799	25.62	19.09	53.02	-27.4	VERTICAL	PASSED
47.746	27.58	23.939	56.75	-29.17	VERTICAL	PASSED
47.788	26.55	21.264	55.75	-29.2	VERTICAL	PASSED
47.805	26.09	20.158	55.3	-29.21	VERTICAL	PASSED
47.976	26.26	20.549	55.57	-29.31	VERTICAL	PASSED
48.025	28.42	26.36	57.76	-29.34	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3896.395	39.95	99.46	43.23	-3.28	HORIZONTAL	PASSED
3914.329	38.49	84.052	41.82	-3.33	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3896.395	25.89	19.69	29.17	-3.28	HORIZONTAL	PASSED
3914.329	25.86	19.631	29.19	-3.33	HORIZONTAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4925.7	42.36	131.144	44.57	-2.21	HORIZONTAL	PASSED
7386.5	44.64	170.549	42.59	2.05	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4925.7	29.15	28.678	31.36	-2.21	HORIZONTAL	PASSED
7386.5	31.21	36.362	29.16	2.05	VERTICAL	PASSED

3.3.2 OFDM, 6Mbps, BPSK modulation

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4822.1	40.99	112.008	43.37	-2.38	HORIZONTAL	PASSED
7237.2	43.77	154.33	42.2	1.57	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4822.1	27.72	24.328	30.1	-2.38	HORIZONTAL	PASSED
7237.2	31.22	36.375	29.65	1.57	VERTICAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.78	21.89	12.434	43.58	-21.69	VERTICAL	PASSED
31.23	23.16	14.386	45.02	-21.86	VERTICAL	PASSED
31.38	29.35	29.333	51.26	-21.91	VERTICAL	PASSED
31.626	28.3	26.005	50.31	-22.01	VERTICAL	PASSED
32.73	26.68	21.568	49.1	-22.42	VERTICAL	PASSED
33.765	27.02	22.434	49.84	-22.82	VERTICAL	PASSED
33.806	24.58	16.947	47.41	-22.83	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3922.443	38.72	86.318	42.07	-3.35	VERTICAL	PASSED
3939.679	39.14	90.573	42.33	-3.19	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3922.443	25.78	19.463	29.13	-3.35	VERTICAL	PASSED
3939.679	25.95	19.843	29.14	-3.19	HORIZONTAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4922.5	41.38	117.247	43.62	-2.24	VERTICAL	PASSED
7384.8	44.37	165.31	42.34	2.03	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4922.5	28.38	26.242	30.62	-2.24	VERTICAL	PASSED
7384.8	31.47	37.437	29.44	2.03	VERTICAL	PASSED

3.3.3 DSSS 11Mbps QPSK modulation

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.1	46.23	204.762	48.59	-2.36	HORIZONTAL	PASSED
7237.5	46.92	221.769	45.35	1.57	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.1	33.22	45.83	35.58	-2.36	HORIZONTAL	PASSED
7237.5	32.96	44.484	31.39	1.57	HORIZONTAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
31.08	22.58	13.465	44.38	-21.8	VERTICAL	PASSED
31.29	28.1	25.395	49.98	-21.88	VERTICAL	PASSED
31.35	27.42	23.494	49.32	-21.9	VERTICAL	PASSED
31.38	22.06	12.674	43.97	-21.91	VERTICAL	PASSED
31.41	20.51	10.601	42.43	-21.92	VERTICAL	PASSED
33.15	26.27	20.583	48.85	-22.58	VERTICAL	PASSED
33.33	22.92	13.999	45.57	-22.65	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3894.393	39.06	89.691	42.34	-3.28	VERTICAL	PASSED
3901.004	39.42	93.584	42.72	-3.3	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3894.393	26	19.946	29.28	-3.28	VERTICAL	PASSED
3901.004	25.9	19.733	29.2	-3.3	HORIZONTAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924	46.94	222.254	49.19	-2.25	HORIZONTAL	PASSED
7387.7	44.52	168.306	42.46	2.06	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924	33.52	47.435	35.77	-2.25	HORIZONTAL	PASSED
7387.7	31.26	36.543	29.2	2.06	VERTICAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM06312	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27
2009	LISN 50 µH	ENV216	R&S	15C, 15B
2010	LISN 50 µH	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
-	High pass filter	WHKX 1.6/15G-12SS	Wainwright	22/24/27, 15C, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	22
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C