



# FCC RADIO TEST REPORT

Applicant : Lite-On Technology Corp.  
Address : Bldg. C, 90, Chien 1 Road, Chung Ho, New  
Taipei City 23585, Taiwan, R.O.C.  
Equipment : Netra Portable  
Model No. : AAT02P  
Trade Name : Jio  
FCC ID. : PPQ-AAT02P

## I HEREBY CERTIFY THAT :

The sample was received on Nov. 30, 2018 and the testing was carried out on Dec. 11, 2018 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Assistant Manager

Tested by:

Spree Yei / Engineer

## Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





## Contents

<b>1. Summary of Test Procedure and Test Results.....</b>	<b>5</b>
1.1 Applicable Standards .....	5
<b>2. Test Configuration of Equipment under Test.....</b>	<b>6</b>
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	6
2.3 Test Mode & Test Software .....	7
2.4 Description of Test System.....	7
2.5 General Information of Test.....	8
2.6 Measurement Uncertainty .....	8
<b>3. Test Equipment and Ancillaries Used for Tests.....</b>	<b>9</b>
<b>4. Antenna Requirements.....</b>	<b>10</b>
4.1 Standard Applicable .....	10
4.2 Antenna Construction and Directional Gain.....	10
<b>5. Test of AC Power Line Conducted Emission.....</b>	<b>11</b>
5.1 Test Limit .....	11
5.2 Test Procedures .....	11
5.3 Typical Test Setup .....	12
5.4 Test Result and Data.....	13
5.5 Test Photographs .....	15
<b>6. Test of Radiated Spurious Emission.....</b>	<b>16</b>
6.1 Test Limit .....	16
6.2 Test Procedures .....	16
6.3 Typical Test Setup .....	17
6.4 Test Result and Data (9kHz ~ 30MHz).....	18
6.5 Test Result and Data (30MHz ~ 1GHz).....	18
6.6 Test Result and Data (1GHz ~ 25GHz).....	20
6.7 Restricted Bands of Operation .....	32
6.8 Test Photographs (30MHz ~ 1GHz) .....	33
6.9 Test Photographs (1GHz ~ 25GHz) .....	34
<b>7. Test of Conducted Spurious Emission.....</b>	<b>35</b>
7.1 Test Limit .....	35
7.2 Test Procedure .....	35
7.3 Test Setup Layout .....	35
7.4 Test Result and Data .....	35
<b>8. 20dB Bandwidth Measurement Data.....</b>	<b>43</b>
8.1 Test Limit .....	43
8.2 Test Procedures .....	43
8.3 Test Setup Layout .....	43
8.4 Test Result and Data .....	43
<b>9. Frequencies Separation .....</b>	<b>46</b>
9.1 Test Limit .....	46
9.2 Test Procedures .....	46



9.3	Test Setup Layout .....	46
9.4	Test Result and Data.....	46
<b>10.</b>	<b>Dwell Time on each channel .....</b>	<b>49</b>
10.1	Test Limit .....	49
10.2	Test Procedures .....	49
10.3	Test Setup Layout .....	49
10.4	Test Result and Data.....	49
<b>11.</b>	<b>Number of Hopping Channels .....</b>	<b>52</b>
11.1	Test Limit .....	52
11.2	Test Procedures .....	52
11.3	Test Setup Layout .....	52
11.4	Test Result and Data.....	52
<b>12.</b>	<b>Maximum Peak Output Power .....</b>	<b>54</b>
12.1	Test Limit .....	54
12.2	Test Procedures .....	54
12.3	Test Setup Layout .....	54
12.4	Test Result and Data.....	55
<b>13.</b>	<b>Radio Frequency Exposure .....</b>	<b>56</b>
13.1	Applicable Standards .....	56
13.2	EUT Specification .....	56
13.3	Test Results.....	57
13.4	Calculation .....	57
13.5	Maximum Permissible Exposure.....	57



## History of this test report



## 1. Summary of Test Procedure and Test Results

### 1.1 Applicable Standards

**ANSI C63.4:2014**

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart C §15.247**

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. AC Power Line Conducted Emission	Pass
15.209 15.205	. Radiated Spurious Emission	Pass
15.247(d)	. Conducted Spurious Emission	Pass
15.247(a)(1)	. Channel Carrier Frequencies Separation	Pass
15.247(a)(1)	. 20dB Bandwidth	Pass
15.247(a)(1)	. Dwell Time	Pass
15.247(b)	. Number of Hopping Channels	Pass
15.247(b)	. Peak Output Power Measurement Data	Pass

This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report.



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment under Test

Equipment	Netra Portable
Model No.	AAT02P
Brand Name	Jio
Product Description	Please refer to User's Manual.
AC Adapter	Adapter Brand: Asian Model No.: WA-30A15FU Input: 100-240V~ 50/60Hz, 0.8A Max. Output: DC 15V, 2.0A
Connecting I/O Port(s)	Please refer to User's Manual.
Frequency Range	2402-2480 MHz
Modulation Type & Rate	BT: GFSK for 1Mbps $\pi/4$ -DQPSK for 2Mbps 8DPSK for 3Mbps BLE: GFSK for 1Mbps
Antenna Type/ gain	PIFA Antenna / 3.47dBi

### 2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)						
*00	<b>2402</b>	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	*78	<b>2480</b>
19	2421	*39	<b>2441</b>	59	2461	---	---

Note: Channels marked \* are selected to perform test.



## 2.3 Test Mode & Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4
- b. An executive program , "Tera Term" in WIN 7 input command for RF transmission.
- c. The following test modes were performed for the test:

Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)

For radiation test (below 1GHz) & AC Power Line Conducted Emission, caused "Test Mode 1" generated the worst case, it was reported as the final data.  
For radiation test (above 1GHz), caused "Test Mode 1, 3" generated the worst case, they were reported as the final data.  
For Maximum Peak Output Power, caused "Test Mode 1, 2, 3" generated the worst case, they were reported as the final data.

## 2.4 Description of Test System

The EUT is tested alone.



## 2.5 General Information of Test

Test Site	<b>Cerpass Technology Corporation Test Laboratory</b> Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582	
	FCC	TW1079, TW1061, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-4399, R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range	Conducted: from 150kHz to 30 MHz	
Investigated:	Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

## 2.6 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	±5.007dB
Radiated Spurious Emission(30MHz~1GHz)	±5.157dB
Radiated Spurious Emission(1GHz~18GHz)	±6.383dB
Radiated Spurious Emission(18GHz~40GHz)	±6.648dB
Conducted Spurious Emission	±1.253dB
6dB Bandwidth	±6.89%
Power Spectral Density	±0.630dB
26 dB Occupied Bandwidth	±6.10%
Frequency Stability	±375KHz
Channel Frequencies Separation	±6.10%
20dB Bandwidth	±6.12%
Dwell Time	±1.34%
Peak Output Power(Conducted Power Meter)	±0.86dB
Temperature	±1.2oC
Humidity	±2.7%
Channel Move Time	±4.53%
Channel Closing Transmission Time	±6.61%
Threshold	±0.631dB
Non occupancy period	±1.17%



### 3. Test Equipment and Ancillaries Used for Tests

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI3	100443	2018/03/15	2019/03/14
LISN	Schwarzbeck	NSLK 8127	8127-568	2018/02/26	2019/02/25
Pulse Limiter	R&S	ESH3-Z2	101934	2018/02/22	2019/02/21
Bilog Antenna	Schwarzbeck	VULB9168	275	2018/09/17	2019/09/16
Active Loop Antenna	EMCO	6507	40855	2018/05/22	2019/05/21
Horn Antenna	EMCO	3115	31601	2018/09/26	2019/09/25
Horn Antenna	EMCO	3116	31970	2018/03/23	2019/03/22
Preamplifier	EM	EM330	60660	2018/03/08	2019/03/07
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2018/09/18	2019/09/17
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2018/10/31	2019/10/30
MXG MW Analog Signal Generator	KEYSIGHT	N5183A	MY50142931	2018/04/10	2019/04/09
Spectrum Analyzer	R&S	FSP40	100219	2018/07/03	2019/07/02
BLUETOOTH TESTER	R&S	CBT	101133	2018/04/02	2019/04/01
Attenuator	KEYSIGHT	8491B	MY39250705	2018/09/04	2019/09/03
Rotary Attenuator	Agilent	8495B	MY42146680	2018/03/29	2019/03/28
Temp & Humi chamber	T-MACHINE	TMJ-9712	T-12-040111	2018/08/30	2019/08/29
Series Power Meter	Anritsu	ML2495A	1224005	2018/03/23	2019/03/22
Power Sensor	Anritsu	MA2411B	1207295	2018/03/23	2019/03/22
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A
Software	AUDIX	E3	V8.2014-8-6	N/A	N/A
Software	Keysight	N7607B Signal Studio	V3.0.0.0	N/A	N/A
Software	Keysight	Inservice MonitorUtility	N/A	N/A	N/A



## 4. Antenna Requirements

### 4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2 Antenna Construction and Directional Gain

Antenna Type	PIFA Antenna
Antenna Gain	3.47 dBi



## 5. Test of AC Power Line Conducted Emission

### 5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




### 5.3 Typical Test Setup

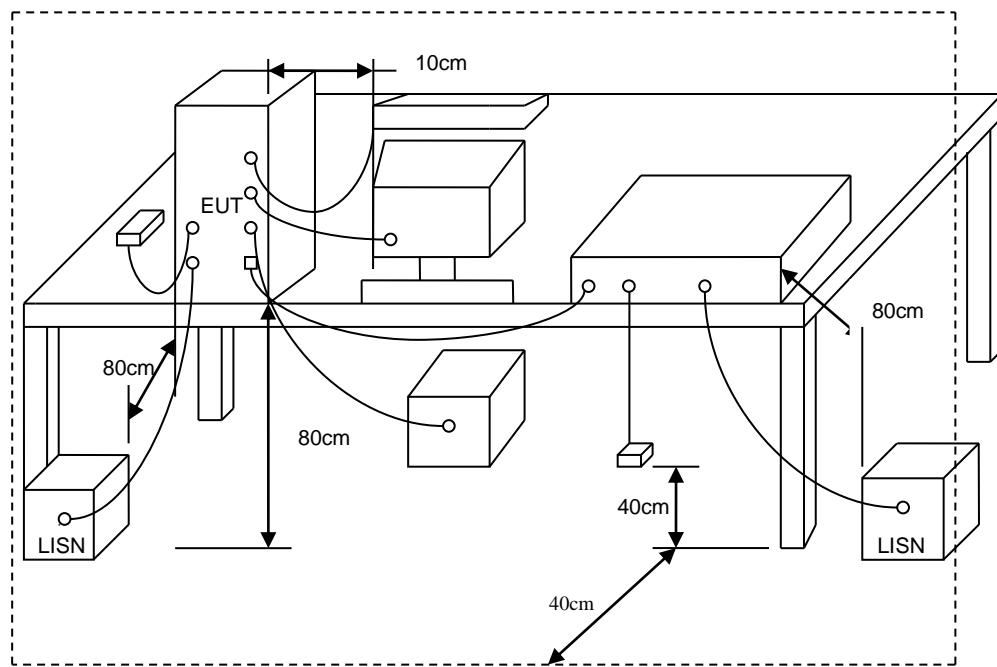



## 5.4 Test Result and Data

Power :	AC 120V	Pol/Phase :	LINE
Test Mode :	Mode 1	Temperature :	21 °C
Test date :	Dec. 05, 2018	Humidity :	45 %

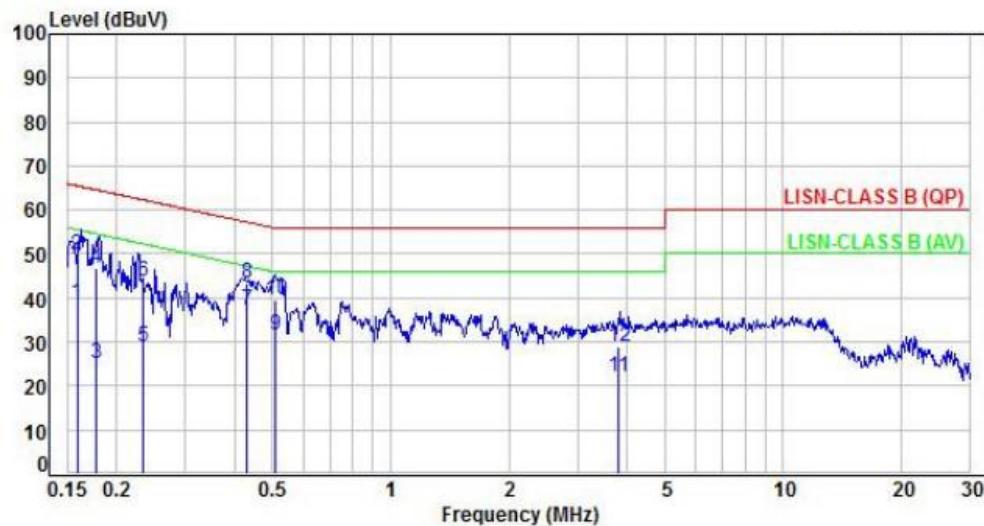

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.94	28.78	38.72	55.53	-16.81	Average	P
2	0.16	9.94	39.95	49.89	65.53	-15.64	QP	P
3	0.18	9.94	15.09	25.03	54.59	-29.56	Average	P
4	0.18	9.94	36.92	46.86	64.59	-17.73	QP	P
5	0.23	9.94	19.08	29.02	52.29	-23.27	Average	P
6	0.23	9.94	33.88	43.82	62.29	-18.47	QP	P
7	0.43	9.95	27.47	37.42	47.27	-9.85	Average	P
8	0.43	9.95	33.36	43.31	57.27	-13.96	QP	P
9	0.51	9.95	21.68	31.63	46.00	-14.37	Average	P
10	0.51	9.95	29.46	39.41	56.00	-16.59	QP	P
11	3.80	10.12	12.06	22.18	46.00	-23.82	Average	P
12	3.80	10.12	18.70	28.82	56.00	-27.18	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power :	AC 120V	Pol/Phase :	NEUTRAL
Test Mode :	Mode 1	Temperature :	21 °C
Test date :	Dec. 05, 2018	Humidity :	45 %

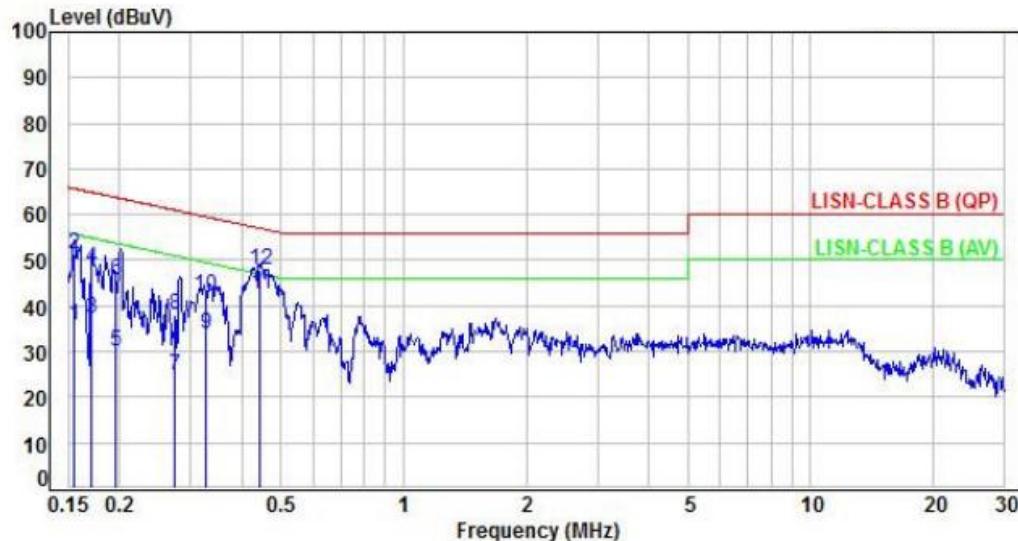

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.94	25.94	35.88	55.74	-19.86	Average	P
2	0.15	9.94	41.22	51.16	65.74	-14.58	QP	P
3	0.17	9.94	27.48	37.42	54.90	-17.48	Average	P
4	0.17	9.94	38.36	48.30	64.90	-16.60	QP	P
5	0.20	9.94	20.06	30.00	53.74	-23.74	Average	P
6	0.20	9.94	35.73	45.67	63.74	-18.07	QP	P
7	0.27	9.94	14.83	24.77	50.99	-26.22	Average	P
8	0.27	9.94	28.18	38.12	60.99	-22.87	QP	P
9	0.33	9.95	23.76	33.71	49.57	-15.86	Average	P
10	0.33	9.95	32.14	42.09	59.57	-17.48	QP	P
11	0.44	9.95	32.45	42.40	47.00	-4.60	Average	P
12	0.44	9.95	38.08	48.03	57.00	-8.97	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



## 6. Test of Radiated Spurious Emission

### 6.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defined in ANSI C63.4-2014. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions. For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated ( $\mu$ V / M)	Radiated (dB $\mu$ V / M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.

Frequency (MHz)	Distance Meters	Radiated (dB $\mu$ V / M)
30-230	10	30
230-1000	10	37


### 6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




### 6.3 Typical Test Setup


Below 30MHz test setup

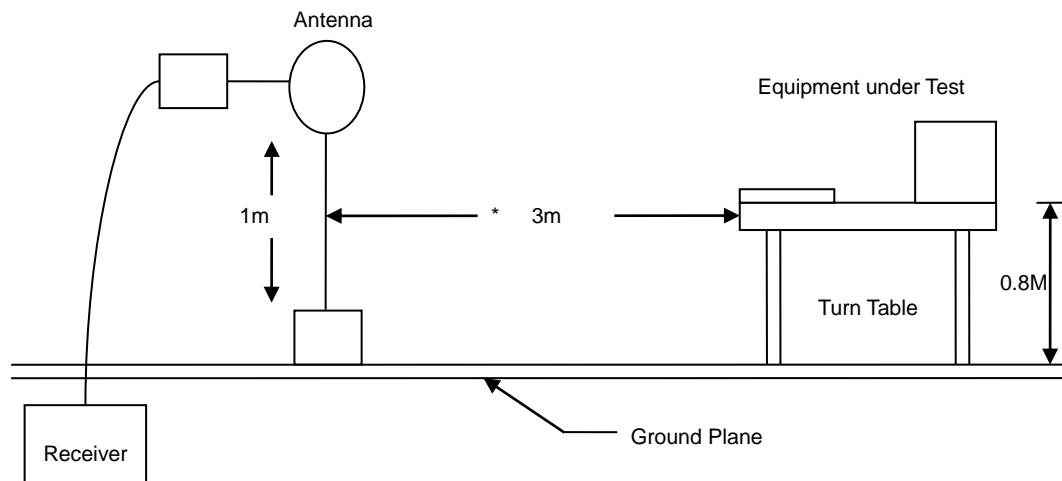

30MHz- 1GHz Test Setup

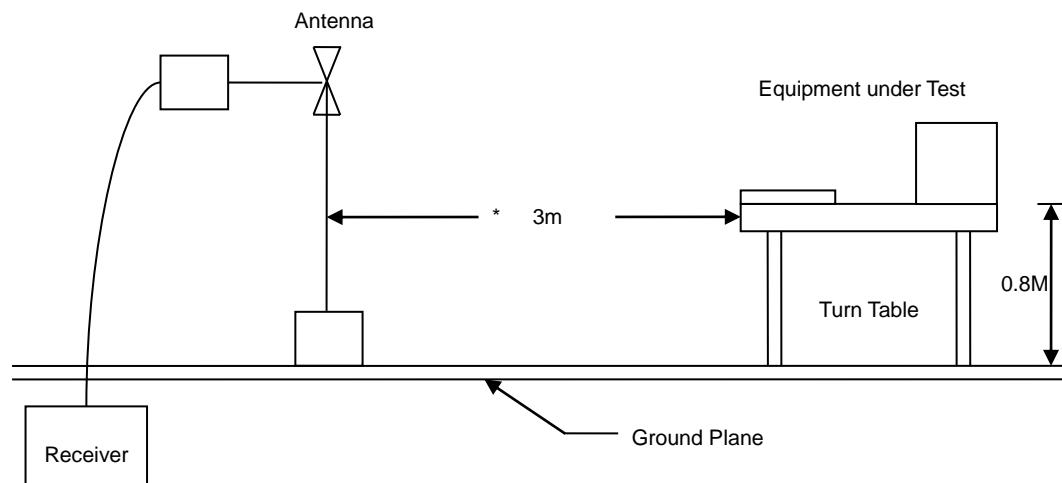

Above 1GHz Test Setup

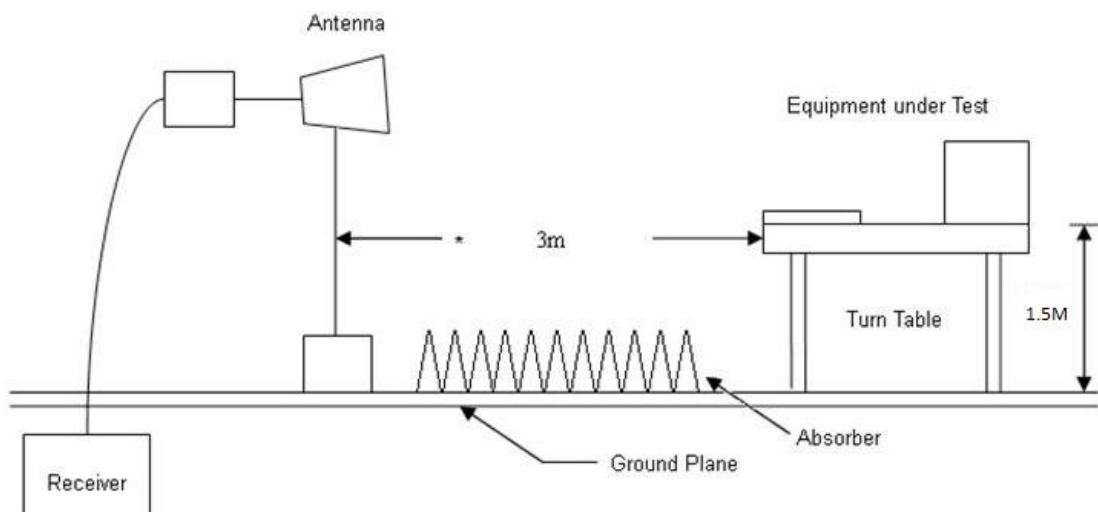




## 6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

## 6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1	Temperature	: 21 °C
Test Date	: Dec. 05, 2018	Humidity	: 65 %

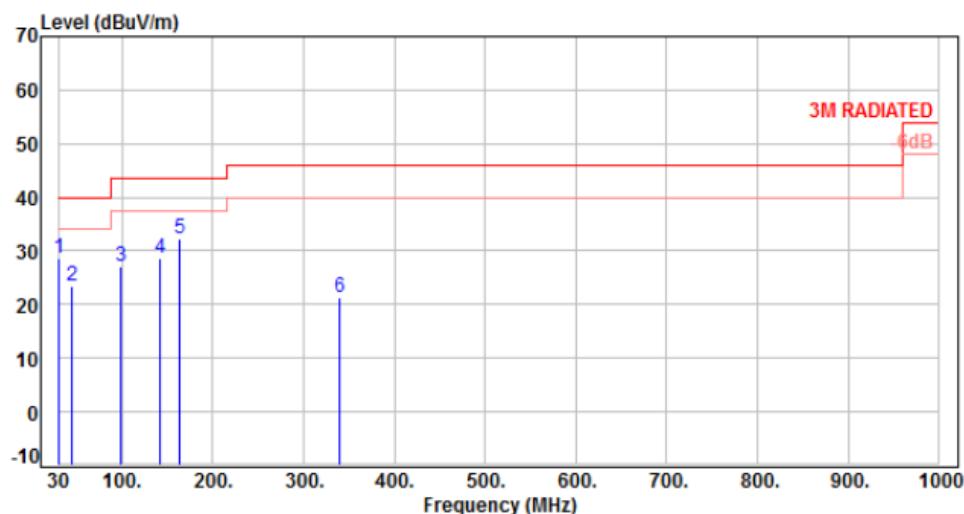


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)	P/F
1	30.00	-10.49	39.27	28.78	40.00	-11.22	Peak	400	0	P
2	45.52	-9.45	33.02	23.57	40.00	-16.43	Peak	400	0	P
3	97.90	-14.89	42.12	27.23	43.50	-16.27	Peak	400	0	P
4	142.52	-9.65	38.26	28.61	43.50	-14.89	Peak	400	0	P
5	163.86	-9.30	41.59	32.29	43.50	-11.21	Peak	400	0	P
6	340.40	-7.38	28.80	21.42	46.00	-24.58	Peak	400	0	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1	Temperature :	21 °C
Test Date :	Dec. 05, 2018	Humidity :	65 %

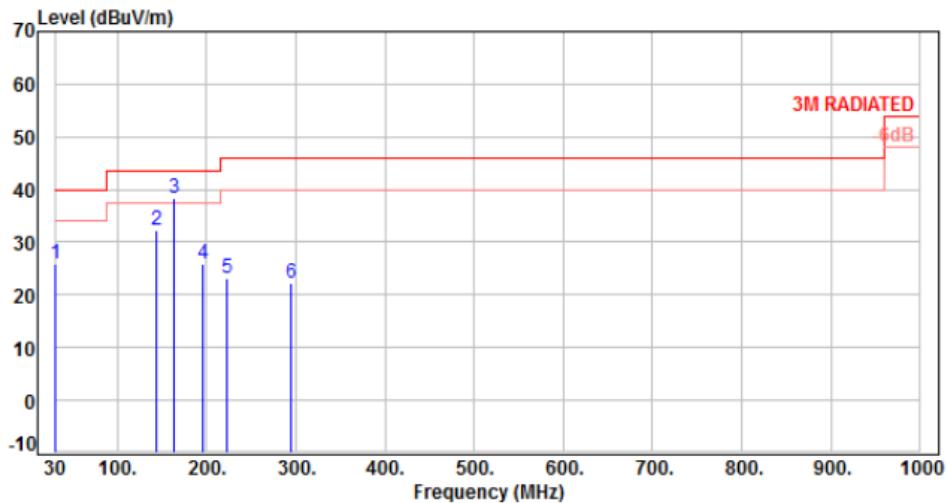

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-10.49	36.47	25.98	40.00	-14.02	Peak	100	0	P
2	143.49	-9.60	41.83	32.23	43.50	-11.27	Peak	100	0	P
3	163.86	-9.30	47.79	38.49	43.50	-5.01	Peak	100	0	P
4	195.87	-12.10	38.05	25.95	43.50	-17.55	Peak	100	0	P
5	222.06	-11.50	34.55	23.05	46.00	-22.95	Peak	100	0	P
6	294.81	-8.74	30.91	22.17	46.00	-23.83	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



## 6.6 Test Result and Data (1GHz ~ 25GHz)

Power	:	AC 120V	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH00	Temperature	:	21 °C
Test Date	:	Nov. 28, 2018	Humidity	:	65 %

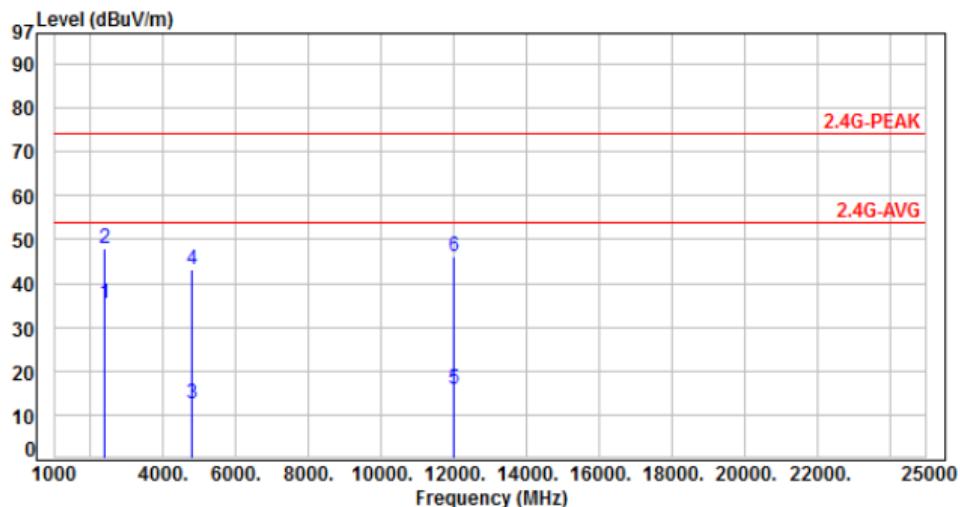

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	51.20	35.52	54.00	-18.48	Average	100	345	P
2	2390.00	-15.68	63.80	48.12	74.00	-25.88	Peak	100	345	P
3	4804.00	-8.53	21.10	12.57	54.00	-41.43	Average	100	330	P
4	4804.00	-8.53	51.80	43.27	74.00	-30.73	Peak	100	330	P
5	12010.00	1.77	14.10	15.87	54.00	-38.13	Average	231	310	P
6	12010.00	1.77	44.20	45.97	74.00	-28.03	Peak	231	310	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH00	Temperature :	21 °C
Test Date :	Nov. 28, 2018	Humidity :	65 %

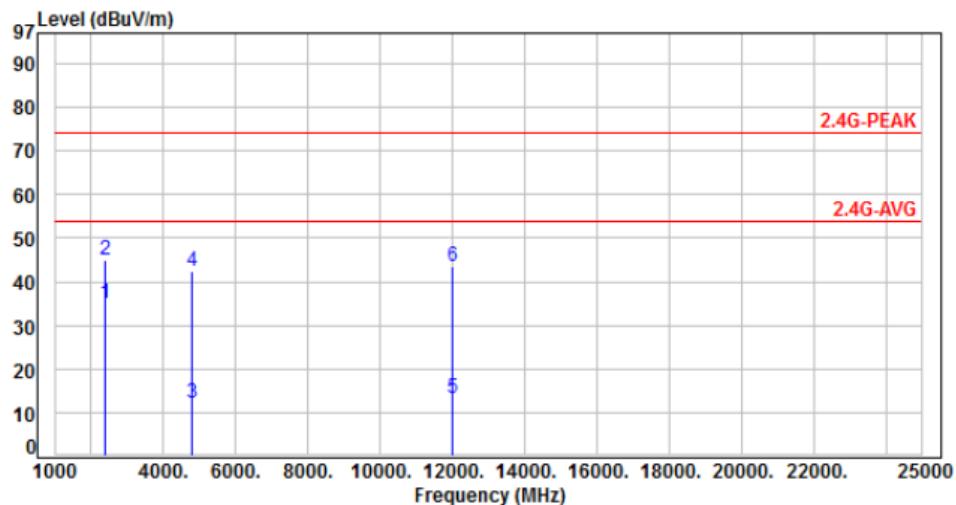

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	50.80	35.12	54.00	-18.88	Average	100	270	P
2	2390.00	-15.68	60.50	44.82	74.00	-29.18	Peak	100	270	P
3	4804.00	-8.53	20.70	12.17	54.00	-41.83	Average	113	108	P
4	4804.00	-8.53	50.80	42.27	74.00	-31.73	Peak	113	108	P
5	12010.00	1.77	11.60	13.37	54.00	-40.63	Average	120	290	P
6	12010.00	1.77	41.70	43.47	74.00	-30.53	Peak	120	290	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH39	Temperature :	21 °C
Test Date :	Dec. 05, 2018	Humidity :	65 %

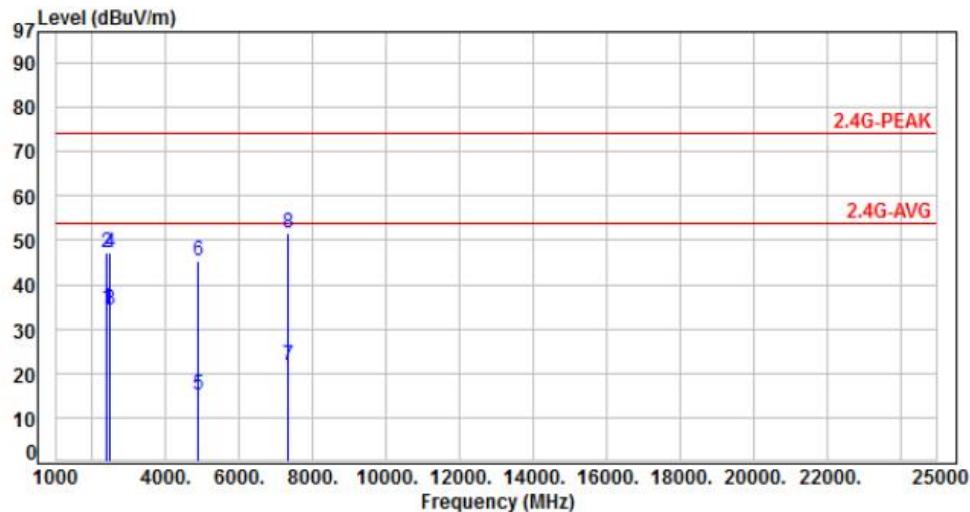

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)
1	2390.00	-15.68	50.30	34.62	54.00	-19.38	Average	100	328 P
2	2390.00	-15.68	62.90	47.22	74.00	-26.78	Peak	100	328 P
3	2483.50	-15.36	49.60	34.24	54.00	-19.76	Average	100	328 P
4	2483.50	-15.36	62.50	47.14	74.00	-26.86	Peak	100	328 P
5	4882.00	-8.30	23.50	15.20	54.00	-38.80	Average	100	331 P
6	4882.00	-8.30	53.60	45.30	74.00	-28.70	Peak	100	331 P
7	7323.00	-3.83	25.50	21.67	54.00	-32.33	Average	105	303 P
8	7323.00	-3.83	55.60	51.77	74.00	-22.23	Peak	105	303 P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH39	Temperature :	21 °C
Test Date :	Dec. 05, 2018	Humidity :	65 %

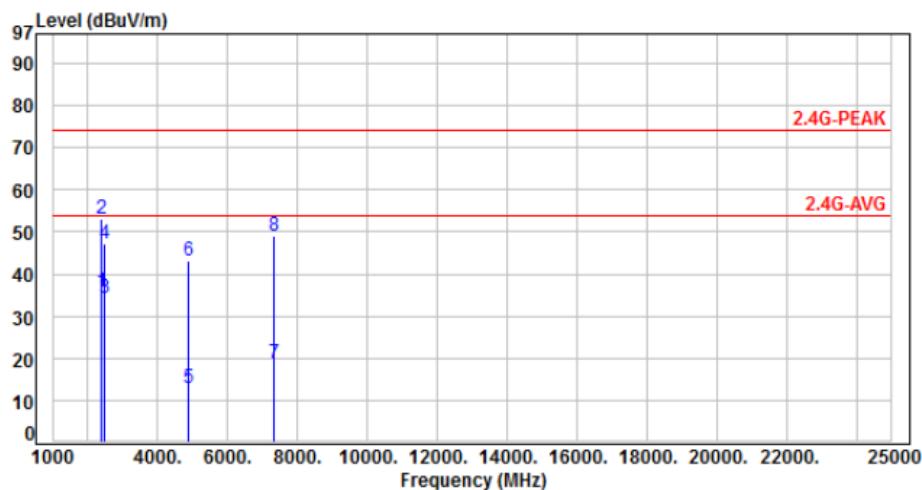

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	51.30	35.62	54.00	-18.38	Average	250	343	P
2	2390.00	-15.68	68.90	53.22	74.00	-20.78	Peak	250	343	P
3	2483.50	-15.36	49.70	34.34	54.00	-19.66	Average	250	343	P
4	2483.50	-15.36	62.56	47.20	74.00	-26.80	Peak	250	343	P
5	4882.00	-8.30	21.20	12.90	54.00	-41.10	Average	100	346	P
6	4882.00	-8.30	51.30	43.00	74.00	-31.00	Peak	100	346	P
7	7323.00	-3.83	22.60	18.77	54.00	-35.23	Average	100	282	P
8	7323.00	-3.83	52.70	48.87	74.00	-25.13	Peak	100	282	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH78	Temperature :	21 °C
Test Date :	Nov. 28, 2018	Humidity :	65 %

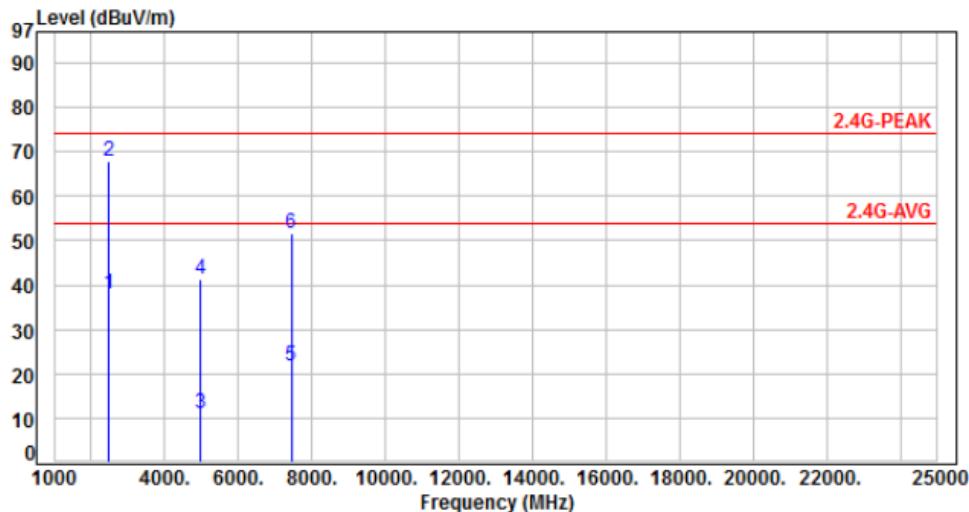

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.36	53.20	37.84	54.00	-16.16	Average	100	337	P
2	2483.50	-15.36	83.30	67.94	74.00	-6.06	Peak	100	337	P
3	4960.00	-8.07	19.09	11.02	54.00	-42.98	Average	100	323	P
4	4960.00	-8.07	49.19	41.12	74.00	-32.88	Peak	100	323	P
5	7440.00	-3.52	25.10	21.58	54.00	-32.42	Average	107	302	P
6	7440.00	-3.52	55.20	51.68	74.00	-22.32	Peak	107	302	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH78	Temperature :	21 °C
Test Date :	Nov. 28, 2018	Humidity :	65 %

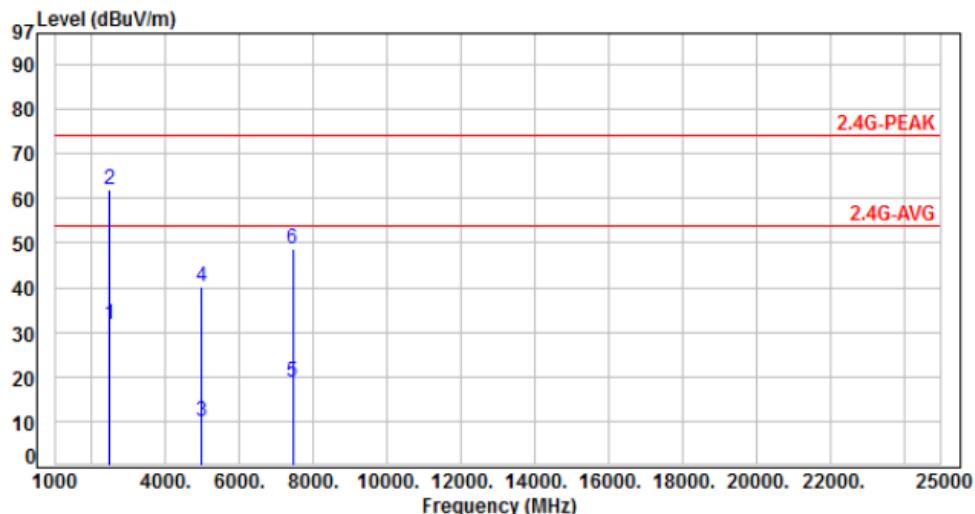

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.36	47.10	31.74	54.00	-22.26	Average	216	262	P
2	2483.50	-15.36	77.20	61.84	74.00	-12.16	Peak	216	262	P
3	4960.00	-8.07	18.19	10.12	54.00	-43.88	Average	113	305	P
4	4960.00	-8.07	48.29	40.22	74.00	-33.78	Peak	113	305	P
5	7440.00	-3.52	22.22	18.70	54.00	-35.30	Average	216	236	P
6	7440.00	-3.52	52.32	48.80	74.00	-25.20	Peak	216	236	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH00	Temperature :	21 °C
Test Date :	Dec. 05, 2018	Humidity :	65 %

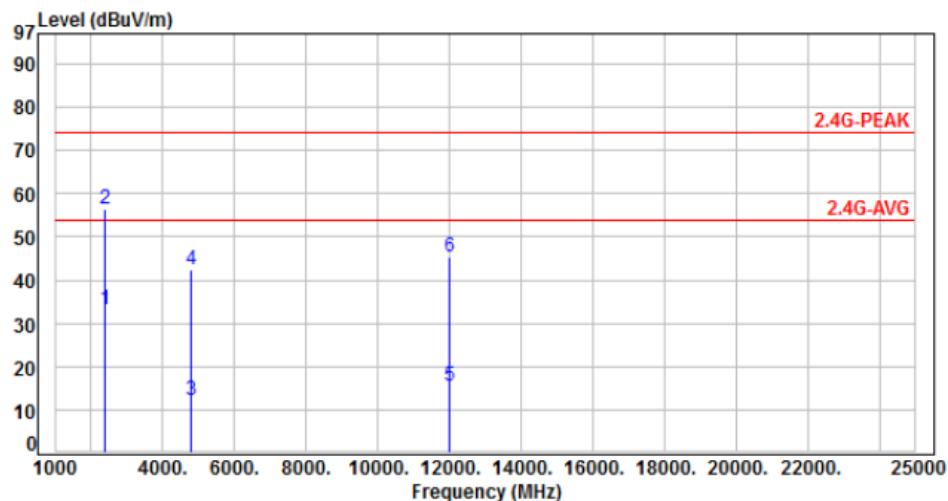


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)
1	2390.00	-15.68	48.90	33.22	54.00	-20.78	Average	110	354 P
2	2390.00	-15.68	72.10	56.42	74.00	-17.58	Peak	110	354 P
3	4804.00	-8.53	20.70	12.17	54.00	-41.83	Average	100	330 P
4	4804.00	-8.53	50.80	42.27	74.00	-31.73	Peak	100	330 P
5	12010.00	1.77	13.58	15.35	54.00	-38.65	Average	100	73 P
6	12010.00	1.77	43.68	45.45	74.00	-28.55	Peak	100	73 P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH00	Temperature :	21 °C
Test Date :	Dec. 05, 2018	Humidity :	65 %

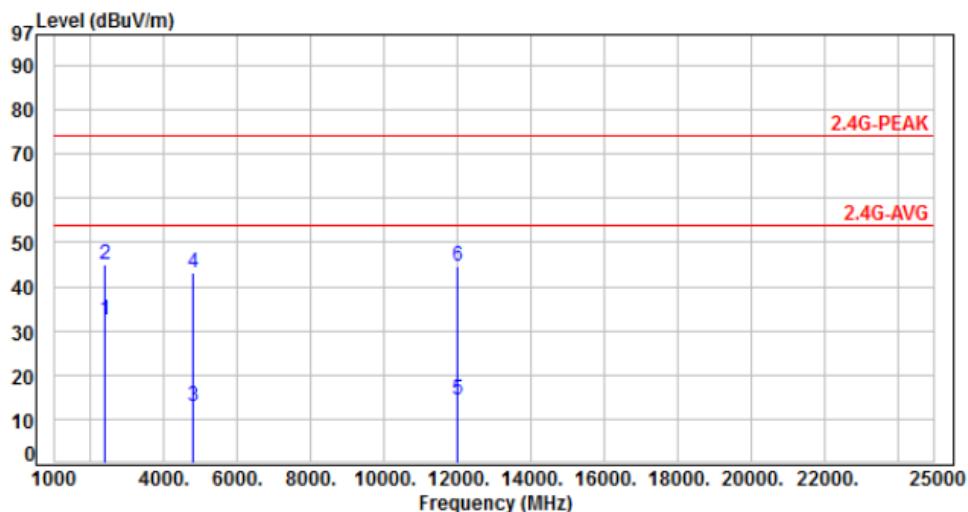

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	48.21	32.53	54.00	-21.47	Average	120	339	P
2	2390.00	-15.68	60.50	44.82	74.00	-29.18	Peak	120	339	P
3	4804.00	-8.53	21.50	12.97	54.00	-41.03	Average	100	358	P
4	4804.00	-8.53	51.60	43.07	74.00	-30.93	Peak	100	358	P
5	12010.00	1.77	12.78	14.55	54.00	-39.45	Average	100	315	P
6	12010.00	1.77	42.88	44.65	74.00	-29.35	Peak	100	315	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH39	Temperature :	21 °C
Test Date :	Dec. 05, 2018	Humidity :	65 %

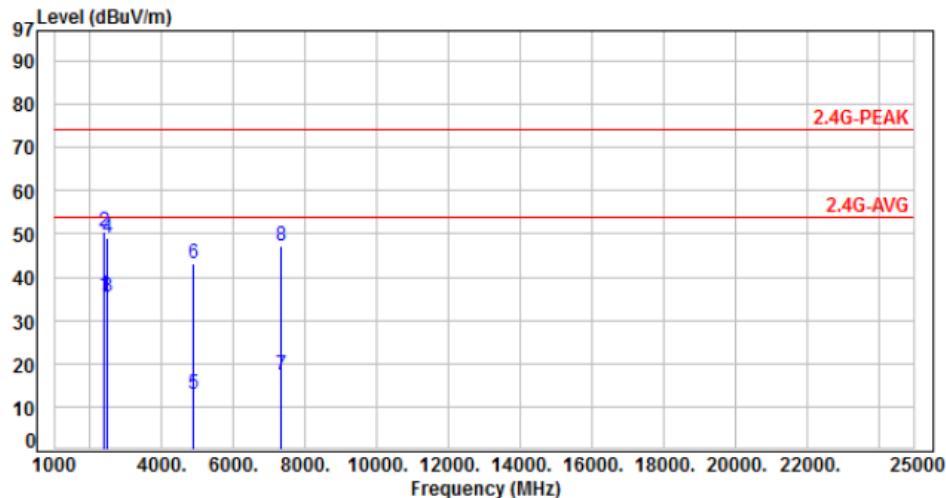

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	51.30	35.62	54.00	-18.38	Average	100	330	P
2	2390.00	-15.68	66.20	50.52	74.00	-23.48	Peak	100	330	P
3	2483.50	-15.36	50.60	35.24	54.00	-18.76	Average	100	330	P
4	2483.50	-15.36	64.30	48.94	74.00	-25.06	Peak	100	330	P
5	4882.00	-8.30	21.28	12.98	54.00	-41.02	Average	100	324	P
6	4882.00	-8.30	51.38	43.08	74.00	-30.92	Peak	100	324	P
7	7323.00	-3.83	21.12	17.29	54.00	-36.71	Average	103	276	P
8	7323.00	-3.83	51.22	47.39	74.00	-26.61	Peak	103	276	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH39	Temperature :	21 °C
Test Date :	Dec. 05, 2018	Humidity :	65 %

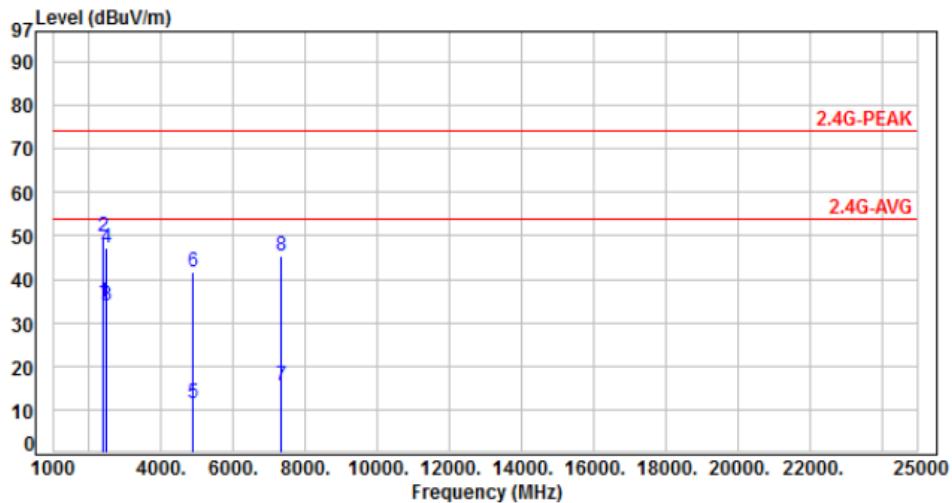

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	50.20	34.52	54.00	-19.48	Average	200	92	P
2	2390.00	-15.68	65.60	49.92	74.00	-24.08	Peak	200	92	P
3	2483.50	-15.36	49.20	33.84	54.00	-20.16	Average	200	92	P
4	2483.50	-15.36	62.65	47.29	74.00	-26.71	Peak	200	92	P
5	4882.00	-8.30	19.80	11.50	54.00	-42.50	Average	120	352	P
6	4882.00	-8.30	49.90	41.60	74.00	-32.40	Peak	120	352	P
7	7323.00	-3.83	19.20	15.37	54.00	-38.63	Average	100	45	P
8	7323.00	-3.83	49.30	45.47	74.00	-28.53	Peak	100	45	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH78	Temperature :	21 °C
Test Date :	Dec. 05, 2018	Humidity :	65 %

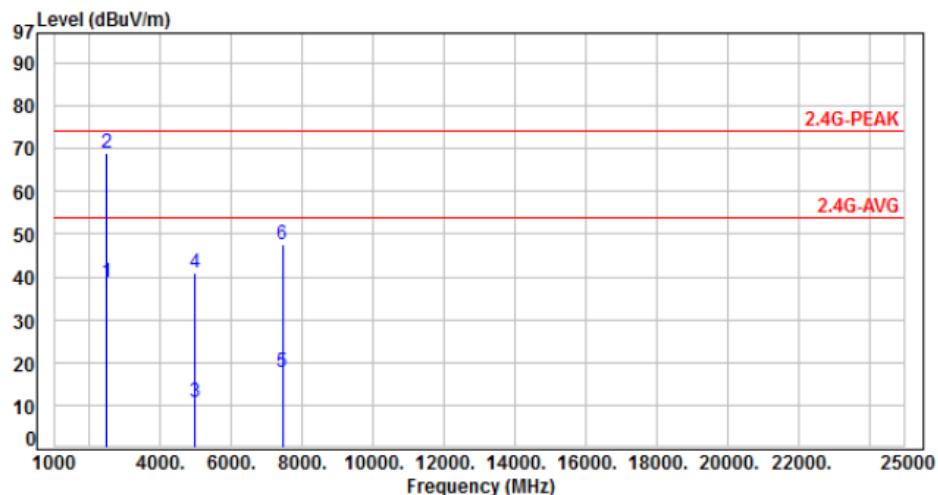

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.36	54.10	38.74	54.00	-15.26	Average	100	330	P
2	2483.50	-15.36	84.20	68.84	74.00	-5.16	Peak	100	330	P
3	4960.00	-8.07	18.74	10.67	54.00	-43.33	Average	110	314	P
4	4960.00	-8.07	48.84	40.77	74.00	-33.23	Peak	110	314	P
5	7440.00	-3.52	21.10	17.58	54.00	-36.42	Average	108	275	P
6	7440.00	-3.52	51.20	47.68	74.00	-26.32	Peak	108	275	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH78	Temperature :	21 °C
Test Date :	Dec. 05, 2018	Humidity :	65 %

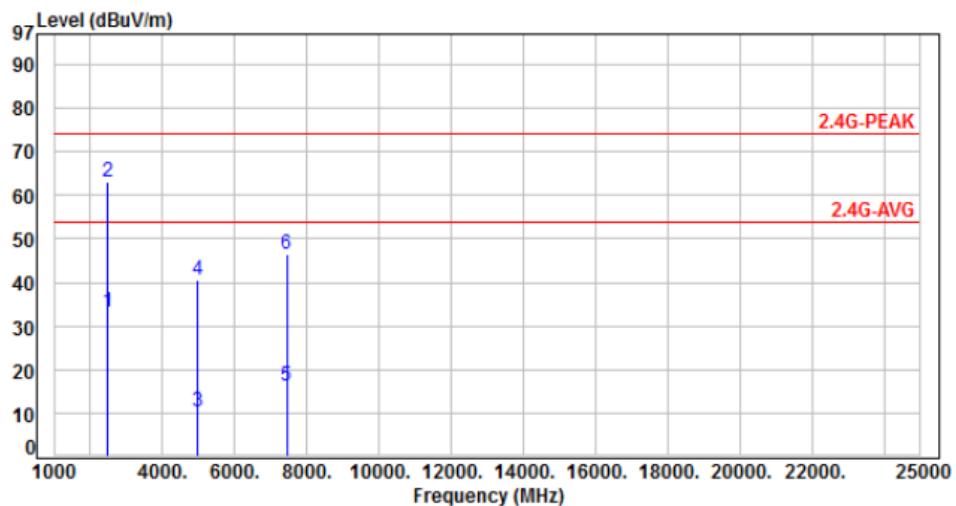

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.36	48.50	33.14	54.00	-20.86	Average	134	156	P
2	2483.50	-15.36	78.60	63.24	74.00	-10.76	Peak	134	156	P
3	4960.00	-8.07	18.39	10.32	54.00	-43.68	Average	100	330	P
4	4960.00	-8.07	48.49	40.42	74.00	-33.58	Peak	100	330	P
5	7440.00	-3.52	19.88	16.36	54.00	-37.64	Average	100	240	P
6	7440.00	-3.52	49.98	46.46	74.00	-27.54	Peak	100	240	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



## 6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\*: Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



## 7. Test of Conducted Spurious Emission


### 7.1 Test Limit

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. The band edges was measured and recorded.

### 7.3 Test Setup Layout

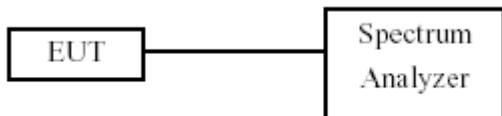

### 7.4 Test Result and Data

Test Result : PASS

Temperature : 24°C


Test Date : Dec. 11, 2018

Humidity : 63%






Note: Test plots refer to the following pages.



## Modulation Type: GFSK, CH00






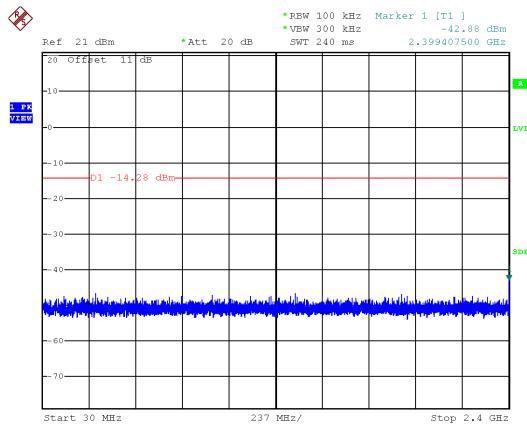








## Modulation Type: GFSK, CH39

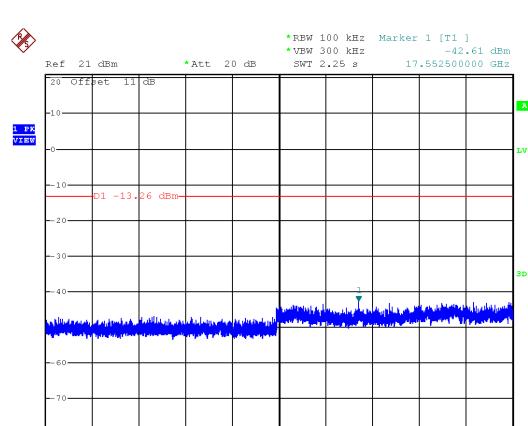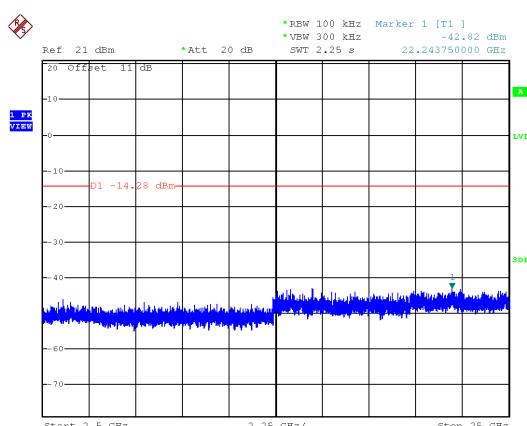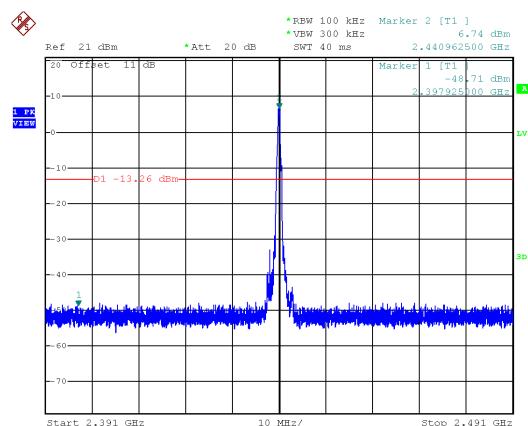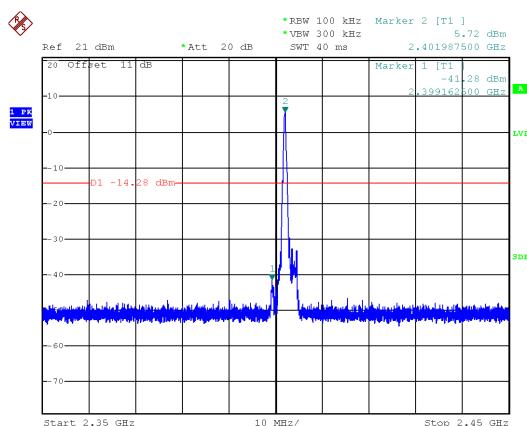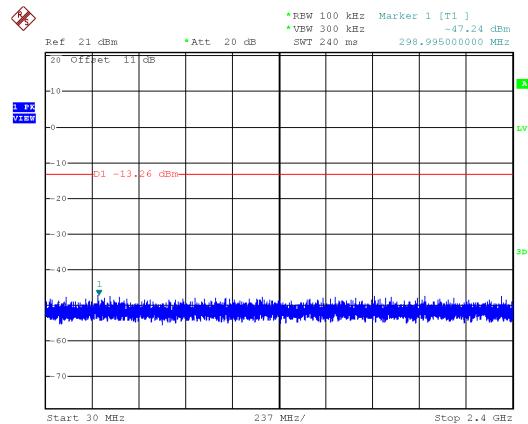




## Modulation Type: GFSK, CH78

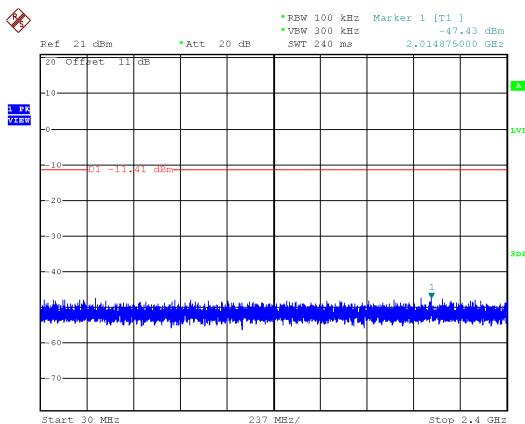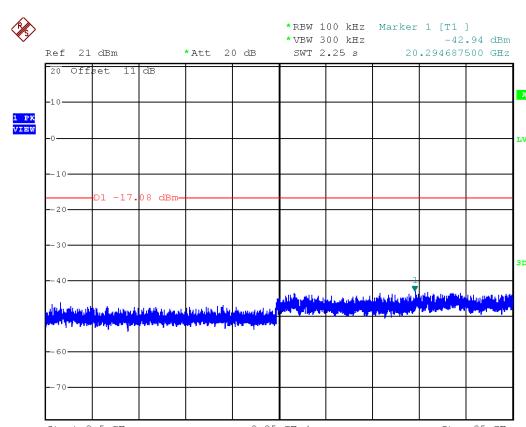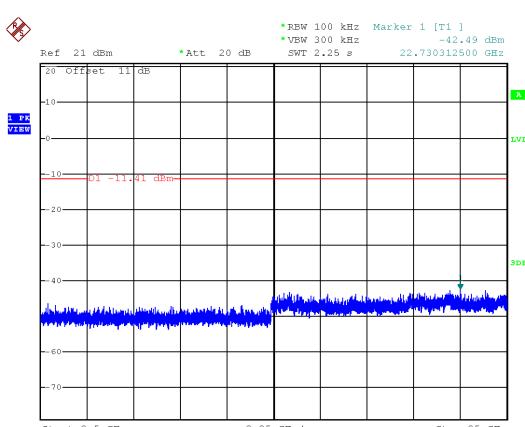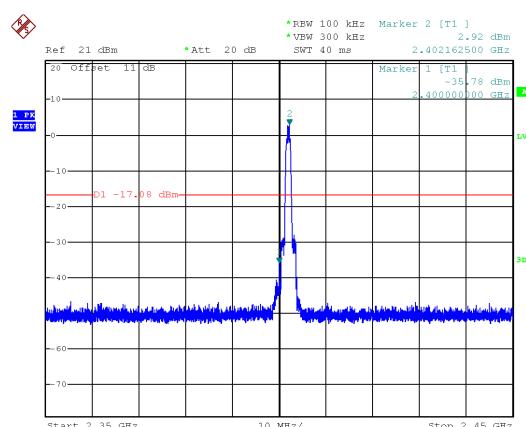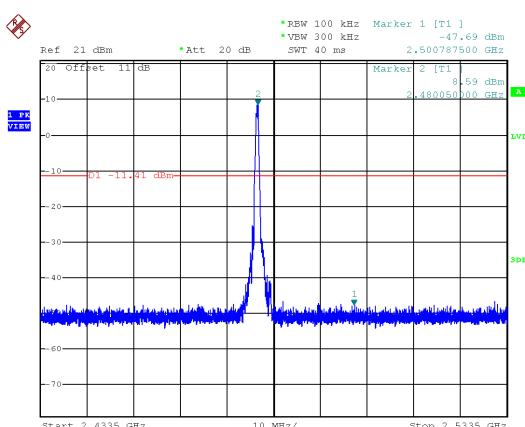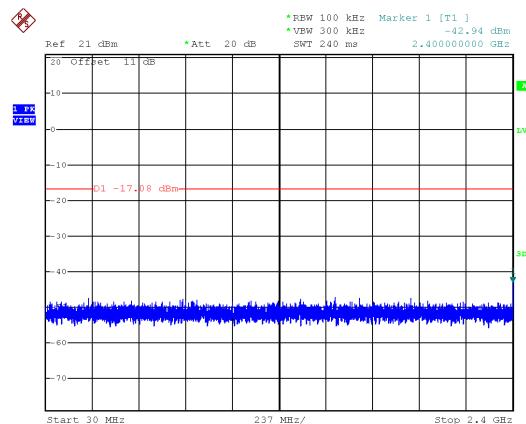Modulation Type:  $\pi/4$ -DQPSK, CH00

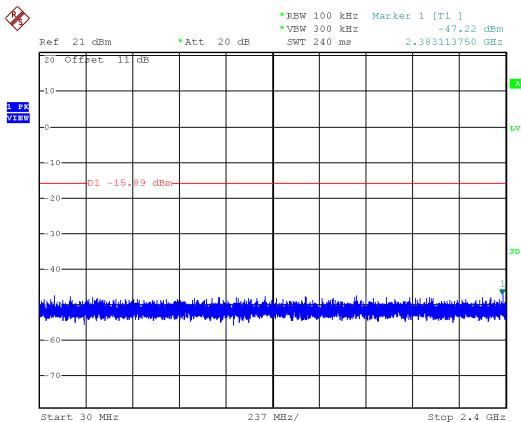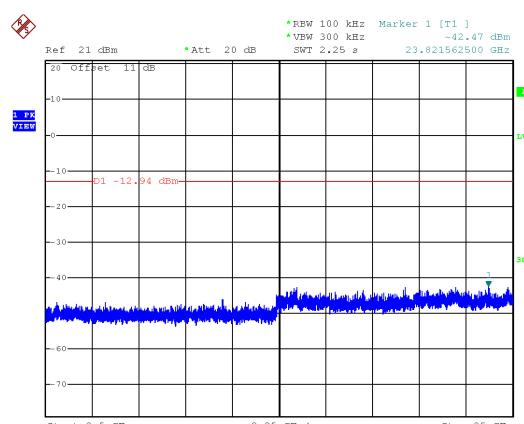
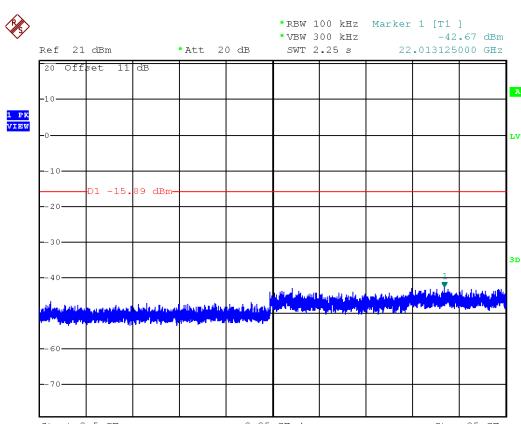
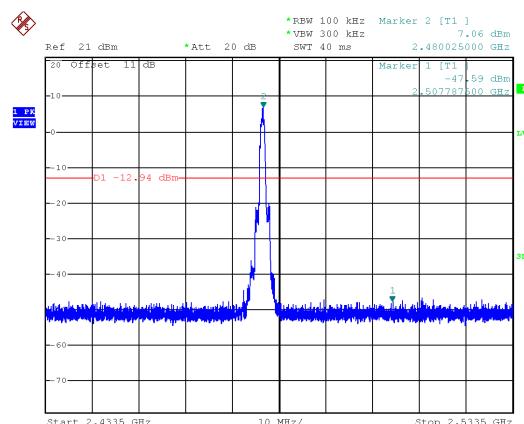
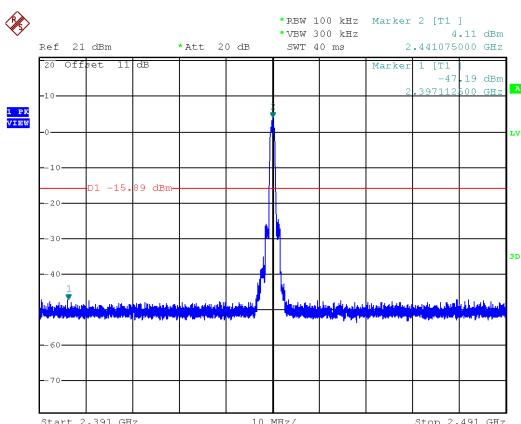
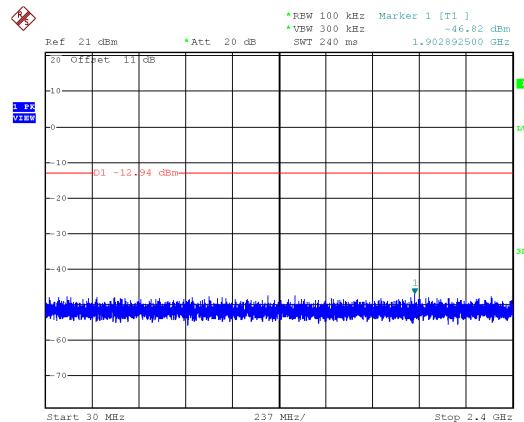
Modulation Type:  $\pi/4$ -DQPSK, CH39Modulation Type:  $\pi/4$ -DQPSK, CH78



## Modulation Type: 8DPSK, CH00



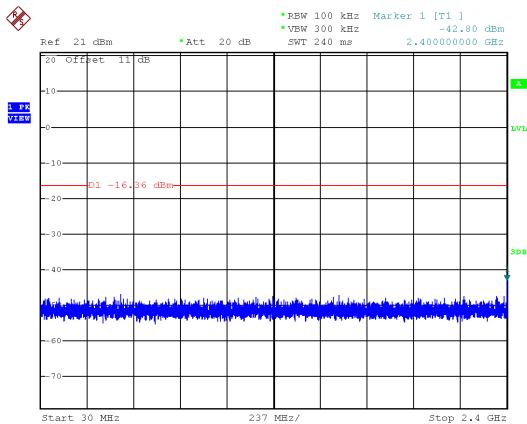


## Modulation Type: 8DPSK, CH39

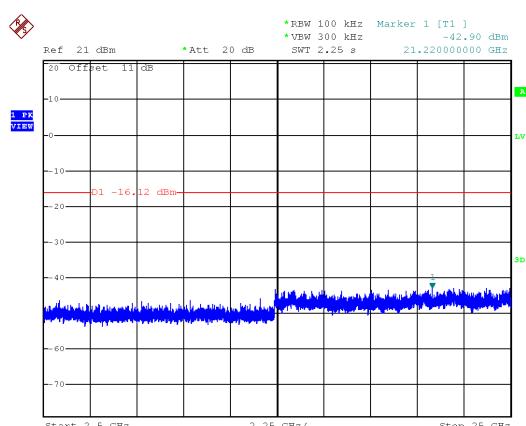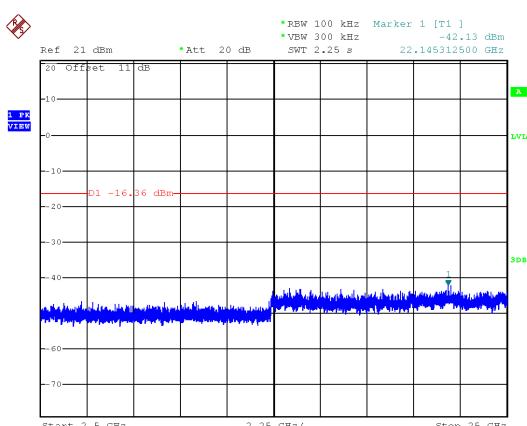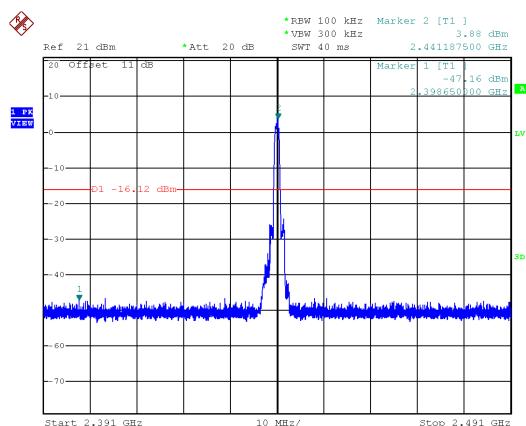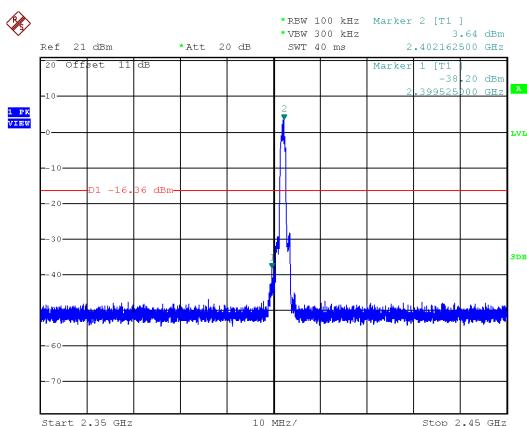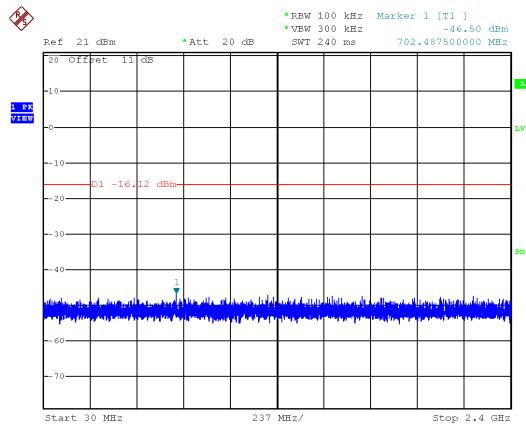




## Modulation Type: 8DPSK, CH78



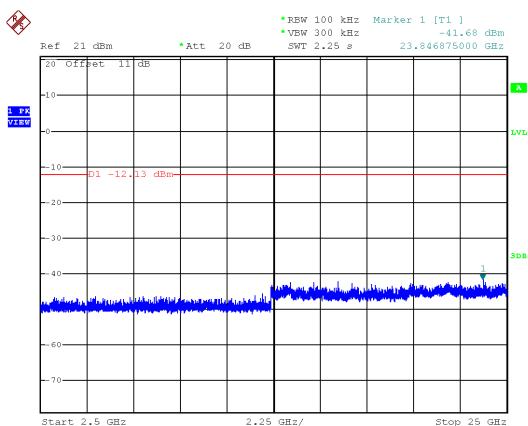
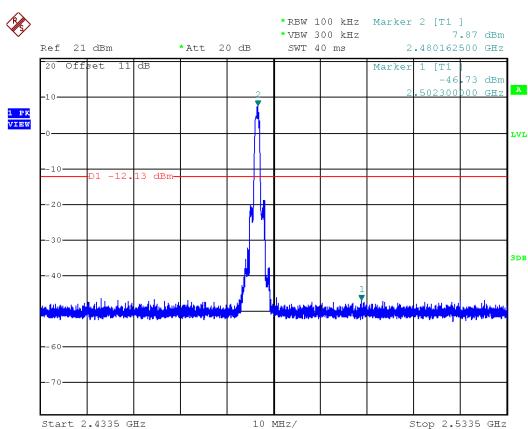
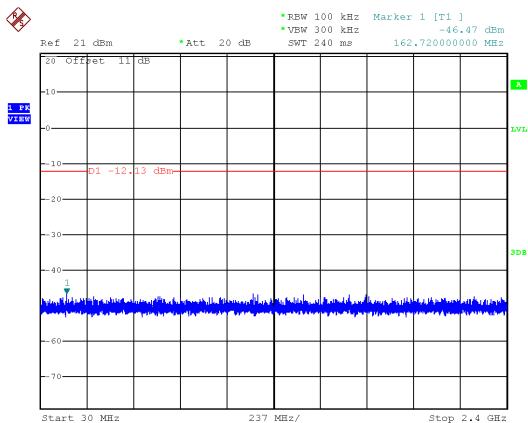




Hopping Mode:  
Modulation Type: GFSK



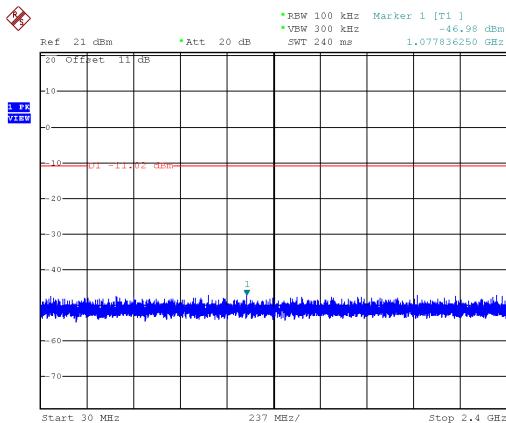


Modulation Type:  $\pi/4$ -DQPSK

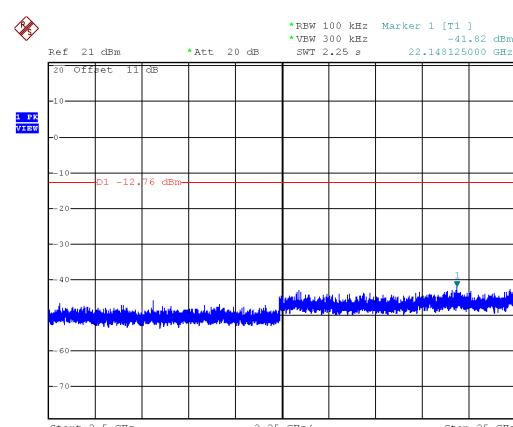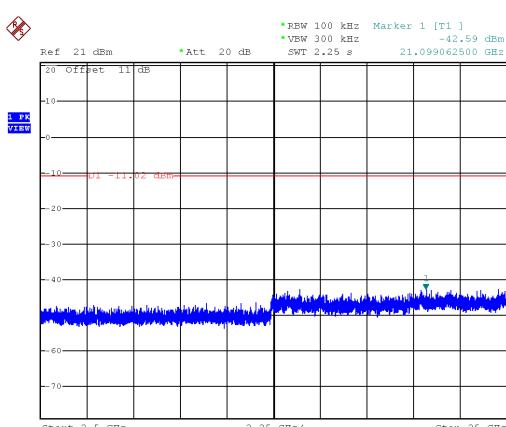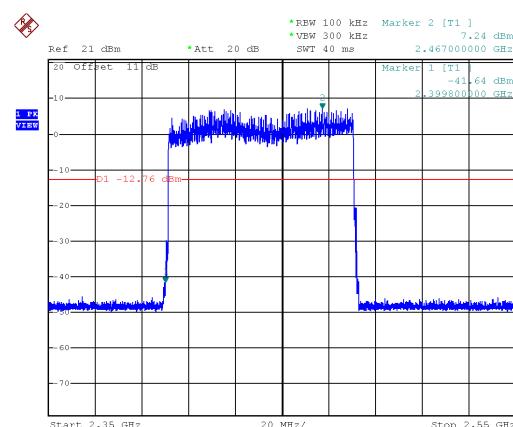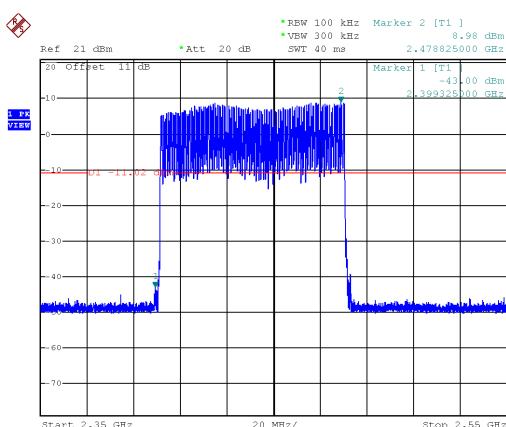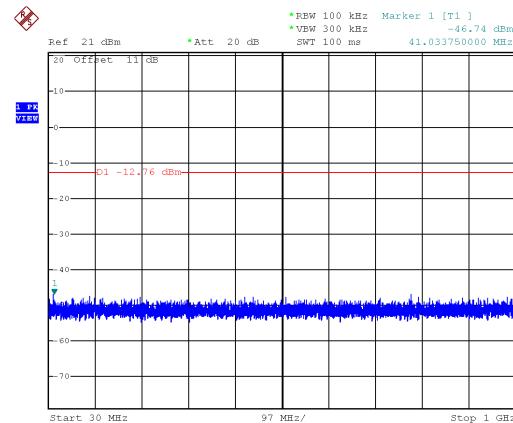



## Modulation Type: 8DPSK

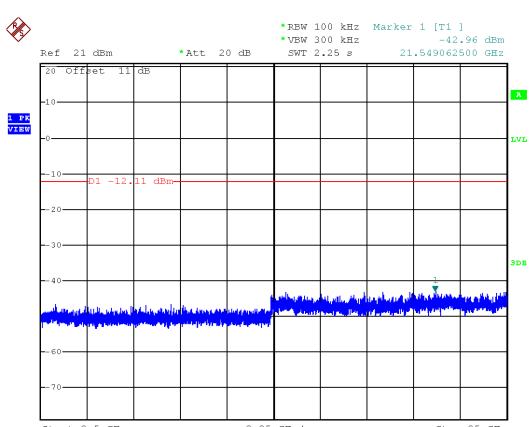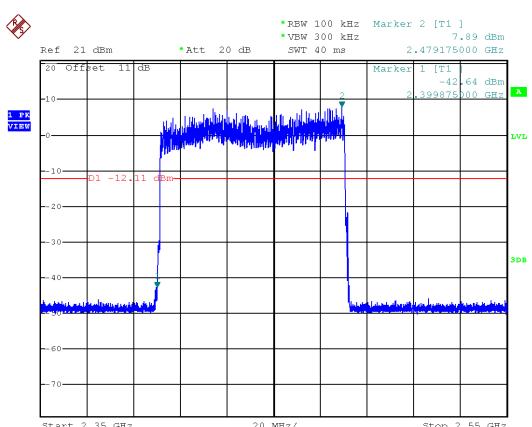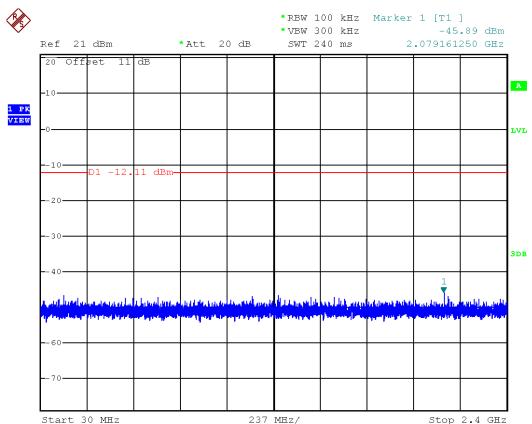



## 8. 20dB Bandwidth Measurement Data


### 8.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 8.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- c. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

### 8.3 Test Setup Layout

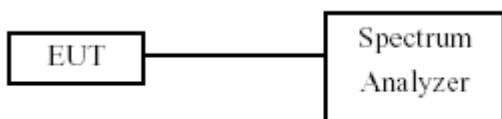

### 8.4 Test Result and Data

Test Result : PASS

Temperature : 24°C


Test Date : Dec. 11, 2018

Humidity : 63%


Modulation Type	Channel	Frequency (MHz)	20dB Bandwidth (MHz)	2/3 20dB Bandwidth (MHz)
GFSK	00	2402	0.960	0.640
	39	2441	0.960	0.640
	78	2480	0.906	0.604
$\pi/4$ -DQPSK	00	2402	1.290	0.860
	39	2441	1.308	0.872
	78	2480	1.314	0.876
8DPSK	00	2402	1.296	0.864
	39	2441	1.302	0.868
	78	2480	1.308	0.872




Modulation Type: GFSK  
CH00

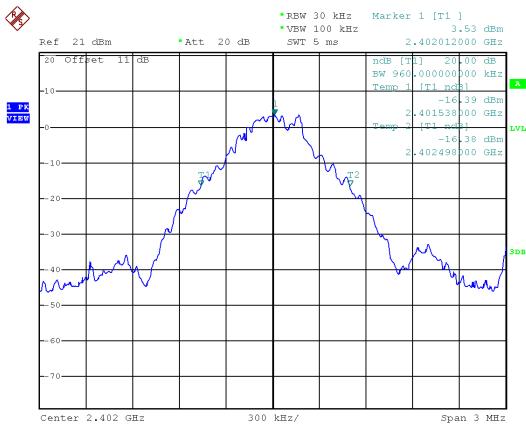


Modulation Type:  $\pi/4$ -DQPSK  
CH00

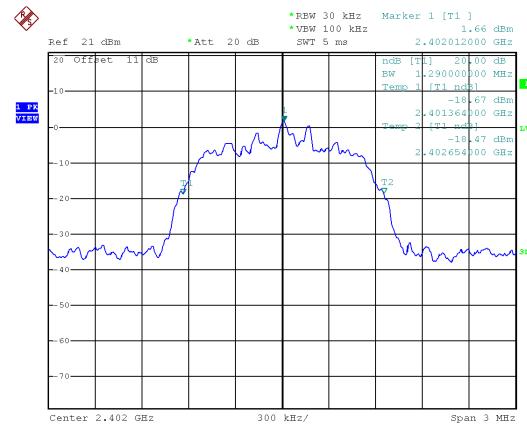


## CH39

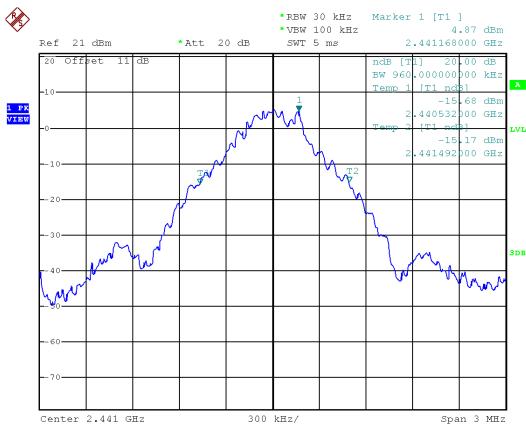


## CH39

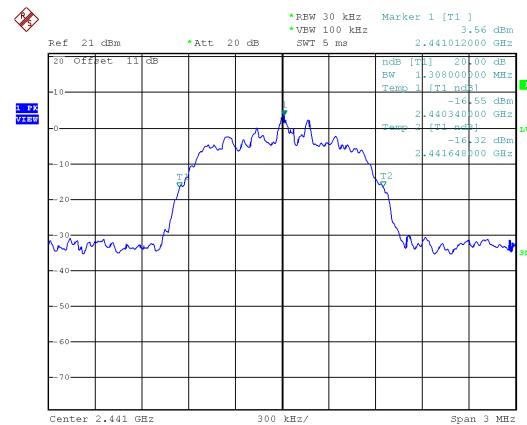

## CH78

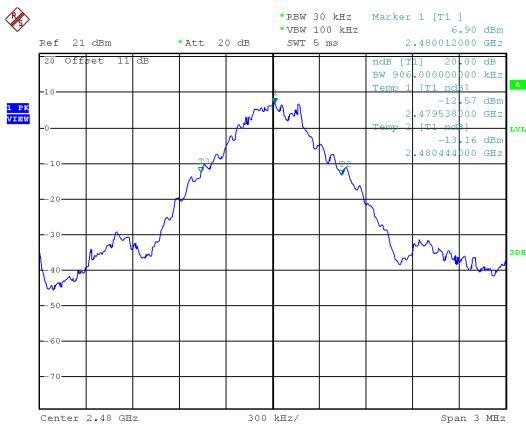


## CH78

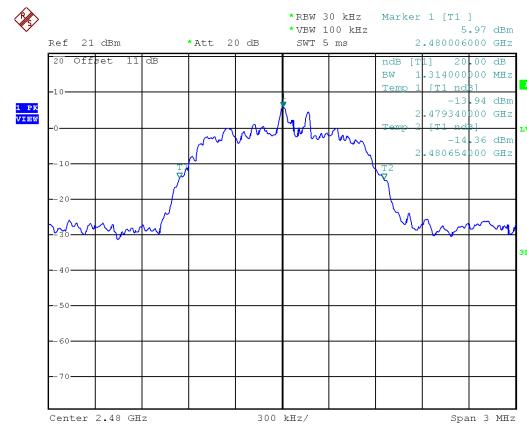





Modulation Type: 8DSPK  
CH00

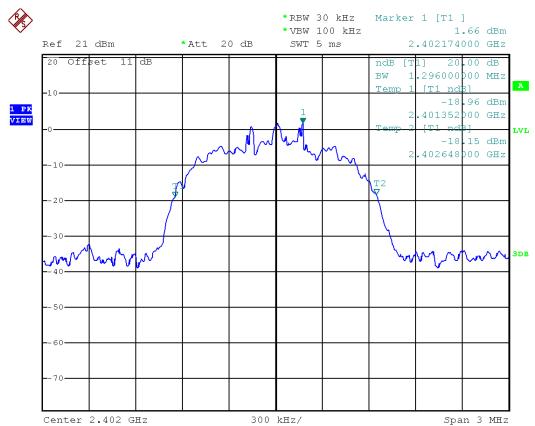

## CH39

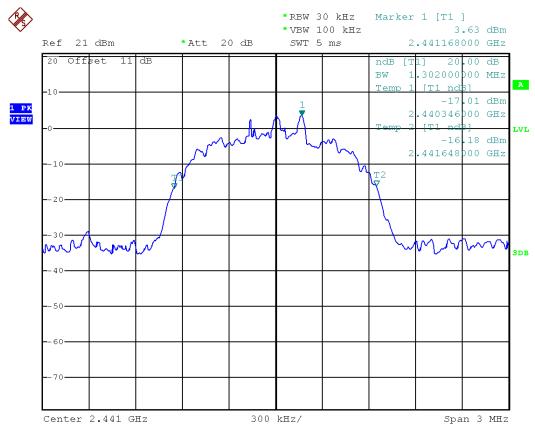

## CH78

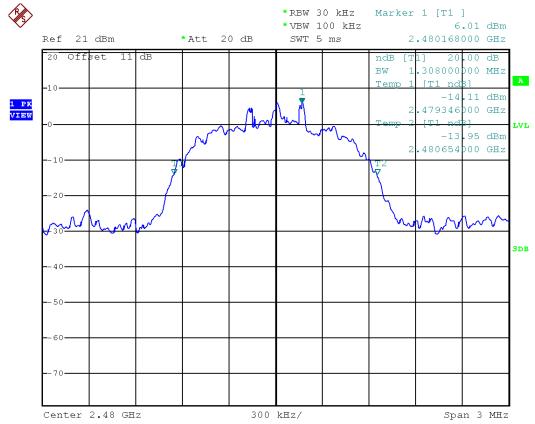



## 9. Frequencies Separation


### 9.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels.

### 9.3 Test Setup Layout

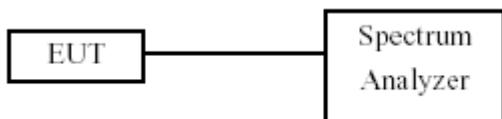

### 9.4 Test Result and Data

Test Result : PASS

Temperature : 24°C


Test Date : Dec. 11, 2018

Humidity : 63%


Modulation Type	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
GFSK	00	2402	1.002	0.64
	39	2441	1.008	0.64
	78	2480	1.008	0.604
$\pi/4$ -DQPSK	00	2402	1.002	0.86
	39	2441	1.008	0.872
	78	2480	1.002	0.876
8DPSK	00	2402	1.008	0.864
	39	2441	1.002	0.868
	78	2480	1.008	0.872




Modulation Type: GFSK  
CH00

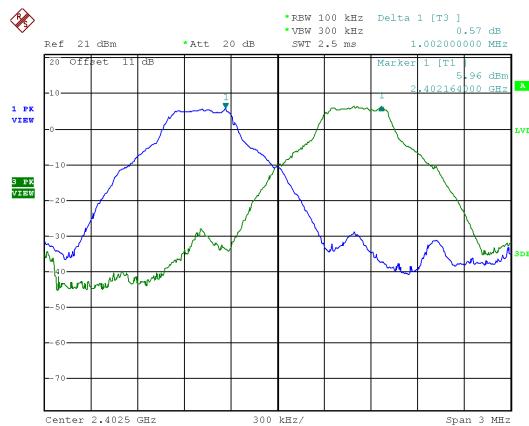


Modulation Type:  $\pi/4$ -DQPSK  
CH00

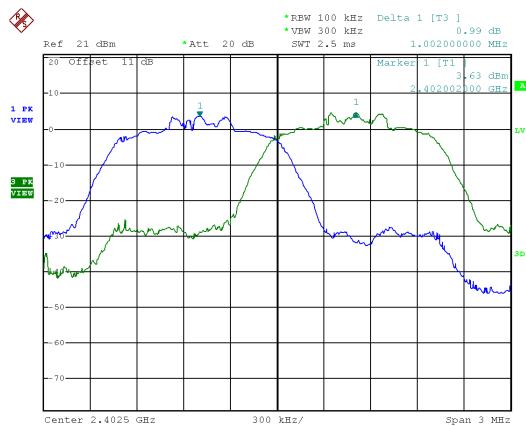


## CH39

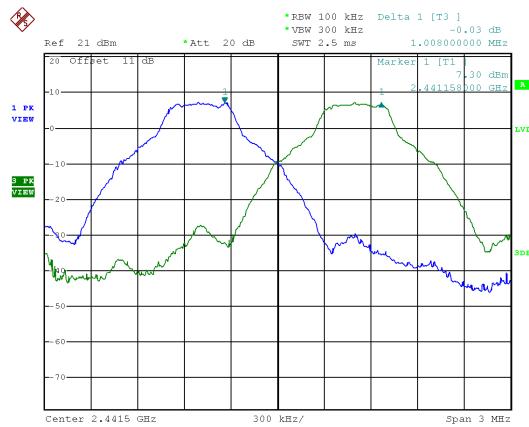

## CH39

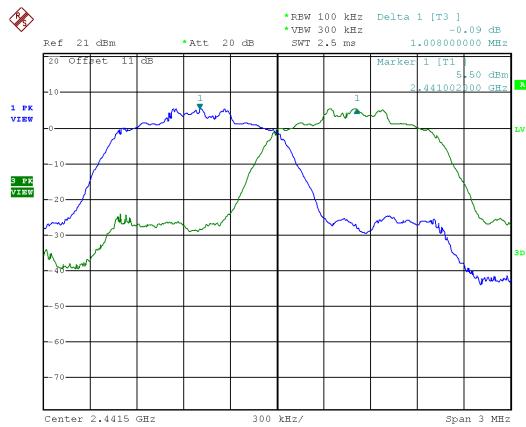

## CH78

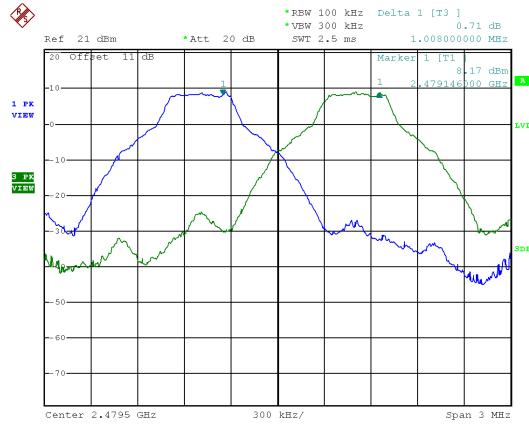


## CH78







Modulation Type: 8DSPK  
CH00

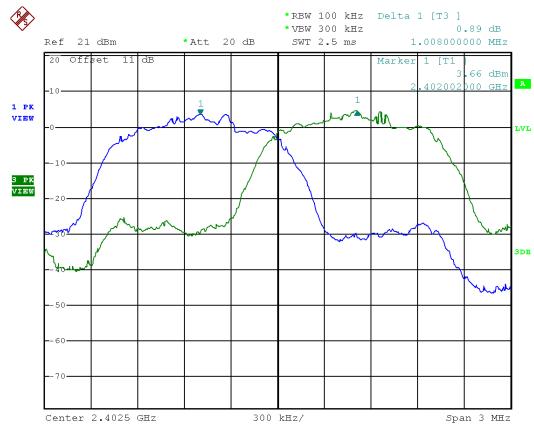

## CH39

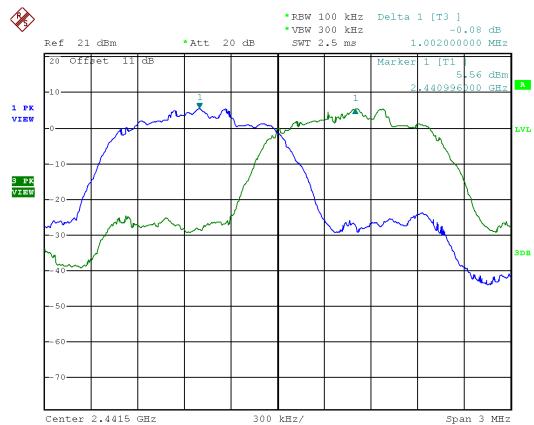

## CH78

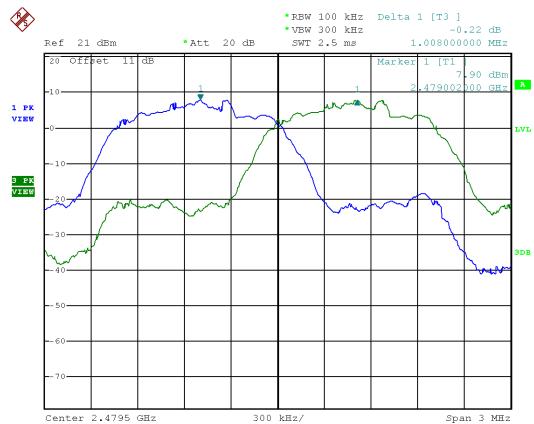



## 10. Dwell Time on each channel


### 10.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 10.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Measure the time duration of one transmission on the measured frequency.

### 10.3 Test Setup Layout

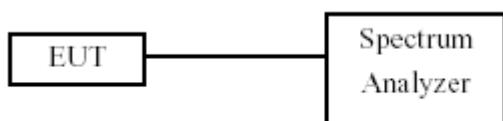

### 10.4 Test Result and Data

Test Result : PASS

Temperature : 24°C

Test Date : Dec. 11, 2018



Humidity : 63%

Test Period = 0.4 (second/ channel) x 79 Channel = 31.6 sec



Modulation Type	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 31.6 (79 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
GFSK (DH1)	2402	0.444	320.10	142.12	400
GFSK (DH3)	2402	1.706	159.90	272.79	400
GFSK (DH5)	2402	3.020	106.81	322.57	400
$\pi/4$ -DQPSK (DH1)	2402	0.448	320.10	143.40	400
$\pi/4$ -DQPSK (DH3)	2402	1.736	159.90	277.59	400
$\pi/4$ -DQPSK (DH5)	2402	3.000	106.81	320.43	400
8DPSK (DH1)	2402	0.444	320.10	142.12	400
8DPSK (DH3)	2402	1.716	159.90	274.39	400
8DPSK (DH5)	2402	3.040	106.81	324.70	400





## Modulation Type: GFSK

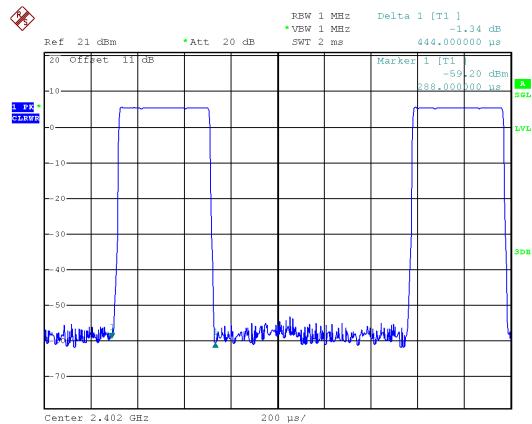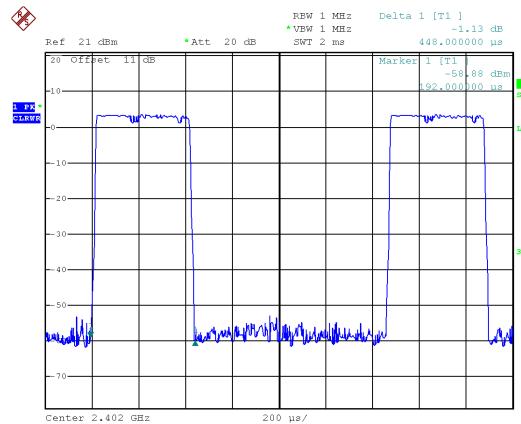Modulation Type:  $\pi/4$ -DQPSK

## Modulation Type: GFSK

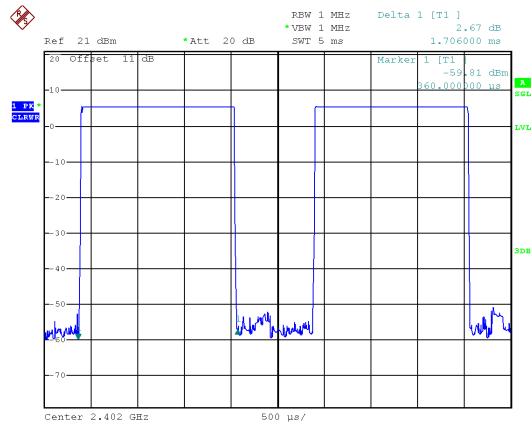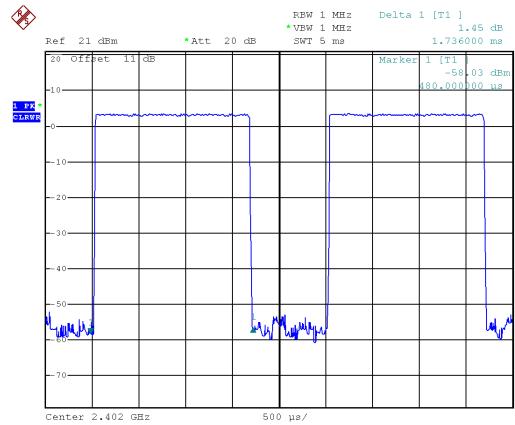
Modulation Type:  $\pi/4$ -DQPSK

## Modulation Type: GFSK

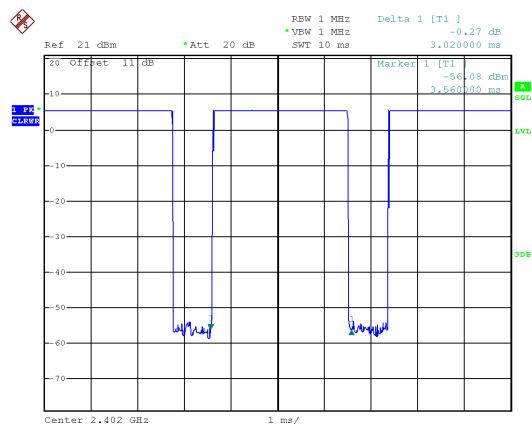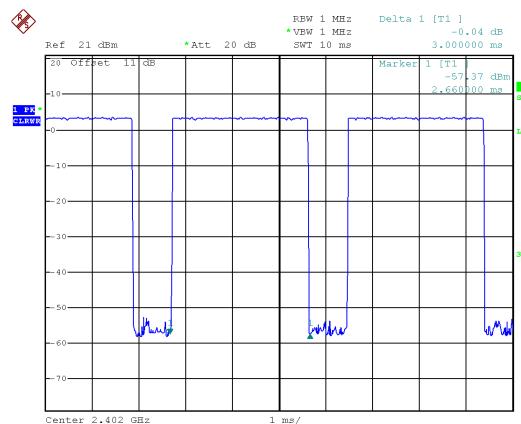
Modulation Type:  $\pi/4$ -DQPSK




## Modulation Type: 8DSPK

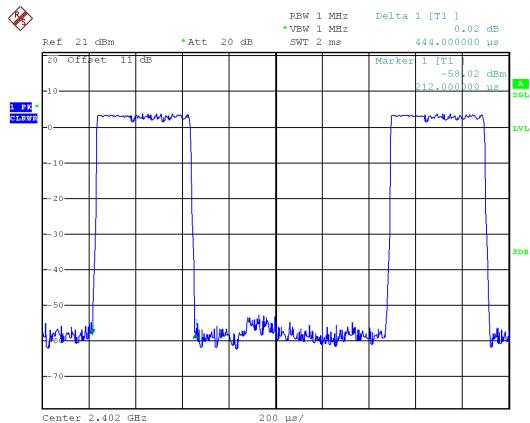

## Modulation Type: 8DSPK

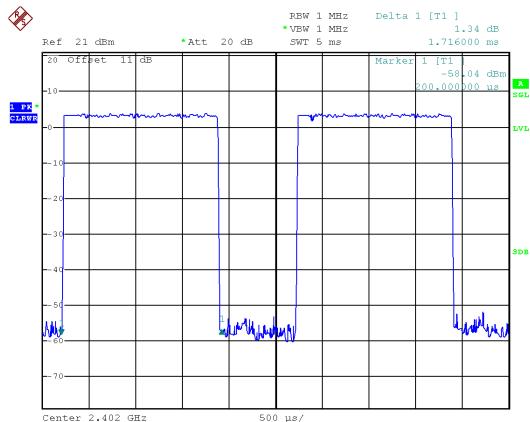

## Modulation Type: 8DSPK

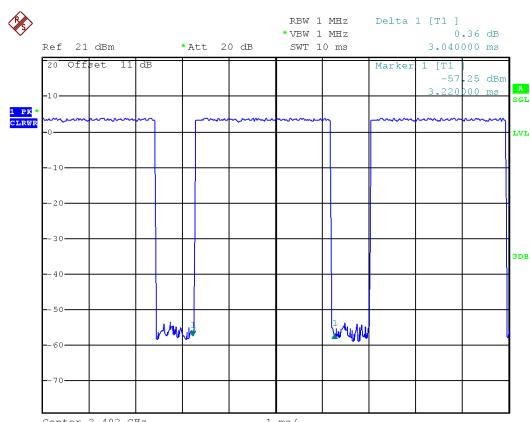



## 11. Number of Hopping Channels


### 11.1 Test Limit

Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

### 11.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. 2. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- c. 3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

### 11.3 Test Setup Layout

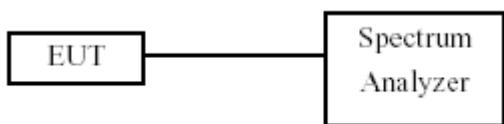



### 11.4 Test Result and Data

Test Result : PASS                      Temperature : 24°C  
Test Date : Dec. 11, 2018              Humidity : 63%


Modulation Type	Hopping Channels
GFSK	79
$\pi/4$ -DQPSK	79
8DPSK	79



## Modulation Type: GFSK

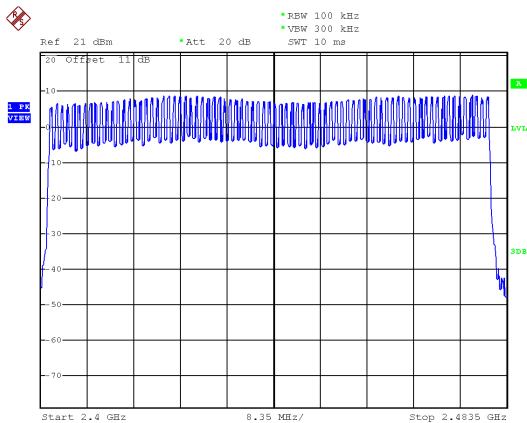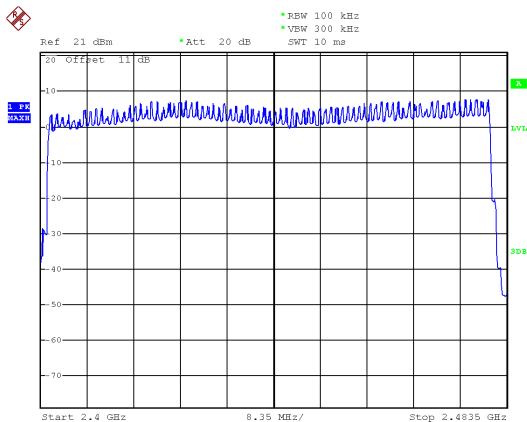Modulation Type:  $\pi/4$ -DQPSK

## Modulation Type: 8DPSK

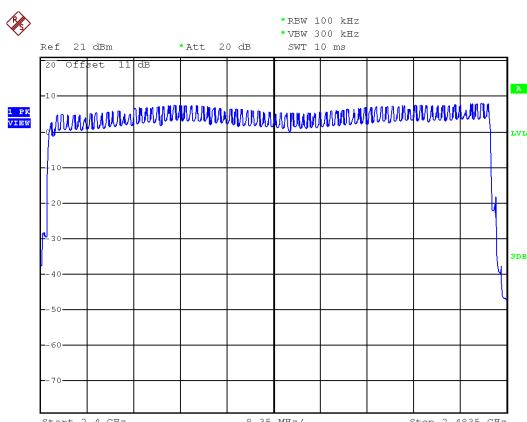



## 12. Maximum Peak Output Power


### 12.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

### 12.2 Test Procedures

The antenna port( RF output )of the EUT was connected to the input( RF input )of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

### 12.3 Test Setup Layout





## 12.4 Test Result and Data

Test Result : PASS                      Temperature : 24°C  
Test Date : Dec. 11, 2018              Humidity : 63%

Modulation Type	Channel	Frequency (MHz)	PK Output Power (dBm)	PK Output Power (mW)
GFSK	0	2402	5.96	3.945
	39	2441	7.44	5.546
	78	2480	9.20	8.318
$\pi/4$ -DQPSK	0	2402	4.65	2.917
	39	2441	6.43	4.395
	78	2480	8.40	6.918
8DPSK	0	2402	4.98	3.148
	39	2441	6.68	4.656
	78	2480	8.58	7.211

Modulation Type	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
GFSK	0	2402	5.70	3.715
	39	2441	7.24	5.297
	78	2480	9.10	8.128
$\pi/4$ -DQPSK	0	2402	2.53	1.791
	39	2441	4.53	2.838
	78	2480	6.91	4.909
8DPSK	0	2402	2.54	1.795
	39	2441	4.51	2.825
	78	2480	6.92	4.920