


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


| | | | |
|---------------|-----------|----------------|-------------------------|
| Temperature | 22°C | Humidity | 54% |
| Test Engineer | John Tang | Configurations | 2.4GHz + 5GHz in Y-axis |

Horizontal

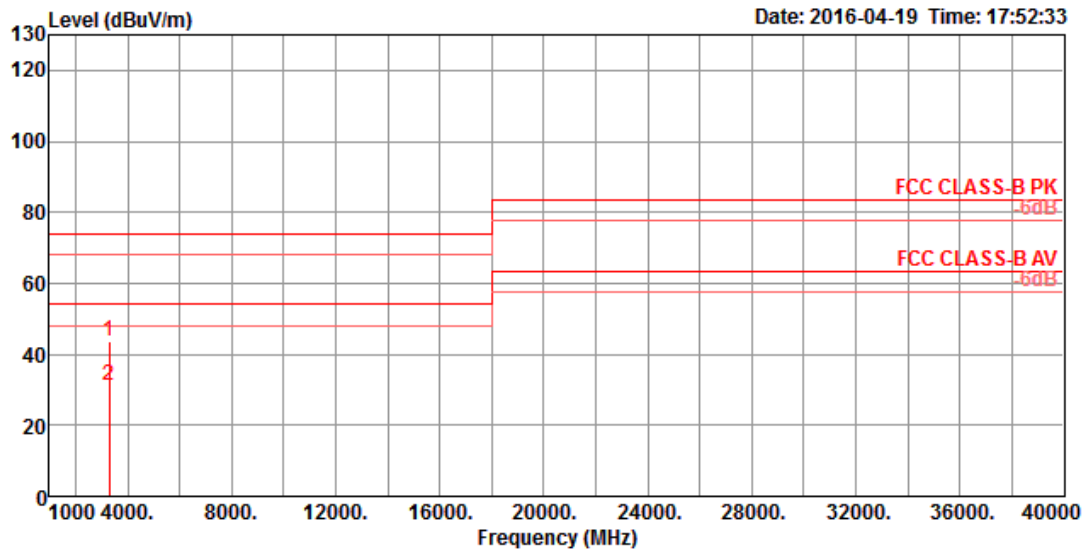

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | A/Pos | T/Pos | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|---------------|-------|-------|-------------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | |
| 1 | 3312.18 | 43.72 | 74.00 | -30.28 | 41.88 | 5.97 | 28.66 | 32.79 | 121 | 341 Peak | HORIZONTAL |
| 2 | 3312.63 | 31.30 | 54.00 | -22.70 | 29.46 | 5.97 | 28.66 | 32.79 | 121 | 341 Average | HORIZONTAL |

Vertical

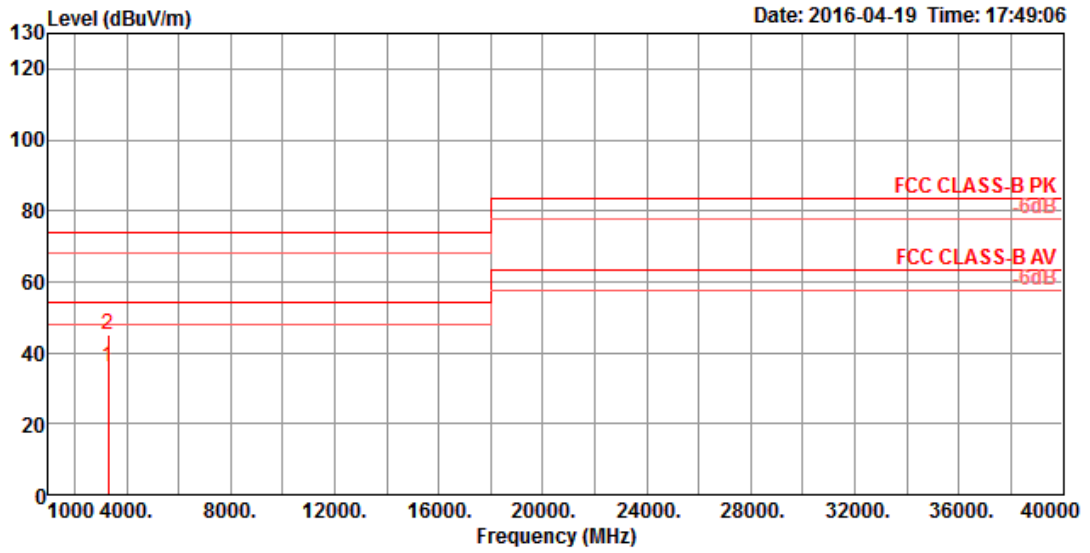

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | A/Pos | T/Pos | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | | |
| 1 | 3312.50 | 36.10 | 54.00 | -17.90 | 34.26 | 5.97 | 28.66 | 32.79 | 106 | 337 | Average | VERTICAL |
| 2 | 3312.79 | 45.12 | 74.00 | -28.88 | 43.28 | 5.97 | 28.66 | 32.79 | 106 | 337 | Peak | VERTICAL |