


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	2.4GHz + 5GHz
Test Mode	Mode 1. CTX-Place EUT 1 in Y-axis		

Horizontal

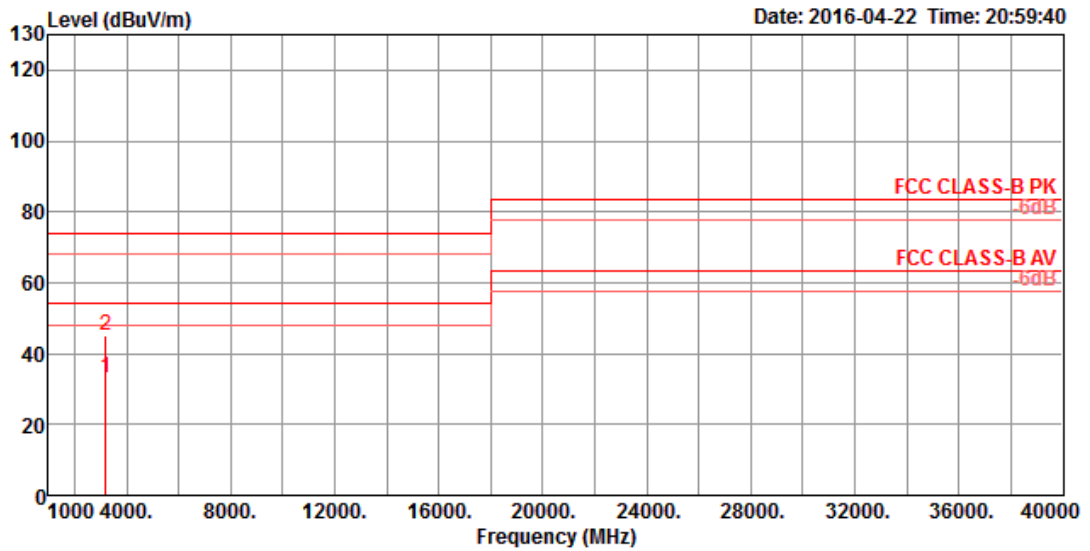

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3187.51	33.24	54.00	-20.76	31.55	4.79	29.74	32.84	113	241	Average	HORIZONTAL
2	3187.51	45.08	74.00	-28.92	43.39	4.79	29.74	32.84	113	241	Peak	HORIZONTAL


Vertical

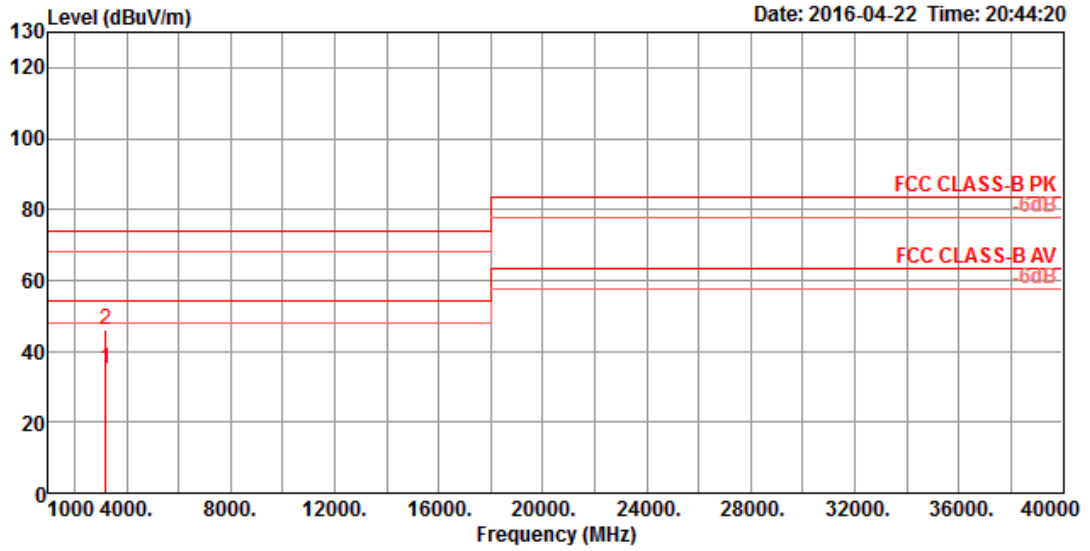

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3187.51	35.01	54.00	-18.99	33.32	4.79	29.74	32.84	101	342	Average	VERTICAL
2	3187.51	46.08	74.00	-27.92	44.39	4.79	29.74	32.84	101	342	Peak	VERTICAL


Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	2.4GHz + 5GHz
Test Mode	Mode 3. CTX-Place EUT 2 in Y-axis		

Horizontal

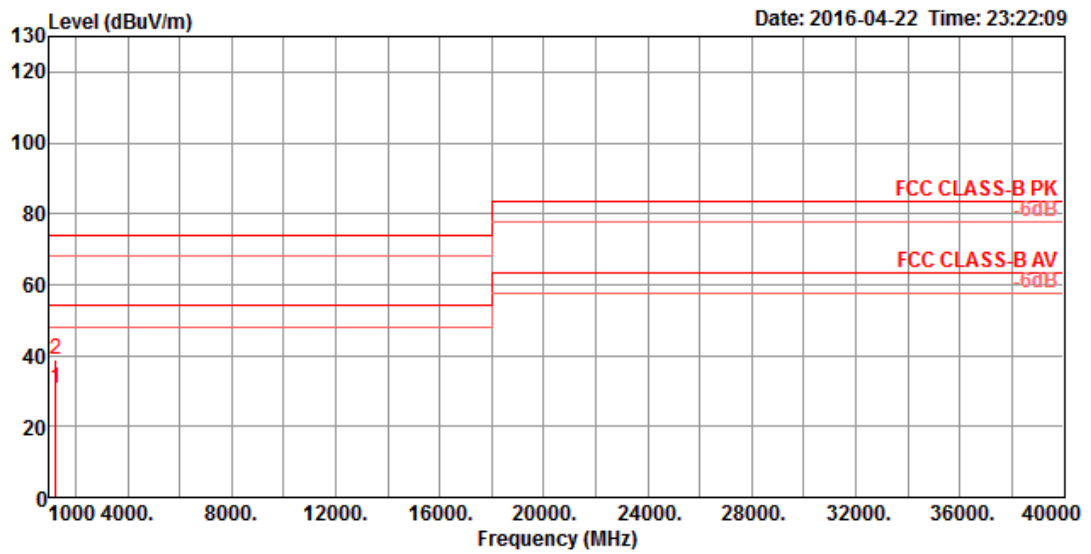

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1249.85	30.78	54.00	-23.22	35.16	2.83	24.64	31.85	103	278	Average	HORIZONTAL
2	1249.85	38.77	74.00	-35.23	43.15	2.83	24.64	31.85	103	278	Peak	HORIZONTAL

Vertical

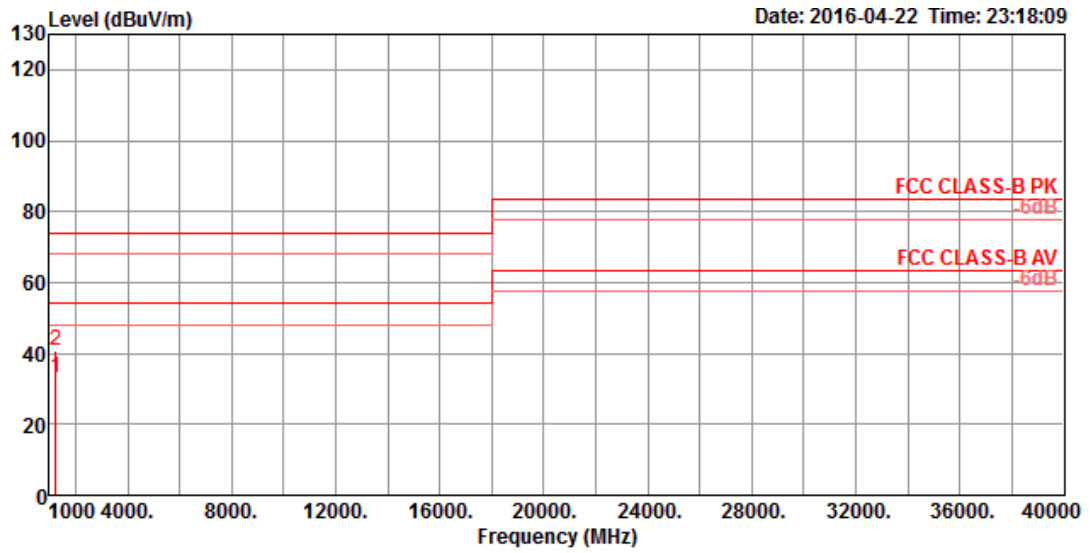

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1249.85	32.95	54.00	-21.05	37.33	2.83	24.64	31.85	112	156 Average	VERTICAL
2	1249.85	40.56	74.00	-33.44	44.94	2.83	24.64	31.85	112	156 Peak	VERTICAL