



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	LITE-ON Technology Corp.
Applicant Address	Bldg. C, 90, Chien 1 Rd., Chung-Ho, New Taipei City, 23585 Taiwan
FCC ID	PPQ-O90N
Manufacturer's company	Lite-On Network Communication (Dongguan) Limited
Manufacturer Address	30#Keji Rd., Yin Hu Industrial Area, Qingxi Town, DongGuan City, Guangdong, China

Product Name	Access Point
Brand Name	MOJO
Model No.	O-90-N, O-90-N30, O-90-N120
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Mar. 25, 2016
Final Test Date	May 05, 2016
Submission Type	Class II Change

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r05 and KDB 662911 D01 v02r01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.





Table of Contents

- 1. VERIFICATION OF COMPLIANCE 1**
- 2. SUMMARY OF THE TEST RESULT 2**
- 3. GENERAL INFORMATION 3**
 - 3.1. Product Details.....3
 - 3.2. Accessories.....4
 - 3.3. Table for Filed Antenna.....5
 - 3.4. Table for Carrier Frequencies7
 - 3.5. Table for Test Modes8
 - 3.6. Table for Testing Locations.....10
 - 3.7. Table for Multiple Listing.....10
 - 3.8. Table for Class II Change10
 - 3.9. Table for AC Power Supply.....11
 - 3.10. Table for Supporting Units11
 - 3.11. Table for Parameters of Test Software Setting12
 - 3.12. EUT Operation during Test12
 - 3.13. Duty Cycle13
 - 3.14. Test Configurations14
- 4. TEST RESULT 17**
 - 4.1. AC Power Line Conducted Emissions Measurement.....17
 - 4.2. Maximum Conducted Output Power Measurement.....23
 - 4.3. Power Spectral Density Measurement26
 - 4.4. 6dB Spectrum Bandwidth Measurement42
 - 4.5. Radiated Emissions Measurement54
 - 4.6. Emissions Measurement87
 - 4.7. Antenna Requirements121
- 5. LIST OF MEASURING EQUIPMENTS 122**
- 6. MEASUREMENT UNCERTAINTY..... 124**
- APPENDIX A. TEST PHOTOS A1 ~ A4**
- APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT B1 ~ B5**



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR631907-01AA	Rev. 01	Initial issue of report	May 18, 2016



1. VERIFICATION OF COMPLIANCE

Product Name : Access Point
Brand Name : MQJO
Model No. : O-90-N, O-90-N30, O-90-N120
Applicant : LITE-ON Technology Corp.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 25, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read "Sam Chen", is written over a horizontal line. The signature is fluid and cursive.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	4.08 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	3.10 dB
4.3	15.247(e)	Power Spectral Density	Complies	1.70 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.30 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.05 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Internal Power Supply or PoE
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	<p><For EUT 1 ></p> <p>IEEE 802.11b: 14.15 MHz IEEE 802.11g: 17.28 MHz IEEE 802.11n MCS0 (HT20): 18.84 MHz IEEE 802.11n MCS0 (HT40): 38.49 MHz</p> <p><For EUT 2 ></p> <p>IEEE 802.11b: 15.37 MHz IEEE 802.11g: 17.37 MHz IEEE 802.11n MCS0 (HT20): 18.84 MHz IEEE 802.11n MCS0 (HT40): 37.63 MHz</p>
Maximum Conducted Output Power	<p><For EUT 1 ></p> <p>IEEE 802.11b: 25.96 dBm IEEE 802.11g: 26.01 dBm IEEE 802.11n MCS0 (HT20): 25.21 dBm IEEE 802.11n MCS0 (HT40): 18.67 dBm</p> <p><For EUT 2 ></p> <p>IEEE 802.11b: 26.30 dBm IEEE 802.11g: 26.04 dBm IEEE 802.11n MCS0 (HT20): 25.11 dBm IEEE 802.11n MCS0 (HT40): 19.42 dBm</p>

Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming

Antenna and Band width

Antenna	Three (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

3.2. Accessories

Power cable*1, Non-shielded, 5m.

3.3. Table for Filed Antenna

<For EUT 1 >

Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	LITE-ON	WP939i (30x30 deg.)	PIFA Antenna	MMCX	5.80	12.64
2	LITE-ON	WP939i (30x30 deg.)	PIFA Antenna	MMCX	4.89	11.71
3	LITE-ON	WP939i (30x30 deg.)	PIFA Antenna	MMCX	5.64	11.28
Correlated Composite Gain (3TX 1S)					10.22	16.50
Uncorrelated Composite Gain (3TX 3S)					5.46	11.76

Note: The EUT has three antennas.

For 2.4GHz function:

For IEEE 802.11b/g/n mode (3TX/3RX):

Ant. 1, Ant. 2 and Ant. 3 can be used as transmitting/receiving antenna.


Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac mode (3TX/3RX):

Ant. 1, Ant. 2 and Ant. 3 can be used as transmitting/receiving antenna.

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

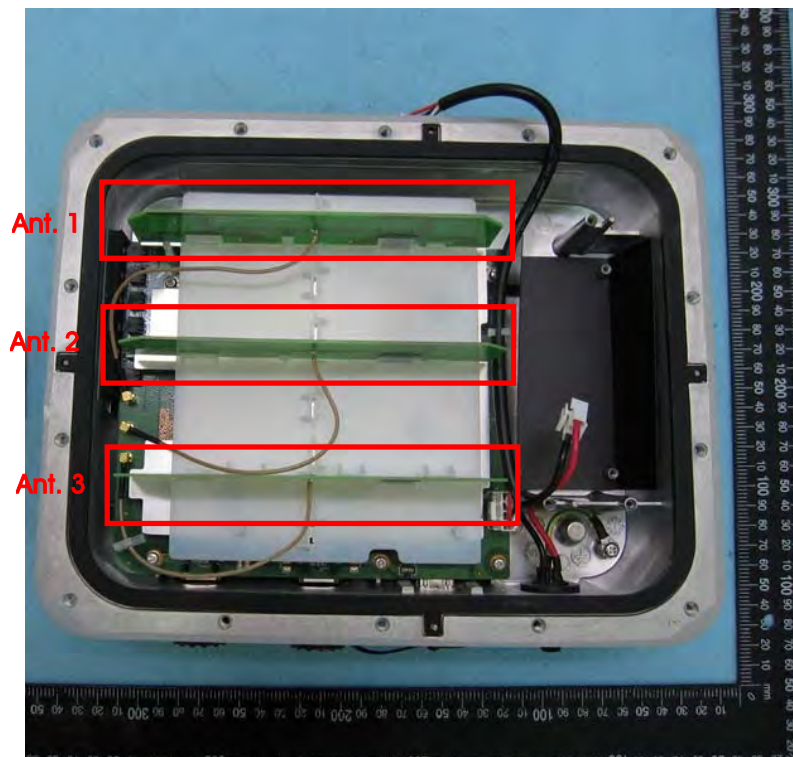

<For EUT 2>

Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	LITE-ON	WP939i (30x120 deg.)	PIFA Antenna	MMCX	6.77	8.57
2	LITE-ON	WP939i (30x120 deg.)	PIFA Antenna	MMCX	6.47	9.34
3	LITE-ON	WP939i (30x120 deg.)	PIFA Antenna	MMCX	6.56	8.40
Correlated Composite Gain (3TX 1S)					11.37	13.55
Uncorrelated Composite Gain (3TX 3S)					6.60	8.79

Note: The EUT has three antennas.

For 2.4GHz function:

For IEEE 802.11b/g/n mode (3TX/3RX):

Ant. 1, Ant. 2 and Ant. 3 can be used as transmitting/receiving antenna.


Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac mode (3TX/3RX):

Ant. 1, Ant. 2 and Ant. 3 can be used as transmitting/receiving antenna.

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

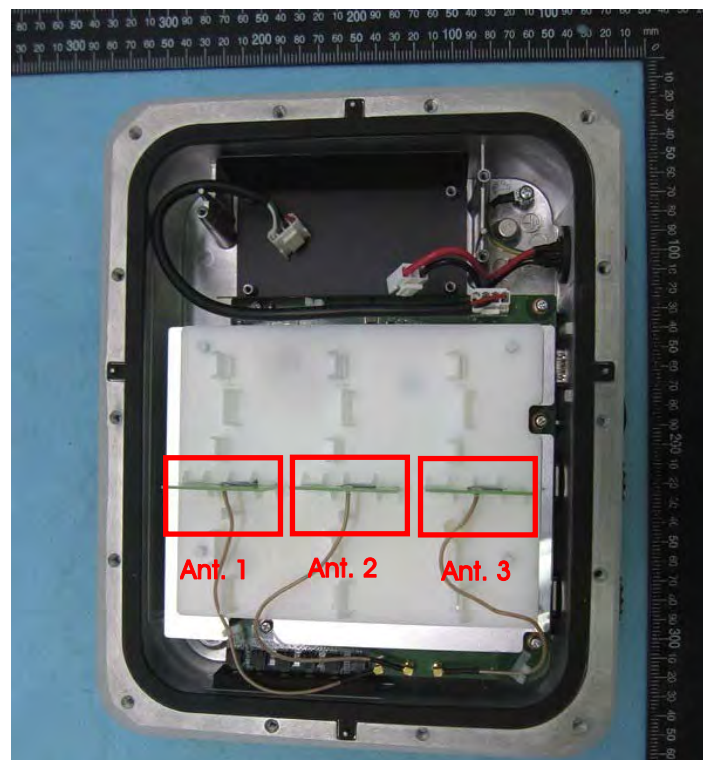

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Ant.
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3

Note: The PoE is for measurement only, would not be marketed and the information as below:

Support Unit	Brand	Model	FCC ID
PoE	Microsemi	PD-9501-10G/AC	DoC

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT 1 with AC Power Supply 1

Mode 2. EUT 1 with AC Power Supply 2

Mode 3. EUT 1 with PoE

Mode 4. EUT 2 with AC Power Supply 1

Mode 5. EUT 2 with AC Power Supply 2

Mode 6. EUT 2 with PoE

Mode 1 and Mode 5 generated the worst test result, so it was recorded in this report.

For Radiated Emission test <Below 1GHz>:

Mode 1. EUT 1 with AC Power Supply 1 in Y-axis

Mode 2. EUT 1 with AC Power Supply 1 in Z-axis

Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.

Mode 3. EUT 1 with AC Power Supply 2 in Y-axis

Mode 4. EUT 1 with PoE in Y-axis

Mode 5. EUT 2 with AC Power Supply 1 in Y-axis

Mode 6. EUT 2 with AC Power Supply 1 in Z-axis

Mode 5 has been evaluated to be the worst case among Mode 5~6, thus measurement for Mode 7~8 will follow this same test mode.

Mode 7. EUT 2 with AC Power Supply 2 in Y-axis

Mode 8. EUT 2 with PoE in Y-axis

Mode 3 and Mode 7 generated the worst test result, so it was recorded in this report.

For Radiated Emission test <Above 1GHz>:

Radiated Emissions above 1GHz test was performed at its 2-axis (Y-axis and Z-axis). Y-axis was the worst case, so it's recorded in this report.

Mode 1. CTX-Place EUT 1 in Y-axis

Mode 2. CTX-Place EUT 2 in Y-axis

All test results were recorded in the report.

For Radiated Emission Co-location:

Mode 1. CTX-Place EUT 1 in Y-axis

Mode 2. CTX-Place EUT 1 in Z-axis

Mode 3. CTX-Place EUT 2 in Y-axis

Mode 4. CTX-Place EUT 2 in Z-axis

Mode 1 and Mode 3 is the worst case, so it was selected to record in this test report.

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA631907-01) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple Listing

The EUT has three model names which are identical to each other in all aspects except for the following table:

Model Name	EUT	Description	Remark
O-90-N	-	The difference between these models is the antennas equipped.	Original
O-90-N30	EUT 1		New
O-90-N120	EUT 2		New

Note: Only the new models were tested and recorded in this test report.

3.8. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR631907AA

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding two model names: O-90-N30, O-90-N120	1. AC Power Line Conducted
2. Adding two sets of new antennas with higher gains. (1) Model name: O-90-N30 / Brand: LITE-ON / Model: WP939i (30x30 deg.) / Type: PIFA Antenna (2) Model name: O-90-N120 / Brand: LITE-ON / Model: WP939i (30x120 deg.) / Type: PIFA Antenna	2. Maximum Conducted Output Power 3. Power Spectral Density 4. 6dB Spectrum Bandwidth 5. Radiated Emissions 6. Emissions Measurement 7. Radiated Emission Co-location

3.9. Table for AC Power Supply

The EUT with two kinds of AC power supply system:

AC Power Supply System	Brand Name	Model Name
AC Power Supply 1	FSP	FSP045-1P65
AC Power Supply 2	ASIAN POWER	NW-30A54

3.10. Table for Supporting Units

For Test Site No: CO01-CB

Test Mode: Mode 1

Support Unit	Brand	Model	FCC ID
NB*5	DELL	E6430	DoC
Device	MOJO	O-90-N30	DoC

Test Mode: Mode 5

Support Unit	Brand	Model	FCC ID
NB*5	DELL	E6430	DoC
Device	MOJO	O-90-N120	DoC

For Test Site No: 03CH01-CB<Below 1GHz>

Test Mode: Mode 3

Support Unit	Brand	Model	FCC ID
NB*3	DELL	E4300	DoC
NB*2	Apple	Mac Book	DoC
Device	MOJO	O-90-N30	DoC

Test Mode: Mode 7

Support Unit	Brand	Model	FCC ID
NB*3	DELL	E4300	DoC
NB*2	Apple	Mac Book	DoC
Device	MOJO	O-90-N120	DoC

For Test Site No: 03CH01-CB<Above 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
PoE	Microsemi	PD-9501-10G/AC	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
PoE	Microsemi	PD-9501-10G/AC	DoC

3.11. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For EUT 1 >

Test Software Version	Artgui					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	17	21.5	15	-	-	-
802.11g	14	22	12	-	-	-
802.11n MCS0 HT20	12	20.5	10.5	-	-	-
802.11n MCS0 HT40	-	-	-	8	14	8

<For EUT 2 >

Test Software Version	Artgui					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	19	21.5	18	-	-	-
802.11g	13.5	21	14	-	-	-
802.11n MCS0 HT20	13	20	10.5	-	-	-
802.11n MCS0 HT40	-	-	-	9	14	9.5

3.12. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.13. Duty Cycle

<For EUT 1>


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100.00%	0.00	0.01
802.11g	2.020	2.070	97.58%	0.11	0.50
802.11n MCS0 HT20	1.880	1.940	96.91%	0.14	0.53
802.11n MCS0 HT40	0.900	0.970	92.78%	0.33	1.11

<For EUT 2>

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100.00%	0.00	0.01
802.11g	1.995	2.067	96.51%	0.15	0.50
802.11n MCS0 HT20	1.883	1.939	97.11%	0.13	0.53
802.11n MCS0 HT40	0.925	0.973	95.06%	0.22	1.08

3.14. Test Configurations


3.14.1. AC Power Line Conduction Emissions Test Configuration

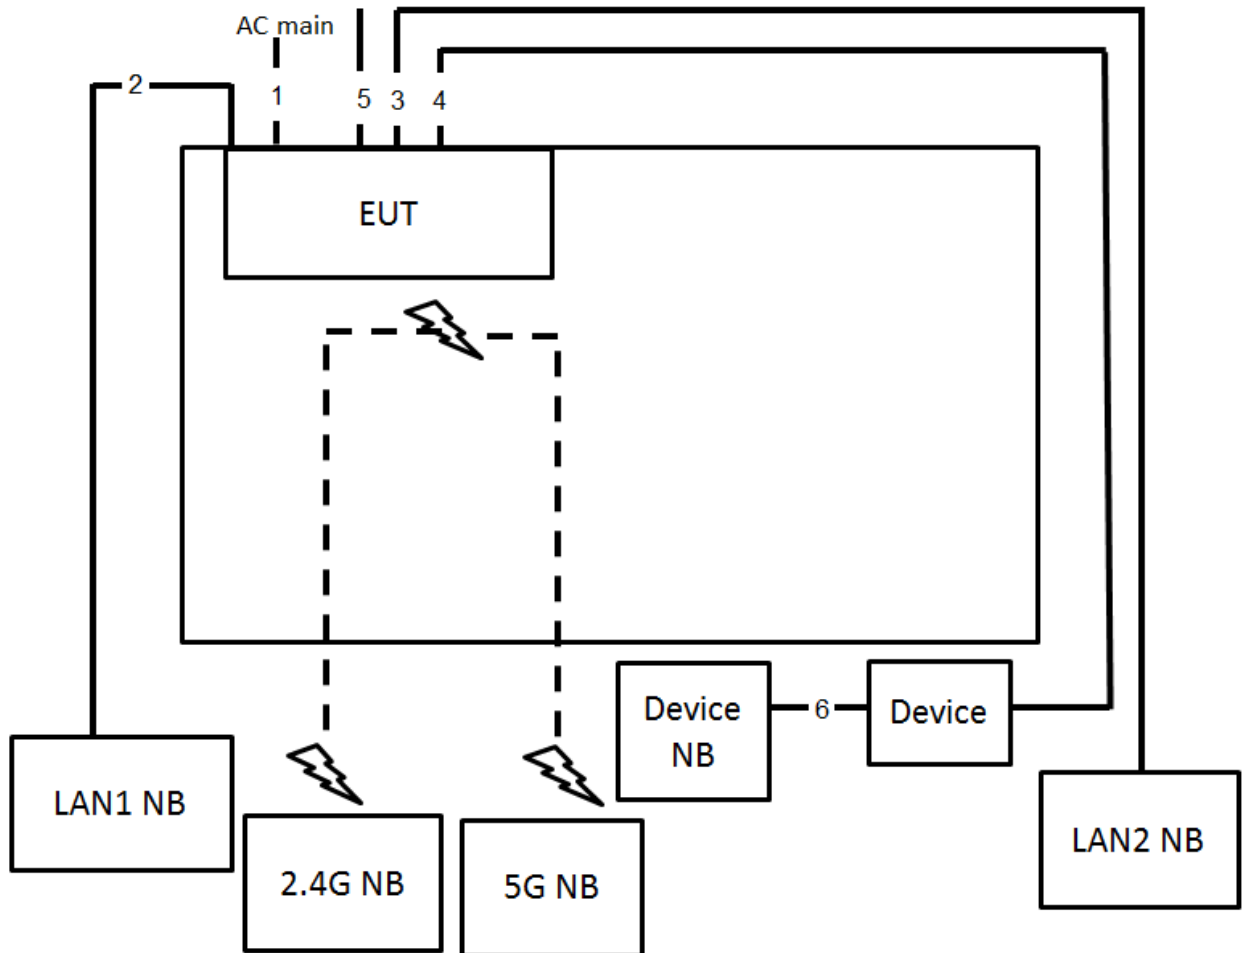

Item	Connection	Shielded	Length
1	Power cable	No	5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	Fiber cable	No	10m
5	Ground cable	Yes	1.5m
6	RJ-45 cable	No	1.5m


3.14.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

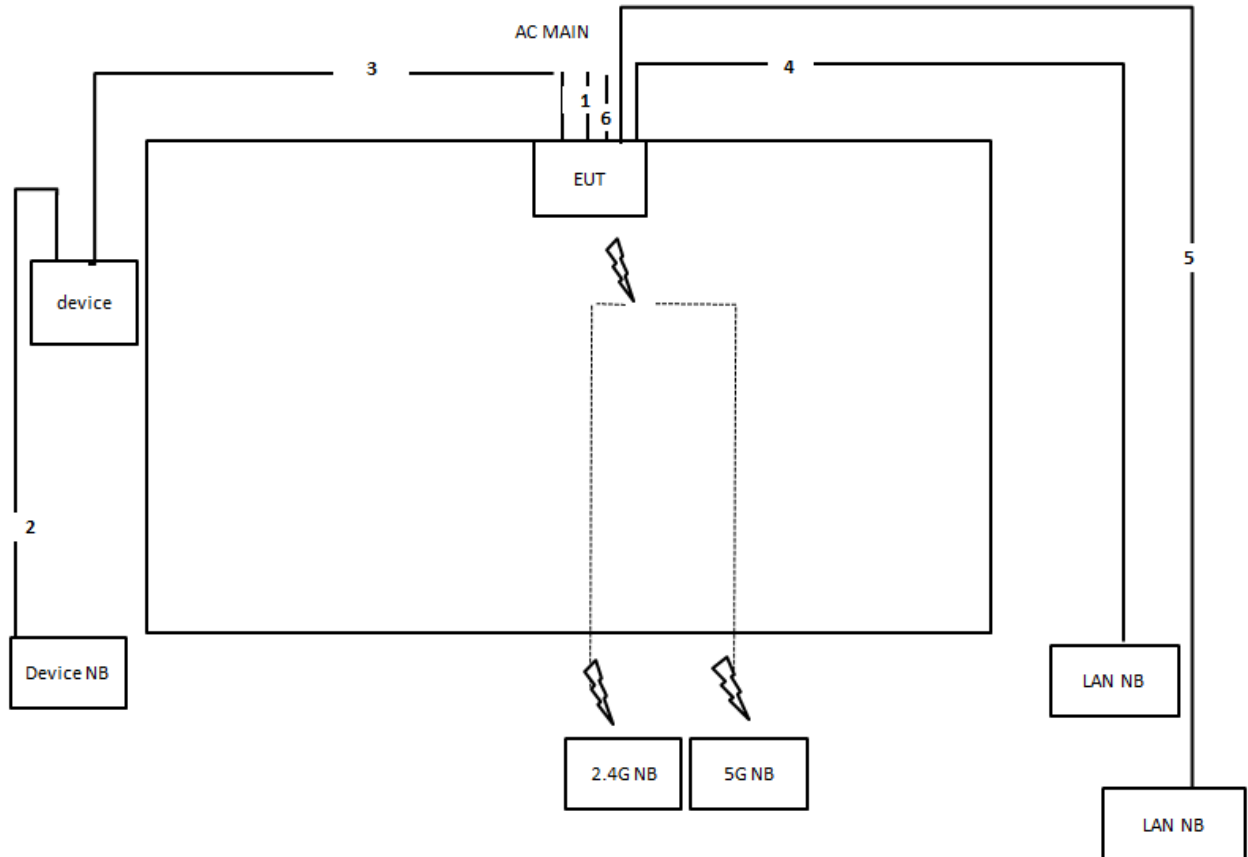

Item	Connection	Shielded	Length
1	Power cable	No	5m
2	RJ-45 cable	No	1.5m
3	Fiber cable	No	10m
4	RJ-45 cable	No	10m
5	RJ-45 cable	No	10m
6	Ground cable	Yes	1.5m

Test Configuration: above 1GHz

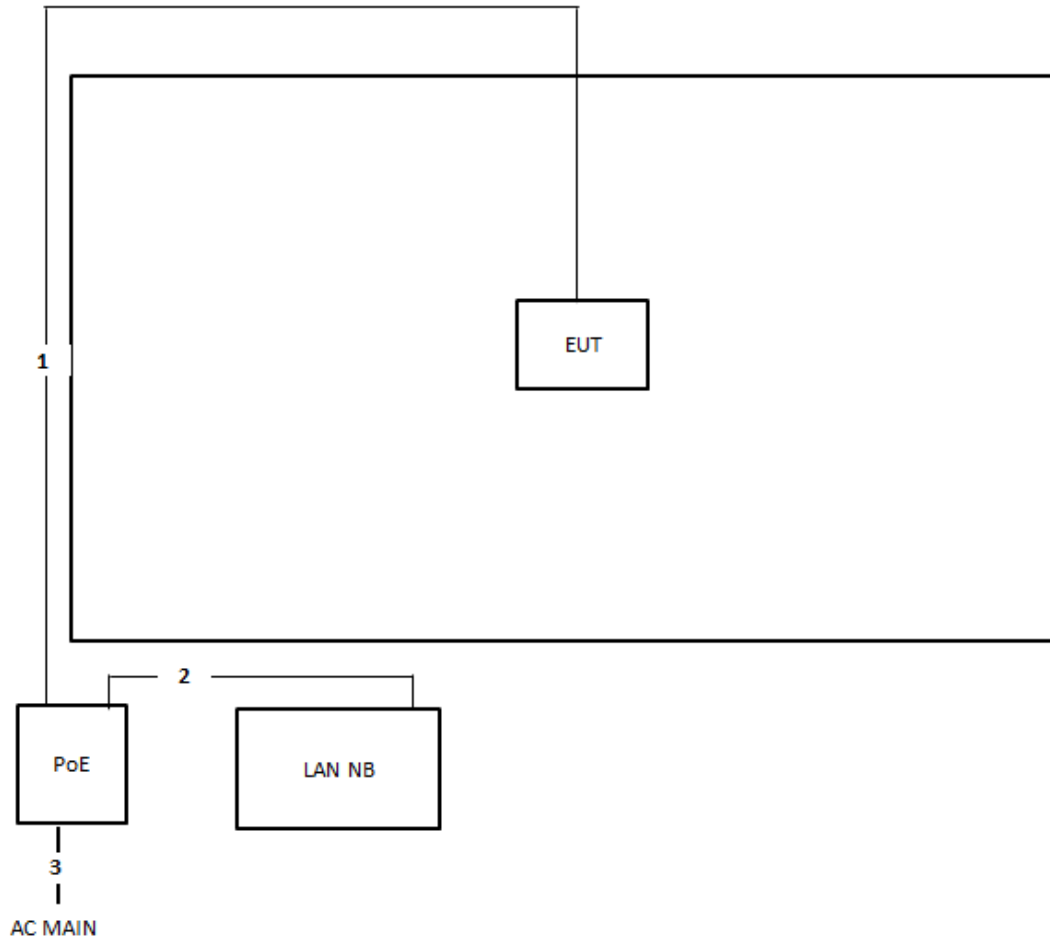

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	Power cable	No	1.5m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

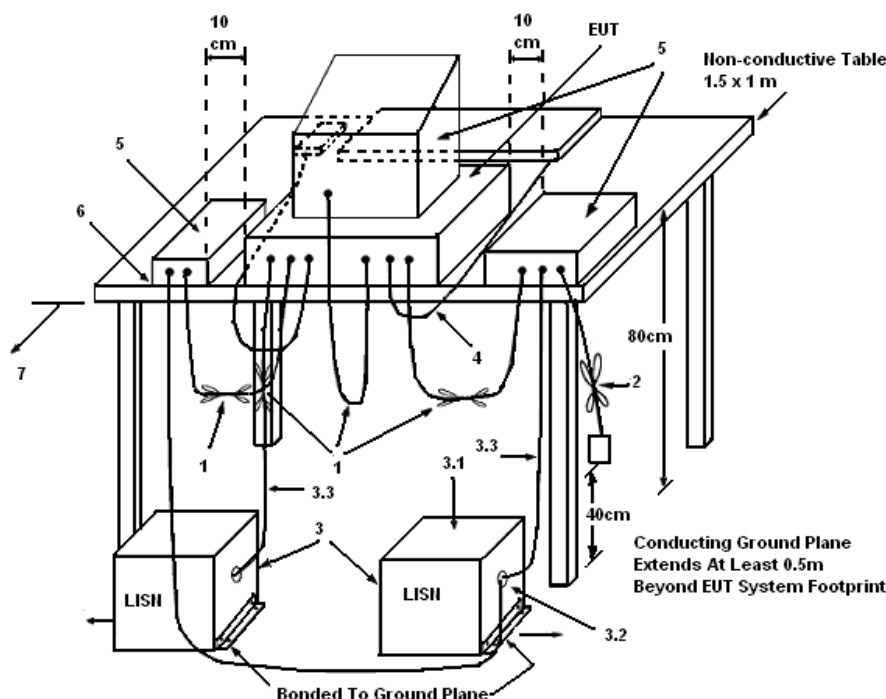

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation

There is no deviation with the original standard.


4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement


<For EUT 1 >

Temperature	23°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

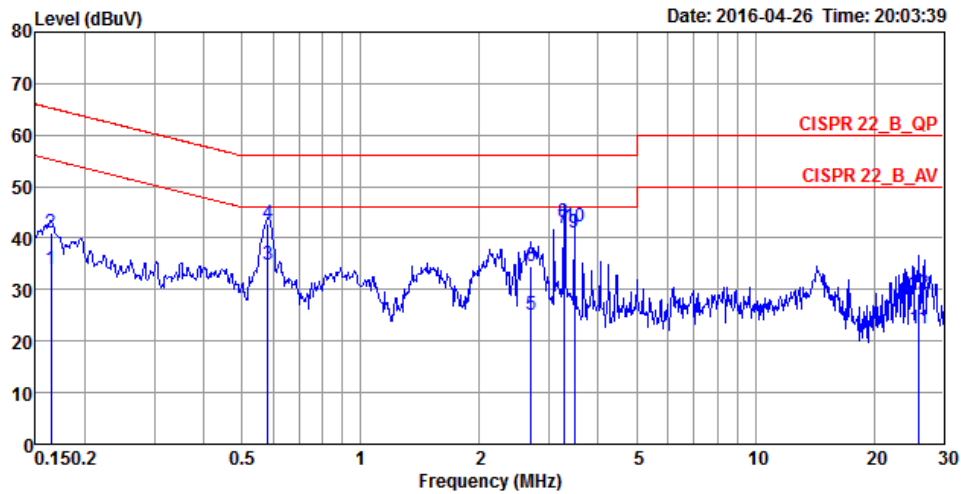

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1641	33.86	-21.39	55.25	23.82	10.02	0.02	LINE	Average
2	0.1641	41.00	-24.25	65.25	30.96	10.02	0.02	LINE	QP
3	0.5823	34.97	-11.03	46.00	25.00	9.93	0.04	LINE	Average
4	0.5823	42.80	-13.20	56.00	32.83	9.93	0.04	LINE	QP
5	2.7068	25.01	-20.99	46.00	14.99	9.97	0.05	LINE	Average
6	2.7068	34.50	-21.50	56.00	24.48	9.97	0.05	LINE	QP
7	3.2756	41.92	-4.08	46.00	31.88	9.98	0.06	LINE	Average
8	3.2756	43.23	-12.77	56.00	33.19	9.98	0.06	LINE	QP
9	3.4722	41.14	-4.86	46.00	31.10	9.98	0.06	LINE	Average
10	3.4722	42.27	-13.73	56.00	32.23	9.98	0.06	LINE	QP
11	26.0012	22.58	-27.42	50.00	11.84	10.47	0.27	LINE	Average
12	26.0012	29.29	-30.71	60.00	18.55	10.47	0.27	LINE	QP

Temperature	23°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

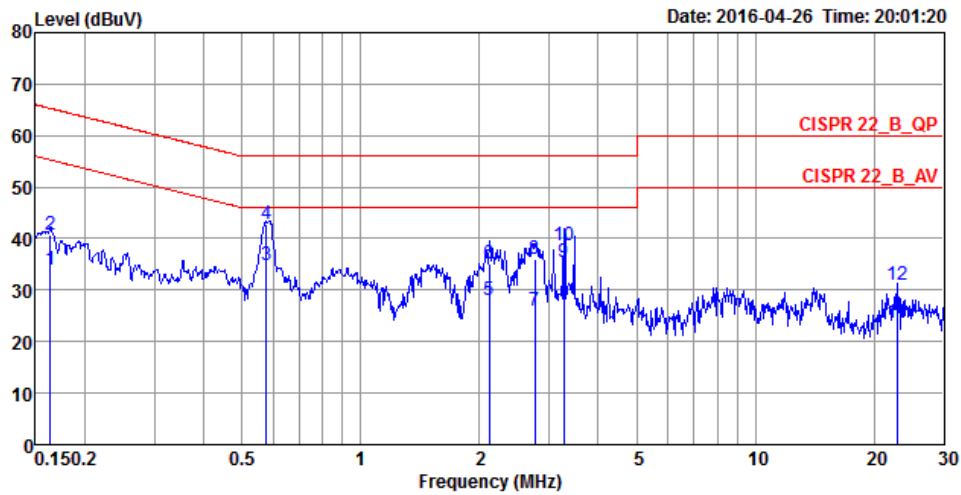


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1633	33.88	-21.42	55.30	23.84	10.02	0.02	NEUTRAL	Average
2	0.1633	40.75	-24.55	65.30	30.71	10.02	0.02	NEUTRAL	QP
3	0.5762	34.84	-11.16	46.00	24.87	9.93	0.04	NEUTRAL	Average
4	0.5762	42.86	-13.14	56.00	32.89	9.93	0.04	NEUTRAL	QP
5	2.1213	27.92	-18.08	46.00	17.90	9.96	0.06	NEUTRAL	Average
6	2.1213	35.24	-20.76	56.00	25.22	9.96	0.06	NEUTRAL	QP
7	2.7648	26.08	-19.92	46.00	16.06	9.97	0.05	NEUTRAL	Average
8	2.7648	36.08	-19.92	56.00	26.06	9.97	0.05	NEUTRAL	QP
9	3.2756	35.47	-10.53	46.00	25.43	9.98	0.06	NEUTRAL	Average
10	3.2756	38.79	-17.21	56.00	28.75	9.98	0.06	NEUTRAL	QP
11	22.8965	23.67	-26.33	50.00	13.02	10.38	0.27	NEUTRAL	Average
12	22.8965	30.88	-29.12	60.00	20.23	10.38	0.27	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.


<For EUT 2>

Temperature	23°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 5

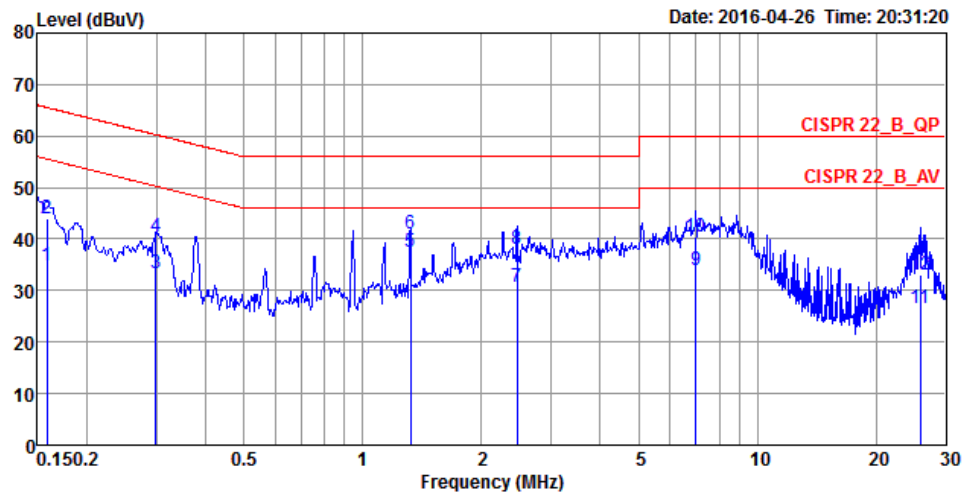

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Pol/Phase	Remark
			dB	dBuV	dBuV	dB	dB		
1	0.1582	34.69	-20.87	55.56	24.65	10.02	0.02	LINE	Average
2	0.1582	44.07	-21.49	65.56	34.03	10.02	0.02	LINE	QP
3	0.2987	33.35	-16.93	50.28	23.39	9.92	0.04	LINE	Average
4	0.2987	40.37	-19.91	60.28	30.41	9.92	0.04	LINE	QP
5	1.3238	37.47	-8.53	46.00	27.47	9.95	0.05	LINE	Average
6	1.3238	41.13	-14.87	56.00	31.13	9.95	0.05	LINE	QP
7	2.4606	30.81	-15.19	46.00	20.79	9.97	0.05	LINE	Average
8	2.4606	37.94	-18.06	56.00	27.92	9.97	0.05	LINE	QP
9	6.9878	33.85	-16.15	50.00	23.66	10.07	0.12	LINE	Average
10	6.9878	40.39	-19.61	60.00	30.20	10.07	0.12	LINE	QP
11	25.8638	26.52	-23.48	50.00	15.79	10.46	0.27	LINE	Average
12	25.8638	33.21	-26.79	60.00	22.48	10.46	0.27	LINE	QP

Temperature	23°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 5

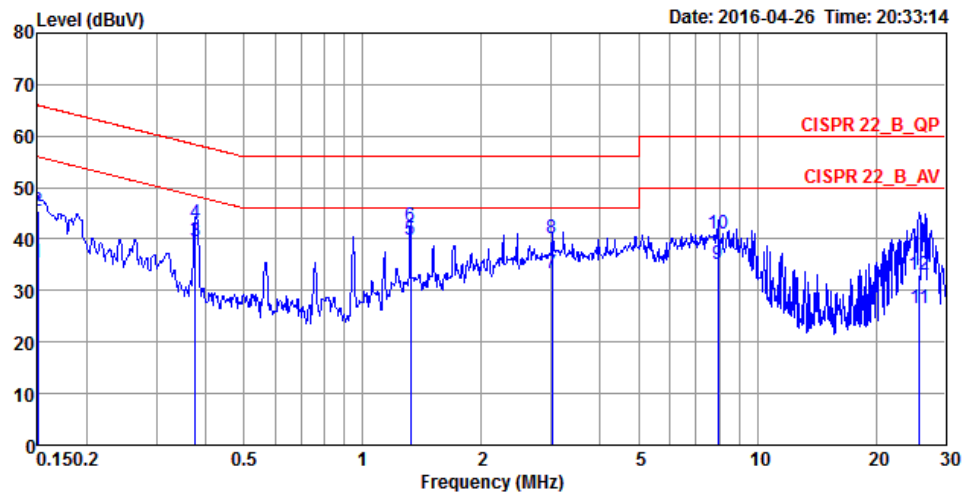

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Pol/Phase	Remark
			dB	dBuV	dBuV	dB	dB		
1	0.1500	35.38	-20.62	56.00	25.34	10.02	0.02	NEUTRAL	Average
2	0.1500	45.45	-20.55	66.00	35.41	10.02	0.02	NEUTRAL	QP
3	0.3771	39.46	-8.88	48.34	29.50	9.92	0.04	NEUTRAL	Average
4	0.3771	43.09	-15.25	58.34	33.13	9.92	0.04	NEUTRAL	QP
5	1.3238	39.91	-6.09	46.00	29.91	9.95	0.05	NEUTRAL	Average
6	1.3238	42.63	-13.37	56.00	32.63	9.95	0.05	NEUTRAL	QP
7	3.0253	33.49	-12.51	46.00	23.46	9.98	0.05	NEUTRAL	Average
8	3.0253	40.17	-15.83	56.00	30.14	9.98	0.05	NEUTRAL	QP
9	7.9353	35.06	-14.94	50.00	24.80	10.09	0.17	NEUTRAL	Average
10	7.9353	41.17	-18.83	60.00	30.91	10.09	0.17	NEUTRAL	QP
11	25.7271	26.57	-23.43	50.00	15.84	10.46	0.27	NEUTRAL	Average
12	25.7271	33.19	-26.81	60.00	22.46	10.46	0.27	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

The limit for output power is 30dBm.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r05 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

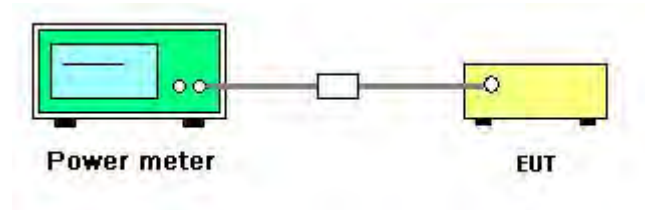

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

<For EUT 1 >

Temperature	23°C	Humidity	63%
Test Engineer	Serway Li	Test Date	Apr. 26, 2016~May 05, 2016

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
802.11b	2412 MHz	17.15	17.37	17.25	22.03	30.00	Complies
	2437 MHz	21.14	20.88	21.52	25.96	30.00	Complies
	2462 MHz	15.62	15.28	16.25	20.51	30.00	Complies
802.11g	2412 MHz	15.06	15.21	14.97	19.85	30.00	Complies
	2437 MHz	21.25	21.03	21.43	26.01	30.00	Complies
	2462 MHz	12.55	12.75	13.36	17.67	30.00	Complies
802.11n MCS0 HT20	2412 MHz	12.86	12.99	13.49	17.89	30.00	Complies
	2437 MHz	20.48	20.12	20.69	25.21	30.00	Complies
	2462 MHz	11.46	11.56	12.47	16.63	30.00	Complies
802.11n MCS0 HT40	2422 MHz	8.97	8.86	9.17	13.77	30.00	Complies
	2437 MHz	14.37	13.61	13.69	18.67	30.00	Complies
	2452 MHz	8.35	8.27	8.55	13.16	30.00	Complies

<For EUT 2>

Temperature	23°C	Humidity	63%
Test Engineer	Serway Li	Test Date	Apr. 27, 2016~May 04, 2016

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
802.11b	2412 MHz	19.13	19.42	19.37	24.08	29.40	Complies
	2437 MHz	21.33	21.16	22.05	26.30	29.40	Complies
	2462 MHz	18.66	18.74	18.97	23.56	29.40	Complies
802.11g	2412 MHz	13.73	13.83	14.16	18.68	29.40	Complies
	2437 MHz	21.33	20.84	21.59	26.04	29.40	Complies
	2462 MHz	14.65	14.79	15.27	19.68	29.40	Complies
802.11n MCS0 HT20	2412 MHz	13.08	13.58	13.76	18.25	29.40	Complies
	2437 MHz	20.43	20.19	20.39	25.11	29.40	Complies
	2462 MHz	11.26	11.85	11.76	16.40	29.40	Complies
802.11n MCS0 HT40	2422 MHz	9.95	9.56	9.43	14.42	29.40	Complies
	2437 MHz	14.55	14.42	14.96	19.42	29.40	Complies
	2452 MHz	10.25	10.31	10.64	15.17	29.40	Complies

Note: Uncorrelated Composite Gain = 6.60 dBi, so limit = 30 - (6.60 - 6) = 29.40 (dBm)

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

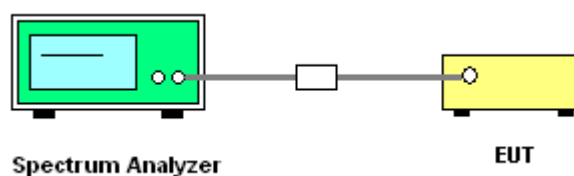

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

<For EUT 1 >

Temperature	23°C	Humidity	63%
Test Engineer	Serway Li		

Mode	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
802.11b	2412 MHz	-16.15	-16.85	-16.15	-11.60	3.78	Complies
	2437 MHz	-12.76	-12.79	-12.22	-7.81	3.78	Complies
	2462 MHz	-18.02	-18.60	-17.90	-13.39	3.78	Complies
802.11g	2412 MHz	-10.97	-11.50	-9.83	-5.94	3.78	Complies
	2437 MHz	-3.43	-3.83	-3.40	1.22	3.78	Complies
	2462 MHz	-11.24	-13.16	-12.05	-7.31	3.78	Complies
802.11n MCS0 HT20	2412 MHz	-12.52	-13.44	-12.07	-7.87	3.78	Complies
	2437 MHz	-5.00	-5.47	-5.25	-0.46	3.78	Complies
	2462 MHz	-13.51	-14.71	-14.10	-9.31	3.78	Complies
802.11n MCS0 HT40	2422 MHz	-20.65	-20.36	-20.41	-15.70	3.78	Complies
	2437 MHz	-12.25	-13.26	-14.73	-8.53	3.78	Complies
	2452 MHz	-20.25	-20.31	-20.13	-15.46	3.78	Complies

Note: Uncorrelated Composite Gain = 10.22dBi, so limit = $8 - (10.22 - 6) = 3.78$ (dBm/MHz)

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1



Date: 2.MAY.2016 15:00:10

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 2




Date: 2.MAY.2016 15:00:47

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 3




Date: 2.MAY.2016 15:01:24

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1

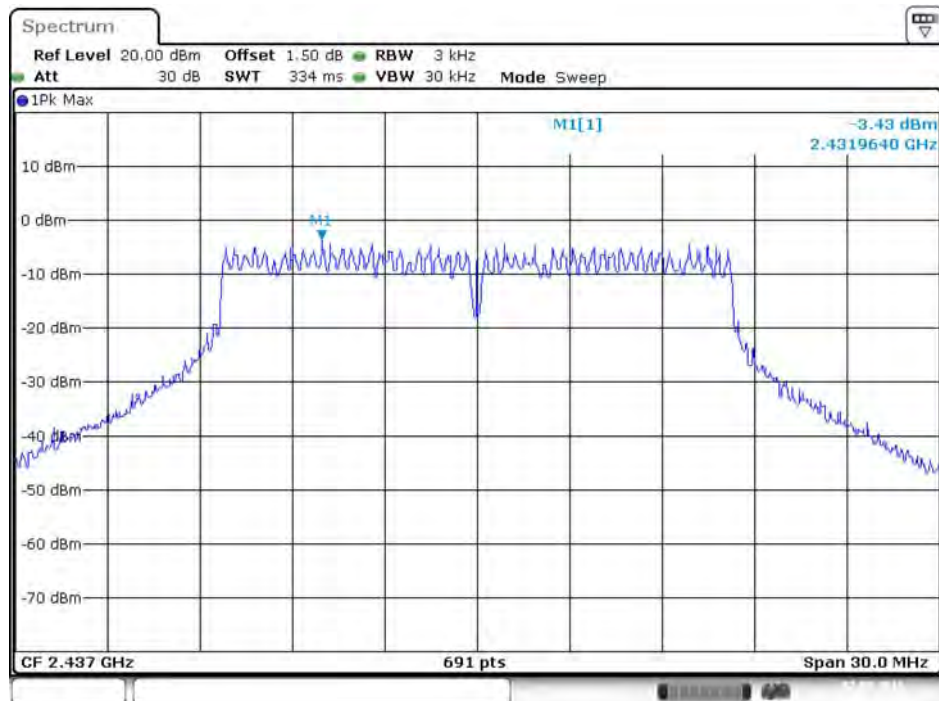


Date: 2.MAY.2016 15:06:08

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 2

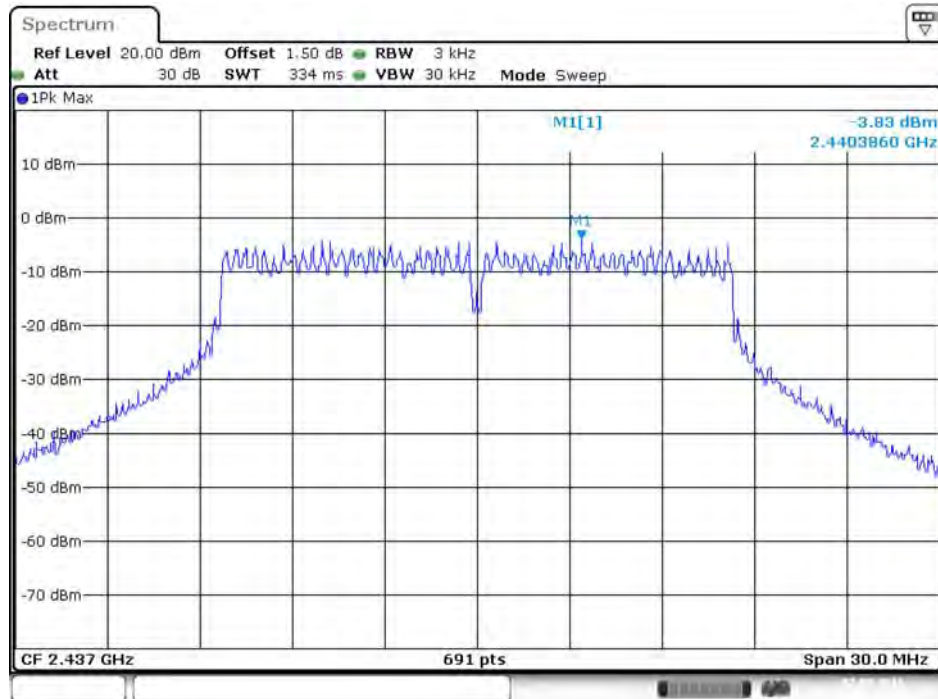


Date: 2.MAY.2016 15:05:01

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 3

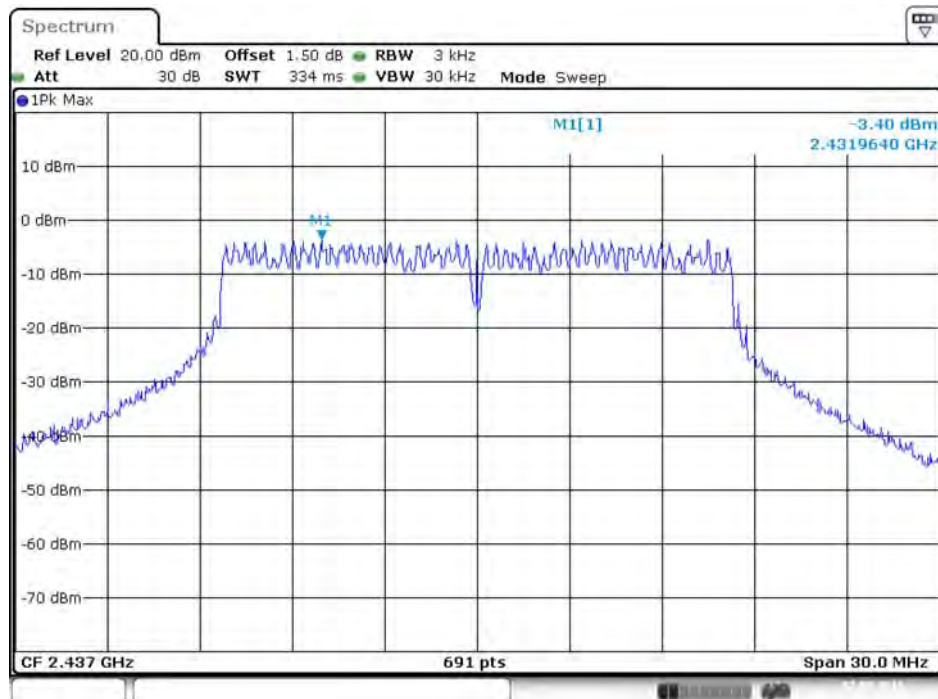


Date: 2.MAY.2016 15:04:21

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 1

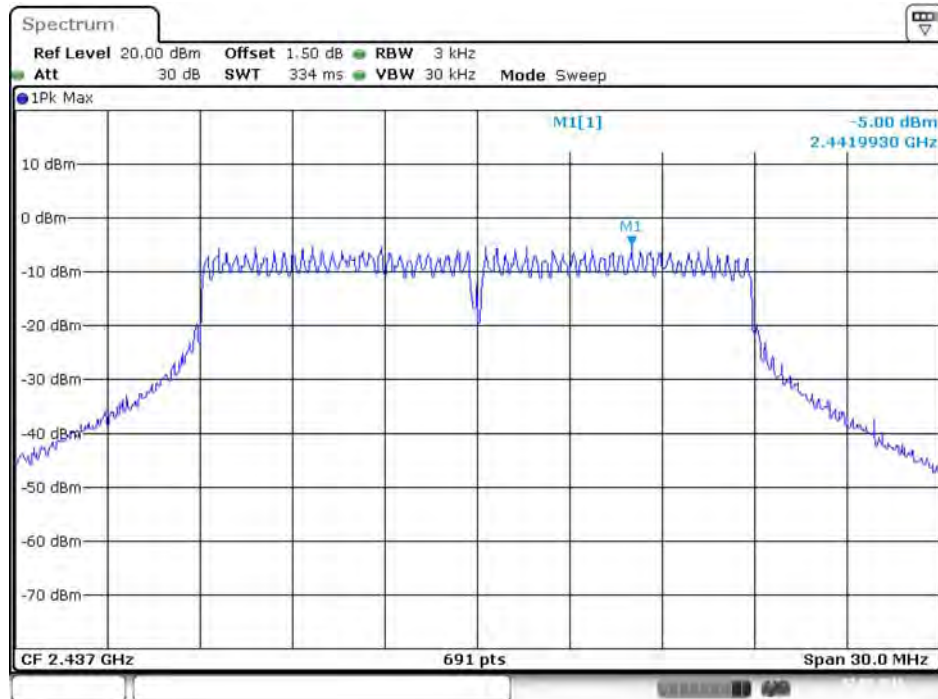


Date: 2.MAY.2016 15:07:24

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 2

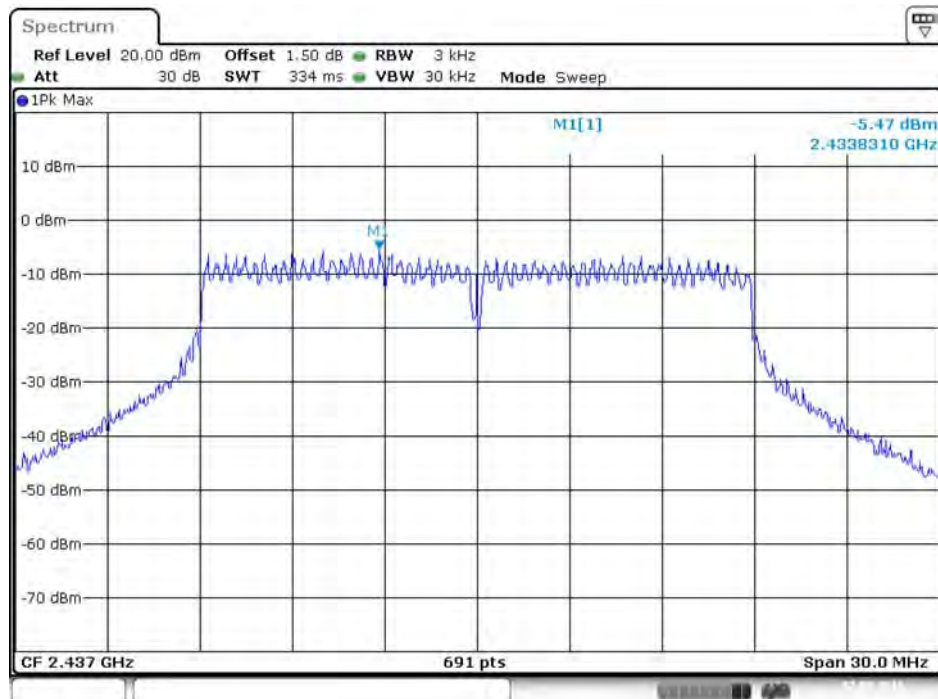


Date: 2.MAY.2016 15:09:04

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 3

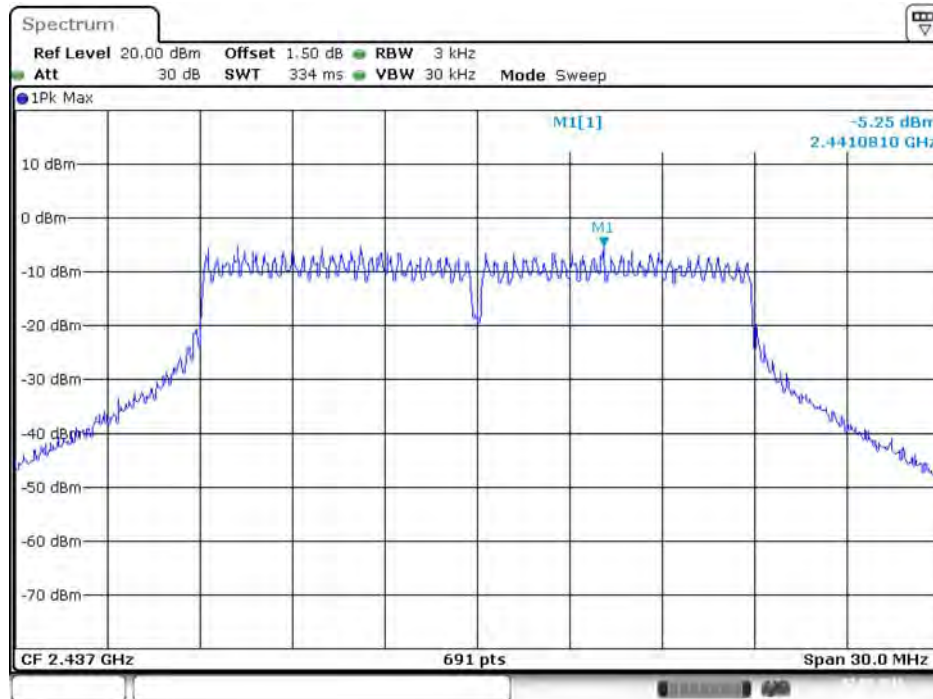


Date: 2.MAY.2016 15:08:10

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1

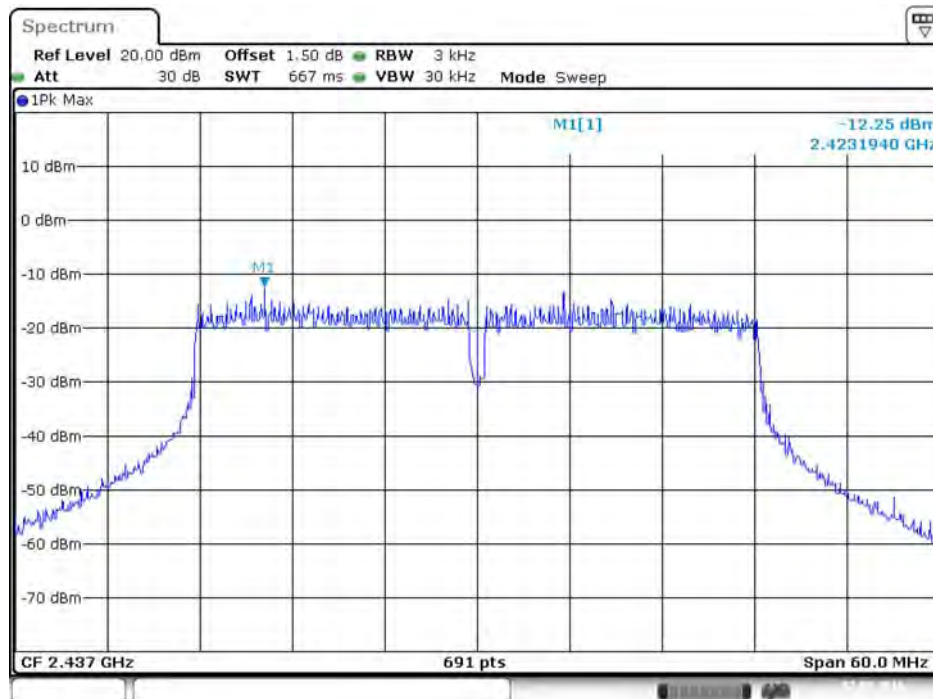


Date: 2.MAY.2016 15:12:22

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 2

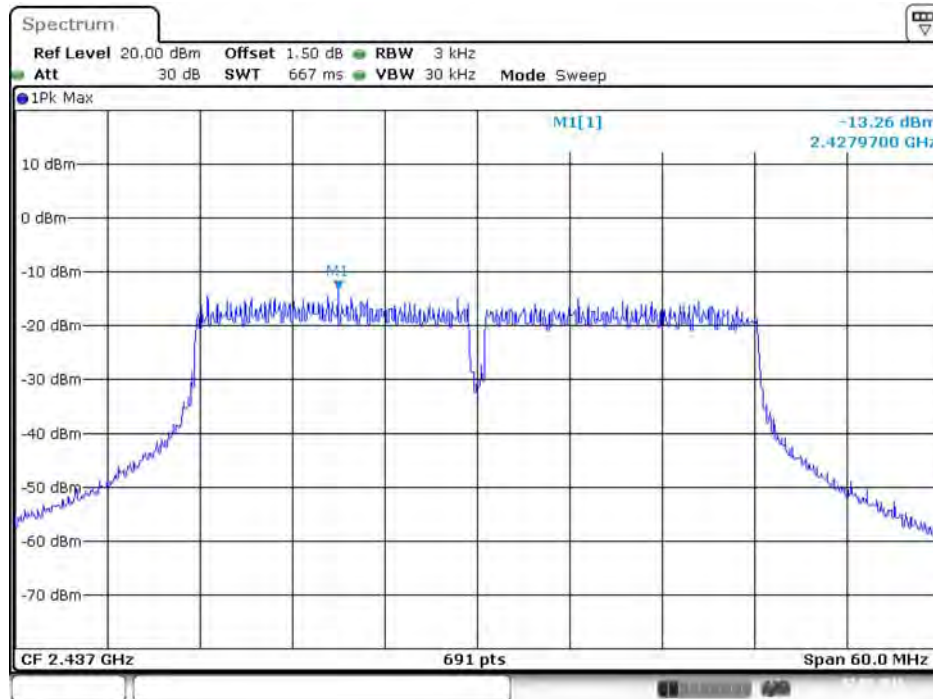

Date: 2.MAY.2016 15:11:20

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 3

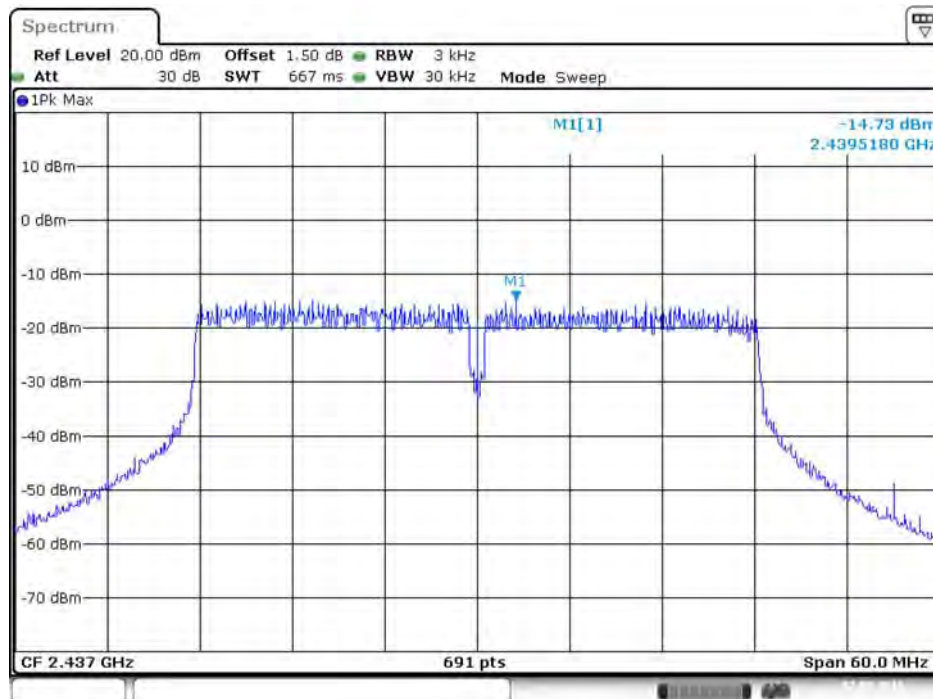

Date: 2.MAY.2016 15:13:15

<For EUT 2>

Temperature	23°C	Humidity	63%
Test Engineer	Serway Li		

Mode	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
802.11b	2412 MHz	-14.68	-14.52	-14.09	-9.65	2.63	Complies
	2437 MHz	-11.63	-12.15	-12.21	-7.22	2.63	Complies
	2462 MHz	-15.80	-15.17	-15.12	-10.58	2.63	Complies
802.11g	2412 MHz	-10.93	-11.11	-11.70	-6.46	2.63	Complies
	2437 MHz	-4.78	-3.22	-3.68	0.93	2.63	Complies
	2462 MHz	-11.14	-9.74	-10.60	-5.68	2.63	Complies
802.11n MCS0 HT20	2412 MHz	-12.61	-11.80	-11.81	-7.29	2.63	Complies
	2437 MHz	-5.27	-5.46	-6.08	-0.82	2.63	Complies
	2462 MHz	-14.98	-13.55	-13.42	-9.16	2.63	Complies
802.11n MCS0 HT40	2422 MHz	-17.60	-18.88	-18.80	-13.61	2.63	Complies
	2437 MHz	-14.62	-15.00	-13.49	-9.55	2.63	Complies
	2452 MHz	-17.93	-18.98	-18.25	-13.59	2.63	Complies

Note: Uncorrelated Composite Gain = 11.37dBi, so limit = $8 - (11.37 - 6) = 2.63$ (dBm/3kHz)

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1



Date: 27.APR.2016 22:26:42

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Ant. 2




Date: 27.APR.2016 22:27:19

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Ant. 3




Date: 27. APR 2016 22:27:35

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1

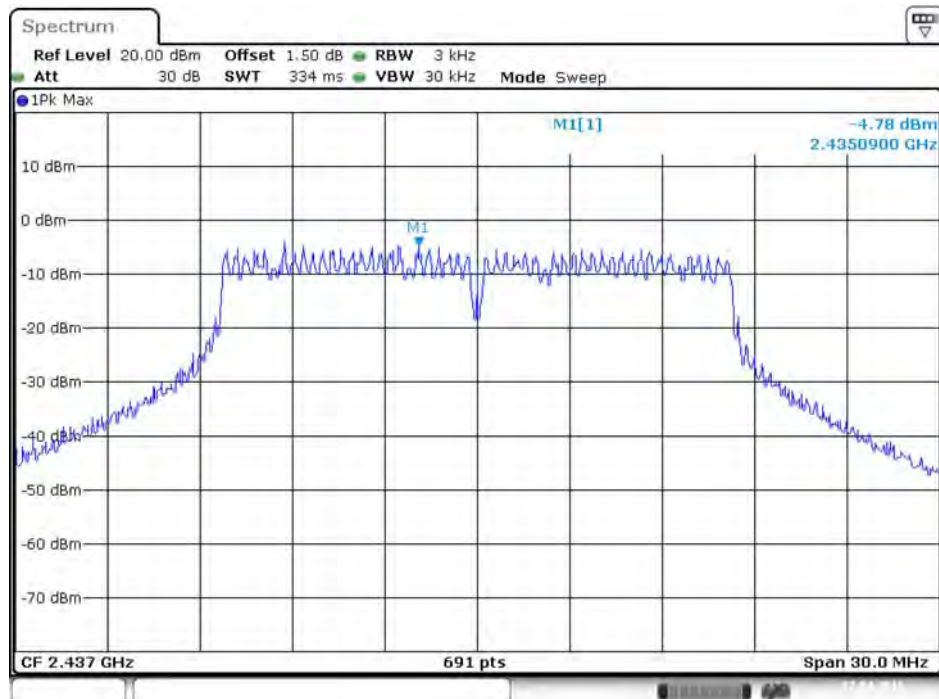


Date: 27. APR 2016 22:33:29

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 2

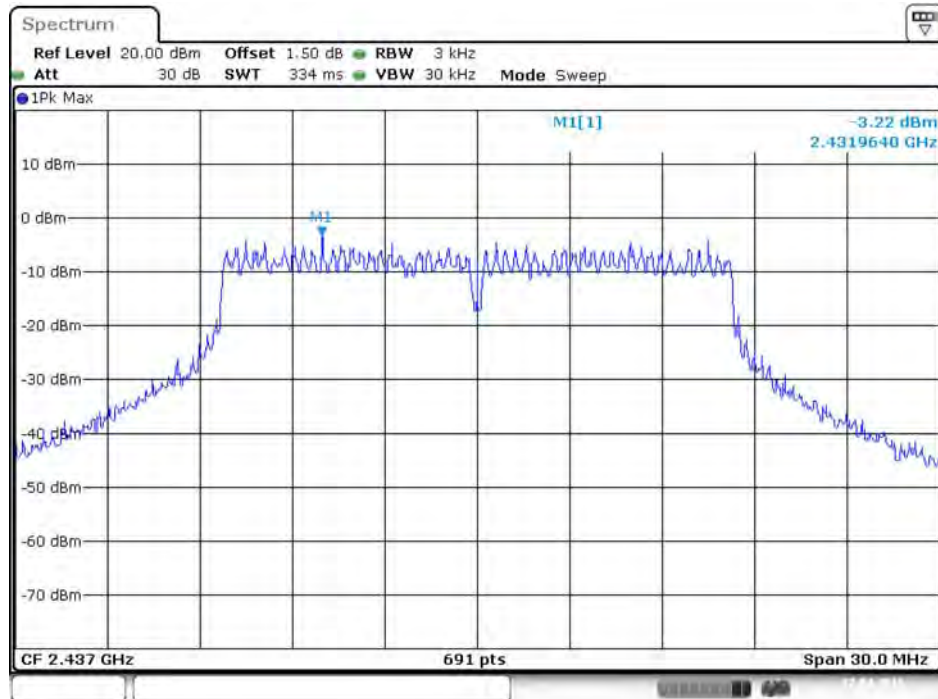


Date: 27.APR.2016 22:33:06

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 3

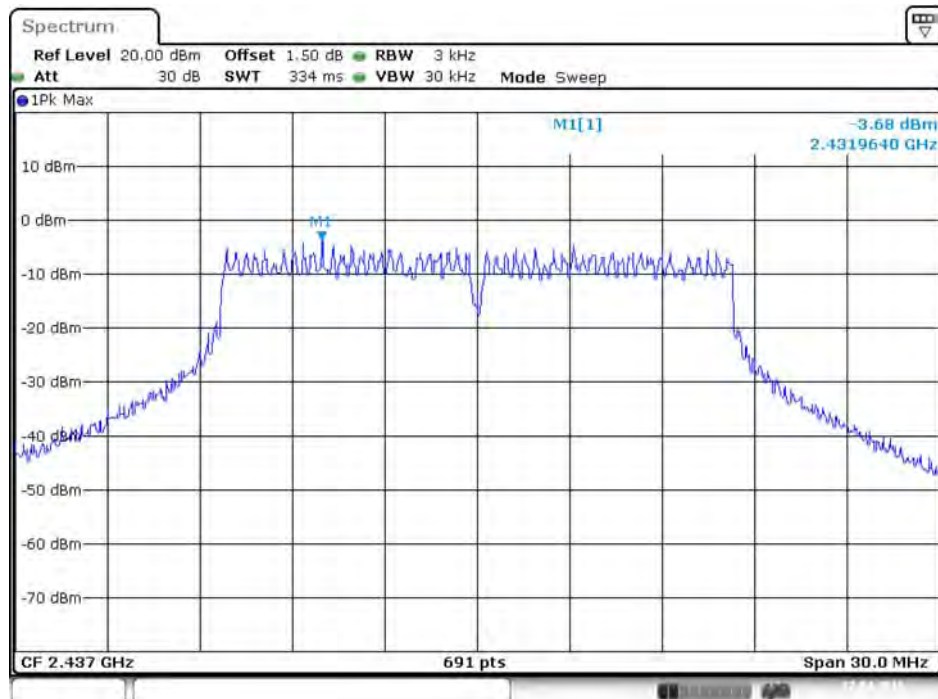


Date: 27.APR.2016 22:32:33

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 1

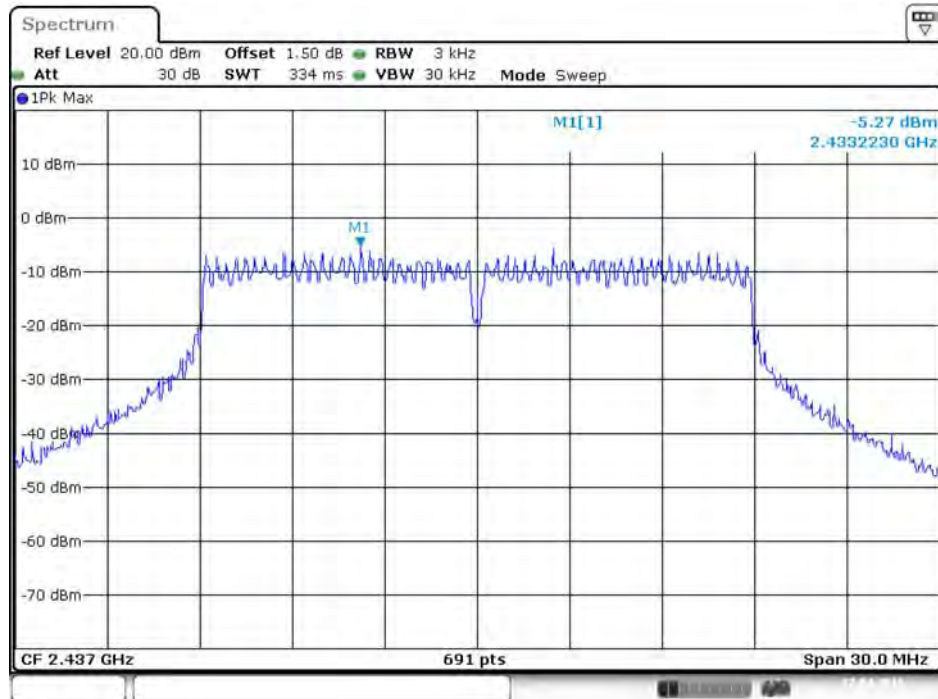


Date: 27.APR.2016 22:41:26

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 2

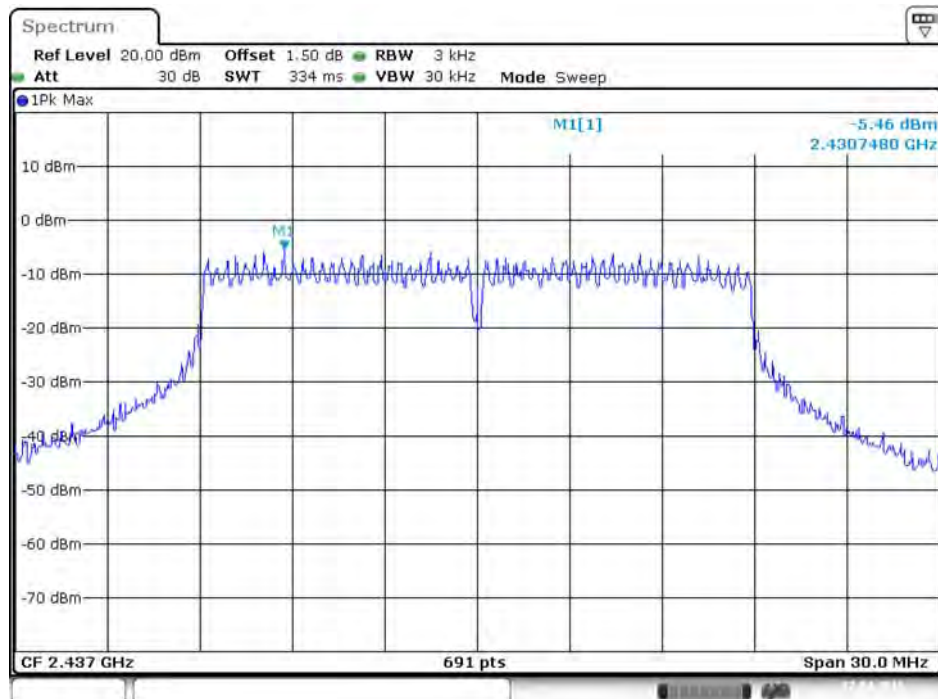


Date: 27.APR.2016 22:41:05

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 3

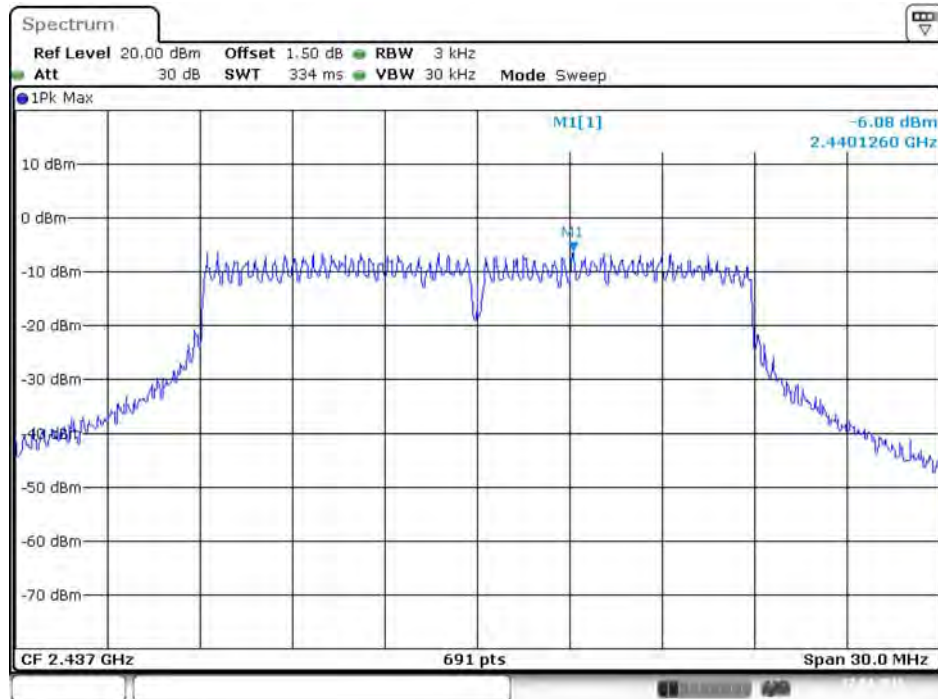


Date: 27. APR 2016 22:40:42

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1

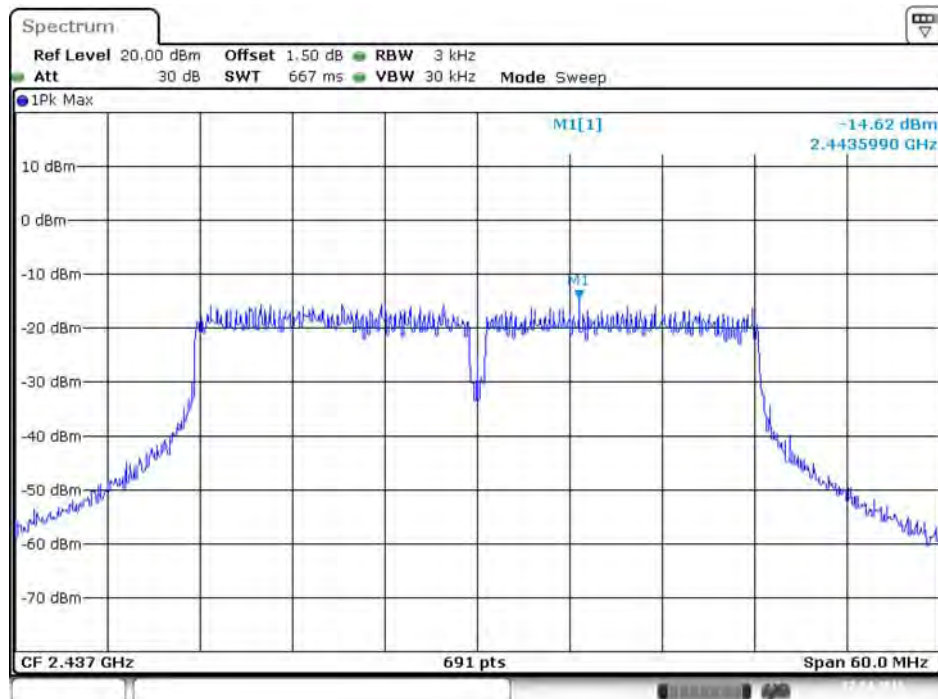


Date: 27. APR 2016 22:48:23

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 2

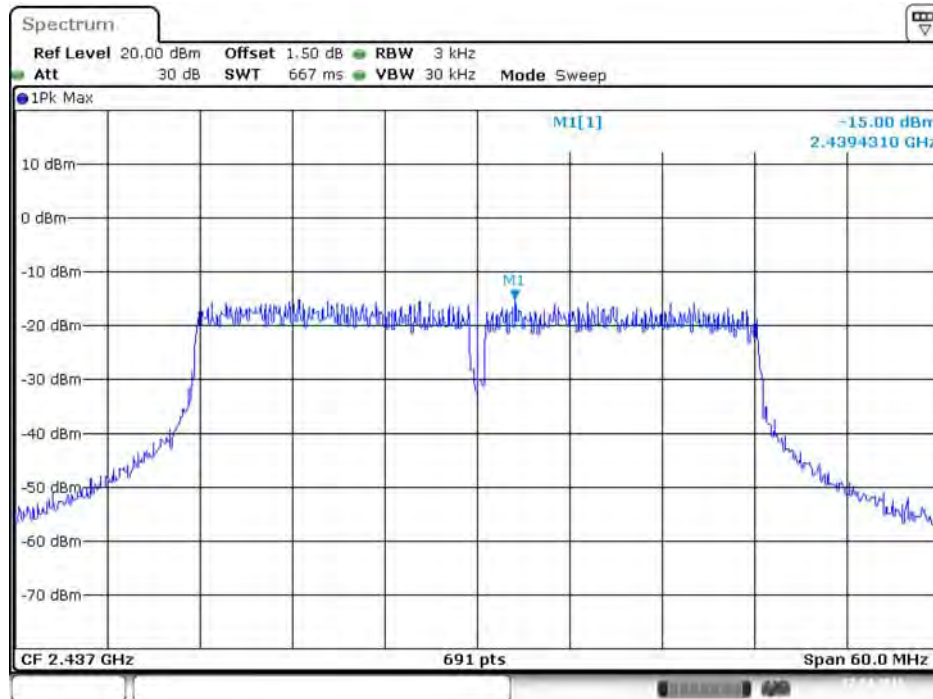

Date: 27. APR 2016 22:48:06

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 3

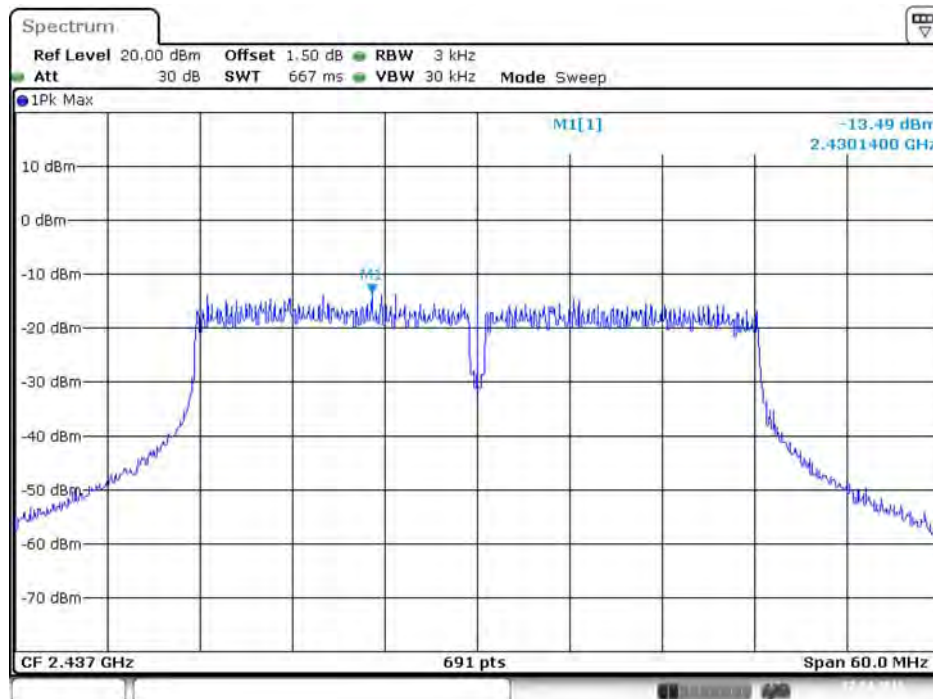

Date: 27. APR 2016 22:47:35

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth = > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

<For EUT 1 >


Temperature	23°C	Humidity	63%
Test Engineer	Serway Li		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	11.07	14.15	500	Complies
	2437 MHz	11.54	14.07	500	Complies
	2462 MHz	11.25	14.07	500	Complies
802.11g	2412 MHz	16.17	17.28	500	Complies
	2437 MHz	16.06	17.28	500	Complies
	2462 MHz	16.06	17.28	500	Complies
802.11n MCS0 HT20	2412 MHz	17.57	18.84	500	Complies
	2437 MHz	17.57	18.84	500	Complies
	2462 MHz	17.51	18.67	500	Complies
802.11n MCS0 HT40	2422 MHz	34.20	37.34	500	Complies
	2437 MHz	35.01	38.49	500	Complies
	2452 MHz	35.71	37.48	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Ant. 1 + Ant. 2 + Ant. 3

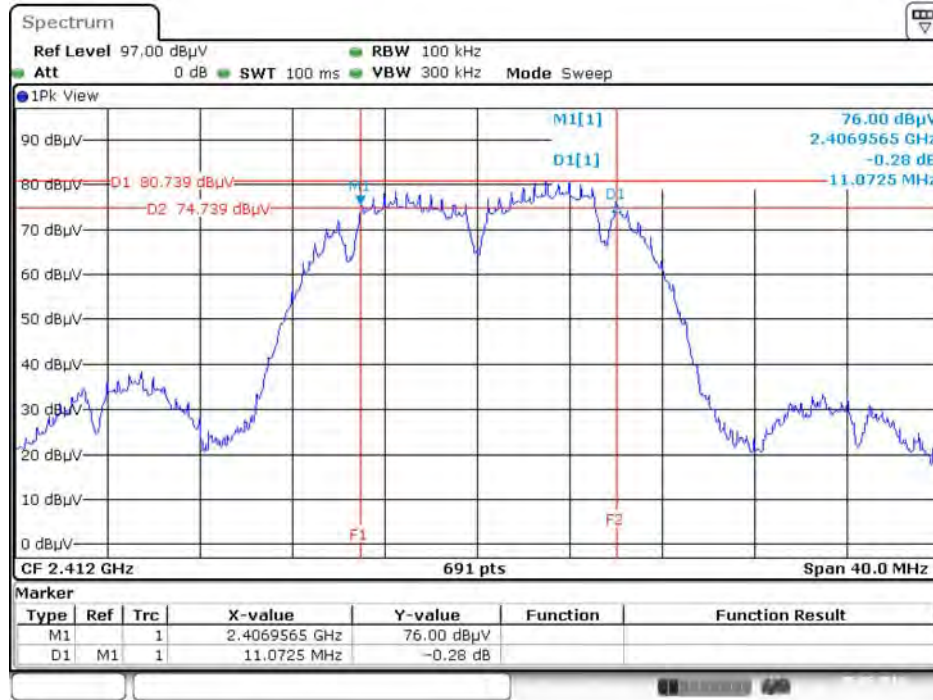


Date: 5 MAY 2016 21:04:52

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Ant. 1 + Ant. 2 + Ant. 3



Date: 5 MAY 2016 21:25:39

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3

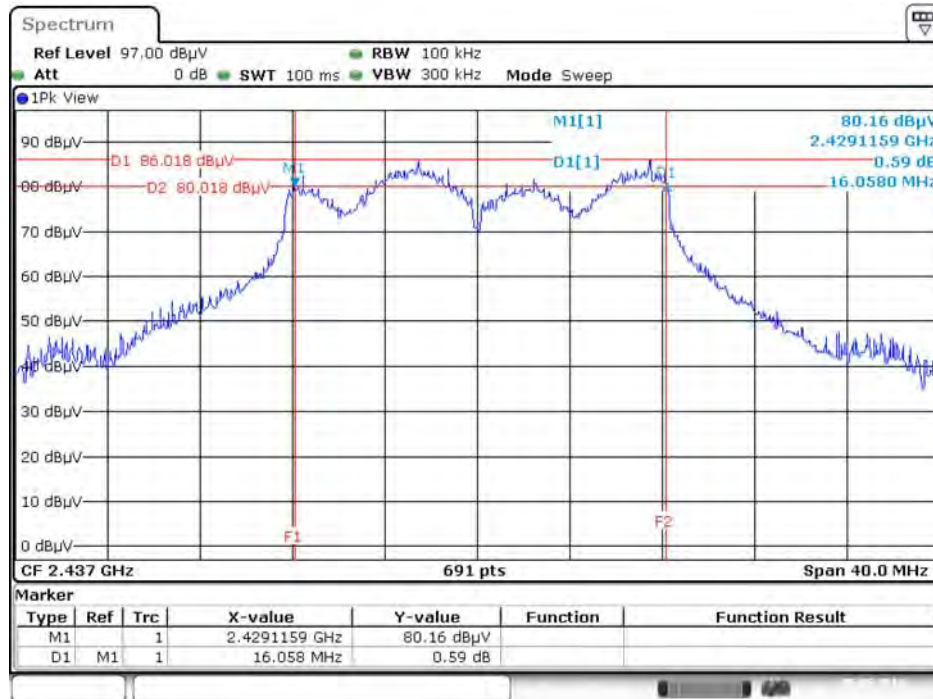


Date: 5.MAY.2016 21:11:15

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Ant. 1 + Ant. 2 + Ant. 3




Date: 5.MAY.2016 21:31:58

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2462 MHz / Ant. 1 + Ant. 2 + Ant. 3

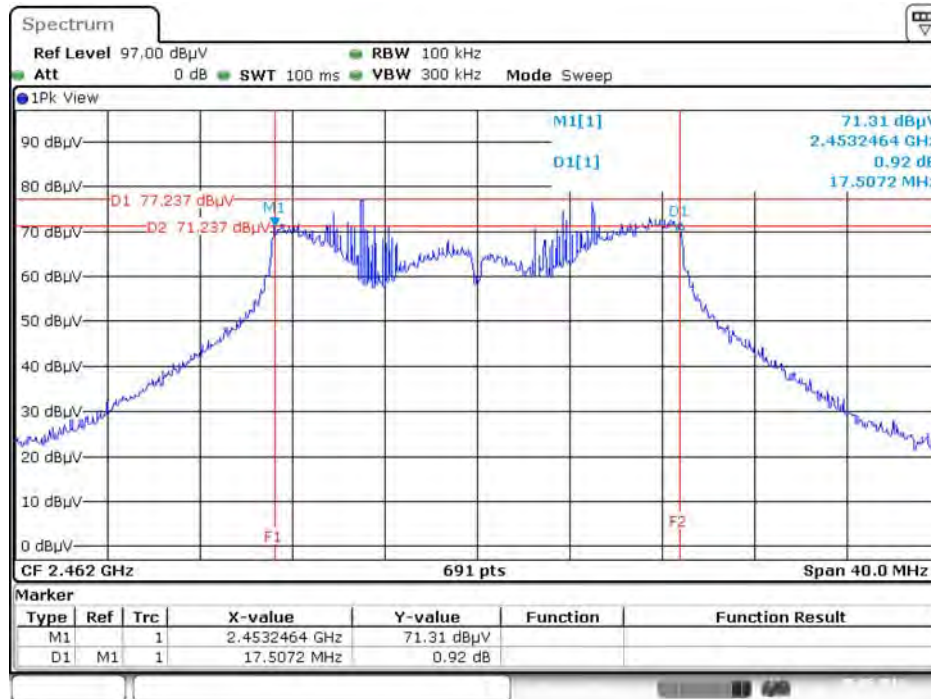


Date: 5.MAY.2016 21:17:04

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Ant. 1 + Ant. 2 + Ant. 3

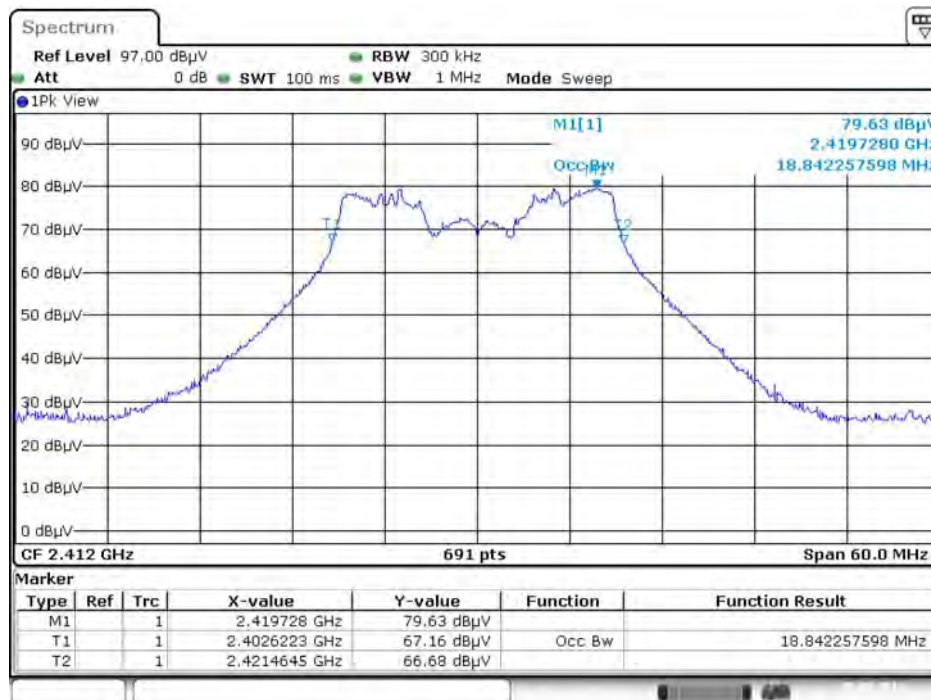


Date: 5.MAY.2016 21:36:58

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Ant. 1 + Ant. 2 + Ant. 3

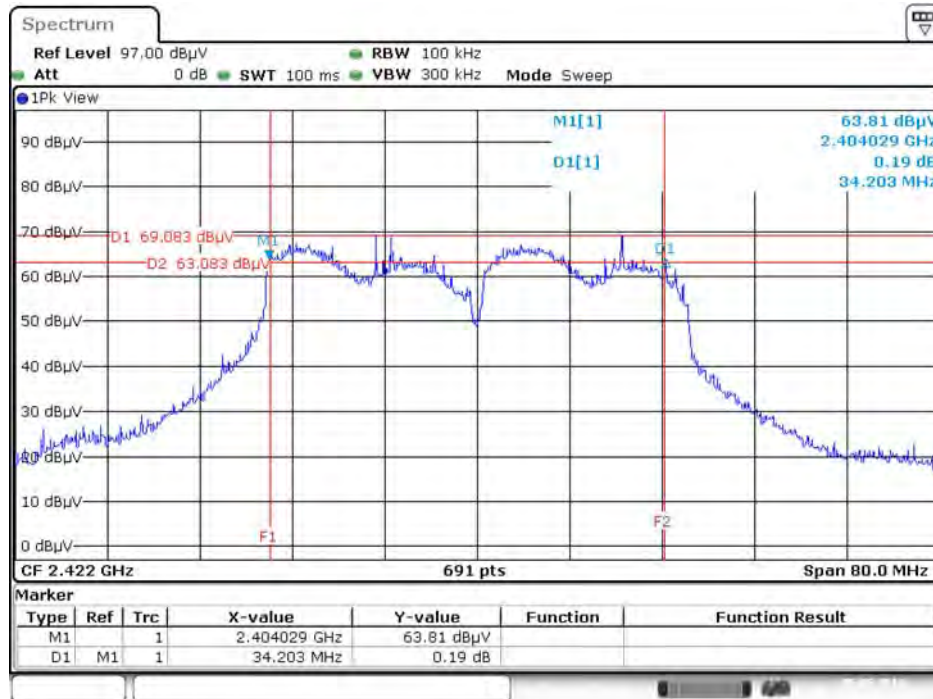

Date: 5.MAY.2016 21:18:43

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3

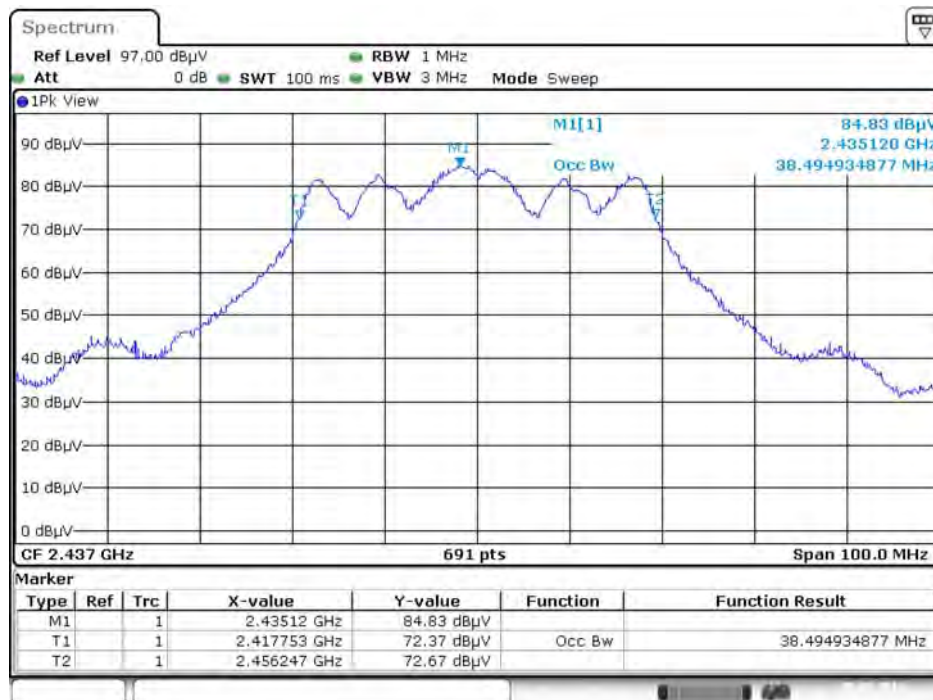

Date: 5.MAY.2016 21:44:30

<For EUT 2>


Temperature	23°C	Humidity	63%
Test Engineer	Serway Li		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	10.61	10.68	500	Complies
	2437 MHz	4.58	14.07	500	Complies
	2462 MHz	4.58	15.37	500	Complies
802.11g	2412 MHz	15.83	16.93	500	Complies
	2437 MHz	13.86	17.37	500	Complies
	2462 MHz	16.06	17.19	500	Complies
802.11n MCS0 HT20	2412 MHz	17.74	18.58	500	Complies
	2437 MHz	14.44	18.84	500	Complies
	2462 MHz	16.29	18.67	500	Complies
802.11n MCS0 HT40	2422 MHz	32.70	37.63	500	Complies
	2437 MHz	33.28	37.34	500	Complies
	2452 MHz	35.36	37.63	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3

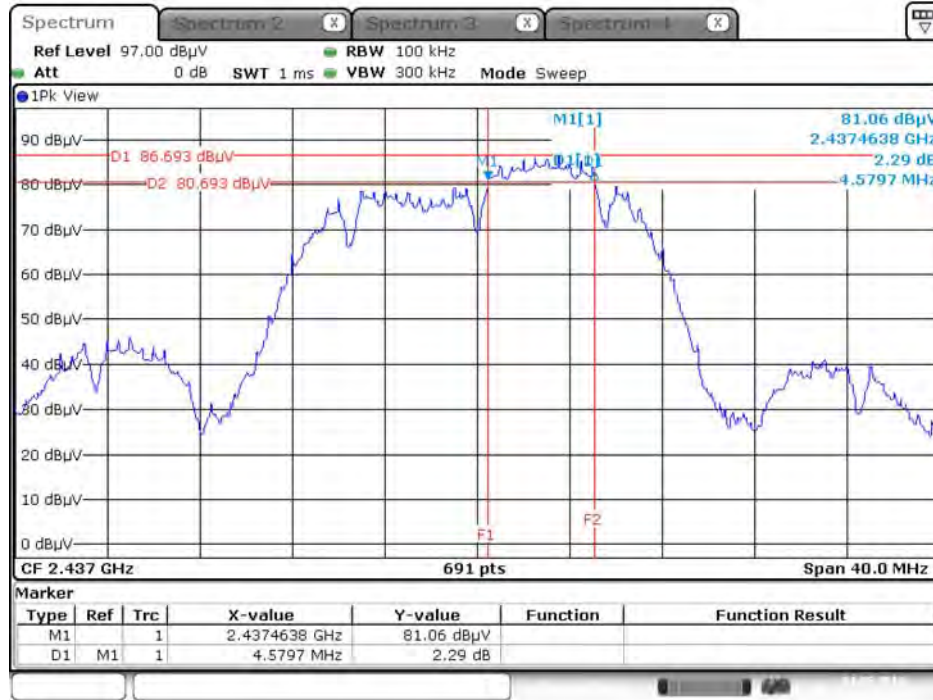


Date: 4.MAY.2016 09:59:51

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Ant. 1 + Ant. 2 + Ant. 3



Date: 4.MAY.2016 10:15:50

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3

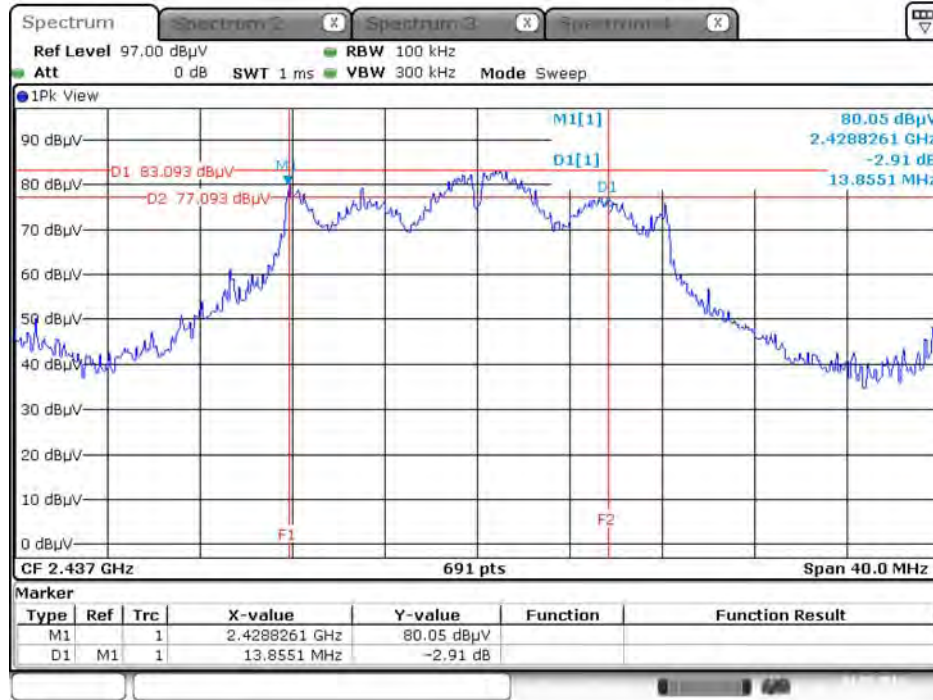


Date: 4 MAY 2016 10:02:57

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3



Date: 4 MAY 2016 10:17:06

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3

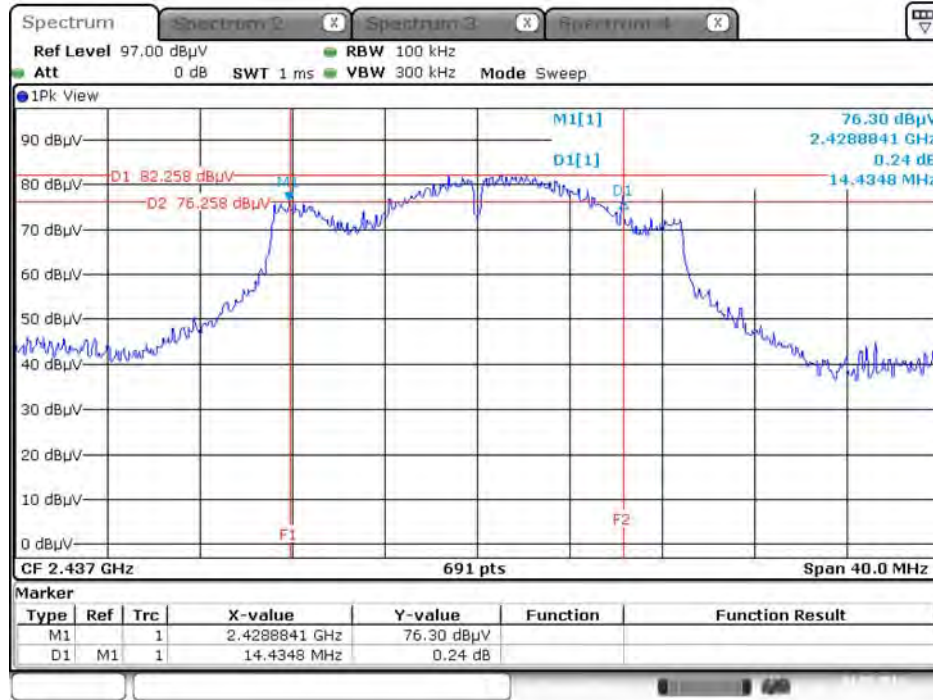


Date: 4.MAY.2016 10:04:54

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3



Date: 4.MAY.2016 10:21:59

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3

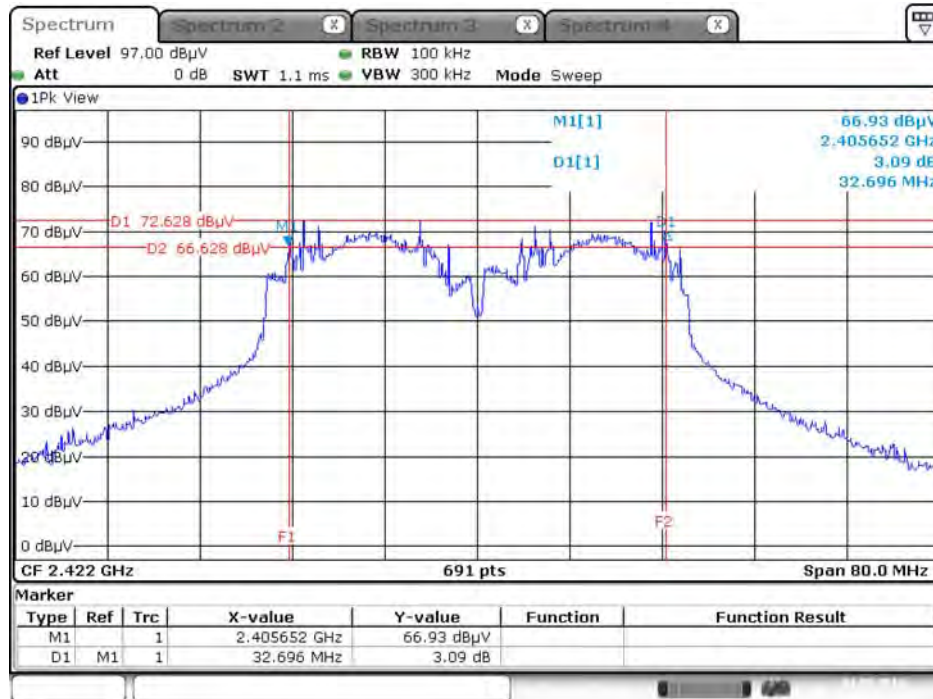

Date: 4.MAY.2016 10:05:43

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3



Date: 4.MAY.2016 10:26:13

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

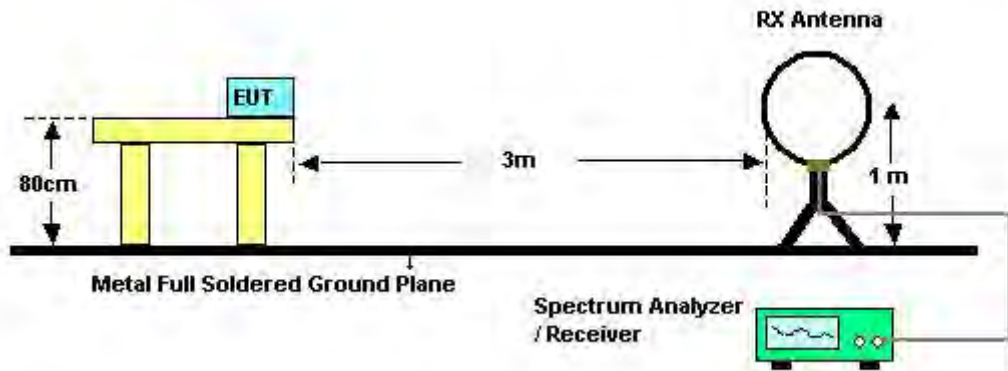

For Radiated Emissions: 30MHz~1GHz

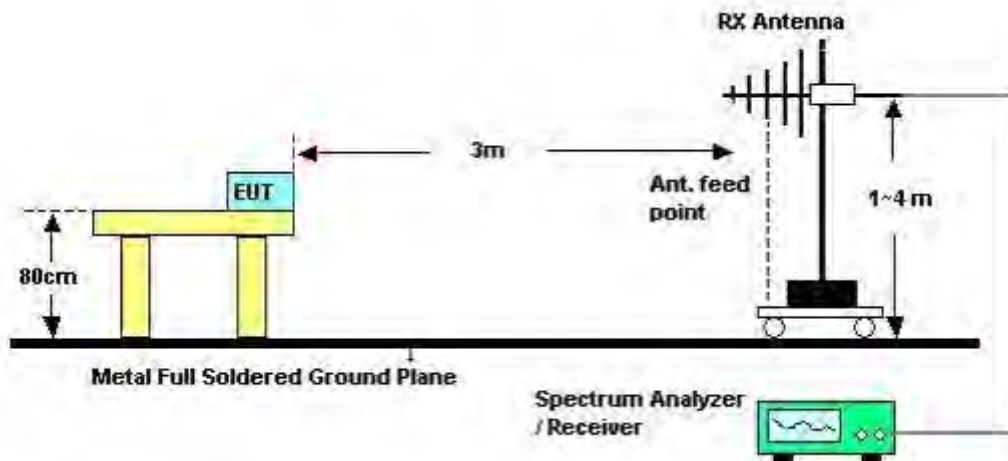

For Radiated Emissions: Above 1GHz

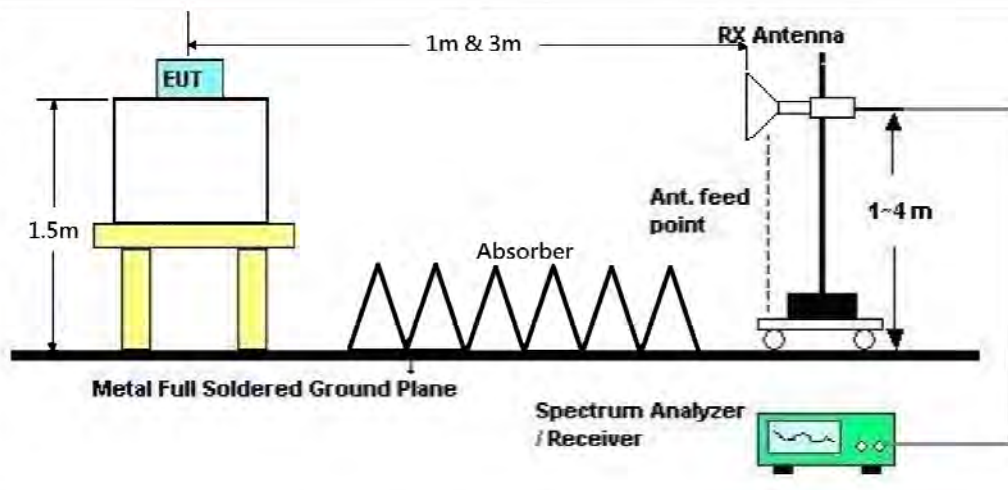

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<For EUT 1 >

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	Normal Link
Test Date	Apr. 22, 2016	Test Mode	Mode 3

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

<For EUT 2 >

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	Normal Link
Test Date	Apr. 22, 2016	Test Mode	Mode 7

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)

<For EUT 1 >


Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	Normal Link
Test Mode	Mode 3		

Horizontal

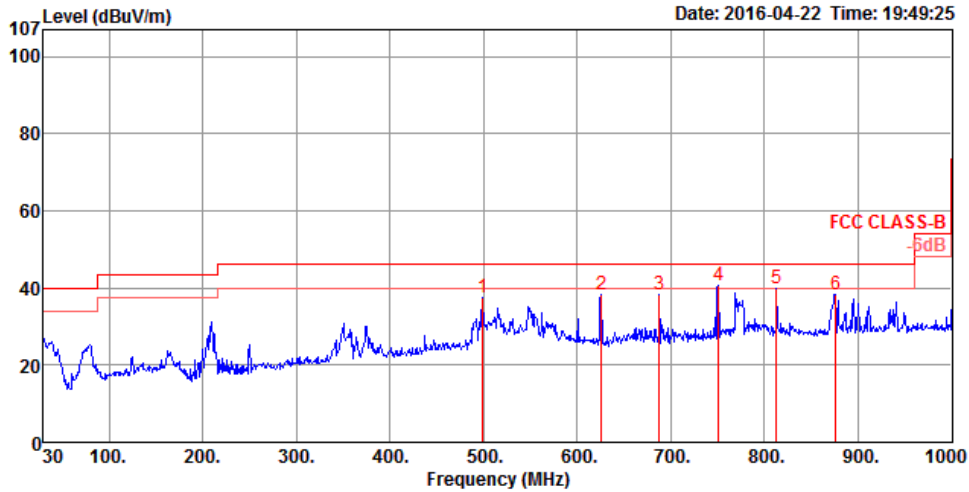

	Freq	Level	Limit Line	over Limit	read Level	Antenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	499.48	37.51	46.00	-8.49	40.72	1.76	23.70	28.67	125	337	Peak	HORIZONTAL
2	625.58	38.17	46.00	-7.83	39.83	1.97	25.06	28.69	200	360	Peak	HORIZONTAL
3	687.66	38.47	46.00	-7.53	39.63	2.07	25.38	28.61	150	0	Peak	HORIZONTAL
4	750.71	40.48	46.00	-5.52	40.66	2.19	26.10	28.47	150	10	Peak	HORIZONTAL
5	812.79	39.73	46.00	-6.27	39.06	2.31	26.64	28.28	200	335	Peak	HORIZONTAL
6	875.84	38.49	46.00	-7.51	36.87	2.38	27.20	27.96	100	9	Peak	HORIZONTAL

Vertical

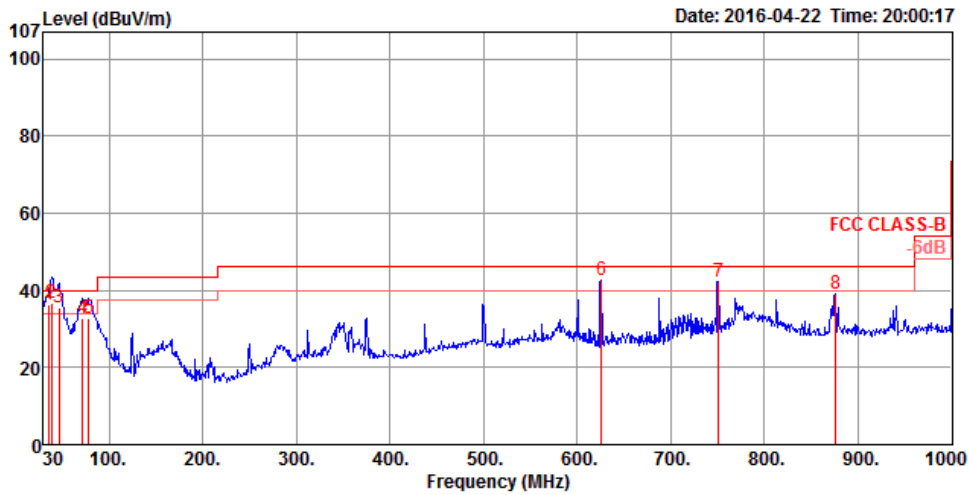

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	35.82	36.24	40.00	-3.76	42.46	0.53	21.75	28.50	100	72 QP	VERTICAL
2	38.73	36.75	40.00	-3.25	44.70	0.53	20.01	28.49	100	260 QP	VERTICAL
3	46.49	35.53	40.00	-4.47	47.55	0.61	15.84	28.47	100	168 QP	VERTICAL
4	71.71	32.72	40.00	-7.28	48.01	0.75	12.35	28.39	150	360 QP	VERTICAL
5	78.50	32.89	40.00	-7.11	47.64	0.75	12.87	28.37	150	124 QP	VERTICAL
6	625.58	42.73	46.00	-3.27	44.39	1.97	25.06	28.69	125	356 Peak	VERTICAL
7	750.71	42.27	46.00	-3.73	42.45	2.19	26.10	28.47	100	9 Peak	VERTICAL
8	875.84	39.17	46.00	-6.83	37.55	2.38	27.20	27.96	100	2 Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For EUT 2>


Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	Normal Link
Test Mode	Mode 7		

Horizontal

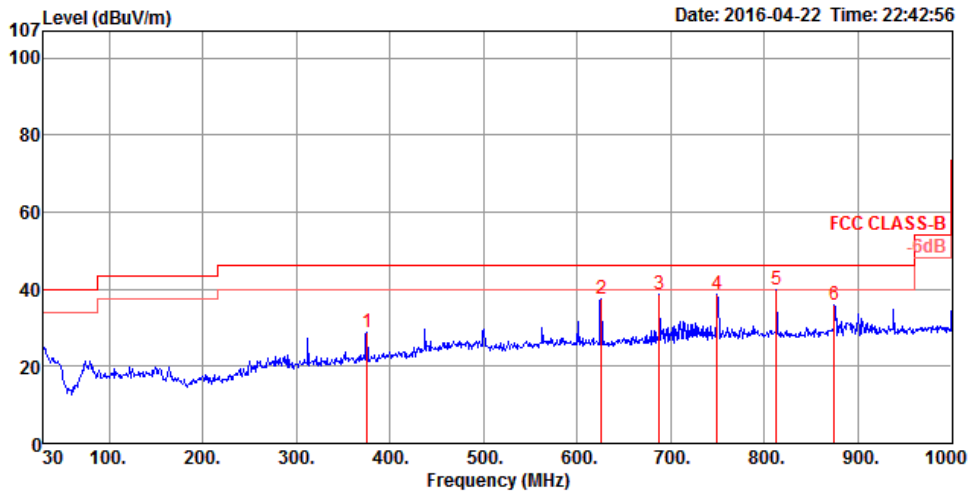

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	375.32	28.90	46.00	-17.10	33.86	1.50	21.58	28.04	100	24 Peak	HORIZONTAL
2	625.58	37.56	46.00	-8.44	39.22	1.97	25.06	28.69	200	60 Peak	HORIZONTAL
3	687.66	38.87	46.00	-7.13	40.03	2.07	25.38	28.61	150	4 Peak	HORIZONTAL
4	749.74	38.71	46.00	-7.29	38.89	2.19	26.10	28.47	200	34 Peak	HORIZONTAL
5	812.79	39.90	46.00	-6.10	39.23	2.31	26.64	28.28	200	40 Peak	HORIZONTAL
6	874.87	36.07	46.00	-9.93	34.46	2.38	27.20	27.97	100	9 Peak	HORIZONTAL

Vertical

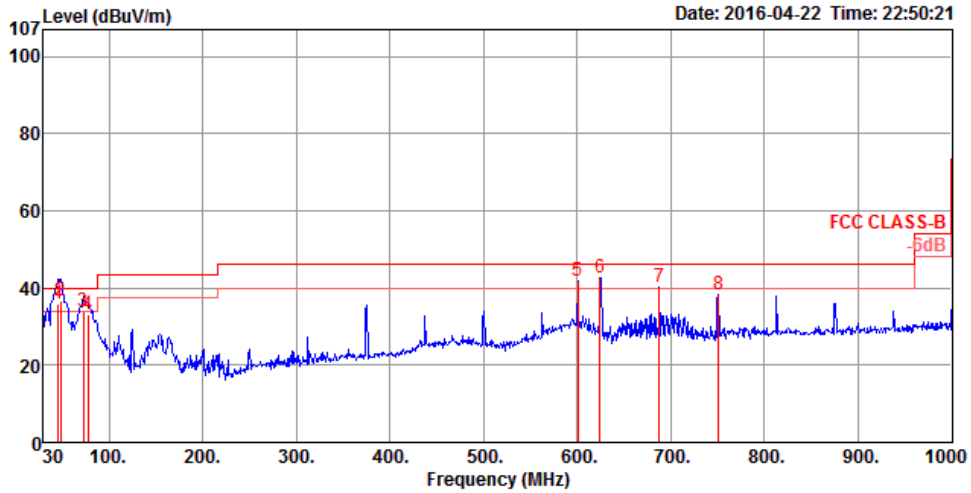

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	45.49	35.97	40.00	-4.03	47.56	0.61	16.28	28.48	100	156 QP	VERTICAL
2	48.43	36.90	40.00	-3.10	49.80	0.61	14.96	28.47	150	360 QP	VERTICAL
3	72.68	33.77	40.00	-6.23	49.00	0.75	12.41	28.39	150	85 QP	VERTICAL
4	77.53	33.01	40.00	-6.99	47.82	0.75	12.81	28.37	150	26 QP	VERTICAL
5	600.36	41.98	46.00	-4.02	43.97	1.93	24.80	28.72	100	0 Peak	VERTICAL
6	624.61	42.69	46.00	-3.31	44.35	1.97	25.06	28.69	100	14 Peak	VERTICAL
7	687.66	40.15	46.00	-5.85	41.31	2.07	25.38	28.61	100	338 Peak	VERTICAL
8	750.71	38.15	46.00	-7.85	38.33	2.19	26.10	28.47	150	199 Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

<For EUT 1 >

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11b CH 1 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 20, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	deg	cm		
1	4823.97	48.08	54.00	-5.92	43.76	6.02	32.82	350	174	Average	HORIZONTAL
2	4823.99	52.40	74.00	-21.60	48.08	6.02	32.82	350	174	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	deg	cm		
1	4823.94	45.59	54.00	-8.41	41.27	6.02	32.82	33	171	Average	VERTICAL
2	4824.16	51.08	74.00	-22.92	46.76	6.02	32.82	33	171	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11b CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 20, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.99	53.70	54.00	-0.30	48.42	7.08	31.21	33.01	236	345	Average	HORIZONTAL
2	4874.04	55.93	74.00	-18.07	50.65	7.08	31.21	33.01	236	345	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Limit	Level	Loss	Factor	Factor	/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.96	50.46	54.00	-3.54	45.18	7.08	31.21	33.01	198	32	Average	VERTICAL
2	4874.09	53.74	74.00	-20.26	48.46	7.08	31.21	33.01	198	32	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11b CH 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 20, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm			
1	4923.91	49.92	74.00	-24.08	45.41	6.01	32.99	34.49	322	179	Peak	HORIZONTAL
2	4924.01	42.80	54.00	-11.20	38.29	6.01	32.99	34.49	322	179	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm			
1	4923.94	42.55	54.00	-11.45	38.04	6.01	32.99	34.49	38	184	Average	VERTICAL
2	4923.97	49.34	74.00	-24.66	44.83	6.01	32.99	34.49	38	184	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 1 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 20, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	deg	cm		
1	4824.58	34.52	54.00	-19.48	30.20	6.02	32.82	3	170	Average	HORIZONTAL
2	4827.18	46.46	74.00	-27.54	42.12	6.02	32.84	3	170	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	deg	cm		
1	4822.46	34.01	54.00	-19.99	29.69	6.02	32.82	123	185	Average	VERTICAL
2	4822.48	47.17	74.00	-26.83	42.85	6.02	32.82	123	185	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 29, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.71	55.63	74.00	-18.37	50.35	7.08	31.21	33.01	228	344	Peak	HORIZONTAL
2	4873.86	42.08	54.00	-11.92	36.80	7.08	31.21	33.01	228	344	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.48	38.30	54.00	-15.70	33.02	7.08	31.21	33.01	194	43	Average	VERTICAL
2	4873.60	52.53	74.00	-21.47	47.25	7.08	31.21	33.01	194	43	Peak	VERTICAL



Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 20, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	4919.06	46.64	74.00	-27.36	42.15	6.01	32.97	34.49	199	201	Peak	HORIZONTAL
2	4921.66	34.27	54.00	-19.73	29.78	6.01	32.97	34.49	199	201	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	4919.68	33.16	54.00	-20.84	28.67	6.01	32.97	34.49	301	145	Average	VERTICAL
2	4921.14	45.38	74.00	-28.62	40.89	6.01	32.97	34.49	301	145	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 20, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4821.54	34.16	54.00	-19.84	29.84	6.02	32.82	34.52	164	147	Average	HORIZONTAL
2	4825.14	45.79	74.00	-28.21	41.45	6.02	32.84	34.52	164	147	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4822.10	33.04	54.00	-20.96	28.72	6.02	32.82	34.52	251	234	Average	VERTICAL
2	4822.22	46.64	74.00	-27.36	42.32	6.02	32.82	34.52	251	234	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 29, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.58	39.55	54.00	-14.45	34.27	7.08	31.21	33.01	215	345 Average	HORIZONTAL
2	4874.65	53.88	74.00	-20.12	48.60	7.08	31.21	33.01	215	345 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4875.25	37.46	54.00	-16.54	32.18	7.08	31.21	33.01	204	29 Average	VERTICAL
2	4875.45	50.92	74.00	-23.08	45.64	7.08	31.21	33.01	204	29 Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 20, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4920.04	45.67	74.00	-28.33	41.18	6.01	32.97	34.49	148	170	Peak	HORIZONTAL
2	4920.36	34.26	54.00	-19.74	29.77	6.01	32.97	34.49	148	170	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4921.10	45.51	74.00	-28.49	41.02	6.01	32.97	34.49	63	214	Peak	VERTICAL
2	4922.84	33.01	54.00	-20.99	28.52	6.01	32.97	34.49	63	214	Average	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 20, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4843.28	45.55	74.00	-28.45	41.19	6.02	32.86	34.52	129	103	Peak	HORIZONTAL
2	4846.22	34.80	54.00	-19.20	30.43	6.02	32.86	34.51	129	103	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4840.40	33.87	54.00	-20.13	29.51	6.02	32.86	34.52	166	134	Average	VERTICAL
2	4848.12	45.92	74.00	-28.08	41.55	6.02	32.86	34.51	166	134	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 29, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4870.34	47.24	74.00	-26.76	41.96	7.08	31.21	33.01	211	277	Peak	HORIZONTAL
2	4873.44	34.26	54.00	-19.74	28.98	7.08	31.21	33.01	211	277	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4872.38	46.73	74.00	-27.27	41.45	7.08	31.21	33.01	177	178	Peak	VERTICAL
2	4878.24	33.89	54.00	-20.11	28.60	7.08	31.21	33.00	177	178	Average	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 20, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4906.56	45.53	74.00	-28.47	41.07	6.01	32.95	34.50	163	244	Peak	HORIZONTAL
2	4906.94	34.01	54.00	-19.99	29.55	6.01	32.95	34.50	163	244	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4899.36	45.23	74.00	-28.77	40.77	6.01	32.95	34.50	314	178	Peak	VERTICAL
2	4908.50	32.83	54.00	-21.17	28.37	6.01	32.95	34.50	314	178	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For EUT 2>

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11b CH 1 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.92	53.66	74.00	-20.34	47.35	7.04	34.17	34.90	191	36	Peak	HORIZONTAL
2	4823.99	47.67	54.00	-6.33	41.36	7.04	34.17	34.90	191	36	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.93	51.36	74.00	-22.64	45.05	7.04	34.17	34.90	225	22	Peak	VERTICAL
2	4824.04	43.05	54.00	-10.95	36.74	7.04	34.17	34.90	225	22	Average	VERTICAL



Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11b CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.99	50.91	54.00	-3.09	44.29	7.18	34.34	34.90	184	320	Average	HORIZONTAL
2	4874.04	55.23	74.00	-18.77	48.61	7.18	34.34	34.90	184	320	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.94	46.14	54.00	-7.86	39.52	7.18	34.34	34.90	176	44	Average	VERTICAL
2	4874.05	52.69	74.00	-21.31	46.07	7.18	34.34	34.90	176	44	Peak	VERTICAL



Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11b CH 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.86	52.17	74.00	-21.83	45.26	7.31	34.50	34.90	174	36	Peak	HORIZONTAL
2	4924.02	45.14	54.00	-8.86	38.23	7.31	34.50	34.90	174	36	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.90	38.43	54.00	-15.57	31.52	7.31	34.50	34.90	174	45	Average	VERTICAL
2	4923.96	49.48	74.00	-24.52	42.57	7.31	34.50	34.90	174	45	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 1 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4817.08	35.51	54.00	-18.49	29.20	7.04	34.17	34.90	157	320	Average	HORIZONTAL
2	4827.62	48.52	74.00	-25.48	42.13	7.08	34.21	34.90	157	320	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4817.33	48.93	74.00	-25.07	42.62	7.04	34.17	34.90	183	344	Peak	VERTICAL
2	4817.94	35.70	54.00	-18.30	29.39	7.04	34.17	34.90	183	344	Average	VERTICAL



Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4864.06	47.90	74.00	-26.10	41.37	7.14	34.29	34.90	159	242	Peak	HORIZONTAL
2	4865.41	35.30	54.00	-18.70	28.77	7.14	34.29	34.90	159	242	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4865.31	35.26	54.00	-18.74	28.73	7.14	34.29	34.90	185	283	Average	VERTICAL
2	4867.01	48.00	74.00	-26.00	41.38	7.18	34.34	34.90	185	283	Peak	VERTICAL



Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4920.99	48.42	74.00	-25.58	41.58	7.28	34.46	34.90	189	196	Peak	HORIZONTAL
2	4930.09	35.22	54.00	-18.78	28.31	7.31	34.50	34.90	189	196	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4914.83	47.89	74.00	-26.11	41.05	7.28	34.46	34.90	194	223	Peak	VERTICAL
2	4920.92	34.88	54.00	-19.12	28.04	7.28	34.46	34.90	194	223	Average	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4814.96	48.37	74.00	-25.63	42.06	7.04	34.17	34.90	210	219	Peak	HORIZONTAL
2	4820.86	35.48	54.00	-18.52	29.17	7.04	34.17	34.90	210	219	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4819.06	35.64	54.00	-18.36	29.33	7.04	34.17	34.90	189	196	Average	VERTICAL
2	4819.61	48.37	74.00	-25.63	42.06	7.04	34.17	34.90	189	196	Peak	VERTICAL



Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4864.99	48.15	74.00	-25.85	41.62	7.14	34.29	34.90	168	130	Peak	HORIZONTAL
2	4866.89	35.23	54.00	-18.77	28.70	7.14	34.29	34.90	168	130	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4872.69	35.28	54.00	-18.72	28.66	7.18	34.34	34.90	192	176	Average	VERTICAL
2	4873.33	49.56	74.00	-24.44	42.94	7.18	34.34	34.90	192	176	Peak	VERTICAL



Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.68	47.78	74.00	-26.22	40.87	7.31	34.50	34.90	169	143	Peak	HORIZONTAL
2	4924.71	34.83	54.00	-19.17	27.92	7.31	34.50	34.90	169	143	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4921.21	34.87	54.00	-19.13	28.03	7.28	34.46	34.90	145	169	Average	VERTICAL
2	4927.17	48.03	74.00	-25.97	41.12	7.31	34.50	34.90	145	169	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4837.75	34.96	54.00	-19.04	28.57	7.08	34.21	34.90	161	142	Average	HORIZONTAL
2	4851.98	47.76	74.00	-26.24	41.30	7.11	34.25	34.90	161	142	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4834.58	47.98	74.00	-26.02	41.59	7.08	34.21	34.90	196	181	Peak	VERTICAL
2	4837.59	35.05	54.00	-18.95	28.66	7.08	34.21	34.90	196	181	Average	VERTICAL



Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4866.50	47.78	74.00	-26.22	41.25	7.14	34.29	34.90	171	165	Peak	HORIZONTAL
2	4867.62	35.16	54.00	-18.84	28.54	7.18	34.34	34.90	171	165	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4865.73	35.21	54.00	-18.79	28.68	7.14	34.29	34.90	203	196	Average	VERTICAL
2	4872.33	48.11	74.00	-25.89	41.49	7.18	34.34	34.90	203	196	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4894.13	34.83	54.00	-19.17	28.14	7.21	34.38	34.90	191	246	Average	HORIZONTAL
2	4909.87	48.05	74.00	-25.95	41.21	7.28	34.46	34.90	191	246	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4900.73	47.70	74.00	-26.30	40.94	7.24	34.42	34.90	148	218	Peak	VERTICAL
2	4912.88	34.81	54.00	-19.19	27.97	7.28	34.46	34.90	148	218	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 11.0 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

<For EUT 1>

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11b CH 1, 6, 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 19, 2016~Apr. 29, 2016		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2335.60	68.31	74.00	-5.69	35.76	4.46	28.09	0.00	1	180 Peak	HORIZONTAL
2	2386.40	53.95	54.00	-0.05	21.40	4.53	28.02	0.00	1	180 Average	HORIZONTAL
3	2408.00	111.93			79.37	4.56	28.00	0.00	1	180 Average	HORIZONTAL
4	2409.60	115.86			83.30	4.56	28.00	0.00	1	180 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2355.38	70.70	74.00	-3.30	39.43	4.30	26.97	0.00	235	360 Peak	HORIZONTAL
2	2355.96	52.26	54.00	-1.74	20.99	4.30	26.97	0.00	235	360 Average	HORIZONTAL
3	2434.40	118.53			87.00	4.37	27.16	0.00	235	360 Peak	HORIZONTAL
4	2435.26	115.98			84.45	4.37	27.16	0.00	235	360 Average	HORIZONTAL
5	2483.50	49.23	54.00	-4.77	17.54	4.42	27.27	0.00	235	360 Average	HORIZONTAL
6	2486.39	63.04	74.00	-10.96	31.35	4.42	27.27	0.00	235	360 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2461.20	118.36			86.41	4.01	27.94	0.00	356	192 Peak	HORIZONTAL
2	2461.20	114.47			82.52	4.01	27.94	0.00	356	192 Average	HORIZONTAL
3	2483.50	62.82	74.00	-11.18	30.86	4.04	27.92	0.00	356	192 Peak	HORIZONTAL
4	2483.50	53.49	54.00	-0.51	21.53	4.04	27.92	0.00	356	192 Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 1, 6, 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 19, 2016~Apr. 29, 2016		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	2332.80	68.77	74.00	-5.23	36.83	3.85	28.09	0.00	357	201 Peak	HORIZONTAL
2	2360.00	53.89	54.00	-0.11	21.95	3.88	28.06	0.00	357	201 Average	HORIZONTAL
3	2412.80	118.17			86.24	3.94	27.99	0.00	357	201 Peak	HORIZONTAL
4	2412.80	108.39			76.46	3.94	27.99	0.00	357	201 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2358.56	73.06	74.00	-0.94	41.77	4.30	26.99	0.00	206	359 Peak	HORIZONTAL
2	2388.95	53.71	54.00	-0.29	22.33	4.33	27.05	0.00	206	359 Average	HORIZONTAL
3	2437.87	111.65			80.12	4.37	27.16	0.00	206	359 Average	HORIZONTAL
4	2437.87	121.54			90.01	4.37	27.16	0.00	206	359 Peak	HORIZONTAL
5	2483.50	49.72	54.00	-4.28	18.03	4.42	27.27	0.00	206	359 Average	HORIZONTAL
6	2488.42	65.97	74.00	-8.03	34.28	4.42	27.27	0.00	206	359 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	2464.00	114.58			82.63	4.01	27.94	0.00	3	165 Peak	HORIZONTAL
2	2464.00	104.98			73.03	4.01	27.94	0.00	3	165 Average	HORIZONTAL
3	2483.50	53.68	54.00	-0.32	21.72	4.04	27.92	0.00	3	165 Average	HORIZONTAL
4	2484.00	69.12	74.00	-4.88	37.16	4.04	27.92	0.00	3	165 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 19, 2016~Apr. 29, 2016		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2390.00	69.85	74.00	-4.15	37.93	3.90	28.02	0.00	355	223	Peak	HORIZONTAL
2	2390.00	53.73	54.00	-0.27	21.81	3.90	28.02	0.00	355	223	Average	HORIZONTAL
3	2407.60	114.67			82.74	3.93	28.00	0.00	355	223	Peak	HORIZONTAL
4	2407.60	105.05			73.12	3.93	28.00	0.00	355	223	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2387.80	71.35	74.00	-2.65	39.97	4.33	27.05	0.00	186	359	Peak	HORIZONTAL
2	2389.53	53.91	54.00	-0.09	22.53	4.33	27.05	0.00	186	359	Average	HORIZONTAL
3	2429.19	110.55			79.04	4.37	27.14	0.00	186	359	Average	HORIZONTAL
4	2430.05	120.53			89.02	4.37	27.14	0.00	186	359	Peak	HORIZONTAL
5	2483.50	48.95	54.00	-5.05	17.26	4.42	27.27	0.00	186	359	Average	HORIZONTAL
6	2485.24	65.00	74.00	-9.00	33.31	4.42	27.27	0.00	186	359	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2462.80	115.24			83.29	4.01	27.94	0.00	1	241	Peak	HORIZONTAL
2	2464.00	104.58			72.63	4.01	27.94	0.00	1	241	Average	HORIZONTAL
3	2483.50	53.79	54.00	-0.21	21.83	4.04	27.92	0.00	1	241	Average	HORIZONTAL
4	2484.00	69.27	74.00	-4.73	37.31	4.04	27.92	0.00	1	241	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 19, 2016~Apr. 29, 2016		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.00	53.94	54.00	-0.06	22.02	3.90	28.02	0.00	1	230	Average	HORIZONTAL
2	2390.00	70.17	74.00	-3.83	38.25	3.90	28.02	0.00	1	230	Peak	HORIZONTAL
3	2408.20	107.60			75.67	3.93	28.00	0.00	1	230	Peak	HORIZONTAL
4	2408.80	98.42			66.49	3.93	28.00	0.00	1	230	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2350.17	64.69	74.00	-9.31	33.42	4.30	26.97	0.00	237	359	Peak	HORIZONTAL
2	2390.00	53.41	54.00	-0.59	22.03	4.33	27.05	0.00	237	359	Average	HORIZONTAL
3	2428.32	102.05			70.54	4.37	27.14	0.00	237	359	Average	HORIZONTAL
4	2429.19	111.16			79.65	4.37	27.14	0.00	237	359	Peak	HORIZONTAL
5	2483.50	47.72	54.00	-6.28	16.03	4.42	27.27	0.00	237	359	Average	HORIZONTAL
6	2485.67	60.61	74.00	-13.39	28.92	4.42	27.27	0.00	237	359	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2443.00	100.01			68.07	3.98	27.96	0.00	358	233	Average	HORIZONTAL
2	2443.60	108.86			76.92	3.98	27.96	0.00	358	233	Peak	HORIZONTAL
3	2483.50	53.61	54.00	-0.39	21.65	4.04	27.92	0.00	358	233	Average	HORIZONTAL
4	2485.00	68.14	74.00	-5.86	36.18	4.04	27.92	0.00	358	233	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11b / Reference Level

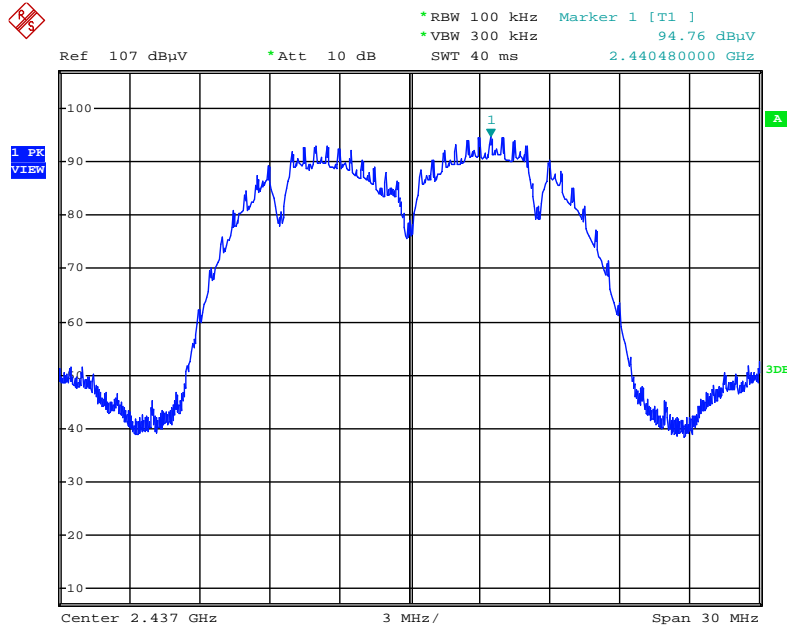


Date: 20.APR.2016 01:48:47

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

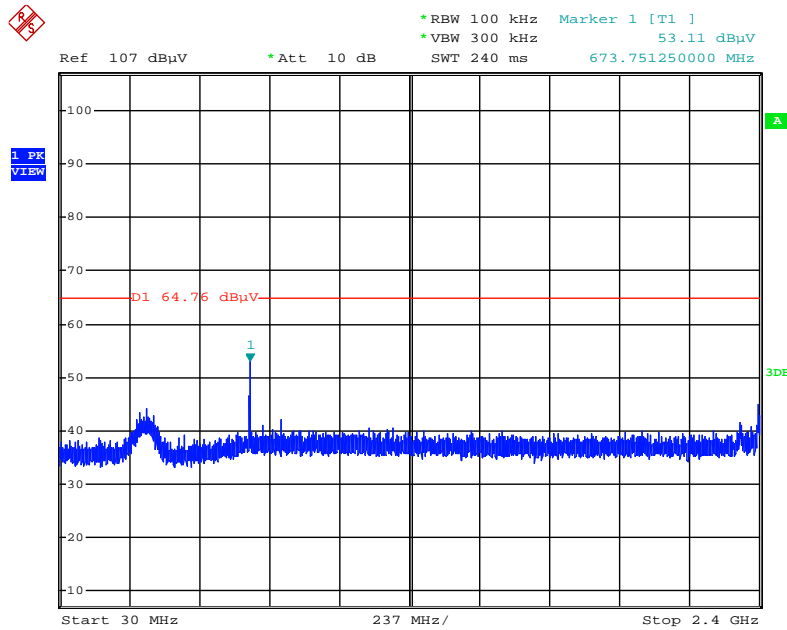


Date: 20.APR.2016 01:49:53

Plot on Configuration IEEE 802.11b / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

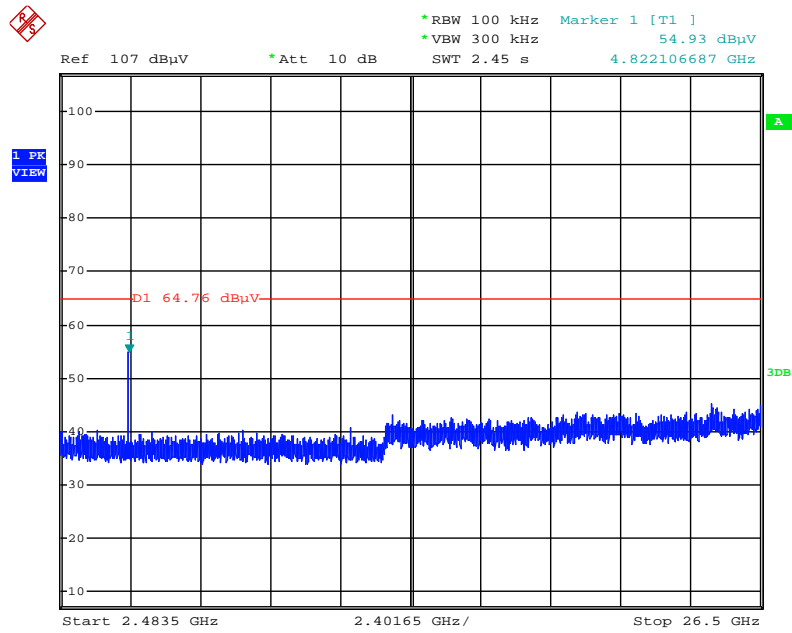


Date: 20.APR.2016 01:50:33

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

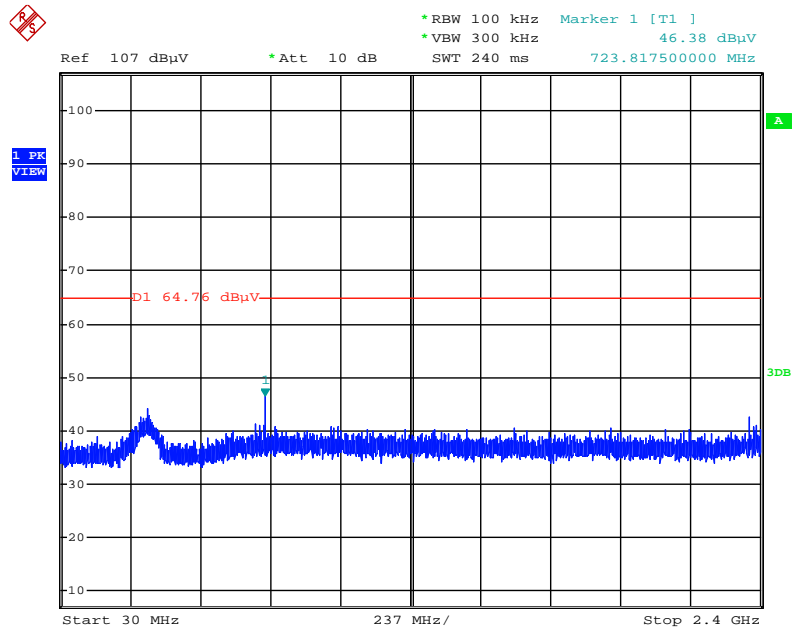


Date: 20.APR.2016 01:51:42

Plot on Configuration IEEE 802.11b / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

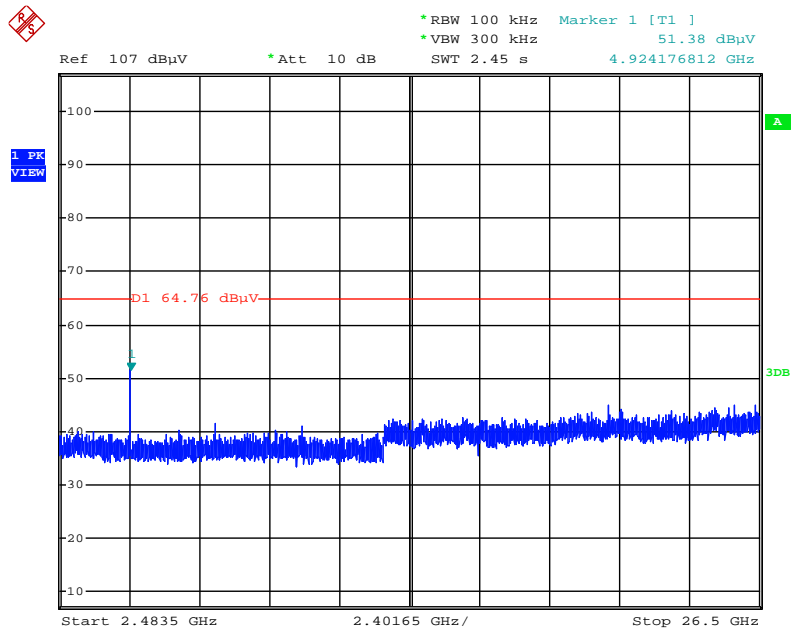


Date: 20.APR.2016 01:57:29

Plot on Configuration IEEE 802.11g / Reference Level

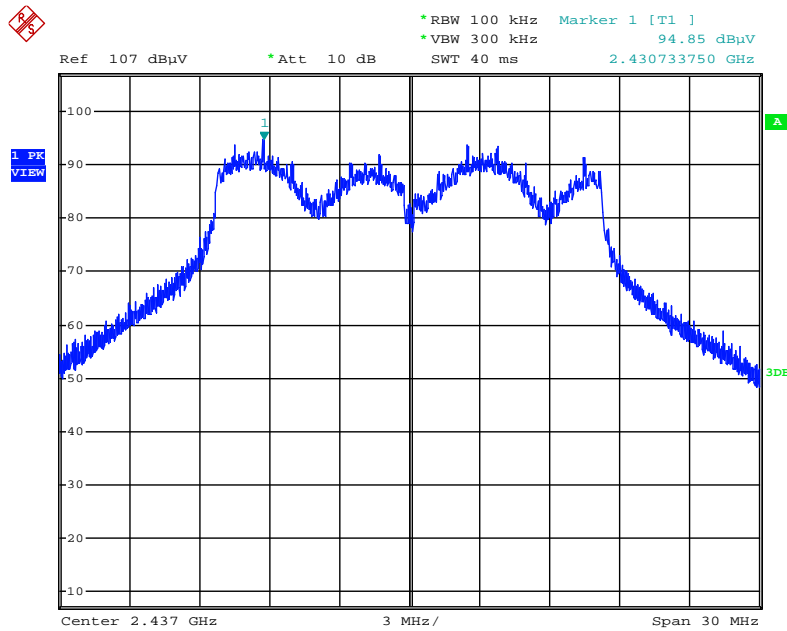


Date: 20.APR.2016 01:53:00

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

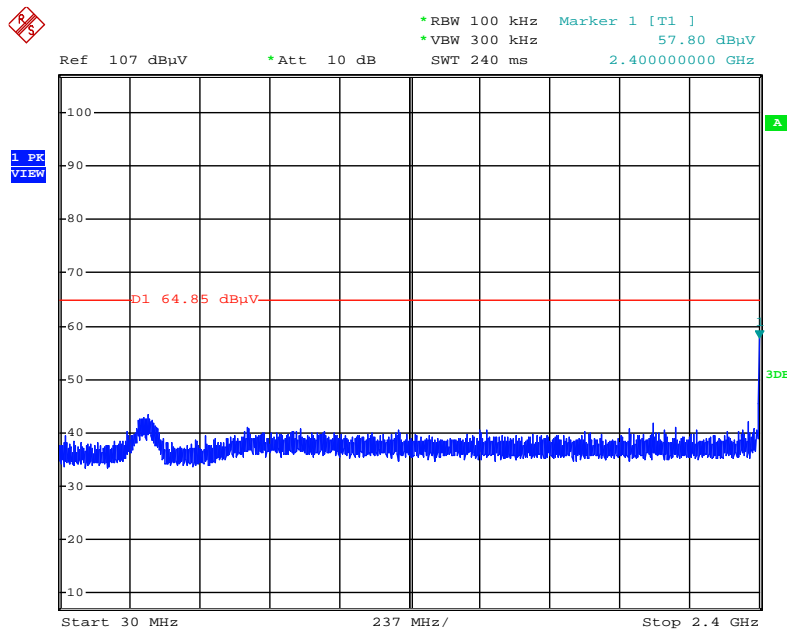


Date: 20.APR.2016 01:53:59

Plot on Configuration IEEE 802.11g / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

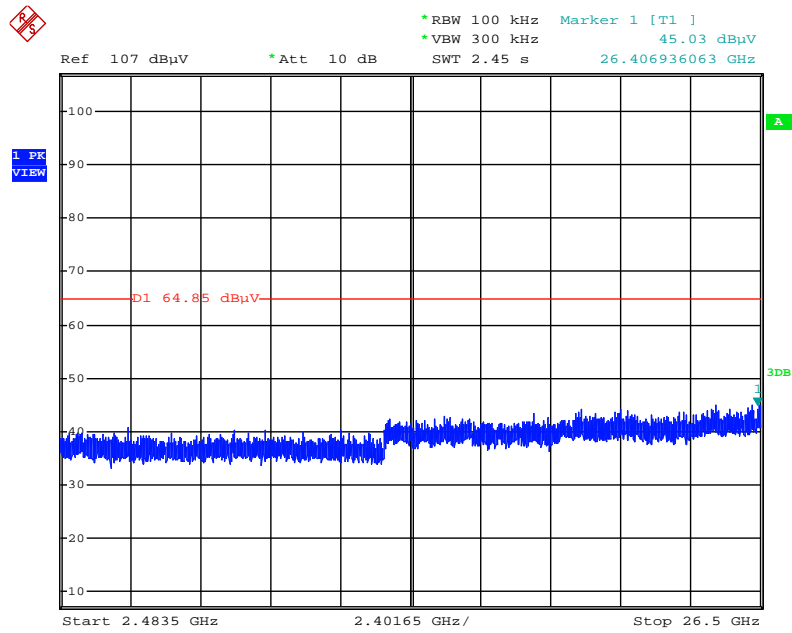


Date: 20.APR.2016 01:54:28

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

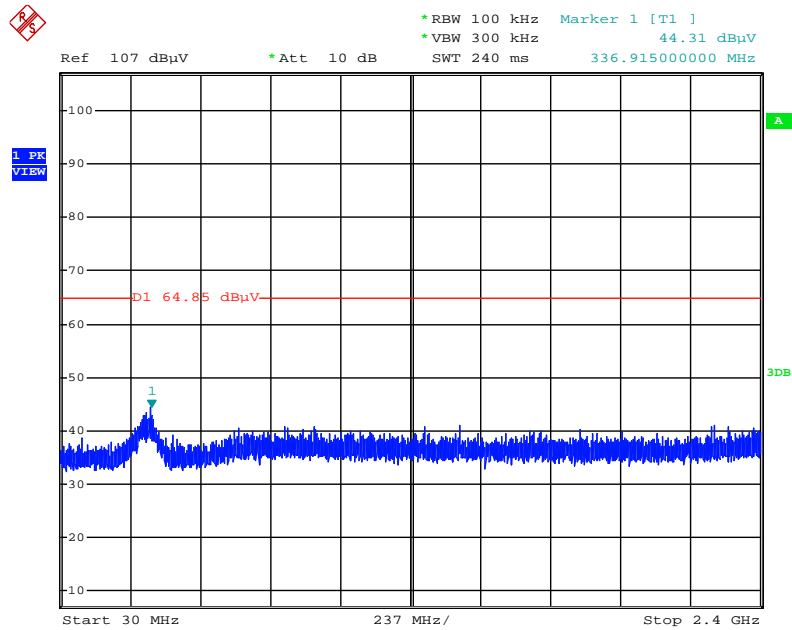


Date: 20.APR.2016 01:56:22

Plot on Configuration IEEE 802.11g / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

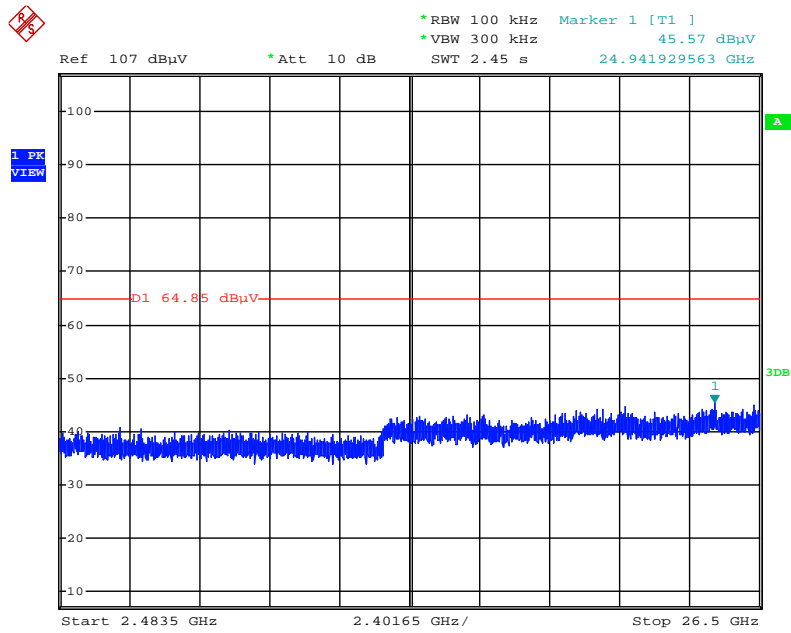


Date: 20.APR.2016 01:55:20

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

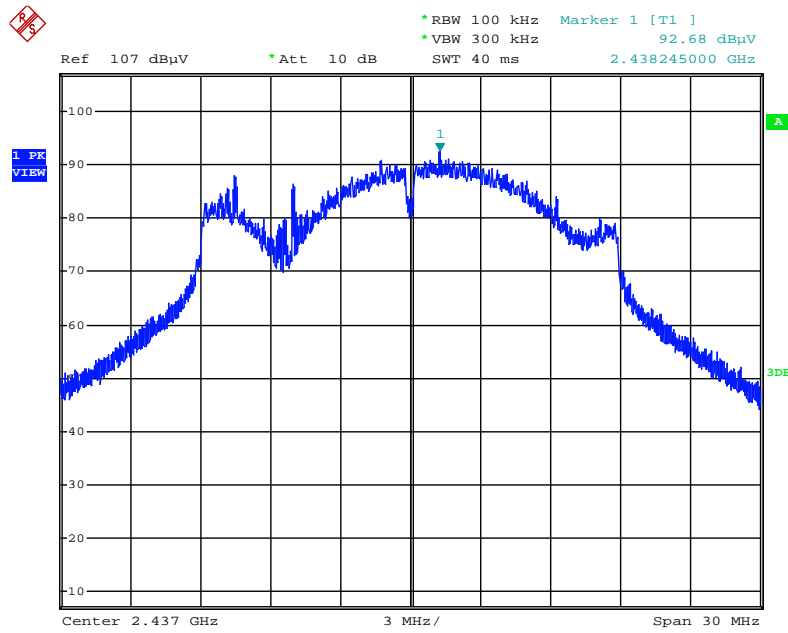


Date: 20.APR.2016 02:01:24

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

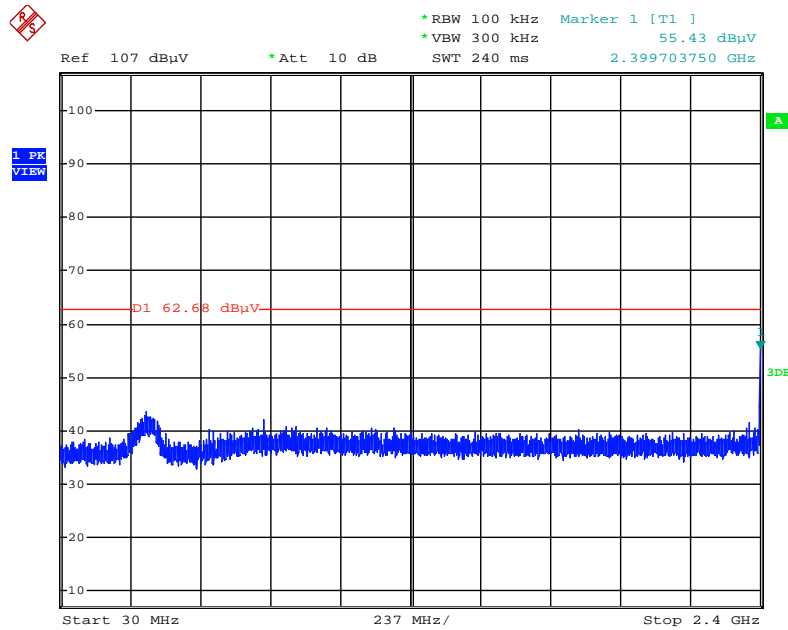


Date: 20.APR.2016 02:02:19

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

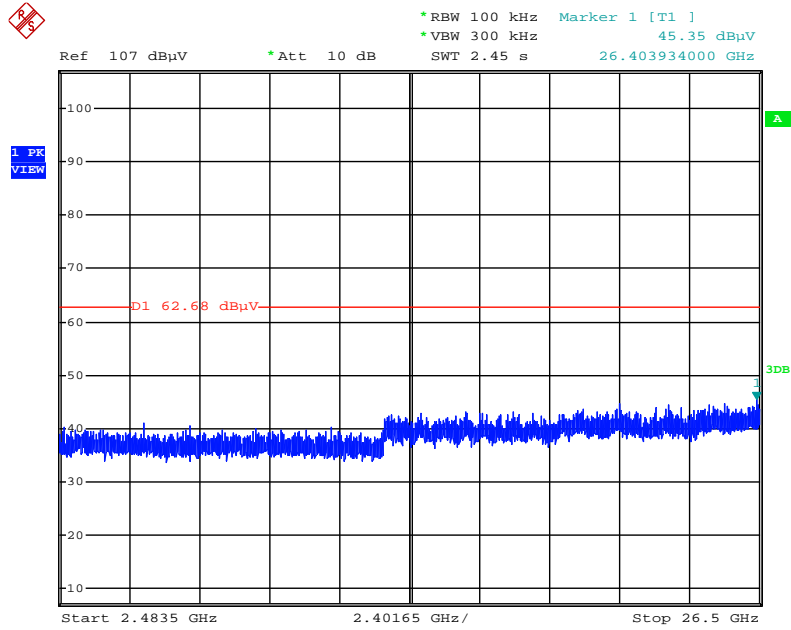


Date: 20.APR.2016 02:02:47

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

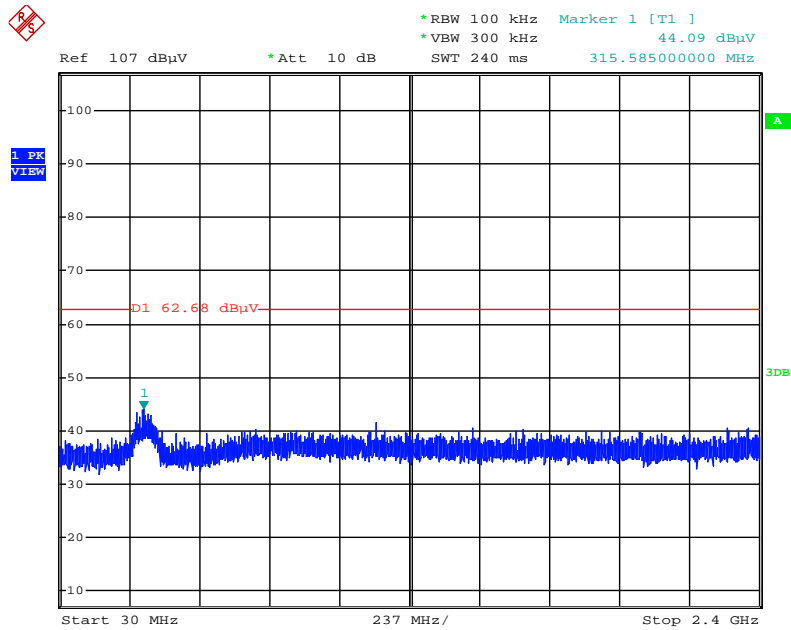


Date: 20.APR.2016 02:04:08

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

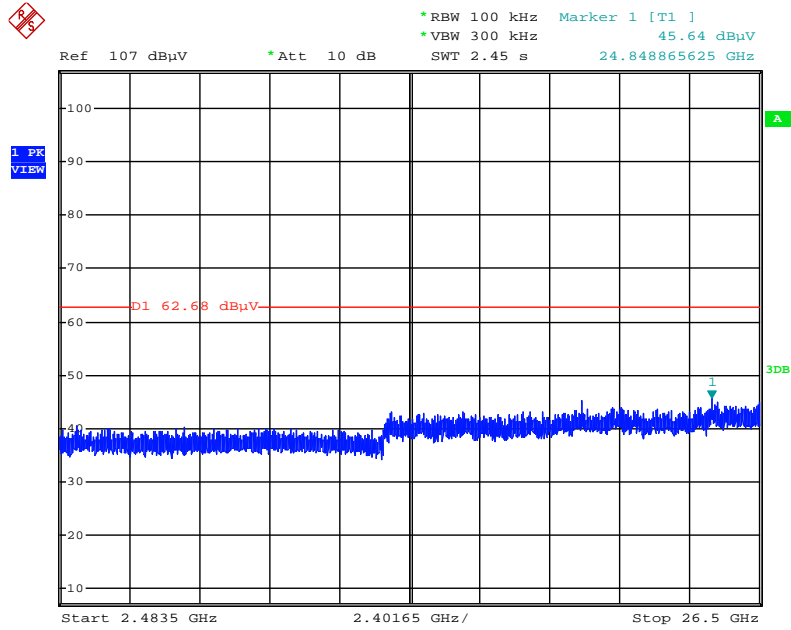


Date: 20.APR.2016 02:03:25

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

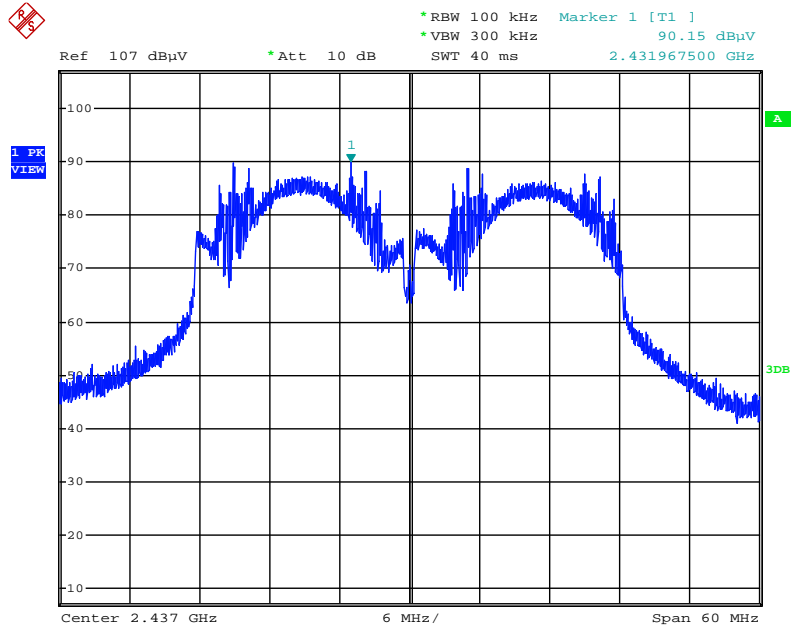


Date: 20.APR.2016 02:05:45

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

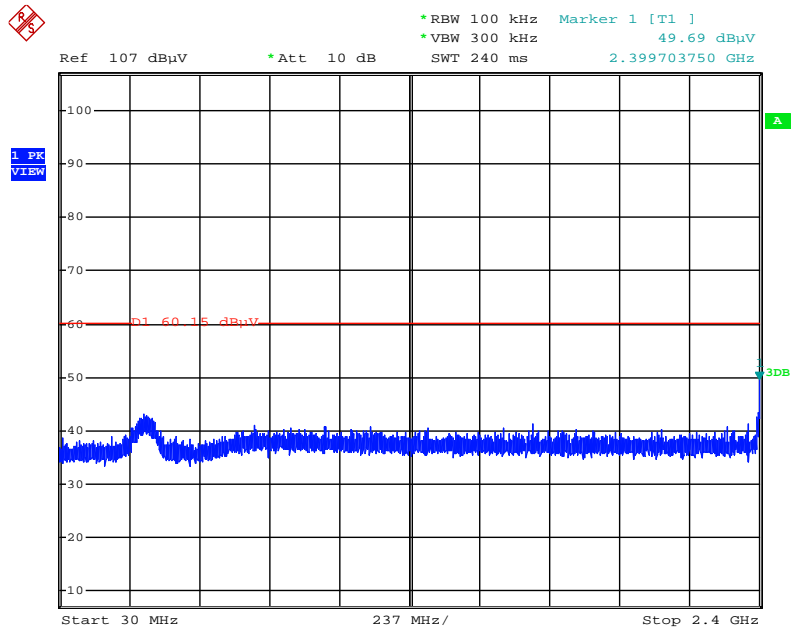


Date: 20.APR.2016 02:06:51

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2483.5MHz~26500MHz (down 30dBc)

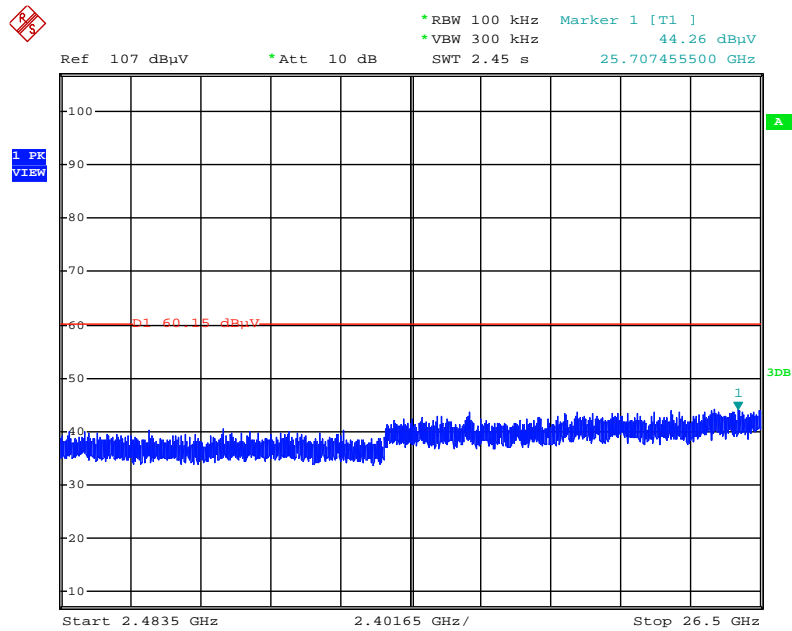


Date: 20.APR.2016 02:07:19

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

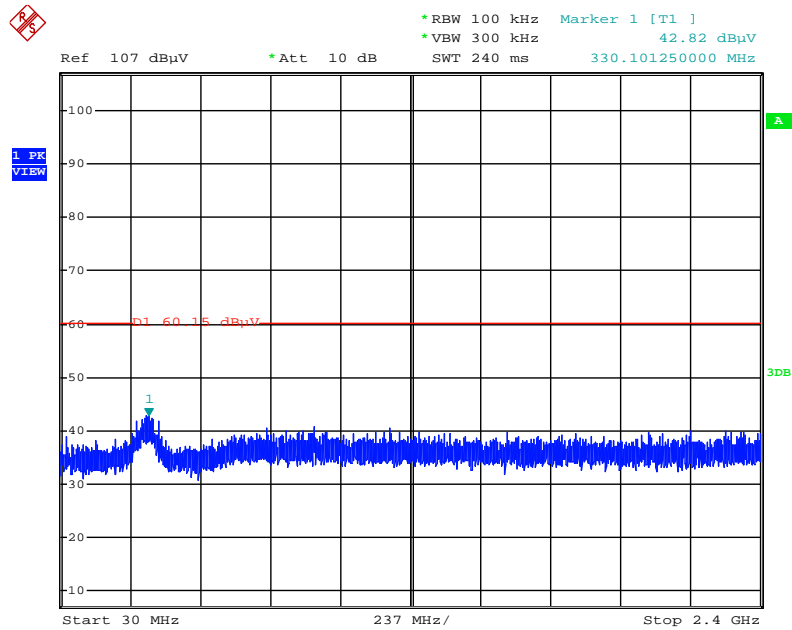

Date: 20.APR.2016 02:08:10

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2483.5MHz~26500MHz (down 30dBc)

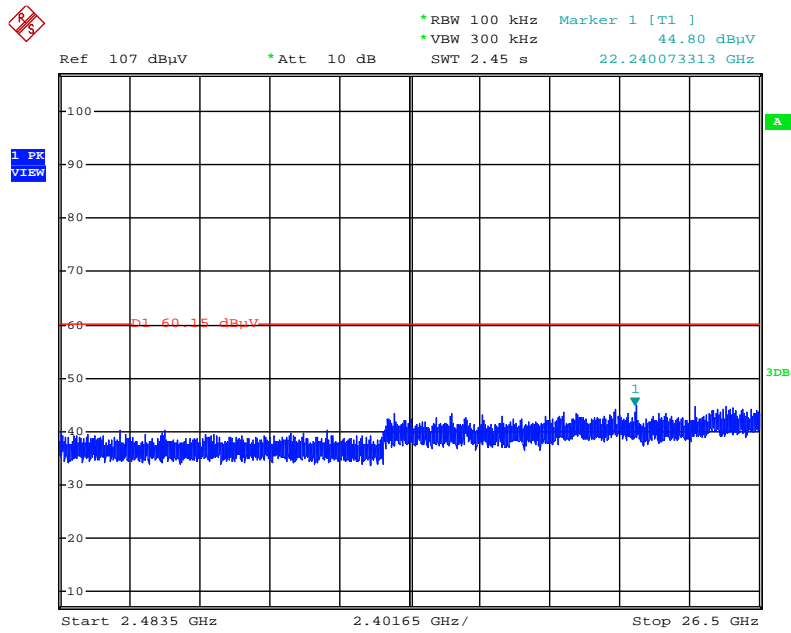

Date: 20.APR.2016 02:07:52

<For EUT 2>

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11b CH 1, 6, 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2375.30	53.69	54.00	-0.31	20.32	4.83	28.54	0.00	205	1	Average	VERTICAL
2	2385.51	64.31	74.00	-9.69	30.89	4.85	28.57	0.00	205	1	Peak	VERTICAL
3	2414.56	117.93			84.42	4.88	28.63	0.00	205	1	Peak	VERTICAL
4	2414.72	114.38			80.87	4.88	28.63	0.00	205	1	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2358.47	71.50	74.00	-2.50	38.17	4.82	28.51	0.00	237	2	Peak	VERTICAL
2	2359.76	52.78	54.00	-1.22	19.45	4.82	28.51	0.00	237	2	Average	VERTICAL
3	2437.96	119.77			86.20	4.90	28.67	0.00	237	2	Peak	VERTICAL
4	2438.60	116.52			82.95	4.90	28.67	0.00	237	2	Average	VERTICAL
5	2483.50	50.56	54.00	-3.44	16.84	4.95	28.77	0.00	237	2	Average	VERTICAL
6	2485.74	62.61	74.00	-11.39	28.89	4.95	28.77	0.00	237	2	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2461.20	113.44			79.78	4.93	28.73	0.00	182	2	Average	VERTICAL
2	2462.96	117.27			83.61	4.93	28.73	0.00	182	2	Peak	VERTICAL
3	2483.50	53.76	54.00	-0.24	20.04	4.95	28.77	0.00	182	2	Average	VERTICAL
4	2483.50	63.93	74.00	-10.07	30.21	4.95	28.77	0.00	182	2	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 1, 6, 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.56	66.62	74.00	-7.38	33.20	4.85	28.57	0.00	175	358	Peak	VERTICAL
2	2390.00	53.94	54.00	-0.06	20.52	4.85	28.57	0.00	175	358	Average	VERTICAL
3	2410.08	114.24			80.76	4.87	28.61	0.00	175	358	Peak	VERTICAL
4	2410.40	105.25			71.77	4.87	28.61	0.00	175	358	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2343.09	53.15	54.00	-0.85	19.85	4.81	28.49	0.00	150	358	Average	VERTICAL
2	2360.08	68.72	74.00	-5.28	35.39	4.82	28.51	0.00	150	358	Peak	VERTICAL
3	2433.80	121.47			87.90	4.90	28.67	0.00	150	358	Peak	VERTICAL
4	2434.76	111.76			78.19	4.90	28.67	0.00	150	358	Average	VERTICAL
5	2483.80	52.19	54.00	-1.81	18.47	4.95	28.77	0.00	150	358	Average	VERTICAL
6	2484.44	68.81	74.00	-5.19	35.09	4.95	28.77	0.00	150	358	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2454.63	112.90			79.27	4.92	28.71	0.00	176	354	Peak	VERTICAL
2	2454.95	103.51			69.88	4.92	28.71	0.00	176	354	Average	VERTICAL
3	2483.50	53.78	54.00	-0.22	20.06	4.95	28.77	0.00	176	354	Average	VERTICAL
4	2483.50	67.62	74.00	-6.38	33.90	4.95	28.77	0.00	176	354	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.92	68.27	74.00	-5.73	34.85	4.85	28.57	0.00	150	359	Peak	VERTICAL
2	2390.00	53.78	54.00	-0.22	20.36	4.85	28.57	0.00	150	359	Average	VERTICAL
3	2406.87	114.04			80.56	4.87	28.61	0.00	150	359	Peak	VERTICAL
4	2407.19	104.58			71.10	4.87	28.61	0.00	150	359	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.24	72.12	74.00	-1.88	38.70	4.85	28.57	0.00	212	352	Peak	VERTICAL
2	2389.56	53.77	54.00	-0.23	20.35	4.85	28.57	0.00	212	352	Average	VERTICAL
3	2429.63	109.49			75.94	4.89	28.66	0.00	212	352	Average	VERTICAL
4	2429.63	118.49			84.94	4.89	28.66	0.00	212	352	Peak	VERTICAL
5	2485.40	51.35	54.00	-2.65	17.63	4.95	28.77	0.00	212	352	Average	VERTICAL
6	2488.92	68.87	74.00	-5.13	35.15	4.95	28.77	0.00	212	352	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2462.96	110.21			76.55	4.93	28.73	0.00	194	359	Peak	VERTICAL
2	2463.60	100.97			67.31	4.93	28.73	0.00	194	359	Average	VERTICAL
3	2483.50	53.92	54.00	-0.08	20.20	4.95	28.77	0.00	194	359	Average	VERTICAL
4	2483.50	69.28	74.00	-4.72	35.56	4.95	28.77	0.00	194	359	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 22, 2016		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.63	67.95	74.00	-6.05	34.53	4.85	28.57	0.00	165	358	Peak	VERTICAL
2	2390.00	53.73	54.00	-0.27	20.31	4.85	28.57	0.00	165	358	Average	VERTICAL
3	2406.94	107.03			73.55	4.87	28.61	0.00	165	358	Peak	VERTICAL
4	2407.90	98.05			64.57	4.87	28.61	0.00	165	358	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2384.76	66.02	74.00	-7.98	32.60	4.85	28.57	0.00	210	356	Peak	VERTICAL
2	2390.00	52.52	54.00	-1.48	19.10	4.85	28.57	0.00	210	356	Average	VERTICAL
3	2424.82	110.69			77.17	4.88	28.64	0.00	210	356	Peak	VERTICAL
4	2433.47	100.77			67.20	4.90	28.67	0.00	210	356	Average	VERTICAL
5	2483.50	51.48	54.00	-2.52	17.76	4.95	28.77	0.00	210	356	Average	VERTICAL
6	2491.17	64.25	74.00	-9.75	30.50	4.96	28.79	0.00	210	356	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2442.06	97.74			64.14	4.91	28.69	0.00	165	358	Average	VERTICAL
2	2463.22	107.11			73.45	4.93	28.73	0.00	165	358	Peak	VERTICAL
3	2483.50	53.74	54.00	-0.26	20.02	4.95	28.77	0.00	165	358	Average	VERTICAL
4	2484.05	66.75	74.00	-7.25	33.03	4.95	28.77	0.00	165	358	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11b / Reference Level

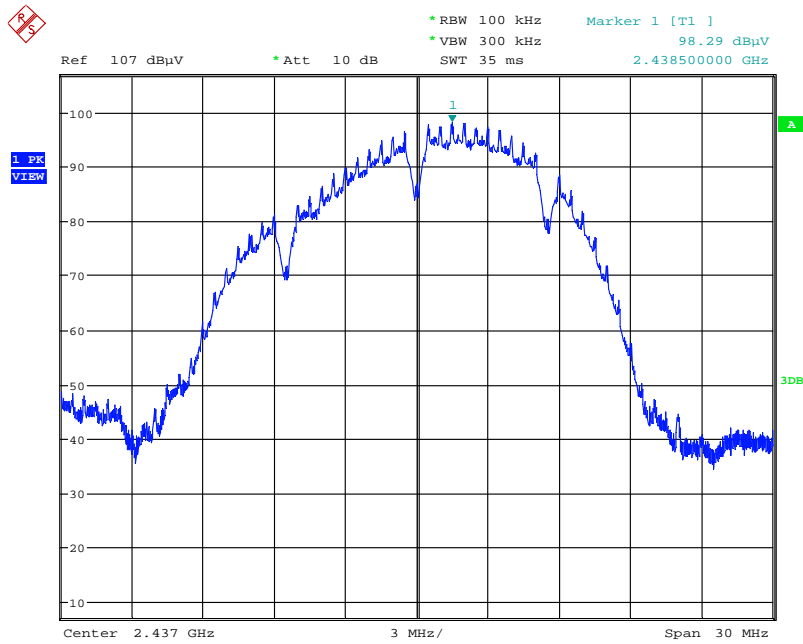


Date: 22.APR.2016 23:21:38

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

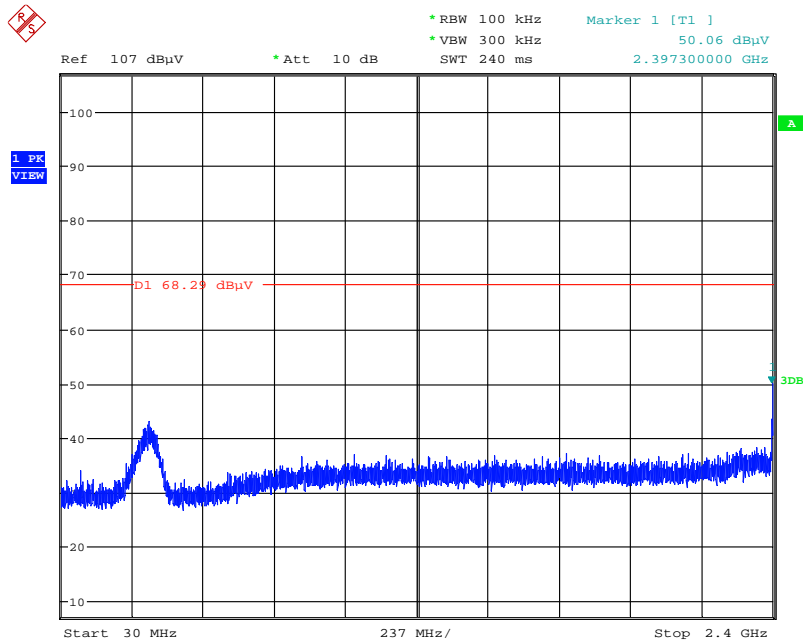


Date: 22.APR.2016 23:22:33

Plot on Configuration IEEE 802.11b / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

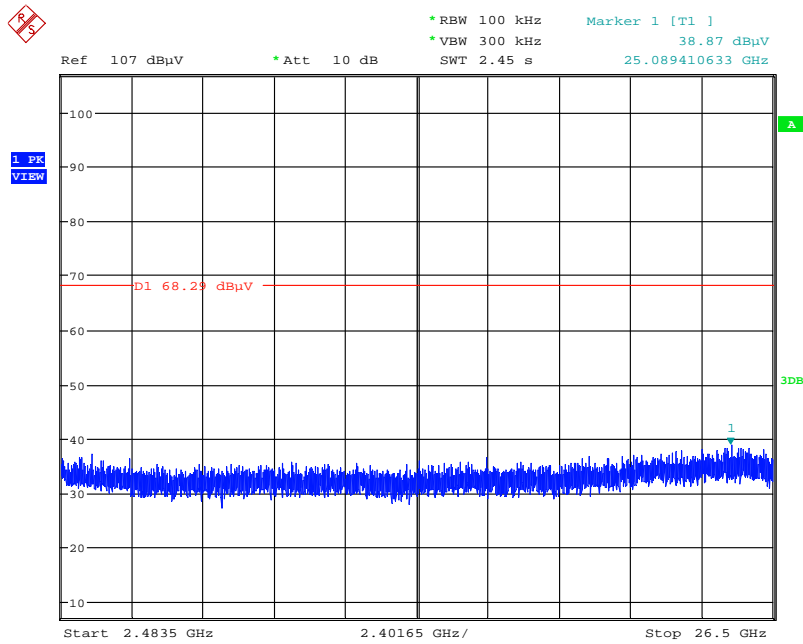


Date: 22.APR.2016 23:23:07

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

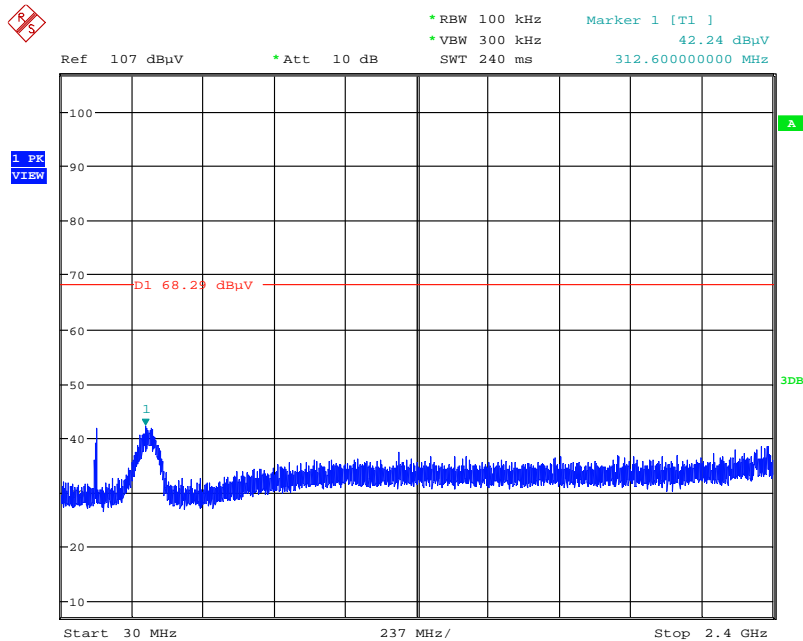


Date: 22.APR.2016 23:23:39

Plot on Configuration IEEE 802.11b / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

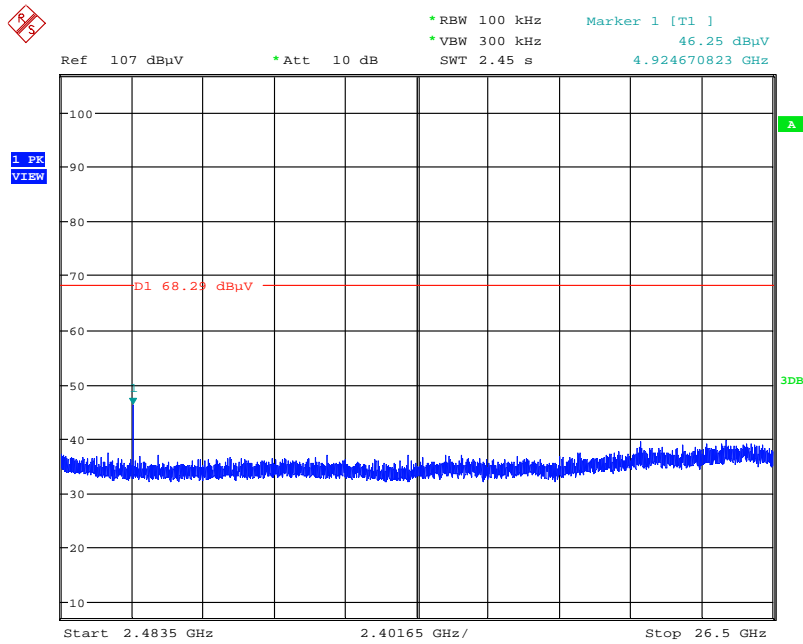


Date: 22.APR.2016 23:24:46

Plot on Configuration IEEE 802.11g / Reference Level

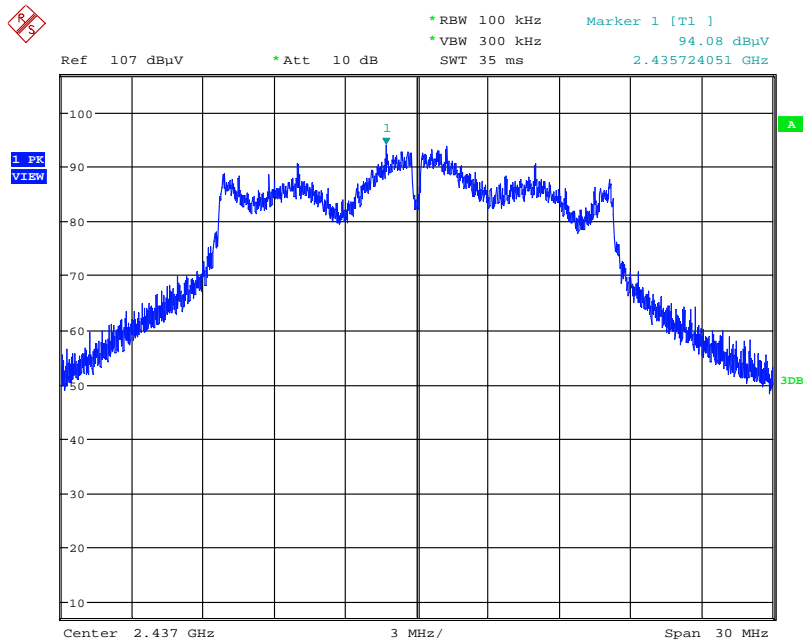


Date: 22.APR.2016 23:16:03

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

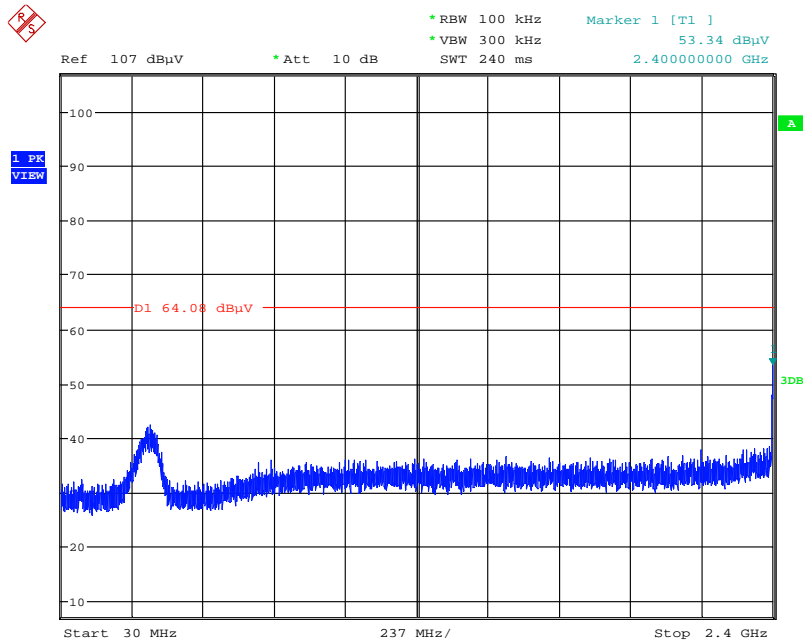


Date: 22.APR.2016 23:17:01

Plot on Configuration IEEE 802.11g / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

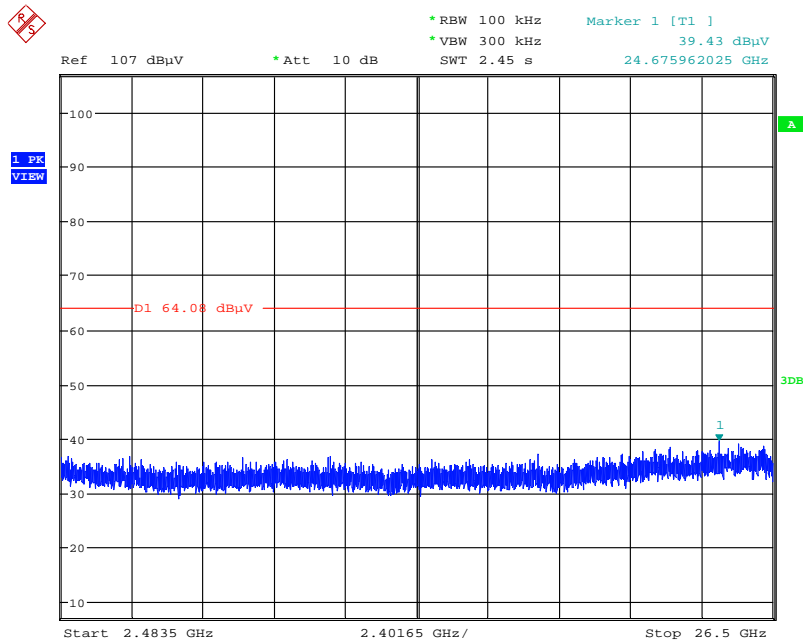


Date: 22.APR.2016 23:17:42

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

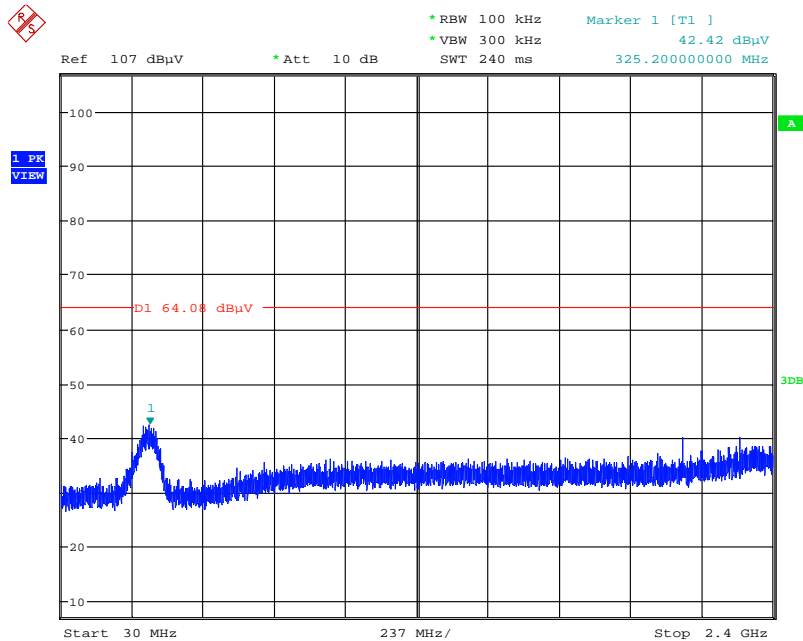


Date: 22.APR.2016 23:18:28

Plot on Configuration IEEE 802.11g / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

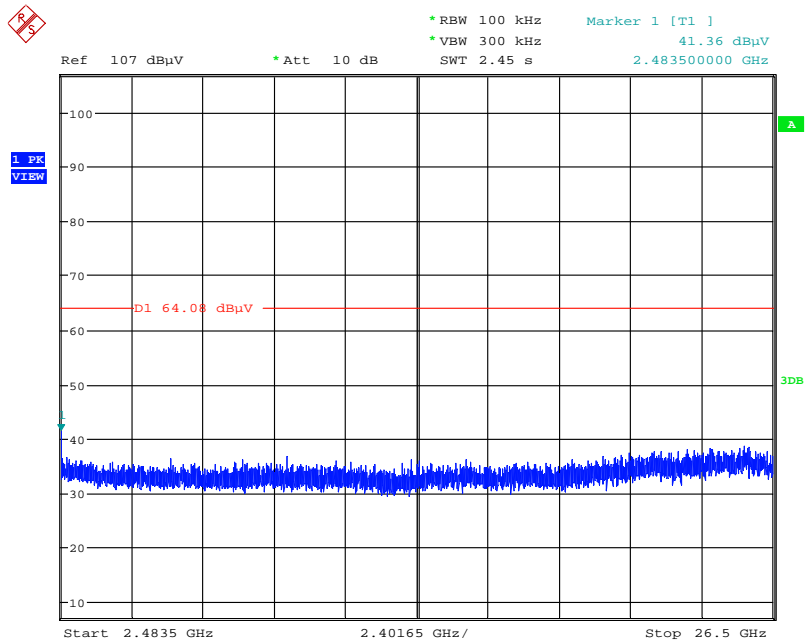


Date: 22.APR.2016 23:19:03

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

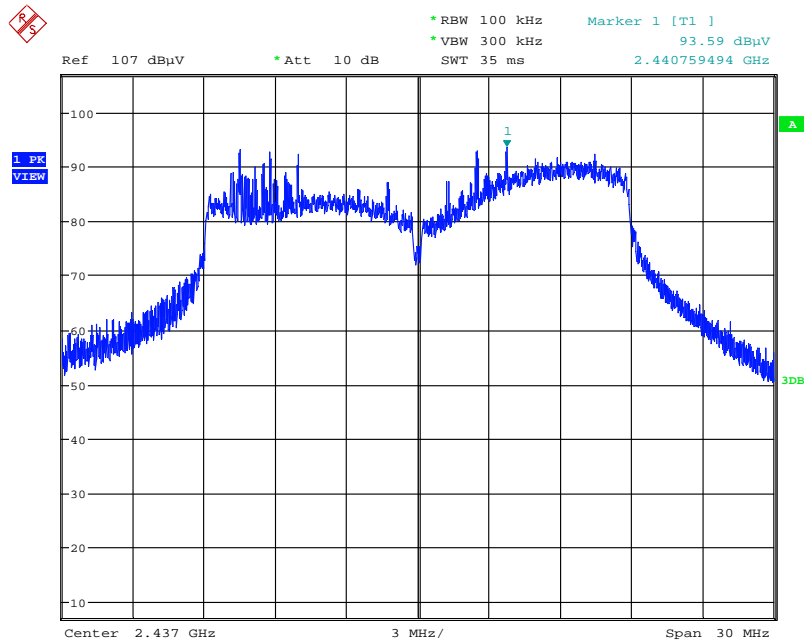


Date: 22.APR.2016 23:26:01

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

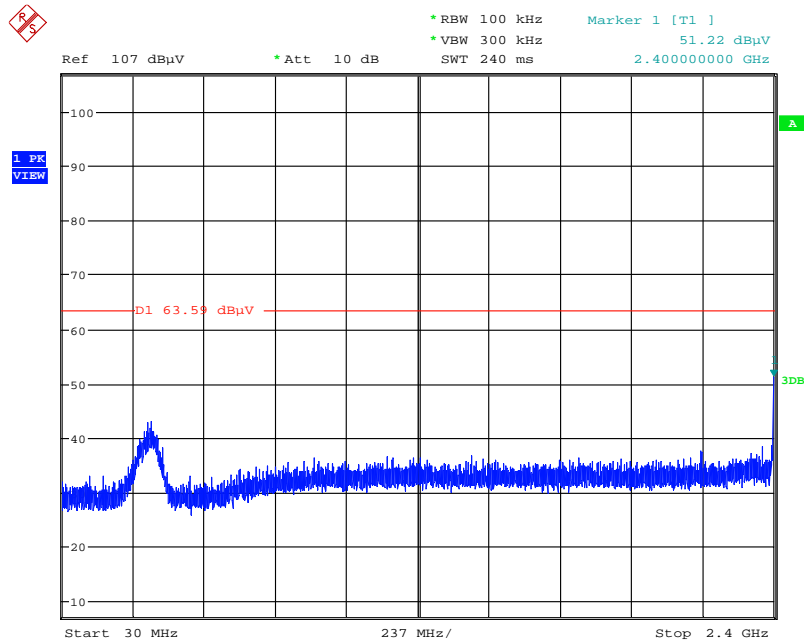


Date: 22.APR.2016 23:26:50

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

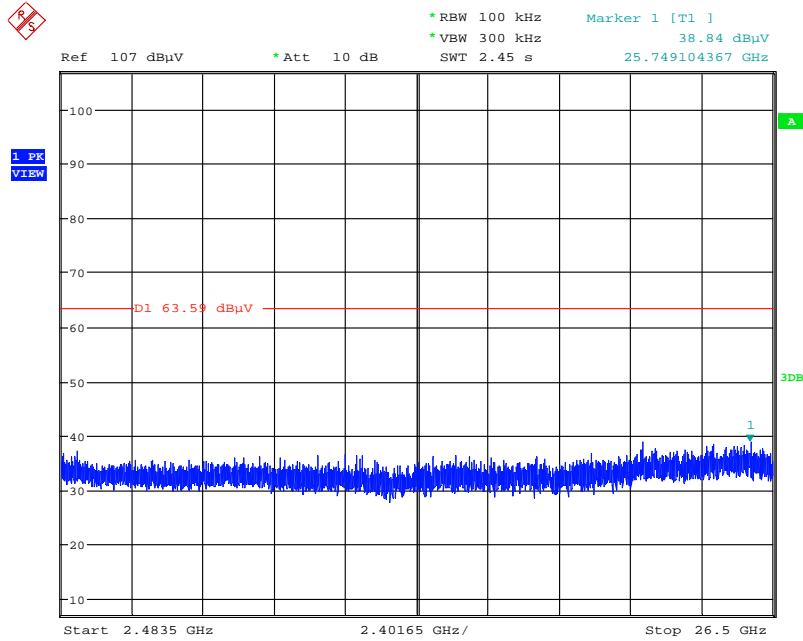


Date: 22.APR.2016 23:27:15

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

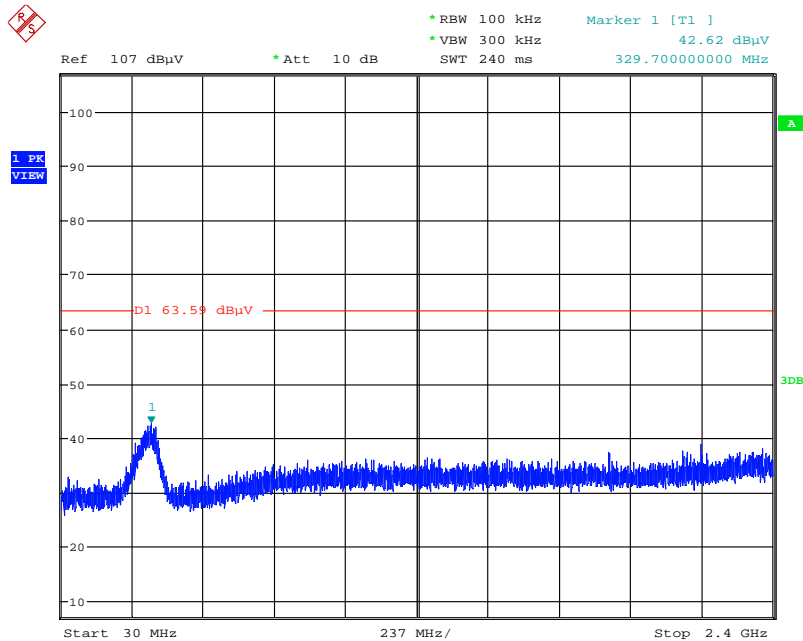


Date: 22.APR.2016 23:27:49

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

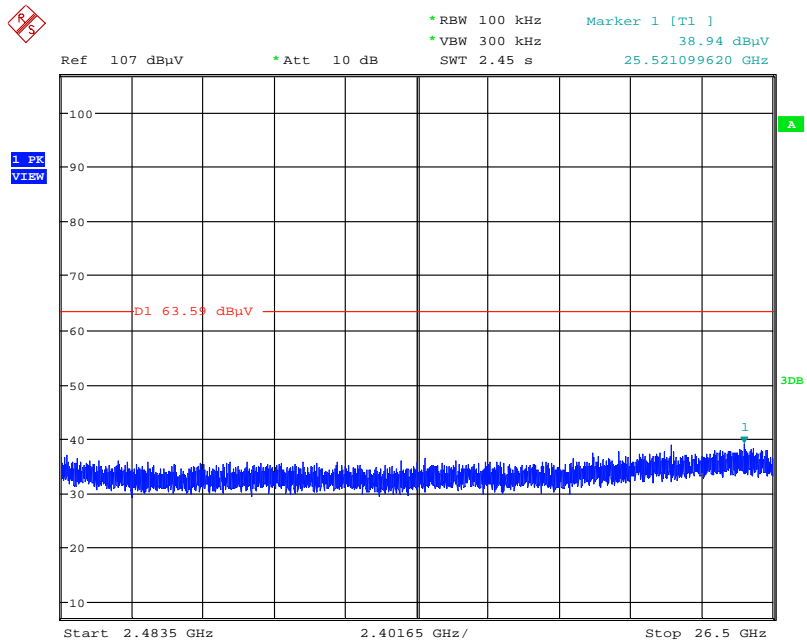


Date: 22.APR.2016 23:28:13

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

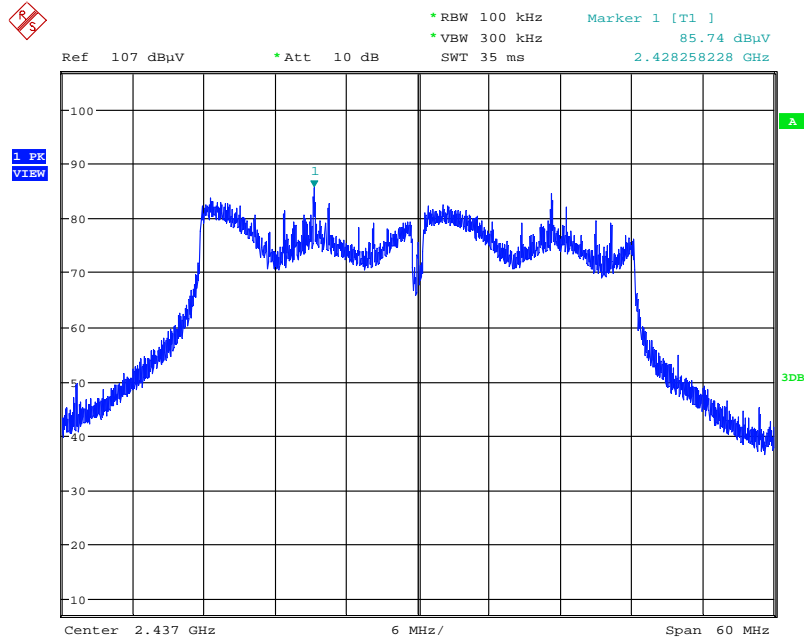


Date: 22.APR.2016 23:29:42

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

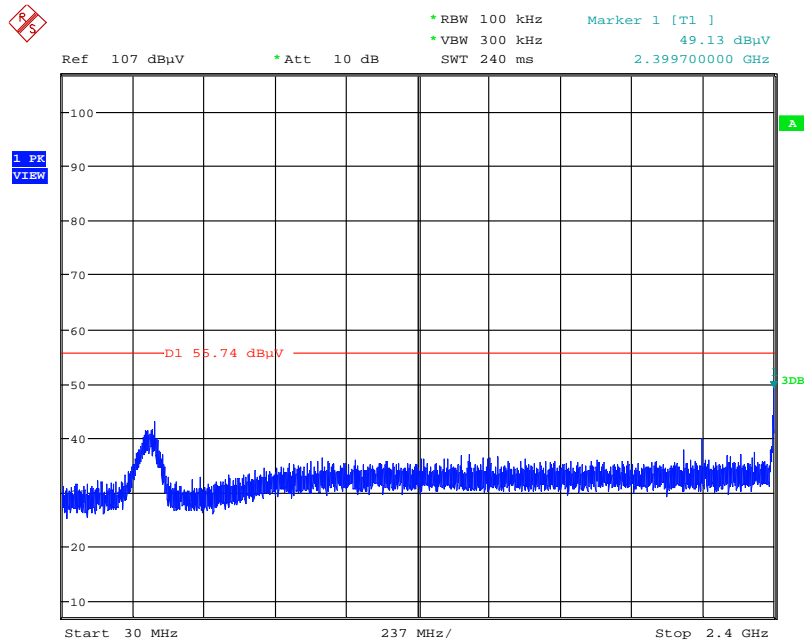


Date: 22.APR.2016 23:30:42

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2483.5MHz~26500MHz (down 30dBc)

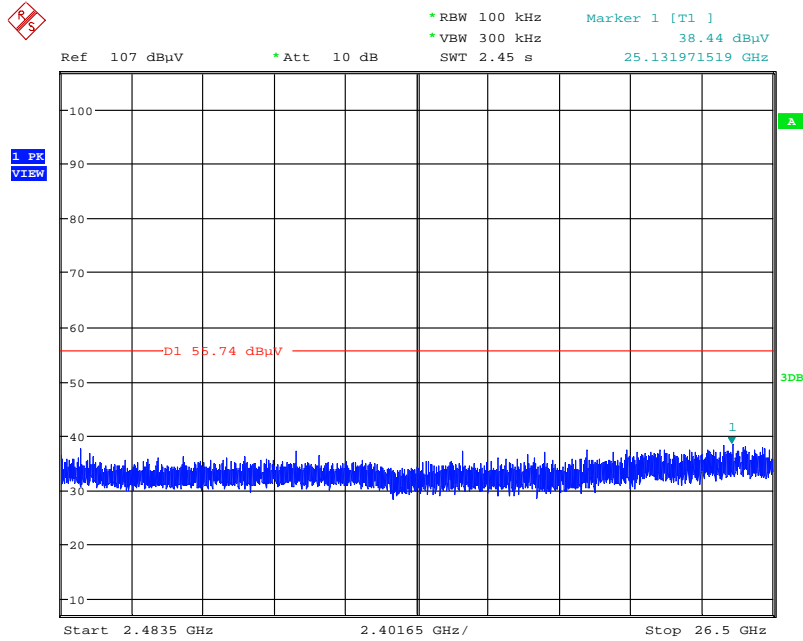


Date: 22.APR.2016 23:31:03

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

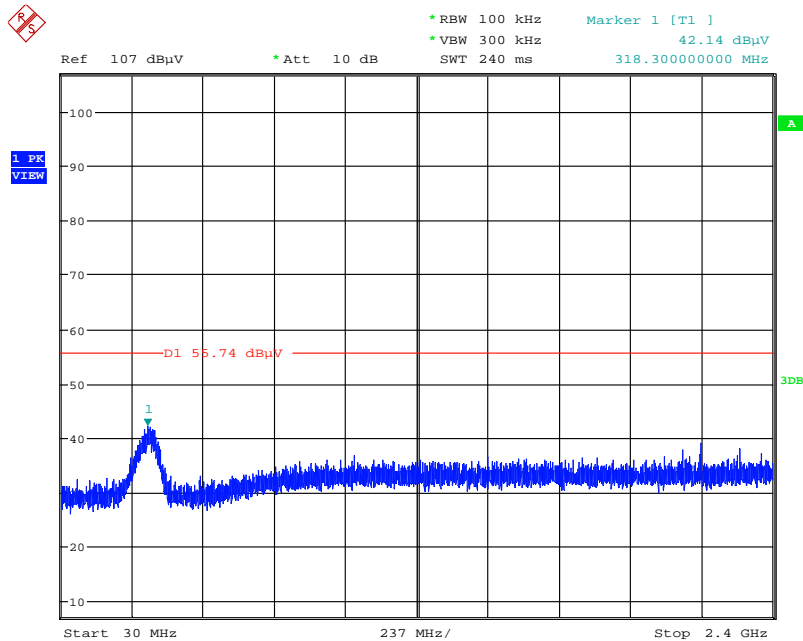

Date: 22.APR.2016 23:31:40

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2483.5MHz~26500MHz (down 30dBc)

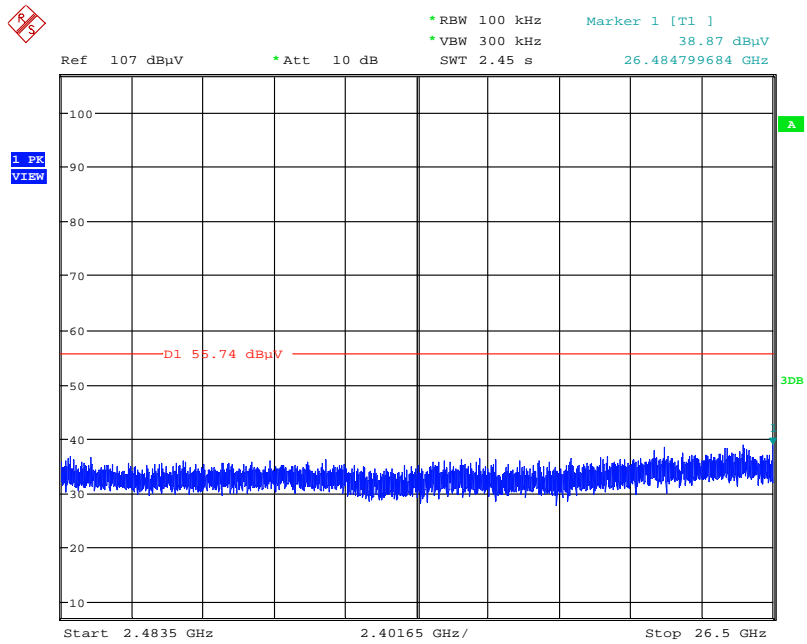

Date: 22.APR.2016 23:32:03

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 25, 2015	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 27, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz - 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz - 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz - 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz - 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz - 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

*Calibration Interval of instruments listed above is two year.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%