

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

Test Standard FCC Part 15.247
FCC ID PPQ-WCBN4508M
Product name 802.11a/b/g/n/ac 2Tx2R + BT V4.2 LE USB Combo Module
Brand Name WCBN4508M
Model No. LITE-ON
Test Result Pass

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc.(Wugu Laboratory)



Approved by:

A handwritten signature in black ink, appearing to read "Sam Chuang".

Sam Chuang
Manager

Reviewed by:

A handwritten signature in black ink, appearing to read "Jerry Chuang".

Jerry Chuang
Engineer

Revision History

Rev.	Issue Date	Revisions	Revised By
00	June 8, 2018	Initial Issue	Doris Chu

Table of contents

1. GENERAL INFORMATION.....	4
1.1 EUT INFORMATION	4
1.2 EUT CHANNEL INFORMATION	5
1.3 ANTENNA INFORMATION.....	5
1.4 MEASUREMENT UNCERTAINTY.....	6
1.5 FACILITIES AND TEST LOCATION	7
1.6 INSTRUMENT CALIBRATION	7
1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT.....	8
1.8 TEST METHODOLOGY AND APPLIED STANDARDS.....	8
2. TEST SUMMERY	9
3. DESCRIPTION OF TEST MODES.....	10
3.1 THE WORST MODE OF OPERATING CONDITION.....	10
3.2 THE WORST MODE OF MEASUREMENT	11
4. EUT DUTY CYCLE	12
5. TEST RESULT	13
5.1 AC POWER LINE CONDUCTED EMISSION	13
5.2 20DB BANDWIDTH AND OCCUPIED BANDWIDTH (99%).....	16
5.3 OUTPUT POWER MEASUREMENT	21
5.4 FREQUENCY SEPARATION	23
5.5 NUMBER OF HOPPING	25
5.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....	27
5.7 TIME OF OCCUPANCY (DWELL TIME)	32
5.8 RADIATION BANDEDGE AND SPURIOUS EMISSION.....	34
APPENDIX 1 - PHOTOGRAPHS OF EUT	A-1

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	LITE-ON Technology Corp. Bldg. C, 90, Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan
Manufacturer	LITE-ON TECHNOLOGY (Changzhou) CO., LTD A9 Building, No.88 Yanghu Road, Wujin Hi-Tech Industrial Development Zone, Changzhou City, Jiangsu Province 213100 China
Equipment	802.11a/b/g/n/ac 2Tx2R + BT V4.2 LE USB Combo Module
Model No.	WCBN4508M
Model Discrepancy	N/A
Trade Name	LITE-ON
Received Date	February 1, 2018
Date of Test	February 26 ~ June 7, 2018
Output Power (W)	GFSK : 0.0011 8DPSK : 0.0020
Power Supply	Power form host device.

1.2 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	1. GFSK for BDR-1Mbps 2. $\pi/4$ -DQPSK for EDR-2Mbps 3. 8DPSK for EDR-3Mbps
Number of channel	79 Channels

Remark:

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 and RSS-GEN Table A1 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	☐ PIFA ☒ PCB ☐ Dipole ☐ Coils
Antenna Gain	Ant 0: Gain: 3 dBi Ant 1 Gain: 3.3 dBi
Antenna connector	N/A

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 1.4003
RF output power, conducted	+/- 1.1372
Power density, conducted	+/- 1.4003
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683
3M Semi Anechoic Chamber / 40G~60G	+/- 1.8509
3M Semi Anechoic Chamber / 60G~75G	+/- 1.9869
3M Semi Anechoic Chamber / 75G~110G	+/- 2.9651
3M Semi Anechoic Chamber / 110G~170G	+/- 2.7807
3M Semi Anechoic Chamber / 170G~220G	+/- 3.6437
3M Semi Anechoic Chamber / 220G~325G	+/- 4.2982

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Dally Hong	-
Radiation	Jerry Chuang	-
RF Conducted	Jerry Chuang	-

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Power Meter	Anritsu	ML2495A	1012009	09/18/2017	09/17/2018
Power Sensor	Anritsu	MA2411B	917072	09/18/2017	09/17/2018
Spectrum Analyzer	R&S	FSV 40	101073	10/02/2017	10/01/2018
Directional Coupler	Agilent	87301D	MY44350252	07/25/2017	07/24/2018
SUCOFLEX Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	07/31/2017	07/30/2018
Divider	Solvang Technology	2-18GHz 4Way	STI08-0015	07/26/2017	07/25/2018

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Bilog Antenna	Sunol Sciences	JB3	A030105	06/20/2017	06/19/2018
Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/25/2017	08/24/2018
Pre-Amplifier	EMEC	EM330	60609	06/06/2018	06/05/2019
Spectrum Analyzer	Agilent	E4446A	US42510252	11/27/2017	11/26/2018
Loop Ant	COM-POWER	AL-130	121051	03/21/2018	03/20/2019
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Wideband Radio Communication Tester	R&S	CMW 500	116875	04/20/2018	04/19/2019
Pre-Amplifier	HP	8449B	3008A00965	06/27/2017	06/26/2018
Filter	Micro Tronics	BRM 50702	120	05/14/2018	05/13/2019
Filter	Micro Tronics	HPM13195	3	05/14/2018	05/13/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	07/31/2017	07/30/2018
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	07/31/2017	07/30/2018

AC Conducted Emissions Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
LISN	R&S	ENV216	101054	02/06/2018	02/05/2019
LISN	SCHWARZBECK	NSLK 8127	8127-541	02/09/2018	02/08/2019
EMI Test Receiver	R&S	ESCI	101203	11/02/2017	11/01/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	DC Power Source	Agilent	E3640A	N/A	N/A
2	NB(H)	Acer	Aspire 4320 series	N/A	QDS-BRCM1018

1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247.

2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	5.1	AC Conducted Emission	Pass
15.247(a)(1)	5.2	20 dB Bandwidth	-
-	5.2	Occupied Bandwidth (99%)	-
15.247(b)(1)	5.3	Output Power Measurement	Pass
15.247(a)(1)	5.4	Frequency Separation	Pass
15.247(a)(1)(iii)	5.5	Number of Hopping	Pass
15.247(d)	5.6	Conducted Band Edge	Pass
15.247(d)	5.6	Conducted Emission	Pass
15.247(a)(1)(iii)	5.7	Time of Occupancy	Pass
15.247(d)	5.8	Radiation Band Edge	Pass
15.247(d)	5.8	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	GFSK for BDR-1Mbps (DH5) 8DPSK for EDR-3Mbps (DH5)
Test Channel Frequencies	GFSK for BDR-1Mbps: 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz 8DPSK for EDR-3Mbps: 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Voltage/Hz	120V / 60Hz
Test Mode	Mode 1:EUT power by host system.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Voltage/Hz	120V / 60Hz
Test Mode	Mode 1:EUT power by host system.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☐ Placed in fixed position at X-Plane (E2-Plane) ☒ Placed in fixed position at Y-Plane (E1-Plane) ☐ Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	☐ Horizontal ☒ Vertical


Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Voltage/Hz	120V / 60Hz
Test Mode	Mode 1:EUT power by host system.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case(Y-Plane and Vertical) were recorded in this report
3. For below 1G, AC power line conducted emission and radiation emission were performed the EUT transmit at the highest output power channel as worse case.

4. EUT DUTY CYCLE

Duty Cycle				
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)	Duty Factor(dB)
BDR-1Mbps	2.9200	3.7500	77.87%	1.09
EDR-3Mbps	2.9100	3.7500	77.60%	1.10

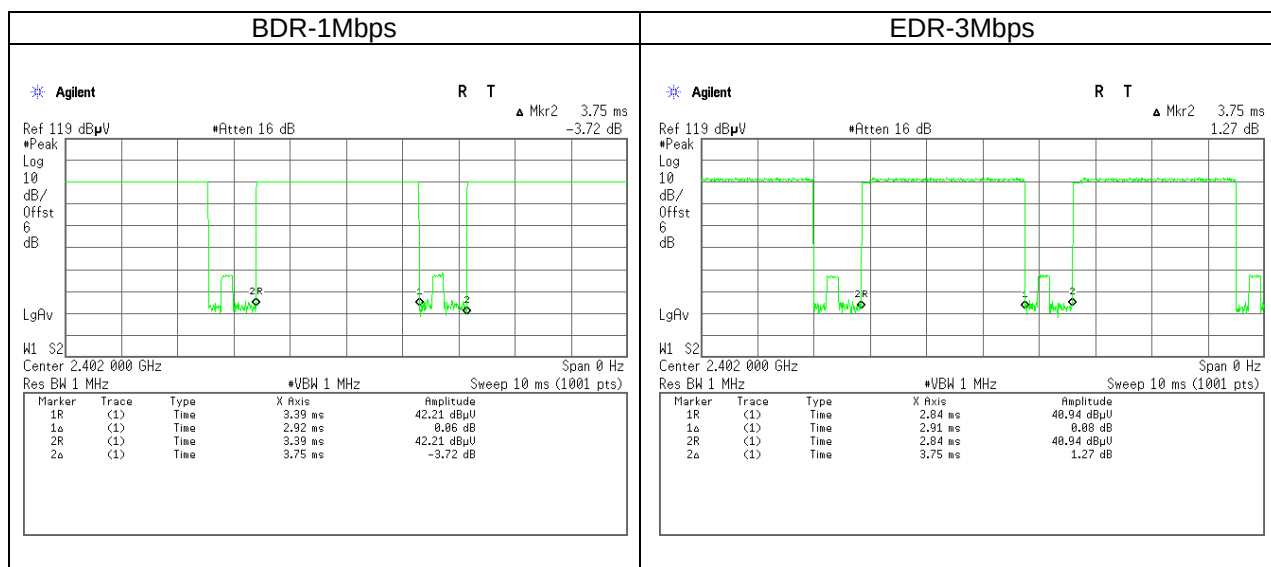

5. TEST RESULT

5.1 AC POWER LINE CONDUCTED EMISSION

5.1.1 Test Limit

According to §15.207(a),

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

5.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

5.1.3 Test Setup

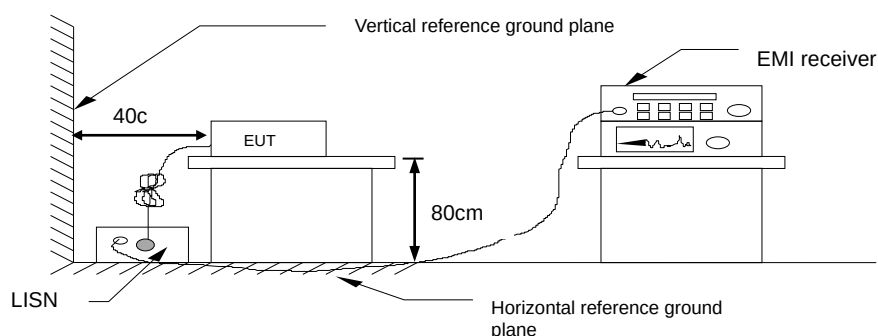


5.1.4 Test Result

PASS


Test Data

Test Mode	Mode 1	Temp/Hum	24(°C)/ 50%RH
Test Voltage	120Vac / 60Hz	Test Date	June 7, 2018
Phase	Line	Test Engineer	Dally Hong

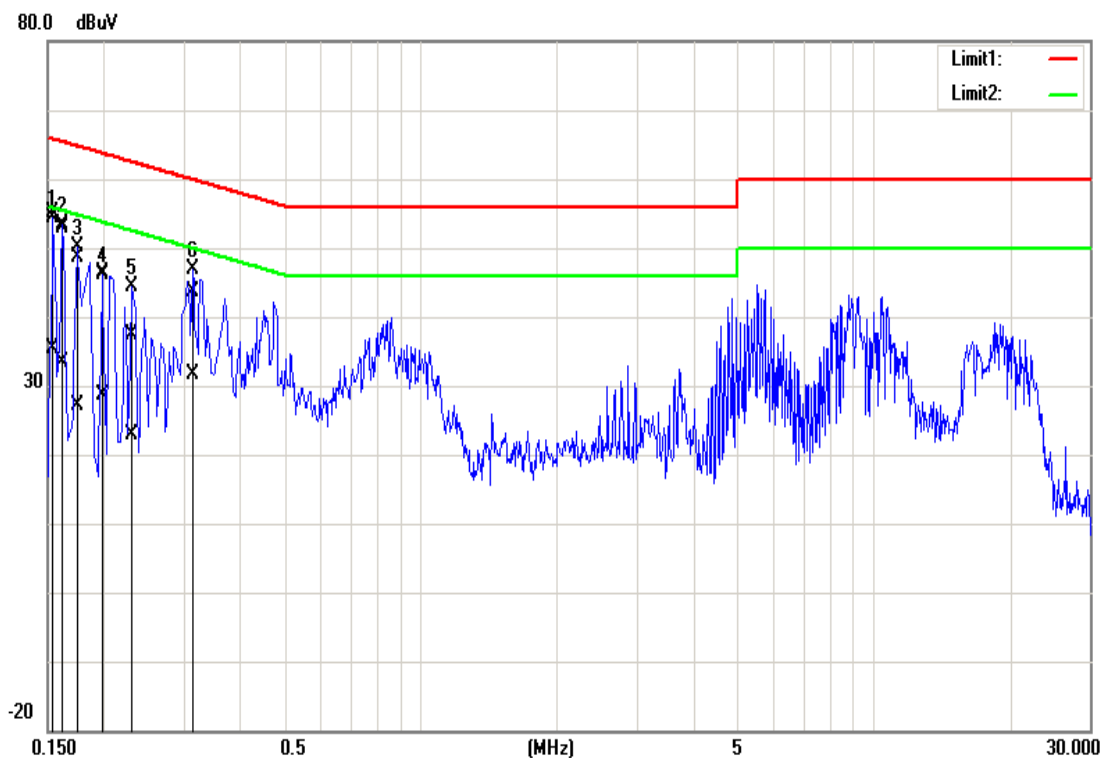

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1540	55.02	35.15	0.11	55.13	35.26	65.78	55.78	-10.65	-20.52	Pass
0.1620	52.65	33.30	0.11	52.76	33.41	65.36	55.36	-12.60	-21.95	Pass
0.1740	48.45	26.90	0.11	48.56	27.01	64.77	54.77	-16.21	-27.76	Pass
0.1980	46.24	28.45	0.11	46.35	28.56	63.69	53.69	-17.34	-25.13	Pass
0.2300	37.37	22.81	0.11	37.48	22.92	62.45	52.45	-24.97	-29.53	Pass
0.3140	43.63	31.58	0.12	43.75	31.70	59.86	49.86	-16.11	-18.16	Pass

Test Mode	Mode 1	Temp/Hum	27(°C)/ 53%RH
Test Voltage	120Vac / 60Hz	Test Date	June 7, 2018
Phase	Neutral	Test Engineer	Dally Hong

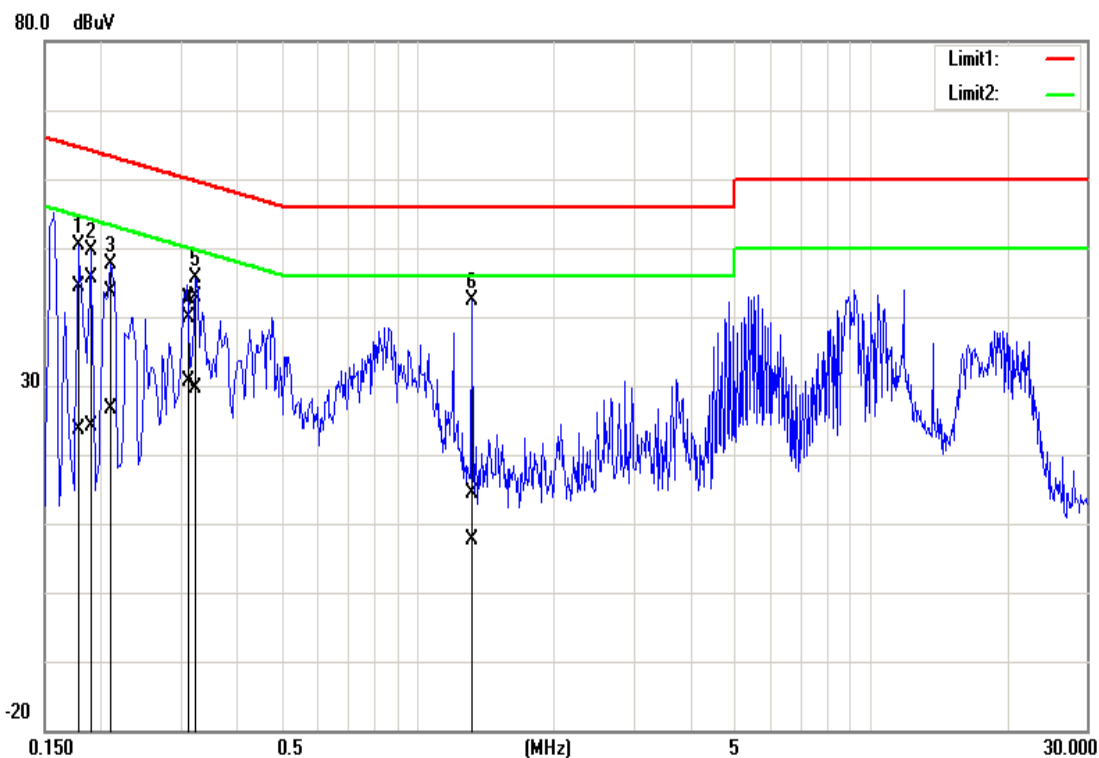

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1780	44.36	23.38	0.13	44.49	23.51	64.58	54.58	-20.09	-31.07	Pass
0.1900	45.44	23.91	0.13	45.57	24.04	64.04	54.04	-18.47	-30.00	Pass
0.2100	43.51	26.47	0.13	43.64	26.60	63.21	53.21	-19.57	-26.61	Pass
0.3140	42.55	30.45	0.13	42.68	30.58	59.86	49.86	-17.18	-19.28	Pass
0.3220	42.80	29.43	0.13	42.93	29.56	59.66	49.66	-16.73	-20.10	Pass
1.3180	14.20	7.41	0.15	14.35	7.56	56.00	46.00	-41.65	-38.44	Pass

5.2 20DB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

5.2.1 Test Limit

According to §15.247(a) (1),

20 dB Bandwidth : For reporting purposes only.


Occupied Bandwidth(99%) : For reporting purposes only.

5.2.2 Test Procedure

Test method Refer as Section 8.1 and ANSI 63.10:2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =30Hz, VBW = 100KHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.

5.2.3 Test Setup



5.2.4 Test Result

Test mode: GFSK_BDR-1Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW(99%) (MHz)	20dB BW (MHz)
Low	2402	0.8596	0.9378
Mid	2441	0.8552	0.9334
High	2480	0.8596	0.9378


Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW(99%) (MHz)	20dB BW (MHz)
Low	2402	1.1635	1.2721
Mid	2441	1.1678	1.2721
High	2480	1.1635	1.2938

Test Data


20 dB Bandwidth

GFSK_BDR-1Mbps mode


Low CH

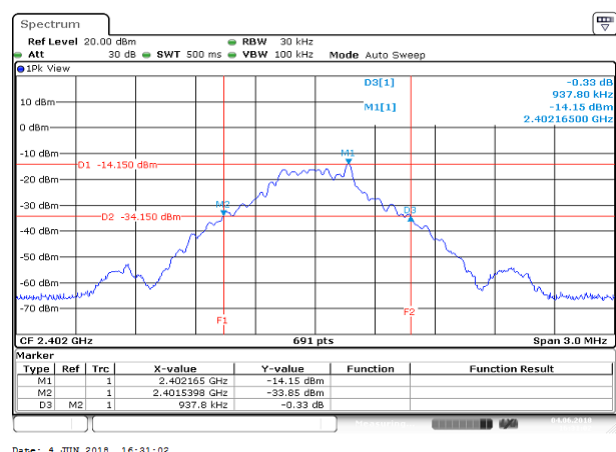

Mid CH

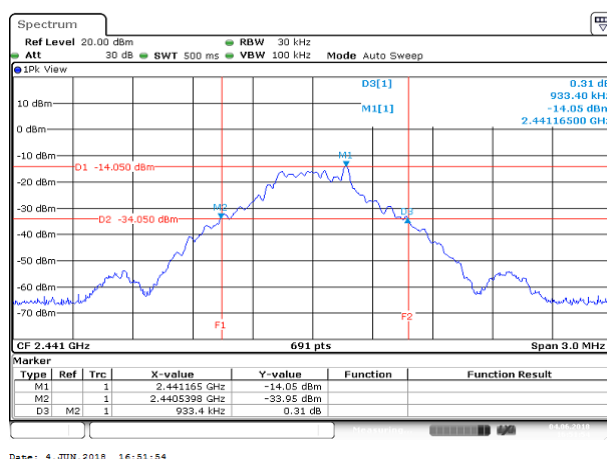


High CH

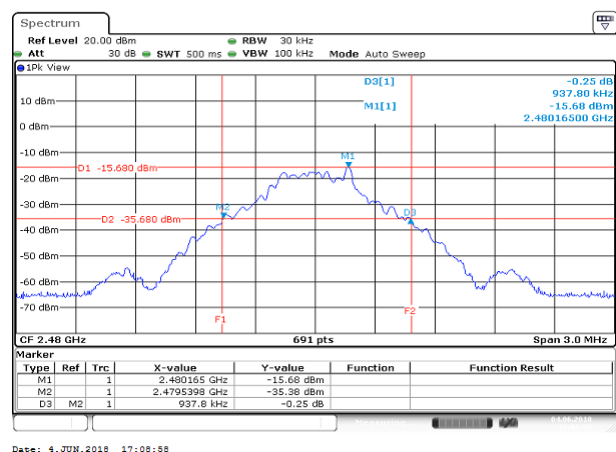


8DPSK_EDR-3Mbps mode


Low CH

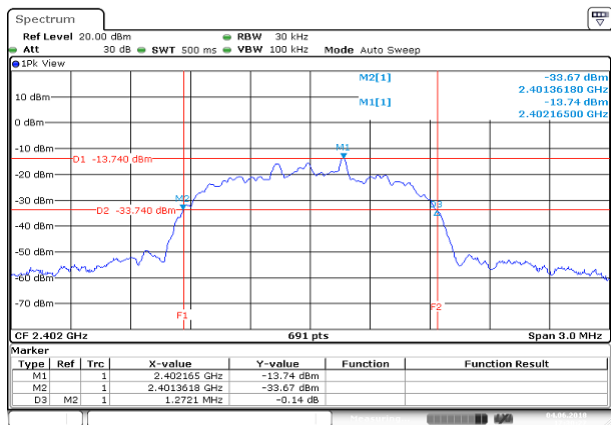


Mid CH

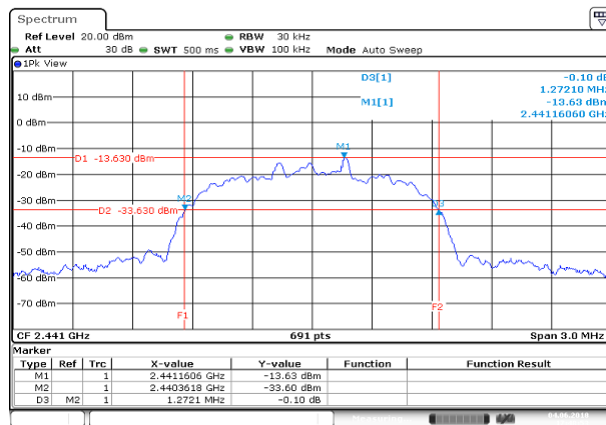


High CH

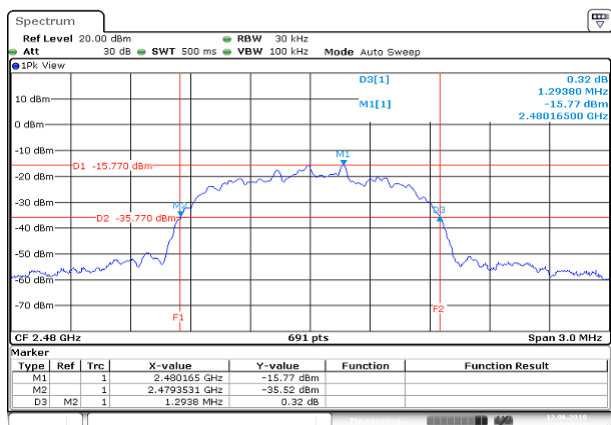

99% Bandwidth

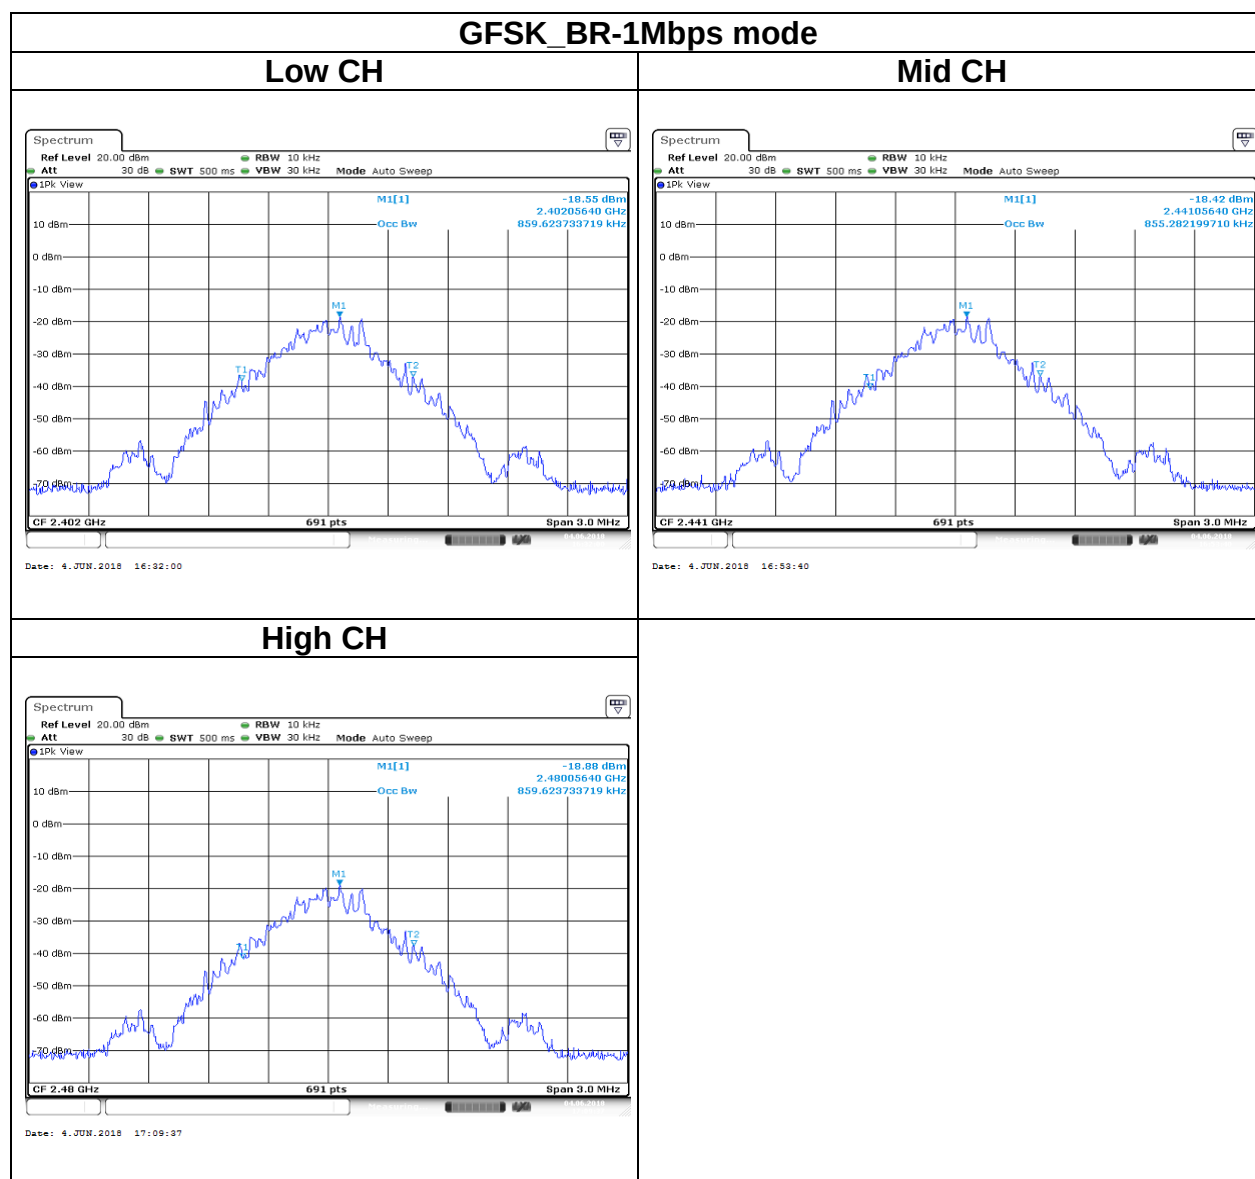

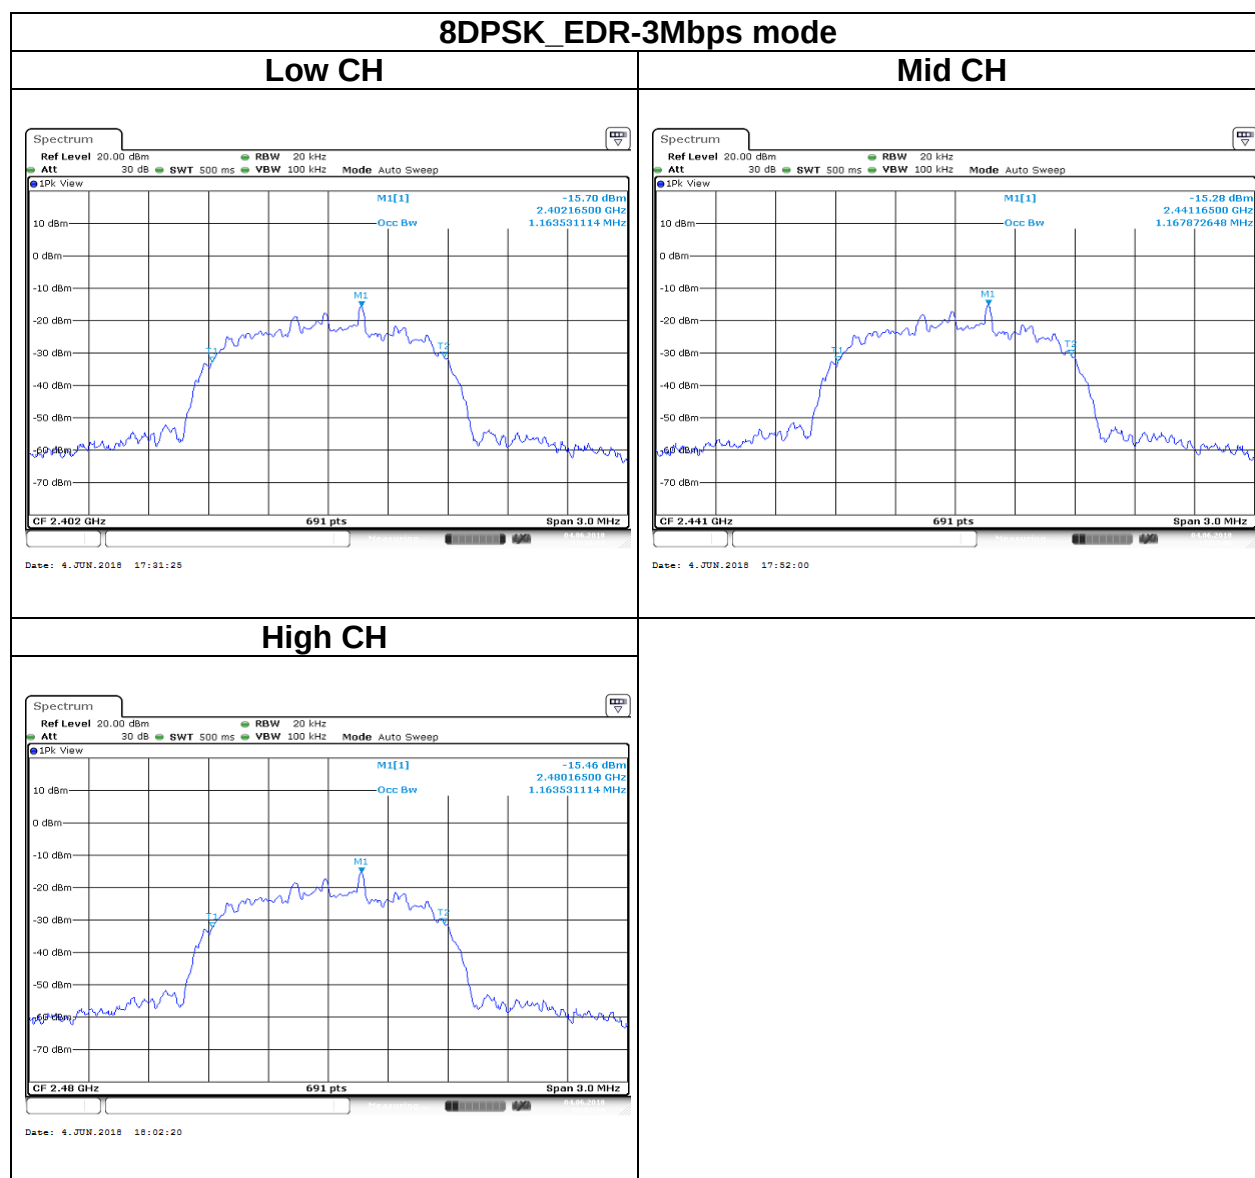

5.3 OUTPUT POWER MEASUREMENT

5.3.1 Test Limit

According to §15.247(a)(1).

Peak output power :

FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	☒ Antenna not exceed 6 dBi : 21dBm ☐ Antenna with DG greater than 6 dBi : 21dBm [Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

5.3.2 Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

5.3.3 Test Setup



5.3.4 Test Result

Peak output power :

BT					
Config.	CH	Freq. (MHz)	PK Power (dBm)	PK Power (W)	Limit (dBm)
GFSK BR-1Mbps (DH5)	0	2402	0.31	0.0011	21
	39	2441	0.36	0.0011	
	78	2480	0.16	0.0010	
8DPSK EDR-3Mbps (DH5)	0	2402	2.93	0.0020	
	39	2441	3.04	0.0020	
	78	2480	2.87	0.0019	

Average output power :

BT			
Config.	CH	Freq. (MHz)	AV Power (dBm)
GFSK BR-1Mbps (DH5)	0	2402	-2.76
	39	2441	-2.65
	78	2480	-2.86
8DPSK EDR-3Mbps (DH5)	0	2402	-2.89
	39	2441	-2.79
	78	2480	-2.97

5.4 FREQUENCY SEPARATION

5.4.1 Test Limit

According to §15.247(a)(1),


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

5.4.2 Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

5.4.3 Test Setup




5.4.4 Test Result

Test mode: GFSK_BDR-1Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	0.9986	0.6252	PASS
Mid	2441	0.9986	0.6223	PASS
High	2480	0.9986	0.6252	PASS

Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	0.9986	0.8481	PASS
Mid	2441	0.9986	0.8481	PASS
High	2480	0.9986	0.8625	PASS


Test Data

GFSK_BDR-1Mbps mode

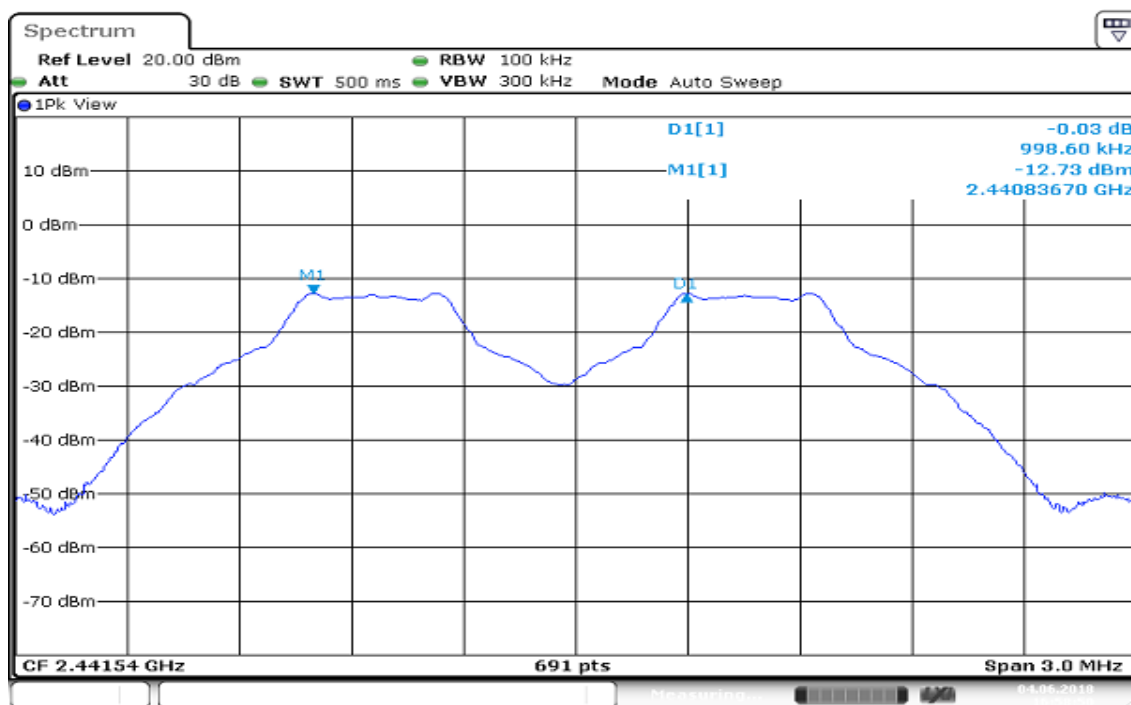

Date: 4 JUN 2018 16:58:50

8DPSK_EDR-3Mbps mode

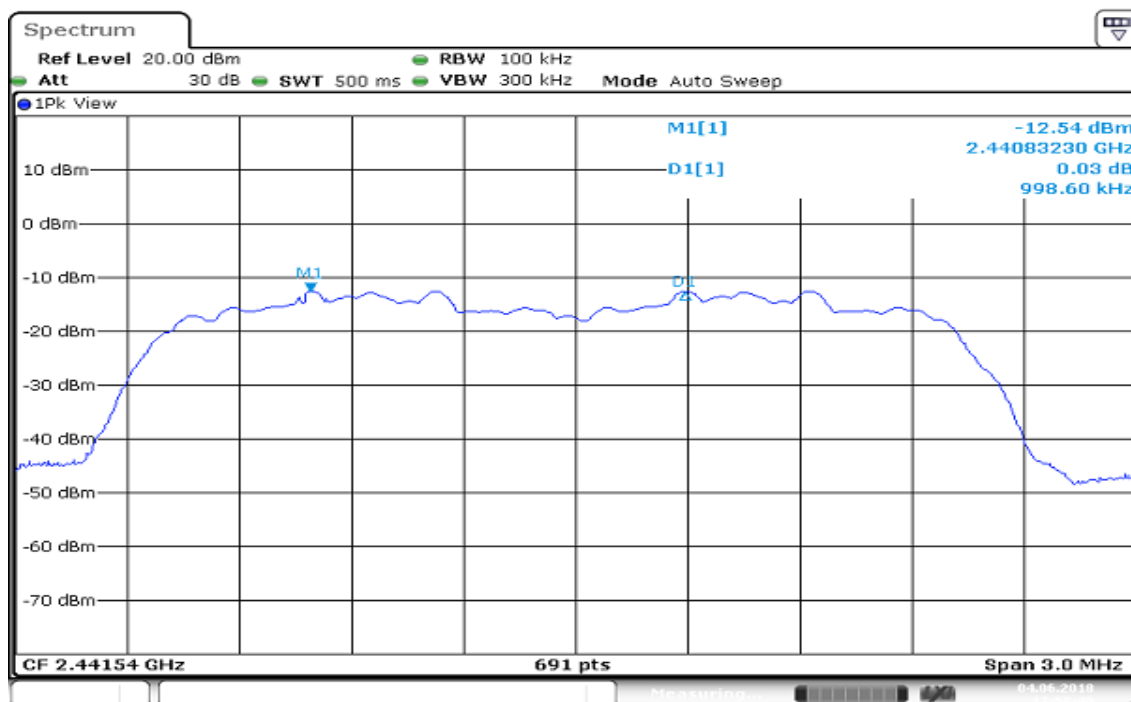

Date: 4 JUN 2018 17:58:40

5.5 NUMBER OF HOPPING

5.5.1 Test Limit

According to §15.247(a)(1)(iii) and RSS-247 section 5.1(d)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

5.5.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.

5.5.3 Test Setup




5.5.4 Test Result

Number of Hopping				
Mode	Frequency (MHz)	Hopping Channel Number	Hopping Channel Number Limits	Result
BDR-1Mbps	2402-2480	79	15	Pass
EDR-3Mbps	2402-2480	79	15	

REMARK:

The frequency spectrum was broken up in to two sub-range to clearly show all of the hopping frequencies. In the AFH mode, this device operation was using 20 channels, so the requirement for minimum number of hopping channels is satisfied

Test Data

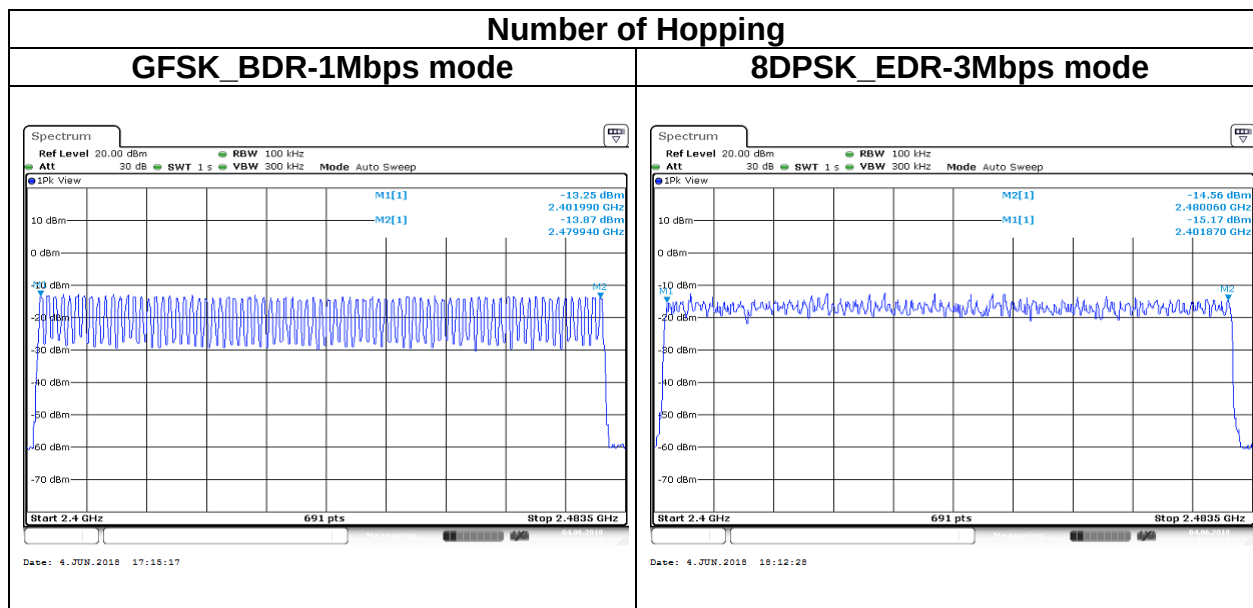

5.6 CONDUCTED BANDEGE AND SPURIOUS EMISSION

5.6.1 Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

5.6.2 Test Procedure


1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.


5.6.3 Test Setup





5.6.4 Test Result

Test Data

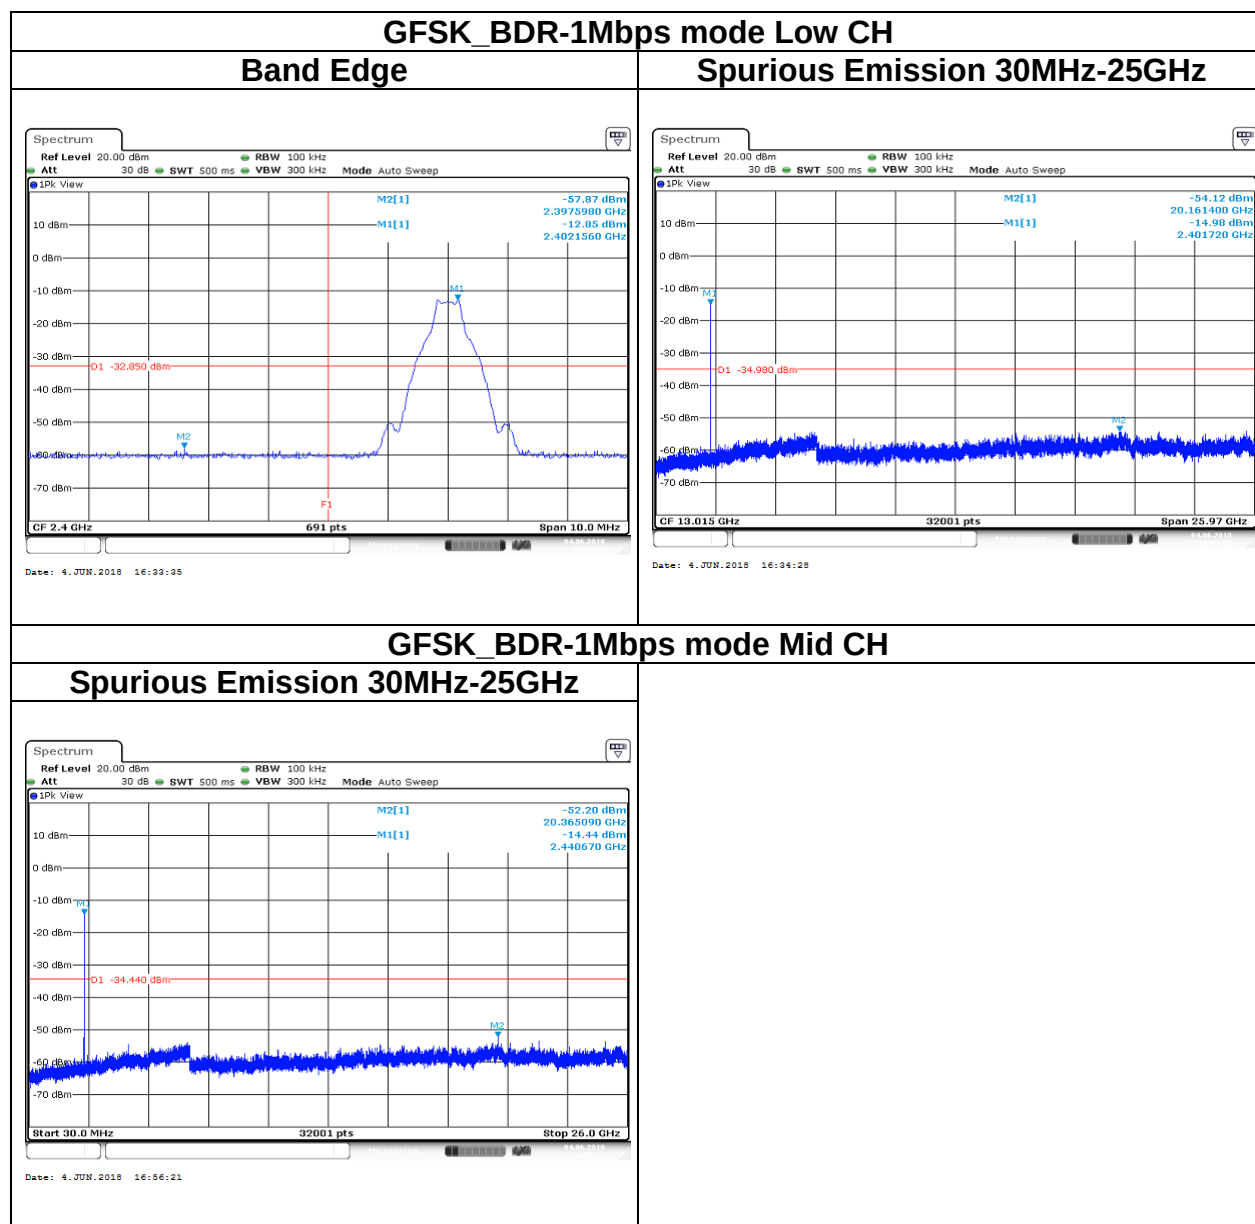

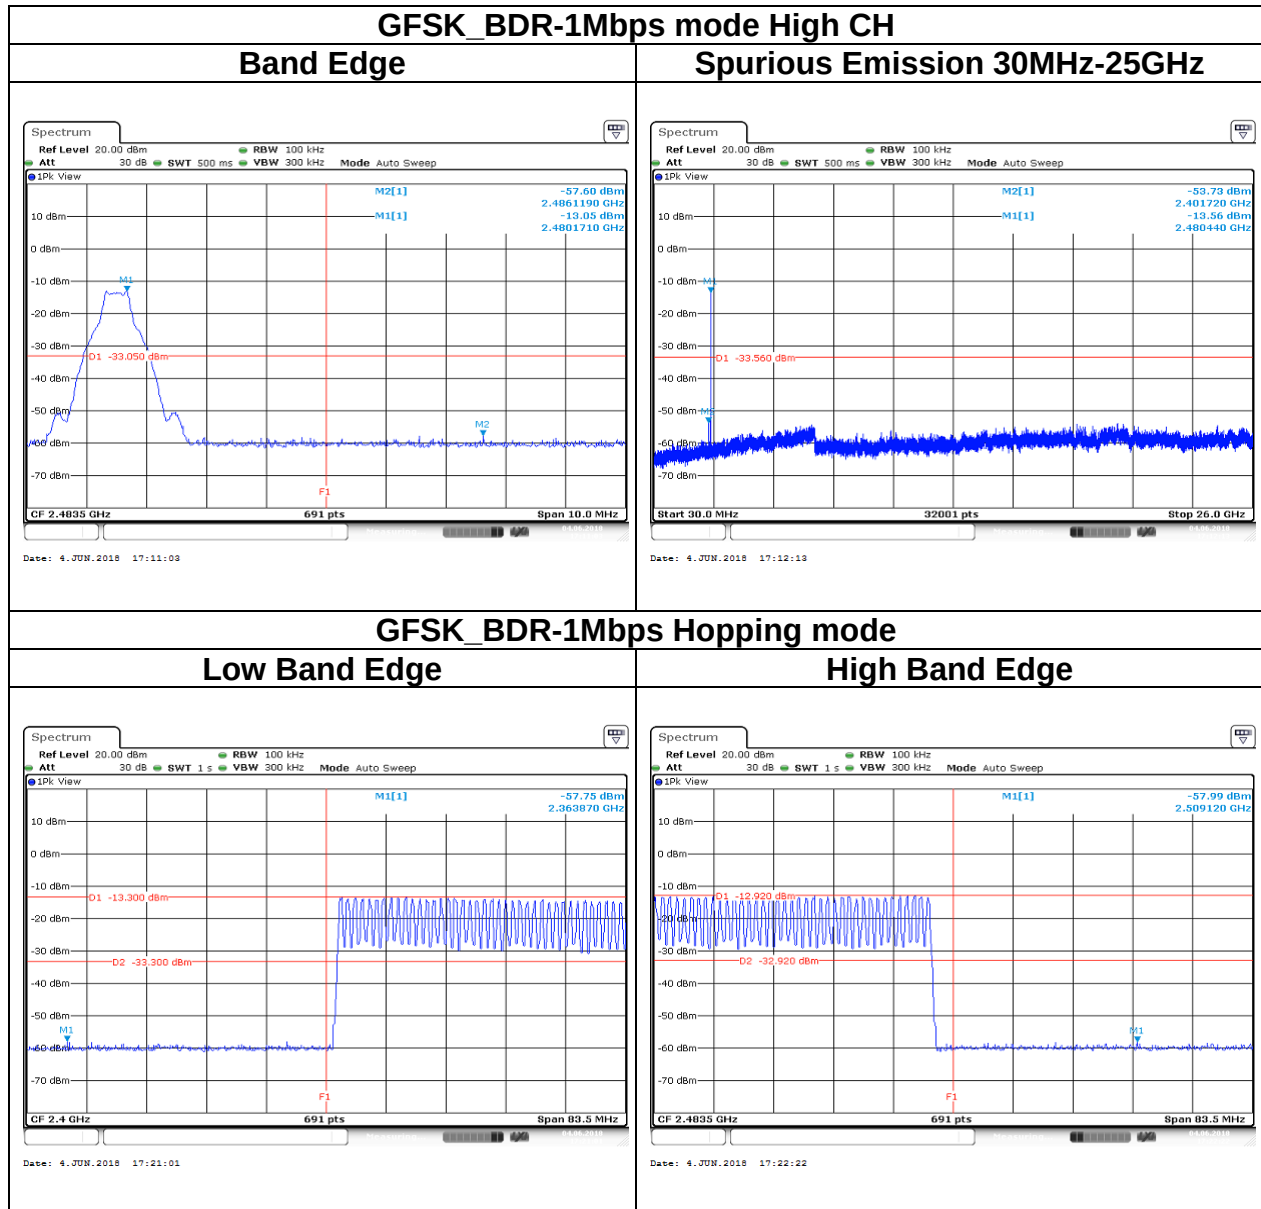

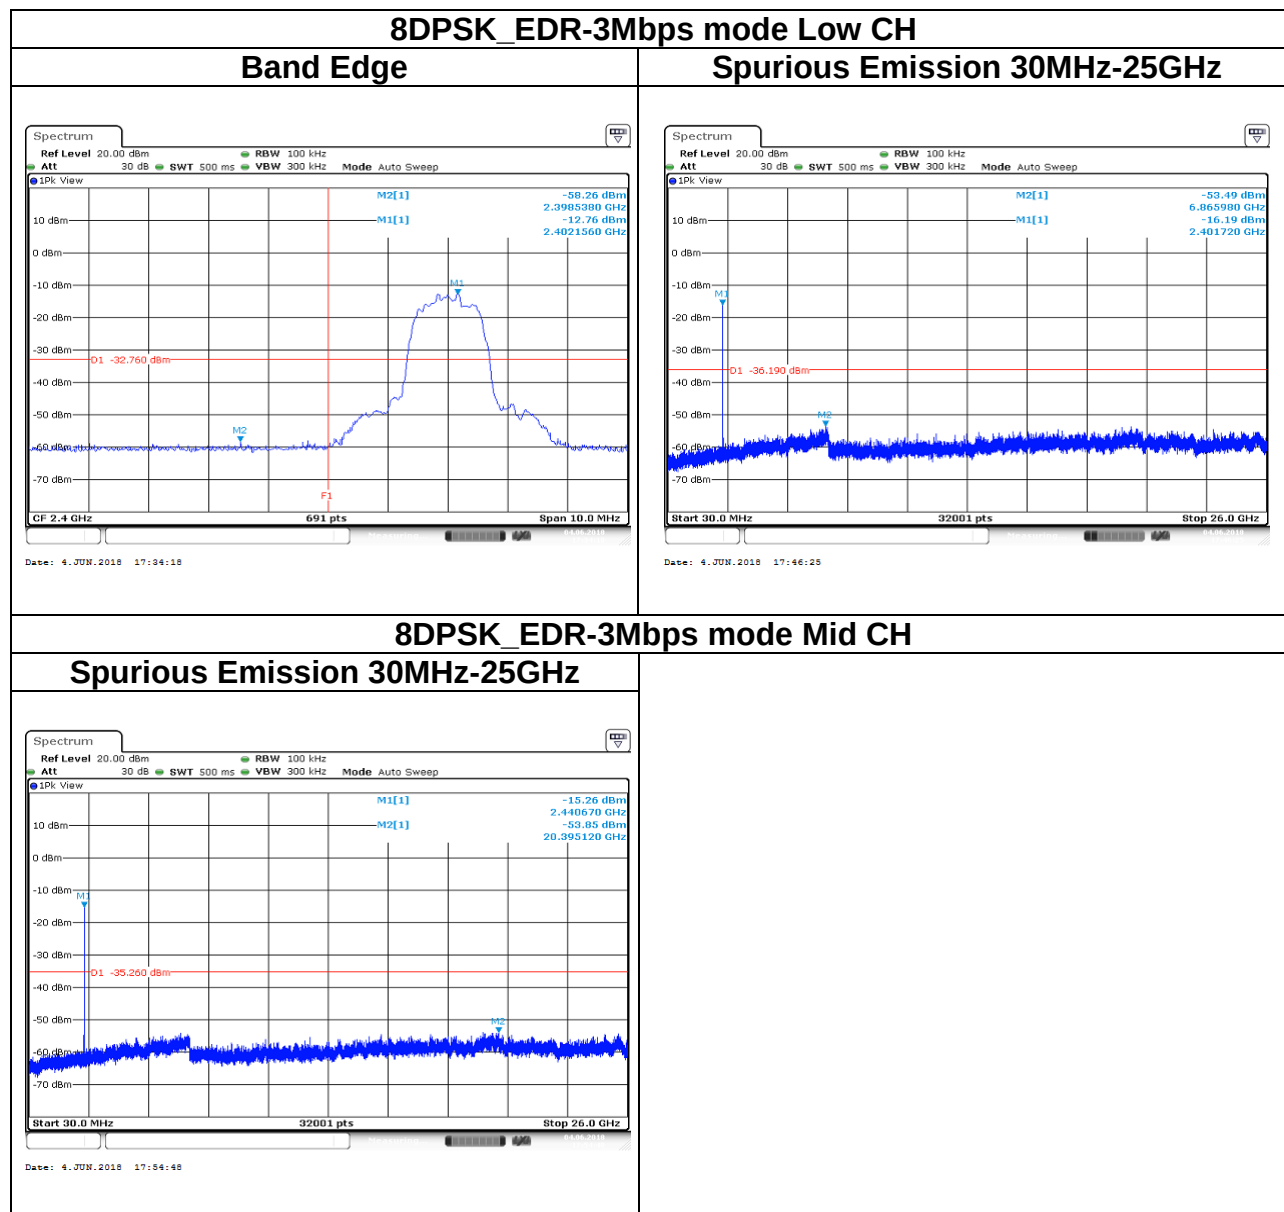

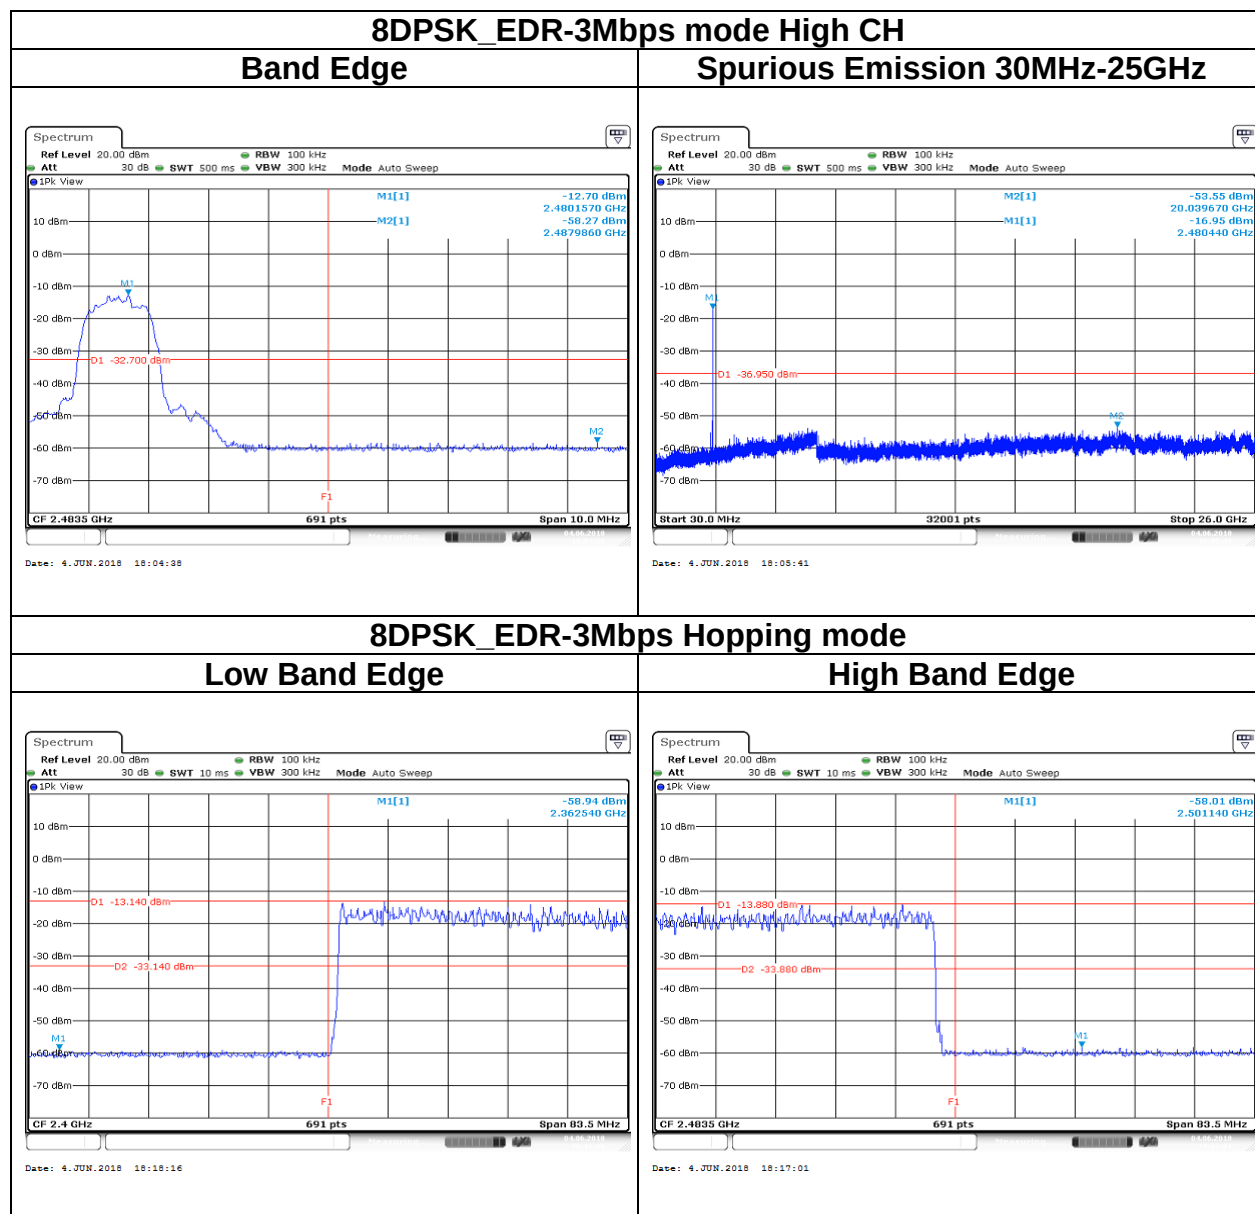

5.7 TIME OF OCCUPANCY (DWEELL TIME)

5.7.1 Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

5.7.2 Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms


5.7.3 Test Setup

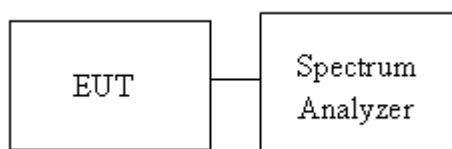

5.7.4 Test Result

Time of Occupancy (Dwell Time)							
Mode	Frequency (MHz)	Pulse Time Per Hopping (ms)	Minimum Number of Hopping Freq.	Number of pulse in	Dwell Time IN	Dwell Time Limits (s)	Result
				(0.4 * N sec)	(0.4 * N sec)		
BDR-1Mbps	2441	2.9565	79	106.67	0.3154	0.4	Pass
EDR-3Mbps	2441	2.9565	79	106.67	0.3154	0.4	
Non-AFH: DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 * 0.4 * 79 = 106.6$							
AFH: DH5 Packet permit maximum $800 / 20 / 6 = 6.666$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $6.666 * 0.4 * 20 = 53.33$							

Test Data

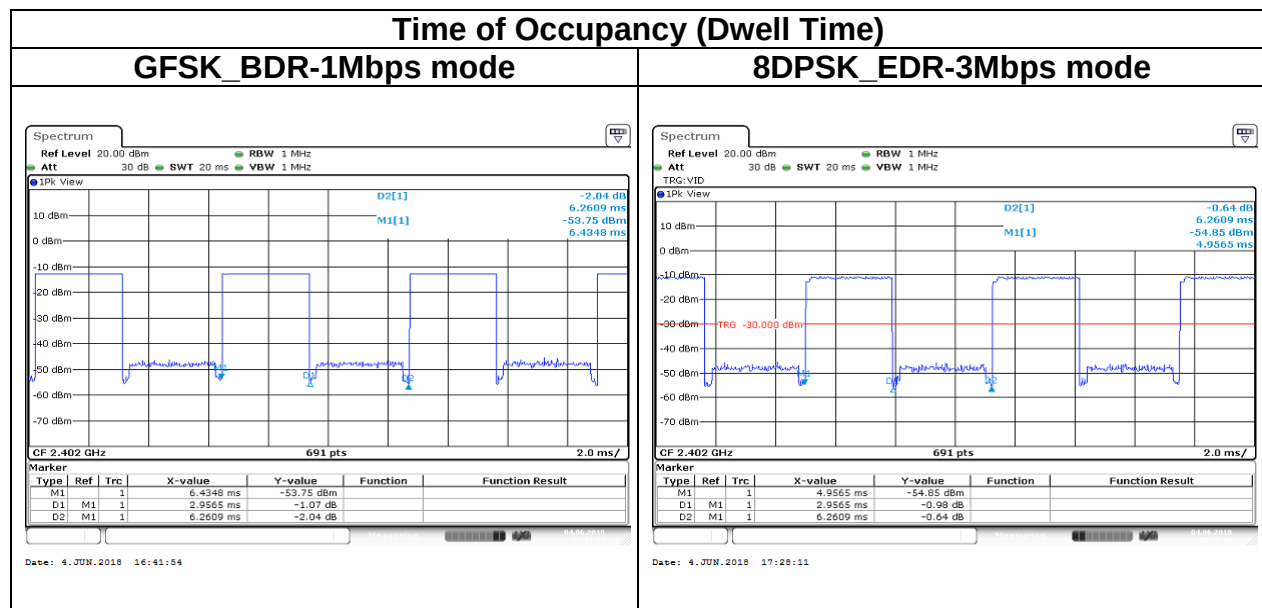

5.8 RADIATION BANDEDGE AND SPURIOUS EMISSION

5.8.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

5.8.2 Test Procedure

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

4. For harmonic, the worst case of output power was BDR-1Mbps. Therefore only BDR-1Mbps record in the report.
5. The SA setting following :
 - (1) Below 1G : RBW = 100kHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - *If Duty Cycle $\geq$ 98%, VBW=10Hz.
 - *If Duty Cycle < 98%, VBW $\geq$ 1/T.


Configuration	Duty Cycle (%)	T(ms)	1/T (kHz)	VBW setting
GFSK_BDR-1Mbps	78%	2.9200	0.342	360Hz
8DPSK_EDR-3Mbps	78%	2.9100	0.344	360Hz

Remark:


1. *Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.*
2. *No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).*


5.8.3 Test Setup

9kHz ~ 30MHz

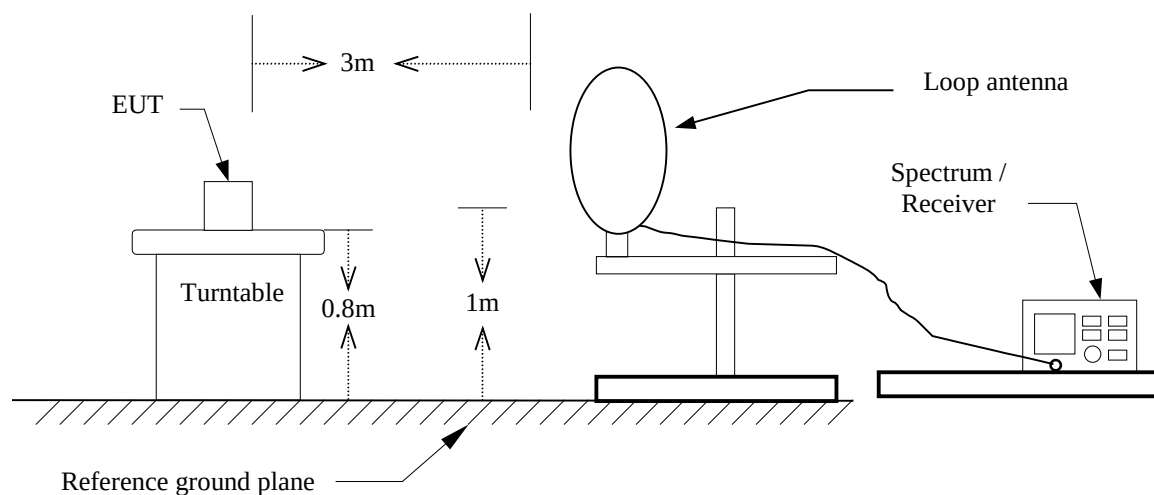

30MHz ~ 1GHz

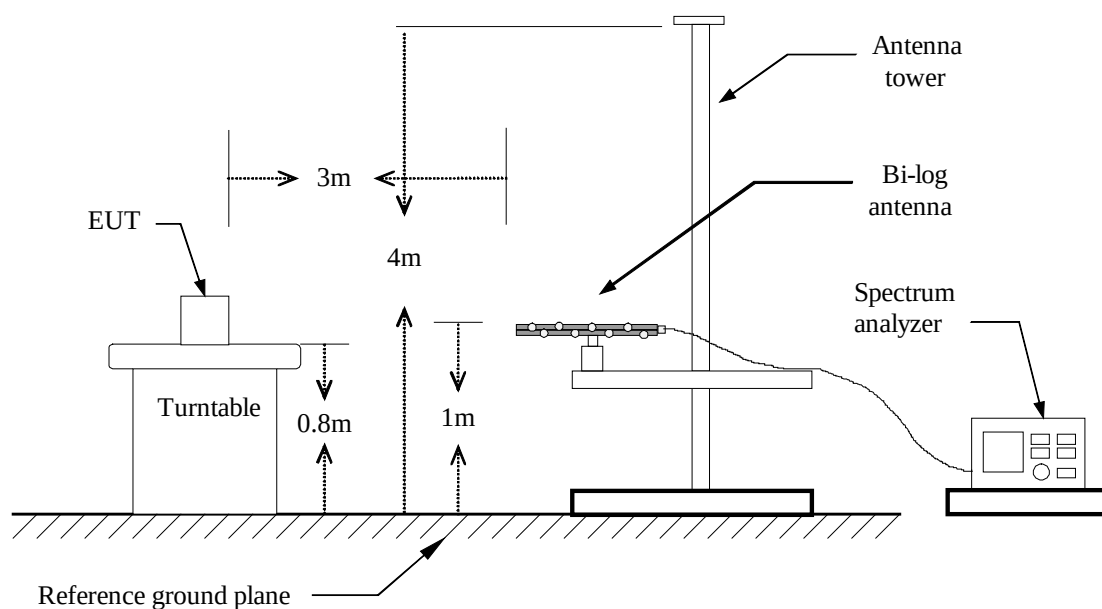


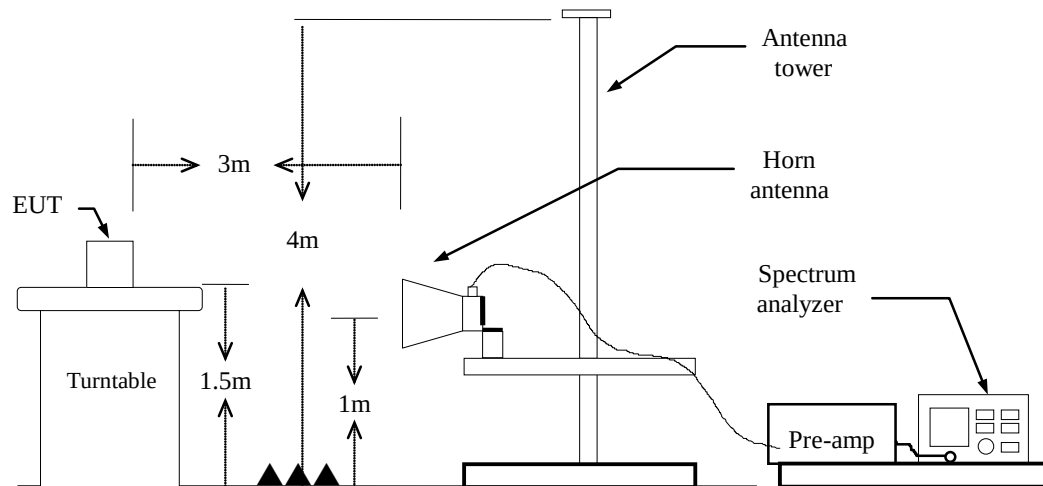Above 1 GHz

5.8.4 Test Result


Band Edge Test Data

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	120Vac / 60Hz

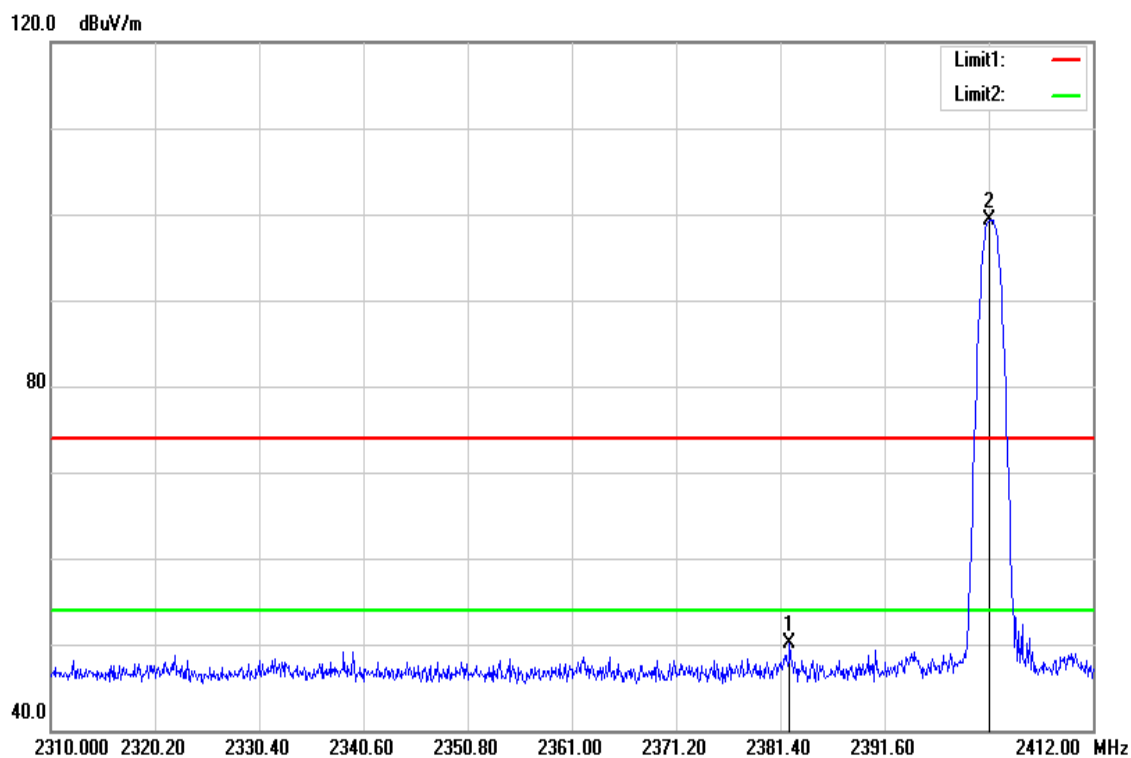


Frequency (MHz)	Reading (d <u>u</u> V)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2382.318	53.09	-3.01	50.08	74.00	-23.92	peak
2401.800	102.20	-2.95	99.25	-	-	peak

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	120Vac / 60Hz

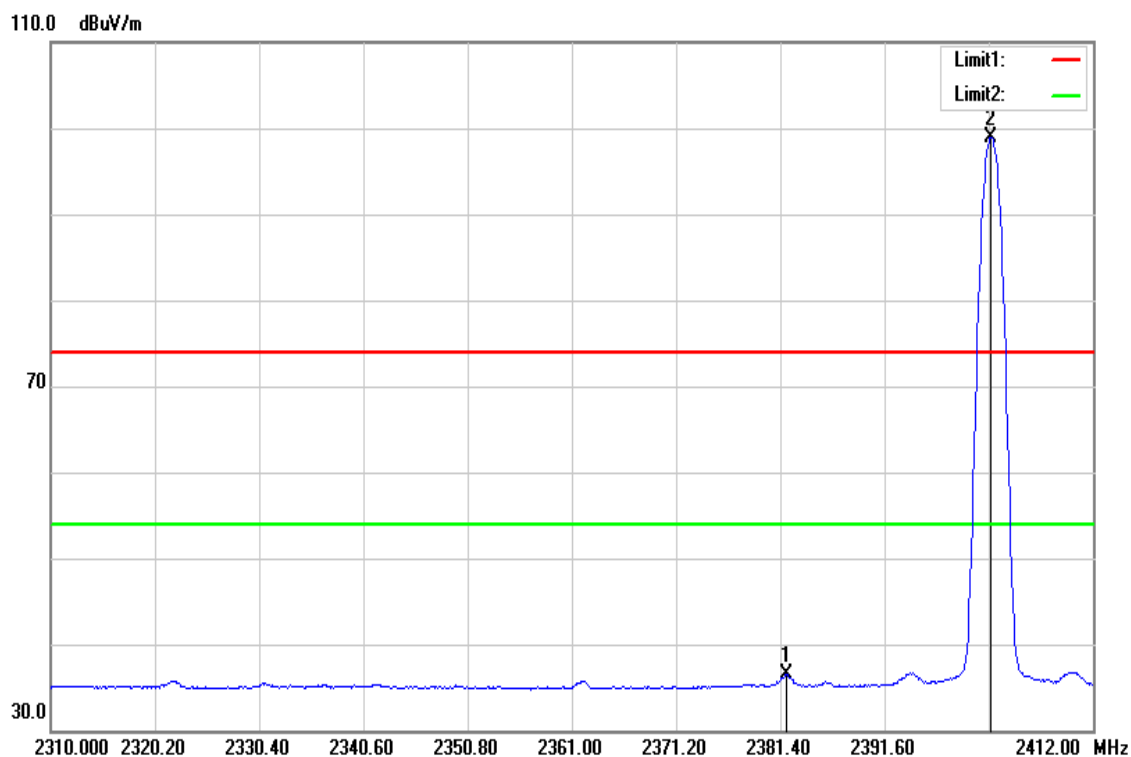


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2382.012	39.56	-3.01	36.55	54.00	-17.45	AVG
2402.004	101.90	-2.95	98.95	-	-	AVG

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	120Vac / 60Hz

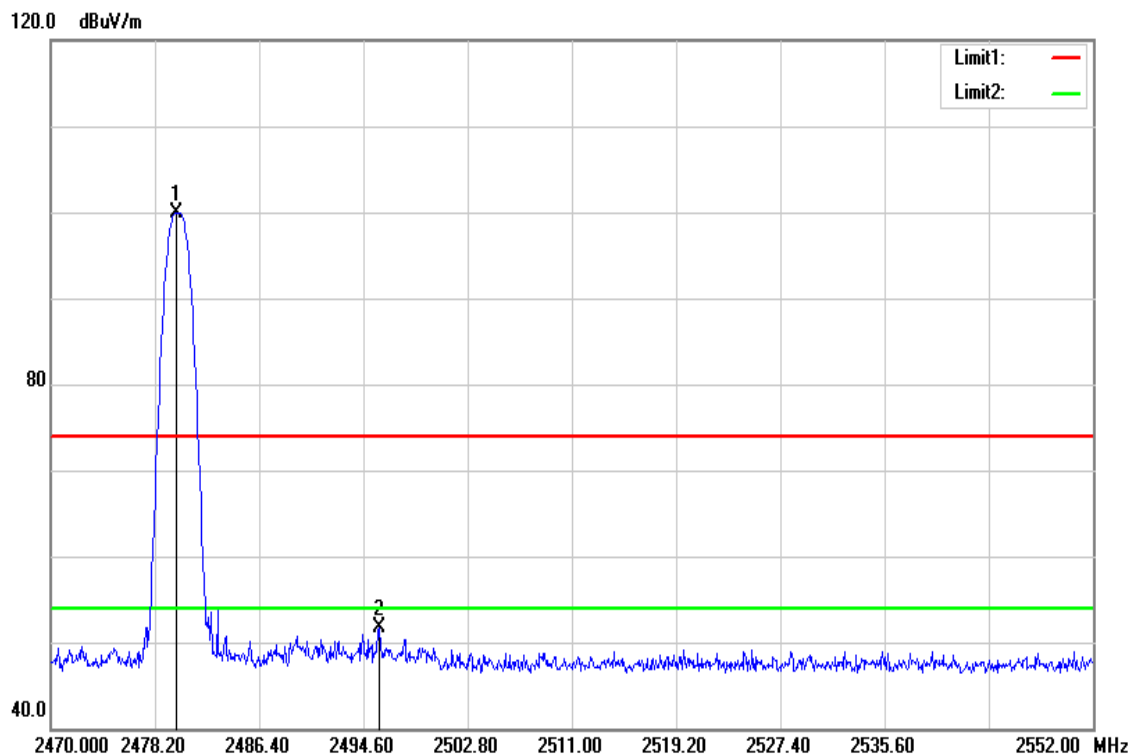


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2479.840	102.62	-2.70	99.92	-	-	peak
2495.830	54.28	-2.65	51.63	74.00	-22.37	peak

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	120Vac / 60Hz

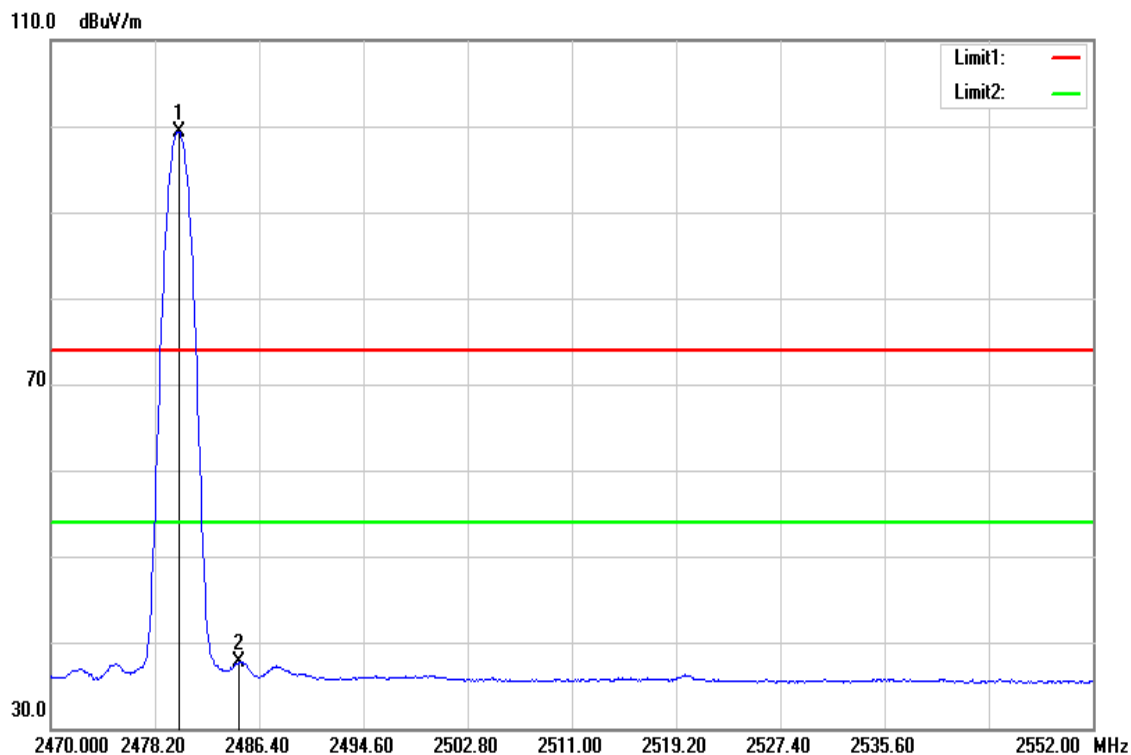


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2480.086	102.01	-2.70	99.31	-	-	AVG
2484.842	40.37	-2.69	37.68	54.00	-16.32	AVG

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	120Vac / 60Hz

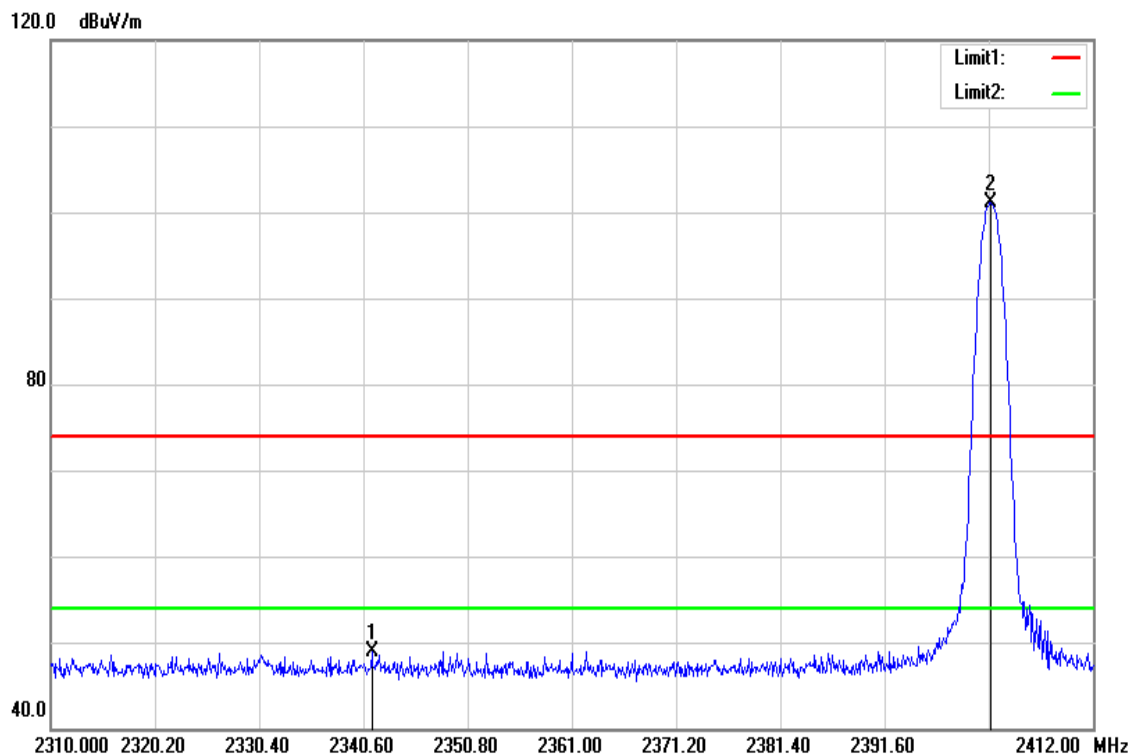


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2341.416	52.09	-3.14	48.95	74.00	-25.05	peak
2402.004	103.96	-2.95	101.01	-	-	peak

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	120Vac / 60Hz

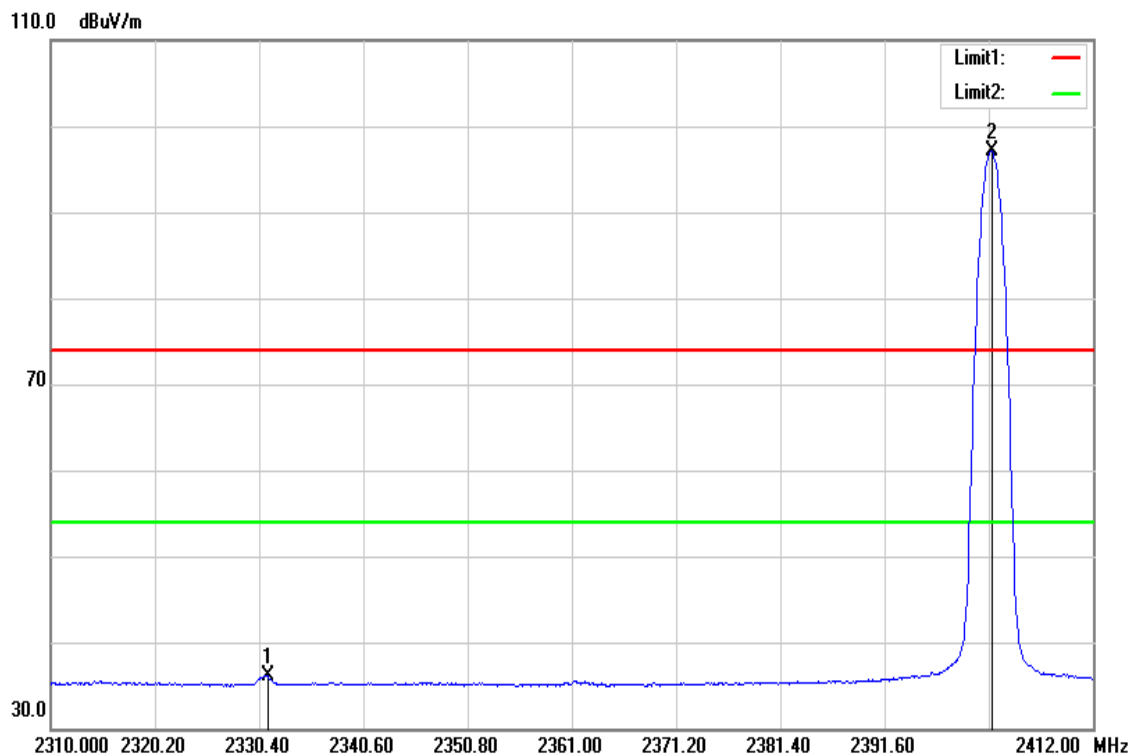


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2331.216	39.35	-3.17	36.18	54.00	-17.82	AVG
2402.106	100.01	-2.95	97.06	-	-	AVG

Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	120Vac / 60Hz

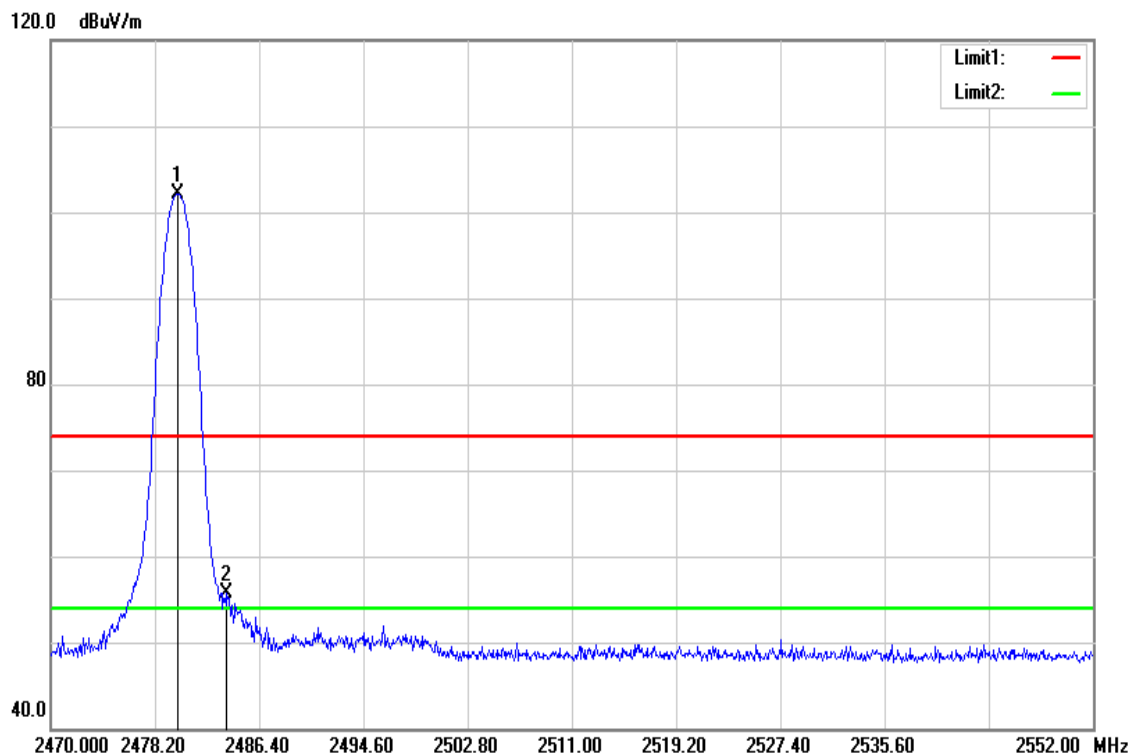

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2480.004	104.89	-2.70	102.19	-	-	peak
2483.858	58.34	-2.69	55.65	74.00	-18.35	peak


Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	120Vac / 60Hz

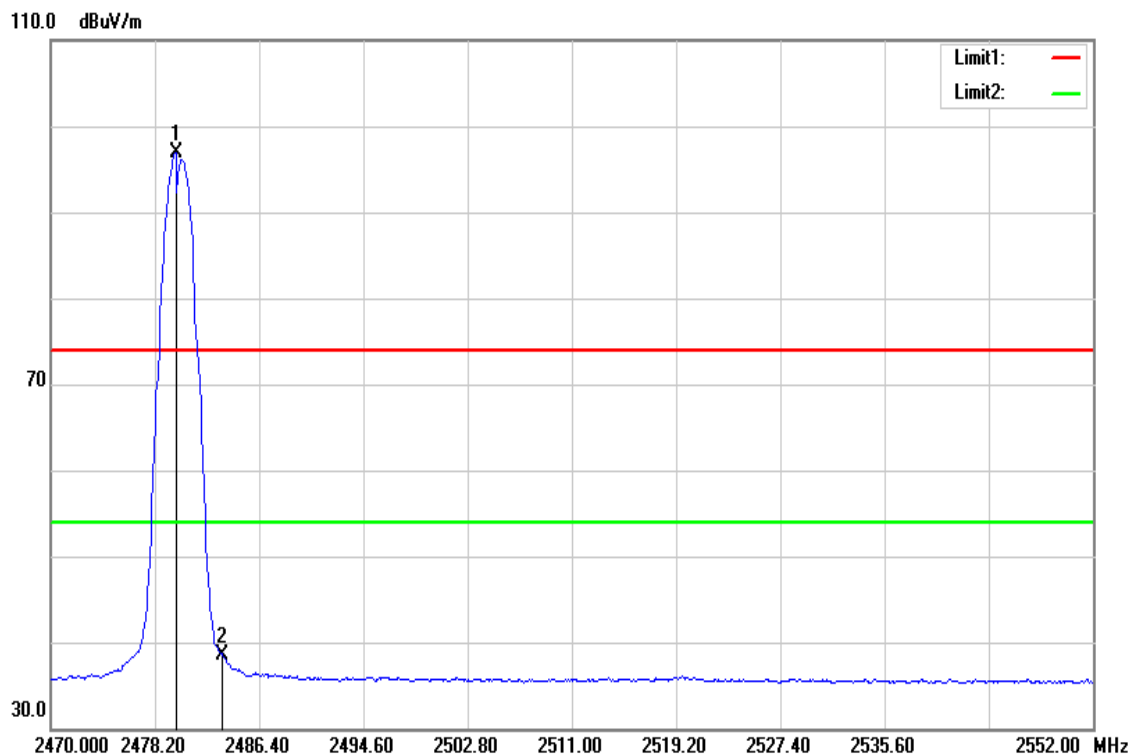

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2479.840	99.68	-2.70	96.98	-	-	AVG
2483.500	41.19	-2.69	38.50	54.00	-15.50	AVG

Below 1G Test Data


Test Mode:	BT Mode	Temp/Hum	24(°C)/ 33%RH
Test Item	30MHz-1GHz	Test Date	February 26, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Qusi-peak	Test Voltage	120Vac / 60Hz

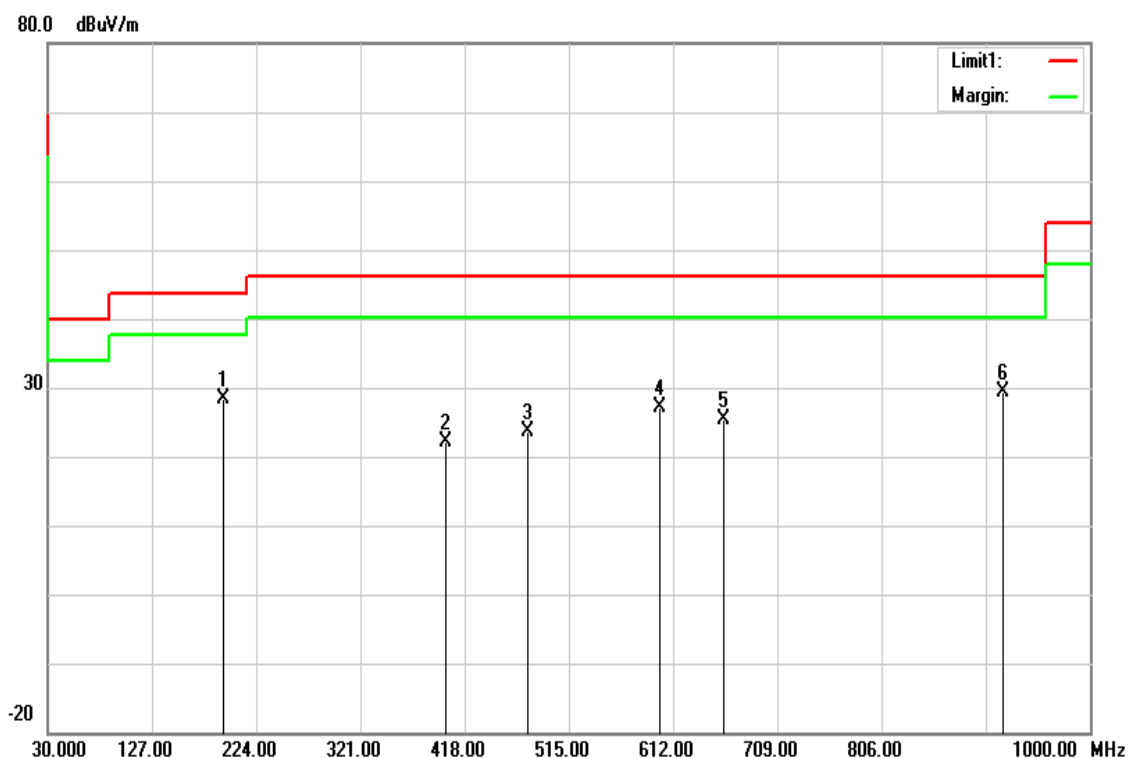

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
194.4150	44.24	-15.81	28.43	43.52	-15.09	peak
401.0250	33.60	-11.36	22.24	46.02	-23.78	peak
477.1700	32.75	-9.00	23.75	46.02	-22.27	peak
599.8750	34.15	-6.93	27.22	46.02	-18.80	peak
660.0150	30.77	-5.42	25.35	46.02	-20.67	peak
919.9750	30.99	-1.68	29.31	46.02	-16.71	peak

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Test Mode:	BT Mode	Temp/Hum	24(°C)/ 33%RH
Test Item	30MHz-1GHz	Test Date	February 26, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Qusi-peak	Test Voltage	120Vac / 60Hz

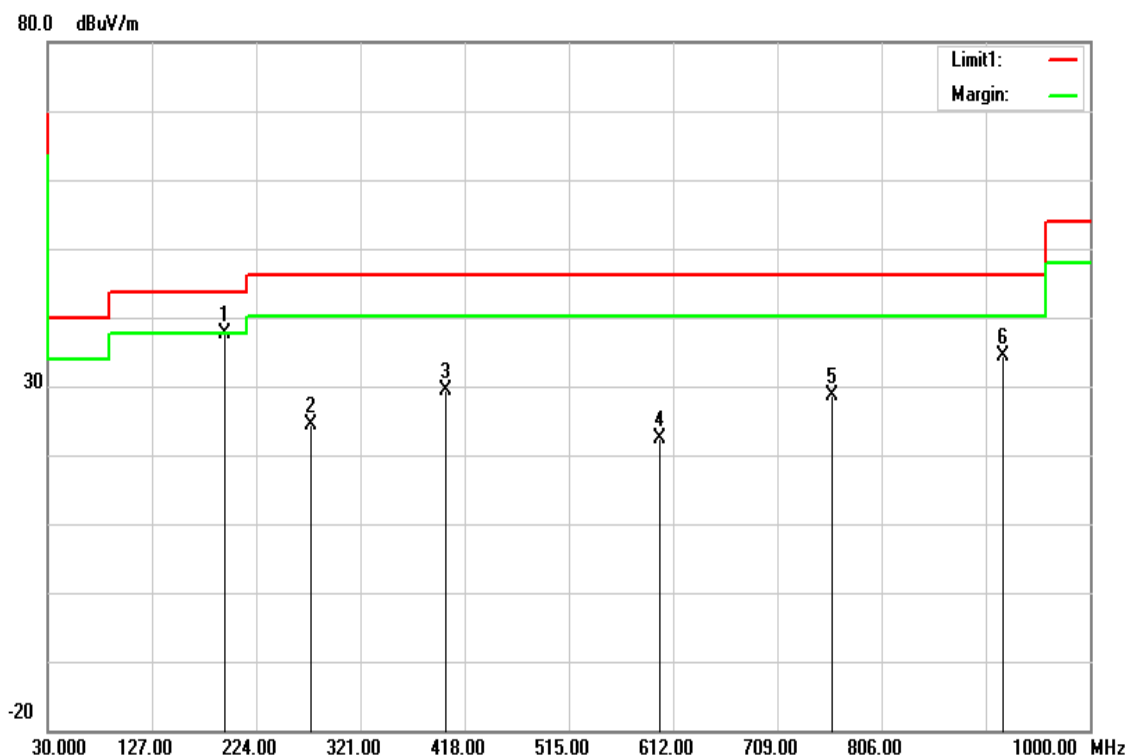


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
194.9000	53.31	-15.77	37.54	43.52	-5.98	QP
275.8950	38.95	-14.53	24.42	46.02	-21.60	peak
400.5400	40.86	-11.37	29.49	46.02	-16.53	peak
599.8750	29.41	-6.93	22.48	46.02	-23.54	peak
759.9250	32.68	-4.11	28.57	46.02	-17.45	peak
919.9750	35.94	-1.68	34.26	46.02	-11.76	peak

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Above 1G Test Data

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

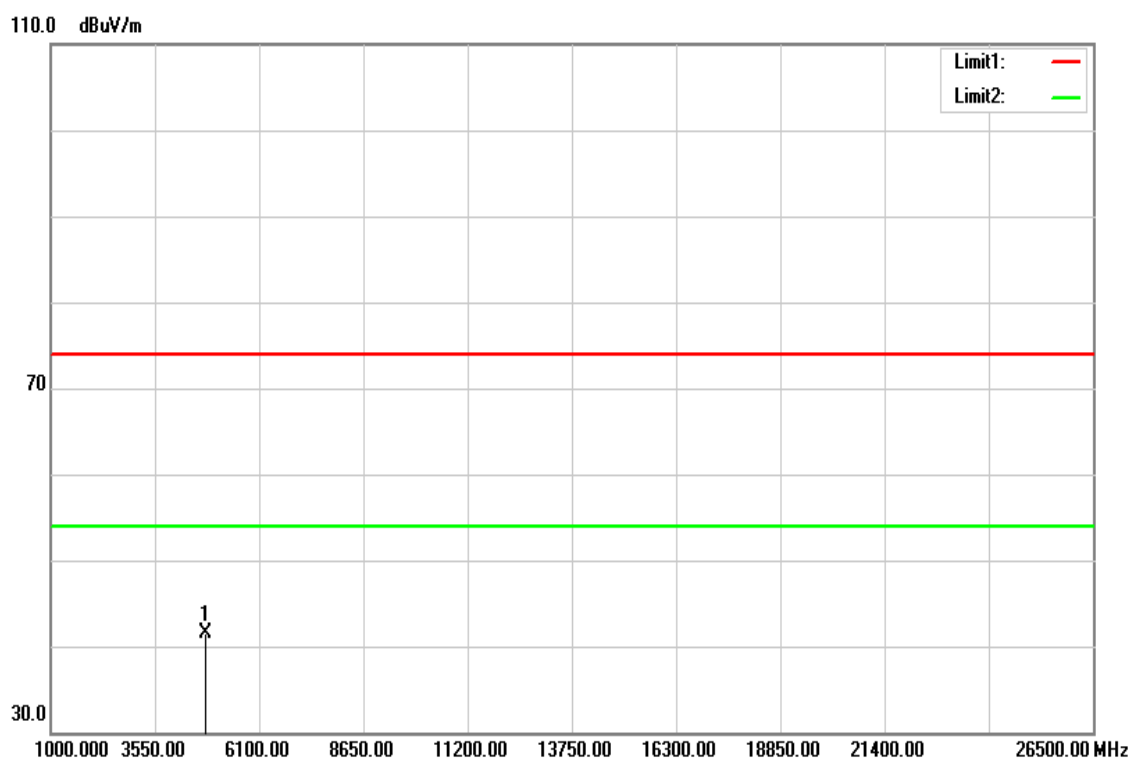


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	37.07	4.34	41.41	74.00	-32.59	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

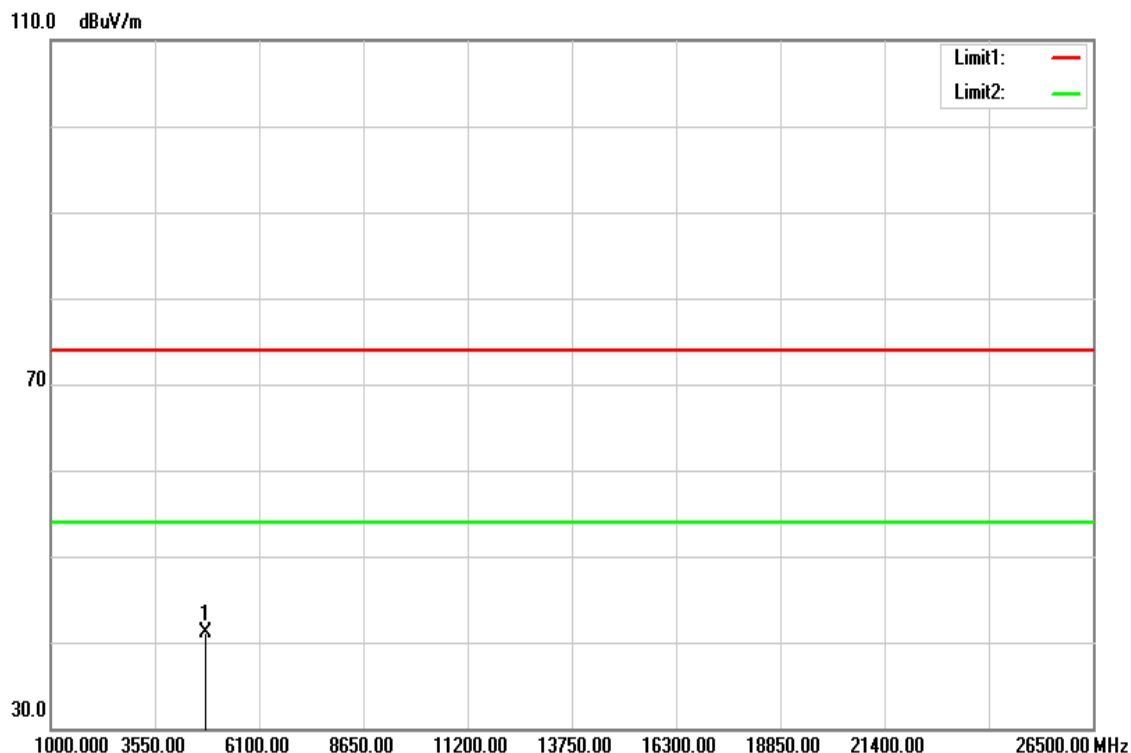


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	36.73	4.34	41.07	74.00	-32.93	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

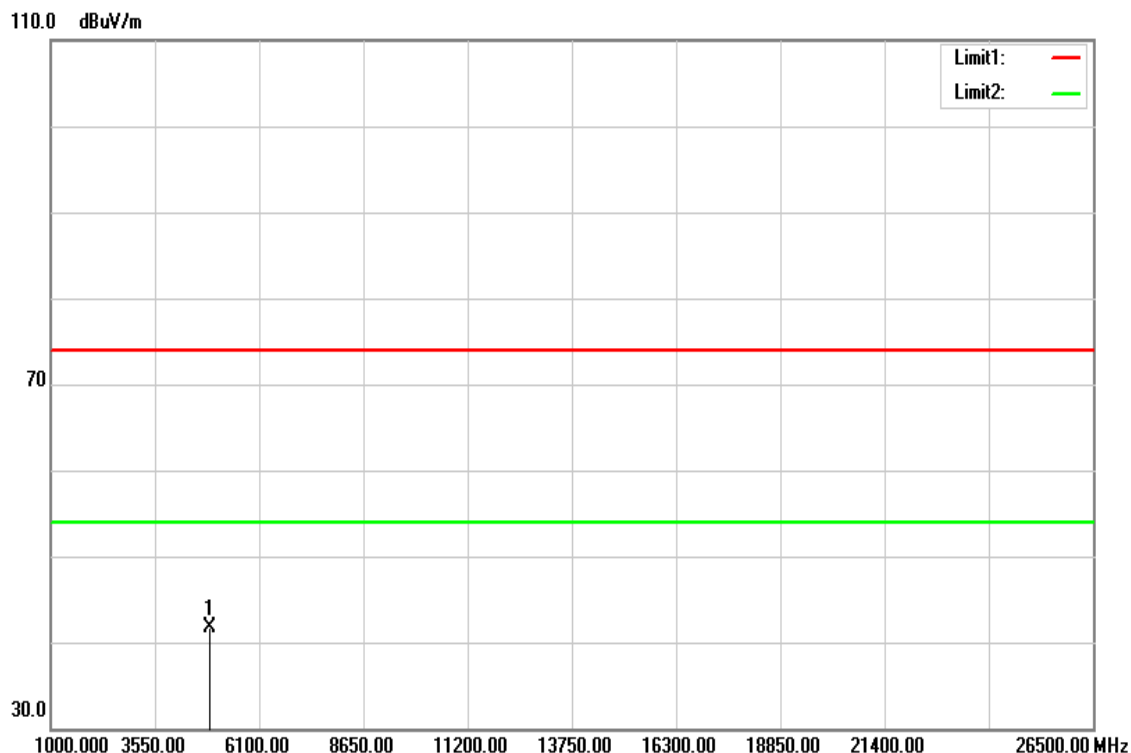


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	37.26	4.49	41.75	74.00	-32.25	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

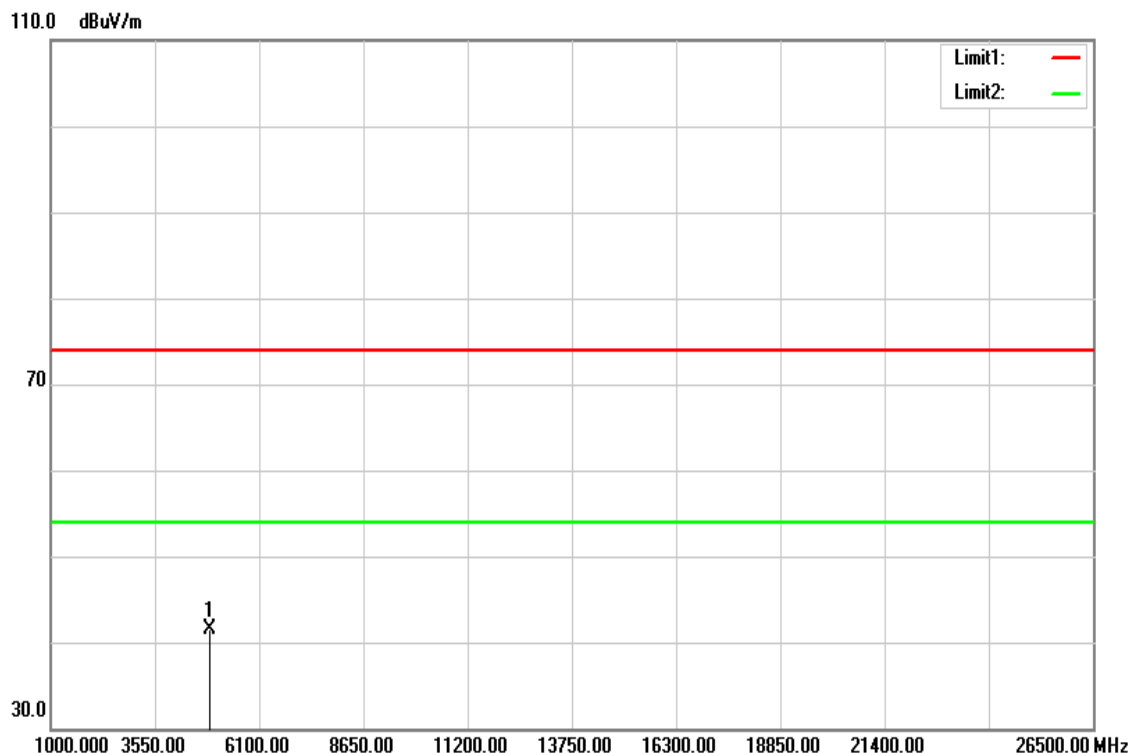


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	36.98	4.49	41.47	74.00	-32.53	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

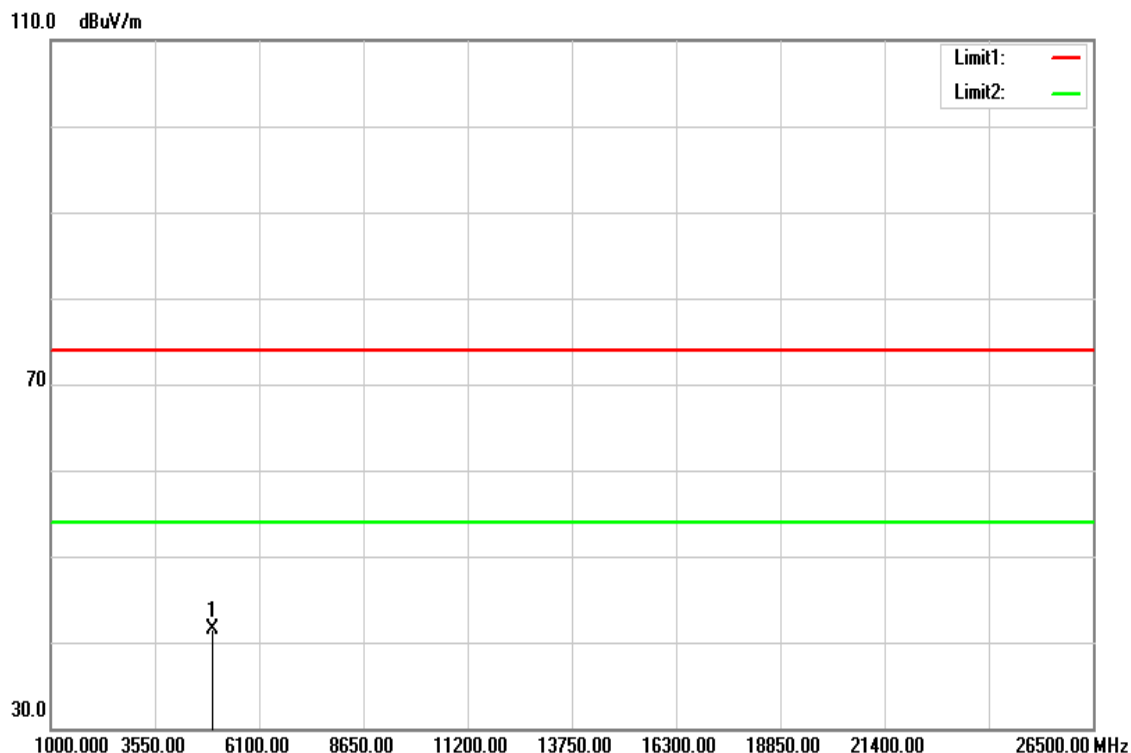


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	36.92	4.61	41.53	74.00	-32.47	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

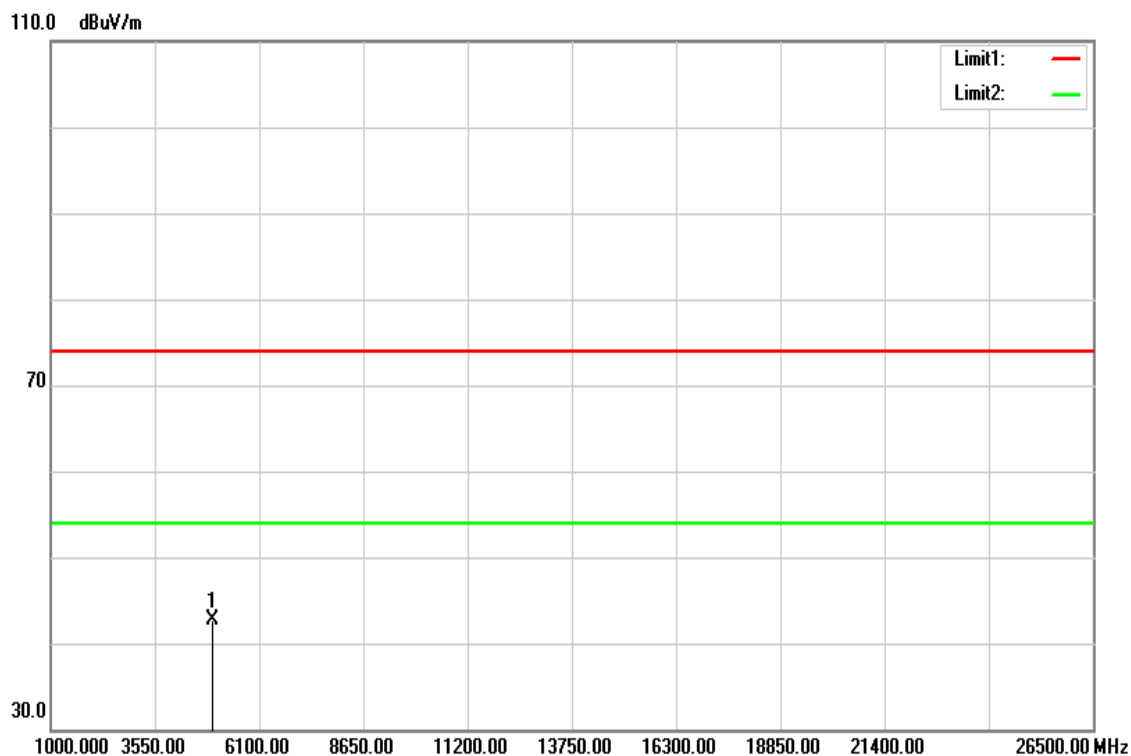


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	38.12	4.61	42.73	74.00	-31.27	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

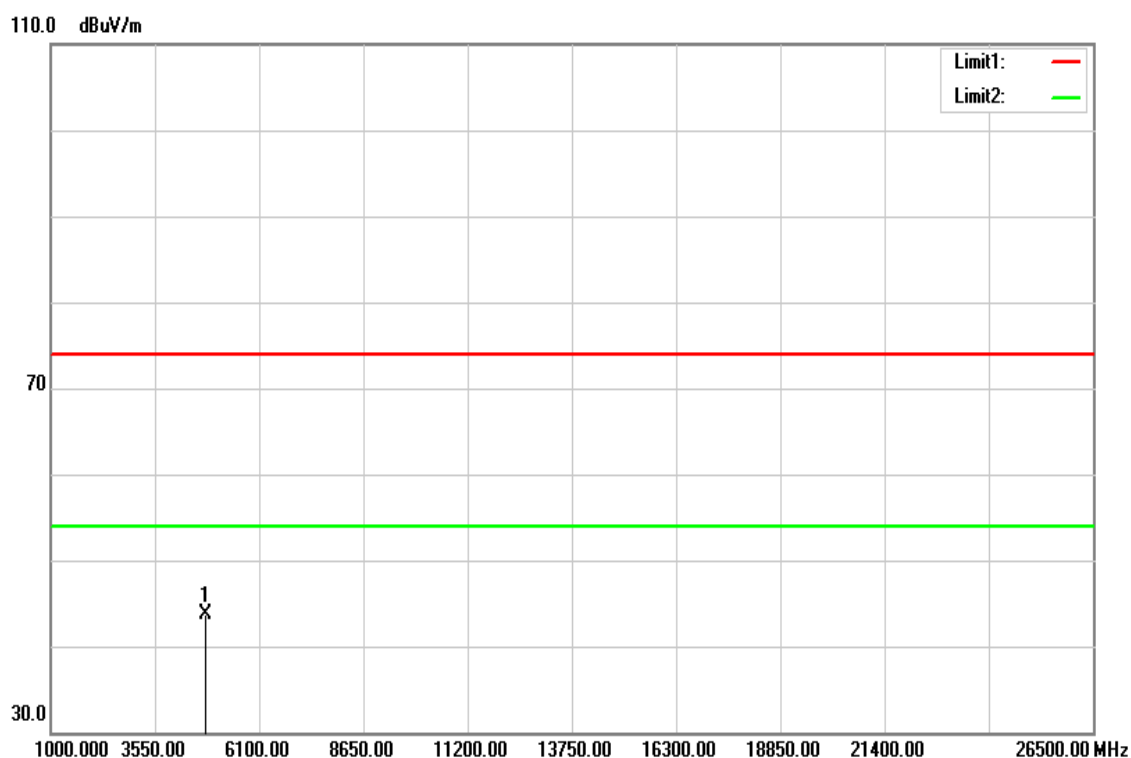


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4799.000	39.37	4.33	43.70	74.00	-30.30	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

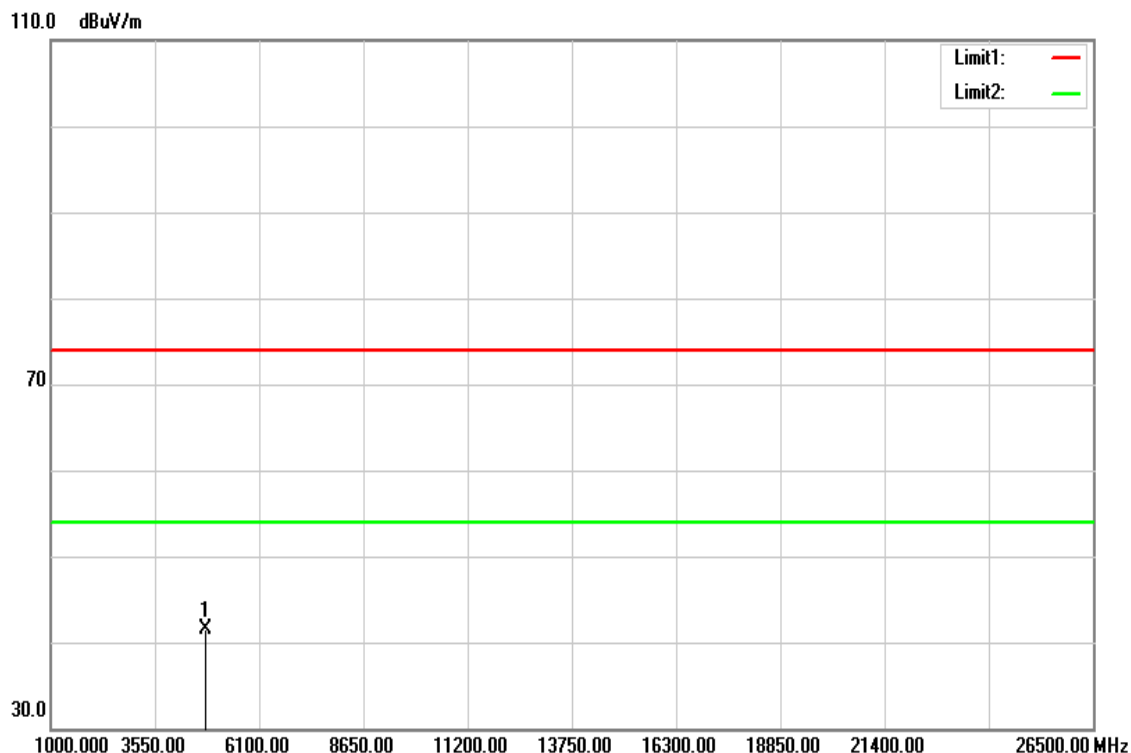


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	37.14	4.34	41.48	74.00	-32.52	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

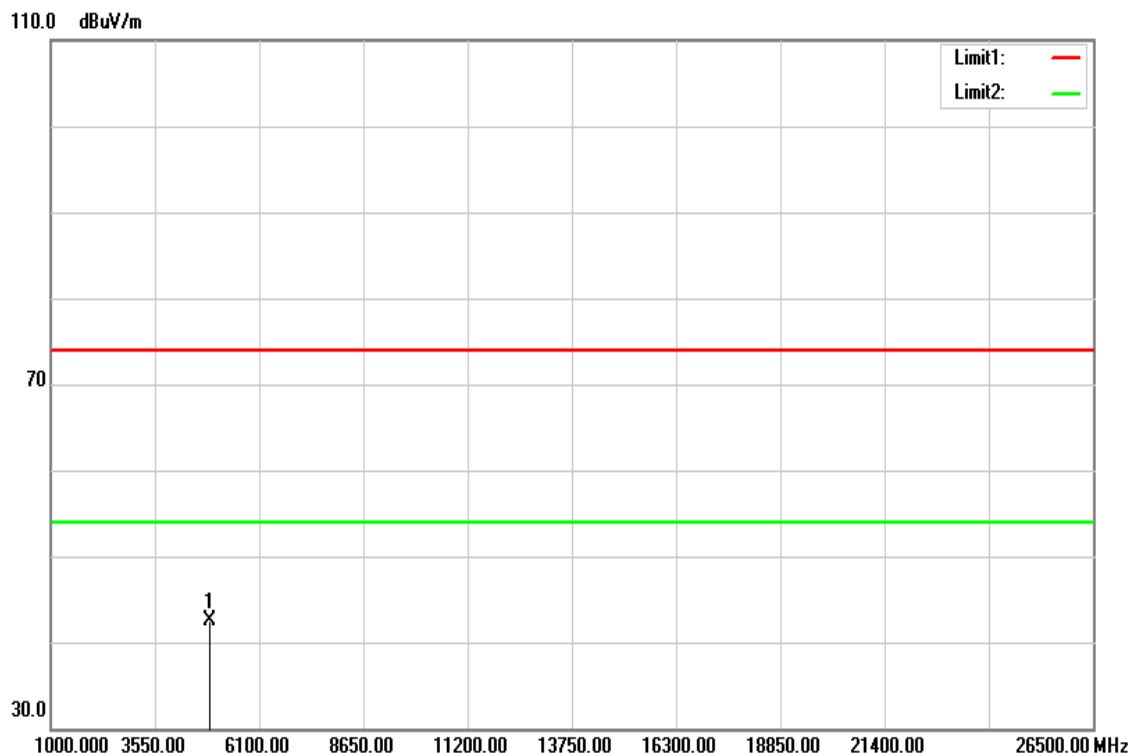


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	37.92	4.49	42.41	74.00	-31.59	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

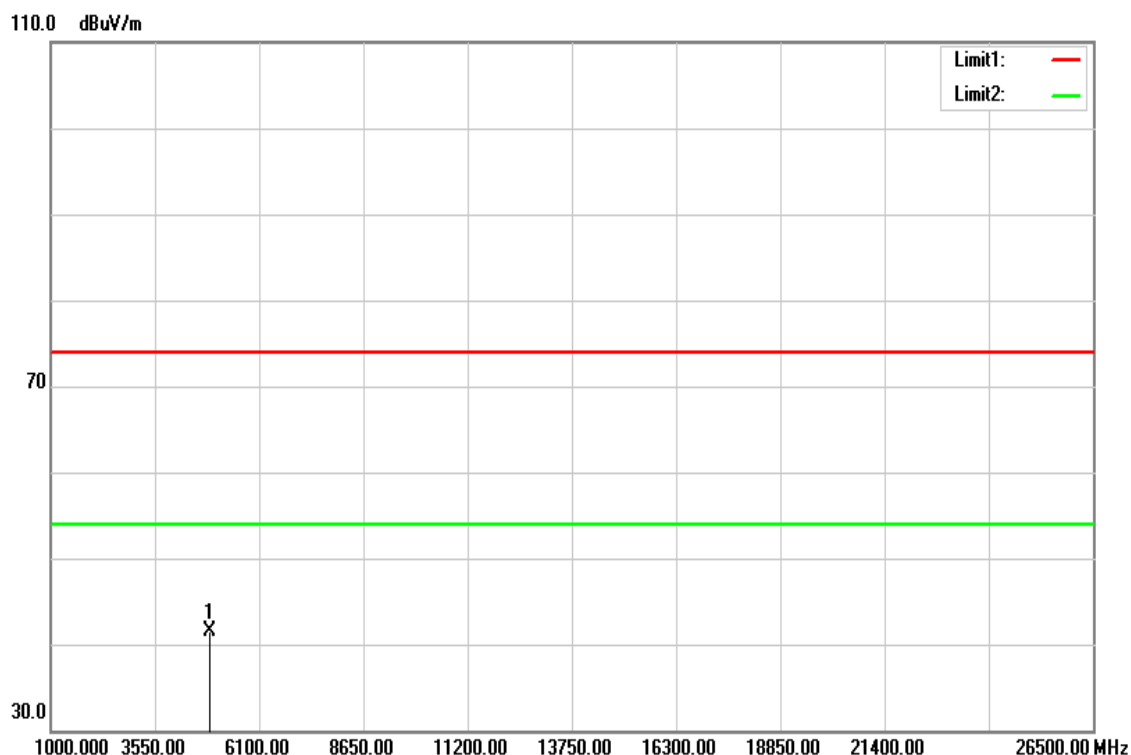


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	37.10	4.49	41.59	74.00	-32.41	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

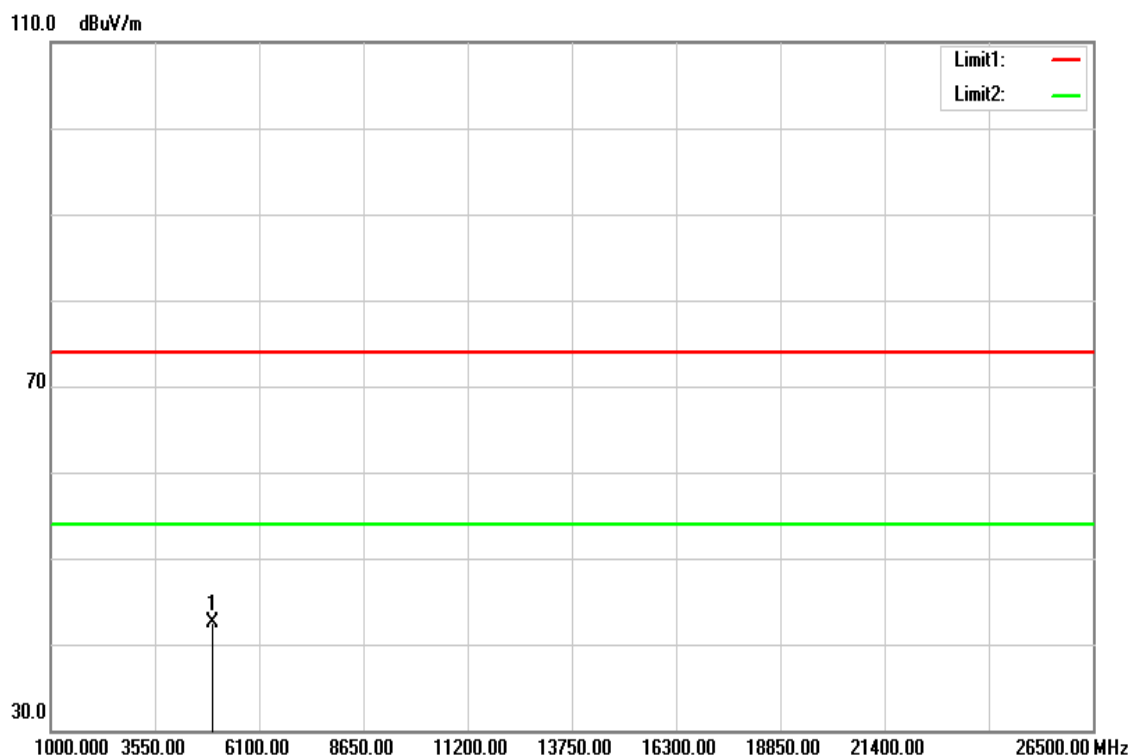


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	37.95	4.61	42.56	74.00	-31.44	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	June 4, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	120Vac / 60Hz

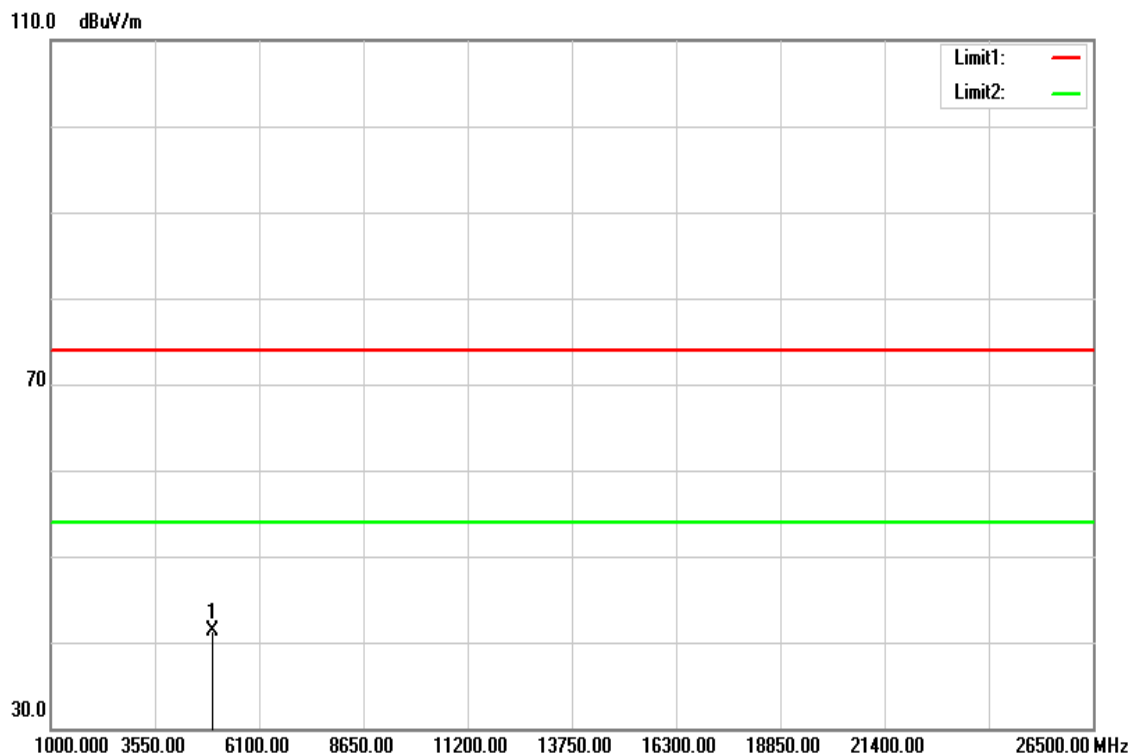

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	36.62	4.61	41.23	74.00	-32.77	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

--End of Test Report--