



# FCC TEST REPORT

**CATEGORY** : Portable End Product  
**PRODUCT NAME** : IEEE 802.11b/g Wireless Notebook Adapter  
**FCC ID.** : PPQ-WN1301P  
**FILING TYPE** : Certification  
**BRAND (MODEL) NAME** : Lite-On (WN1301P), Zonet (ZEW1500-03)  
DrayTek (LWN1300), Inprocomm (VIGOR560)

**APPLICANT** : **Lite-On Technology Corp**  
12F, 392, Ruey Kuang Road, Neihu, Taipei 114, Taiwan,  
R.O.C.

**MANUFACTURER** : **Dong Guan G-COM Computer Co., LTD**  
1<sup>st</sup> RowYin Shan Rd., Yin Hwu Industrial Area, Qingxi Town,  
DongGuan City, Guang Dong, China

**ISSUED BY** : **SPORTON INTERNATIONAL INC.**  
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., His Chih, Taipei Hsien,  
Taiwan, R.O.C.

## Statements:

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by CNLA, NVLAP or any agency of U.S. government.

The test equipment used to perform the test are calibrated and traceable to NML/ROC or NIST/USA.

  
Dr. Alan Lane  
Vice General Manager



Lab Code: 200079-0



## Table of Contents

<b>History of this test report.....</b>	<b>ii</b>
<b>1. General Description of Equipment under Test .....</b>	<b>1</b>
1.1. Applicant.....	1
1.2. Manufacturer .....	1
1.3. Basic Description of Equipment under Test .....	1
1.4. List of Brand / Model Names .....	1
1.5. Feature of Equipment under Test .....	2
1.6. Table for Carrier Frequencies .....	2
<b>2. Test Configuration of the Equipment under Test.....</b>	<b>3</b>
2.1. Description of the Test .....	3
2.2. Frequency Range Investigated .....	3
2.3. Description of Test Supporting Units.....	4
2.4. Connection Diagram of Test System .....	5
2.5. Test Software .....	6
<b>3. Test Location and Standards .....</b>	<b>7</b>
3.1. Test Location.....	7
3.2. Test Conditions .....	7
3.3. Standards for Methods of Measurement.....	7
3.4. DoC Statement.....	7
<b>4. List of Measurements .....</b>	<b>8</b>
4.1. Summary of the Test Results .....	8
<b>5. Test Result.....</b>	<b>9</b>
5.1. Test of Spectrum Bandwidth of a Direct Sequence Spread Spectrum System (6 dB Bandwidth) .....	9
5.2. Test of Maximum Peak Output Power .....	15
5.3. Test of Peak Power Spectral Density.....	17
5.4. Test of Band Edges of the Operation Frequency.....	23
5.5. Test of AC Power Line Conducted Emission .....	30
5.6. Test of Spurious Radiated Emission .....	34
5.7. Antenna Requirements .....	44
<b>6. List of Measuring Equipments Used .....</b>	<b>45</b>
<b>Appendix A. Photographs of EUT .....</b>	<b>A1 ~ A3</b>





## 1. General Description of Equipment under Test

### 1.1. Applicant

LiteOn Corp  
12F, 392, Ruey Kuang Road, Neihu, Taipei 114, Taiwan, R.O.C.

### 1.2. Manufacturer

Dong Guan G-COM Computer Co., LTD  
1<sup>st</sup> RowYin Shan Rd., Yin Hwu Industrial Area, Qingxi Town, DongGuan City, Guang Dong, China

### 1.3. Basic Description of Equipment under Test

This product is a wireless LAN with IEEE 802.11g protocol. The technical data has been listed on section " Feature of Equipment under Test ". And it is used for host equipment with PCMCIA interface.

### 1.4. List of Brand / Model Names

Brand Name	Model Name
Lite-On	WN1301P
Zonet	ZEW1500-03
DrayTek	LWN1300
Inprocomm	VIGOR560



### 1.5. Feature of Equipment under Test

<b>Type of Modulation :</b>	DSSS (CCK / DQPSK / DBPSK ), OFDM (16QAM / 64QAM)
<b>Number of Channels :</b>	13
<b>Frequency Band :</b>	2400MHz ~ 2483.5MHz
<b>Carrier Frequencies :</b>	Please reference section 1.6
<b>Channel Bandwidth :</b>	22MHz
<b>Output Power :</b>	CCK : 18.2dBm (peak) OFDM : 14.3 dBm (peak)
<b>Antenna Type / Class and Gain :</b>	On board F type / 2dBi
<b>Function Type :</b>	Transceiver
<b>Data Rate :</b>	54 Mbps ( Max )
<b>Power Rating (DC/AC , Voltage) :</b>	3.3 VDC
<b>Temperature Range (Operating) :</b>	0 ~ 55

### 1.6. Table for Carrier Frequencies

The table below is the summary of the operating frequencies.

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412 MHz	5	2432 MHz	9	2452 MHz		
2	2417 MHz	6	2437 MHz	10	2457 MHz		
3	2422 MHz	7	2442 MHz	11	2462 MHz		
4	2427 MHz	8	2447 MHz				



---

## 2. Test Configuration of the Equipment under Test

### 2.1. Description of the Test

- a. During testing, the equipment was placed on a non-conducting support.
- b. The following test modes were performed:
  - Mode 1: CH 01 (2412MHz)
  - Mode 2: CH 06 (2437MHz)
  - Mode 3: CH 11 (2462MHz)
- c. Spurious emission below 1GHz is independent of channel selection, so only channel 11 with OFDM modulation was tested.
- d. For spurious emission above 1GHz both DSSS with 11Mbps data rate and OFDM with 54Mbps data rate were tested.
- e. The EUT has been programmed to continuously transmit or receive during testing. The used peripherals as well as the configuration fulfill the requirements of ANSI C63.4:2001.
- f. The configuration is operated in a manner which tends to maximize its emission characteristics in a typical application.
- g. 3 meters measurement distance of OATS was used in this test.

### 2.2. Frequency Range Investigated

- a. Conducted power line test: from 150 kHz to 30 MHz
- b. Radiated emission test: from 30 MHz to 25000 MHz



### 2.3. Description of Test Supporting Units

#### Support Unit 1. – Notebook (COMPAQ)

FCC ID : N/A  
Model No. : Presario 1500  
Serial No. : SP0004  
Remark : This support device was tested to comply with FCC standards and authorized under Declaration of Conformity.


#### Support Unit 2. – Printer (COMPAQ)

FCC ID : N/A  
Model No. : Stylus Color 680  
Serial No. : SC184964  
Remark : This support device was tested to comply with FCC standards and authorized under Declaration of Conformity and data cable is 1.35m of the shielded.

#### Support Unit 3. – Remote Workstation (HP COMPAQ)

FCC ID : N/A  
Model No. : Desktop 200  
Serial No. : SD0258113  
Remark : This support device was tested to comply with FCC standards and authorized under Declaration of Conformity

## 2.4. Connection Diagram of Test System

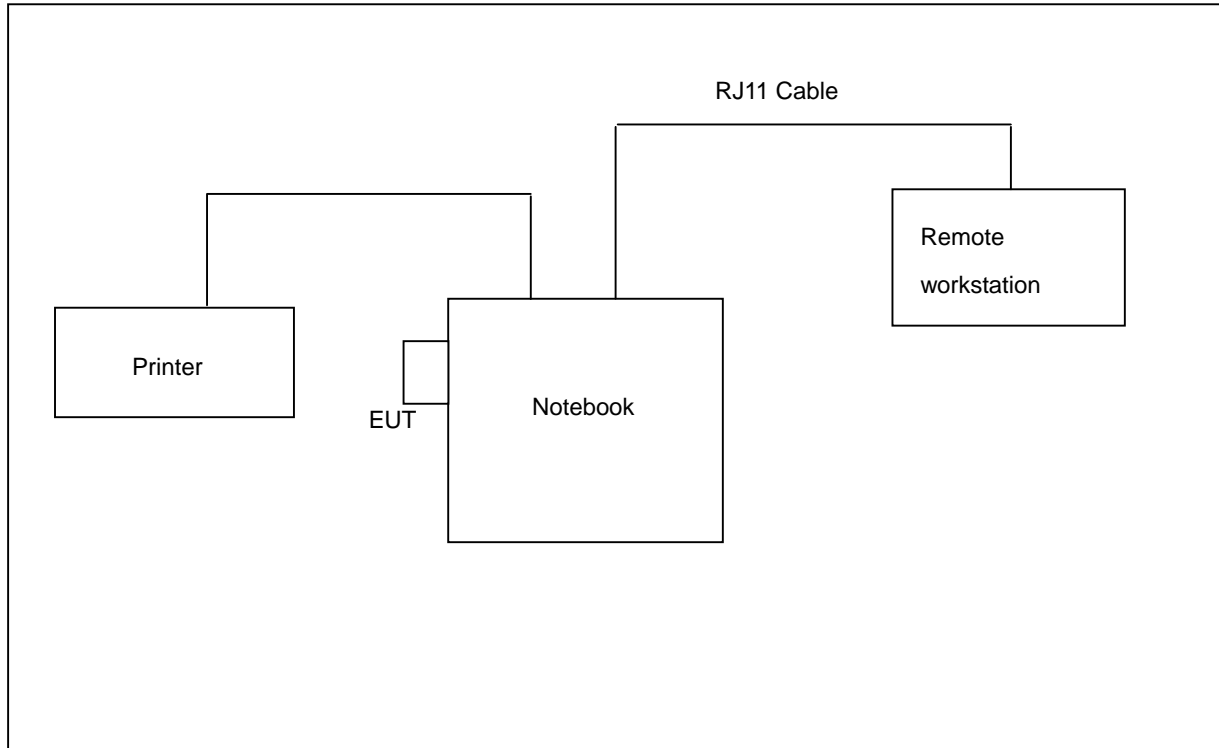





## 2.5. Test Software

There are 2 softwares may be used in the testing.

- a. Channel & Power Controlling Software: This was provided by the manufacturer and is able to let the test engineer select the operating channel as well as the RF output power. The parameters for channel selection is trying to offer the test engineer the ability to fix the operating channel for testing, both normal data and continuously transmitting modes are allowed, and that for RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.
- b. "H" Pattern Generator: Except Access Point, the supporting equipment such as monitor or printer is always available. Under testing, these supporting equipment has to also under working condition. "H" Pattern Generator is able to continuously transmitting "H" character to those supporting equipments.



---

### 3. Test Location and Standards

#### 3.1. Test Location

**Test Location :** Sporton Hwa Ya Testing Building

**Address :** No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Tel: +886 3 327 3456 Fax: +886 3 318 0055

**Test Site No. :** CO01-HY, 03CH03-HY

#### 3.2. Test Conditions

Normal Voltage : 120V/60Hz

Extreme Voltage : 138V and 102V

Normal Temperature : 20

Extreme Temperature : -20 and 50

#### 3.3. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

**ANSI C63.4-2001**

**47 CFR Part 15 Subpart C ( Section 15.247 )**

#### 3.4. DoC Statement

This EUT is also classified as a device of computer peripheral Class B which DoC has to be followed. It has been verified according to the rule of 47 CFR part 15 Subpart B, and found that all the requirements has been fulfilled.



## 4. List of Measurements

### 4.1. Summary of the Test Results

Applied Standard: 47 CFR Part 15 and Part 2			
Paragraph	FCC Rule	Description of Test	Result
	15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System(6 dB Bandwidth)	Pass
	15.247(b)	Maximum Peak Output Power	Pass
	15.247(d)	Peak Power Spectral Density	Pass
	15.247(c)	Band Edges of the Operation Frequency	Pass
	15.107/15.207	AC Power Line Conducted Emission	Pass
	15.209/15.247(c)	Spurious Radiated Emission	Pass
	15.203	Antenna Requirement	Pass
	2.1091/2.1093	Maximum Permissible Exposure for the EUT	Pass



## 5. Test Result

### 5.1. Test of Spectrum Bandwidth of a Direct Sequence Spread Spectrum System (6 dB Bandwidth)


#### 5.1.1. Measuring Instruments

Item 9 of the table on section 6.

#### 5.1.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The 6dB bandwidth is defined as the spectrum width with level higher than 6dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

#### 5.1.3. Test Setup Layout

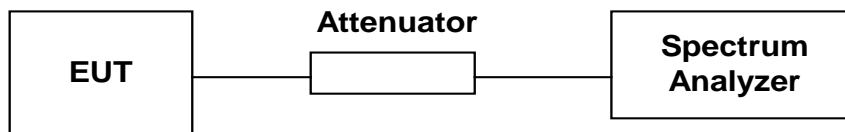


#### 5.1.4. Test Result (CCK) : See spectrum analyzer plots below

- Modulation Type: CCK
- Temperature: 25°C
- Relative Humidity: 62 %
- Duty cycle of the equipment during the test: 100%


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limit (MHz)
01	2412	10.44	0.5
06	2437	10.72	0.5
11	2462	10.40	0.5



Modulation Type: CCK (Channel 01) :

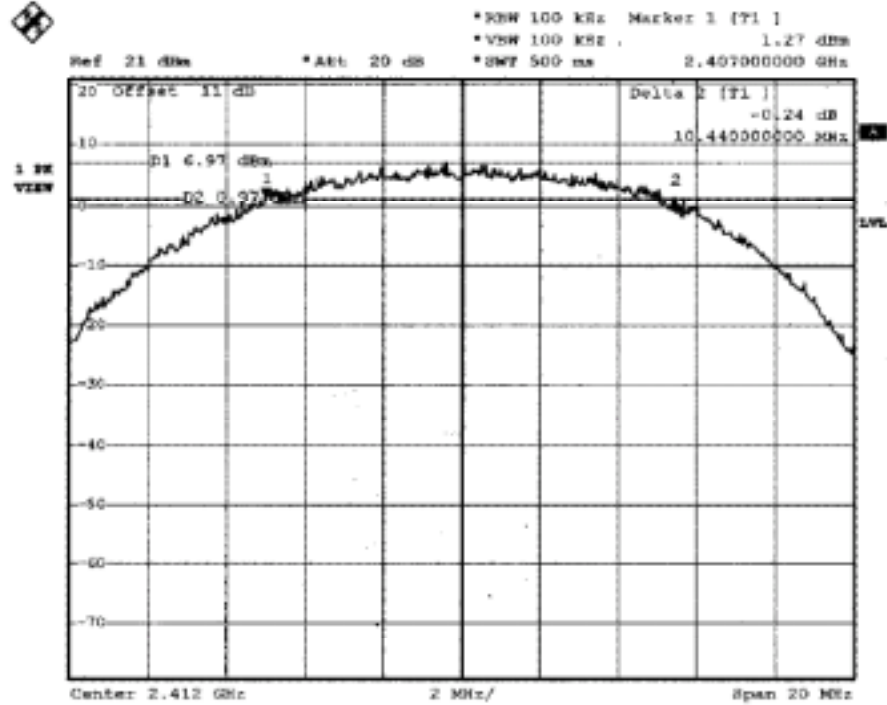


Modulation Type: CCK (Channel 06) :

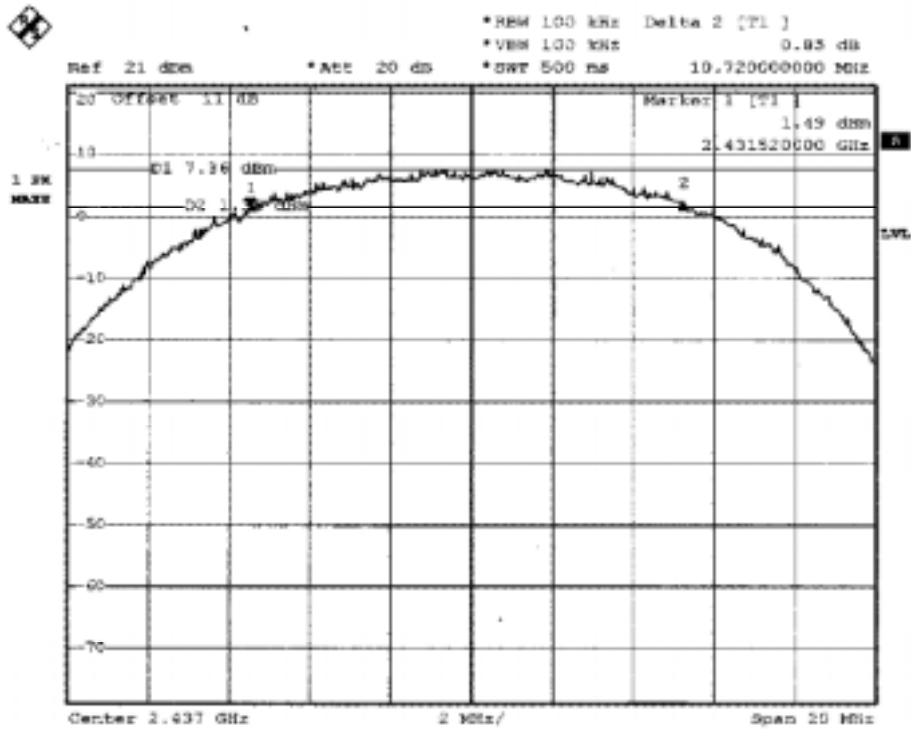



Modulation Type: CCK (Channel 11) :

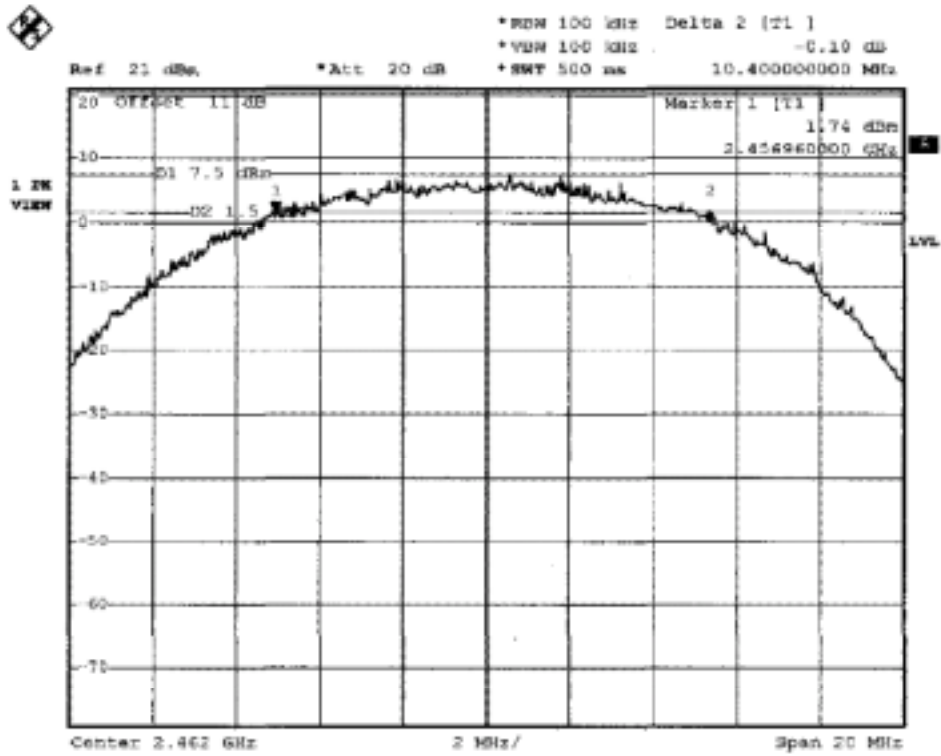




5.1.5. Test Result (OFDM) : See spectrum analyzer plots below

- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 62 %
- Duty cycle of the equipment during the test: 100%


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limits (MHz)
01	2412	16.44	0.5
06	2437	16.48	0.5
11	2462	16.48	0.5



Modulation Type: OFDM (Channel 01) :

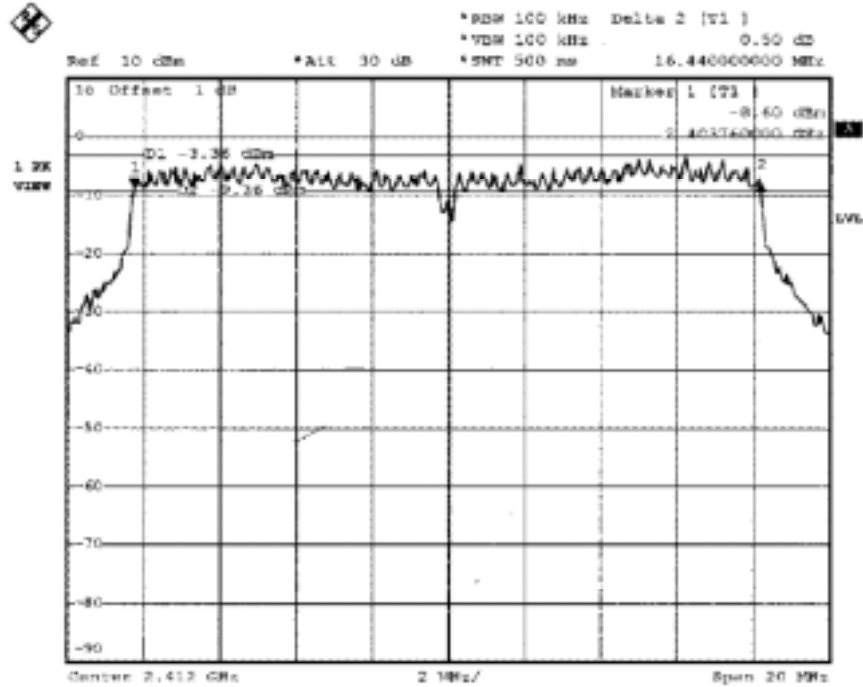


Modulation Type: OFDM (Channel 06) :

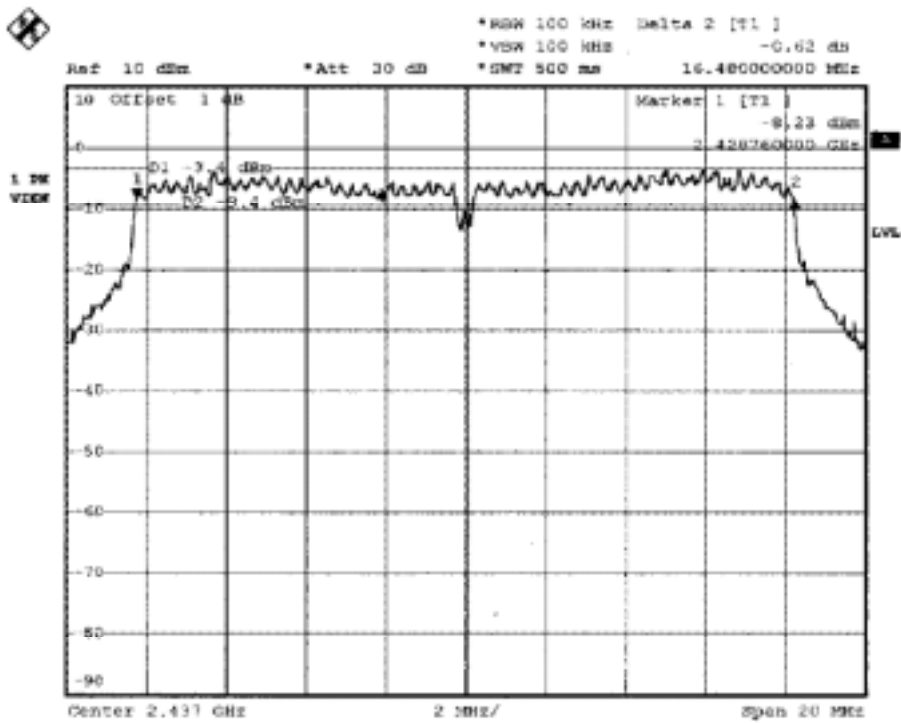





Modulation Type: OFDM (Channel 11) :

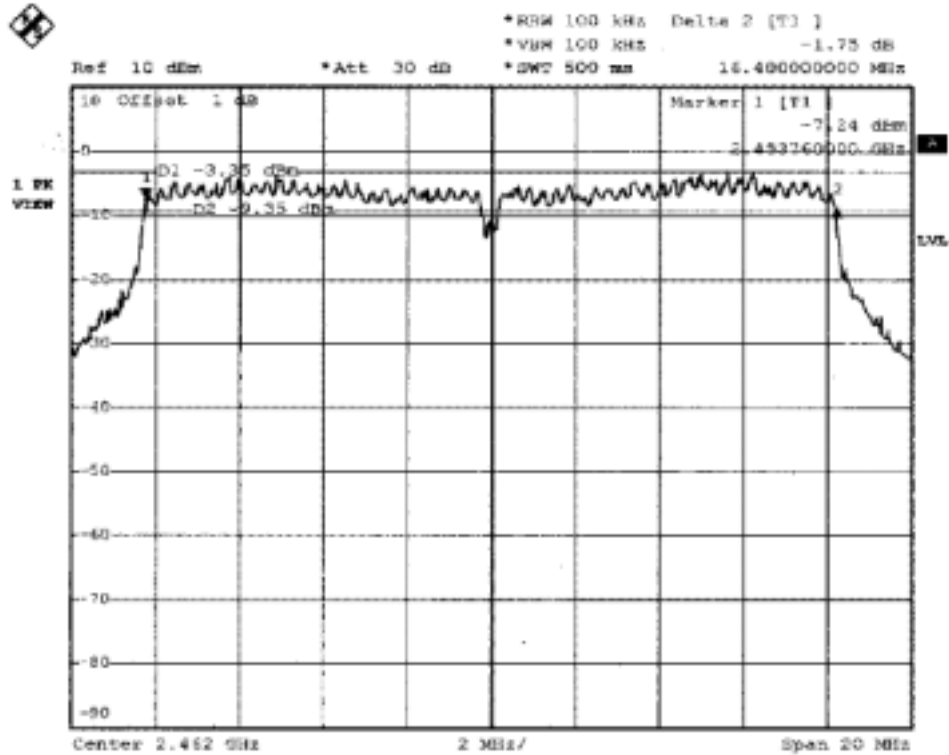

5.1.6. Test Configuration : ( EUT Operating Condition )

The software provided by client enables the EUT under transmission condition continuously at lowest, middle and highest channel frequencies respectively and maximum power.

## 5.2. Test of Maximum Peak Output Power



### 5.2.1. Measuring Instruments

Item 9 of the table on section 6.

### 5.2.2. Test Procedures

1. The transmitter output was connected to the vertical channel of the oscilloscope through a detector.
2. Observe the duty cycle X from the oscilloscope and the record the detected voltage level A.
3. Replace the EUT via the signal generator, calibrate the reading via the carrier frequency.
4. The duty cycle X has to be calibrated on the output power of the signal generator.
5. Repeated the 1~4 for the middle and highest channel of the EUT.

### 5.2.3. Test Setup Layout

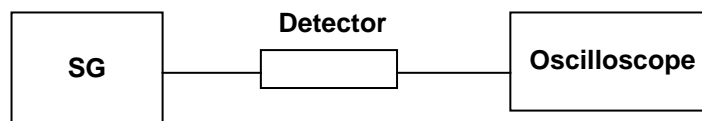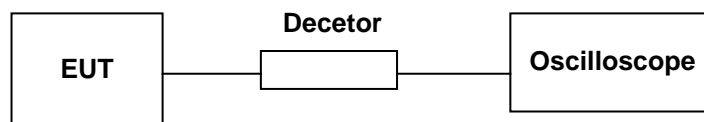



5.2.4. Test Result : See spectrum analyzer plots below

- Modulation Type: CCK
- Temperature: 25°C
- Relative Humidity: 62 %
- Duty cycle of the equipment during the test : 100%

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mWatt)	Limits (dBm )
01	2412	18.2	66.069	30 dBm
06	2437	18.1	64.565	30 dBm
11	2462	18.1	64.565	30 dBm

5.2.5. Test Result : See spectrum analyzer plots below

- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 62 %
- Duty cycle of the equipment during the test : 100%

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mWatt)	Limits (dBm )
01	2412	14.3	26.915	30 dBm
06	2437	14.3	26.915	30 dBm
11	2462	14.2	26.302	30 dBm

5.2.6. Test Configuration : ( EUT Operating Condition )

Same as Section 5.1.6.



### 5.3. Test of Peak Power Spectral Density


#### 5.3.1. Measuring Instruments

Item 9 of the table on section 6.

#### 5.3.2. Test Procedures

1. The transmitter output is connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Repeated the 1~4 for the middle and highest channel of the EUT.

#### 5.3.3. Test Setup Layout

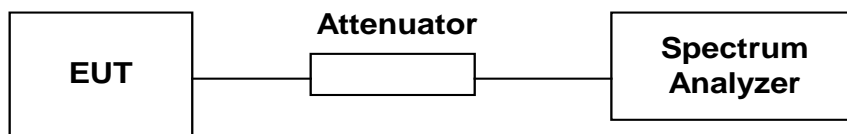


#### 5.3.4. Test Result : See spectrum analyzer plots below

- Modulation Type: CCK
- Temperature: 25°C
- Relative Humidity: 62 %
- Duty cycle of the equipment during the test: 100%


Channel	Frequency (MHz)	Power Density (dBm)	Limits (dBm)
01	2412	-7.23	8
06	2437	-6.97	8
11	2462	-6.86	8



Modulation Type: CCK (Channel 01) :

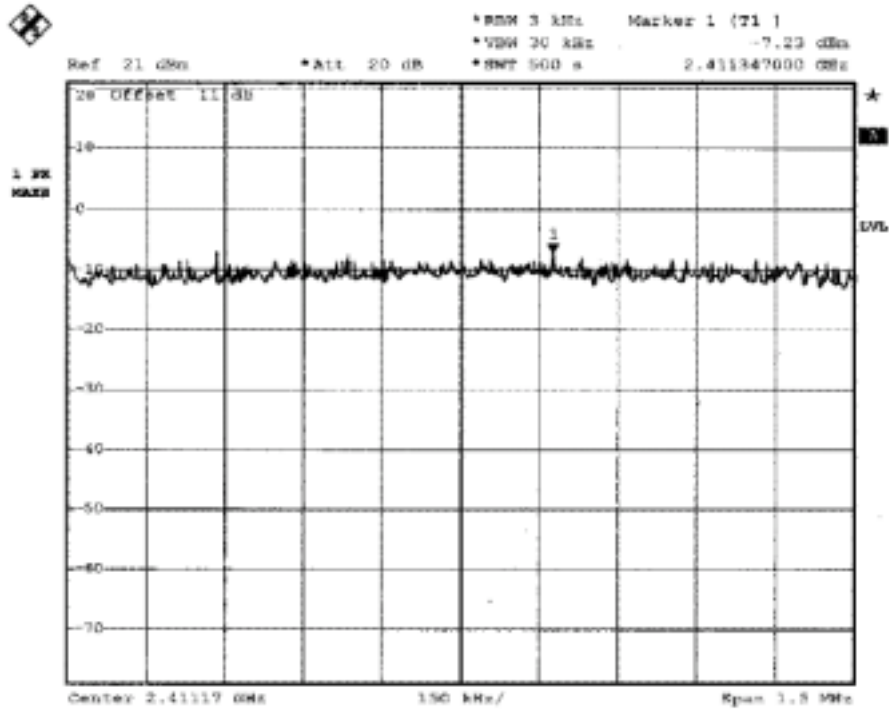


Modulation Type: CCK (Channel 06) :

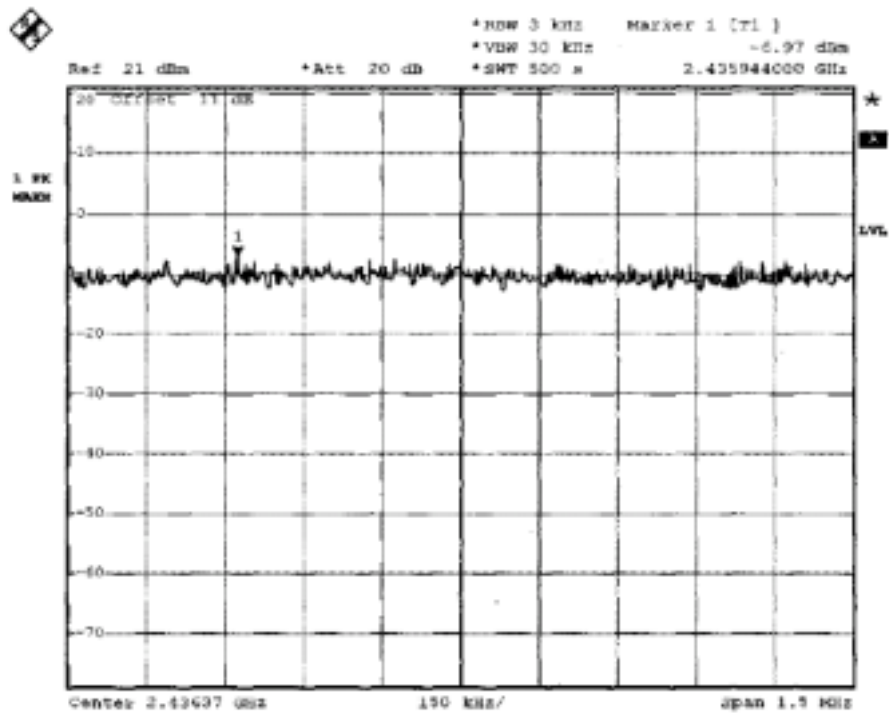



Modulation Type: CCK (Channel 11) :

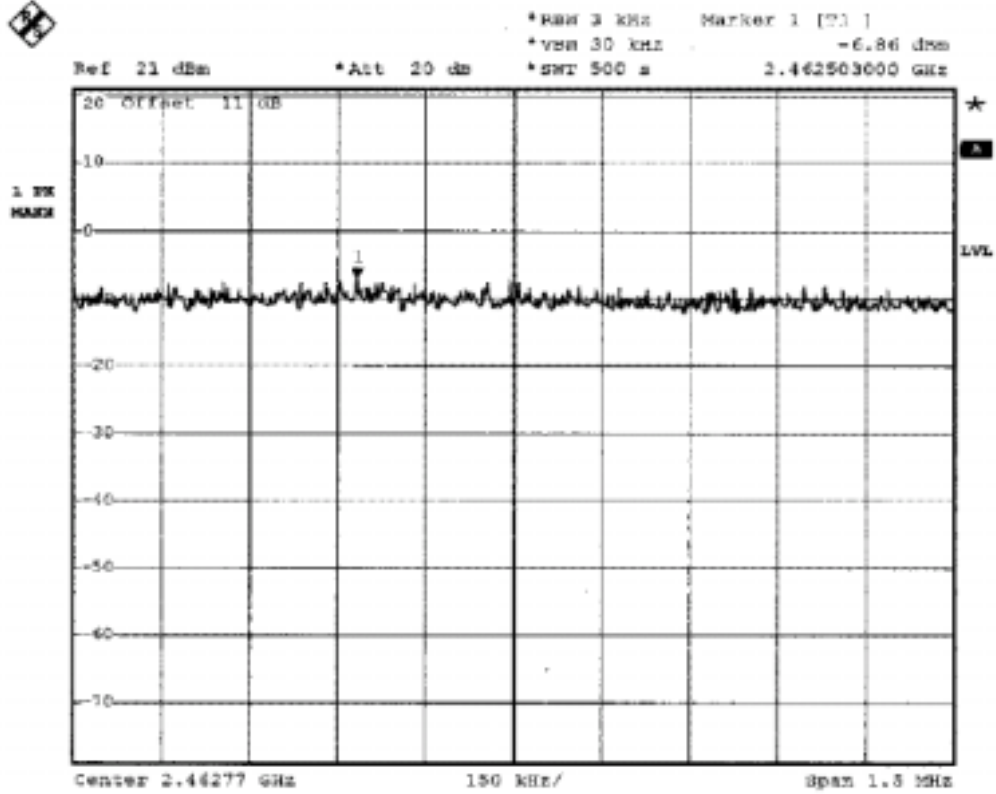




5.3.5. Test Result : See spectrum analyzer plots below

- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 62 %
- Duty cycle of the equipment during the test : 100%


Channel	Frequency (MHz)	Power Density (dBm)	Limits (dBm)
01	2412	-16.32	8
06	2437	-15.42	8
11	2462	-16.50	8



Modulation Type: OFDM (Channel 01) :

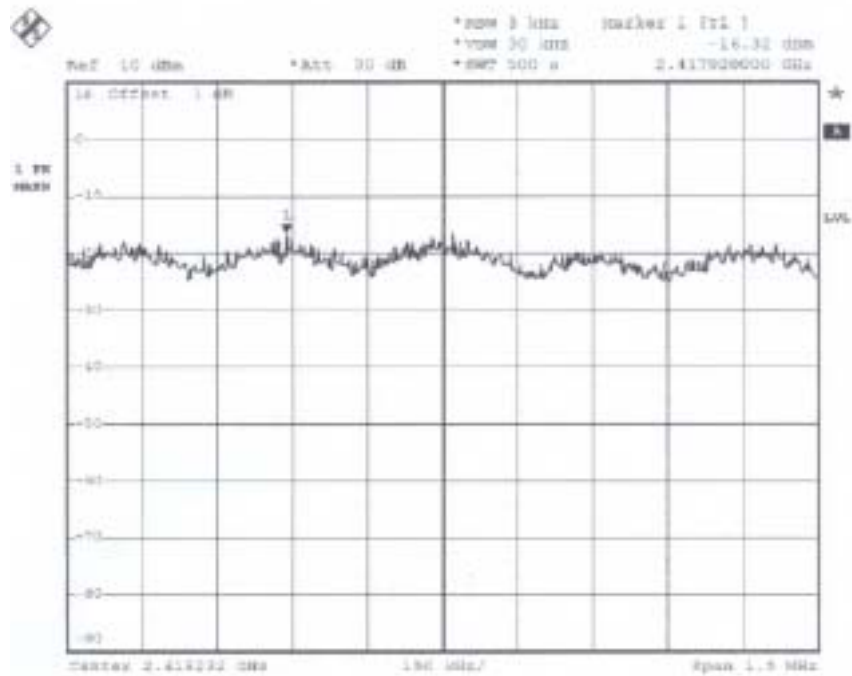


Modulation Type: OFDM (Channel 06) :

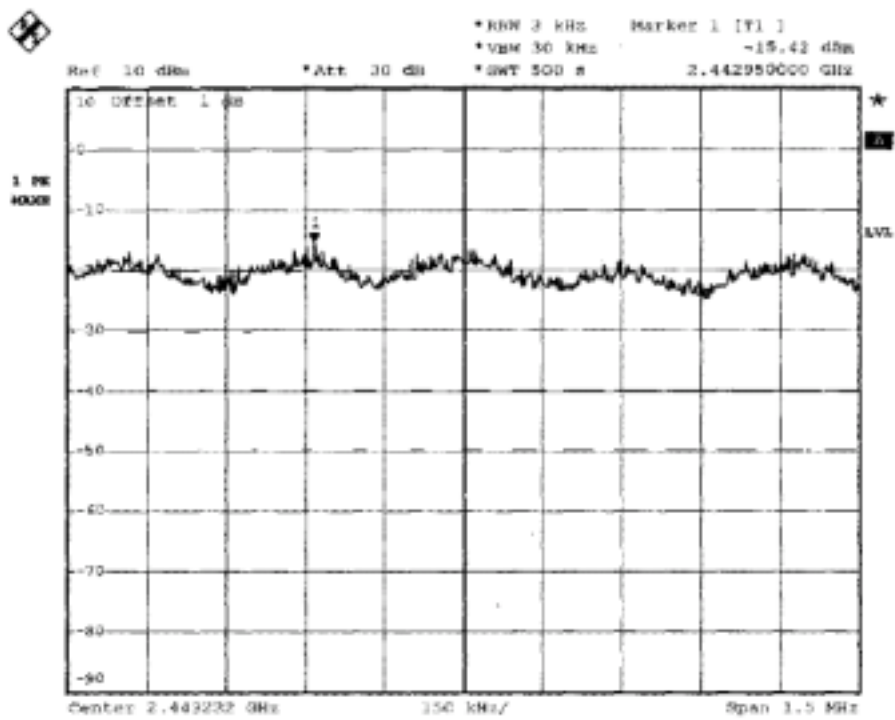





Modulation Type: OFDM (Channel 11) :

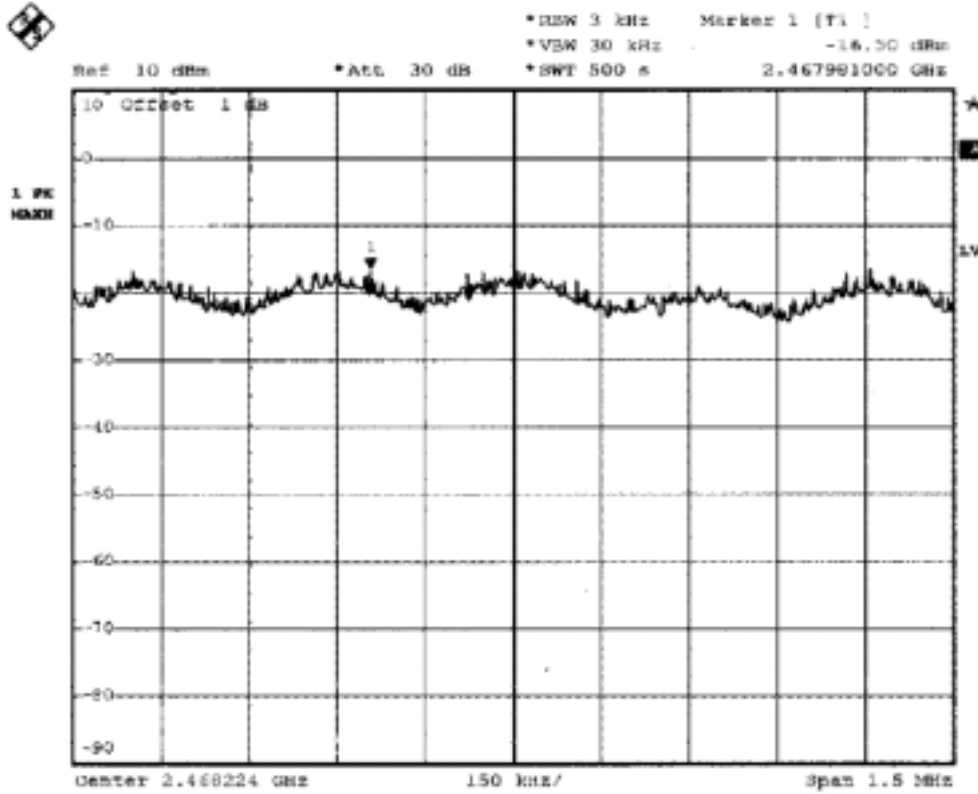

5.3.6. Test Configuration : ( EUT Operating Condition )

Same as Section 5.1.6.



## 5.4. Test of Band Edges of the Operation Frequency

### 5.4.1. Measuring Instruments

Item 9 of the table on section 6.

### 5.4.2. Test Procedures

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

### 5.4.3. Test Result :

Test Result in lower band (Channel 01) :	PASS
Test Result in higher band(Channel 11) :	PASS



5.4.4. Note on Band edge Emission

**Modulation Type: CCK**

(A) Left Edge

The band edge emission plot shows 52.59dB delta between carrier maximum power and local maximum emission in the restricted band.

CH01 Carrier power strength (dB $\mu$ V/m)	Delta (dB)	The maximum field strength in restrict band (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
102.49	52.59	49.90	54.00	-4.1

(B) Right Edge


The band edge emission plot shows 51.36dB delta between carrier maximum power and local maximum emission in the restricted band.

CH11 Carrier power strength (dB $\mu$ V/m)	Delta (dB)	The maximum field strength in restrict band (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
103.08	51.36	51.72	54.00	-2.28

\* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.




Modulation Type: CCK (Channel 01) :

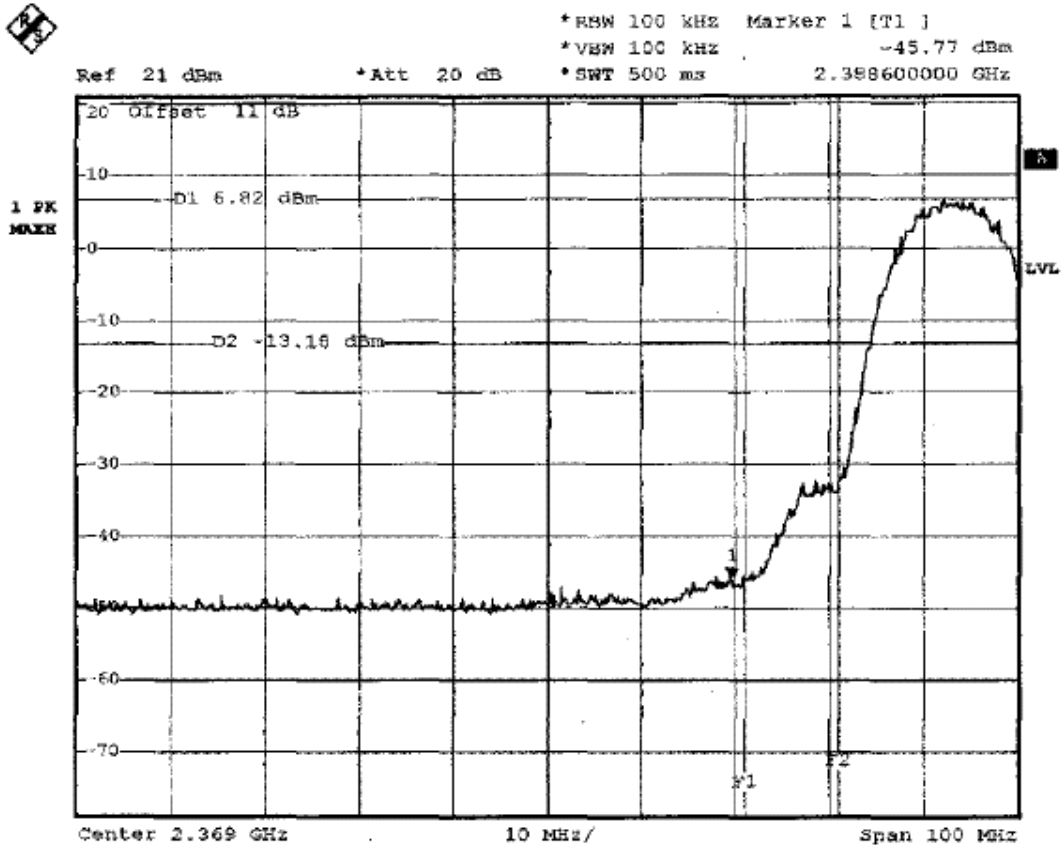



Modulation Type: CCK (Channel 11) :

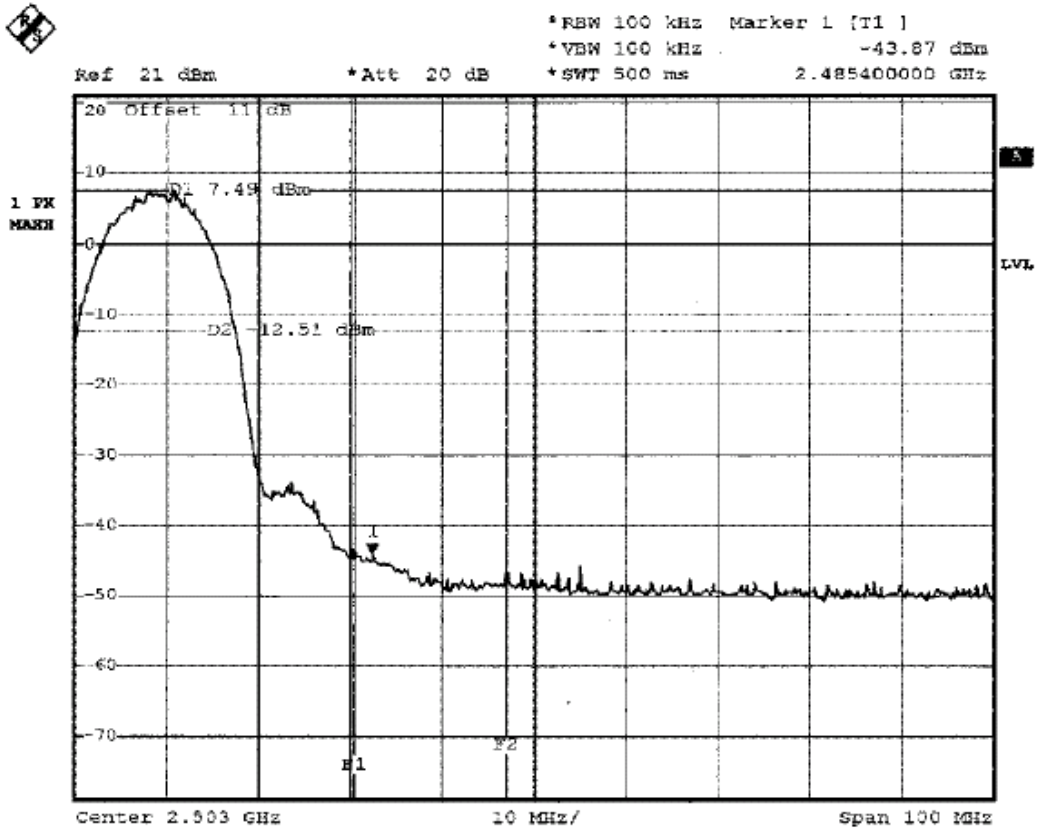

Observation : All emissions in the 100kHz bandwidth are 20dB lower than the carrier strength.



5.4.5. Note on Band edge Emission

**Modulation Type: OFDM**

(A) Left Edge

The band edge emission plot shows 45.59dB delta between carrier maximum power and local maximum emission in the restricted band.

CH01 Carrier power strength (dB $\mu$ V/m)	Delta (dB)	The maximum field strength in restrict band (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
97.08	45.59	51.49	54.00	-2.51

(B) Right Edge


The band edge emission plot shows 47.15dB delta between carrier maximum power and local maximum emission in the restricted band.

CH11 Carrier power strength (dB $\mu$ V/m)	Delta (dB)	The maximum field strength in restrict band (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
98.54	47.15	51.39	54.00	-2.61


\* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.



Modulation Type: OFDM(Channel 01) :

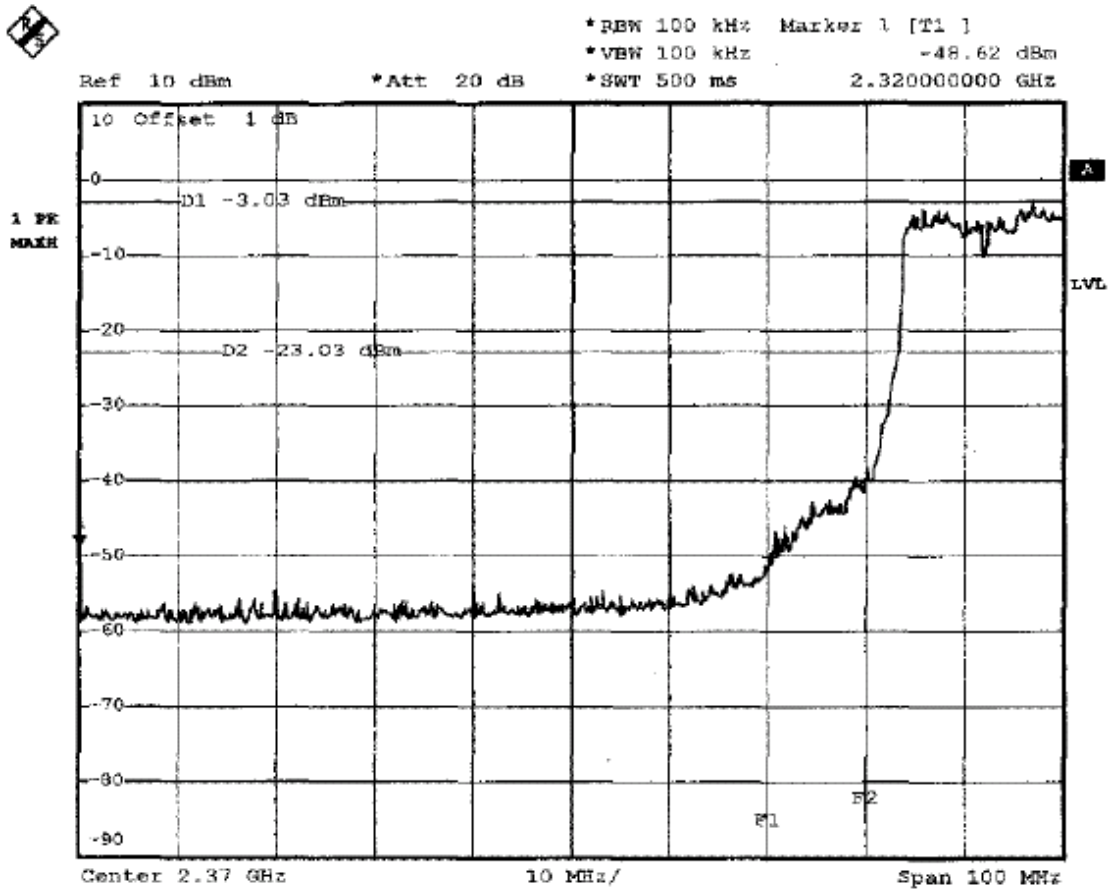

Modulation Type: OFDM (Channel 11) :

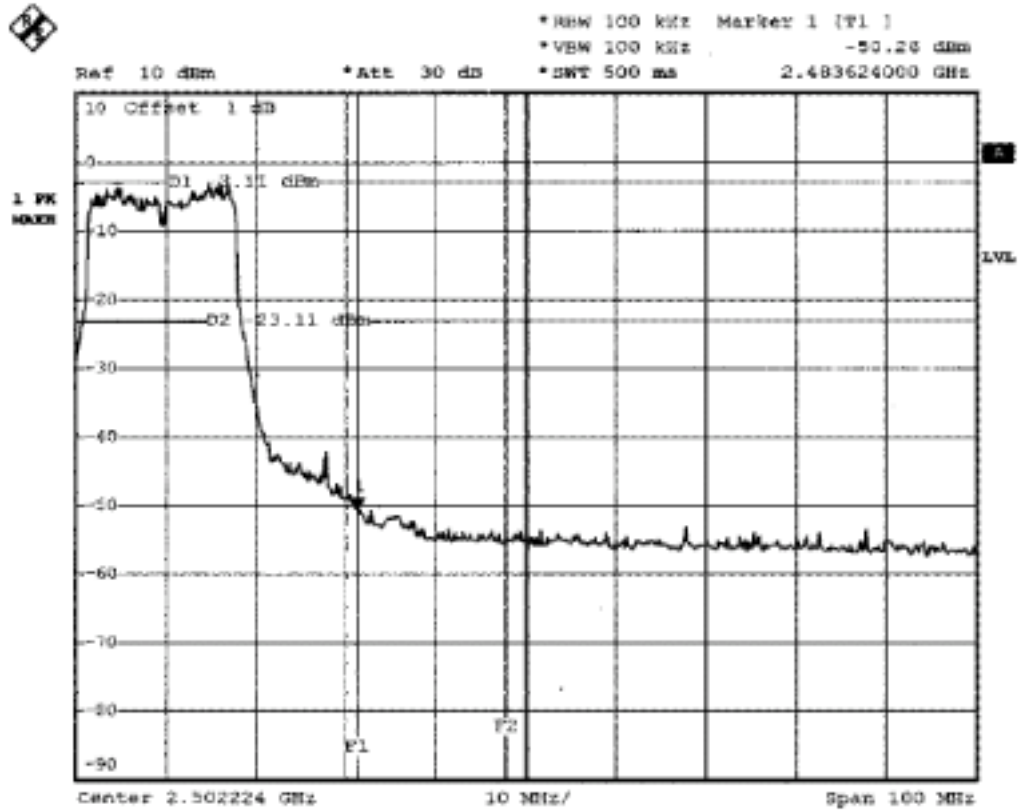

Observation : All emissions in the 100kHz bandwidth are 20dB lower than the carrier strength.

5.4.6. Test Configuration ( EUT Operating Condition ) :

Same as Section 5.1.6.





## 5.5. Test of AC Power Line Conducted Emission

### 5.5.1. Measuring Instruments

Please reference item 1~7 in chapter 6 for the instruments used for testing.

### 5.5.2. Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provides 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.



5.5.3. Test Result of Conducted Emission

<b>Test Mode</b>	CH 11 ( 2462MHz ) OFDM	<b>Tested By</b>	Wayne Hsu
<b>Temperature / Humidity</b>	25 deg. C / 62%		

**Line to Ground**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.166	42.89	-22.29	65.18	42.76	0.10	0.03	QP
2	0.166	25.36	-29.82	55.18	25.23	0.10	0.03	Average
3	0.216	35.12	-27.85	62.97	35.01	0.10	0.01	QP
4	0.216	22.06	-30.91	52.97	21.95	0.10	0.01	Average
5	0.303	27.29	-32.87	60.16	27.19	0.10	0.00	QP
6	0.303	14.46	-35.70	50.16	14.36	0.10	0.00	Average
7	2.885	32.14	-23.86	56.00	31.99	0.10	0.05	QP
8	2.885	23.29	-22.71	46.00	23.14	0.10	0.05	Average
9	4.750	31.88	-24.12	56.00	31.69	0.12	0.07	QP
10	4.750	25.81	-20.19	46.00	25.62	0.12	0.07	Average
11	16.400	30.36	-29.64	60.00	29.97	0.23	0.16	QP
12	16.400	24.89	-25.11	50.00	24.50	0.23	0.16	Average

**Neutral to Ground**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	52.97	-13.00	65.97	52.82	0.10	0.05	QP
2	0.150	51.61	-4.36	55.97	51.46	0.10	0.05	Average
3	2.030	32.43	-23.57	56.00	32.29	0.10	0.04	QP
4	2.030	24.29	-21.71	46.00	24.15	0.10	0.04	Average
5	3.160	31.18	-24.82	56.00	30.96	0.17	0.05	QP
6	3.160	23.57	-22.43	46.00	23.35	0.17	0.05	Average
7	4.700	32.36	-23.64	56.00	32.09	0.20	0.07	QP
8	4.700	26.04	-19.96	46.00	25.77	0.20	0.07	Average
9	15.890	29.93	-30.07	60.00	29.48	0.30	0.15	QP
10	15.890	25.05	-24.95	50.00	24.60	0.30	0.15	Average
11	18.140	29.55	-30.45	60.00	29.07	0.30	0.18	QP
12	18.140	24.83	-25.17	50.00	24.35	0.30	0.18	Average

#### 5.5.4. Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



SIDE VIEW





---

## 5.6. Test of Spurious Radiated Emission


### 5.6.1. Measuring Instruments

Please reference item 8~19 in chapter 6 for the instruments used for testing.

### 5.6.2. Test Procedures

- a) Configure the EUT according to ANSI C63.4.
- b) The EUT was placed on the top of the turn table 0.8 meter above ground.
- c) The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
- d) Power on the EUT and all the supporting units.
- e) The turn table was rotated by 360 degrees to determine the position of the highest radiation.
- f) The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
- g) For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- h) Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- i) For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 300Hz VBW for average reading in spectrum analyzer.
- j) If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
- k) For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.3. Test Setup Layout

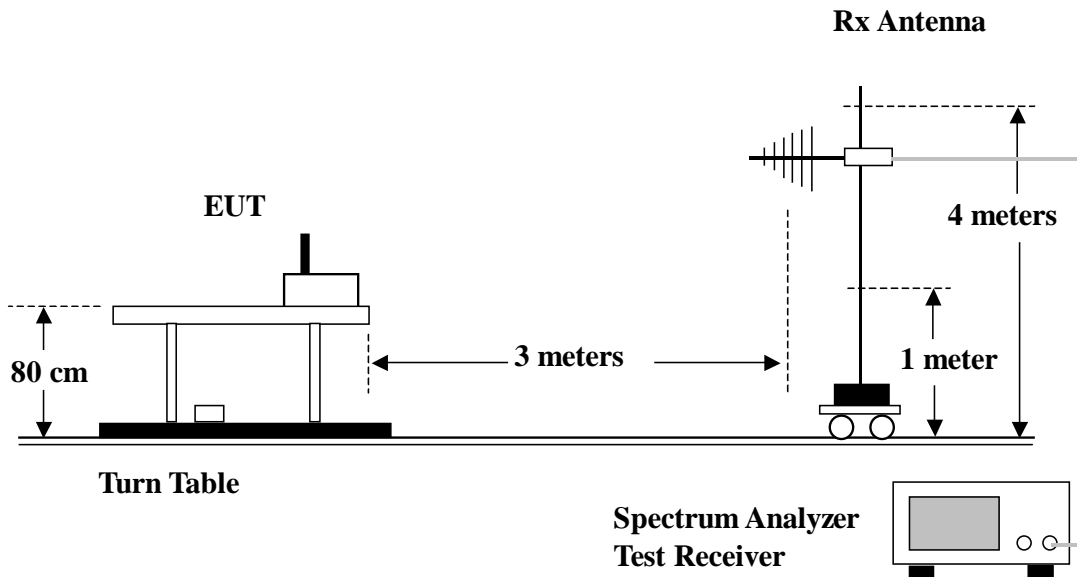



5.6.4. Test Results and Limit

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

<b>Test Mode</b>	CH 11 ( OFDM )	<b>Temperature</b>	26 deg. C	<b>Tested By</b>	Steve Chen
<b>Freq. Range</b>	30MHz~1GHz	<b>Humidity</b>	64%		

**(A) Polarization: Horizontal**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	138.460	33.36	-10.14	43.50	47.47	11.68	2.03	27.82	QP	---	---
2	142.030	32.61	-10.89	43.50	46.47	11.87	2.09	27.82	QP	---	---
3	196.940	30.23	-13.27	43.50	40.67	14.73	2.54	27.71	QP	---	---
1	343.200	35.84	-10.16	46.00	44.84	15.30	3.21	27.51	QP	---	---
2	397.600	36.99	-9.01	46.00	45.58	15.74	3.46	27.79	QP	---	---
3	490.400	35.58	-10.42	46.00	43.12	17.22	3.85	28.61	QP	---	---

**(B) Polarization: Vertical**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	76.580	30.63	-9.37	40.00	47.88	9.21	1.49	27.95	QP	---	---
2	89.500	28.76	-14.74	43.50	45.74	9.32	1.62	27.92	QP	---	---
3	114.830	36.85	-6.65	43.50	52.30	10.51	1.91	27.87	QP	100	105
1	217.600	33.20	-12.80	46.00	43.93	14.25	2.65	27.63	QP	---	---
2	364.800	24.44	-21.56	46.00	33.44	15.27	3.35	27.62	QP	---	---
3	396.800	33.17	-12.83	46.00	41.76	15.73	3.46	27.78	QP	---	---
4	787.200	34.77	-11.23	46.00	38.26	20.28	5.02	28.79	QP	---	---



Test Mode	CH 01 (CCK)	Temperature	26 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	64%		

**(A) Polarization: Horizontal**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1195.960	43.88	-30.12	74.00	58.37	24.60	1.22	40.31	Peak	---	---
2	1195.960	34.23	-19.77	54.00	48.72	24.60	1.22	40.31	Average	---	---
3	1324.300	41.40	-32.60	74.00	55.57	24.91	1.36	40.44	Peak	---	---
4	1324.300	31.09	-22.91	54.00	45.26	24.91	1.36	40.44	Average	---	---
5	1460.920	42.04	-31.96	74.00	55.91	25.24	1.46	40.57	Peak	---	---
6	1460.920	31.39	-22.61	54.00	45.26	25.24	1.46	40.57	Average	---	---
7	1589.260	42.43	-31.57	74.00	55.86	25.73	1.50	40.66	Peak	---	---
8	1589.260	31.76	-22.24	54.00	45.19	25.73	1.50	40.66	Average	---	---
9	1622.380	42.88	-31.12	74.00	56.17	25.87	1.52	40.68	Peak	---	---
10	1622.380	32.98	-21.02	54.00	46.27	25.87	1.52	40.68	Average	---	---
11	2317.900	53.21	-20.79	74.00	64.52	28.06	1.73	41.10	Peak	---	---
12	2317.900	42.88	-11.12	54.00	54.19	28.06	1.73	41.10	Average	---	---
1	2519.500	56.72	-17.28	74.00	67.56	28.50	1.86	41.20	Peak	---	---
2	2519.500	45.39	-8.61	54.00	56.23	28.50	1.86	41.20	Average	---	---
3	2609.500	53.65	-20.35	74.00	64.15	28.78	1.92	41.20	Peak	---	---
4	2609.500	45.91	-8.09	54.00	56.41	28.78	1.92	41.20	Average	100	216
5	2639.500	52.64	-21.36	74.00	63.01	28.88	1.95	41.20	Peak	---	---
6	2639.500	43.40	-10.60	54.00	53.77	28.88	1.95	41.20	Average	---	---

**(B) Polarization: Vertical**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1302.220	42.54	-31.46	74.00	56.73	24.86	1.36	40.41	Peak	---	---
2	1302.220	31.62	-22.38	54.00	45.81	24.86	1.36	40.41	Average	---	---
3	1324.300	43.32	-30.68	74.00	57.49	24.91	1.36	40.44	Peak	---	---
4	1324.300	33.68	-20.32	54.00	47.85	24.91	1.36	40.44	Average	---	---
5	1460.920	44.21	-29.79	74.00	58.08	25.24	1.46	40.57	Peak	---	---
6	1460.920	34.65	-19.35	54.00	48.52	25.24	1.46	40.57	Average	---	---
7	1594.780	46.31	-27.69	74.00	59.71	25.75	1.51	40.66	Peak	---	---
8	1594.780	36.14	-17.86	54.00	49.54	25.75	1.51	40.66	Average	---	---
9	1992.220	44.89	-29.11	74.00	56.89	27.39	1.51	40.90	Peak	---	---
10	1992.220	34.21	-19.79	54.00	46.21	27.39	1.51	40.90	Average	---	---
11	2367.580	54.02	-19.98	74.00	65.30	28.16	1.68	41.12	Peak	---	---
12	2367.580	44.12	-9.88	54.00	55.40	28.16	1.68	41.12	Average	---	---
1	2519.500	53.89	-20.11	74.00	64.73	28.50	1.86	41.20	Peak	---	---
2	2519.500	43.29	-10.71	54.00	54.13	28.50	1.86	41.20	Average	---	---





Test Mode	CH 06 (CCK)	Temperature	26 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	64%		

**(A) Polarization: Horizontal**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1190.440	43.66	-30.34	74.00	58.16	24.58	1.22	40.30	Peak	---	---
2	1190.440	33.45	-20.55	54.00	47.95	24.58	1.22	40.30	Average	---	---
3	1229.080	41.71	-32.29	74.00	56.09	24.68	1.28	40.34	Peak	---	---
4	1229.080	32.43	-21.57	54.00	46.81	24.68	1.28	40.34	Average	---	---
5	1324.300	41.53	-32.47	74.00	55.70	24.91	1.36	40.44	Peak	---	---
6	1324.300	31.06	-22.94	54.00	45.23	24.91	1.36	40.44	Average	---	---
7	1587.880	42.84	-31.16	74.00	56.28	25.72	1.50	40.66	Peak	---	---
8	1587.880	32.62	-21.38	54.00	46.06	25.72	1.50	40.66	Average	---	---
9	1621.000	42.92	-31.08	74.00	56.22	25.86	1.52	40.68	Peak	---	---
10	1621.000	32.94	-21.06	54.00	46.24	25.86	1.52	40.68	Average	---	---
11	2360.680	52.61	-21.39	74.00	63.91	28.14	1.68	41.12	Peak	---	---
12	2360.680	41.81	-12.19	54.00	53.11	28.14	1.68	41.12	Average	---	---
1	2503.500	55.61	-18.39	74.00	66.52	28.44	1.85	41.20	Peak	---	---
2	2503.500	45.91	-8.09	54.00	56.82	28.44	1.85	41.20	Average	100	239

**(B) Polarization: Vertical**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1324.300	43.82	-30.18	74.00	57.99	24.91	1.36	40.44	Peak	---	---
2	1324.300	42.60	-11.40	54.00	56.77	24.91	1.36	40.44	Average	---	---
3	1561.660	44.59	-29.41	74.00	58.13	25.61	1.49	40.64	Peak	---	---
4	1561.660	34.98	-19.02	54.00	48.52	25.61	1.49	40.64	Average	---	---
5	1594.780	47.04	-26.96	74.00	60.44	25.75	1.51	40.66	Peak	---	---
6	1594.780	37.25	-16.75	54.00	50.65	25.75	1.51	40.66	Average	---	---
7	1622.380	43.93	-30.07	74.00	57.22	25.87	1.52	40.68	Peak	---	---
8	1622.380	34.00	-20.00	54.00	47.29	25.87	1.52	40.68	Average	---	---
9	1753.480	43.93	-30.07	74.00	56.79	26.40	1.50	40.76	Peak	---	---
10	1753.480	33.39	-20.61	54.00	46.25	26.40	1.50	40.76	Average	---	---
11	2356.540	53.30	-20.70	74.00	64.61	28.13	1.68	41.12	Peak	---	---
12	2356.540	42.82	-11.18	54.00	54.13	28.13	1.68	41.12	Average	---	---
1	2519.000	52.73	-21.27	74.00	63.57	28.50	1.86	41.20	Peak	---	---
2	2519.000	42.40	-11.60	54.00	53.24	28.50	1.86	41.20	Average	---	---



Test Mode	CH 11 (CCK)	Temperature	26 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	64%		

**(A) Polarization: Horizontal**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1179.400	42.44	-31.56	74.00	56.95	24.56	1.22	40.29	Peak	---	---
2	1179.400	32.31	-21.69	54.00	46.82	24.56	1.22	40.29	Average	---	---
3	1191.820	44.36	-29.64	74.00	58.85	24.59	1.22	40.30	Peak	---	---
4	1191.820	34.43	-19.57	54.00	48.92	24.59	1.22	40.30	Average	---	---
5	1460.920	42.41	-31.59	74.00	56.28	25.24	1.46	40.57	Peak	---	---
6	1460.920	32.41	-21.59	54.00	46.28	25.24	1.46	40.57	Average	---	---
7	1589.260	42.16	-31.84	74.00	55.59	25.73	1.50	40.66	Peak	---	---
8	1589.260	32.34	-21.66	54.00	45.77	25.73	1.50	40.66	Average	---	---
9	1622.380	42.89	-31.11	74.00	56.18	25.87	1.52	40.68	Peak	---	---
10	1622.380	32.94	-21.06	54.00	46.23	25.87	1.52	40.68	Average	---	---
11	2290.300	53.01	-20.99	74.00	64.35	28.00	1.74	41.08	Peak	---	---
12	2290.300	42.83	-11.17	54.00	54.17	28.00	1.74	41.08	Average	---	---
1	2519.000	56.84	-17.16	74.00	67.68	28.50	1.86	41.20	Peak	---	---
2	2519.000	46.32	-7.68	54.00	57.16	28.50	1.86	41.20	Average	100	256

**(B) Polarization: Vertical**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1324.300	43.66	-30.34	74.00	57.83	24.91	1.36	40.44	Peak	---	---
2	1324.300	33.27	-20.73	54.00	47.44	24.91	1.36	40.44	Average	---	---
3	1423.660	43.03	-30.97	74.00	56.96	25.15	1.46	40.54	Peak	---	---
4	1423.660	32.63	-21.37	54.00	46.56	25.15	1.46	40.54	Average	---	---
5	1477.480	43.22	-30.78	74.00	57.07	25.28	1.46	40.59	Peak	---	---
6	1477.480	42.97	-11.03	54.00	56.82	25.28	1.46	40.59	Average	---	---
7	1589.260	46.19	-27.81	74.00	59.62	25.73	1.50	40.66	Peak	---	---
8	1589.260	35.73	-18.27	54.00	49.16	25.73	1.50	40.66	Average	---	---
9	1621.000	43.66	-30.34	74.00	56.96	25.86	1.52	40.68	Peak	---	---
10	1621.000	33.47	-20.53	54.00	46.77	25.86	1.52	40.68	Average	---	---
11	2360.680	43.93	-10.07	54.00	55.23	28.14	1.68	41.12	Average	---	---
12	2360.680	53.84	-20.16	74.00	65.14	28.14	1.68	41.12	Peak	---	---
1	2503.500	53.68	-20.32	74.00	64.59	28.44	1.85	41.20	Peak	---	---
2	2503.500	43.21	-10.79	54.00	54.12	28.44	1.85	41.20	Average	---	---



Test Mode	CH 01 (OFDM)	Temperature	26 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	64%		

**(A) Polarization: Horizontal**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1179.400	43.60	-30.40	74.00	58.11	24.56	1.22	40.29	Peak	---	---
2	1179.400	33.73	-20.27	54.00	48.24	24.56	1.22	40.29	Average	---	---
3	1191.820	43.69	-30.31	74.00	58.18	24.59	1.22	40.30	Peak	---	---
4	1191.820	34.13	-19.87	54.00	48.62	24.59	1.22	40.30	Average	---	---
5	1423.660	42.37	-31.63	74.00	56.30	25.15	1.46	40.54	Peak	---	---
6	1423.660	32.30	-21.70	54.00	46.23	25.15	1.46	40.54	Average	---	---
7	1462.300	42.14	-31.86	74.00	56.01	25.24	1.46	40.57	Peak	---	---
8	1462.300	32.42	-21.58	54.00	46.29	25.24	1.46	40.57	Average	---	---
9	2272.360	52.86	-21.14	74.00	64.24	27.96	1.73	41.07	Peak	---	---
10	2272.360	42.92	-11.08	54.00	54.30	27.96	1.73	41.07	Average	---	---
11	2322.040	53.06	-20.94	74.00	64.37	28.06	1.73	41.10	Peak	---	---
12	2322.040	43.64	-10.36	54.00	54.95	28.06	1.73	41.10	Average	---	---
1	2519.500	55.73	-18.27	74.00	66.57	28.50	1.86	41.20	Peak	---	---
2	2519.500	45.58	-8.42	54.00	56.42	28.50	1.86	41.20	Average	---	---
3	2599.500	53.62	-20.38	74.00	64.15	28.75	1.92	41.20	Peak	---	---
4	2599.500	43.74	-10.26	54.00	54.27	28.75	1.92	41.20	Average	---	---
5	2639.500	51.37	-22.63	74.00	61.74	28.88	1.95	41.20	Peak	---	---
6	2639.500	40.89	-13.11	54.00	51.26	28.88	1.95	41.20	Average	---	---

**(B) Polarization: Vertical**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1322.920	43.62	-30.38	74.00	57.78	24.91	1.36	40.43	Peak	---	---
2	1322.920	33.29	-20.71	54.00	47.45	24.91	1.36	40.43	Average	---	---
3	1560.280	43.46	-30.54	74.00	57.01	25.61	1.48	40.64	Peak	---	---
4	1560.280	34.30	-19.70	54.00	47.85	25.61	1.48	40.64	Average	---	---
5	1594.780	46.44	-27.56	74.00	59.84	25.75	1.51	40.66	Peak	---	---
6	1594.780	46.31	-7.69	54.00	59.71	25.75	1.51	40.66	Average	100	206
7	1692.760	43.91	-30.09	74.00	56.94	26.16	1.53	40.72	Peak	---	---
8	1692.760	33.21	-20.79	54.00	46.24	26.16	1.53	40.72	Average	---	---
9	1754.860	43.57	-30.43	74.00	56.42	26.41	1.50	40.76	Peak	---	---
10	1754.860	33.40	-20.60	54.00	46.25	26.41	1.50	40.76	Average	---	---
11	2373.100	54.09	-19.91	74.00	65.37	28.16	1.68	41.12	Peak	---	---
12	2373.100	44.03	-9.97	54.00	55.31	28.16	1.68	41.12	Average	---	---
1	2519.500	50.90	-23.10	74.00	61.74	28.50	1.86	41.20	Peak	---	---
2	2519.500	40.58	-13.42	54.00	51.42	28.50	1.86	41.20	Average	---	---



Test Mode	CH 06 (OFDM)	Temperature	26 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	64%		

**(A) Polarization: Horizontal**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1059.340	41.27	-32.73	74.00	55.99	24.26	1.19	40.17	Peak	---	---
2	1059.340	31.03	-22.97	54.00	45.75	24.26	1.19	40.17	Average	---	---
3	1080.040	41.01	-32.99	74.00	55.68	24.31	1.21	40.19	Peak	---	---
4	1080.040	30.85	-23.15	54.00	45.52	24.31	1.21	40.19	Average	---	---
5	1179.400	42.55	-31.45	74.00	57.06	24.56	1.22	40.29	Peak	---	---
6	1179.400	33.07	-20.93	54.00	47.58	24.56	1.22	40.29	Average	---	---
7	1195.960	45.09	-28.91	74.00	59.58	24.60	1.22	40.31	Peak	---	---
8	1195.960	35.26	-18.74	54.00	49.75	24.60	1.22	40.31	Average	---	---
9	1523.020	42.53	-31.47	74.00	56.23	25.46	1.46	40.62	Peak	---	---
10	1523.020	32.52	-21.48	54.00	46.22	25.46	1.46	40.62	Average	---	---
11	2273.740	53.11	-20.89	74.00	64.49	27.96	1.73	41.07	Peak	---	---
1	2507.000	57.78	-16.22	74.00	68.66	28.46	1.86	41.20	Peak	---	---
2	2507.000	48.04	-5.96	54.00	58.92	28.46	1.86	41.20	Average	100	205
3	2619.500	55.14	-18.86	74.00	65.60	28.81	1.93	41.20	Peak	---	---
4	2619.500	44.77	-9.23	54.00	55.23	28.81	1.93	41.20	Average	---	---

**(B) Polarization: Vertical**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1324.300	42.76	-31.24	74.00	56.93	24.91	1.36	40.44	Peak	---	---
2	1324.300	32.65	-21.35	54.00	46.82	24.91	1.36	40.44	Average	---	---
3	1462.300	44.55	-29.45	74.00	58.42	25.24	1.46	40.57	Peak	---	---
4	1462.300	34.65	-19.35	54.00	48.52	25.24	1.46	40.57	Average	---	---
5	1594.780	45.88	-28.12	74.00	59.28	25.75	1.51	40.66	Peak	---	---
6	1594.780	36.37	-17.63	54.00	49.77	25.75	1.51	40.66	Average	---	---
7	1621.000	43.99	-30.01	74.00	57.29	25.86	1.52	40.68	Peak	---	---
8	1621.000	33.94	-20.06	54.00	47.24	25.86	1.52	40.68	Average	---	---
9	1775.560	43.30	-30.70	74.00	56.03	26.50	1.54	40.77	Peak	---	---
10	1775.560	34.13	-19.87	54.00	46.86	26.50	1.54	40.77	Average	---	---
11	2351.020	52.54	-21.46	74.00	63.86	28.12	1.68	41.12	Peak	---	---
12	2351.020	42.16	-11.84	54.00	53.48	28.12	1.68	41.12	Average	---	---
1	2507.000	53.61	-20.39	74.00	64.49	28.46	1.86	41.20	Peak	---	---
2	2507.000	43.31	-10.69	54.00	54.19	28.46	1.86	41.20	Average	---	---
3	2615.500	50.06	-23.94	74.00	60.53	28.80	1.93	41.20	Peak	---	---
4	2615.500	39.69	-14.31	54.00	50.16	28.80	1.93	41.20	Average	---	---



Test Mode	CH 11 (OFDM)	Temperature	26 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	64%		

**(A) Polarization: Horizontal**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1129.720	41.20	-32.80	74.00	55.78	24.43	1.23	40.24	Peak	---	---
2	1129.720	31.08	-22.92	54.00	45.66	24.43	1.23	40.24	Average	---	---
3	1179.400	42.51	-31.49	74.00	57.02	24.56	1.22	40.29	Peak	---	---
4	1179.400	31.71	-22.29	54.00	46.22	24.56	1.22	40.29	Average	---	---
5	1191.820	42.96	-31.04	74.00	57.45	24.59	1.22	40.30	Peak	---	---
6	1191.820	32.39	-21.61	54.00	46.88	24.59	1.22	40.30	Average	---	---
7	1462.300	42.65	-31.35	74.00	56.52	25.24	1.46	40.57	Peak	---	---
8	1462.300	32.40	-21.60	54.00	46.27	25.24	1.46	40.57	Average	---	---
9	1523.020	42.55	-31.45	74.00	56.25	25.46	1.46	40.62	Peak	---	---
10	1523.020	32.90	-21.10	54.00	46.60	25.46	1.46	40.62	Average	---	---
11	2333.080	53.24	-20.76	74.00	64.56	28.08	1.71	41.11	Peak	---	---
12	2333.080	43.04	-10.96	54.00	54.36	28.08	1.71	41.11	Average	---	---
1	2507.500	58.42	-15.58	74.00	69.30	28.46	1.86	41.20	Peak	---	---
2	2507.500	48.74	-5.26	54.00	59.62	28.46	1.86	41.20	Average	100	215
3	2617.000	55.79	-18.21	74.00	66.25	28.81	1.93	41.20	Peak	---	---
4	2617.000	45.75	-8.25	54.00	56.21	28.81	1.93	41.20	Average	---	---


**(B) Polarization: Vertical**

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1195.960	41.74	-32.26	74.00	56.23	24.60	1.22	40.31	Peak	---	---
2	1195.960	31.72	-22.28	54.00	46.21	24.60	1.22	40.31	Average	---	---
3	1324.300	43.99	-30.01	74.00	58.16	24.91	1.36	40.44	Peak	---	---
4	1324.300	34.58	-19.42	54.00	48.75	24.91	1.36	40.44	Average	---	---
5	1589.260	46.39	-27.61	74.00	59.82	25.73	1.50	40.66	Peak	---	---
6	1589.260	36.33	-17.67	54.00	49.76	25.73	1.50	40.66	Average	---	---
7	1622.380	43.42	-30.58	74.00	56.71	25.87	1.52	40.68	Peak	---	---
8	1622.380	33.00	-21.00	54.00	46.29	25.87	1.52	40.68	Average	---	---
9	1698.280	43.95	-30.05	74.00	56.99	26.18	1.51	40.73	Peak	---	---
10	1698.280	33.78	-20.22	54.00	46.82	26.18	1.51	40.73	Average	---	---
11	2345.500	52.91	-21.09	74.00	64.23	28.11	1.68	41.11	Peak	---	---
12	2345.500	42.95	-11.05	54.00	54.27	28.11	1.68	41.11	Average	---	---
1	2507.500	58.42	-15.58	74.00	69.30	28.46	1.86	41.20	Peak	---	---
2	2507.500	48.74	-5.26	54.00	59.62	28.46	1.86	41.20	Average	100	215
3	2617.000	55.79	-18.21	74.00	66.25	28.81	1.93	41.20	Peak	---	---
4	2617.000	45.75	-8.25	54.00	56.21	28.81	1.93	41.20	Average	---	---


5.6.5. Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW

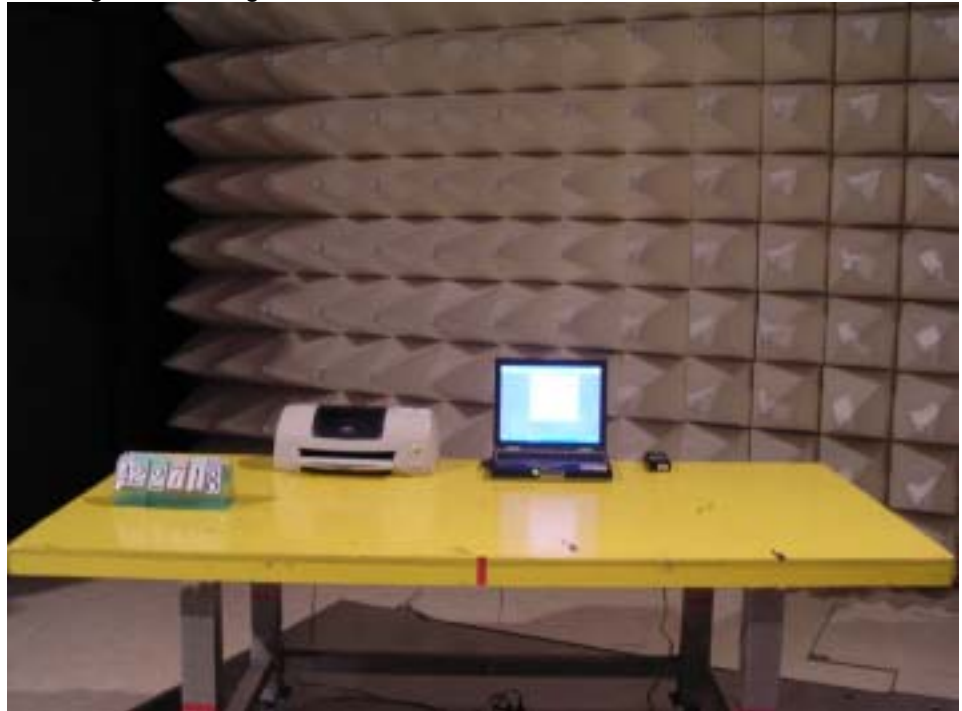

REAR VIEW

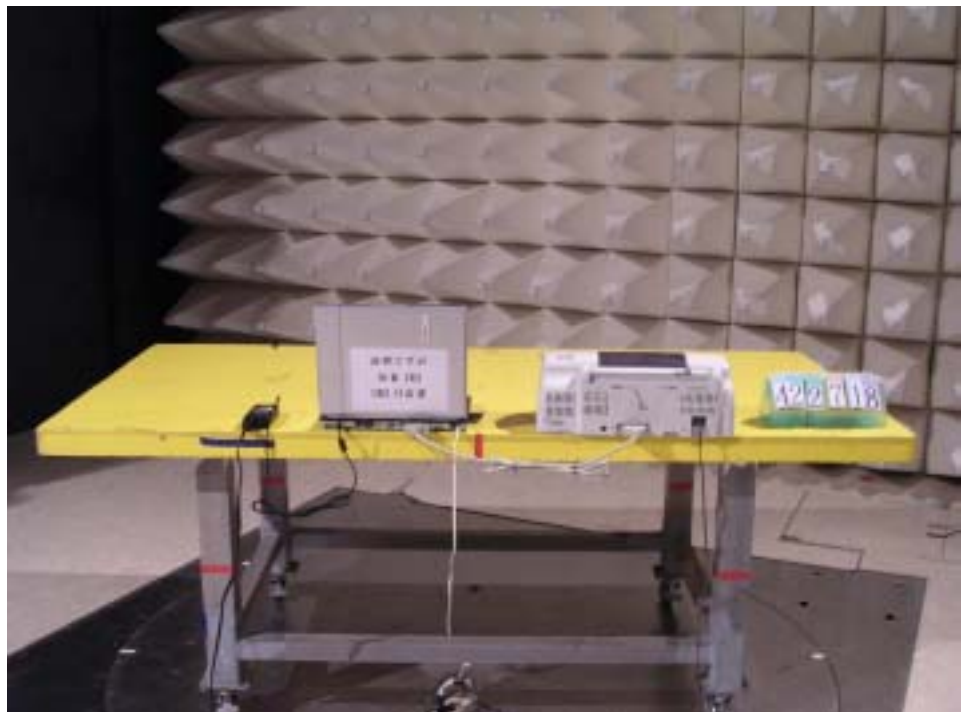



---

## 5.7. Antenna Requirements

### 5.7.1. Standard Applicable

47 CFR Part15 Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

47 CFR Part15 Section 15.247 (b):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### 5.7.2. Antenna Connected Construction

The maximum Gain antenna used in this product is integral antenna, no antenna connected is used.



## 6. List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 12, 2003	Conduction (CO01-HY)
2	LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
3	LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
4	EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
5	EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
6	RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Jan. 07, 2003	Conduction (CO01-HY)
7	50 ohm BNC type Terminal	NOBLE	50ohm	TM009	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)
8	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
9	Spectrum analyzer	R&S	FSP40	100004	9KHz~40GHz	Aug. 07, 2003	Radiation (03CH03-HY)
10	Receiver	SCHAFFNER	SCR 3501	417	9 KHz –1GHz	Feb. 20, 2003	Radiation (03CH03-HY)
11	Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 05, 2003	Radiation (03CH03-HY)
12	Bilog Antenna	SCHAFFNER	CBL6112B	2687	30MHz –2GHz	Dec. 21, 2002	Radiation (03CH03-HY)
13	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Jan. 02, 2003	Radiation (03CH03-HY)
14	Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Jul. 23, 2003	Radiation (03CH03-HY)
15	Horn Antenna	COM-POWER	AH-118	10094	1GHz – 18GHz	Apr. 10, 2003	Radiation (03CH03-HY)
16	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
17	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
18	Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
19	RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation (03CH03-HY)

Calibration Interval of instruments listed above is one year.





Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
20	Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
21	Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
22	Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
23	AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
24	Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2003	Conducted
25	Oscilloscope	Tektronix	TDS1012	C038520	100MHz 2Ch.	Jan. 28, 2004	Conducted
26	DC Detector	Narda	FSCM99899	4503A	0.1MHZ~18GHz	Jan. 25, 2004	Conducted
27	Signal Generator	R&S	SMR40	837900/23	1GHz~40GHz	Nov. 06, 2003	Conducted

Calibration Interval of instruments listed above is one year.