



Product : 802.11 a/b/g/n module
 Test Item : Peak Power Spectral Density
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
38	5190	-5.448	<4	Pass
46	5230	-1.803	<4	Pass
54	5270	1.375	<11	Pass
62	5310	-4.673	<11	Pass
102	5510	-5.379	<11	Pass
118	5590	2.846	<11	Pass
134	5670	4.502	<11	Pass


Channel 38:

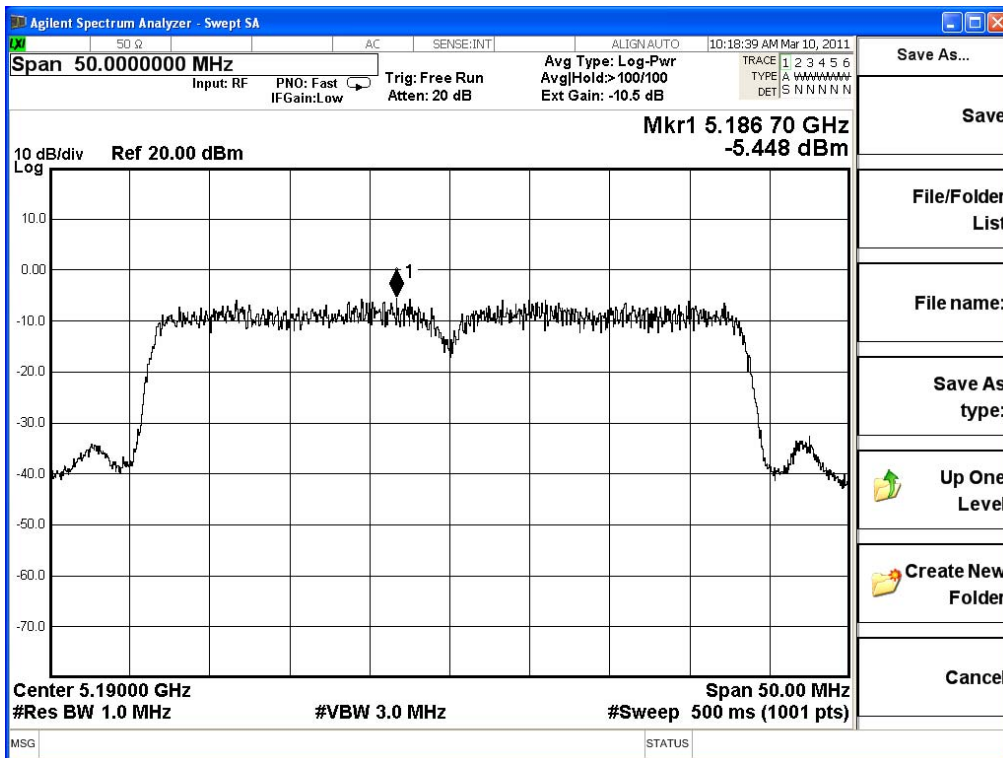


Channel 46:

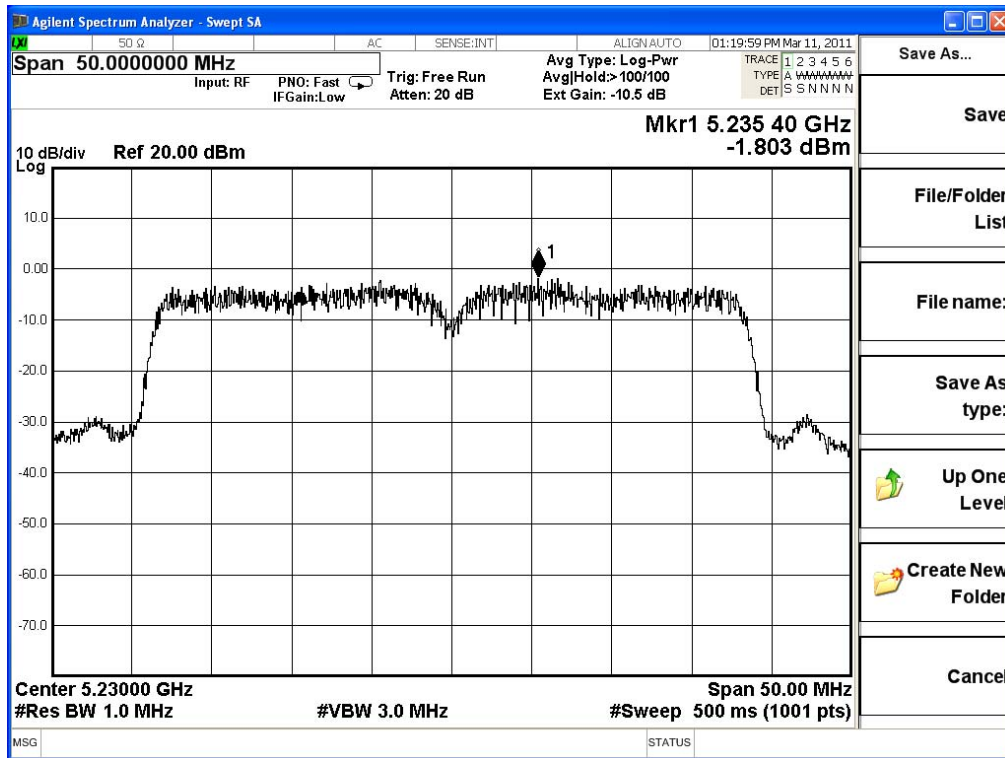


Channel 54:

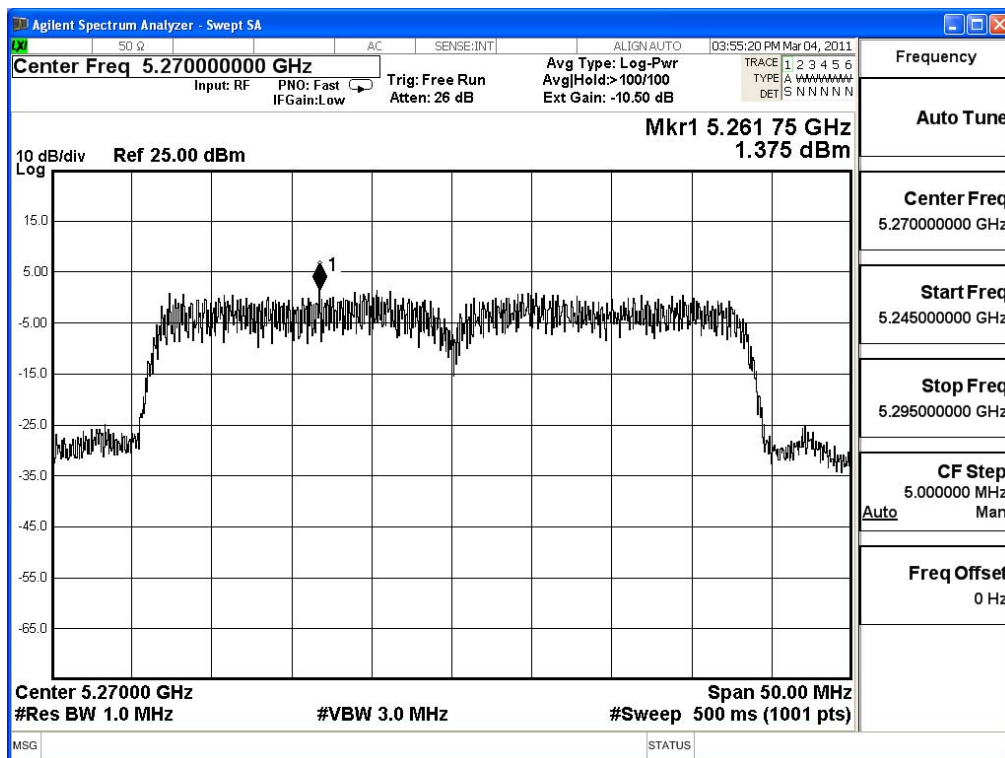


Channel 62:

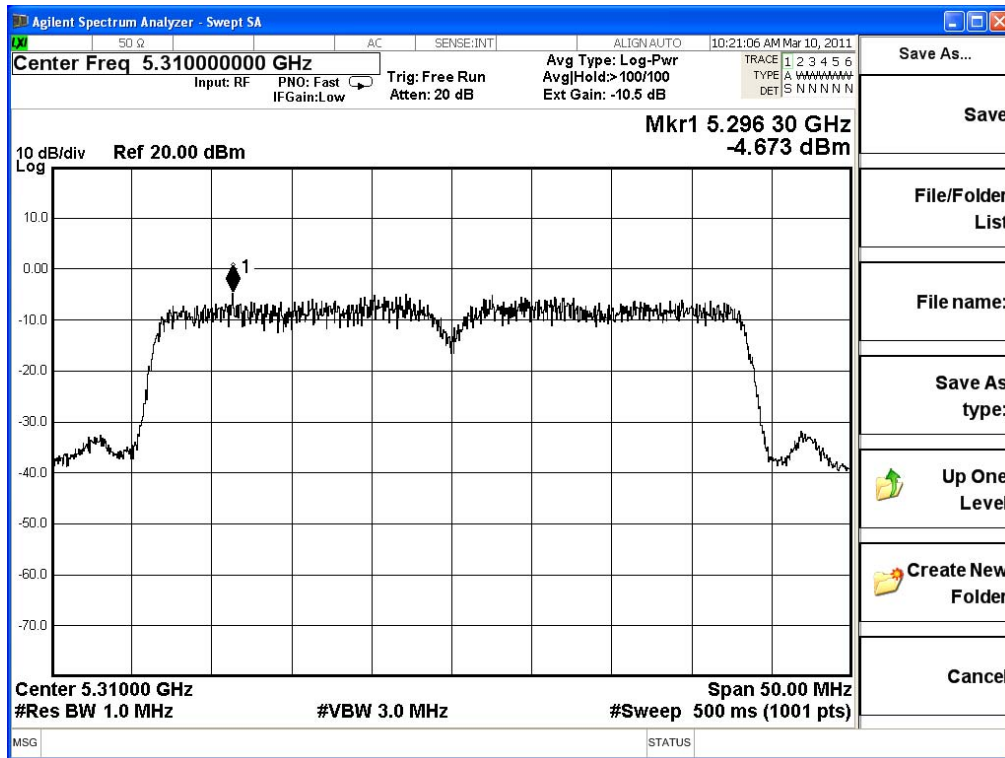


Channel 102:

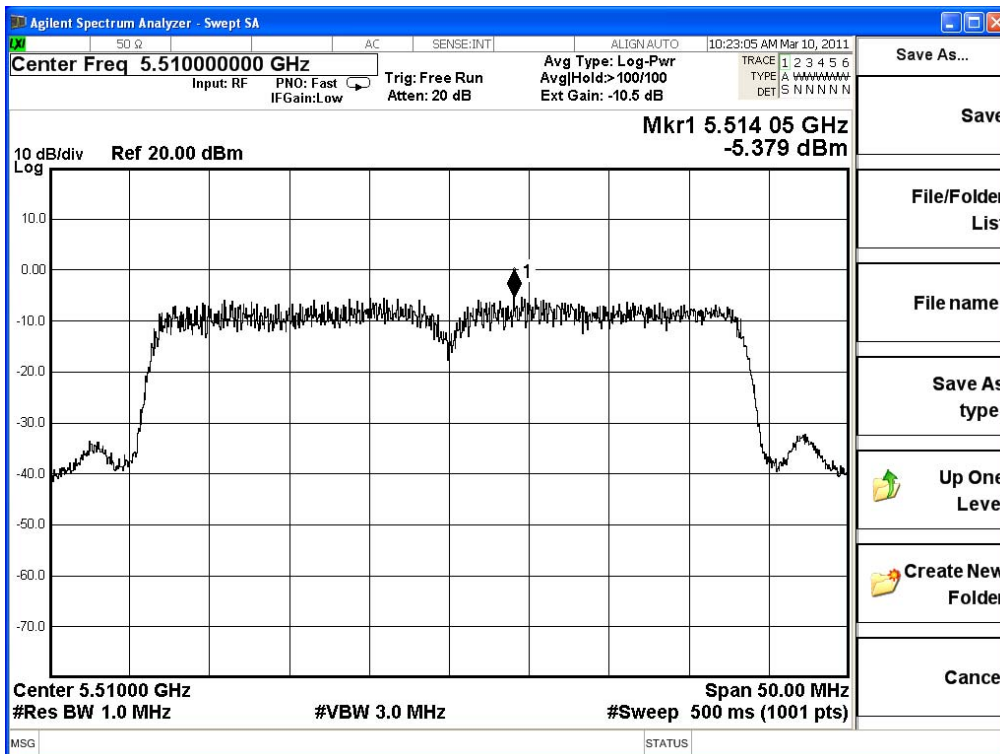

Channel 118:

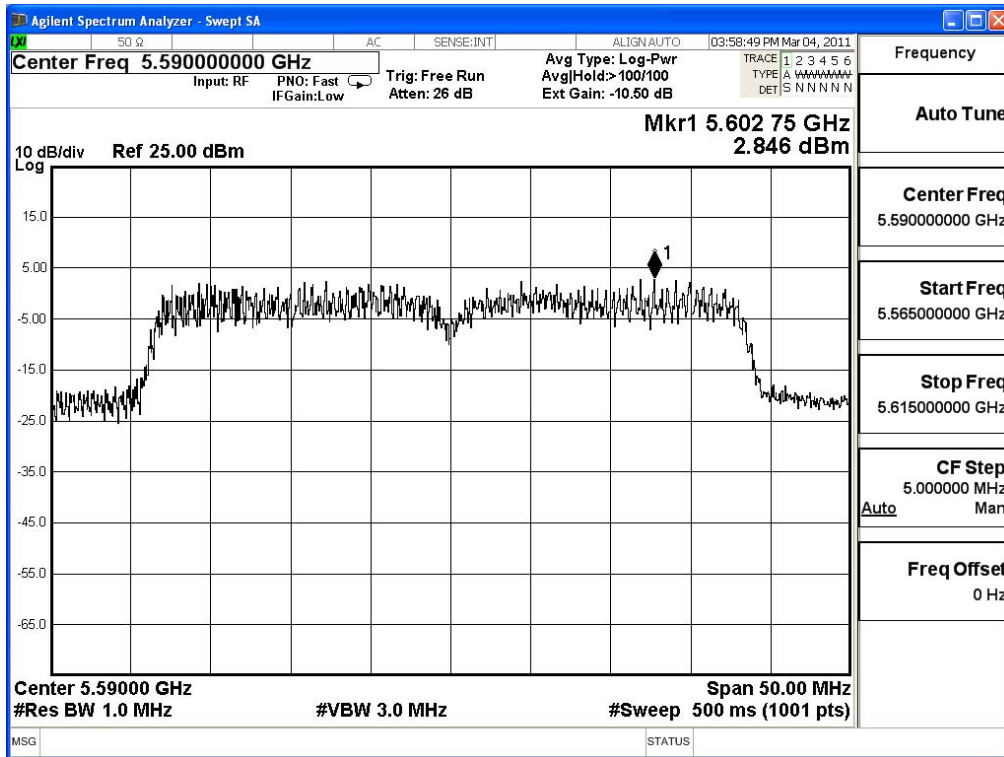

Channel 134:

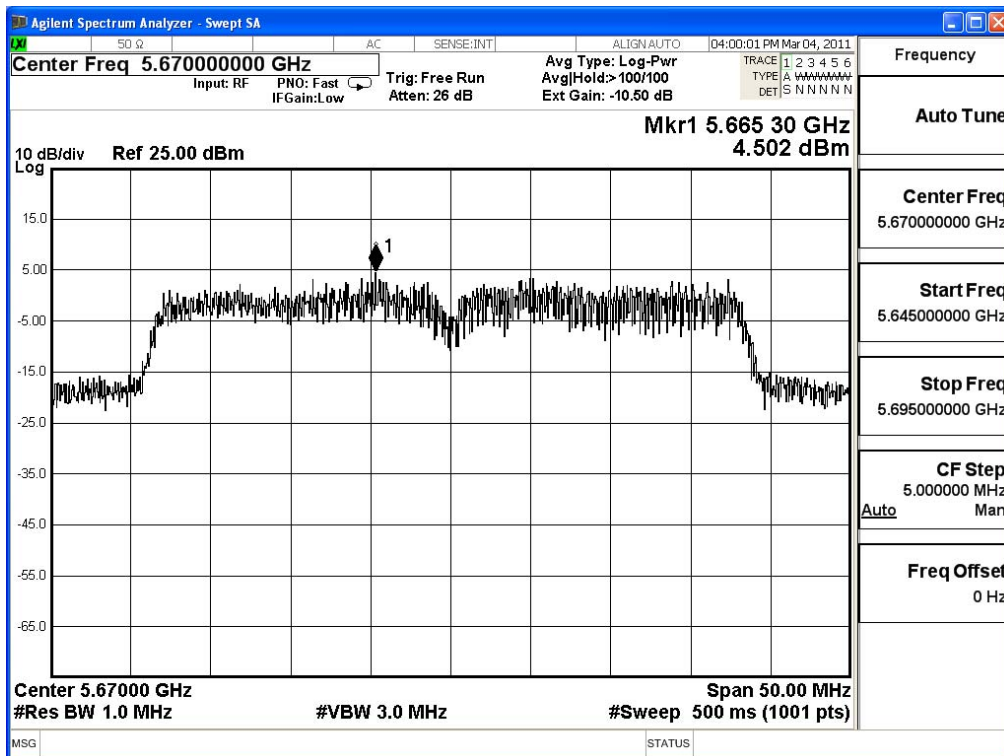

5. Peak Excursion

5.1. Test Equipment


	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2010
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2010
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2010
X	8-WAY Power Divider	JFW	50PD-647 / 526770 0916	Apr., 2010

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.
3. The power combiner is used for measure 11n mode.

5.2. Test Setup

Conduction Power Measurement

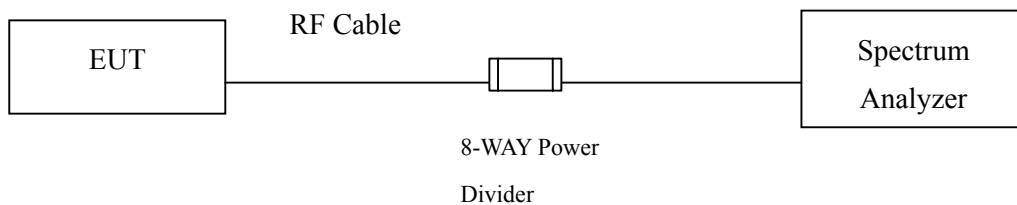

5.3. Limits

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

5.4. Test Procedure

The EUT was setup to ANSI C63.4: 2009; tested to DTS test procedure of Aug 2002 DA 02-2138 for compliance to FCC 47CFR Subpart E requirements.

5.5. Uncertainty


± 1.27 dB

5.6. Test Result of Peak Excursion


Product : 802.11 a/b/g/n module
 Test Item : Peak Excursion
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)

Channel No.	Frequency (MHz)	Measurement Level (dB)	Required Limit (dB)	Result
36	5180	8.261	<13	Pass
44	5220	7.463	<13	Pass
48	5240	6.491	<13	Pass
52	5260	7.111	<13	Pass
60	5300	7.897	<13	Pass
64	5320	5.624	<13	Pass
100	5500	7.108	<13	Pass
120	5600	7.005	<13	Pass
140	5700	7.487	<13	Pass


Channel 36:

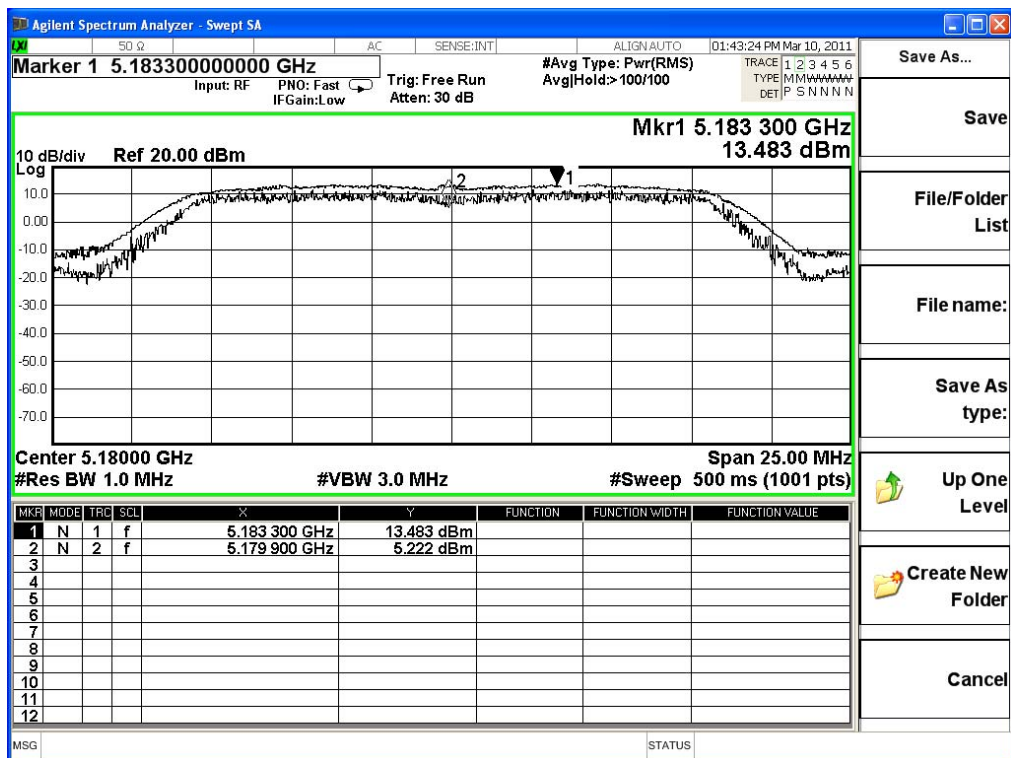


Channel 44:

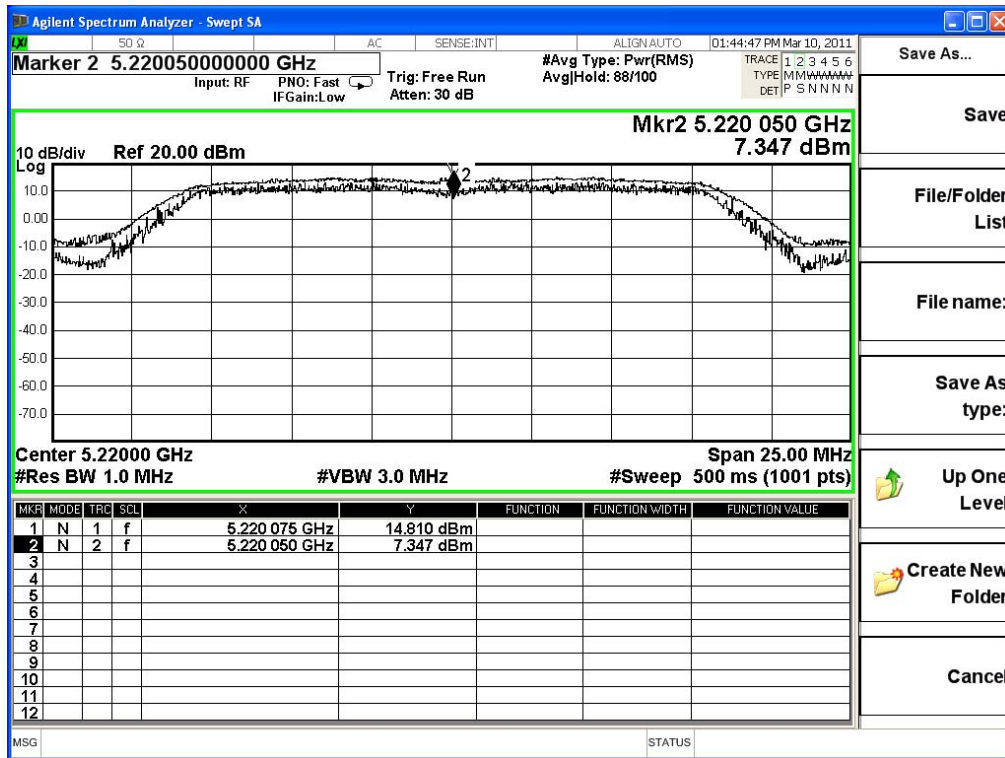


Channel 48:

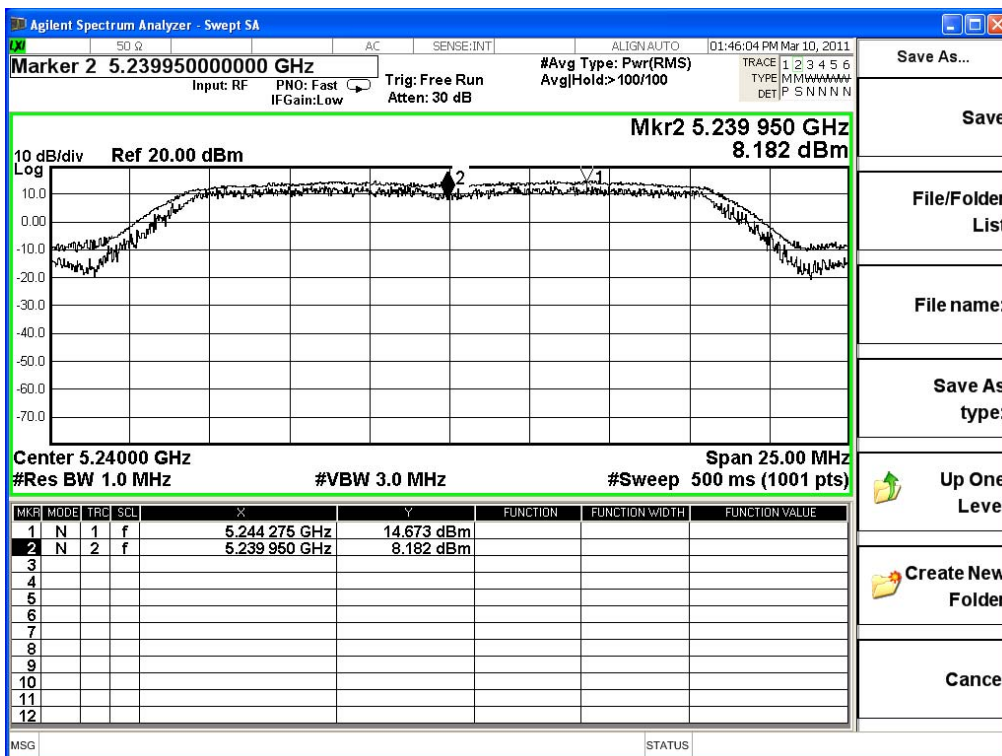


Channel 52:

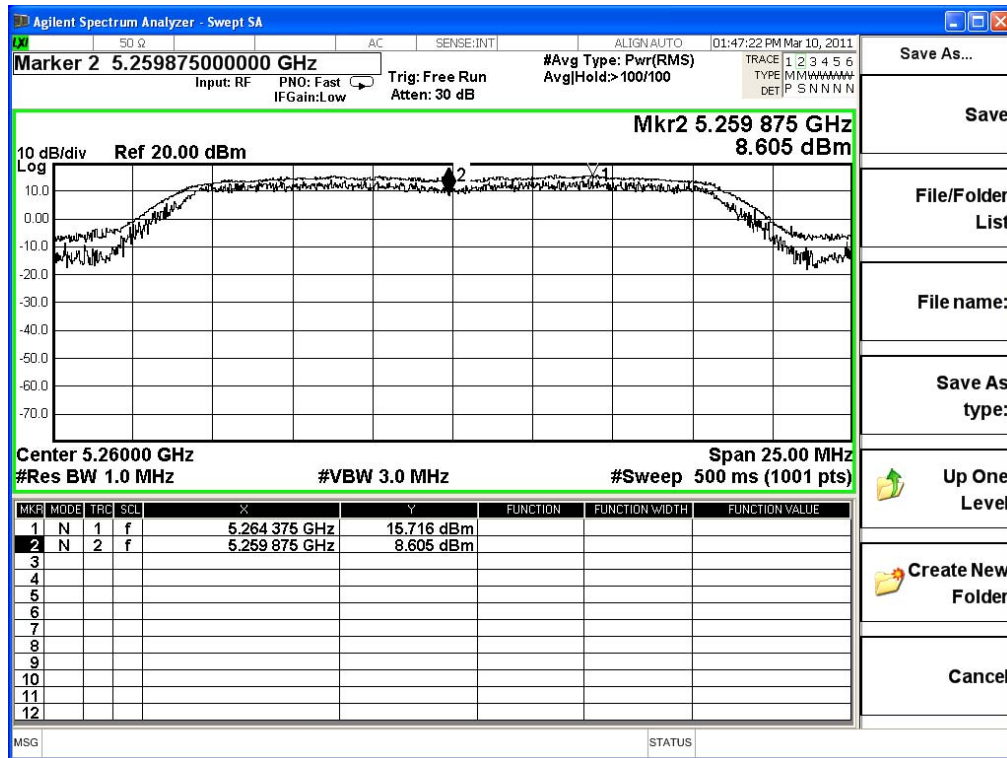


Channel 60:

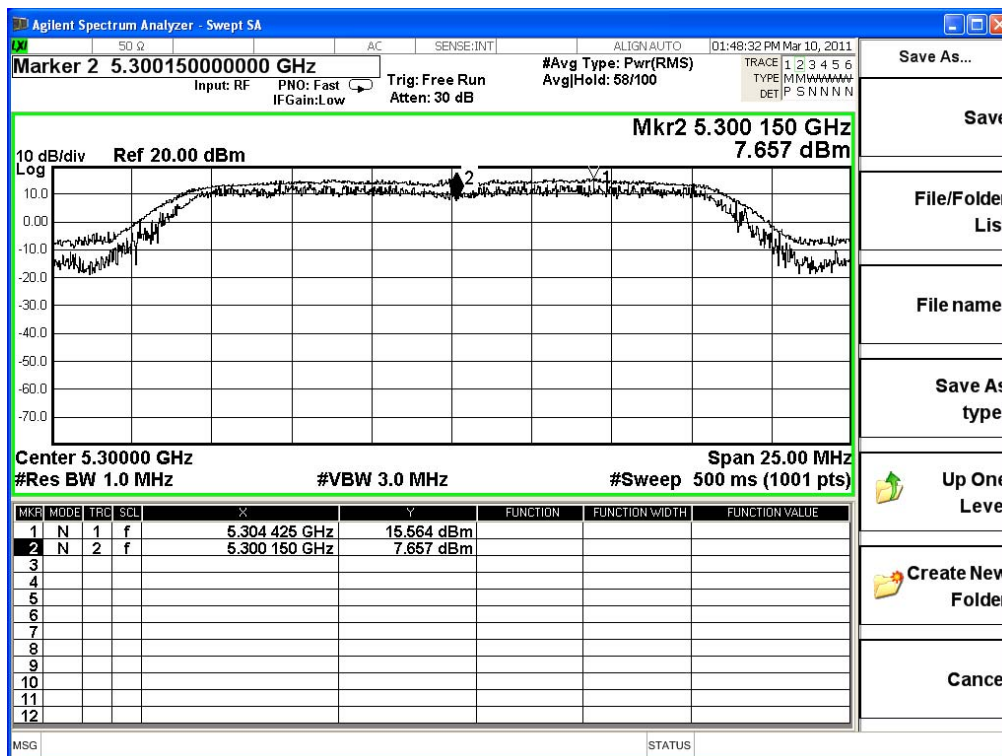


Channel 64:

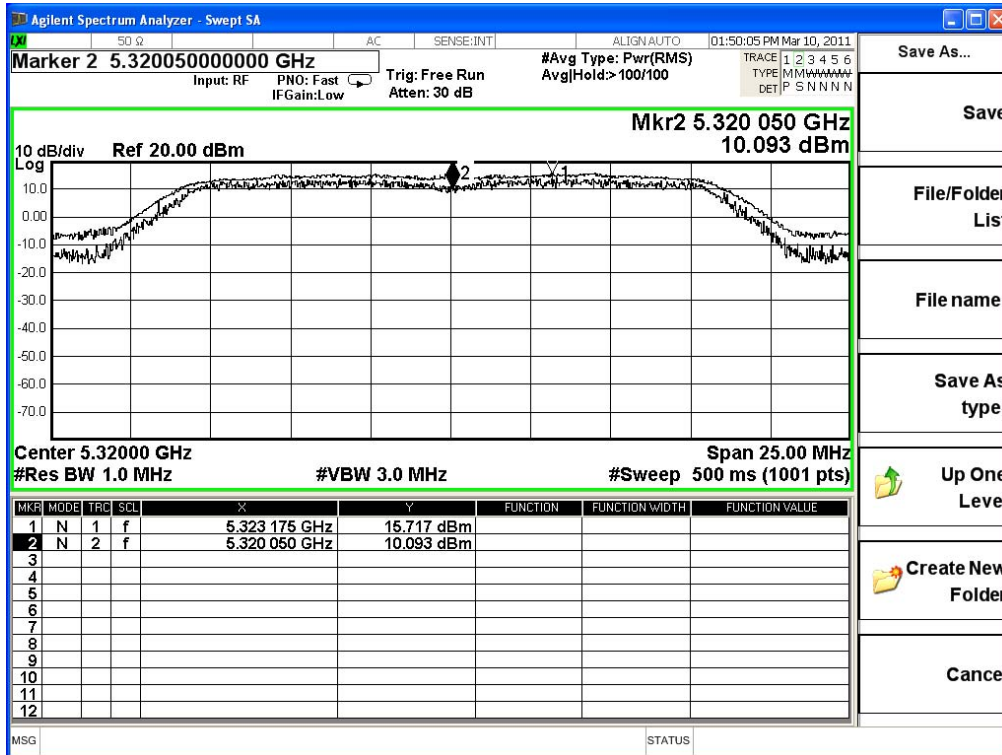


Channel 100:

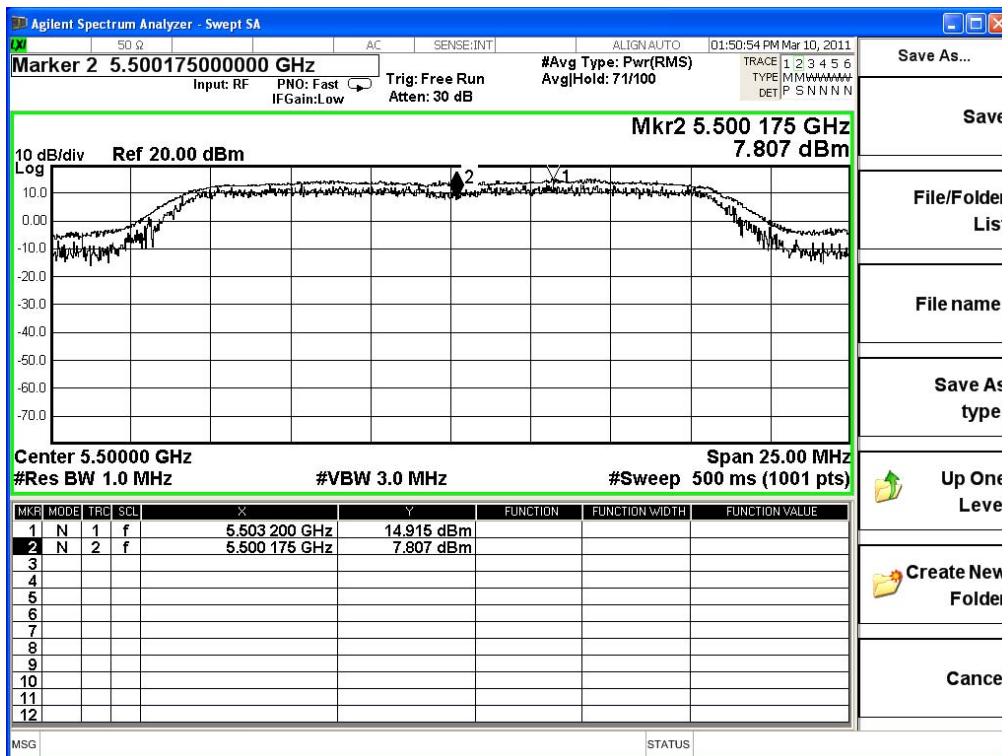

Channel 120:

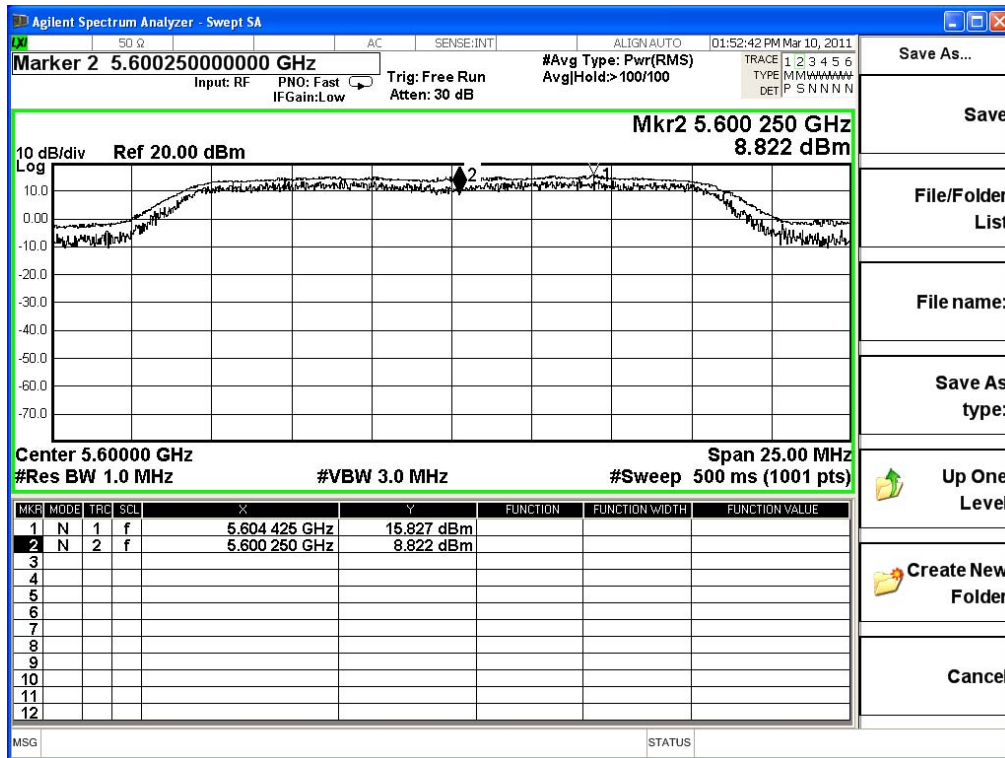


Channel 140:

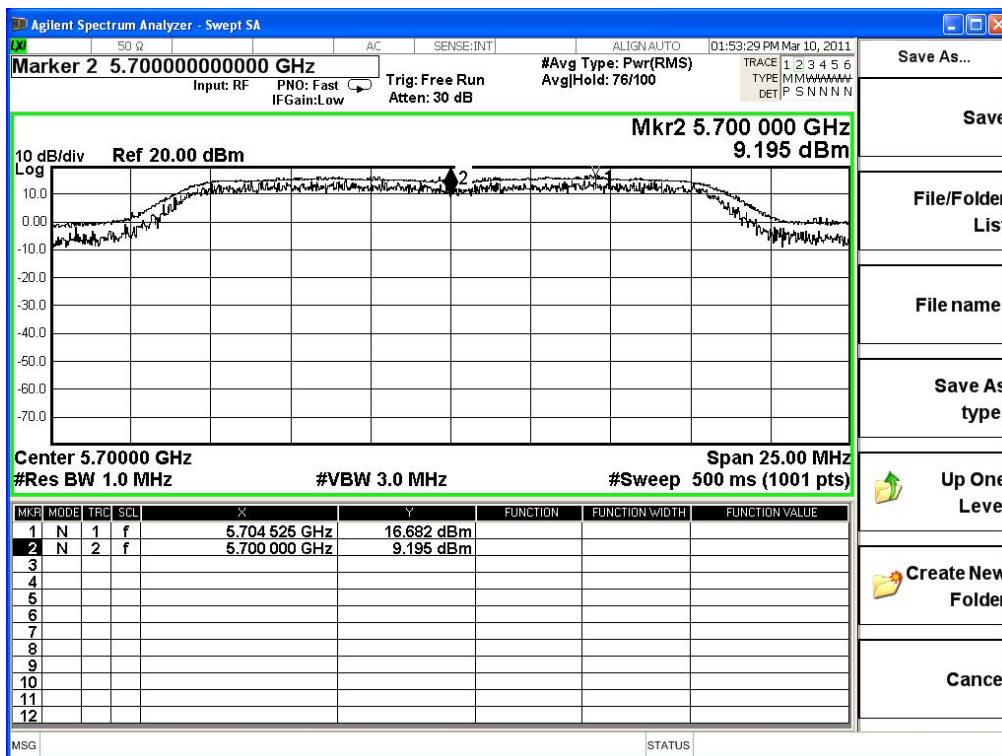


Product : 802.11 a/b/g/n module
 Test Item : Peak Excursion
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps)

Channel No.	Frequency (MHz)	Measurement Level (dB)	Required Limit (dB)	Result
36	5180	8.388	<13	Pass
44	5220	5.687	<13	Pass
48	5240	8.047	<13	Pass
52	5260	8.988	<13	Pass
60	5300	7.212	<13	Pass
64	5320	8.274	<13	Pass
100	5500	8.218	<13	Pass
120	5600	8.964	<13	Pass
140	5700	7.078	<13	Pass


Channel 36:

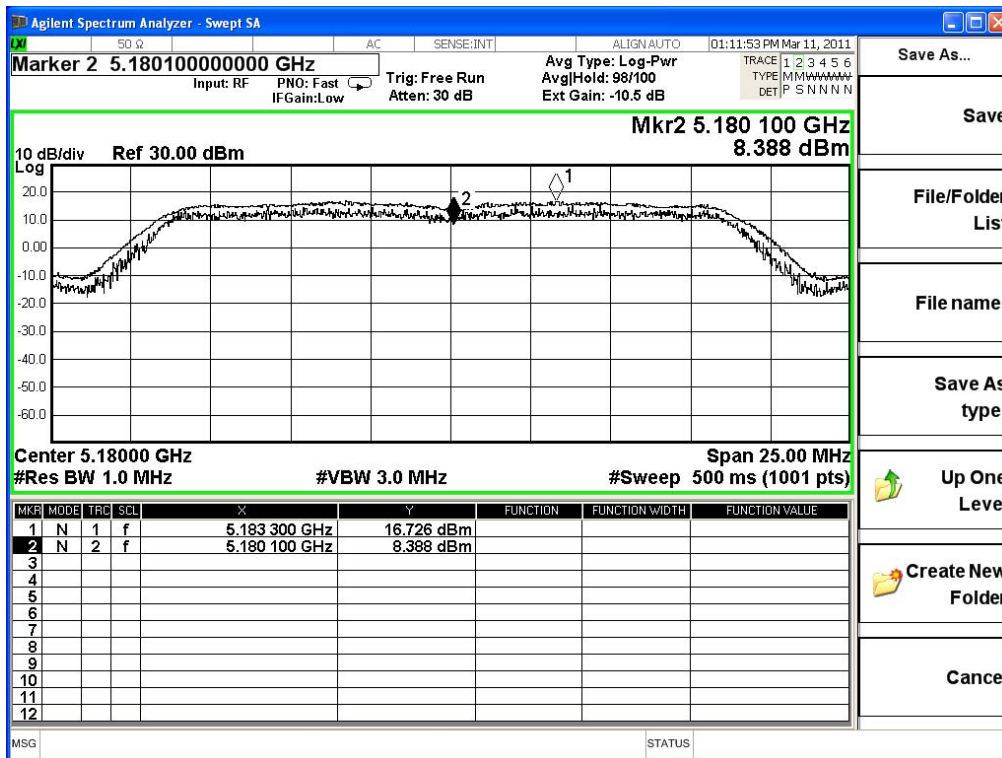


Channel 44:

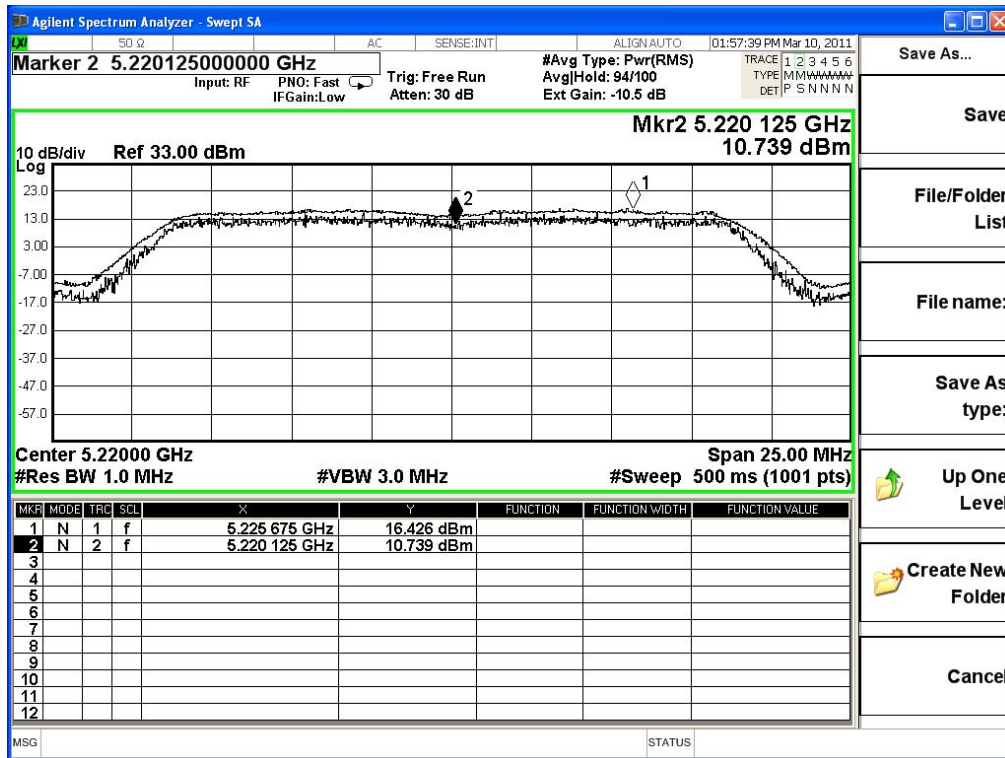


Channel 48:

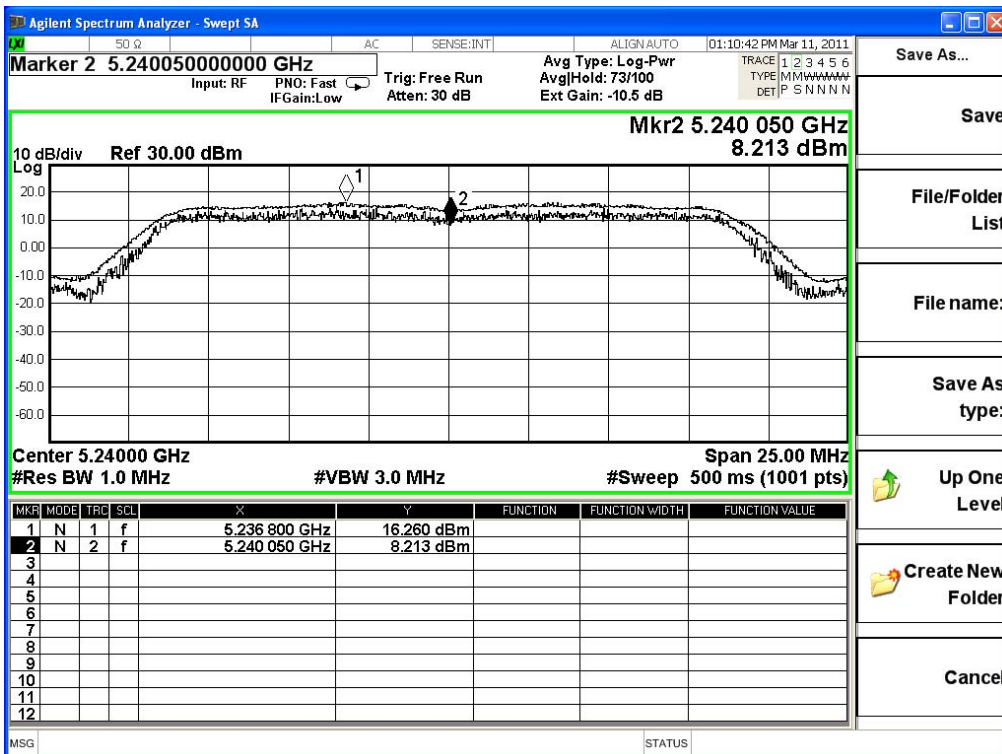


Channel 52:

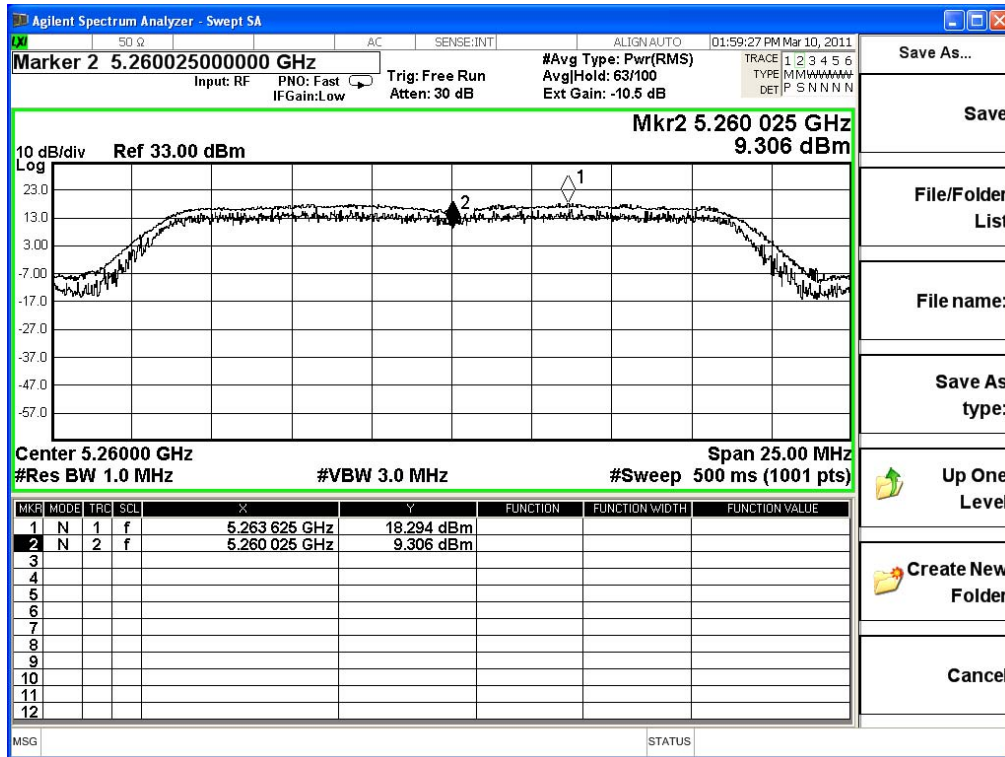


Channel 60:

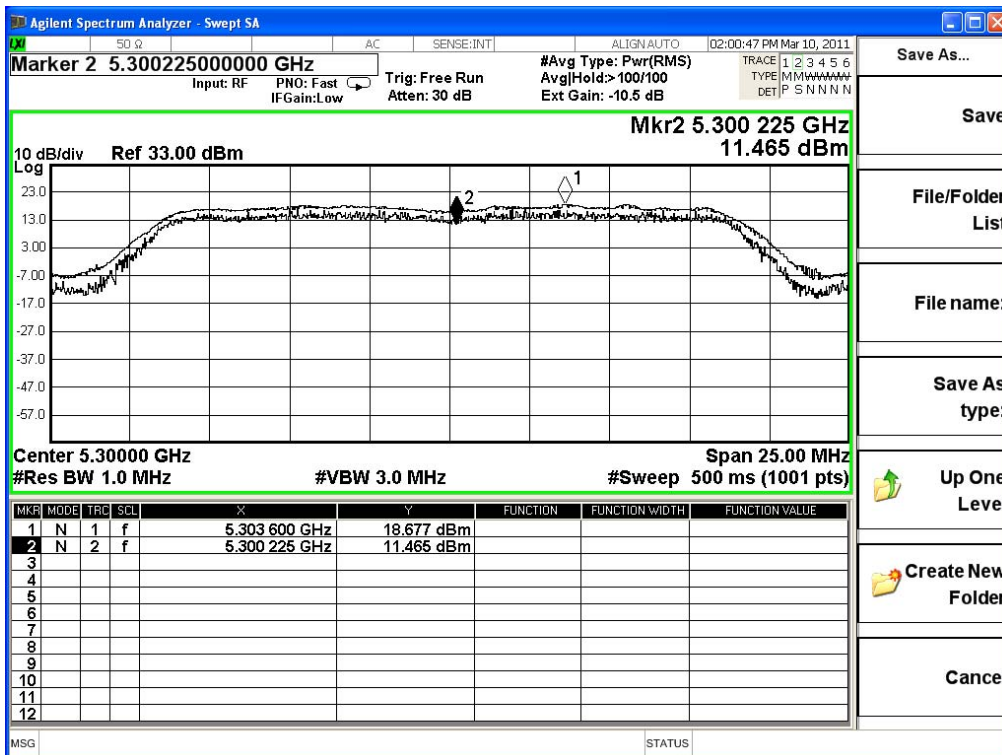


Channel 64:

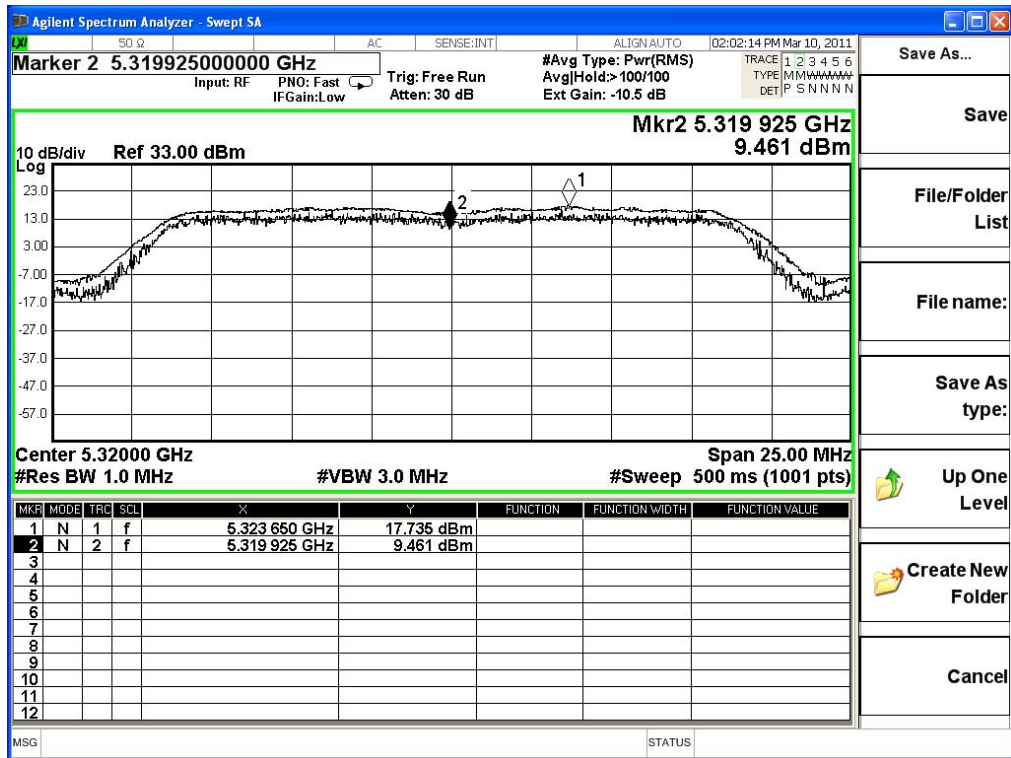


Channel 100:

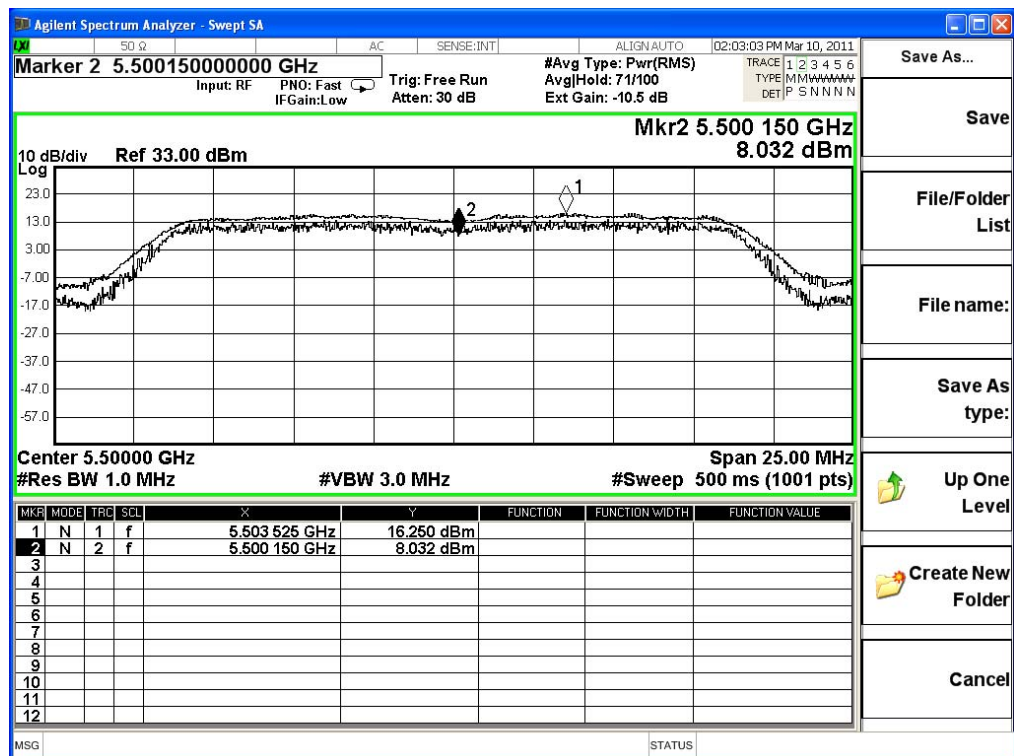

Channel 120:

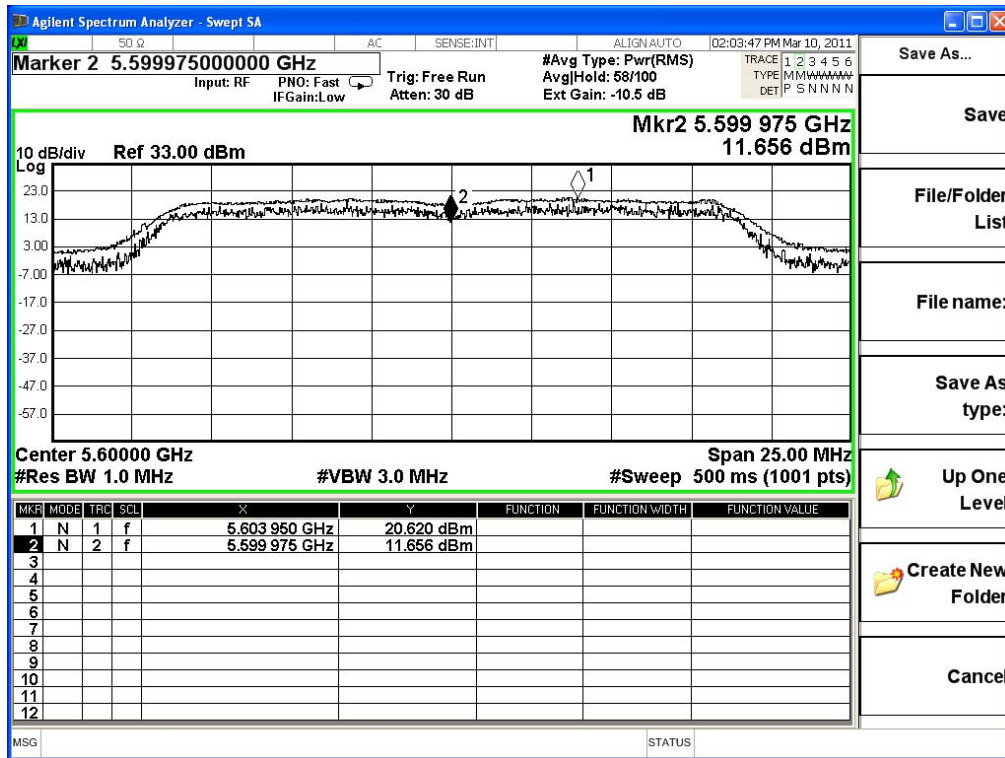


Channel 140:

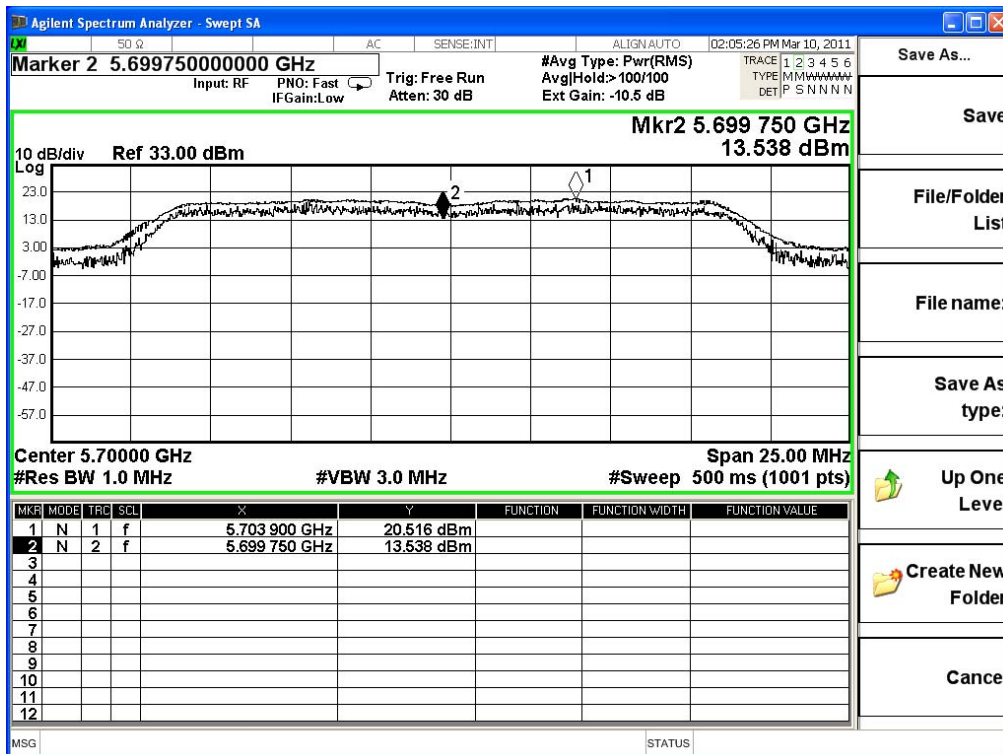


Product : 802.11 a/b/g/n module
 Test Item : Peak Excursion
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps)

Channel No.	Frequency (MHz)	Measurement Level (dB)	Required Limit (dB)	Result
38	5190	9.209	<13	Pass
46	5230	11.389	<13	Pass
54	5270	10.753	<13	Pass
62	5310	10.905	<13	Pass
102	5510	11.054	<13	Pass
118	5590	11.573	<13	Pass
134	5670	10.552	<13	Pass


Channel 38:

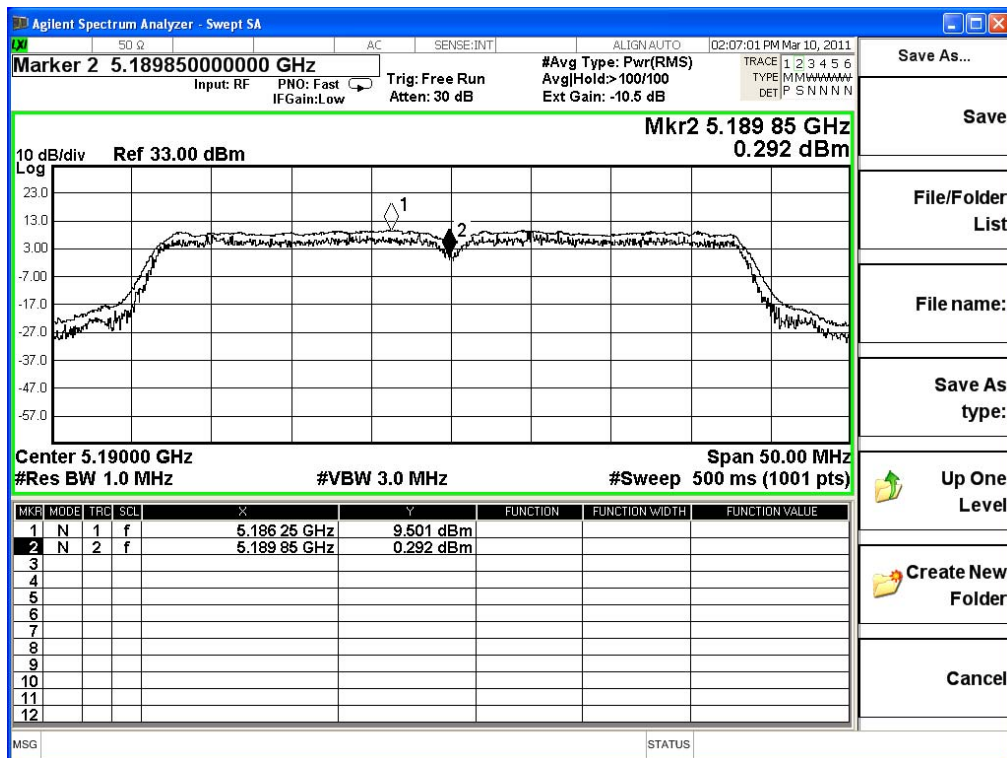


Channel 46:

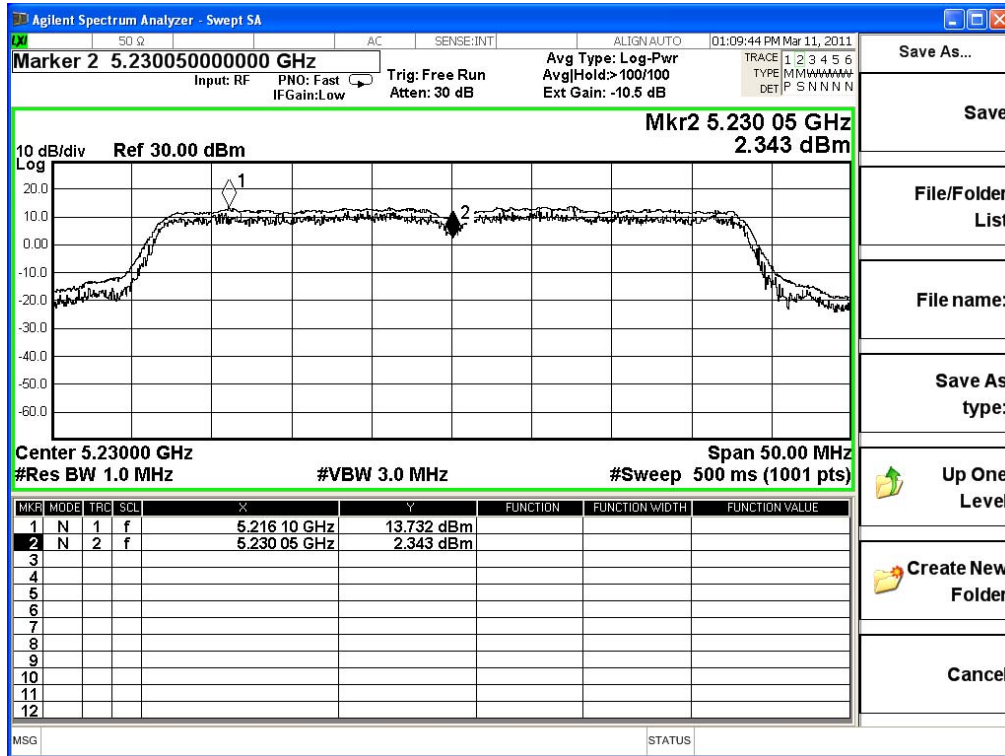


Channel 54:

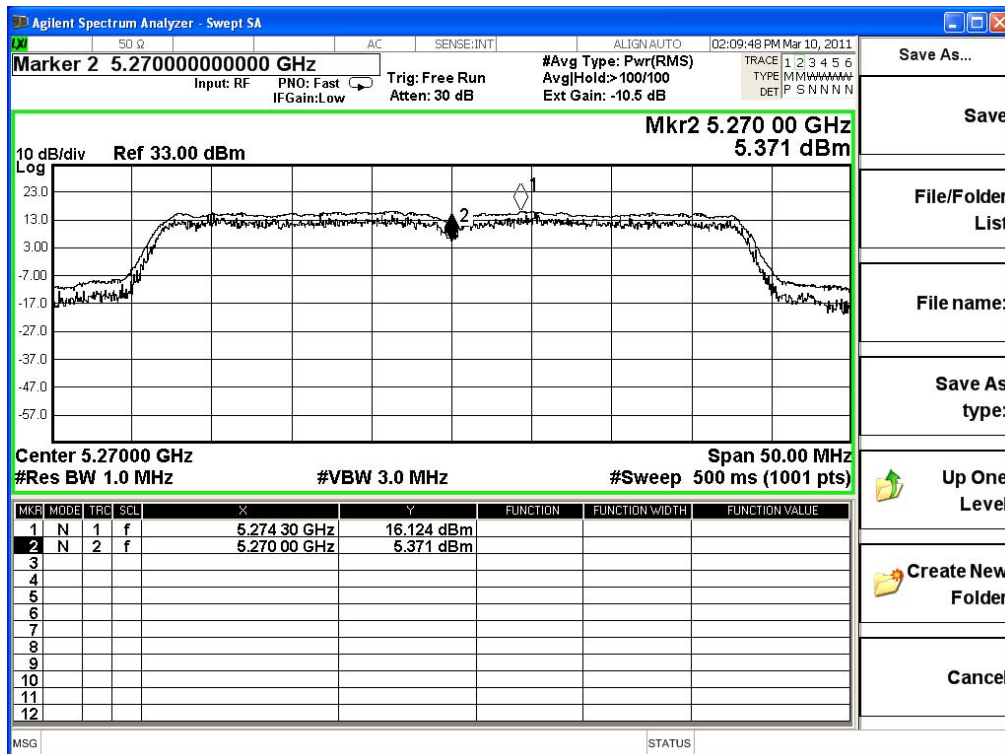


Channel 62:

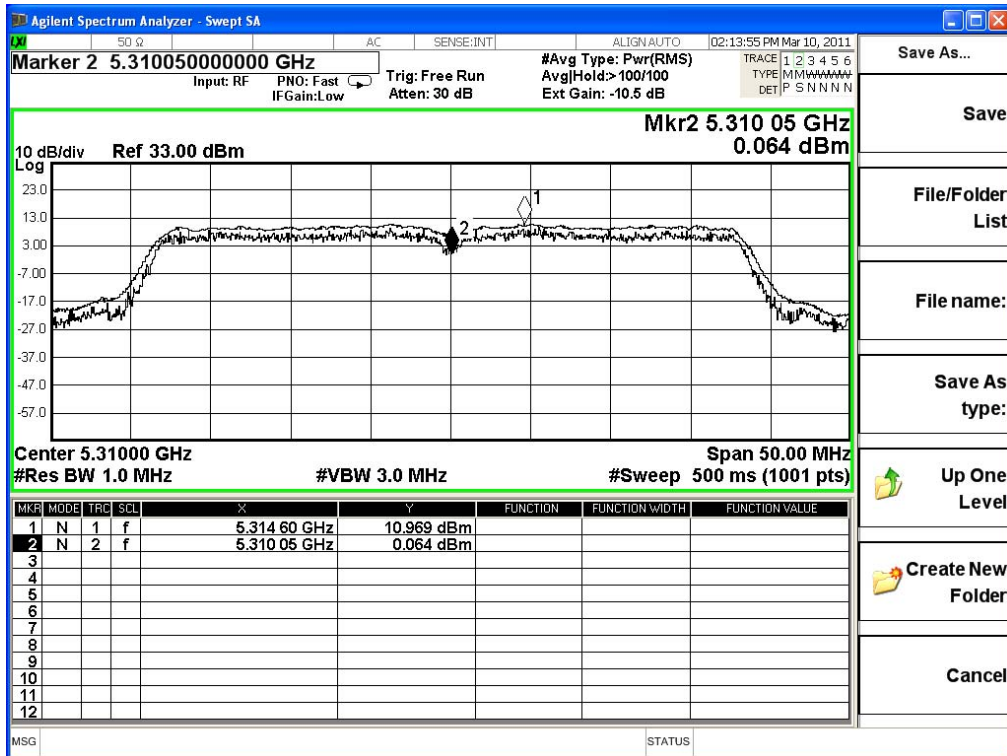


Channel 102:

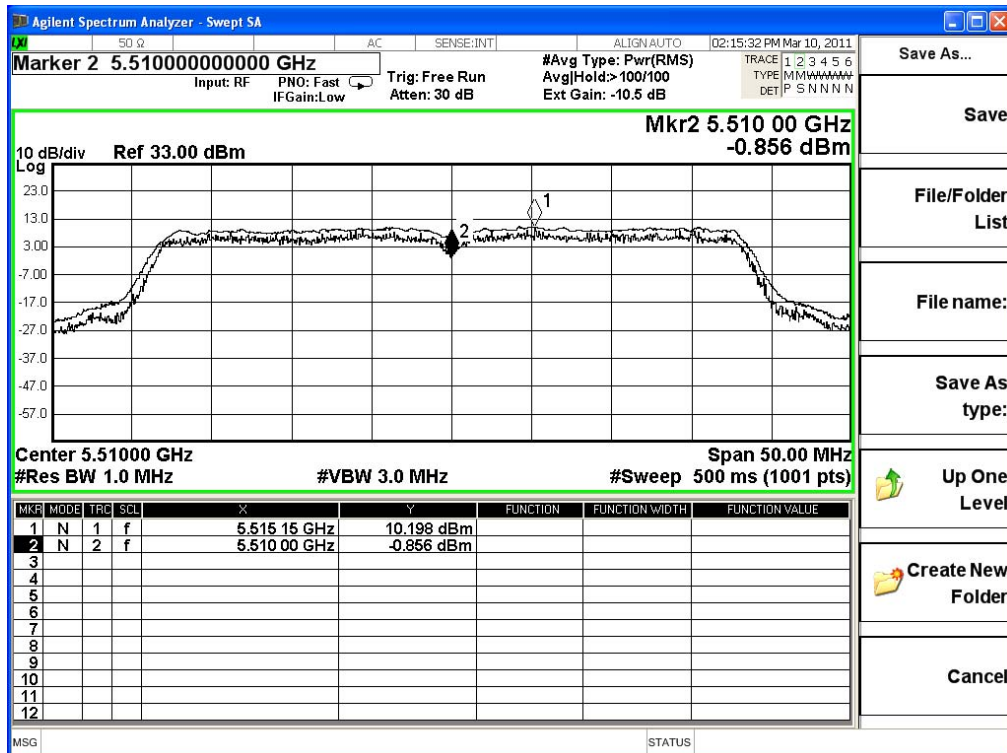

Channel 118:

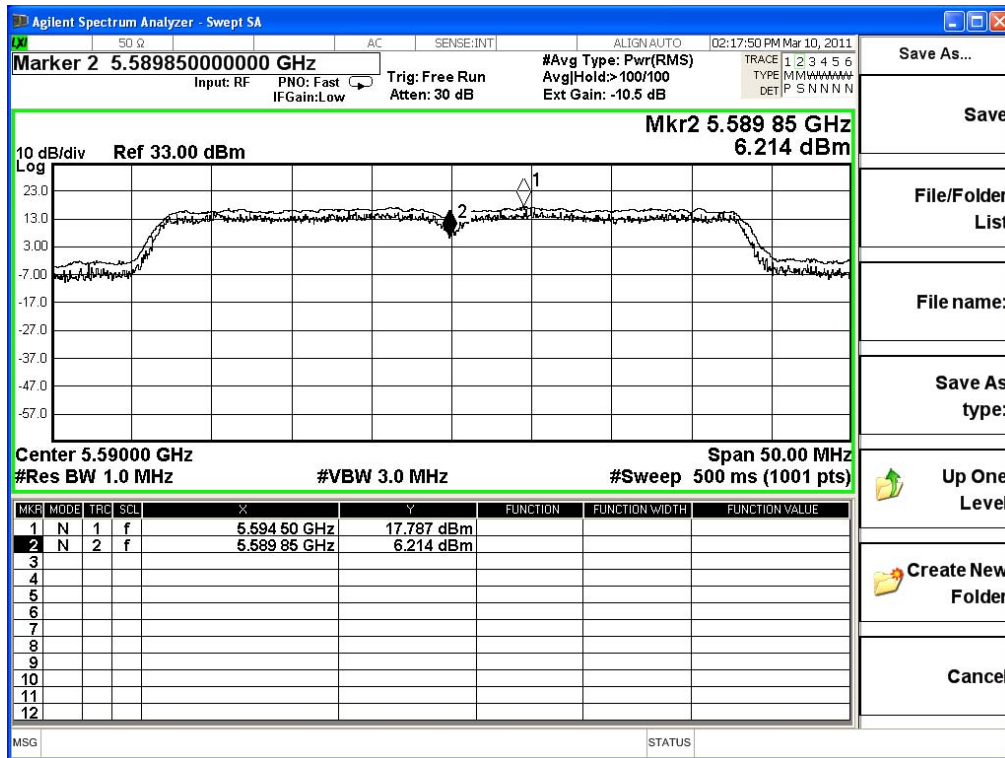

Channel 134:

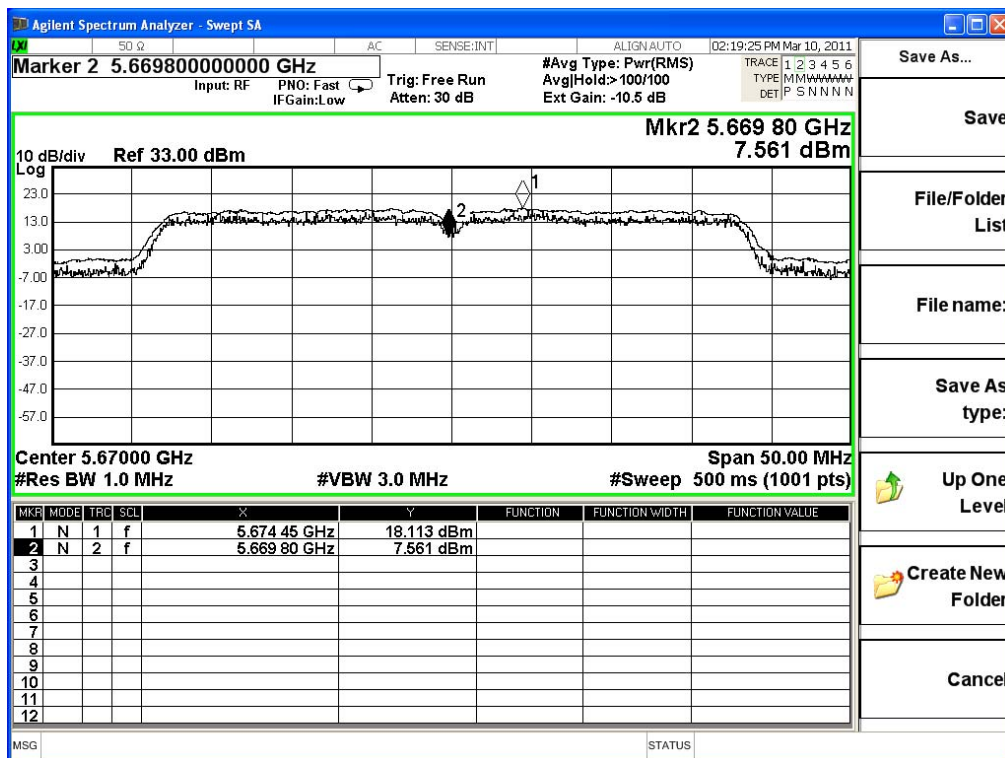

6. Radiated Emission

6.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2010
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2010
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2010
	X	Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2010
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2010
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2010
	X	Coaxial Cable	Quietek	QTK-CABLE/ CAB5	Feb., 2011
	X	Controller	Quietek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

6.2. Test Setup

Radiated Emission Below 1GHz

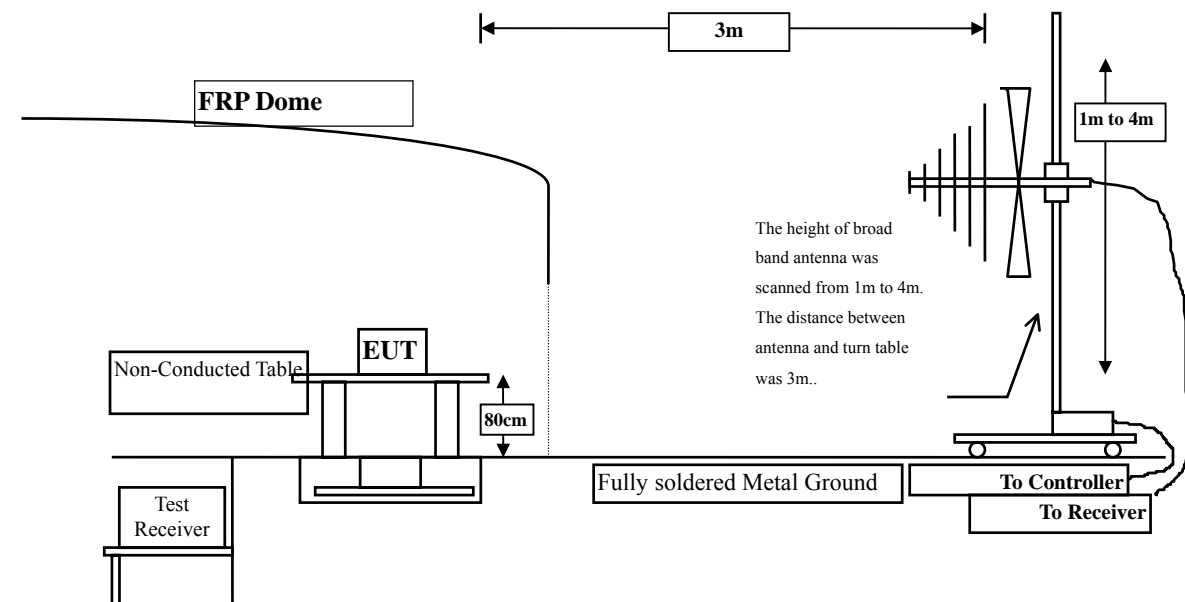

Radiated Emission Above 1GHz

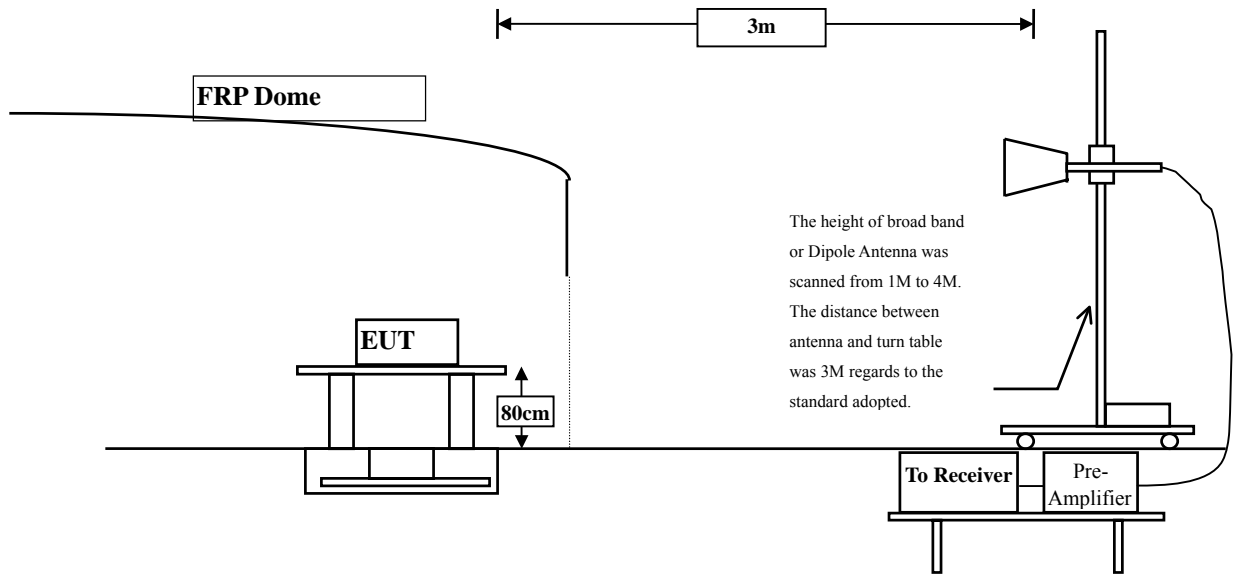

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

6.4. Test Procedure

The EUT was setup according to ANSI C63.4: 2009 and tested according to FCC Public Notice DA 02-2138 test procedure for compliance to FCC 47CFR 15. 407 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2009 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range form 30MHz - 10th Harmonic of fundamental was investigated.

6.5. Uncertainty

± 3.8 dB below 1GHz

± 3.9 dB above 1GHz

6.6. Test Result of Radiated Emission

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10360.000	12.930	38.160	51.090	-22.910	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
10360.000	*	*	*	*	54.000
15540.000	*	*	*	*	54.000
20720.000	*	*	*	*	54.000
25900.000	*	*	*	*	54.000
31080.000	*	*	*	*	54.000
36260.000	*	*	*	*	54.000

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- “ * ”, means this data is the too weak instrument of signal is unable to test.
- Measurement Level = Reading Level + Correct Factor.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10360.000	13.724	36.750	50.474	-23.526	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
10360.000	*	*	*	*	54.000
15540.000	*	*	*	*	54.000
20720.000	*	*	*	*	54.000
25900.000	*	*	*	*	54.000
31080.000	*	*	*	*	54.000
36260.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10440.000	13.322	38.040	51.362	-22.638	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
31320.000	*	*	*	*	74.000
36540.000	*	*	*	*	74.000
Average Detector:					
10440.000	*	*	*	*	54.000
15660.000	*	*	*	*	54.000
20880.000	*	*	*	*	54.000
26100.000	*	*	*	*	54.000
31320.000	*	*	*	*	54.000
36540.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10440.000	14.245	37.920	52.165	-21.835	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
31320.000	*	*	*	*	74.000
36540.000	*	*	*	*	74.000
Average Detector:					
10440.000	*	*	*	*	54.000
15660.000	*	*	*	*	54.000
20880.000	*	*	*	*	54.000
26100.000	*	*	*	*	54.000
31320.000	*	*	*	*	54.000
36540.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5240MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10480.000	13.693	36.870	50.564	-23.436	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440.000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average Detector:					
10480.000	*	*	*	*	54.000
15720.000	*	*	*	*	54.000
20960.000	*	*	*	*	54.000
26200.000	*	*	*	*	54.000
31440.000	*	*	*	*	54.000
36680.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5240MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10480.000	14.620	37.610	52.231	-21.769	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440.000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average Detector:					
10480.000	*	*	*	*	54.000
15720.000	*	*	*	*	54.000
20960.000	*	*	*	*	54.000
26200.000	*	*	*	*	54.000
31440.000	*	*	*	*	54.000
36680.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5260MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10520.000	14.015	37.590	51.605	-22.395	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
31560.000	*	*	*	*	74.000
36820.000	*	*	*	*	74.000
Average Detector:					
10520.000	*	*	*	*	74.000
15780.000	*	*	*	*	54.000
21040.000	*	*	*	*	54.000
26300.000	*	*	*	*	54.000
31560.000	*	*	*	*	54.000
36820.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5260MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10520.000	14.818	38.220	53.038	-20.962	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
31560.000	*	*	*	*	74.000
36820.000	*	*	*	*	74.000
Average Detector:					
10520.000	*	*	*	*	54.000
15780.000	*	*	*	*	54.000
21040.000	*	*	*	*	54.000
26300.000	*	*	*	*	54.000
31560.000	*	*	*	*	54.000
36820.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10600.000	14.550	36.170	50.719	-23.281	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
31800.000	*	*	*	*	74.000
37100.000	*	*	*	*	74.000
Average Detector:					
10600.000	*	*	*	*	54.000
15900.000	*	*	*	*	54.000
21200.000	*	*	*	*	54.000
26500.000	*	*	*	*	54.000
31800.000	*	*	*	*	54.000
37100.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10600.000	14.881	38.770	53.651	-20.349	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
31800.000	*	*	*	*	74.000
37100.000	*	*	*	*	74.000
Average Detector:					
10600.000	*	*	*	*	54.000
15900.000	*	*	*	*	54.000
21200.000	*	*	*	*	54.000
26500.000	*	*	*	*	54.000
31800.000	*	*	*	*	54.000
37100.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10640.000	14.690	37.660	52.350	-21.650	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
31920.000	*	*	*	*	74.000
37240.000	*	*	*	*	74.000
Average Detector:					
10640.000	*	*	*	*	54.000
15960.000	*	*	*	*	54.000
21280.000	*	*	*	*	54.000
26600.000	*	*	*	*	54.000
31920.000	*	*	*	*	54.000
37240.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10640.000	15.083	37.950	53.033	-20.967	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
31920.000	*	*	*	*	74.000
37240.000	*	*	*	*	74.000
Average Detector:					
10640.000	*	*	*	*	54.000
15960.000	*	*	*	*	54.000
21280.000	*	*	*	*	54.000
26600.000	*	*	*	*	54.000
31920.000	*	*	*	*	54.000
37240.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11000.000	16.399	36.730	53.129	-20.871	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
33000.000	*	*	*	*	74.000
38500.000	*	*	*	*	74.000
Average					
Detector:					
11000.000	*	*	*	*	54.000
16500.000	*	*	*	*	54.000
22000.000	*	*	*	*	54.000
27500.000	*	*	*	*	54.000
33000.000	*	*	*	*	54.000
38500.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
11000.000	17.132	35.050	52.182	-21.818	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
33000.000	*	*	*	*	74.000
38500.000	*	*	*	*	74.000
Average Detector:					
11000.000	*	*	*	*	54.000
16500.000	*	*	*	*	54.000
22000.000	*	*	*	*	54.000
27500.000	*	*	*	*	54.000
33000.000	*	*	*	*	54.000
38500.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5600MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11200.000	16.656	36.080	52.736	-21.264	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
33600.000	*	*	*	*	74.000
39200.000	*	*	*	*	74.000
Average					
Detector:					
11200.000	*	*	*	*	54.000
16800.000	*	*	*	*	54.000
22400.000	*	*	*	*	54.000
28000.000	*	*	*	*	54.000
33600.000	*	*	*	*	54.000
39200.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5600MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
11200.000	17.726	35.660	53.386	-20.614	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
33600.000	*	*	*	*	74.000
39200.000	*	*	*	*	74.000
Average Detector:					
11200.000	*	*	*	*	54.000
16800.000	*	*	*	*	54.000
22400.000	*	*	*	*	54.000
28000.000	*	*	*	*	54.000
33600.000	*	*	*	*	54.000
39200.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5700MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11400.000	16.530	35.850	52.381	-21.619	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
34200.000	*	*	*	*	74.000
39900.000	*	*	*	*	74.000
Average					
Detector:					
11400.000	*	*	*	*	54.000
17100.000	*	*	*	*	54.000
22800.000	*	*	*	*	54.000
28500.000	*	*	*	*	54.000
34200.000	*	*	*	*	54.000
39900.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5700MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
11400.000	17.138	34.560	51.698	-22.302	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
34200.000	*	*	*	*	74.000
39900.000	*	*	*	*	74.000
Average Detector:					
11400.000	*	*	*	*	54.000
17100.000	*	*	*	*	54.000
22800.000	*	*	*	*	54.000
28500.000	*	*	*	*	54.000
34200.000	*	*	*	*	54.000
39900.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10360.000	12.930	37.130	50.060	-23.940	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
10360.000	*	*	*	*	54.000
15540.000	*	*	*	*	54.000
20720.000	*	*	*	*	54.000
25900.000	*	*	*	*	54.000
31080.000	*	*	*	*	54.000
36260.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10360.000	13.724	36.510	50.234	-23.766	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
10360.000	*	*	*	*	54.000
15540.000	*	*	*	*	54.000
20720.000	*	*	*	*	54.000
25900.000	*	*	*	*	54.000
31080.000	*	*	*	*	54.000
36260.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10440.000	13.322	36.730	50.052	-23.948	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
31320.000	*	*	*	*	74.000
36540.000	*	*	*	*	74.000
Average Detector:					
10440.000	*	*	*	*	54.000
15660.000	*	*	*	*	54.000
20880.000	*	*	*	*	54.000
26100.000	*	*	*	*	54.000
31320.000	*	*	*	*	54.000
36540.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10440.000	14.245	36.730	50.975	-23.025	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
31320.000	*	*	*	*	74.000
36540.000	*	*	*	*	74.000
Average Detector:					
10440.000	*	*	*	*	54.000
15660.000	*	*	*	*	54.000
20880.000	*	*	*	*	54.000
26100.000	*	*	*	*	54.000
31320.000	*	*	*	*	54.000
36540.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5240MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10480.000	13.693	36.460	50.154	-23.846	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440.000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average Detector:					
10480.000	*	*	*	*	54.000
15720.000	*	*	*	*	54.000
20960.000	*	*	*	*	54.000
26200.000	*	*	*	*	54.000
31440.000	*	*	*	*	54.000
36680.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5240MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10480.000	14.620	36.330	50.951	-23.049	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440.000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average Detector:					
10480.000	*	*	*	*	54.000
15720.000	*	*	*	*	54.000
20960.000	*	*	*	*	54.000
26200.000	*	*	*	*	54.000
31440.000	*	*	*	*	54.000
36680.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5260MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10520.000	14.015	36.840	50.855	-23.145	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
31560.000	*	*	*	*	74.000
36820.000	*	*	*	*	74.000
Average Detector:					
10520.000	*	*	*	*	54.000
15780.000	*	*	*	*	54.000
21040.000	*	*	*	*	54.000
26300.000	*	*	*	*	54.000
31560.000	*	*	*	*	54.000
36820.000	*	*	*	*	54.000

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- “ * ”, means this data is the too weak instrument of signal is unable to test.
- Measurement Level = Reading Level + Correct Factor.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5260MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10520.000	14.818	37.260	52.078	-21.922	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
31560.000	*	*	*	*	74.000
36820.000	*	*	*	*	74.000
Average Detector:					
10520.000	*	*	*	*	54.000
15780.000	*	*	*	*	54.000
21040.000	*	*	*	*	54.000
26300.000	*	*	*	*	54.000
31560.000	*	*	*	*	54.000
36820.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10600.000	14.550	35.880	50.429	-23.571	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
31800.000	*	*	*	*	74.000
37100.000	*	*	*	*	74.000
Average Detector:					
10600.000	*	*	*	*	54.000
15900.000	*	*	*	*	54.000
21200.000	*	*	*	*	54.000
26500.000	*	*	*	*	54.000
31800.000	*	*	*	*	54.000
37100.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10600.000	14.881	36.550	51.431	-22.569	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
31800.000	*	*	*	*	74.000
37100.000	*	*	*	*	74.000
Average Detector:					
10600.000	*	*	*	*	54.000
15900.000	*	*	*	*	54.000
21200.000	*	*	*	*	54.000
26500.000	*	*	*	*	54.000
31800.000	*	*	*	*	54.000
37100.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5320MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10640.000	14.690	36.240	50.930	-23.070	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
31920.000	*	*	*	*	74.000
37240.000	*	*	*	*	74.000
Average Detector:					
10640.000	*	*	*	*	54.000
15960.000	*	*	*	*	54.000
21280.000	*	*	*	*	54.000
26600.000	*	*	*	*	54.000
31920.000	*	*	*	*	54.000
37240.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5320MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10640.000	15.083	36.430	51.513	-22.487	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
31920.000	*	*	*	*	74.000
37240.000	*	*	*	*	74.000
Average Detector:					
10640.000	*	*	*	*	54.000
15960.000	*	*	*	*	54.000
21280.000	*	*	*	*	54.000
26600.000	*	*	*	*	54.000
31920.000	*	*	*	*	54.000
37240.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5500MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11000.000	16.399	36.220	52.619	-21.381	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
33000.000	*	*	*	*	74.000
38500.000	*	*	*	*	74.000
Average Detector:					
11000.000	*	*	*	*	54.000
16500.000	*	*	*	*	54.000
22000.000	*	*	*	*	54.000
27500.000	*	*	*	*	54.000
33000.000	*	*	*	*	54.000
38500.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5500MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
11000.000	17.132	36.050	53.182	-20.818	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
33000.000	*	*	*	*	74.000
38500.000	*	*	*	*	74.000
Average Detector:					
11000.000	*	*	*	*	54.000
16500.000	*	*	*	*	54.000
22000.000	*	*	*	*	54.000
27500.000	*	*	*	*	54.000
33000.000	*	*	*	*	54.000
38500.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5600MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11200.000	16.656	37.010	53.666	-20.334	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
33600.000	*	*	*	*	74.000
39200.000	*	*	*	*	74.000
Average					
Detector:					
11200.000	*	*	*	*	54.000
16800.000	*	*	*	*	54.000
22400.000	*	*	*	*	54.000
28000.000	*	*	*	*	54.000
33600.000	*	*	*	*	54.000
39200.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5600MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
11200.000	17.726	35.140	52.866	-21.134	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
33600.000	*	*	*	*	74.000
39200.000	*	*	*	*	74.000
Average Detector:					
11200.000	*	*	*	*	54.000
16800.000	*	*	*	*	54.000
22400.000	*	*	*	*	54.000
28000.000	*	*	*	*	54.000
33600.000	*	*	*	*	54.000
39200.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5700MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11400.000	16.530	36.080	52.611	-21.389	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
34200.000	*	*	*	*	74.000
39900.000	*	*	*	*	74.000
Average					
Detector:					
11400.000	*	*	*	*	54.000
17100.000	*	*	*	*	54.000
22800.000	*	*	*	*	54.000
28500.000	*	*	*	*	54.000
34200.000	*	*	*	*	54.000
39900.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5700MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
11400.000	17.138	35.620	52.758	-21.242	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
34200.000	*	*	*	*	74.000
39900.000	*	*	*	*	74.000
Average Detector:					
11400.000	*	*	*	*	54.000
17100.000	*	*	*	*	54.000
22800.000	*	*	*	*	54.000
28500.000	*	*	*	*	54.000
34200.000	*	*	*	*	54.000
39900.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10380.000	12.939	36.900	49.839	-24.161	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
31140.000	*	*	*	*	74.000
36330.000	*	*	*	*	74.000
Average Detector:					
10380.000	*	*	*	*	54.000
15570.000	*	*	*	*	54.000
20760.000	*	*	*	*	54.000
25950.000	*	*	*	*	54.000
31140.000	*	*	*	*	54.000
36330.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10380.000	13.796	37.210	51.006	-22.994	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
31140.000	*	*	*	*	74.000
36330.000	*	*	*	*	74.000
Average Detector:					
10380.000	*	*	*	*	54.000
15570.000	*	*	*	*	54.000
20760.000	*	*	*	*	54.000
25950.000	*	*	*	*	54.000
31140.000	*	*	*	*	54.000
36330.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5230MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10460.000	13.508	36.670	50.178	-23.822	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
31380.000	*	*	*	*	74.000
36610.000	*	*	*	*	74.000
Average Detector:					
10460.000	*	*	*	*	54.000
15690.000	*	*	*	*	54.000
20920.000	*	*	*	*	54.000
26150.000	*	*	*	*	54.000
31380.000	*	*	*	*	54.000
36610.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5230MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10460.000	14.433	36.800	51.233	-22.767	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
31380.000	*	*	*	*	74.000
36610.000	*	*	*	*	74.000
Average Detector:					
10460.000	*	*	*	*	54.000
15690.000	*	*	*	*	54.000
20920.000	*	*	*	*	54.000
26150.000	*	*	*	*	54.000
31380.000	*	*	*	*	54.000
36610.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5270MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10540.000	14.151	36.890	51.040	-22.960	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
31620.000	*	*	*	*	74.000
36890.000	*	*	*	*	74.000
Average Detector:					
10540.000	*	*	*	*	54.000
15810.000	*	*	*	*	54.000
21080.000	*	*	*	*	54.000
26350.000	*	*	*	*	54.000
31620.000	*	*	*	*	54.000
36890.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5270MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10540.000	14.829	36.550	51.378	-22.622	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
31620.000	*	*	*	*	74.000
36890.000	*	*	*	*	74.000
Average Detector:					
10540.000	*	*	*	*	54.000
15810.000	*	*	*	*	54.000
21080.000	*	*	*	*	54.000
26350.000	*	*	*	*	54.000
31620.000	*	*	*	*	54.000
36890.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5310MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10620.000	14.623	35.840	50.463	-23.537	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
31860.000	*	*	*	*	74.000
37170.000	*	*	*	*	74.000
Average Detector:					
10620.000	*	*	*	*	54.000
15930.000	*	*	*	*	54.000
21240.000	*	*	*	*	54.000
26550.000	*	*	*	*	54.000
31860.000	*	*	*	*	54.000
37170.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5310MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
10620.000	14.970	36.180	51.150	-22.850	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
31860.000	*	*	*	*	74.000
37170.000	*	*	*	*	74.000
Average Detector:					
10620.000	*	*	*	*	54.000
15930.000	*	*	*	*	54.000
21240.000	*	*	*	*	54.000
26550.000	*	*	*	*	54.000
31860.000	*	*	*	*	54.000
37170.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5510MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11020.000	16.474	36.450	52.923	-21.077	74.000
16530.000	*	*	*	*	74.000
22040.000	*	*	*	*	74.000
27550.000	*	*	*	*	74.000
33060.000	*	*	*	*	74.000
38570.000	*	*	*	*	74.000
Average Detector:					
11020.000	*	*	*	*	54.000
16530.000	*	*	*	*	54.000
22040.000	*	*	*	*	54.000
27550.000	*	*	*	*	54.000
33060.000	*	*	*	*	54.000
38570.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5510MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
11020.000	17.224	35.790	53.014	-20.986	74.000
16530.000	*	*	*	*	74.000
22040.000	*	*	*	*	74.000
27550.000	*	*	*	*	74.000
33060.000	*	*	*	*	74.000
38570.000	*	*	*	*	74.000
Average Detector:					
11020.000	*	*	*	*	54.000
16530.000	*	*	*	*	54.000
22040.000	*	*	*	*	54.000
27550.000	*	*	*	*	54.000
33060.000	*	*	*	*	54.000
38570.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5590MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11180.000	16.657	36.850	53.506	-20.494	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
33540.000	*	*	*	*	74.000
39130.000	*	*	*	*	74.000
Average					
Detector:					
11180.000	*	*	*	*	54.000
16770.000	*	*	*	*	54.000
22360.000	*	*	*	*	54.000
27950.000	*	*	*	*	54.000
33540.000	*	*	*	*	54.000
39130.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5590MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
11180.000	17.681	34.550	52.230	-21.770	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
33540.000	*	*	*	*	74.000
39130.000	*	*	*	*	74.000
Average Detector:					
11180.000	*	*	*	*	54.000
16770.000	*	*	*	*	54.000
22360.000	*	*	*	*	54.000
27950.000	*	*	*	*	54.000
33540.000	*	*	*	*	54.000
39130.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5670MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11340.000	16.408	36.830	53.237	-20.763	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
34020.000	*	*	*	*	74.000
39690.000	*	*	*	*	74.000
Average					
Detector:					
11340.000	*	*	*	*	54.000
17010.000	*	*	*	*	54.000
22680.000	*	*	*	*	54.000
28350.000	*	*	*	*	54.000
34020.000	*	*	*	*	54.000
39690.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5670MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
11340.000	17.167	35.410	52.577	-21.423	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
34020.000	*	*	*	*	74.000
39690.000	*	*	*	*	74.000
Average Detector:					
11340.000	*	*	*	*	54.000
17010.000	*	*	*	*	54.000
22680.000	*	*	*	*	54.000
28350.000	*	*	*	*	54.000
34020.000	*	*	*	*	54.000
39690.000	*	*	*	*	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the too weak instrument of signal is unable to test.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 a/b/g/n module
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11 a-6Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
128.940	-10.088	44.690	34.602	-8.898	43.500
258.920	-5.050	42.665	37.615	-8.385	46.000
567.380	1.664	33.102	34.766	-11.234	46.000
714.820	3.562	34.013	37.575	-8.425	46.000
798.240	5.148	34.472	39.620	-6.380	46.000
961.200	6.450	31.794	38.244	-15.756	54.000
Vertical					
Peak Detector					
90.140	-3.149	39.727	36.578	-6.922	43.500
194.900	-9.322	47.190	37.868	-5.632	43.500
258.920	-7.490	45.241	37.751	-8.249	46.000
388.900	-3.064	38.478	35.414	-10.586	46.000
518.880	-0.546	37.953	37.407	-8.593	46.000
798.240	2.808	35.909	38.717	-7.283	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested.
Only the worst case is shown on the report.

Product : 802.11 a/b/g/n module
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11 a-6Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
103.720	-6.751	38.955	32.203	-11.297	43.500
194.900	-11.012	45.718	34.706	-8.794	43.500
258.920	-5.050	42.780	37.730	-8.270	46.000
495.600	-0.535	36.152	35.617	-10.383	46.000
714.820	3.562	33.373	36.935	-9.065	46.000
798.240	5.148	34.404	39.552	-6.448	46.000
Vertical					
Peak Detector					
101.780	-0.021	37.061	37.039	-6.461	43.500
192.960	-9.878	45.365	35.487	-8.013	43.500
258.920	-7.490	41.977	34.487	-11.513	46.000
518.880	-0.546	37.060	36.514	-9.486	46.000
798.240	2.808	35.346	38.154	-7.846	46.000
835.100	1.995	30.437	32.432	-13.568	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested.
Only the worst case is shown on the report.

Product : 802.11 a/b/g/n module
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
253.100	-5.387	45.001	39.614	-6.386	46.000
365.620	-1.329	33.802	32.473	-13.527	46.000
499.480	0.048	34.765	34.813	-11.187	46.000
565.440	1.611	33.598	35.209	-10.791	46.000
722.580	3.496	33.834	37.330	-8.670	46.000
798.240	5.148	31.636	36.784	-9.216	46.000
Vertical					
Peak Detector					
194.900	-9.322	44.494	35.172	-8.328	43.500
381.140	-1.558	28.791	27.233	-18.767	46.000
518.880	-0.546	32.668	32.122	-13.878	46.000
712.880	-0.631	31.188	30.557	-15.443	46.000
796.300	2.831	35.623	38.454	-7.546	46.000
959.260	6.964	29.277	36.241	-9.759	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested.
Only the worst case is shown on the report.

Product : 802.11 a/b/g/n module
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
101.780	-7.141	36.850	29.709	-13.791	43.500
258.920	-5.050	39.801	34.751	-11.249	46.000
388.900	-1.684	33.642	31.958	-14.042	46.000
565.440	1.611	32.427	34.038	-11.962	46.000
722.580	3.496	30.671	34.167	-11.833	46.000
798.240	5.148	30.995	36.143	-9.857	46.000
Vertical					
Peak Detector					
90.140	-3.149	38.574	35.425	-8.075	43.500
388.900	-3.064	33.711	30.647	-15.353	46.000
497.540	-1.393	29.942	28.549	-17.451	46.000
749.740	2.510	29.959	32.469	-13.531	46.000
798.240	2.808	37.071	39.879	-6.121	46.000
961.200	7.260	24.461	31.721	-22.279	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested.
Only the worst case is shown on the report.

Product : 802.11 a/b/g/n module
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
196.840	-10.946	45.054	34.108	-9.392	43.500
299.660	-3.585	43.811	40.226	-5.774	46.000
524.700	1.801	35.529	37.330	-8.670	46.000
600.360	3.977	32.572	36.549	-9.451	46.000
714.820	3.562	33.819	37.381	-8.619	46.000
798.240	5.148	33.475	38.623	-7.377	46.000
Vertical					
Peak Detector					
198.780	-8.221	42.332	34.111	-9.389	43.500
388.900	-3.064	31.488	28.424	-17.576	46.000
499.480	-0.852	30.411	29.559	-16.441	46.000
720.640	-0.099	30.905	30.806	-15.194	46.000
798.240	2.808	37.474	40.282	-5.718	46.000
932.100	6.152	24.494	30.646	-15.354	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested.
Only the worst case is shown on the report.

Product : 802.11 a/b/g/n module
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5500MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
198.780	-10.661	45.351	34.690	-8.810	43.500
322.940	-4.442	31.449	27.007	-18.993	46.000
480.080	-0.329	32.864	32.535	-13.465	46.000
606.180	4.666	24.854	29.520	-16.480	46.000
724.520	3.485	30.515	34.000	-12.000	46.000
798.240	5.148	31.613	36.761	-9.239	46.000
Vertical					
Peak Detector					
101.780	-0.021	37.952	37.930	-5.570	43.500
249.220	-7.634	48.335	40.701	-5.299	46.000
499.480	-0.852	32.761	31.909	-14.091	46.000
716.760	-0.653	31.797	31.144	-14.856	46.000
800.180	2.801	37.382	40.183	-5.817	46.000
932.100	6.152	26.214	32.366	-13.634	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested.
Only the worst case is shown on the report.

Product : 802.11 a/b/g/n module
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
134.760	-10.298	41.237	30.939	-12.561	43.500
266.680	-4.963	37.322	32.359	-13.641	46.000
388.900	-1.684	32.401	30.717	-15.283	46.000
544.100	3.512	26.908	30.420	-15.580	46.000
625.580	1.770	26.259	28.029	-17.971	46.000
716.760	3.537	33.647	37.184	-8.816	46.000

Vertical					
Peak Detector					
101.780	-0.021	36.999	36.977	-6.523	43.500
198.780	-8.221	43.868	35.647	-7.853	43.500
499.480	-0.852	34.397	33.545	-12.455	46.000
724.520	-0.135	27.276	27.141	-18.859	46.000
798.240	2.808	28.805	31.613	-14.387	46.000
965.080	7.932	23.751	31.683	-22.317	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested.
Only the worst case is shown on the report.

Product : 802.11 a/b/g/n module
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5270MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
196.840	-10.946	43.674	32.728	-10.772	43.500
258.920	-5.050	34.659	29.609	-16.391	46.000
381.140	-0.988	29.172	28.184	-17.816	46.000
596.480	4.017	29.112	33.129	-12.871	46.000
716.760	3.537	29.335	32.872	-13.128	46.000
798.240	5.148	29.198	34.346	-11.654	46.000
Vertical					
Peak Detector					
101.780	-0.021	33.864	33.842	-9.658	43.500
198.780	-8.221	43.505	35.284	-8.216	43.500
390.840	-3.099	29.168	26.069	-19.931	46.000
530.520	-0.517	26.847	26.330	-19.670	46.000
687.660	2.444	22.575	25.019	-20.981	46.000
798.240	2.808	35.642	38.450	-7.550	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested.
Only the worst case is shown on the report.

Product : 802.11 a/b/g/n module
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5590MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
86.260	-9.948	39.213	29.265	-10.735	40.000
198.780	-10.661	44.779	34.118	-9.382	43.500
499.480	0.048	32.667	32.715	-13.285	46.000
625.580	1.770	29.482	31.252	-14.748	46.000
718.700	3.537	27.882	31.419	-14.581	46.000
798.240	5.148	33.357	38.505	-7.495	46.000

Vertical					
Peak Detector					
101.780	-0.021	35.268	35.246	-8.254	43.500
196.840	-8.766	41.575	32.809	-10.691	43.500
375.320	-2.029	27.878	25.849	-20.151	46.000
499.480	-0.852	33.178	32.326	-13.674	46.000
720.640	-0.099	31.673	31.574	-14.426	46.000
800.180	2.801	27.626	30.427	-15.573	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested.
Only the worst case is shown on the report.