


1:1

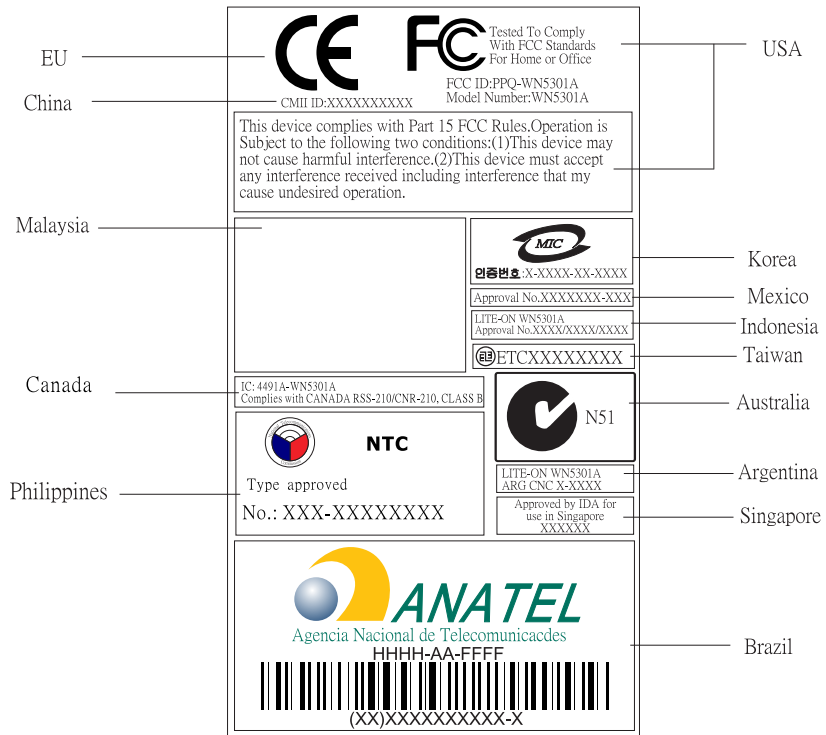

2:1

(客戶):HP
 (上光方式):NO
 (材質):一般合成紙(耐溫51.4°C)
 (尺寸):27.24x48.20mm
 (公差):+0.3mm

NOTE:

1. 貼紙貼紙需成捲狀進料, 內徑75mm, 外徑需在280mm之內
2. 貼紙總厚度不得小於0.1mm, 最厚不得大於0.35mm
3. 貼紙每張之間的間距最小:2mm, 最大:5mm, 一般:3mm, 每捲之間的間距必需一致
4. 底紙的材質為85g格拉辛底紙, 進料時不得被刀模損壞, 不得有裂痕, 底紙寬度需比貼紙左右各多出2-3mm
5. 貼紙為透明材質時, 底紙需打上方孔或圓孔

LIMITS UNLESS OTHERWISE NOTED	
X. +- X. °+-	
.X +- .X °+-	
.XX +- .XX °+-	
.XXX +- .XXX °+-	

A4	UNIT	SCALE	SHEET	MODEL No.	WN5301A-H1		
	MM	NON	1(1)	PART NAME	regulatory label		
APPROVED	CHECKED	DESIGNED		PART No.	R125050007	REV	A1
		Allen 2005.11.02		LITEON	光寶科技股份有限公司 LITE-ON TECHNOLOGY CORP.		