



WP8331
802.11ac Dual Band PoE Access Point
External Specification

Version: V0.4

This document contains confidential proprietary information and is property of LTC. The contents of this document should not be disclosed to unauthorized persons without the written consent of LTC.

1 Product Descriptions

The WP8331 is a two radios, dual band, 802.11ac access point. It provides powerful WLAN supporting wireless speed up to 300Mbps on 2.4GHz and 867Mbps on 5GHz, one Ethernet port to connect to the backbone network, one Ethernet ports can be aggregated to connect to one computer through the network cables. Besides, the WP8331 supports 802.3at PoE PD to allow the device powered by PoE switch remotely.

To protect data during wireless transmission, the device supports WEP data encryption and WPA/WPA2 wireless security to ensure network safely.

The WP8331 is ideal for a variety of medium density enterprise and hotspot environments including SMBs, hotels, retail outlets and branch offices.

2 Product Specifications and Features

2.1 H/W Features

2.1.1 Specification

Key Components / Connectors / Performance	
Processor	QCA IPQ4028
Wireless Chipset	Integrated with IPQ4028 – 2.4G Integrated with IPQ4028 – 5G
BT/BLE	CSR8510 (optional, layout reserved via USB to SoC)
GE PHY	QCA8072
SPI Flash	64Mbytes (pin-to-pin downsize) – default
NAND Flash	128MB – optional/reserved
DDR3	256Mbytes (pin-to-pin downsize or upsize to 1GB)
Console	Internal console port
Interfaces	
Ethernet	1x 10/100/1000 Base-TX MDI/MDIX RJ-45 port with PoE PD 802.3 at 1x 10/100/1000 Base-TX MDI/MDIX RJ-45 port Compliant with following standards: 1. IEEE 802.3/802.3u 2. Hardware based 10/100/1000, full/half, flow control auto negotiation 3. Full duplex IEEE 802.3x flow control and half duplex back-pressure flow control

	<p>Rx sensitivity: 2.4GHz band, 802.11b@11Mbps: -91 +/- 2dBm 802.11g@54Mbps: -76 +/- 2dBm 802.11n MCS7: -73 +/- 2 dBm</p> <p>5GHz band, 802.11a @6Mbps: -93+/- 2dBm 802.11a @54Mbps: -76+/- 2dBm 802.11n MCS7 : -72 +/- 2dBm 802.11ac MCS9:-64 +/- 2dBm</p>
	<p>BT Peak Gain: 2.6 dBi</p> <p>2.4G Ant _1: Peak Gain: 4.7 dBi Ant _2: Peak Gain: 3.3 dBi</p> <p>5G 5180~5240 MHz Ant _1: Peak Gain: 3.8 dBi Ant _2: Peak Gain: 5.0 dBi 5260~5320 MHz Ant _1: Peak Gain: 4.3 dBi Ant _2: Peak Gain: 5.0 dBi Power Directional Gain: 4.66 dBi Power Density Directional Gain: 7.67 dBi 5500~5720 MHz Ant _1: Peak Gain: 5.1dBi Ant _2: Peak Gain: 4.7 dBi Power Directional Gain: 4.90 dBi Power Density Directional Gain: 7.91 dBi 5745~5825 MHz Ant _1: Peak Gain: 5.1 dBi Ant _2: Peak Gain: 5.0 dBi</p>
	Impedance: 50 Ohm nominal
	Antenna efficiency - 2.4G: 50%
	Antenna efficiency - 5G: 60%
	Antenna efficiency - BLE: 40%
	V.S.W.R.: 2.0:1 Max
USB	Host 2.0 (optional)
Reset	1 x reset button

2.1.2 LED indicators

- from left to right (total 5 LEDs)



Location	LED Indicative	Color	Status	Description
Per device	Power	Green	Solid Light	Power on
			Light off	Power off

	WLAN	Green (5G)	Solid Light	Connect to WLAN port
			Blinking	WLAN activity present
			Light off	No activity or power off
		Amber (2.4G)	Solid Light	Connect to WLAN port
			Blinking	WLAN activity present
			Light off	No activity or power off
Per port	LAN	Green	Solid Light	Device connected to LAN port at 10/100/1000Mbps
			Blinking	LAN Activity present
			Light off	Not Connected

2.2 S/W Features

Software specification		
Feature Item	Feature	Detailed Description
Wireless	Wireless mode	11b/g/n 11a/ac
	Operation mode	Access point mode (Support both normal station and WDS station)
	Bandwidth	20MHz 20/40MHz dynamic 20/40/80MHz dynamic
	Aggregation in 11n mode	A-MPDU
	SSID	Support 4 virtual AP
	QoS	EDCA WMM QoS-DSCP configurable via web UI
	Other parameter configurable via Web UI	Transmit power adjustable (four level: full, 1/2, 1/4, 1/8) DTIM Guard interval (short/long)
Security	Authentication	WPA/WPA2 Personal (PSK), 802.1X Authentication with RADIUS Client Enterprise (802.1x): PEAP, TTLS, TLS
	Encryption	AES, TKIP, WEP 64/128,
Management	Network setting	IPv4 static IP & DHCP client
	Statistics	Statistics of wired, wireless associated stations accessible
	SNMP v1/v2	MIBII(<i>survey throughput, data statistics, location</i>)
	Wireless ACL in AP mode	Based on MAC address
	Firmware upgrade	via Web UI via SNMP
	System log	Syslog
	Discovery tools	LiteON Locator

For customization, like GUI / SNMP MIBs/ configuration tool or customer internal utility, will discuss with customer once project is awarded.


3 Mechanical and Environment Design

3.1 Case (details refer to ME drawing separately)

A. ID/Tool (leverage WP8336-AB)

This ID is a small form factor within 146x146mm. The bottom ID/ME shall seamlessly (without tooling updates) support potential different styles of top cover for customers.

The ID has a Kensington lock hole on the enclosure.

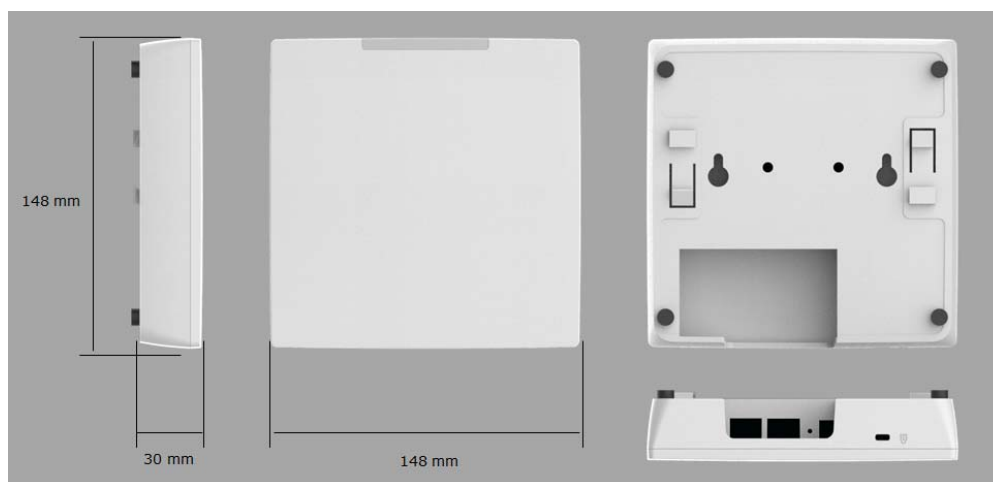

B. I/O port (back view, ordering from right to left)



C. Mounting Kit

1. It needs to accommodate Mojo four mounting kits for T-bar and hard surface mount.
2. There are three T-bar width supported, 15, 24 and 38mm.
3. The hard flat surface mounting including wall and ceiling mount
 - a. standard, 2 key holes in the central part on bottom case (optional)
 - b. optional accessory, separate bracket

3.2 Physical & Environment

3.2.1 Power

- PoE DC 48V
- Optional external power adapter, (to be quoted separately)
 - Input: 100-240VAC, 50/60Hz
 - Output: Switching 12V DC/1.5A (for DC jack center pin 2.0mm)
- Reset Button: Reset to factory default by pushing button for 5 sec

3.2.2 Operation Temperature

- Temp: 0° C to +45° C (+32° F to +113° F)
- Humidity: 5% ~ 95%R.H non-condensing

3.2.3 Storage Temperature

- Temp: -4°F to 149°F (-20°C to 65°C)
- Humidity: 5% ~ 95% non-condensing

4 Certification Requirements

STATUATORY

- USA (Non DFS)
- USA (DFS)
- Canada (IC)
- Europe (CE)
- Japan (TELEC)
- India (WPC)
- Korea (KCC)
- Taiwan (NCC)
- China (MII-NAL)
- AUS/NZ

SAFETY

- USA UL
- Canada cUL
- WW CB (IECEE)
- China CCC

Others

- RoHS (self- announcement)
- WEEE (self- announcement)

FCC Statement:

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

This device and its antenna(s) must not be co-located with any other transmitters except in accordance with FCC multi-transmitter product procedures.

The device for operation in the band 5150–5250 MHz is only for indoor use

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

IC Statement:

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

For product available in the USA/Canada market, only channel 1~11 can be operated.

Selection of other channels is not possible.

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités. Sélection d'autres canaux n'est pas possible.

This device and its antenna(s) must not be co-located with any other transmitters except in accordance with IC multi-transmitter product procedures.

Referring to the multi-transmitter policy, multiple-transmitter(s) and module(s) can be operated simultaneously without reassessment permissive change.

Cet appareil et son antenne (s) ne doit pas être co-localisés ou fonctionnement en association avec une autre antenne ou transmetteur.

The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

The maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate.

le gain maximal d'antenne permis (pour les dispositifs utilisant la bande 5725-5850 MHz) doit se conformer à la limite de p.i.r.e. spécifiée pour l'exploitation point à point et non point à point, selon le cas.

Dynamic Frequency Selection (DFS) for devices operating in the bands 5250- 5350 MHz, 5470-5600 MHz and 5650-5725 MHz.

Sélection dynamique de fréquences (DFS) pour les dispositifs fonctionnant dans les bandes 5250-5350 MHz, 5470-5600 MHz et 5650-5725 MHz.

The maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit.
le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5250-5350 MHz et 5470-5725 MHz doit se conformer à la limite de p.i.r.e.

Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

De plus, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Pour une utilisation en intérieur uniquement.

IMPORTANT NOTE:

IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.