



FCC RADIO TEST REPORT

Applicant : LITE-ON Technology Corp

Address : Bldg. C, 90, Chien 1 Rd., Chung-Ho, New Taipei City,
23585, Taiwan

Equipment : Access Point

Model No. : WPX8324, WRX8324, WPA-2

Trade Name : LITEON, PoEWit

FCC ID : PPQ-WPX8324

I HEREBY CERTIFY THAT :

The sample was received on Oct. 03, 2022 and the testing was completed on Jan. 05, 2023 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





CONTENTS

- 1. Summary of Test Procedure and Test Results 5**
 - 1.1 Applicable Standards 5
- 2. Test Configuration of Equipment under Test 6**
 - 2.1 Feature of Equipment under Test 6
 - 2.2 Carrier Frequency of Channels 8
 - 2.3 Test Mode and Test Software 9
 - 2.4 Description of Test System 10
 - 2.5 General Information of Test 11
 - 2.6 Measurement Uncertainty 12
- 3. Test Equipment and Ancillaries Used for Tests 13**
- 4. Antenna Requirements 16**
 - 4.1 Standard Applicable 16
 - 4.2 Antenna Construction and Directional Gain 16
- 5. Test of AC Power Line Conducted Emission 17**
 - 5.1 Test Limit 17
 - 5.2 Test Procedures 17
 - 5.3 Typical Test Setup 18
 - 5.4 Test Result and Data 19
 - 5.5 Test Photographs 21
- 6. Test of Spurious Emission (Radiated) 23**
 - 6.1 Test Limit 23
 - 6.2 Test Procedures 24
 - 6.3 Typical Test Setup 25
 - 6.4 Test Result and Data (9kHz ~ 30MHz) 27
 - 6.5 Test Result and Data (30MHz ~ 1GHz) 27
 - 6.6 Test Result and Data (1GHz ~ 25GHz) 29
 - 6.7 Restricted Bands of Operation 41
 - 6.8 Test Photographs (30MHz ~ 1GHz) 42
 - 6.9 Test Photographs (1GHz ~ 25GHz) 43
- 7. Test of Spurious Emission (Conducted) 45**
 - 7.1 Test Limit 45
 - 7.2 Test Procedure 45
 - 7.3 Test Setup Layout 45
 - 7.4 Test Result and Data 45
- 8. On Time, Duty Cycle and Measurement methods 50**
 - 8.1 Test Limit 50
 - 8.2 Test Procedure 50
 - 8.3 Test Setup Layout 50
 - 8.4 Test Result and Data 50
- 9. 6dB Bandwidth Measurement Data 52**
 - 9.1 Test Limit 52



9.2 Test Procedures 52

9.3 Test Setup Layout 52

9.4 Test Result and Data 52

10. Maximum Average Output Power 54

10.1 Test Limit 54

10.2 Test Procedures 54

10.3 Test Setup Layout 54

10.4 Test Result and Data 54

11. Power Spectral Density 55

11.1 Test Limit 55

11.2 Test Procedures 55

11.3 Test Setup Layout 55

11.4 Test Result and Data 55

12. Radio Frequency Exposure 57

12.1 Applicable Standards 57

12.2 EUT Specification 57

12.3 Maximum Permissible Exposure 58



History of this test report

Report No.	Issued Date	Description
22090062-TRFCC03	Jan. 07, 2023	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.209 15.205	Radiated Spurious Emission	PASS
15.247(d)	Conducted Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)	Maximum Output Power	PASS
15.247(e)	Power Spectral Density	PASS
2.1091	Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(22090062-TEFV01).



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	BT / BLE: 2400-2483.5MHz 802.11b/g/n(TurboQAM)/ax: 2400-2483.5MHz 802.11a/n/ac/ax: 5150-5250MHz, 5725-5850MHz
Center Frequency Range	BT / BLE: 2402-2480MHz 802.11b/g/n(TurboQAM)/ax: 2412-2462MHz 802.11a/n/ac/ax: 5180-5240MHz, 5745-5825MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM, 256QAM(TurboQAM) 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 5GHz: 802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS, OFDMA
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps, 2Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 MCS0 – MCS9, VHT20/40(TurboQAM) 802.11ax: MCS0 – MCS11, HE20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80 802.11ax: MCS0 – MCS11, HE20/40/80
Antenna Type	For BT / BLE: PCB Antenna For WLAN: PIFA Antenna
Antenna Gain	For BT / BLE: 2400-2500MHz: ANT 3: 2.55dBi For WLAN: 2400-2500MHz: ANT 1: 3.96dBi, ANT 2: 3.52dBi 5150-5250MHz: ANT 1: 4.76dBi, ANT 2: 4.37dBi 5725-5850MHz: ANT 1: 4.73dBi, ANT 2: 3.72dBi

Note:

1. WLAN 2.4G 802.11n Support TurboQAM.
2. EUT support TPC Function.
3. Wifi 2.4G+BT and wifi 5G+BT can simultaneously transmission.
4. EUT support AP Master Mode.
5. 802.11ax support beamforming Function.
6. EUT Indoor access point
7. For more details, please refer to the User's manual of the EUT.



The differences between all model numbers as follow:

Model No.	Difference	Trade Name
WPX8324	With PoE	LITEON
WRX8324	W/O PoE	LITEON
WPA-2	With PoE	PoEWit

Note: After engineering evaluation,WRX8324 for worst case and for presentation of report data



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	*19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	*39	2480
12	2426	26	2454	--	--
13	2428	27	2456	--	--

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, " QRCT ver. 4.0.00193.0" under Windows OS system was executed to transmit and receive data via Bluetooth.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	GFSK (1Mbps), Power from Adapter,
2	GFSK (2Mbps), Power from Adapter,
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (BELOW 1GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps), Power from Adapter,
2	GFSK (2Mbps), Power from Adapter,
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps), Power from Adapter,
2	GFSK (2Mbps), Power from Adapter,
caused "Test Mode 1,2" generated the worst case, they were reported as the final data.	

Note:1. There are two kinds of test voltage: AC 120V / 60Hz and AC 240V / 60Hz.

For AC Power Line Conducted Emission, & Radiation Emissions (BELOW 1GHz) AC 240V / 60Hz is worst case.

For Radiated Spurious Emission(1GHz ~ 40GHz), AC 120V / 60Hz is worst case.

Modulation Type	TX CONFIGURATION
GFSK (1Mbps)	1TX
GFSK (2Mbps)	1TX



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	P23T001	N/A	Adapter / 1.8m / NS
RJ45 Cable * 2	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
POE	CERIO	S53VG	N/A	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Adapter	APD	WB-18D12R	1.8m / NS	N/A
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	15m / NS	N/A
POE	CERIO	S53VG	N/A	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Adapter	APD	WB-18D12R	1.8m / NS	N/A
Notebook	DELL	P23T001	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
POE	CERIO	S53VG	N/A	N/A



2.5 General Information of Test

Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2022/10/13~2023/1/5	23.1~27.1°C / 42~59%	Dian Chen
Radiated Emissions	3M02-NK	2022/10/13~2022/10/14	24°C / 39~43%	Leon Huang
		2023/01/04	21°C / 49%	Leon Huang
AC Power Line Conducted Emission	CON01-NK	2022/10/21	25°C / 56%	Leon Huang



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.12dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.7dB
Radiated Spurious Emission(1GHz~25GHz)	±6.8dB
Conducted Spurious Emission	±1.8dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±1.2%
Power Spectral Density	±1.8dB
Duty Cycle	±1.2%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions (2022/10/13~2022/10/14)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2021/11/05	2022/11/04
Active Loop Antenna	EMCO	6507	40855	2022/05/25	2023/05/24
Horn Antenna	EMCO	3115	31589	2022/04/26	2023/04/25
Horn Antenna	EMCO	3116	31970	2022/03/18	2023/03/17
Double Ridged Guide Horn Antenna	RF SPAN	DRH18-E	210309A18-ES	2022/08/24	2023/08/23
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2022/07/05	2023/07/04
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2022/07/20	2023/07/19
Preamplifier	Agilent	8449B	3008A01954	2022/03/17	2023/03/16
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2021/11/16	2022/11/15
Preamplifier	EM Electronics corp.	EM330	60660	2022/04/08	2023/04/07
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2022/09/06	2023/09/05
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2022/03/21	2023/03/20
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2022/4/9	2023/4/8
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2022/4/9	2023/4/8
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2022/4/9	2023/4/8
Cable-3m(1G-40G)	Rapidtek	40GHZ 300CM	38MS-38MS300314	2022/4/9	2023/4/8
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2022/01/11	2023/01/10
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2022/01/11	2023/01/10
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2022/04/25	2023/04/24
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA



Test Item	Radiated Emissions (2023/1/4)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2022/04/22	2023/04/21
Active Loop Antenna	EMCO	6507	40855	2022/05/25	2023/05/24
Horn Antenna	EMCO	3115	31601	2022/10/12	2023/10/11
Horn Antenna	EMCO	3116	31970	2022/03/18	2023/03/17
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2022/07/05	2023/07/04
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2022/08/19	2023/08/18
Preamplifier	Agilent	8449B	3008A01954	2022/03/17	2023/03/16
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2022/11/11	2023/11/10
Preamplifier	EM Electronics corp.	EM330	60660	2022/04/08	2023/04/07
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2022/09/06	2023/09/05
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2022/03/21	2023/03/20
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2022/01/11	2023/01/10
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2022/01/11	2023/01/10
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2022/04/25	2023/04/24
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2022/4/9	2023/4/8
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2022/4/9	2023/4/8
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2022/4/9	2023/4/8
Cable-3m(1G-40G)	Rapidtek	40GHZ 300CM	38MS-38MS300314	2022/4/9	2023/4/8
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA



Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2022/01/10	2023/01/09
Power Meter	Anritsu	ML2495A	1224005	2022/04/12	2023/04/11
Power Sensor	Anritsu	MA2411B	1207295	2022/04/12	2023/04/11
Attenuator	KEYSIGHT	8491B	MY39250703	2022/04/12	2023/04/11

Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	101200	2022/08/22	2023/08/21
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-740	2022/08/21	2023/08/20
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101934	2022/03/21	2023/03/20
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130606	2022/03/21	2023/03/20
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	PCB Antenna
Antenna Gain	2.55 dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

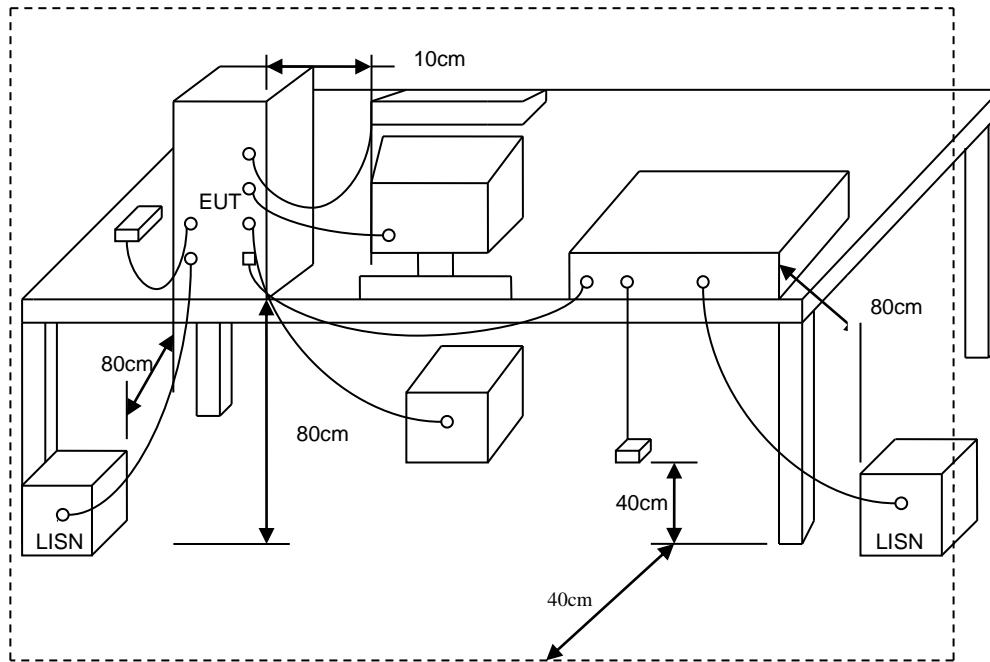



5.4 Test Result and Data

Power	: DC 12V From adapter (240V/60Hz)	Pol/Phase	: LINE
Test Mode	: Mode 1		

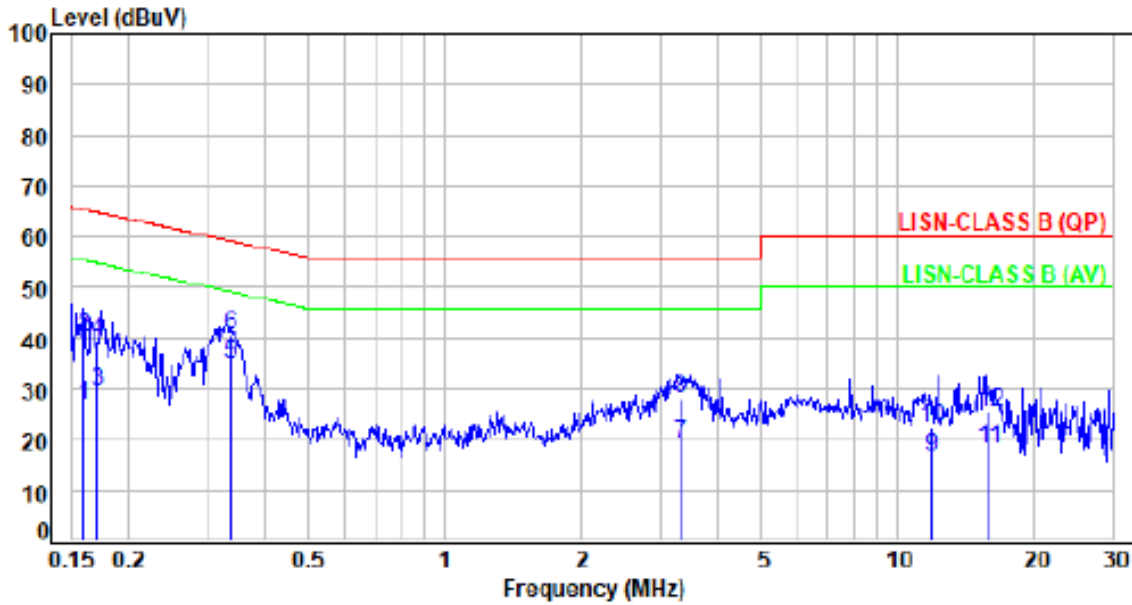


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.89	17.28	27.17	55.52	-28.35	Average	P
2	0.16	9.89	30.34	40.23	65.52	-25.29	QP	P
3	0.17	9.89	19.94	29.83	54.94	-25.11	Average	P
4	0.17	9.89	29.48	39.37	64.94	-25.57	QP	P
5	0.34	9.90	25.03	34.93	49.29	-14.36	Average	P
6	0.34	9.90	30.65	40.55	59.29	-18.74	QP	P
7	3.31	9.84	9.49	19.33	46.00	-26.67	Average	P
8	3.31	9.84	18.44	28.28	56.00	-27.72	QP	P
9	11.86	9.91	6.93	16.84	50.00	-33.16	Average	P
10	11.86	9.91	12.71	22.62	60.00	-37.38	QP	P
11	15.98	9.96	8.43	18.39	50.00	-31.61	Average	P
12	15.98	9.96	15.48	25.44	60.00	-34.56	QP	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=(LISN or ISM or Current Probe)Factor + Cable Loss



Power	: DC 12V From adapter (240V/60Hz)	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1		:

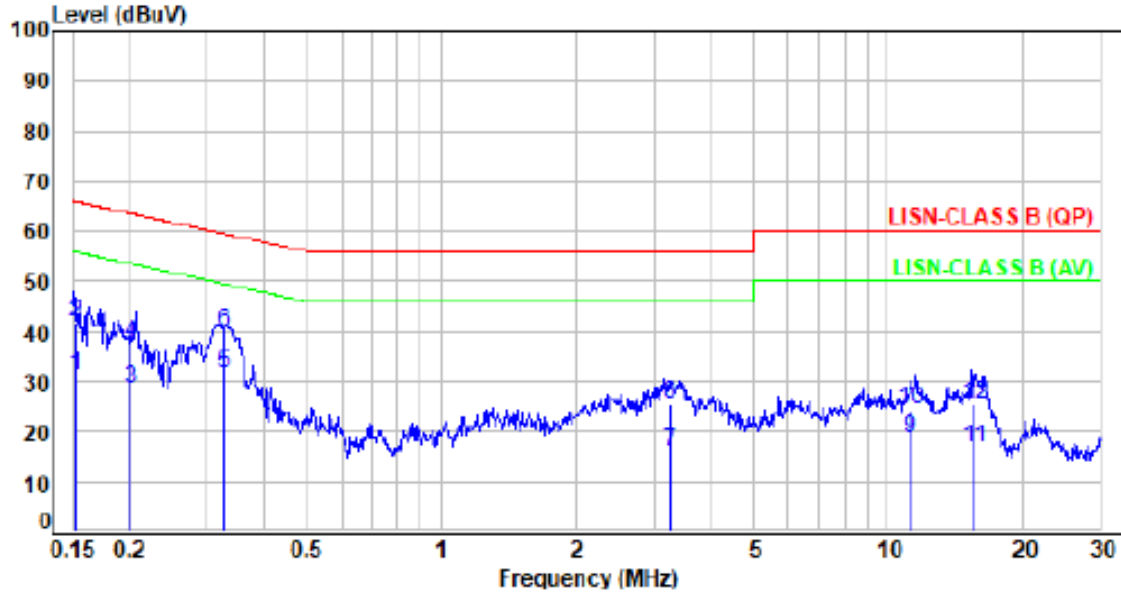

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.90	21.21	31.11	55.92	-24.81	Average	P
2	0.15	9.90	31.77	41.67	65.92	-24.25	QP	P
3	0.20	9.90	18.50	28.40	53.56	-25.16	Average	P
4	0.20	9.90	27.63	37.53	63.56	-26.03	QP	P
5	0.33	9.90	21.83	31.73	49.53	-17.80	Average	P
6	0.33	9.90	29.91	39.81	59.53	-19.72	QP	P
7	3.26	9.84	6.10	15.94	46.00	-30.06	Average	P
8	3.26	9.84	15.50	25.34	56.00	-30.66	QP	P
9	11.27	9.90	8.68	18.58	50.00	-31.42	Average	P
10	11.27	9.90	14.51	24.41	60.00	-35.59	QP	P
11	15.59	9.96	6.92	16.88	50.00	-33.12	Average	P
12	15.59	9.96	15.51	25.47	60.00	-34.53	QP	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(Y-AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup

Below 30MHz test setup

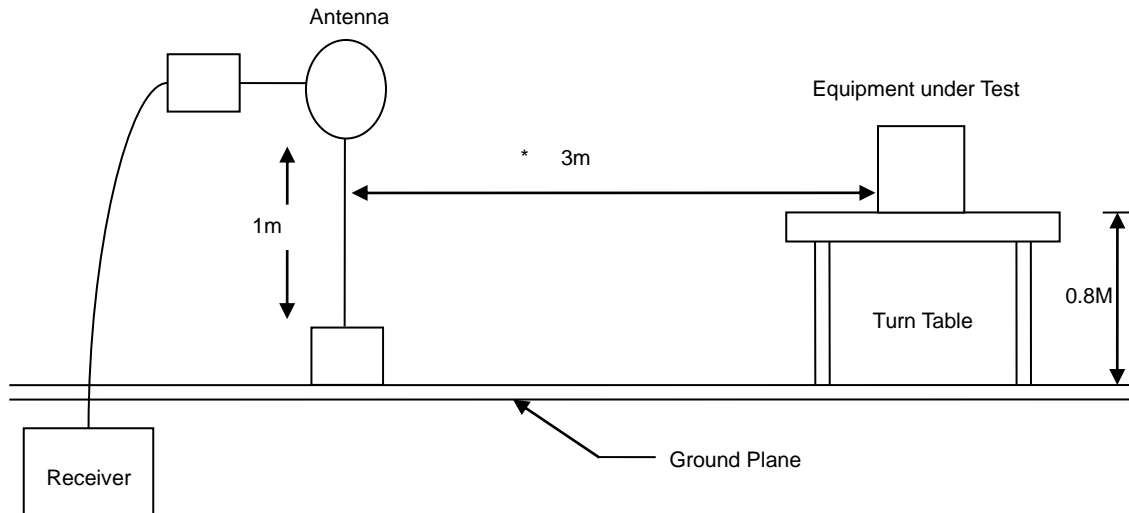


30MHz- 1GHz Test Setup

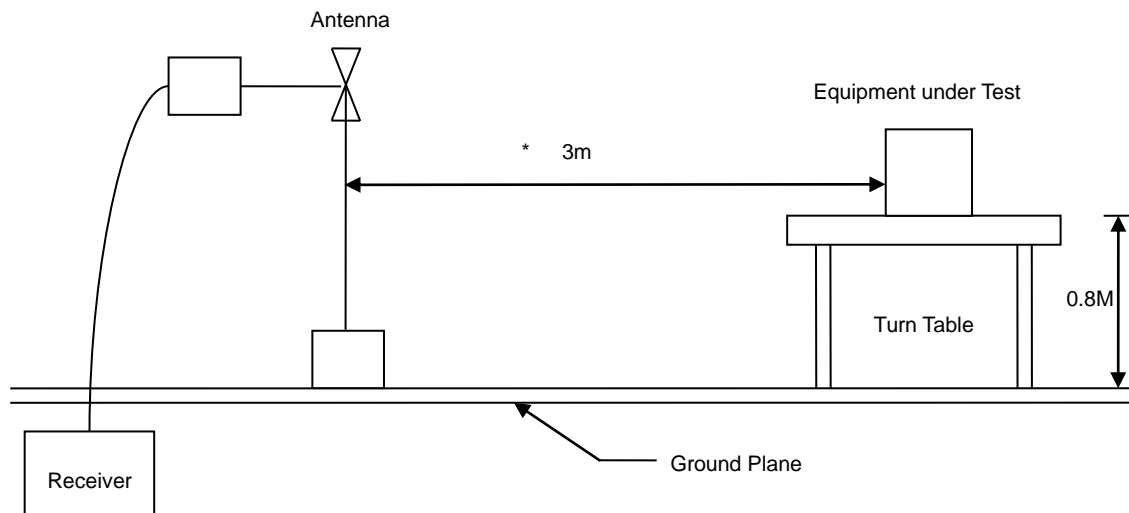



Above 1GHz Test Setup

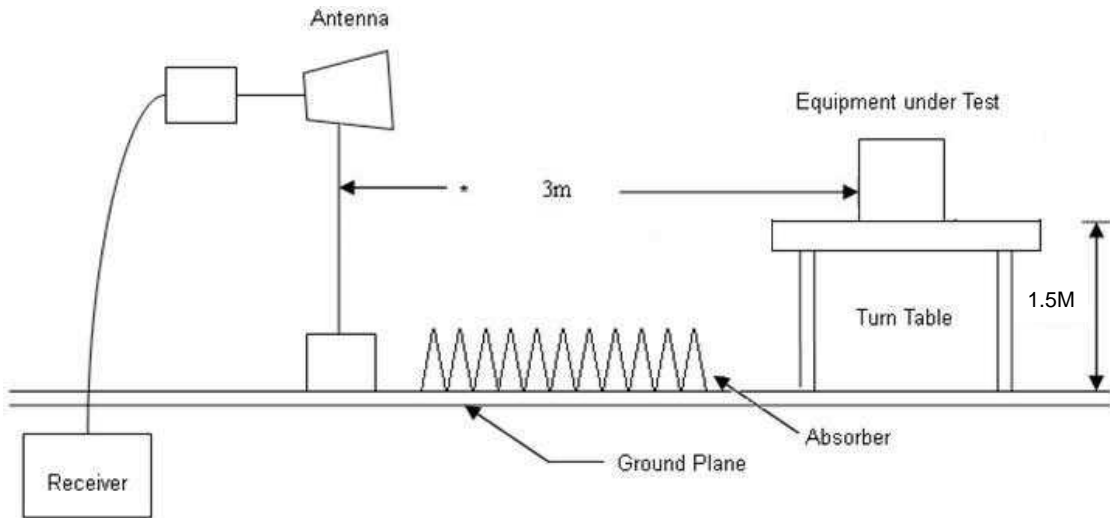




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	:	DC 12V From adapter (240V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1		:	

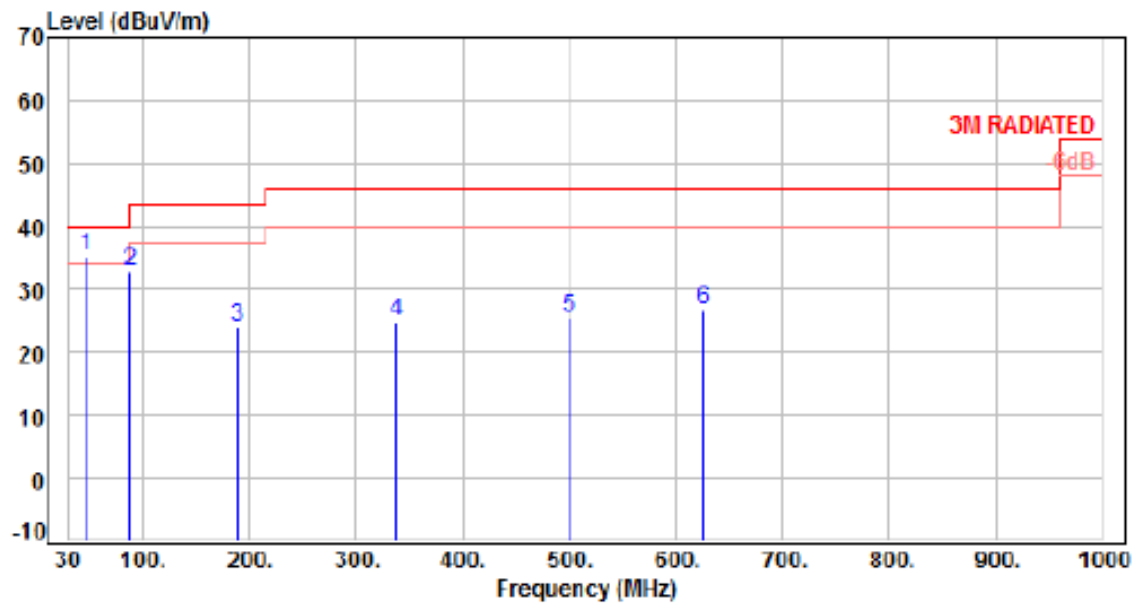


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	46.49	-11.04	46.32	35.28	40.00	-4.72	Peak	400	360	P
2	88.20	-16.78	49.69	32.91	43.50	-10.59	Peak	400	360	P
3	189.08	-13.28	37.28	24.00	43.50	-19.50	Peak	400	360	P
4	338.46	-9.29	34.20	24.91	46.00	-21.09	Peak	400	360	P
5	499.48	-5.24	30.70	25.46	46.00	-20.54	Peak	400	360	P
6	625.58	-2.24	29.18	26.94	46.00	-19.06	Peak	400	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From adapter (240V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1		:

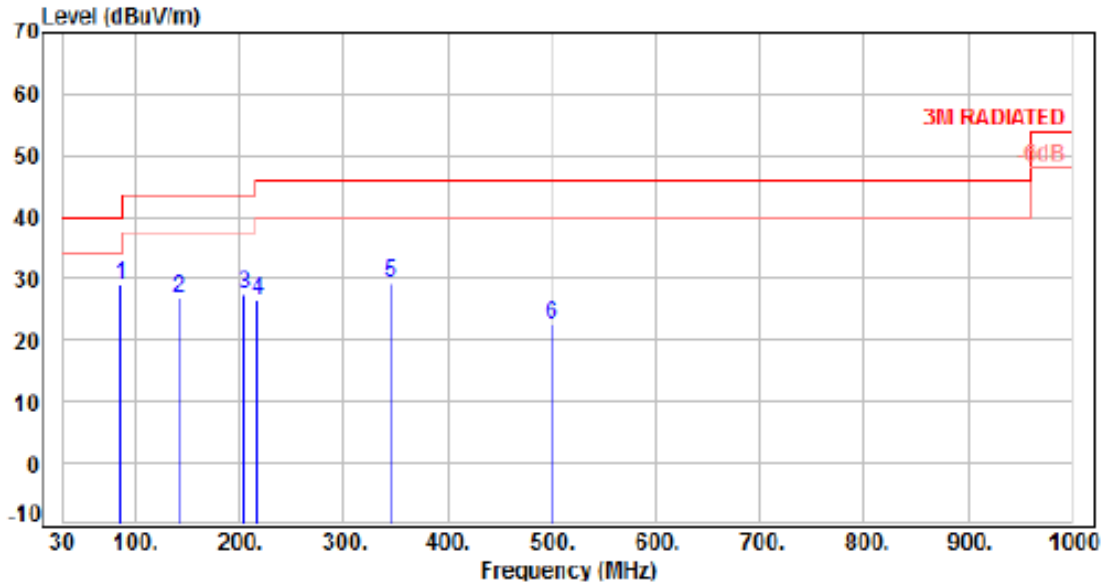


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	86.26	-16.93	45.83	28.90	40.00	-11.10	Peak	400	0	P
2	142.52	-11.80	38.61	26.81	43.50	-16.69	Peak	400	0	P
3	204.60	-13.37	40.67	27.30	43.50	-16.20	Peak	400	0	P
4	218.18	-13.99	40.62	26.63	46.00	-19.37	Peak	400	0	P
5	344.28	-9.29	38.56	29.27	46.00	-16.73	Peak	400	0	P
6	499.48	-5.24	27.69	22.45	46.00	-23.55	Peak	400	0	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00		:

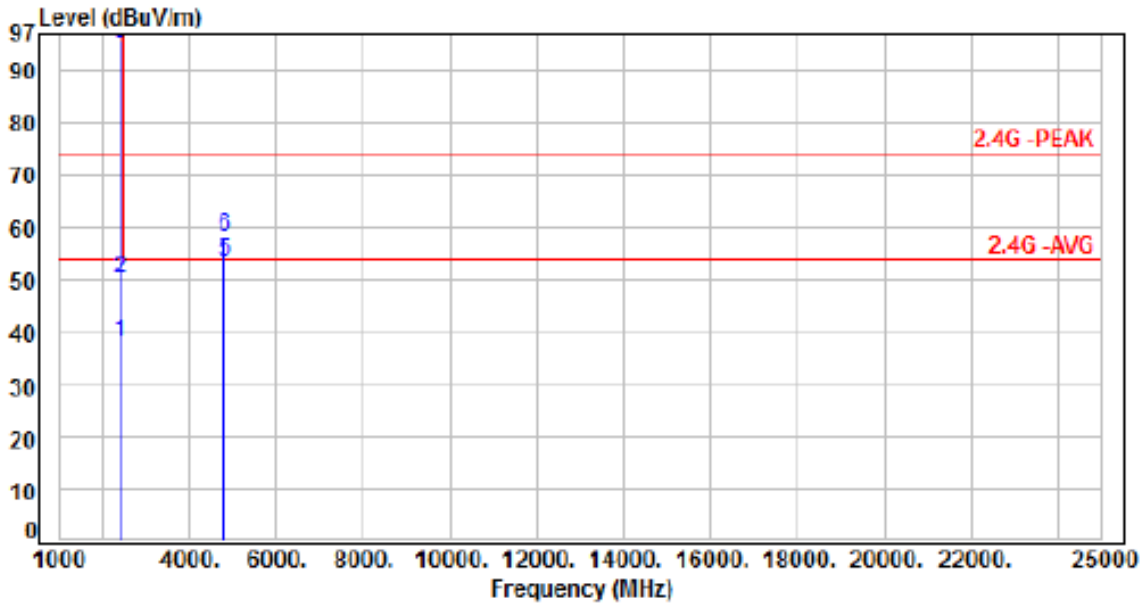


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.88	42.03	38.15	54.00	-15.85	Average	116	360	P
2	2390.00	-3.88	54.11	50.23	74.00	-23.77	Peak	116	360	P
3	2402.00	-3.91	98.95	95.04	200.00	-104.96	Average	116	360	P
4	2402.00	-3.91	99.91	96.00	200.00	-104.00	Peak	116	360	P
5	4804.00	4.37	49.24	53.61	54.00	-0.39	Average	115	254	P
6	4804.00	4.37	53.79	58.16	74.00	-15.84	Peak	115	254	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00		:

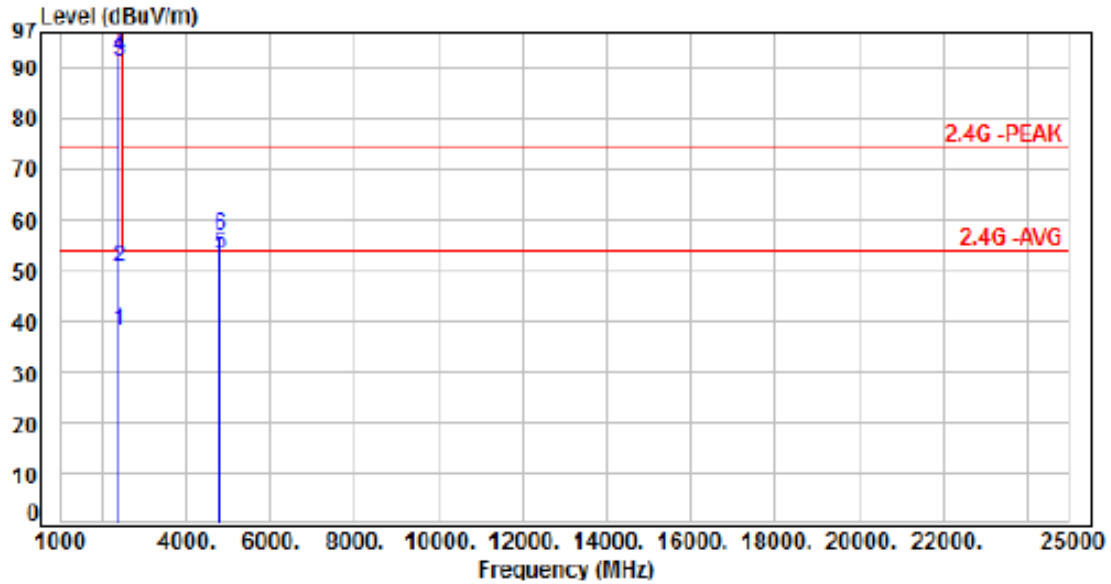


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.88	42.02	38.14	54.00	-15.86	Average	100	345	P
2	2390.00	-3.88	54.41	50.53	74.00	-23.47	Peak	100	345	P
3	2402.00	-3.91	95.07	91.16	200.00	-108.84	Average	100	345	P
4	2402.00	-3.91	95.97	92.06	200.00	-107.94	Peak	100	345	P
5	4804.00	4.37	48.63	53.00	54.00	-1.00	Average	385	181	P
6	4804.00	4.37	52.25	56.62	74.00	-17.38	Peak	385	181	P

Note: Level-Reading+Factor
 Margin-Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH19		:

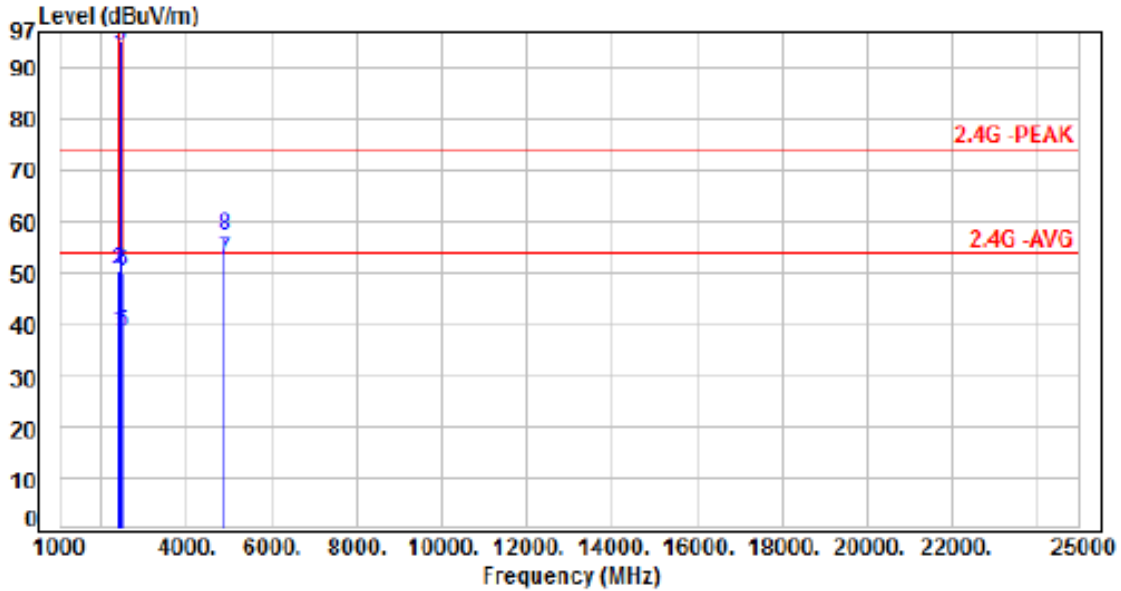


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.68	42.09	38.21	54.00	-15.79	Average	100	0	P
2	2390.00	-3.68	54.52	50.64	74.00	-23.36	Peak	100	0	P
3	2440.00	-3.95	98.22	94.27	200.00	-105.73	Average	100	0	P
4	2440.00	-3.95	98.96	95.01	200.00	-104.99	Peak	100	0	P
5	2483.50	-3.99	42.36	38.37	54.00	-15.63	Average	100	0	P
6	2483.50	-3.99	54.29	50.30	74.00	-23.70	Peak	100	0	P
7	4880.00	4.76	47.72	52.48	54.00	-1.52	Average	100	237	P
8	4880.00	4.76	52.46	57.22	74.00	-16.78	Peak	100	237	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH19		:

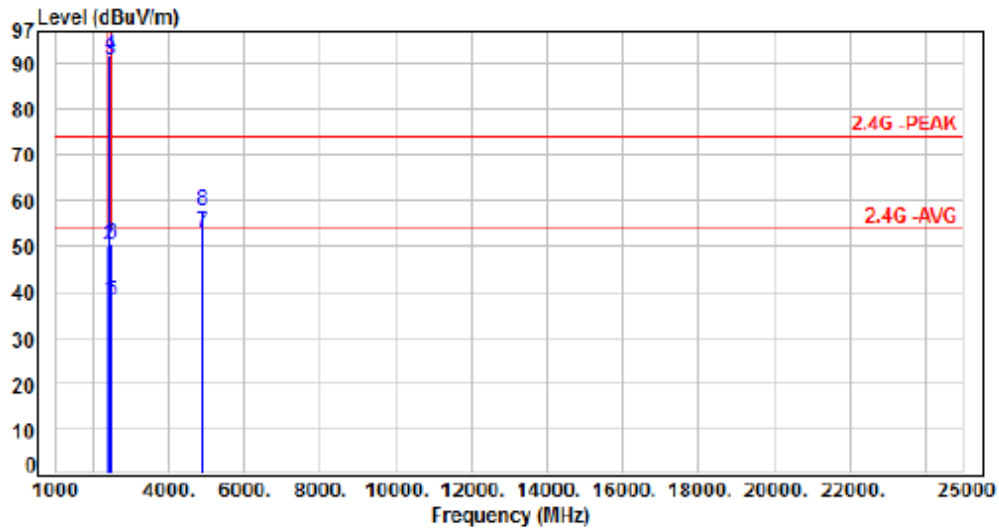


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.88	41.92	38.04	54.00	-15.96	Average	100	342	P
2	2390.00	-3.88	54.18	50.30	74.00	-23.70	Peak	100	342	P
3	2440.00	-3.95	94.79	90.84	200.00	-109.16	Average	100	342	P
4	2440.00	-3.95	95.64	91.69	200.00	-108.31	Peak	100	342	P
5	2483.50	-3.99	41.93	37.94	54.00	-16.06	Average	100	342	P
6	2483.50	-3.99	54.43	50.44	74.00	-23.56	Peak	100	342	P
7	4880.00	4.76	48.31	53.07	54.00	-0.93	Average	360	181	P
8	4880.00	4.76	53.04	57.80	74.00	-16.20	Peak	360	181	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH39		:	

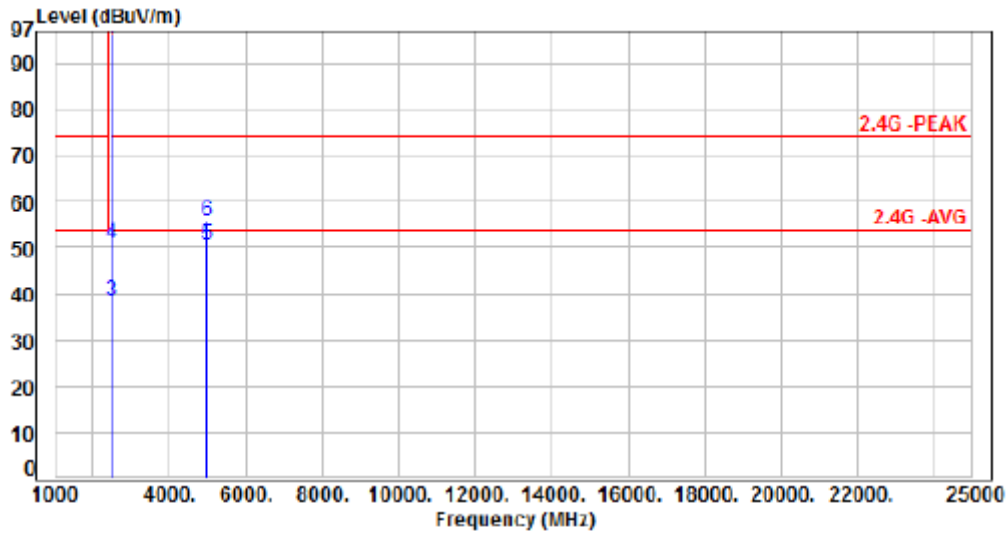


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-3.98	99.21	95.23	200.00	-104.77	Average	111	0	P
2	2480.00	-3.98	100.18	96.20	200.00	-103.80	Peak	111	0	P
3	2483.50	-3.99	42.39	38.40	54.00	-15.60	Average	111	0	P
4	2483.50	-3.99	54.78	50.79	74.00	-23.21	Peak	111	0	P
5	4960.00	5.06	45.58	50.64	54.00	-3.36	Average	100	317	P
6	4960.00	5.06	50.80	55.86	74.00	-18.14	Peak	100	317	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH39		:

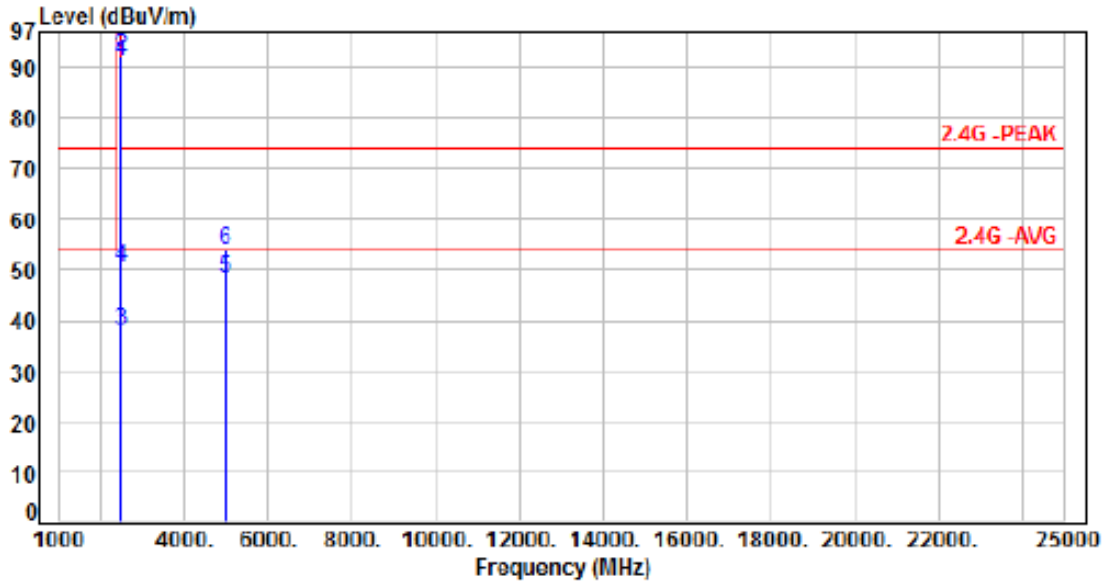


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-3.98	95.15	91.17	200.00	-108.83	Average	100	336	P
2	2480.00	-3.98	95.15	92.17	200.00	-107.83	Peak	100	336	P
3	2483.50	-3.99	41.96	37.97	54.00	-16.03	Average	100	336	P
4	2483.50	-3.99	54.33	50.34	74.00	-23.66	Peak	100	336	P
5	4960.00	5.06	43.17	48.23	54.00	-5.77	Average	100	200	P
6	4960.00	5.06	48.88	53.94	74.00	-20.06	Peak	100	200	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH00		

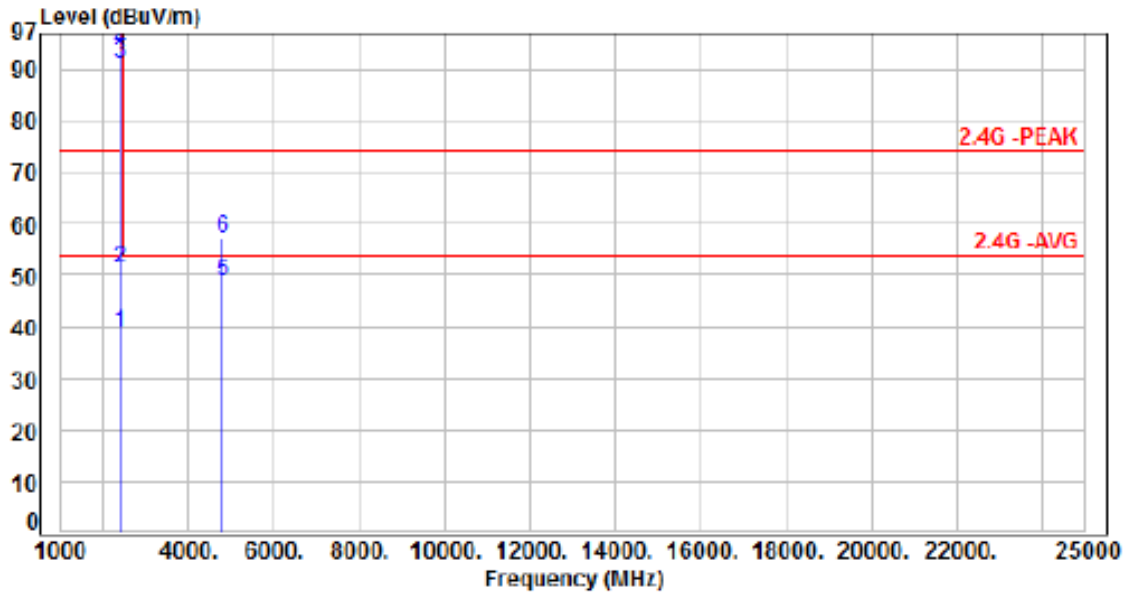


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.22	42.02	38.80	54.00	-15.20	Average	110	6	P
2	2390.00	-3.22	54.34	51.12	74.00	-22.88	Peak	110	6	P
3	2402.00	-3.37	94.43	91.06	200.00	-108.94	Average	110	6	P
4	2402.00	-3.37	97.00	93.63	200.00	-106.37	Peak	110	6	P
5	4804.00	5.17	43.48	48.65	54.00	-5.35	Average	143	238	P
6	4804.00	5.17	51.99	57.16	74.00	-16.84	Peak	143	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH00		:

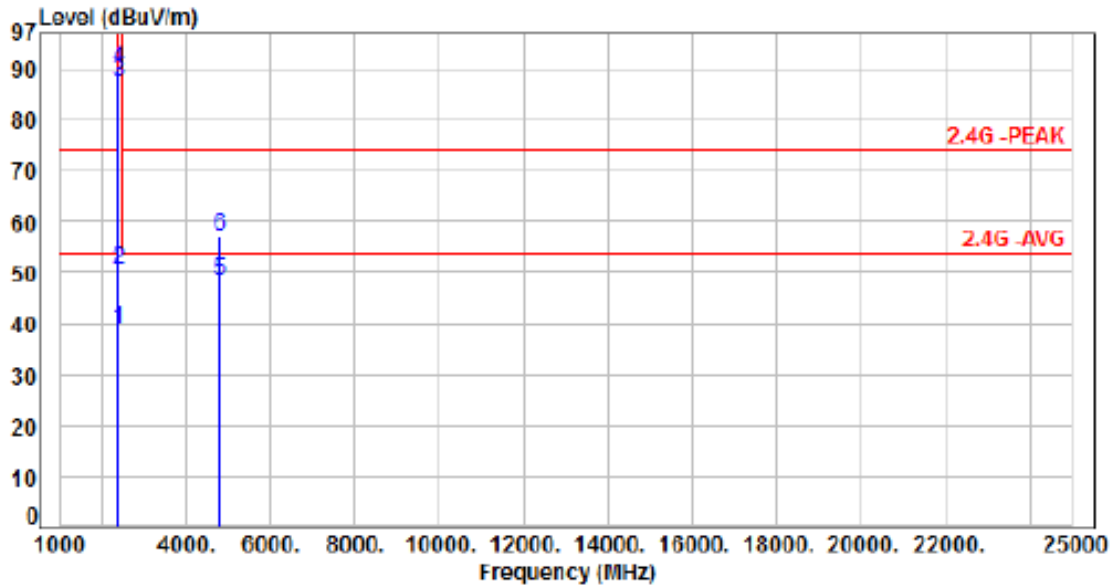


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.22	41.98	38.76	54.00	-15.24	Average	100	342	P
2	2390.00	-3.22	53.84	50.62	74.00	-23.38	Peak	100	342	P
3	2402.00	-3.37	90.80	87.43	200.00	-112.57	Average	100	342	P
4	2402.00	-3.37	93.44	90.07	200.00	-109.93	Peak	100	342	P
5	4804.00	5.17	43.05	48.22	54.00	-5.78	Average	381	182	P
6	4804.00	5.17	51.88	57.05	74.00	-16.95	Peak	381	182	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH19		:

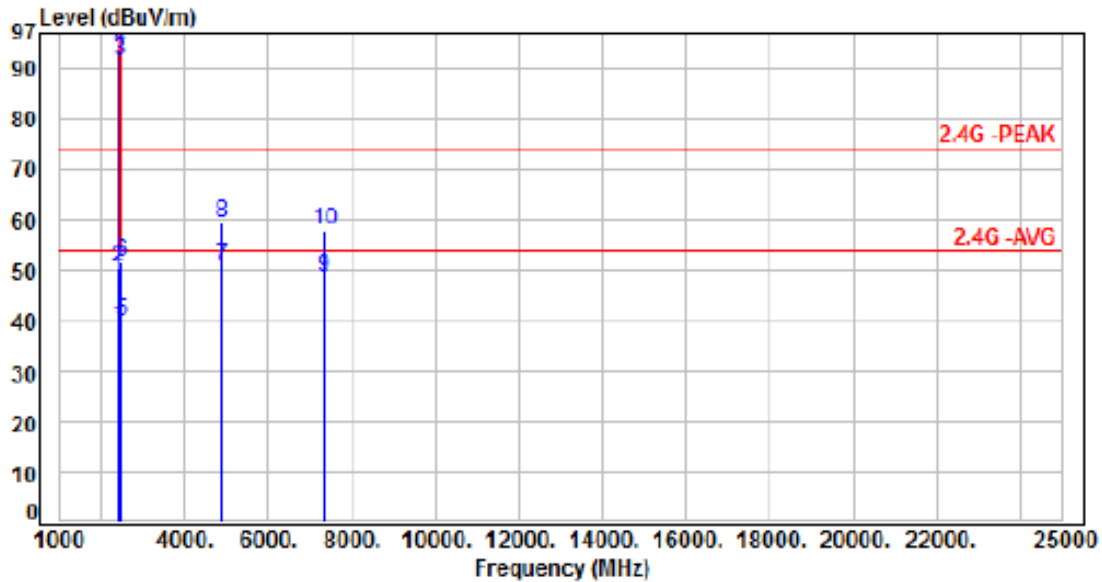


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.22	41.88	38.66	54.00	-15.34	Average	135	15	P
2	2390.00	-3.22	53.80	50.58	74.00	-23.42	Peak	135	15	P
3	2440.00	-2.65	94.28	91.63	200.00	-108.37	Average	135	15	P
4	2440.00	-2.65	96.79	94.14	200.00	-105.86	Peak	135	15	P
5	2483.50	-2.35	42.14	39.79	54.00	-14.21	Average	135	15	P
6	2483.50	-2.35	53.91	51.56	74.00	-22.44	Peak	135	15	P
7	4880.00	5.50	45.37	50.87	54.00	-3.13	Average	122	240	P
8	4880.00	5.50	53.72	59.22	74.00	-14.78	Peak	122	240	P
9	7320.00	10.42	38.21	48.63	54.00	-5.37	Average	114	297	P
10	7320.00	10.42	47.33	57.75	74.00	-16.25	Peak	114	297	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH19		:

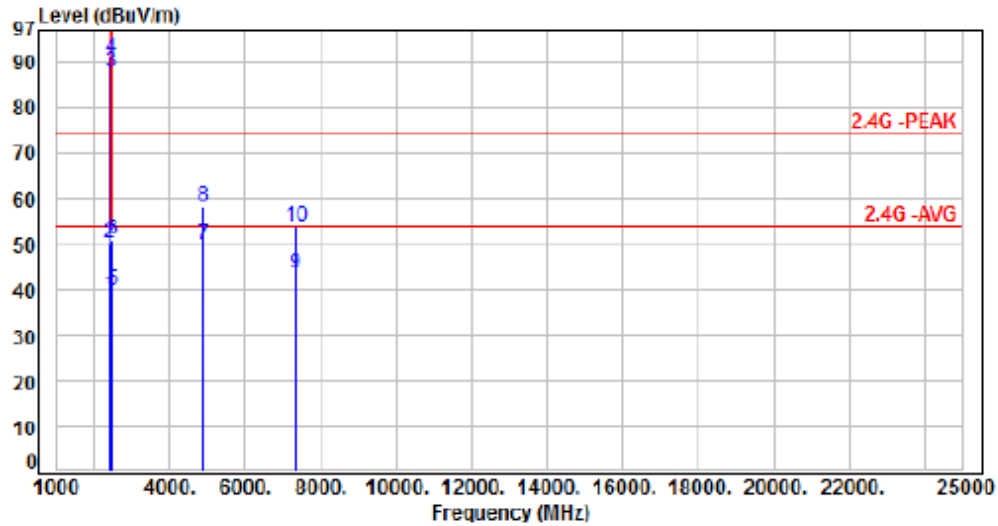


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.22	42.02	38.80	54.00	-15.20	Average	307	335	P
2	2390.00	-3.22	53.21	49.99	74.00	-24.01	Peak	307	335	P
3	2440.00	-2.65	90.53	87.88	200.00	-112.12	Average	307	335	P
4	2440.00	-2.65	93.21	90.56	200.00	-109.44	Peak	307	335	P
5	2483.50	-2.35	42.07	39.72	54.00	-14.28	Average	307	335	P
6	2483.50	-2.35	53.27	50.92	74.00	-23.08	Peak	307	335	P
7	4880.00	5.50	44.39	49.89	54.00	-4.11	Average	395	190	P
8	4880.00	5.50	52.95	58.45	74.00	-15.55	Peak	395	190	P
9	7320.00	10.42	32.94	43.36	54.00	-10.64	Average	105	182	P
10	7320.00	10.42	43.48	53.90	74.00	-20.10	Peak	105	182	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH39		:

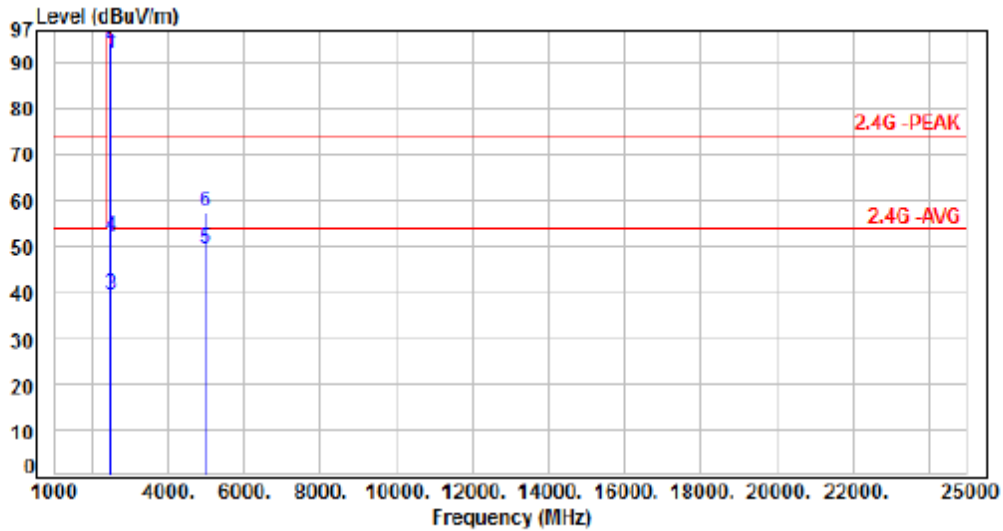


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-2.36	94.05	91.69	200.00	-108.31	Average	168	359	P
2	2480.00	-2.36	96.67	94.31	200.00	-105.69	Peak	168	359	P
3	2483.50	-2.35	41.92	39.57	54.00	-14.43	Average	168	359	P
4	2483.50	-2.35	54.51	52.16	74.00	-21.84	Peak	168	359	P
5	4960.00	5.64	43.84	49.48	54.00	-4.52	Average	312	321	P
6	4960.00	5.64	52.05	57.69	74.00	-16.31	Peak	312	321	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH39		:

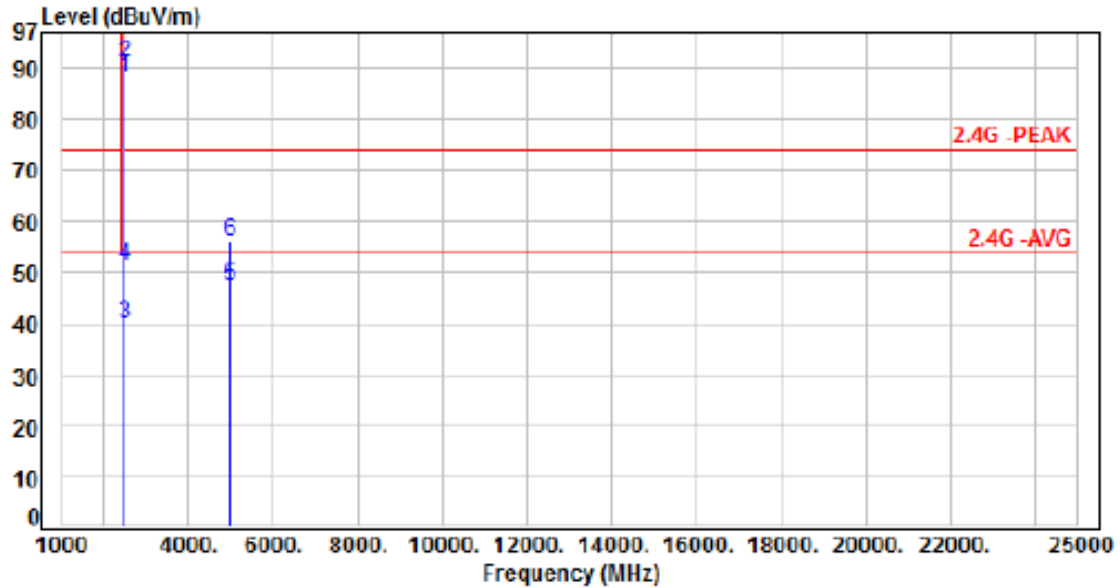

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-2.36	90.66	88.30	200.00	-111.70	Average	231	345	P
2	2480.00	-2.36	93.33	90.97	200.00	-109.03	Peak	231	345	P
3	2483.50	-2.35	42.14	39.79	54.00	-14.21	Average	231	345	P
4	2483.50	-2.35	53.44	51.09	74.00	-22.91	Peak	231	345	P
5	4960.00	5.64	41.64	47.28	54.00	-6.72	Average	132	193	P
6	4960.00	5.64	50.24	55.88	74.00	-18.12	Peak	132	193	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Spurious Emission (Conducted)

7.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 11.11.1


Below -30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.11.2 & 11.11.3

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 30dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

7.3 Test Setup Layout



7.4 Test Result and Data





Note: Test plots refer to the following pages.



Modulation Type: GFSK(1Mbps)
CH00







Modulation Type: GFSK(1Mbps)
CH19

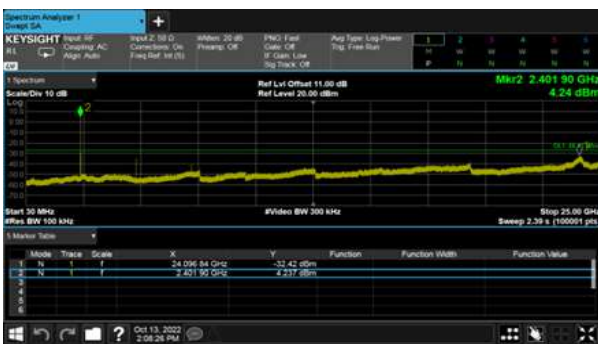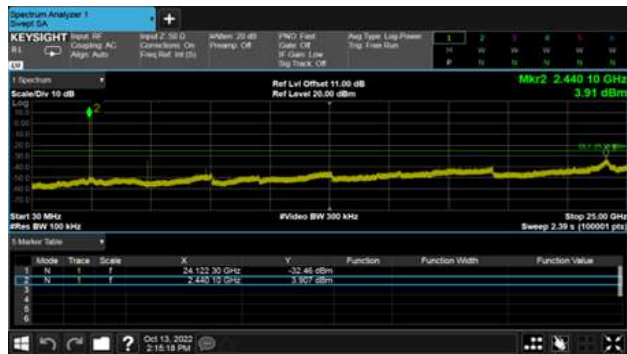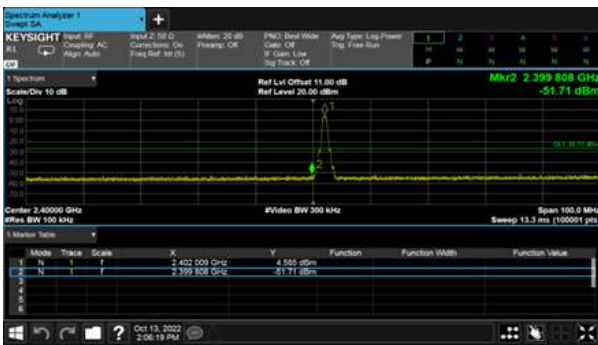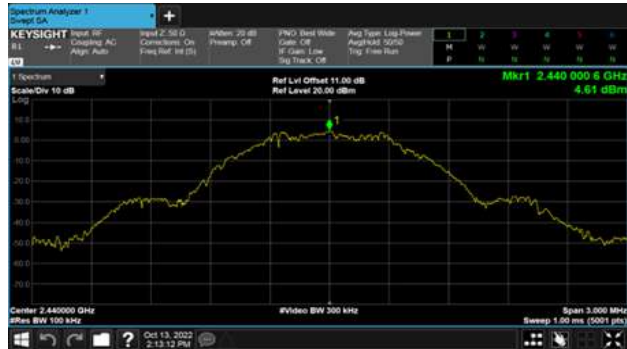






Modulation Type: GFSK(2Mbps)
CH00

Modulation Type: GFSK(2Mbps)
CH19

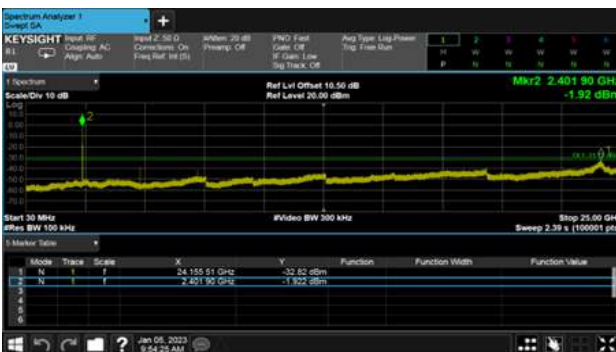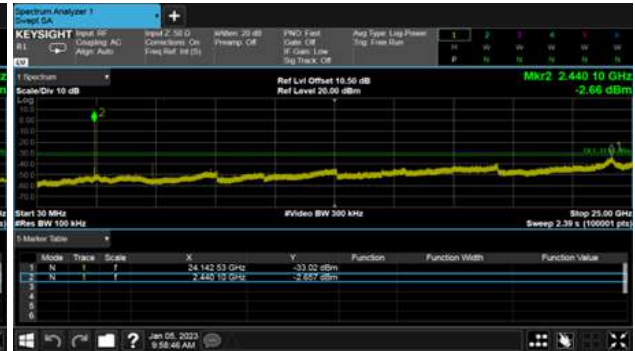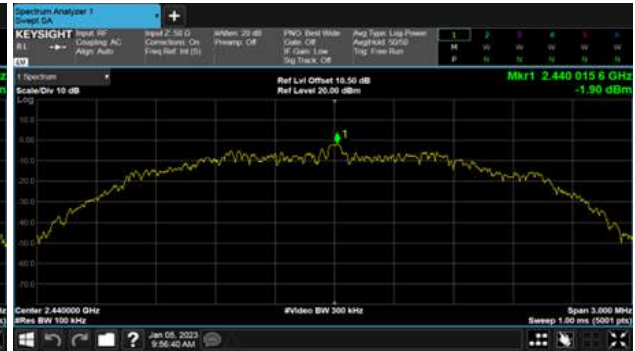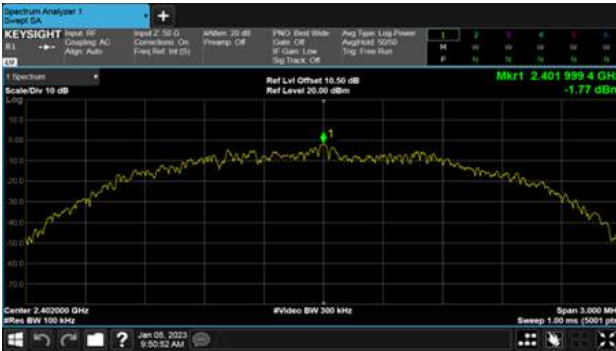



Modulation Type: GFSK(2Mbps)
CH39

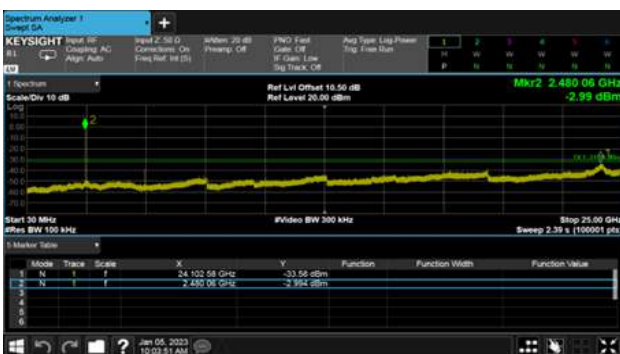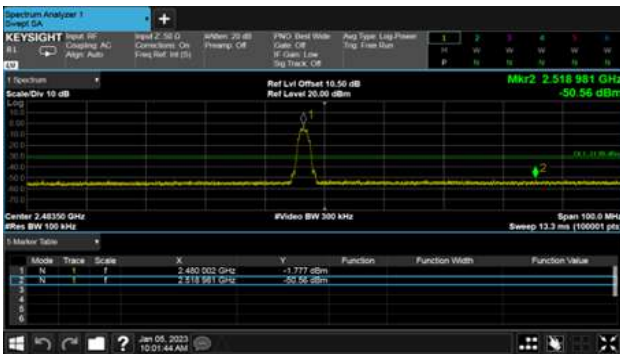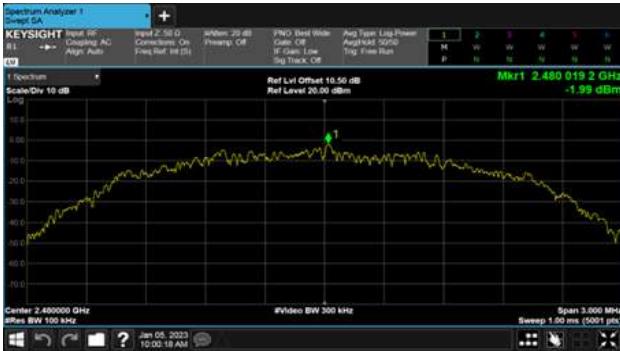



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.6
Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout



8.4 Test Result and Data

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
GFSK-1M	0.40	0.63	63.14%
GFSK-2M	0.21	0.63	33.60%



Modulation Type: GFSK(1Mbps)

Modulation Type: GFSK(2Mbps)





9. 6dB Bandwidth Measurement Data

9.1 Test Limit


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.8

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout




9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK(1Mbps)	0	2402	680.80	500
	19	2440	680.30	500
	39	2480	681.00	500


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK(2Mbps)	0	2402	1164.00	500
	19	2440	1162.00	500
	39	2480	1169.00	500



Modulation Type: GFSK(1Mbps)
CH00

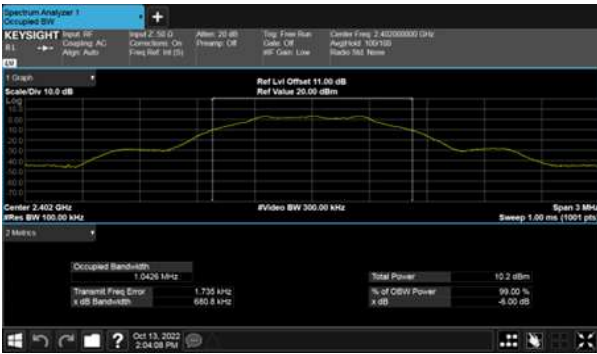

Modulation Type: GFSK(2Mbps)
CH00

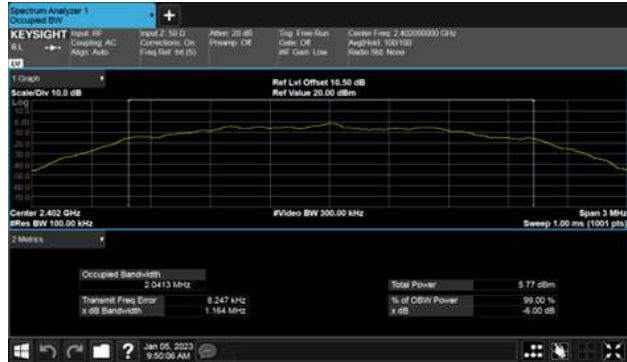


Modulation Type: GFSK(1Mbps)
CH19



Modulation Type: GFSK(2Mbps)
CH19



Modulation Type: GFSK(1Mbps)
CH39

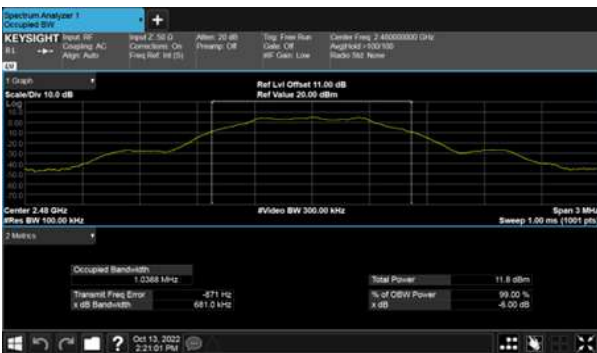

Modulation Type: GFSK(2Mbps)
CH39





10. Maximum Average Output Power

10.1 Test Limit


The Maximum Output Power Measurement is 30dBm.

10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.9.2.3.2

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



10.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)	Power Output (mW)
			Average	Average
GFSK (1Mbps)	0	2402	-0.75	0.841
	19	2440	-1.04	0.787
	39	2480	-0.67	0.857

Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)	Power Output (mW)
			Average	Average
GFSK (2Mbps)	0	2402	-1.42	0.721
	19	2440	-1.43	0.719
	39	2480	-1.55	0.700



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.10.1

11.3 Test Setup Layout




11.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 10KHz Bandwidth(dBm)	Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit
GFSK(1Mbps)	0	2402	-12.671	-12.67	2.00	-10.67	8.00
	19	2440	-11.126	-11.13	2.00	-9.13	8.00
	39	2480	-10.888	-10.89	2.00	-8.89	8.00


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 10KHz Bandwidth(dBm)	Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit
GFSK(2Mbps)	0	2402	-21.265	-21.27	4.74	-16.53	8.00
	19	2440	-21.764	-21.76	4.74	-17.03	8.00
	39	2480	-21.508	-21.51	4.74	-16.77	8.00



Modulation Type: GFSK(1Mbps)
CH00

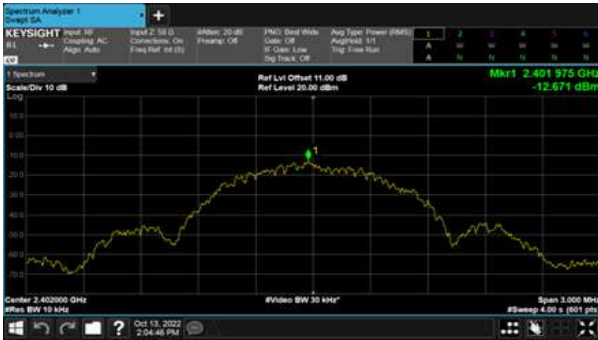

Modulation Type: GFSK(2Mbps)
CH00

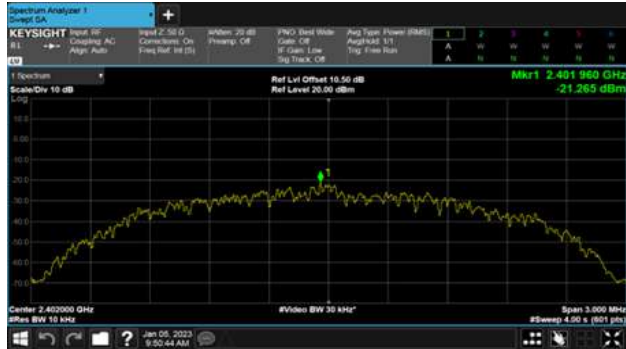


Modulation Type: GFSK(1Mbps)
CH19



Modulation Type: GFSK(2Mbps)
CH19



Modulation Type: GFSK(1Mbps)
CH39

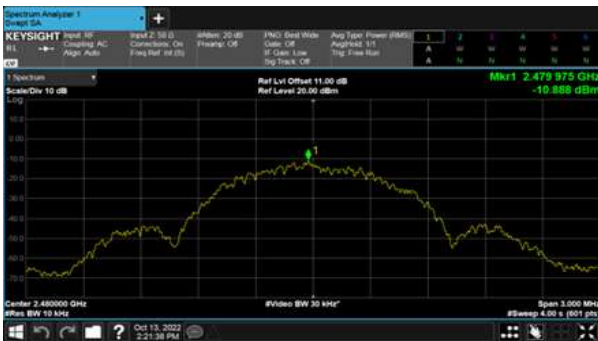

Modulation Type: GFSK(2Mbps)
CH39

