




Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 4, CH157		

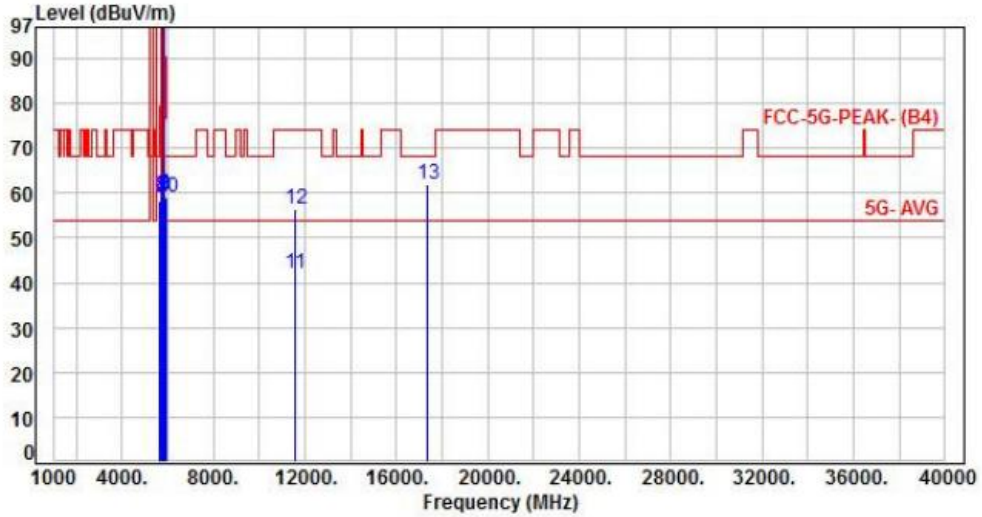


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	53.04	58.23	68.20	-9.97	Peak	152	0	P
2	5700.00	5.22	53.67	58.89	105.20	-46.31	Peak	152	0	P
3	5720.00	5.27	54.29	59.56	110.80	-51.24	Peak	152	0	P
4	5725.00	5.29	53.66	58.95	122.20	-63.25	Peak	152	0	P
5	5785.00	5.30	98.05	103.35	200.00	-96.65	Average	152	0	P
6	5785.00	5.30	109.02	114.32	200.00	-85.68	Peak	152	0	P
7	5850.00	5.41	53.62	59.03	122.20	-63.17	Peak	152	0	P
8	5855.00	5.42	53.85	59.27	110.80	-51.53	Peak	152	0	P
9	5875.00	5.46	54.35	59.81	105.20	-45.39	Peak	152	0	P
10	5925.00	5.59	53.44	59.03	68.20	-9.17	Peak	152	0	P
11	11570.00	13.50	28.66	42.16	54.00	-11.84	Average	100	40	P
12	11570.00	13.50	42.99	56.49	74.00	-17.51	Peak	100	40	P
13	17355.00	19.26	42.67	61.93	68.20	-6.27	Peak	100	82	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	:	DC 56V From POE (120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, Band 4, CH165		:	

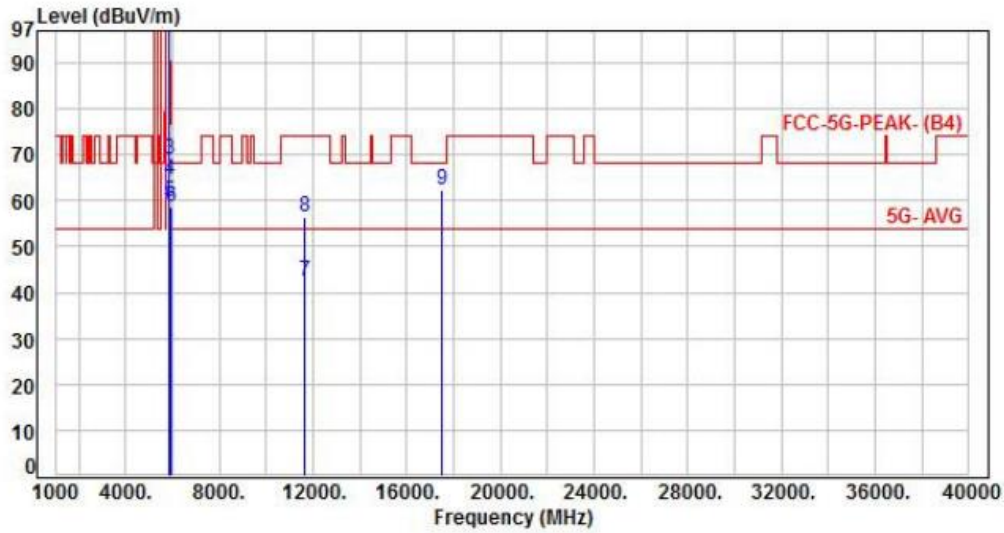


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	5.34	98.58	103.92	200.00	-96.08	Average	213	358	P
2	5825.00	5.34	109.67	115.01	200.00	-84.99	Peak	213	358	P
3	5850.00	5.41	63.43	68.84	122.20	-53.36	Peak	213	358	P
4	5855.00	5.42	58.98	64.40	110.80	-46.40	Peak	213	358	P
5	5875.00	5.46	54.17	59.63	105.20	-45.57	Peak	213	358	P
6	5925.00	5.59	53.06	58.65	68.20	-9.55	Peak	213	358	P
7	11650.00	13.63	28.76	42.39	54.00	-11.61	Average	100	324	P
8	11650.00	13.63	42.87	56.50	74.00	-17.50	Peak	100	324	P
9	17475.00	20.17	42.33	62.50	68.20	-5.70	Peak	100	244	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 4, CH165		

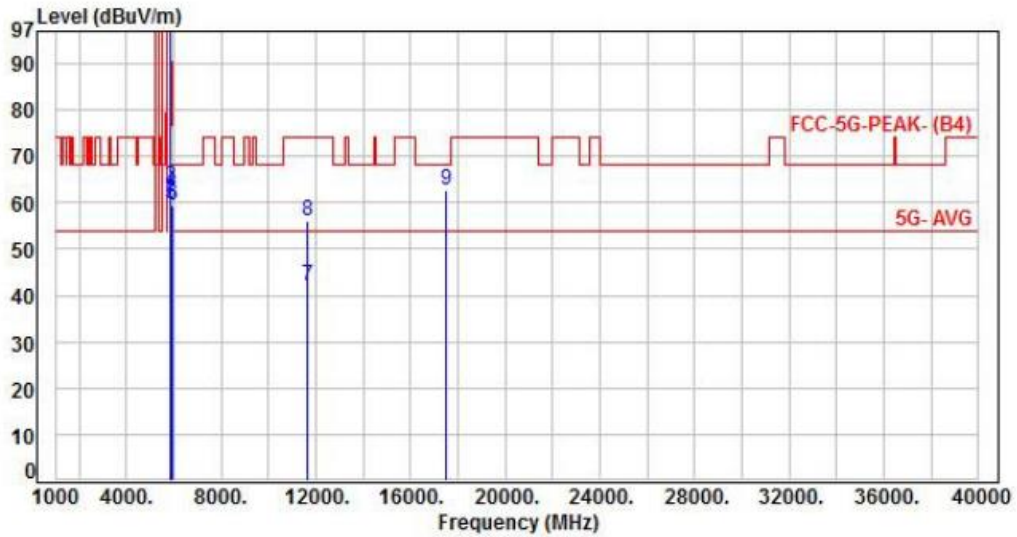


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	5.34	97.07	102.41	200.00	-97.59	Average	159	4	P
2	5825.00	5.34	107.89	113.23	200.00	-86.77	Peak	159	4	P
3	5850.00	5.41	57.86	63.27	122.20	-58.93	Peak	159	4	P
4	5855.00	5.42	56.89	62.31	110.80	-48.49	Peak	159	4	P
5	5875.00	5.46	54.30	59.76	105.20	-45.44	Peak	159	4	P
6	5925.00	5.59	53.94	59.53	68.20	-8.67	Peak	159	4	P
7	11650.00	13.63	28.43	42.06	54.00	-11.94	Average	100	41	P
8	11650.00	13.63	42.37	56.00	74.00	-18.00	Peak	100	41	P
9	17475.00	20.17	42.39	62.56	68.20	-5.64	Peak	100	73	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	:	DC 56V From POE (120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 5, Band 4, CH151		:	

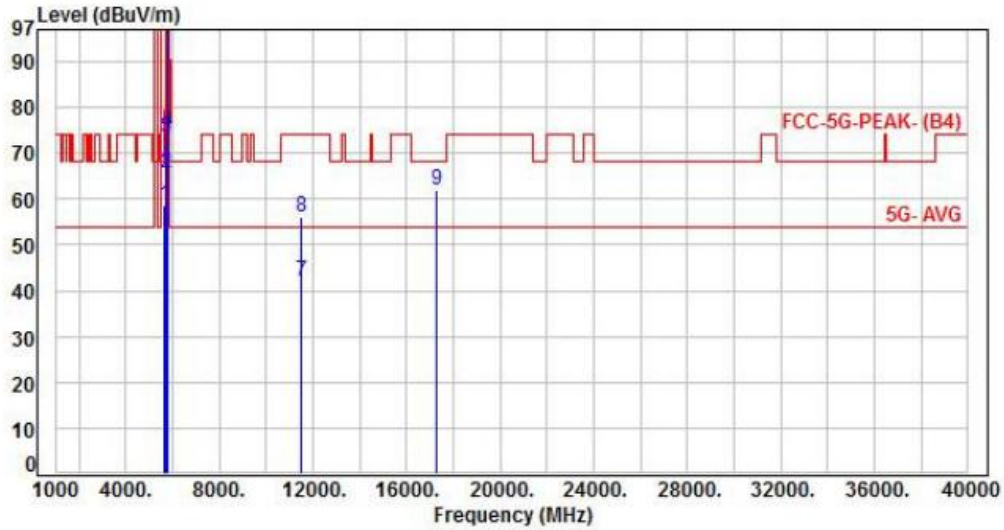


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	53.53	58.72	68.20	-9.48	Peak	211	358	P
2	5700.00	5.22	60.53	65.75	105.20	-39.45	Peak	211	358	P
3	5720.00	5.27	67.97	73.24	110.80	-37.56	Peak	211	358	P
4	5725.00	5.29	69.07	74.36	122.20	-47.84	Peak	211	358	P
5	5755.00	5.34	95.28	100.62	200.00	-99.38	Average	211	358	P
6	5755.00	5.34	105.76	111.10	200.00	-88.90	Peak	211	358	P
7	11510.00	13.32	28.85	42.17	54.00	-11.83	Average	100	315	P
8	11510.00	13.32	42.90	56.22	74.00	-17.78	Peak	100	315	P
9	17265.00	18.82	43.17	61.99	68.20	-6.21	Peak	100	248	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	:	DC 56V From POE (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 5, Band 4, CH151		:	

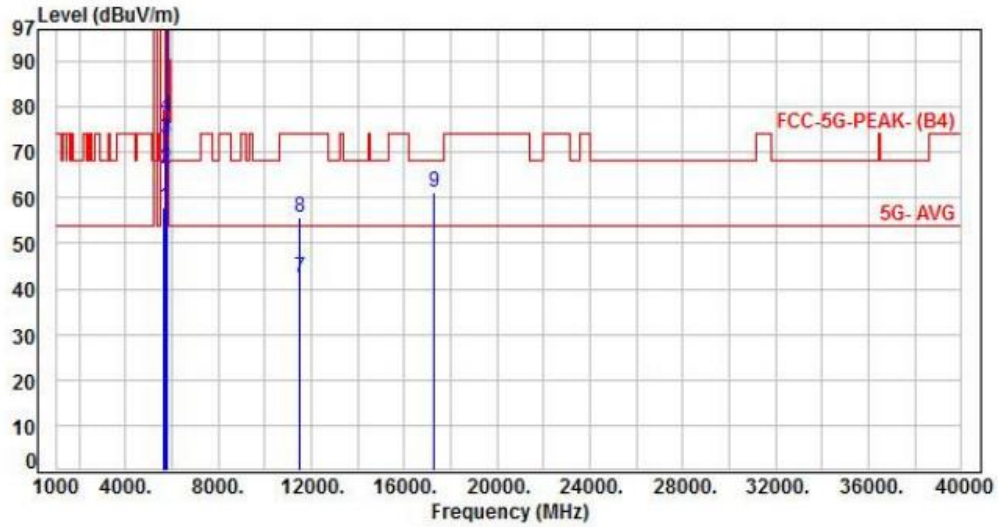


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	52.64	57.83	68.20	-10.37	Peak	132	3	P
2	5700.00	5.22	61.17	66.39	105.20	-38.81	Peak	132	3	P
3	5720.00	5.27	67.59	72.86	110.80	-37.94	Peak	132	3	P
4	5725.00	5.29	72.53	77.82	122.20	-44.38	Peak	132	3	P
5	5755.00	5.34	94.55	99.89	200.00	-100.11	Average	132	3	P
6	5755.00	5.34	105.40	110.74	200.00	-89.26	Peak	132	3	P
7	11510.00	13.32	29.08	42.40	54.00	-11.60	Average	100	41	P
8	11510.00	13.32	42.39	55.71	74.00	-18.29	Peak	100	41	P
9	17265.00	18.82	42.59	61.41	68.20	-6.79	Peak	100	76	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 4, CH159		

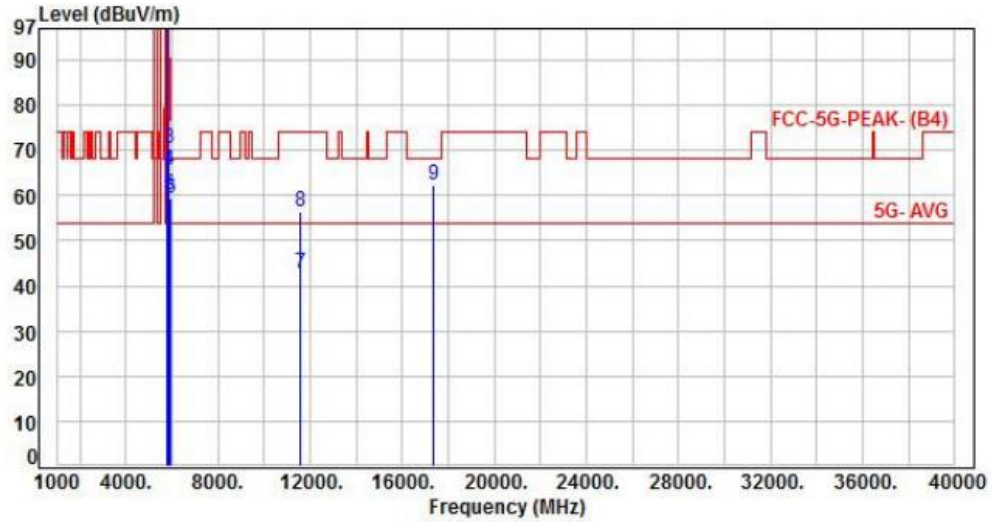


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	5.29	95.68	100.97	200.00	-99.03	Average	206	359	P
2	5795.00	5.29	106.39	111.68	200.00	-88.32	Peak	206	359	P
3	5850.00	5.41	65.10	70.51	122.20	-51.69	Peak	206	359	P
4	5855.00	5.42	60.10	65.52	110.80	-45.28	Peak	206	359	P
5	5875.00	5.46	54.66	60.12	105.20	-45.08	Peak	206	359	P
6	5925.00	5.59	53.71	59.30	68.20	-8.90	Peak	206	359	P
7	11590.00	13.55	29.05	42.60	54.00	-11.40	Average	100	316	P
8	11590.00	13.55	42.77	56.32	74.00	-17.68	Peak	100	316	P
9	17385.00	19.39	42.94	62.33	68.20	-5.87	Peak	100	247	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 4, CH159		

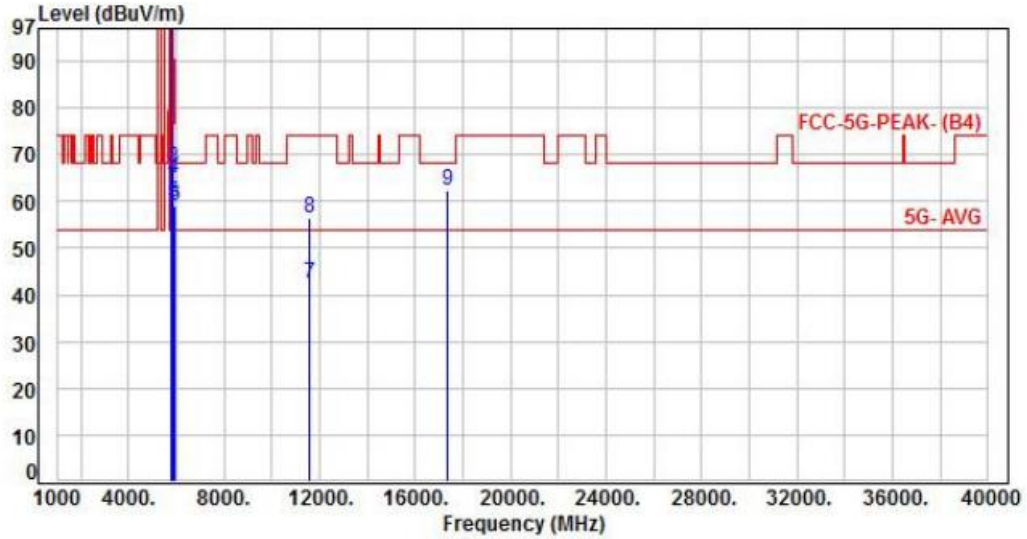


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	5.29	94.45	99.74	200.00	-100.26	Average	149	2	P
2	5795.00	5.29	105.16	110.45	200.00	-89.55	Peak	149	2	P
3	5850.00	5.41	61.73	67.14	122.20	-55.06	Peak	149	2	P
4	5855.00	5.42	59.31	64.73	110.80	-46.07	Peak	149	2	P
5	5875.00	5.46	54.30	59.76	105.20	-45.44	Peak	149	2	P
6	5925.00	5.59	53.50	59.09	68.20	-9.11	Peak	149	2	P
7	11590.00	13.55	28.69	42.24	54.00	-11.76	Average	100	33	P
8	11590.00	13.55	42.74	56.29	74.00	-17.71	Peak	100	33	P
9	17385.00	19.39	42.85	62.24	68.20	-5.96	Peak	100	79	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	:	DC 56V From POE (120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 6, Band 4, CH155		:	

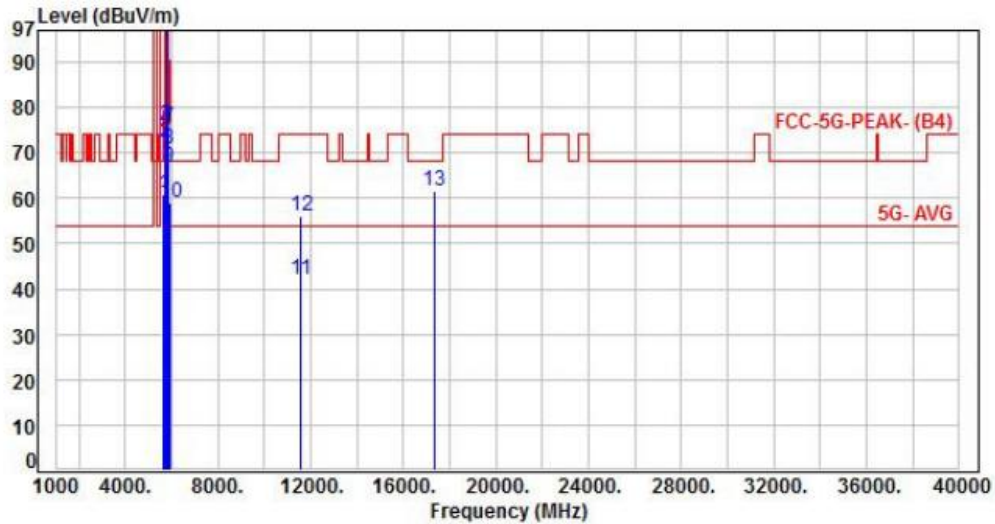


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	55.56	60.75	68.20	-7.45	Peak	187	358	P
2	5700.00	5.22	67.05	72.27	105.20	-32.93	Peak	187	358	P
3	5720.00	5.27	70.78	76.05	110.80	-34.75	Peak	187	358	P
4	5725.00	5.29	70.11	75.40	122.20	-46.80	Peak	187	358	P
5	5775.00	5.31	91.83	97.14	200.00	-102.86	Average	187	358	P
6	5775.00	5.31	102.46	107.77	200.00	-92.23	Peak	187	358	P
7	5850.00	5.41	70.20	75.61	122.20	-46.59	Peak	187	358	P
8	5855.00	5.42	65.22	70.64	110.80	-40.16	Peak	187	358	P
9	5875.00	5.46	61.21	66.67	105.20	-38.53	Peak	187	358	P
10	5925.00	5.59	53.37	58.96	68.20	-9.24	Peak	187	358	P
11	11550.00	13.44	28.72	42.16	54.00	-11.84	Average	100	317	P
12	11550.00	13.44	42.65	56.09	74.00	-17.91	Peak	100	317	P
13	17325.00	19.12	42.61	61.73	68.20	-6.47	Peak	100	244	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 4, CH155		

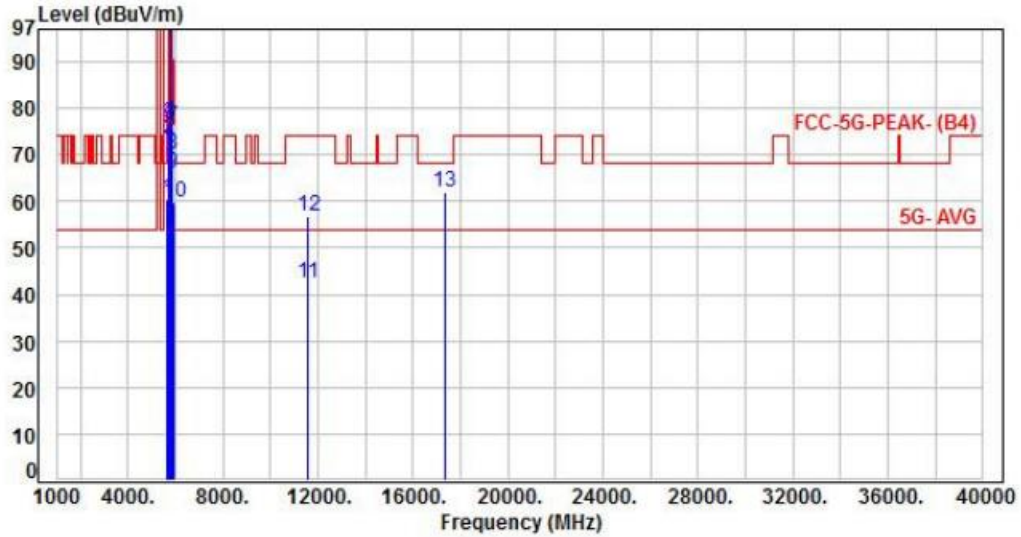


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	55.27	60.46	68.20	-7.74	Peak	161	3	P
2	5700.00	5.22	68.21	73.43	105.20	-31.77	Peak	161	3	P
3	5720.00	5.27	71.38	76.65	110.80	-34.15	Peak	161	3	P
4	5725.00	5.29	71.98	77.27	122.20	-44.93	Peak	161	3	P
5	5775.00	5.31	91.40	96.71	200.00	-103.29	Average	161	3	P
6	5775.00	5.31	102.03	107.34	200.00	-92.66	Peak	161	3	P
7	5850.00	5.41	70.59	76.00	122.20	-46.20	Peak	161	3	P
8	5855.00	5.42	64.73	70.15	110.80	-40.65	Peak	161	3	P
9	5875.00	5.46	60.50	65.96	105.20	-39.24	Peak	161	3	P
10	5925.00	5.59	54.01	59.60	68.20	-8.60	Peak	161	3	P
11	11550.00	13.44	28.85	42.29	54.00	-11.71	Average	100	43	P
12	11550.00	13.44	43.38	56.82	74.00	-17.18	Peak	100	43	P
13	17325.00	19.12	42.94	62.06	68.20	-6.14	Peak	100	80	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 4, CH149		

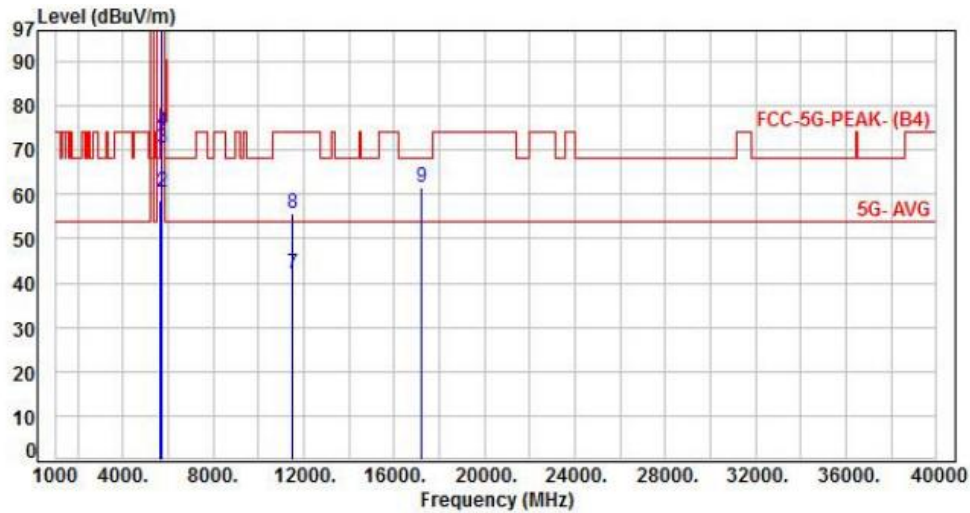


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	53.53	58.72	68.20	-9.48	Peak	196	356	P
2	5700.00	5.22	55.24	60.46	105.20	-44.74	Peak	196	356	P
3	5720.00	5.27	65.33	70.60	110.80	-40.20	Peak	196	356	P
4	5725.00	5.29	68.69	73.98	122.20	-48.22	Peak	196	356	P
5	5745.00	5.34	97.29	102.63	200.00	-97.37	Average	196	356	P
6	5745.00	5.34	110.13	115.47	200.00	-84.53	Peak	196	356	P
7	11490.00	13.28	28.82	42.10	54.00	-11.90	Average	100	322	P
8	11490.00	13.28	42.46	55.74	74.00	-18.26	Peak	100	322	P
9	17235.00	18.66	42.96	61.62	68.20	-6.58	Peak	100	248	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 4, CH149		

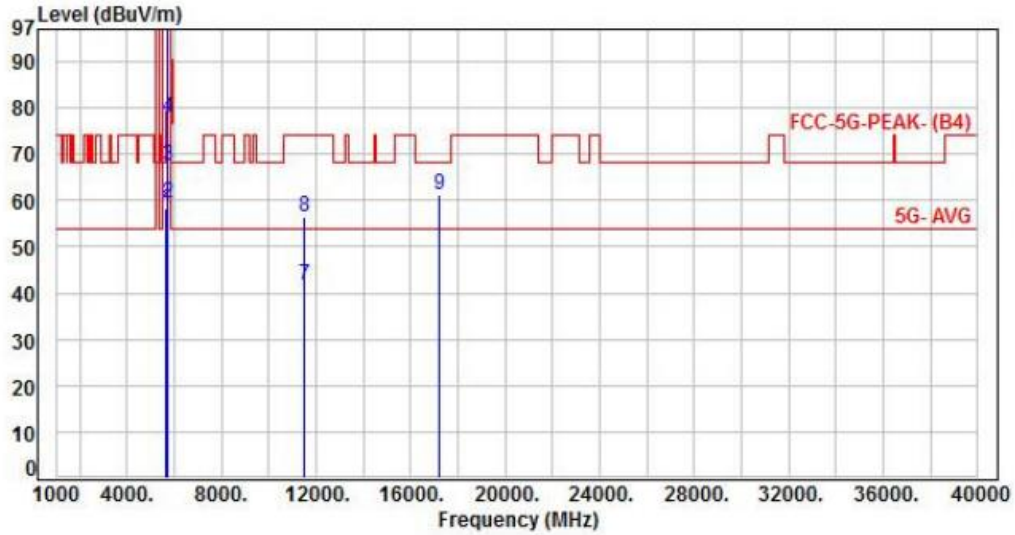


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	53.26	58.45	68.20	-9.75	Peak	136	6	P
2	5700.00	5.22	54.16	59.38	105.20	-45.82	Peak	136	6	P
3	5720.00	5.27	62.20	67.47	110.80	-43.33	Peak	136	6	P
4	5725.00	5.29	72.55	77.84	122.20	-44.36	Peak	136	6	P
5	5745.00	5.34	96.83	102.17	200.00	-97.83	Average	136	6	P
6	5745.00	5.34	110.03	115.37	200.00	-84.63	Peak	136	6	P
7	11490.00	13.28	28.42	41.70	54.00	-12.30	Average	100	43	P
8	11490.00	13.28	42.97	56.25	74.00	-17.75	Peak	100	43	P
9	17235.00	18.66	42.59	61.25	68.20	-6.95	Peak	100	77	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 4, CH157		

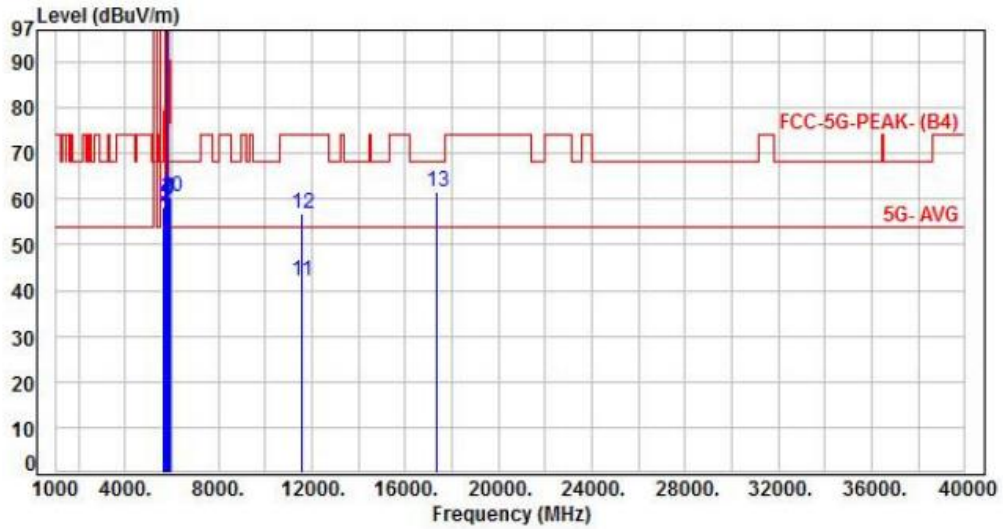


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	53.17	58.36	68.20	-9.84	Peak	207	359	P
2	5700.00	5.22	53.06	58.28	105.20	-46.92	Peak	207	359	P
3	5720.00	5.27	53.47	58.74	110.80	-52.06	Peak	207	359	P
4	5725.00	5.29	54.29	59.58	122.20	-62.62	Peak	207	359	P
5	5785.00	5.30	98.35	103.65	200.00	-96.35	Average	207	359	P
6	5785.00	5.30	111.40	116.70	200.00	-83.30	Peak	207	359	P
7	5850.00	5.41	54.54	59.95	122.20	-62.25	Peak	207	359	P
8	5855.00	5.42	54.57	59.99	110.80	-50.81	Peak	207	359	P
9	5875.00	5.46	54.10	59.56	105.20	-45.64	Peak	207	359	P
10	5925.00	5.59	54.92	60.51	68.20	-7.69	Peak	207	359	P
11	11570.00	13.50	28.51	42.01	54.00	-11.99	Average	100	311	P
12	11570.00	13.50	43.31	56.81	74.00	-17.19	Peak	100	311	P
13	17355.00	19.26	42.41	61.67	68.20	-6.53	Peak	100	247	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 4, CH157		

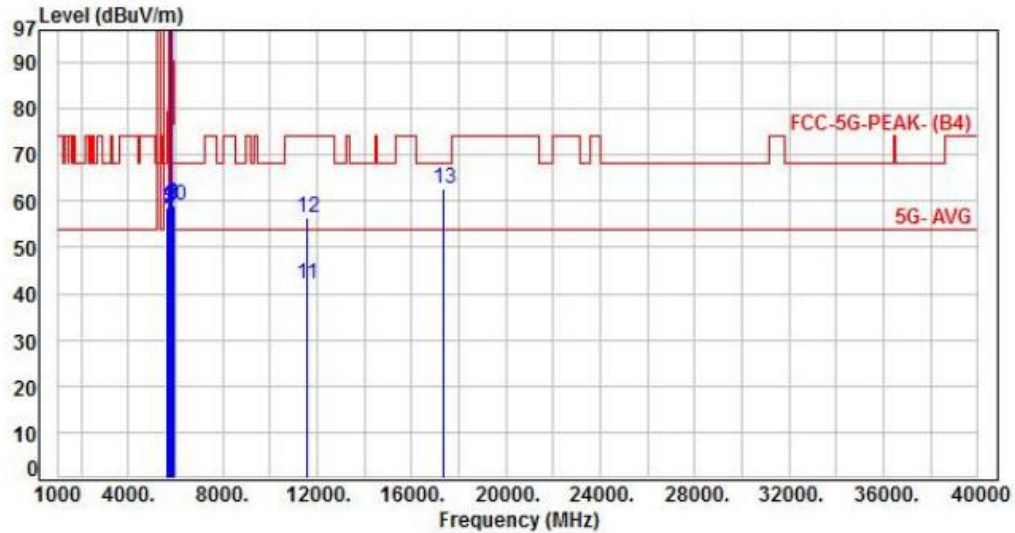


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	53.50	58.69	68.20	-9.51	Peak	131	2	P
2	5700.00	5.22	53.04	58.26	105.20	-46.94	Peak	131	2	P
3	5720.00	5.27	53.53	58.80	110.80	-52.00	Peak	131	2	P
4	5725.00	5.29	54.13	59.42	122.20	-62.78	Peak	131	2	P
5	5785.00	5.30	97.12	102.42	200.00	-97.58	Average	131	2	P
6	5785.00	5.30	110.78	116.08	200.00	-83.92	Peak	131	2	P
7	5850.00	5.41	53.70	59.11	122.20	-63.09	Peak	131	2	P
8	5855.00	5.42	53.57	58.99	110.80	-51.81	Peak	131	2	P
9	5875.00	5.46	53.96	59.42	105.20	-45.78	Peak	131	2	P
10	5925.00	5.59	53.43	59.02	68.20	-9.18	Peak	131	2	P
11	11570.00	13.50	28.65	42.15	54.00	-11.85	Average	100	35	P
12	11570.00	13.50	42.95	56.45	74.00	-17.55	Peak	100	35	P
13	17355.00	19.26	43.26	62.52	68.20	-5.68	Peak	100	79	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 4, CH165		

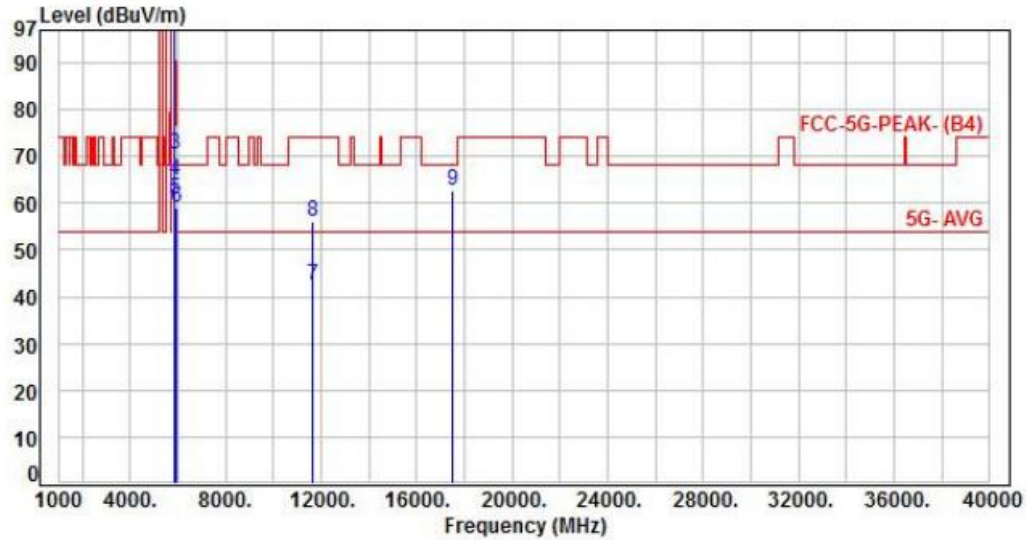


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	5.34	97.92	103.26	200.00	-96.74	Average	215	359	P
2	5825.00	5.34	111.38	116.72	200.00	-83.28	Peak	215	359	P
3	5850.00	5.41	64.92	70.33	122.20	-51.87	Peak	215	359	P
4	5855.00	5.42	59.34	64.76	110.80	-46.04	Peak	215	359	P
5	5875.00	5.46	55.30	60.76	105.20	-44.44	Peak	215	359	P
6	5925.00	5.59	53.52	59.11	68.20	-9.09	Peak	215	359	P
7	11650.00	13.63	28.71	42.34	54.00	-11.66	Average	100	320	P
8	11650.00	13.63	42.54	56.17	74.00	-17.83	Peak	100	320	P
9	17475.00	20.17	42.63	62.80	68.20	-5.40	Peak	100	246	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 4, CH165		

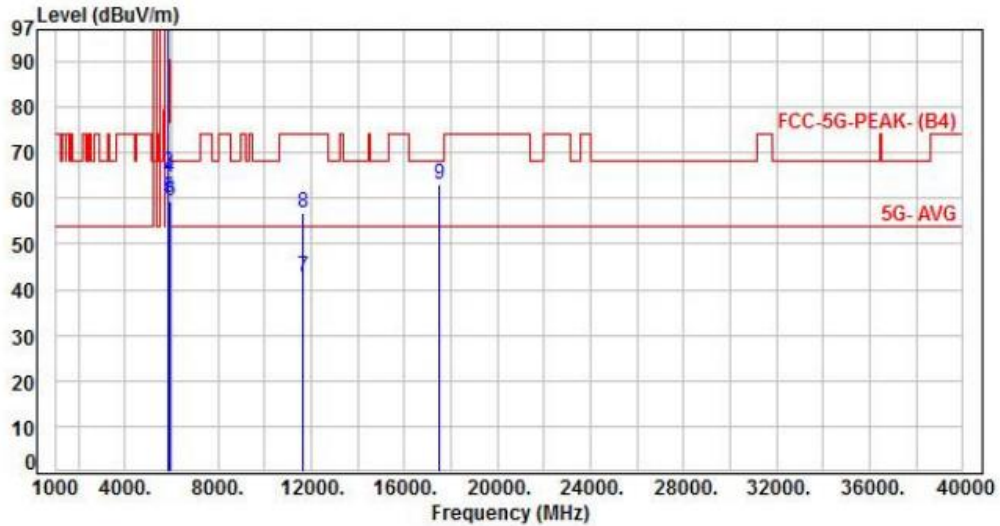


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	5.34	95.61	100.95	200.00	-99.05	Average	160	2	P
2	5825.00	5.34	109.53	114.87	200.00	-85.13	Peak	160	2	P
3	5850.00	5.41	60.08	65.49	122.20	-56.71	Peak	160	2	P
4	5855.00	5.42	59.27	64.69	110.80	-46.11	Peak	160	2	P
5	5875.00	5.46	54.78	60.24	105.20	-44.96	Peak	160	2	P
6	5925.00	5.59	53.75	59.34	68.20	-8.86	Peak	160	2	P
7	11650.00	13.63	29.12	42.75	54.00	-11.25	Average	100	35	P
8	11650.00	13.63	43.05	56.68	74.00	-17.32	Peak	100	35	P
9	17475.00	20.17	42.92	63.09	68.20	-5.11	Peak	100	80	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	:	DC 56V From POE (120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 8, Band 4, CH151		:	

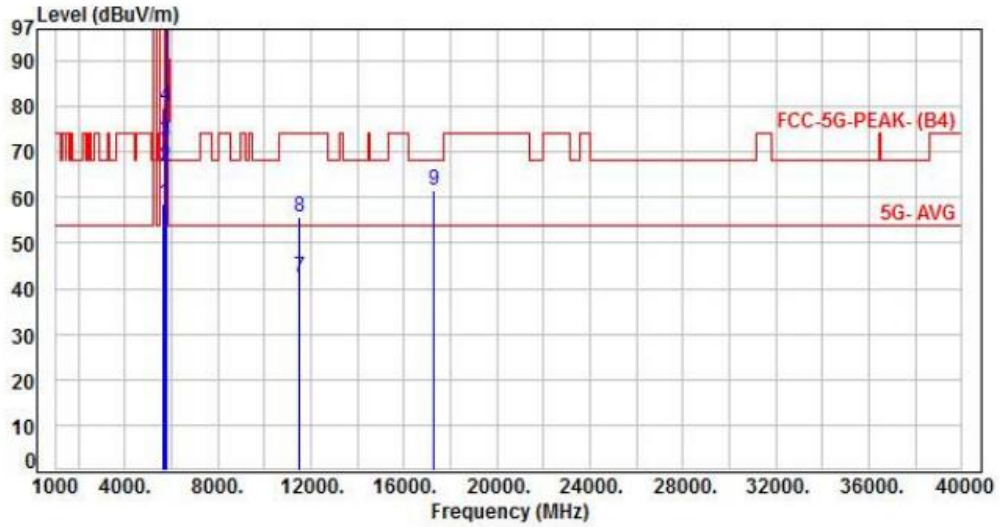


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	53.33	58.52	68.20	-9.68	Peak	212	360	P
2	5700.00	5.22	61.67	66.89	105.20	-38.31	Peak	212	360	P
3	5720.00	5.27	67.12	72.39	110.80	-38.41	Peak	212	360	P
4	5725.00	5.29	74.79	80.08	122.20	-42.12	Peak	212	360	P
5	5755.00	5.34	94.65	99.99	200.00	-100.01	Average	212	360	P
6	5755.00	5.34	107.45	112.79	200.00	-87.21	Peak	212	360	P
7	11510.00	13.32	28.94	42.26	54.00	-11.74	Average	100	319	P
8	11510.00	13.32	42.46	55.78	74.00	-18.22	Peak	100	319	P
9	17265.00	18.82	42.84	61.66	68.20	-6.54	Peak	100	247	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 4, CH151		

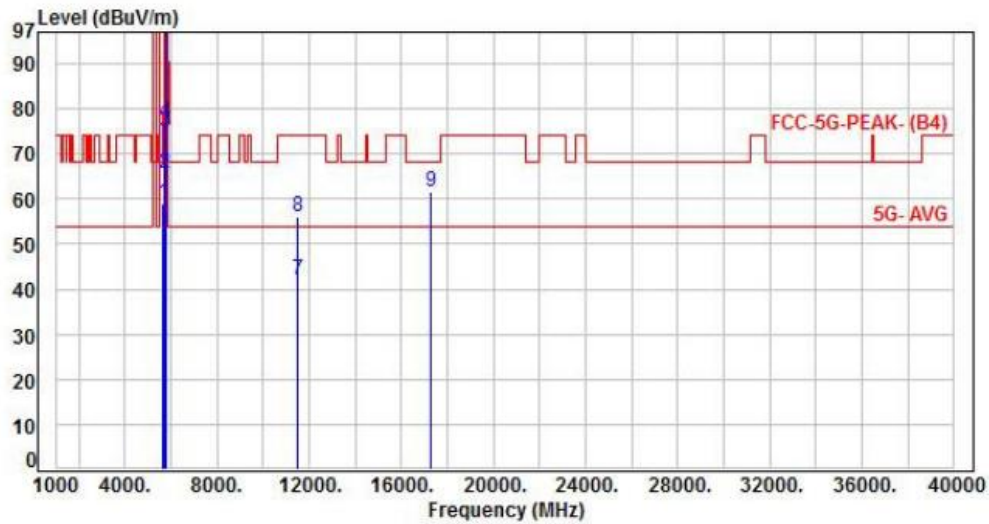


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	53.77	58.96	68.20	-9.24	Peak	167	1	P
2	5700.00	5.22	60.56	65.78	105.20	-39.42	Peak	167	1	P
3	5720.00	5.27	69.75	75.02	110.80	-35.78	Peak	167	1	P
4	5725.00	5.29	71.89	77.18	122.20	-45.02	Peak	167	1	P
5	5755.00	5.34	93.33	98.67	200.00	-101.33	Average	167	1	P
6	5755.00	5.34	106.72	112.06	200.00	-87.94	Peak	167	1	P
7	11510.00	13.32	28.56	41.88	54.00	-12.12	Average	100	42	P
8	11510.00	13.32	42.65	55.97	74.00	-18.03	Peak	100	42	P
9	17265.00	18.82	42.84	61.66	68.20	-6.54	Peak	100	81	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 4, CH159		

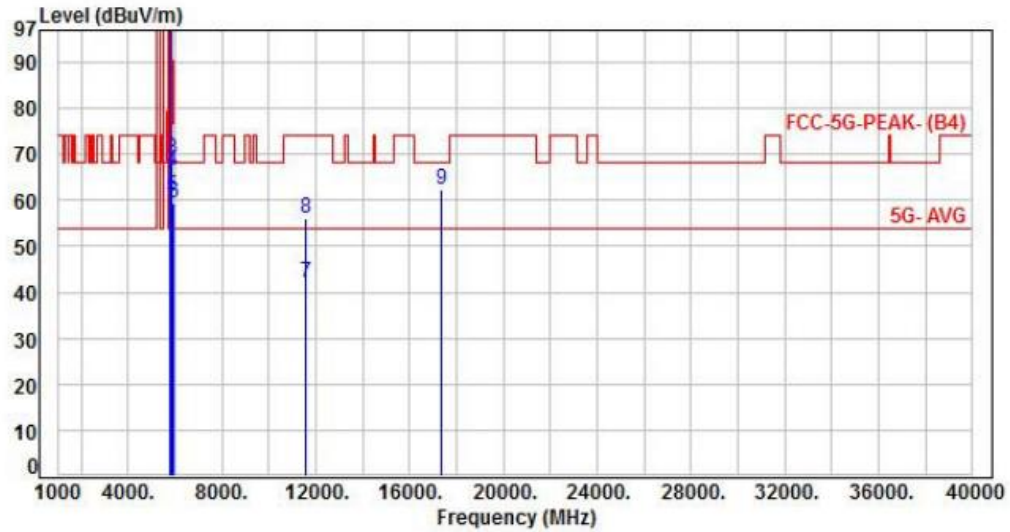


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	5.29	95.35	100.64	200.00	-99.36	Average	199	360	P
2	5795.00	5.29	107.82	113.11	200.00	-86.89	Peak	199	360	P
3	5850.00	5.41	63.65	69.06	122.20	-53.14	Peak	199	360	P
4	5855.00	5.42	60.92	66.34	110.80	-44.46	Peak	199	360	P
5	5875.00	5.46	55.33	60.79	105.20	-44.41	Peak	199	360	P
6	5925.00	5.59	53.97	59.56	68.20	-8.64	Peak	199	360	P
7	11590.00	13.55	28.66	42.21	54.00	-11.79	Average	100	315	P
8	11590.00	13.55	42.48	56.03	74.00	-17.97	Peak	100	315	P
9	17385.00	19.39	42.83	62.22	68.20	-5.98	Peak	100	240	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 4, CH159		

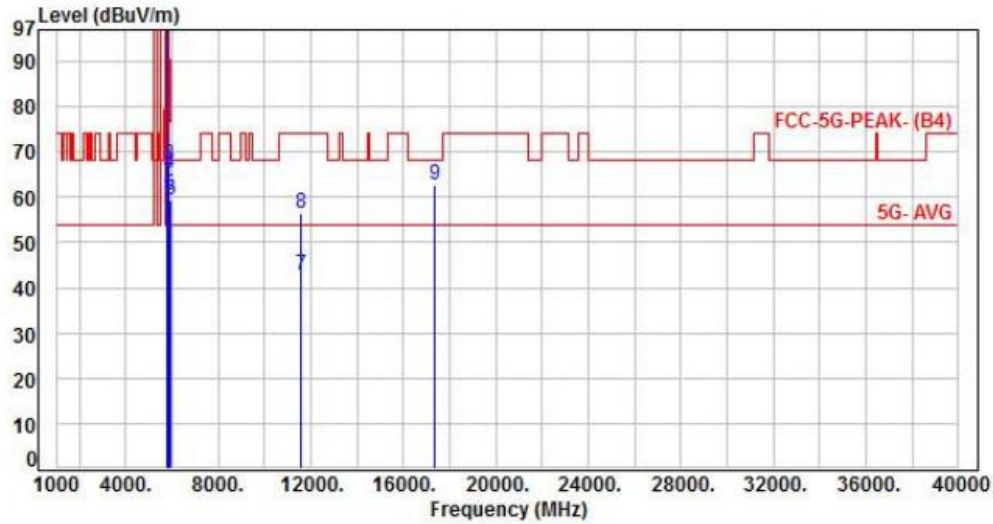


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	5.29	94.16	99.45	200.00	-100.55	Average	150	3	P
2	5795.00	5.29	108.30	113.59	200.00	-86.41	Peak	150	3	P
3	5850.00	5.41	61.61	67.02	122.20	-55.18	Peak	150	3	P
4	5855.00	5.42	59.80	65.22	110.80	-45.58	Peak	150	3	P
5	5875.00	5.46	54.94	60.40	105.20	-44.80	Peak	150	3	P
6	5925.00	5.59	53.74	59.33	68.20	-8.87	Peak	150	3	P
7	11590.00	13.55	29.12	42.67	54.00	-11.33	Average	100	33	P
8	11590.00	13.55	42.76	56.31	74.00	-17.69	Peak	100	33	P
9	17385.00	19.39	43.26	62.65	68.20	-5.55	Peak	100	78	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	:	DC 56V From POE (120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 9, Band 4, CH155		:	

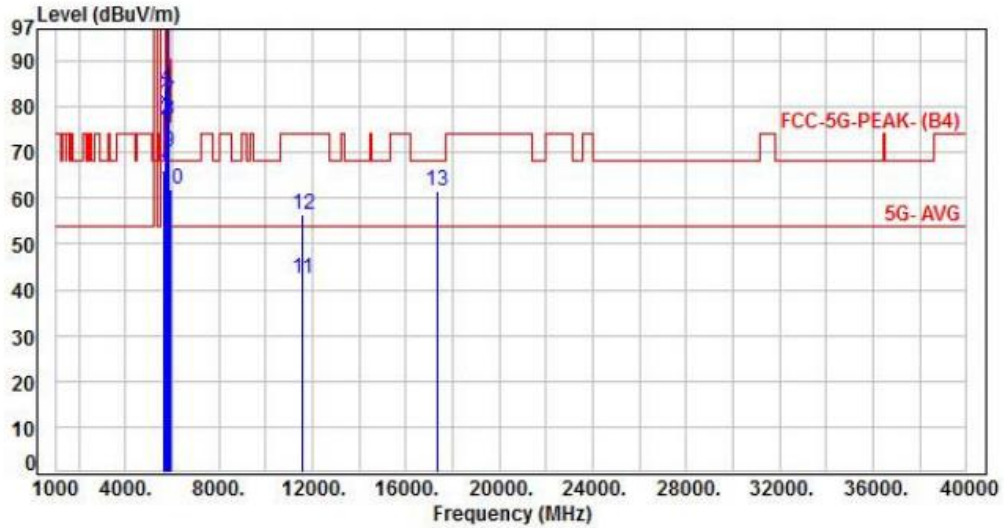


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	60.30	65.49	68.20	-2.71	Peak	207	359	P
2	5700.00	5.22	71.95	77.17	105.20	-28.03	Peak	207	359	P
3	5720.00	5.27	75.22	80.49	110.80	-30.31	Peak	207	359	P
4	5725.00	5.29	78.62	83.91	122.20	-38.29	Peak	207	359	P
5	5775.00	5.31	92.95	98.26	200.00	-101.74	Average	207	359	P
6	5775.00	5.31	106.10	111.41	200.00	-88.59	Peak	207	359	P
7	5850.00	5.41	75.58	80.99	122.20	-41.21	Peak	207	359	P
8	5855.00	5.42	71.73	77.15	110.80	-33.65	Peak	207	359	P
9	5875.00	5.46	64.68	70.14	105.20	-35.06	Peak	207	359	P
10	5925.00	5.59	56.27	61.86	68.20	-6.34	Peak	207	359	P
11	11550.00	13.44	28.79	42.23	54.00	-11.77	Average	100	319	P
12	11550.00	13.44	42.99	56.43	74.00	-17.57	Peak	100	319	P
13	17325.00	19.12	42.59	61.71	68.20	-6.49	Peak	100	245	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	:	DC 56V From POE (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 9, Band 4, CH155		:	

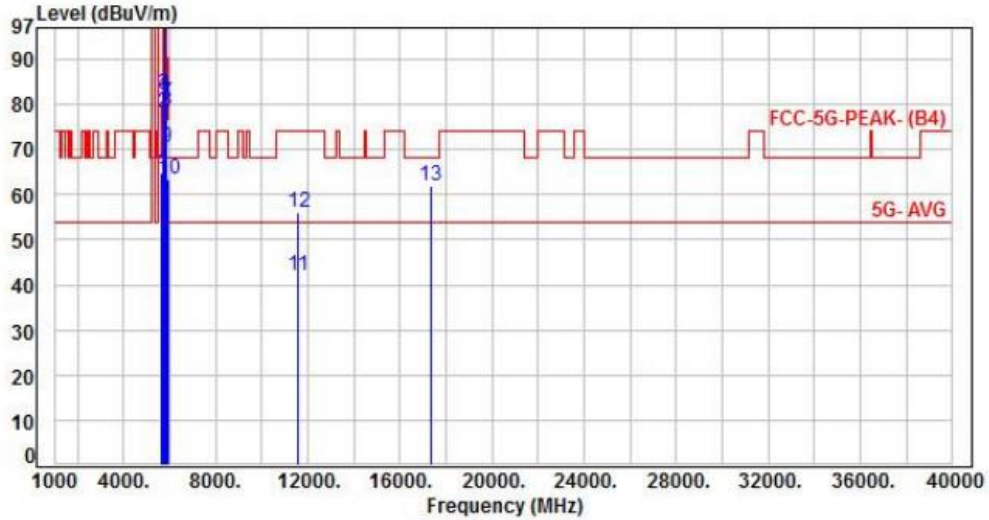


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	59.84	65.03	68.20	-3.17	Peak	130	2	P
2	5700.00	5.22	72.90	78.12	105.20	-27.08	Peak	130	2	P
3	5720.00	5.27	77.08	82.35	110.80	-28.45	Peak	130	2	P
4	5725.00	5.29	76.85	82.14	122.20	-40.06	Peak	130	2	P
5	5775.00	5.31	92.16	97.47	200.00	-102.53	Average	130	2	P
6	5775.00	5.31	105.63	110.94	200.00	-89.06	Peak	130	2	P
7	5850.00	5.41	75.12	80.53	122.20	-41.67	Peak	130	2	P
8	5855.00	5.42	73.04	78.46	110.80	-32.34	Peak	130	2	P
9	5875.00	5.46	65.01	70.47	105.20	-34.73	Peak	130	2	P
10	5925.00	5.59	57.92	63.51	68.20	-4.69	Peak	130	2	P
11	11550.00	13.44	28.72	42.16	54.00	-11.84	Average	100	36	P
12	11550.00	13.44	42.65	56.09	74.00	-17.91	Peak	100	36	P
13	17325.00	19.12	42.91	62.03	68.20	-6.17	Peak	100	83	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 1, CH36		

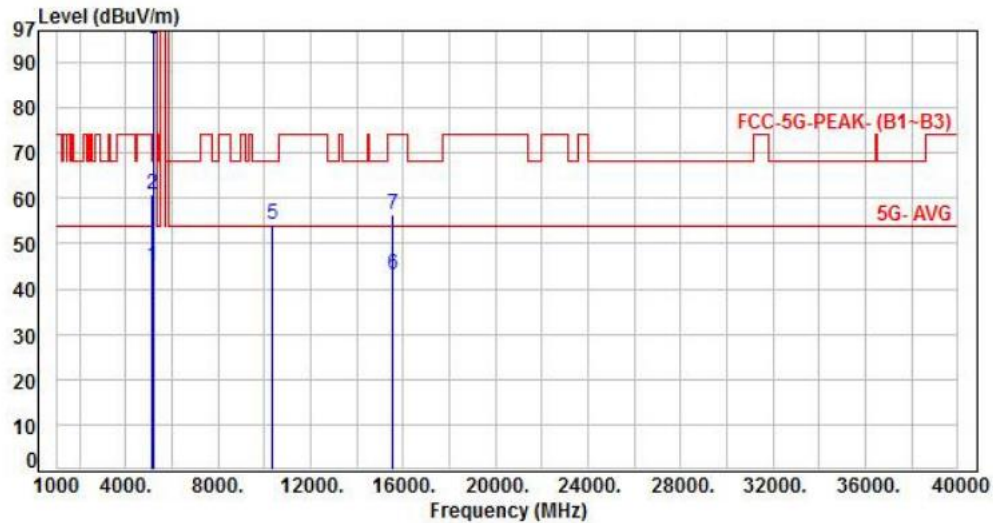


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.79	40.34	45.13	54.00	-8.87	Average	275	348	P
2	5150.00	4.79	56.16	60.95	74.00	-13.05	Peak	275	348	P
3	5180.00	4.82	90.36	95.18	200.00	-104.82	Average	275	348	P
4	5180.00	4.82	106.66	111.48	200.00	-88.52	Peak	275	348	P
5	10360.00	11.55	42.77	54.32	68.20	-13.88	Peak	100	315	P
6	15540.00	13.87	29.37	43.24	54.00	-10.76	Average	100	246	P
7	15540.00	13.87	42.64	56.51	74.00	-17.49	Peak	100	246	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 1, CH36		

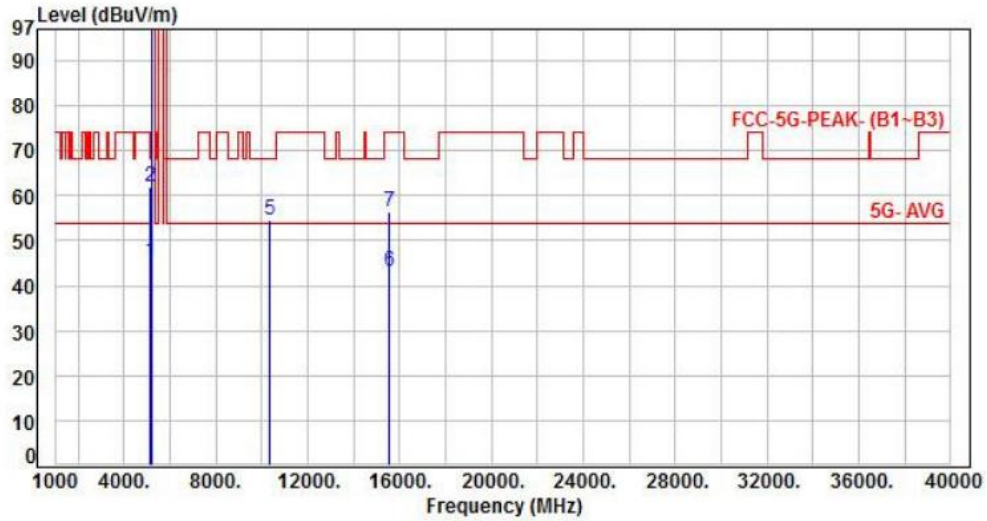


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.79	40.46	45.25	54.00	-8.75	Average	103	13	P
2	5150.00	4.79	57.18	61.97	74.00	-12.03	Peak	103	13	P
3	5180.00	4.82	90.87	95.69	200.00	-104.31	Average	103	13	P
4	5180.00	4.82	107.53	112.35	200.00	-87.65	Peak	103	13	P
5	10360.00	11.55	42.86	54.41	68.20	-13.79	Peak	100	39	P
6	15540.00	13.87	29.22	43.09	54.00	-10.91	Average	100	78	P
7	15540.00	13.87	42.49	56.36	74.00	-17.64	Peak	100	78	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 1, CH40		:

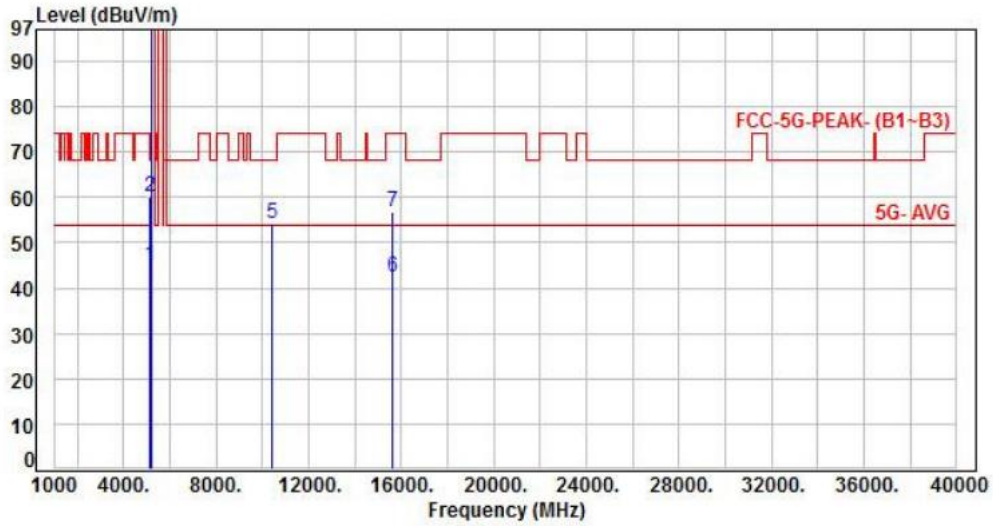


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.79	40.06	44.85	54.00	-9.15	Average	289	322	P
2	5150.00	4.79	55.47	60.26	74.00	-13.74	Peak	289	322	P
3	5200.00	4.83	91.50	96.33	200.00	-103.67	Average	289	322	P
4	5200.00	4.83	107.39	112.22	200.00	-87.78	Peak	289	322	P
5	10400.00	11.57	42.71	54.28	68.20	-13.92	Peak	100	316	P
6	15600.00	13.65	28.83	42.48	54.00	-11.52	Average	100	250	P
7	15600.00	13.65	43.11	56.76	74.00	-17.24	Peak	100	250	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 1, CH40		

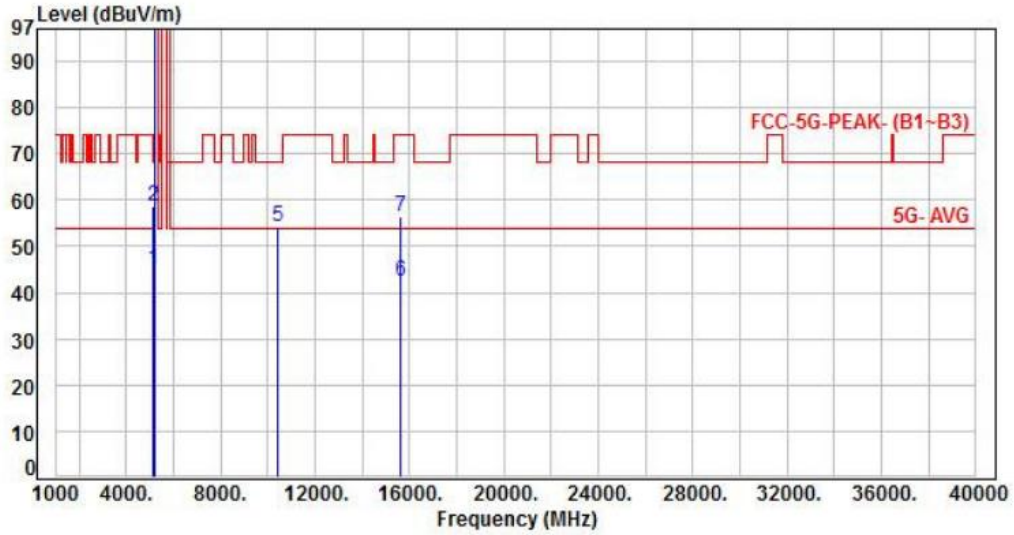


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.79	40.04	44.83	54.00	-9.17	Average	100	10	P
2	5150.00	4.79	53.88	58.67	74.00	-15.33	Peak	100	10	P
3	5200.00	4.83	91.12	95.95	200.00	-104.05	Average	100	10	P
4	5200.00	4.83	107.67	112.50	200.00	-87.50	Peak	100	10	P
5	10400.00	11.57	42.63	54.20	68.20	-14.00	Peak	100	37	P
6	15600.00	13.65	28.60	42.25	54.00	-11.75	Average	100	79	P
7	15600.00	13.65	42.69	56.34	74.00	-17.66	Peak	100	79	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 1, CH48		

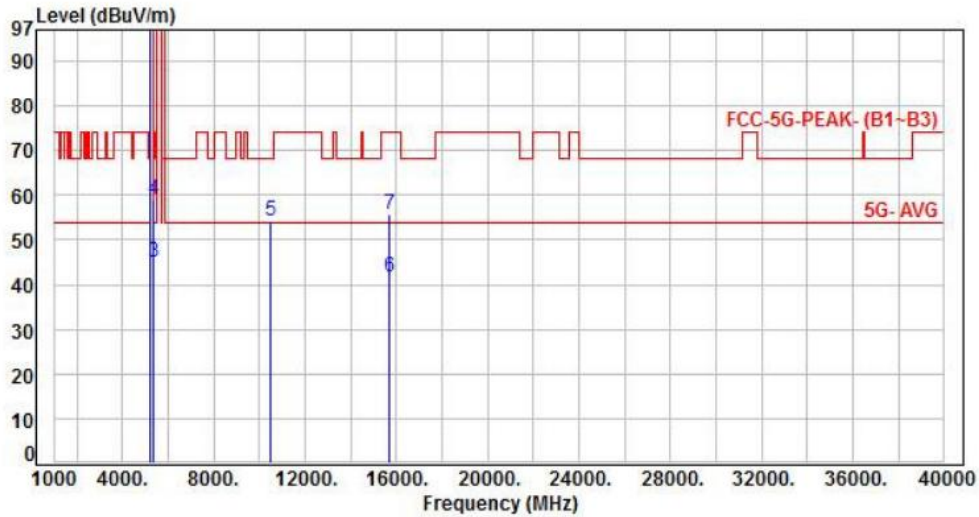


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5240.00	4.85	95.40	100.25	200.00	-99.75	Average	262	328	P
2	5240.00	4.85	107.95	112.80	200.00	-87.20	Peak	262	328	P
3	5350.00	5.02	40.04	45.06	54.00	-8.94	Average	262	328	P
4	5350.00	5.02	53.92	58.94	74.00	-15.06	Peak	262	328	P
5	10480.00	11.78	42.59	54.37	68.20	-13.83	Peak	100	311	P
6	15720.00	13.12	28.58	41.70	54.00	-12.30	Average	100	245	P
7	15720.00	13.12	42.42	55.54	74.00	-18.46	Peak	100	245	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 1, CH48		

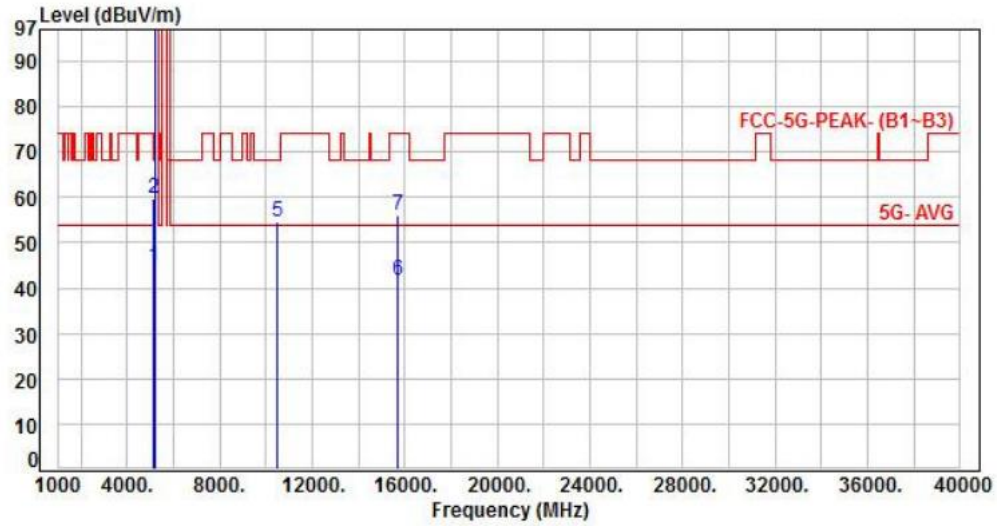


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.79	39.99	44.78	54.00	-9.22	Average	100	13	P
2	5150.00	4.79	54.78	59.57	74.00	-14.43	Peak	100	13	P
3	5240.00	4.85	94.57	99.42	200.00	-100.58	Average	100	13	P
4	5240.00	4.85	107.34	112.19	200.00	-87.81	Peak	100	13	P
5	10480.00	11.78	42.74	54.52	68.20	-13.68	Peak	100	33	P
6	15720.00	13.12	28.65	41.77	54.00	-12.23	Average	100	82	P
7	15720.00	13.12	42.94	56.06	74.00	-17.94	Peak	100	82	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, Band 1, CH38		

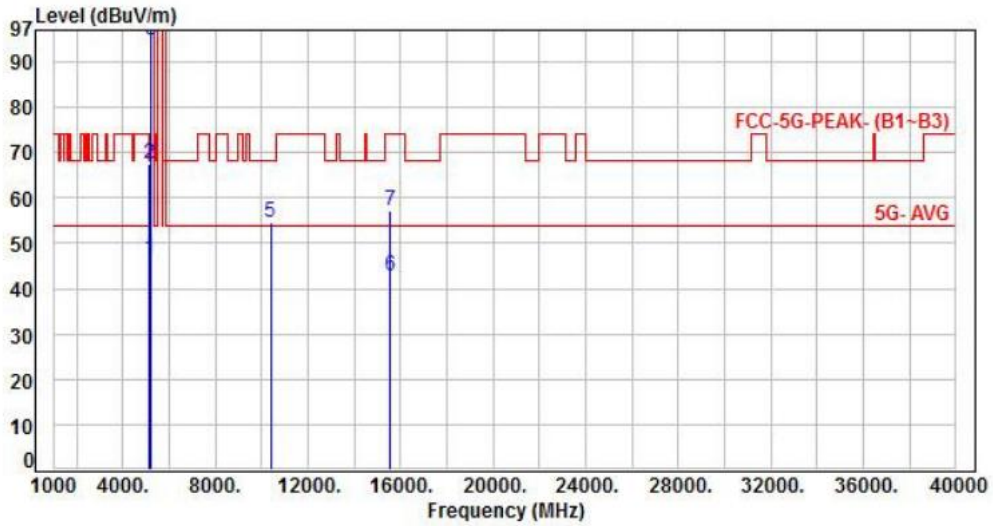


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.79	41.59	46.38	54.00	-7.62	Average	269	335	P
2	5150.00	4.79	62.72	67.51	74.00	-6.49	Peak	269	335	P
3	5190.00	4.82	90.11	94.93	200.00	-105.07	Average	269	335	P
4	5190.00	4.82	103.79	108.61	200.00	-91.39	Peak	269	335	P
5	10380.00	11.56	42.88	54.44	68.20	-13.76	Peak	100	312	P
6	15570.00	13.76	28.86	42.62	54.00	-11.38	Average	100	249	P
7	15570.00	13.76	43.40	57.16	74.00	-16.84	Peak	100	249	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, Band 1, CH38		

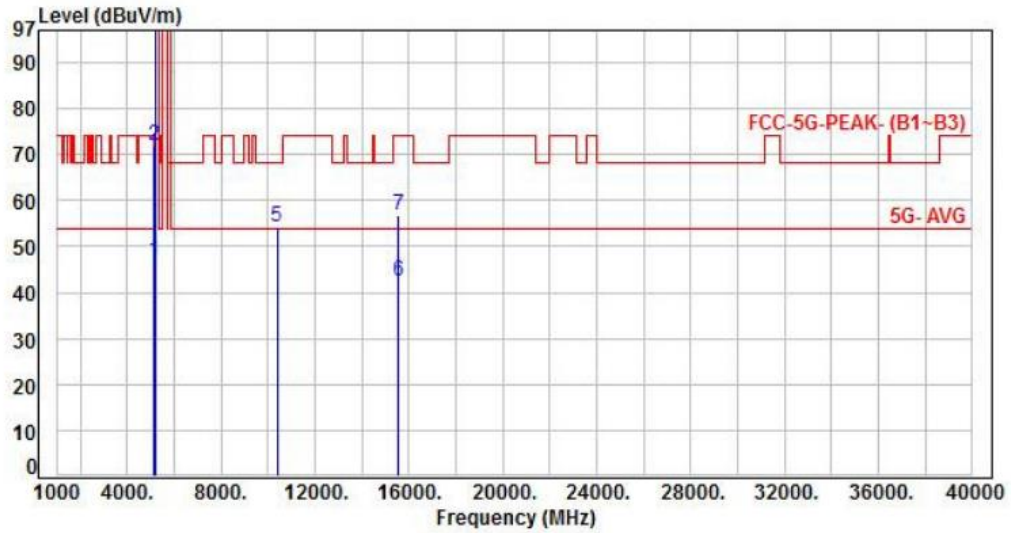


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.79	42.04	46.83	54.00	-7.17	Average	100	10	P
2	5150.00	4.79	67.01	71.80	74.00	-2.20	Peak	100	10	P
3	5190.00	4.82	93.34	98.16	200.00	-101.84	Average	100	10	P
4	5190.00	4.82	106.11	110.93	200.00	-89.07	Peak	100	10	P
5	10380.00	11.56	42.62	54.18	68.20	-14.02	Peak	100	32	P
6	15570.00	13.76	28.49	42.25	54.00	-11.75	Average	100	75	P
7	15570.00	13.76	43.21	56.97	74.00	-17.03	Peak	100	75	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 56V From POE (120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 11, Band 1, CH46		:	

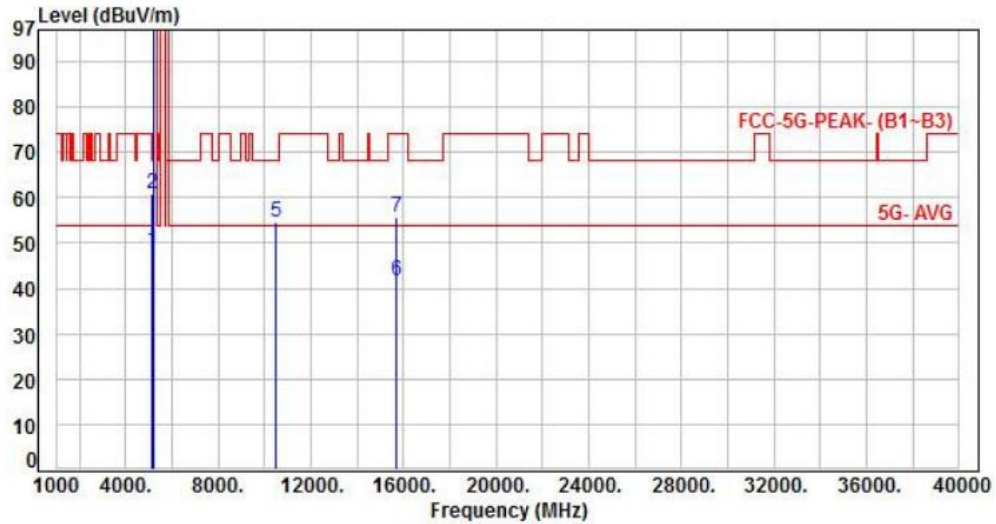


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.79	43.71	48.50	54.00	-5.50	Average	284	326	P
2	5150.00	4.79	55.96	60.75	74.00	-13.25	Peak	284	326	P
3	5230.00	4.84	92.23	97.07	200.00	-102.93	Average	284	326	P
4	5230.00	4.84	106.39	111.23	200.00	-88.77	Peak	284	326	P
5	10460.00	11.73	42.83	54.56	68.20	-13.64	Peak	100	318	P
6	15690.00	13.15	28.40	41.55	54.00	-12.45	Average	100	247	P
7	15690.00	13.15	42.65	55.80	74.00	-18.20	Peak	100	247	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, Band 1, CH46		

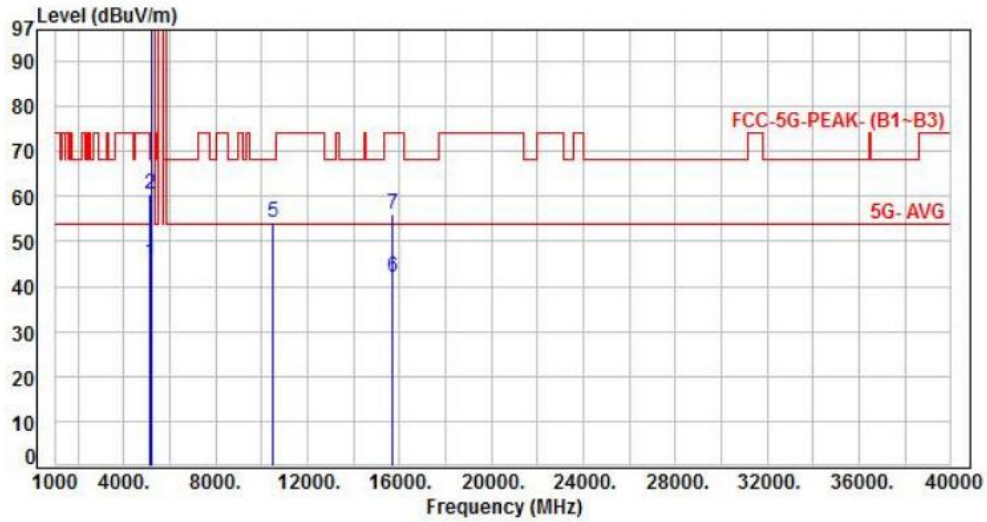


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.79	40.67	45.46	54.00	-8.54	Average	113	14	P
2	5150.00	4.79	55.62	60.41	74.00	-13.59	Peak	113	14	P
3	5230.00	4.84	92.14	96.98	200.00	-103.02	Average	113	14	P
4	5230.00	4.84	105.74	110.58	200.00	-89.42	Peak	113	14	P
5	10460.00	11.73	42.55	54.28	68.20	-13.92	Peak	100	40	P
6	15690.00	13.15	29.00	42.15	54.00	-11.85	Average	100	79	P
7	15690.00	13.15	43.07	56.22	74.00	-17.78	Peak	100	79	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 12, Band 1, CH42		

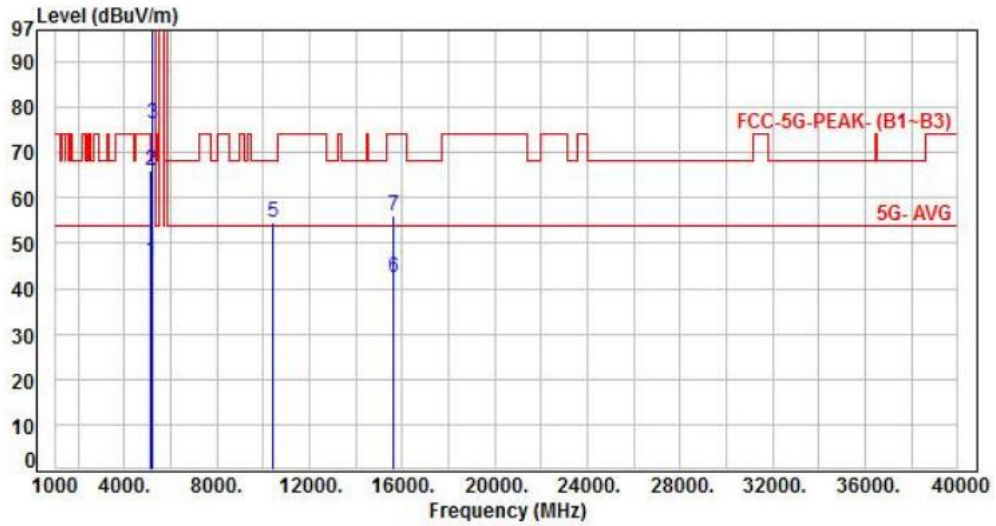


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.79	41.18	45.97	54.00	-8.03	Average	273	347	P
2	5150.00	4.79	61.31	66.10	74.00	-7.90	Peak	273	347	P
3	5210.00	4.83	71.45	76.28	200.00	-123.72	Average	273	347	P
4	5210.00	4.83	103.45	108.28	200.00	-91.72	Peak	273	347	P
5	10420.00	11.63	42.84	54.47	68.20	-13.73	Peak	100	318	P
6	15630.00	13.48	28.95	42.43	54.00	-11.57	Average	100	247	P
7	15630.00	13.48	42.76	56.24	74.00	-17.76	Peak	100	247	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 12, Band 1, CH42		

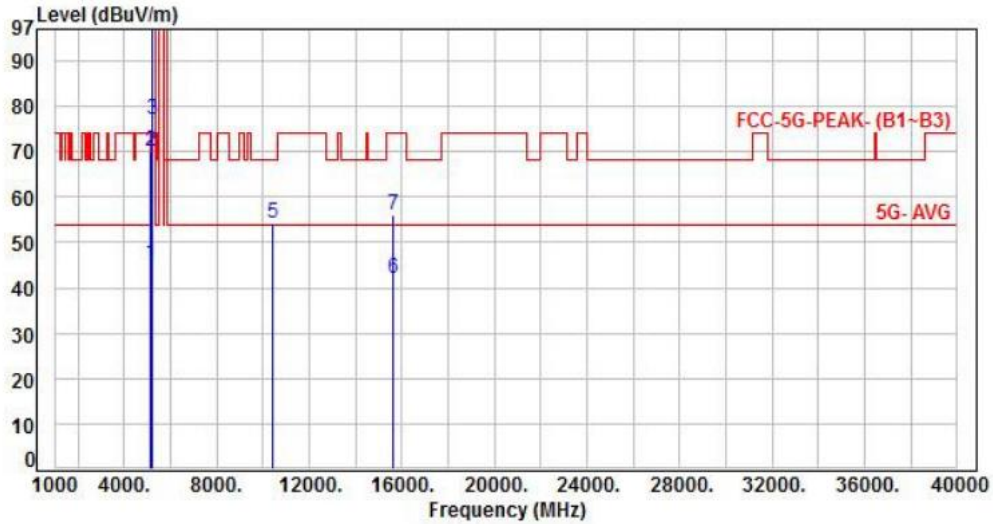


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	4.79	40.74	45.53	54.00	-8.47	Average	108	12	P
2	5150.00	4.79	65.44	70.23	74.00	-3.77	Peak	108	12	P
3	5210.00	4.83	72.11	76.94	200.00	-123.06	Average	108	12	P
4	5210.00	4.83	104.79	109.62	200.00	-90.38	Peak	108	12	P
5	10420.00	11.63	42.44	54.07	68.20	-14.13	Peak	100	35	P
6	15630.00	13.48	28.72	42.20	54.00	-11.80	Average	100	74	P
7	15630.00	13.48	42.76	56.24	74.00	-17.76	Peak	100	74	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 4, CH149		:

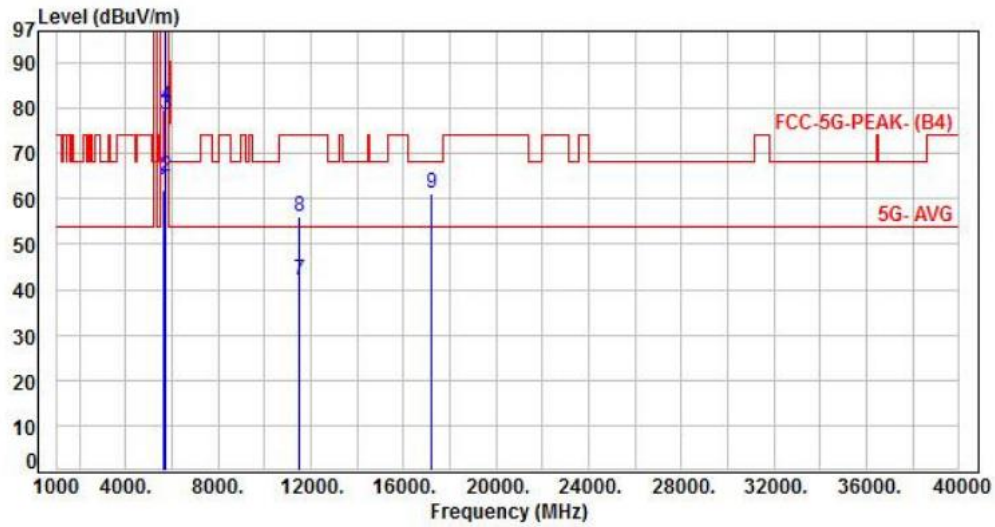


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	56.78	61.97	68.20	-6.23	Peak	244	306	P
2	5700.00	5.22	59.61	64.83	105.20	-40.37	Peak	244	306	P
3	5720.00	5.27	73.15	78.42	110.80	-32.38	Peak	244	306	P
4	5720.00	5.27	75.21	80.48	110.80	-30.32	Peak	244	306	P
5	5745.00	5.34	91.63	96.97	200.00	-103.03	Average	244	306	P
6	5745.00	5.34	109.54	114.88	200.00	-85.12	Peak	244	306	P
7	11490.00	13.28	28.73	42.01	54.00	-11.99	Average	100	318	P
8	11490.00	13.28	42.63	55.91	74.00	-18.09	Peak	100	318	P
9	17235.00	18.66	42.66	61.32	68.20	-6.88	Peak	100	251	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 56V From POE (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 10, Band 4, CH149		:	

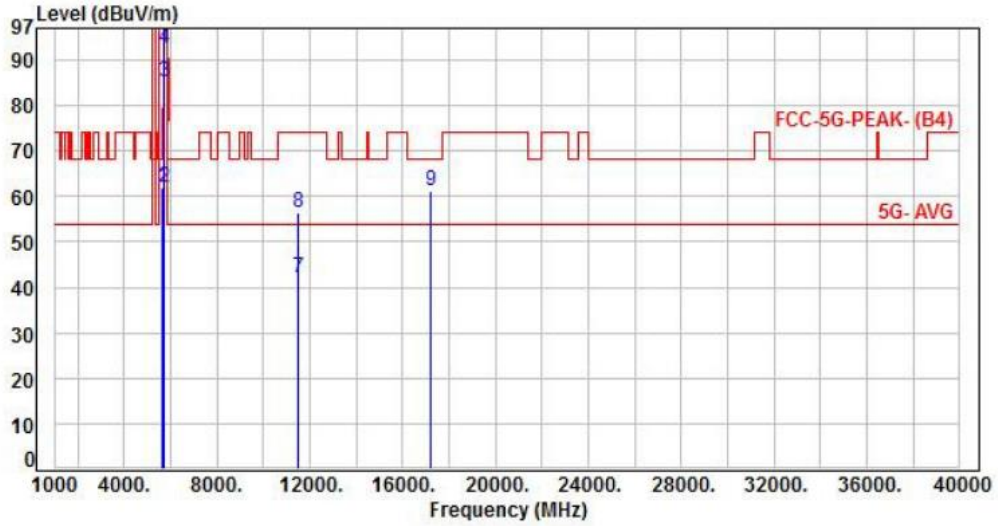


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	56.62	61.81	68.20	-6.39	Peak	100	360	P
2	5700.00	5.22	56.68	61.90	105.20	-43.30	Peak	100	360	P
3	5720.00	5.27	80.05	85.32	110.80	-25.48	Peak	100	360	P
4	5725.00	5.29	87.32	92.61	122.20	-29.59	Peak	100	360	P
5	5745.00	5.34	90.61	95.95	200.00	-104.05	Average	100	360	P
6	5745.00	5.34	108.71	114.05	200.00	-85.95	Peak	100	360	P
7	11490.00	13.28	28.62	41.90	54.00	-12.10	Average	100	42	P
8	11490.00	13.28	43.15	56.43	74.00	-17.57	Peak	100	42	P
9	17235.00	18.66	42.58	61.24	68.20	-6.96	Peak	100	83	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 4, CH157		

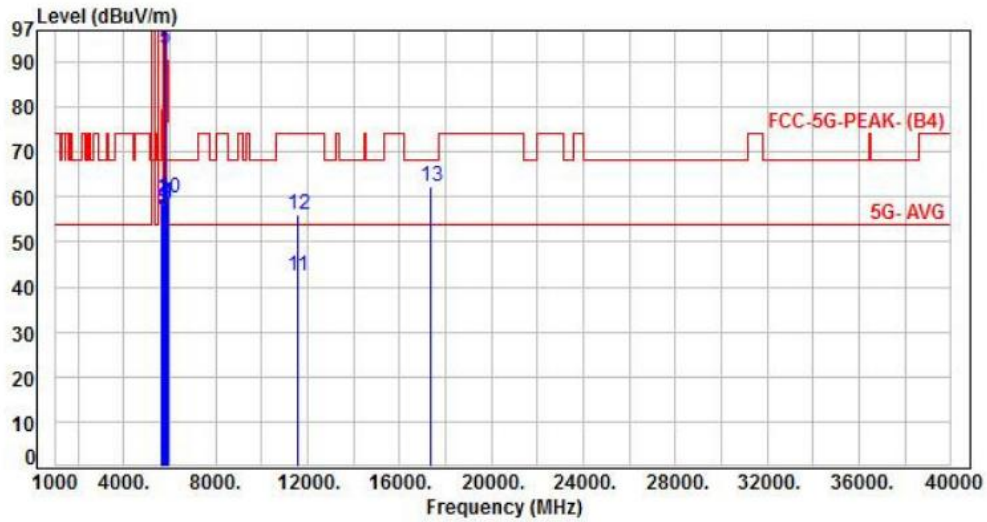


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	54.41	59.60	68.20	-8.60	Peak	212	315	P
2	5700.00	5.22	51.82	57.04	105.20	-48.16	Peak	212	315	P
3	5720.00	5.27	52.37	57.64	110.80	-53.16	Peak	212	315	P
4	5725.00	5.29	53.13	58.42	122.20	-63.78	Peak	212	315	P
5	5785.00	5.30	87.51	92.81	200.00	-107.19	Average	212	315	P
6	5785.00	5.30	110.31	115.61	200.00	-84.39	Peak	212	315	P
7	5850.00	5.41	53.05	58.46	122.20	-63.74	Peak	212	315	P
8	5855.00	5.42	53.02	58.44	110.80	-52.36	Peak	212	315	P
9	5875.00	5.46	52.85	58.31	105.20	-46.89	Peak	212	315	P
10	5925.00	5.59	54.12	59.71	68.20	-8.49	Peak	212	315	P
11	11570.00	13.50	28.91	42.41	54.00	-11.59	Average	100	318	P
12	11570.00	13.50	42.57	56.07	74.00	-17.93	Peak	100	318	P
13	17355.00	19.26	43.04	62.30	68.20	-5.90	Peak	100	249	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 4, CH157		

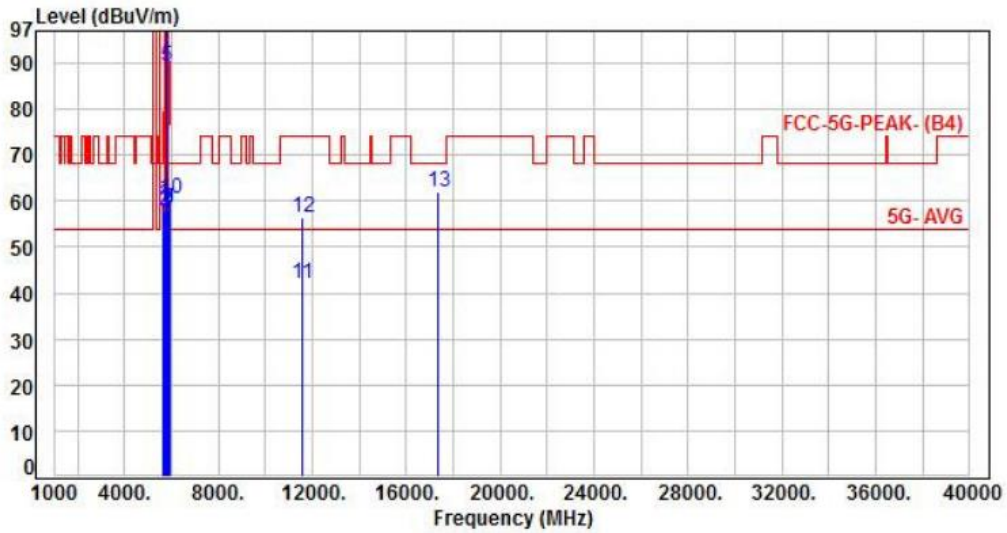


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	54.32	59.51	68.20	-8.69	Peak	100	360	P
2	5700.00	5.22	52.77	57.99	105.20	-47.21	Peak	100	360	P
3	5720.00	5.27	52.16	57.43	110.80	-53.37	Peak	100	360	P
4	5725.00	5.29	51.87	57.16	122.20	-65.04	Peak	100	360	P
5	5785.00	5.30	84.07	89.37	200.00	-110.63	Average	100	360	P
6	5785.00	5.30	108.63	113.93	200.00	-86.07	Peak	100	360	P
7	5850.00	5.41	53.04	58.45	122.20	-63.75	Peak	100	360	P
8	5855.00	5.42	52.67	58.09	110.80	-52.71	Peak	100	360	P
9	5875.00	5.46	52.96	58.42	105.20	-46.78	Peak	100	360	P
10	5925.00	5.59	54.86	60.45	68.20	-7.75	Peak	100	360	P
11	11570.00	13.50	28.46	41.96	54.00	-12.04	Average	100	42	P
12	11570.00	13.50	42.75	56.25	74.00	-17.75	Peak	100	42	P
13	17355.00	19.26	42.73	61.99	68.20	-6.21	Peak	100	82	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 4, CH165		

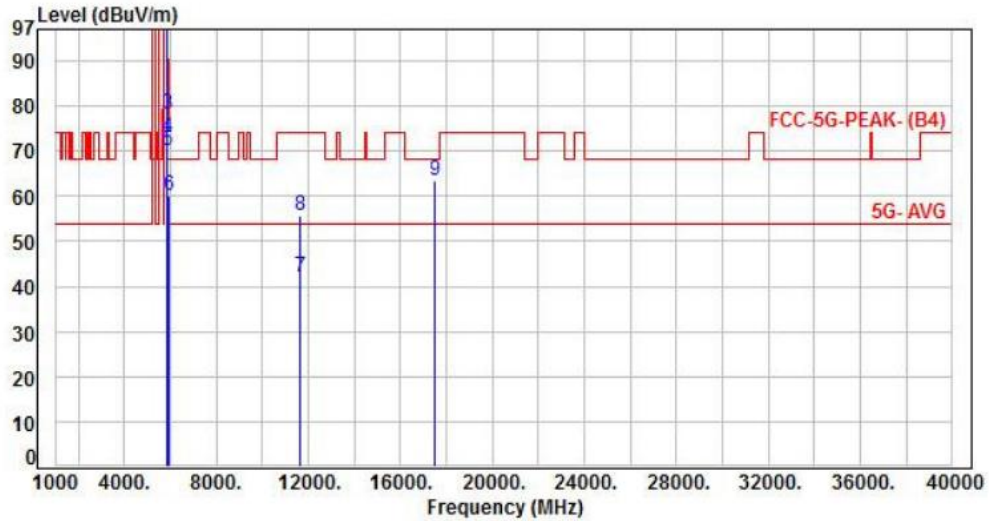


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	5.34	93.63	98.97	200.00	-101.03	Average	227	339	P
2	5825.00	5.34	108.71	114.05	200.00	-85.95	Peak	227	339	P
3	5850.00	5.41	72.75	78.16	122.20	-44.04	Peak	227	339	P
4	5855.00	5.42	67.71	73.13	110.80	-37.67	Peak	227	339	P
5	5875.00	5.46	64.61	70.07	105.20	-35.13	Peak	227	339	P
6	5925.00	5.59	54.41	60.00	68.20	-8.20	Peak	227	339	P
7	11650.00	13.63	28.37	42.00	54.00	-12.00	Average	100	307	P
8	11650.00	13.63	42.18	55.81	74.00	-18.19	Peak	100	307	P
9	17475.00	20.17	43.27	63.44	68.20	-4.76	Peak	100	243	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 4, CH165		:

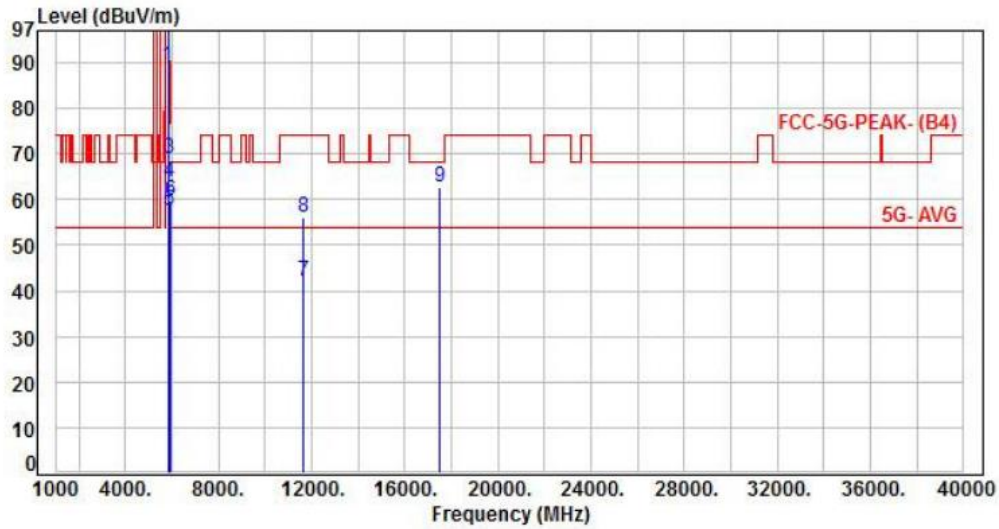


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	5.34	83.81	89.15	200.00	-110.85	Average	100	360	P
2	5825.00	5.34	107.45	112.79	200.00	-87.21	Peak	100	360	P
3	5850.00	5.41	63.69	69.10	122.20	-53.10	Peak	100	360	P
4	5855.00	5.42	58.21	63.63	110.80	-47.17	Peak	100	360	P
5	5875.00	5.46	51.94	57.40	105.20	-47.80	Peak	100	360	P
6	5925.00	5.59	54.20	59.79	68.20	-8.41	Peak	100	360	P
7	11650.00	13.63	28.58	42.21	54.00	-11.79	Average	100	33	P
8	11650.00	13.63	42.38	56.01	74.00	-17.99	Peak	100	33	P
9	17475.00	20.17	42.67	62.84	68.20	-5.36	Peak	100	80	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, Band 4, CH151		

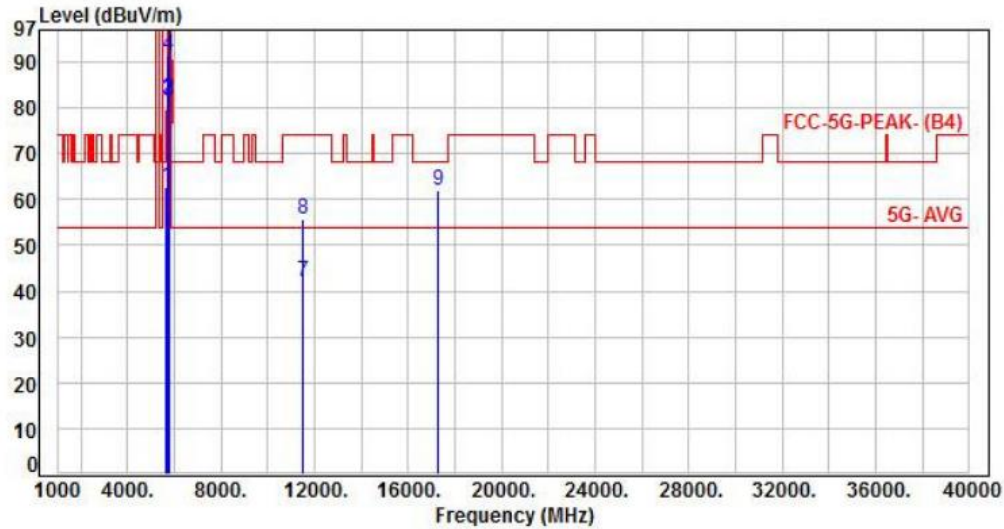


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	57.50	62.69	68.20	-5.51	Peak	226	311	P
2	5700.00	5.22	76.62	81.84	105.20	-23.36	Peak	226	311	P
3	5720.00	5.27	76.07	81.34	110.80	-29.46	Peak	226	311	P
4	5725.00	5.29	86.01	91.30	122.20	-30.90	Peak	226	311	P
5	5755.00	5.34	95.29	100.63	200.00	-99.37	Average	226	311	P
6	5755.00	5.34	106.17	111.51	200.00	-88.49	Peak	226	311	P
7	11510.00	13.32	28.72	42.04	54.00	-11.96	Average	100	319	P
8	11510.00	13.32	42.51	55.83	74.00	-18.17	Peak	100	319	P
9	17265.00	18.82	43.20	62.02	68.20	-6.18	Peak	100	253	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, Band 4, CH151		

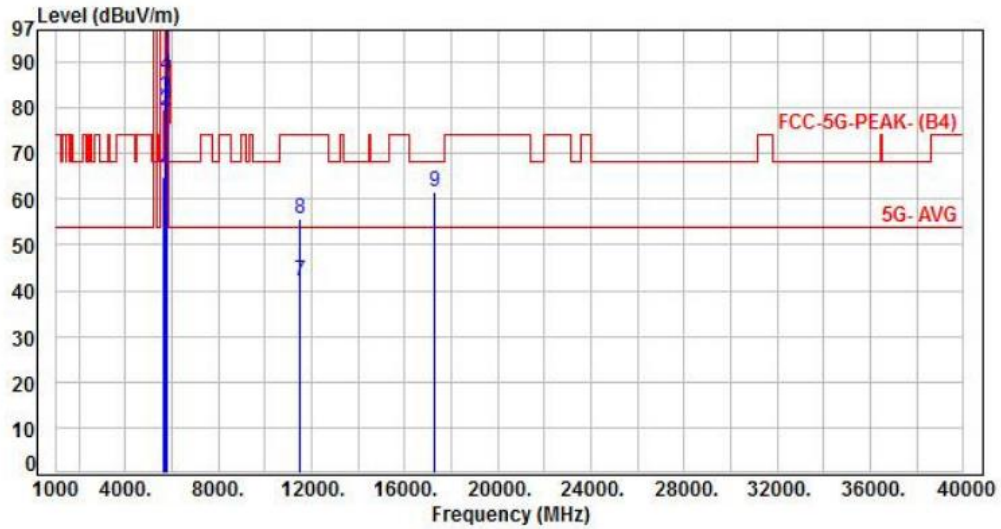


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	59.59	64.78	68.20	-3.42	Peak	120	3	P
2	5700.00	5.22	73.89	79.11	105.20	-26.09	Peak	120	3	P
3	5720.00	5.27	77.07	82.34	110.80	-28.46	Peak	120	3	P
4	5725.00	5.29	81.89	87.18	122.20	-35.02	Peak	120	3	P
5	5755.00	5.34	95.13	100.47	200.00	-99.53	Average	120	3	P
6	5755.00	5.34	106.68	112.02	200.00	-87.98	Peak	120	3	P
7	11510.00	13.32	28.62	41.94	54.00	-12.06	Average	100	42	P
8	11510.00	13.32	42.43	55.75	74.00	-18.25	Peak	100	42	P
9	17265.00	18.82	42.90	61.72	68.20	-6.48	Peak	100	75	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, Band 4, CH159		

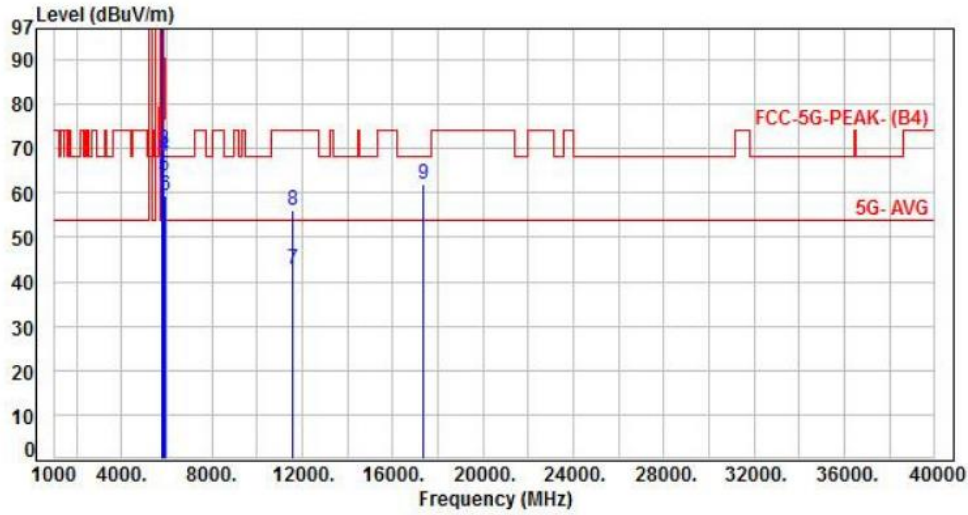


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	5.29	93.02	98.31	200.00	-101.69	Average	207	316	P
2	5795.00	5.29	107.52	112.81	200.00	-87.19	Peak	207	316	P
3	5850.00	5.41	64.47	69.88	122.20	-52.32	Peak	207	316	P
4	5855.00	5.42	62.68	68.10	110.80	-42.70	Peak	207	316	P
5	5875.00	5.46	58.42	63.88	105.20	-41.32	Peak	207	316	P
6	5925.00	5.59	53.92	59.51	68.20	-8.69	Peak	207	316	P
7	11590.00	13.55	29.11	42.66	54.00	-11.34	Average	100	315	P
8	11590.00	13.55	42.55	56.10	74.00	-17.90	Peak	100	315	P
9	17385.00	19.39	42.49	61.88	68.20	-6.32	Peak	100	249	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, Band 4, CH159		

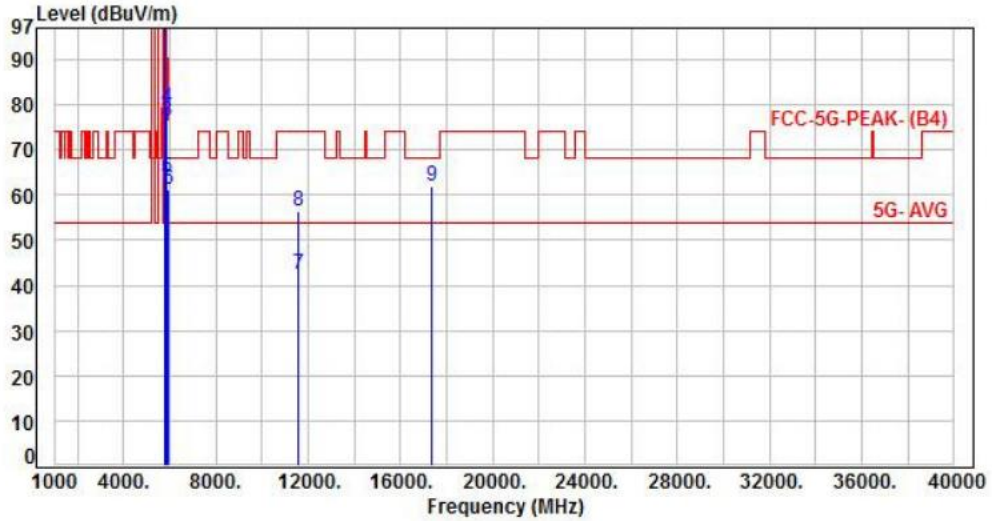


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	5.29	92.12	97.41	200.00	-102.59	Average	100	5	P
2	5795.00	5.29	106.41	111.70	200.00	-88.30	Peak	100	5	P
3	5850.00	5.41	70.97	76.38	122.20	-45.82	Peak	100	5	P
4	5855.00	5.42	73.98	79.40	110.80	-31.40	Peak	100	5	P
5	5875.00	5.46	58.53	63.99	105.20	-41.21	Peak	100	5	P
6	5925.00	5.59	55.70	61.29	68.20	-6.91	Peak	100	5	P
7	11590.00	13.55	28.77	42.32	54.00	-11.68	Average	100	36	P
8	11590.00	13.55	42.81	56.36	74.00	-17.64	Peak	100	36	P
9	17385.00	19.39	42.67	62.06	68.20	-6.14	Peak	100	75	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 56V From POE (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 12, Band 4, CH155		

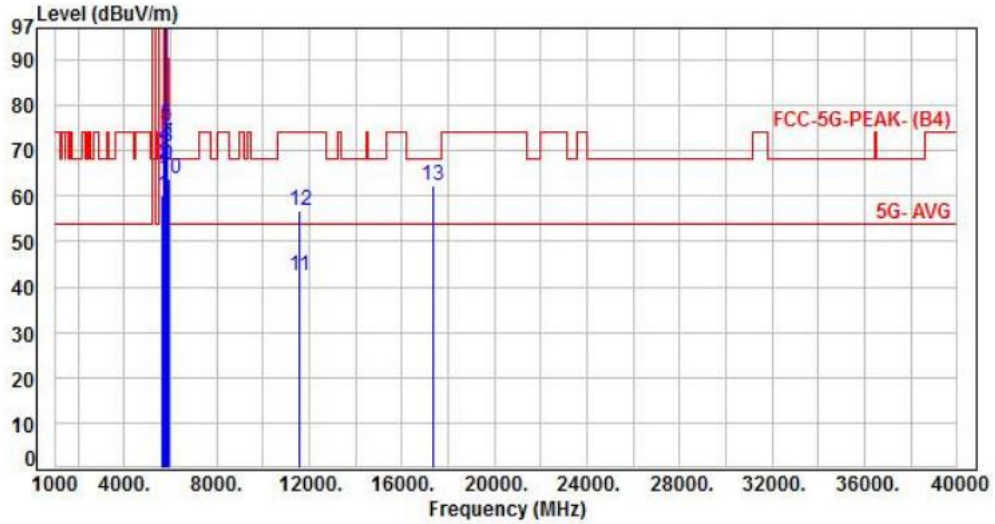


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	55.06	60.25	68.20	-7.95	Peak	242	308	P
2	5700.00	5.22	61.90	67.12	105.20	-38.08	Peak	242	308	P
3	5720.00	5.27	63.87	69.14	110.80	-41.66	Peak	242	308	P
4	5725.00	5.29	65.75	71.04	122.20	-51.16	Peak	242	308	P
5	5775.00	5.31	70.27	75.58	200.00	-124.42	Average	242	308	P
6	5775.00	5.31	103.77	109.08	200.00	-90.92	Peak	242	308	P
7	5850.00	5.41	66.04	71.45	122.20	-50.75	Peak	242	308	P
8	5855.00	5.42	65.50	70.92	110.80	-39.88	Peak	242	308	P
9	5875.00	5.46	61.23	66.69	105.20	-38.51	Peak	242	308	P
10	5925.00	5.59	58.09	63.68	68.20	-4.52	Peak	242	308	P
11	11550.00	13.44	28.95	42.39	54.00	-11.61	Average	100	318	P
12	11550.00	13.44	43.19	56.63	74.00	-17.37	Peak	100	318	P
13	17325.00	19.12	43.05	62.17	68.20	-6.03	Peak	100	247	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 56V From POE (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 12, Band 4, CH155		:	

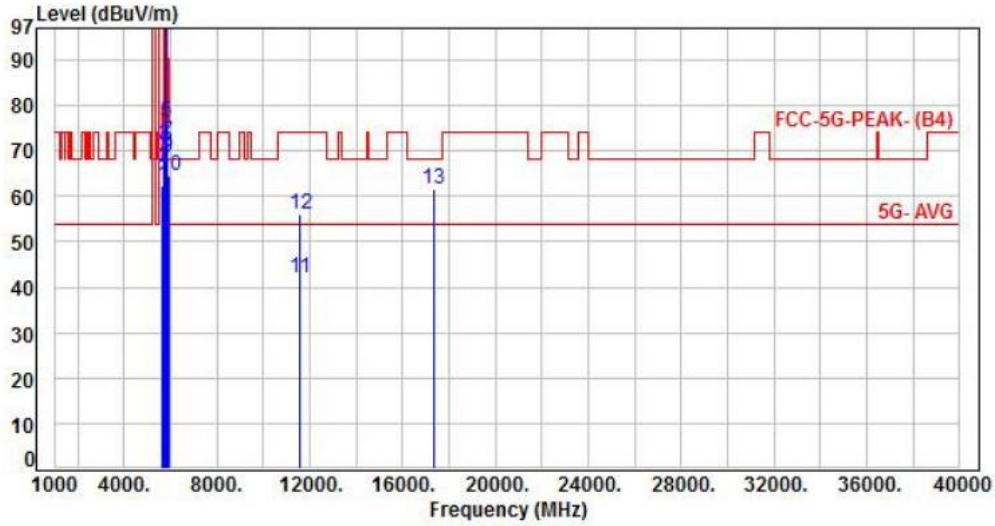

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	5.19	57.13	62.32	68.20	-5.88	Peak	108	4	P
2	5700.00	5.22	61.08	66.30	105.20	-38.90	Peak	108	4	P
3	5720.00	5.27	65.87	71.14	110.80	-39.66	Peak	108	4	P
4	5725.00	5.29	65.71	71.00	122.20	-51.20	Peak	108	4	P
5	5775.00	5.31	71.20	76.51	200.00	-123.49	Average	108	4	P
6	5775.00	5.31	104.25	109.56	200.00	-90.44	Peak	108	4	P
7	5850.00	5.41	66.51	71.92	122.20	-50.28	Peak	108	4	P
8	5855.00	5.42	64.46	69.88	110.80	-40.92	Peak	108	4	P
9	5875.00	5.46	63.16	68.62	105.20	-36.58	Peak	108	4	P
10	5925.00	5.59	59.05	64.64	68.20	-3.56	Peak	108	4	P
11	11550.00	13.44	28.76	42.20	54.00	-11.80	Average	100	39	P
12	11550.00	13.44	42.63	56.07	74.00	-17.93	Peak	100	39	P
13	17325.00	19.12	42.60	61.72	68.20	-6.48	Peak	100	78	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. On Time, Duty Cycle and Measurement methods


7.1. Test Limit

None; for reporting purposes only.

7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.3. Test Setup Layout





7.4. Test Result and Data

Non BeamForming

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11a,6M	1.44	1.53	93.73%
802.11ac VHT20	5.44	5.70	95.39%
802.11ac VHT40	5.44	6.14	88.60%
802.11ac VHT80	5.43	5.71	95.06%
802.11ax HE20	5.44	5.78	94.12%
802.11ax HE40	5.44	5.76	94.44%
802.11ax HE80	5.44	5.76	94.44%

BeamForming

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11ax HE20	1.98	2.05	96.39%
802.11ax HE40	1.98	2.05	96.39%
802.11ax HE80	2.00	2.07	96.62%

7.5. Measurement Methods

26 dB and 6dB Emission BW	KDB 789033 D02 v02r01, Section C
99% Occupied BW	KDB 789033 D02 v02r01, Section D
Conducted Output Power	KDB 789033 D02 v02r01, Section E.2.d and E.3.b (Method PM-G)
Power Spectral Density	KDB 789033 D02 v02r01, Section F
Unwanted emissions in restricted bands	KDB 789033 D02 v02r01, Sections G and H
Unwanted emissions in non-restricted bands	KDB 789033 D02 v02r01, Sections G and H



Non BeamForming
ANT A

Modulation Type: 802.11a (6Mbps)



Modulation Type: 802.11ac VHT80 (29.3Mbps)



Modulation Type: 802.11ac VHT20 (6.5Mbps)



Modulation Type: 802.11ax HE20 (7.3Mbps)



Modulation Type: 802.11ac VHT40 (13.5Mbps)



Modulation Type: 802.11ax HE40 (14.6Mbps)





Non BeamForming
ANT A
Modulation Type: 802.11ax HE80 (30.6Mbps)





BeamForming

Modulation Type: 802.11ax HE20 (7.3Mbps)



Modulation Type: 802.11ax HE40 (14.6Mbps)



Modulation Type: 802.11ax HE80 (30.6Mbps)





8. 6dB Bandwidth & 99% Occupied Bandwidth

8.1. Test Limit


FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

8.3. Test Setup Layout



**8.4. Test Result and Data**

Non BeamForming

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth(MHz)		Minimum Limit (MHz)
			ANT A	ANT B	
11a	149	5745	15.72	15.54	0.50
11a	157	5785	16.29	16.02	0.50
11a	165	5825	15.36	15.54	0.50
11ac VHT20	149	5745	16.17	16.80	0.50
11ac VHT20	157	5785	16.53	16.29	0.50
11ac VHT20	165	5825	16.32	16.14	0.50
11ac VHT40	151	5755	36.06	35.88	0.50
11ac VHT40	159	5795	35.94	36.30	0.50
11ac VHT80	155	5775	75.12	75.12	0.50
11ax HE20	149	5745	18.12	18.66	0.50
11ax HE20	157	5785	17.73	18.18	0.50
11ax HE20	165	5825	18.21	18.03	0.50
11ax HE40	151	5755	37.62	37.74	0.50
11ax HE40	159	5795	37.32	37.86	0.50
11ax HE80	155	5775	75.00	76.92	0.50

Non BeamForming

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT B
11a	149	5745	16.41	16.43
11a	157	5785	16.42	16.44
11a	165	5825	16.41	16.43
11ac VHT20	149	5745	17.63	17.65
11ac VHT20	157	5785	17.64	17.64
11ac VHT20	165	5825	17.62	17.61
11ac VHT40	151	5755	36.29	36.24
11ac VHT40	159	5795	36.30	36.29
11ac VHT80	155	5775	75.33	75.34
11ax HE20	149	5745	18.95	18.96
11ax HE20	157	5785	18.93	18.93
11ax HE20	165	5825	18.93	18.94
11ax HE40	151	5755	37.94	37.87
11ax HE40	159	5795	37.95	37.98
11ax HE80	155	5775	77.23	77.24



BeamForming
In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth(MHz)		Minimum Limit (MHz)
			ANT A	ANT B	
11ax HE20	149	5745	19.05	18.15	0.50
11ax HE20	157	5785	18.42	19.02	0.50
11ax HE20	165	5825	19.08	18.51	0.50
11ax HE40	151	5755	37.50	36.84	0.50
11ax HE40	159	5795	36.30	36.90	0.50
11ax HE80	155	5775	78.00	77.88	0.50

BeamForming
In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT B
11ax HE20	149	5745	19.07	19.07
11ax HE20	157	5785	19.08	19.07
11ax HE20	165	5825	19.10	19.08
11ax HE40	151	5755	38.59	38.38
11ax HE40	159	5795	38.08	38.13
11ax HE80	155	5775	77.91	77.95



6dB Bandwidth

Non BeamForming

ANT A

Modulation Type: 802.11a (6Mbps)

CH149

Modulation Type: 802.11ac, VHT20 (6.5Mbps)

CH149



CH157



CH157



CH165



CH165





6dB Bandwidth
Non BeamForming

ANT A

Modulation Type: 802.11ac, VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac, VHT80 (29.3Mbps)
CH155



CH159





6dB Bandwidth

Non BeamForming

ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)

CH149

Modulation Type: 802.11ax HE40 (14.6Mbps)

CH151



CH157



CH159




CH165





6dB Bandwidth
Non BeamForming
ANT A
Modulation Type: 802.11ax HE80 (30.6Mbps)
CH155

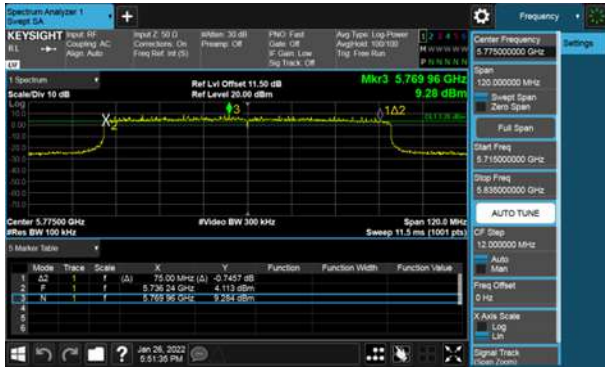



99% Occupied Bandwidth

Non BeamForming

ANT A

Modulation Type: 802.11a (6Mbps)

CH149

Modulation Type: 802.11ac, VHT20 (6.5Mbps)

CH149



CH157



CH157



CH165



CH165





99% Occupied Bandwidth
Non BeamForming

ANT A

Modulation Type: 802.11ac, VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac, VHT80 (29.3Mbps)
CH155



CH159





99% Occupied Bandwidth

Non BeamForming

ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)

CH149

Modulation Type: 802.11ax HE40 (14.6Mbps)

CH151



CH157



CH159



CH165





99% Occupied Bandwidth
Non BeamForming
ANT A
Modulation Type: 802.11ax HE80 (30.6Mbps)
CH155





6dB Bandwidth

Non BeamForming

ANT B

Modulation Type: 802.11a (6Mbps)

CH149

Modulation Type: 802.11ac, VHT20 (6.5Mbps)

CH149



CH157



CH157



CH165



CH165





6dB Bandwidth
Non BeamForming

ANT B

Modulation Type: 802.11ac, VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac, VHT80 (29.3Mbps)
CH155



CH159





6dB Bandwidth

Non BeamForming

ANT B

Modulation Type: 802.11ax HE20 (7.3Mbps)

CH149

Modulation Type: 802.11ax HE40 (14.6Mbps)

CH151



CH157



CH159



CH165





6dB Bandwidth
Non BeamForming
ANT B
Modulation Type: 802.11ax HE80 (30.6Mbps)
CH155





99% Occupied Bandwidth
Non BeamForming
ANT B
Modulation Type: 802.11a (6Mbps)
CH149

Modulation Type: 802.11ac, VHT20 (6.5Mbps)
CH149



CH157



CH157



CH165



CH165





99% Occupied Bandwidth
Non BeamForming

ANT B

Modulation Type: 802.11ac, VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac, VHT80 (29.3Mbps)
CH155



CH159





99% Occupied Bandwidth

Non BeamForming

ANT B

Modulation Type: 802.11ax HE20 (7.3Mbps)

CH149

Modulation Type: 802.11ax HE40 (14.6Mbps)

CH151



CH157



CH159



CH165





99% Occupied Bandwidth
Non BeamForming
ANT B
Modulation Type: 802.11ax HE80 (30.6Mbps)
CH155





6dB Bandwidth
BeamForming

ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH149

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH151



CH157



CH159



CH165

