




Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, 11ax HE40 CH06		

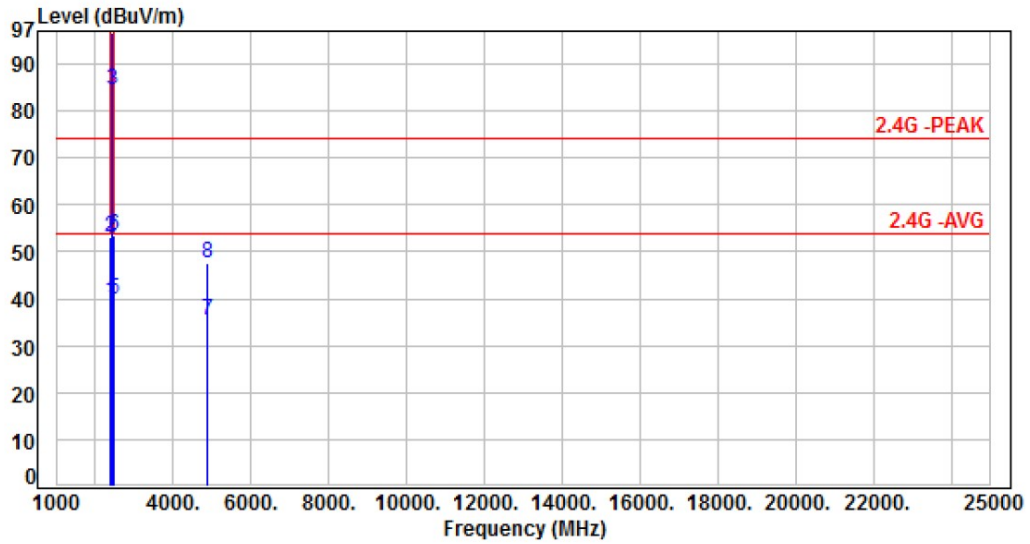


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	41.75	39.63	54.00	-14.37	Average	100	126	P
2	2390.00	-2.12	55.17	53.05	74.00	-20.95	Peak	100	126	P
3	2437.00	-2.07	86.35	84.28	200.00	-115.72	Average	100	126	P
4	2437.00	-2.07	98.64	96.57	200.00	-103.43	Peak	100	126	P
5	2483.50	-1.98	41.95	39.97	54.00	-14.03	Average	100	126	P
6	2483.50	-1.98	55.40	53.42	74.00	-20.58	Peak	100	126	P
7	4874.00	6.36	28.93	35.29	54.00	-18.71	Average	100	346	P
8	4874.00	6.36	41.36	47.72	74.00	-26.28	Peak	100	346	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, 11ax HE40 CH09		:

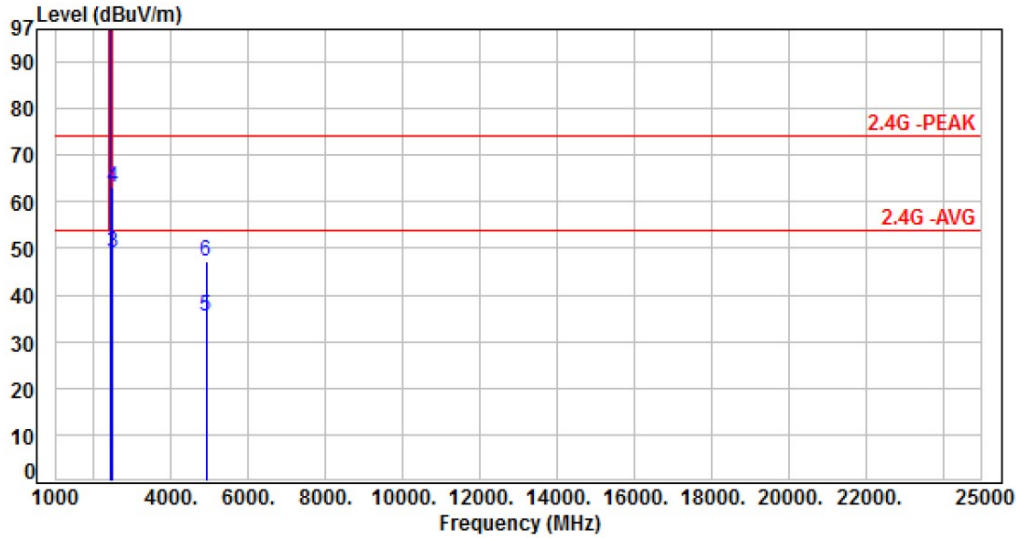


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-2.05	99.80	97.75	200.00	-102.25	Average	245	347	P
2	2452.00	-2.05	112.73	110.68	200.00	-89.32	Peak	245	347	P
3	2483.50	-1.98	51.12	49.14	54.00	-4.86	Average	245	347	P
4	2483.50	-1.98	65.20	63.22	74.00	-10.78	Peak	245	347	P
5	4904.00	6.46	28.83	35.29	54.00	-18.71	Average	100	79	P
6	4904.00	6.46	40.86	47.32	74.00	-26.68	Peak	100	79	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, 11ax HE40 CH09		

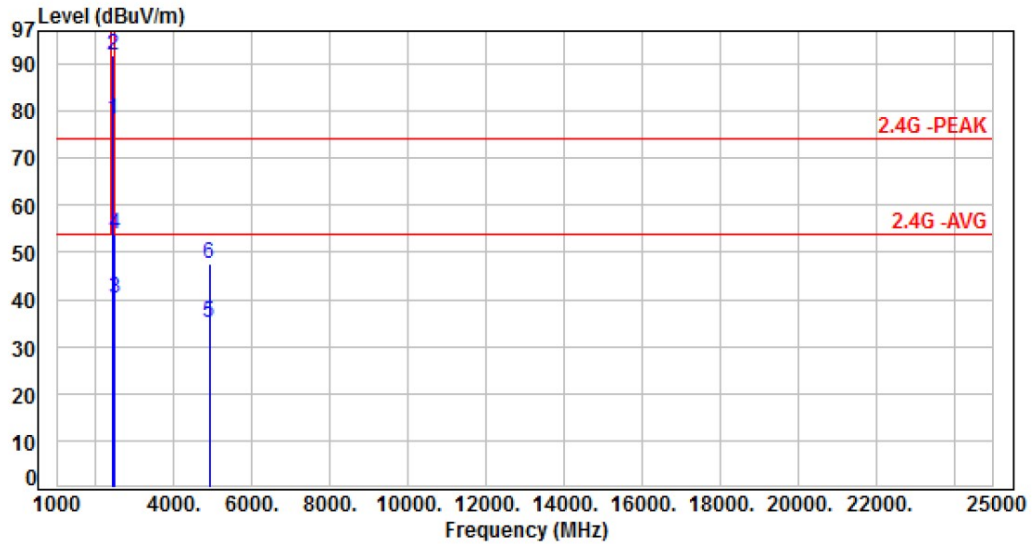


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-2.05	80.27	78.22	200.00	-121.78	Average	100	117	P
2	2452.00	-2.05	93.87	91.82	200.00	-108.18	Peak	100	117	P
3	2483.50	-1.98	42.06	40.08	54.00	-13.92	Average	100	117	P
4	2483.50	-1.98	55.81	53.83	74.00	-20.17	Peak	100	117	P
5	4904.00	6.46	28.50	34.96	54.00	-19.04	Average	100	358	P
6	4904.00	6.46	41.20	47.66	74.00	-26.34	Peak	100	358	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, 11ax HE20 CH01		:

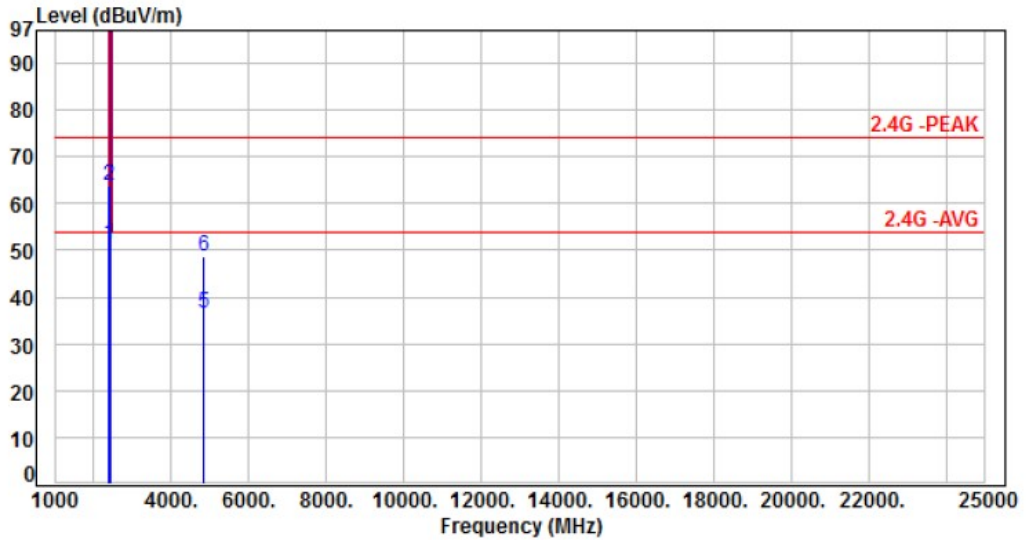


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	53.32	51.20	54.00	-2.80	Average	171	45	P
2	2390.00	-2.12	65.85	63.73	74.00	-10.27	Peak	171	45	P
3	2412.00	-2.10	112.21	110.11	200.00	-89.89	Average	171	45	P
4	2412.00	-2.10	116.23	114.13	200.00	-85.87	Peak	171	45	P
5	4824.00	6.09	30.36	36.45	54.00	-17.55	Average	100	164	P
6	4824.00	6.09	42.65	48.74	74.00	-25.26	Peak	100	164	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, 11ax HE20 CH01		

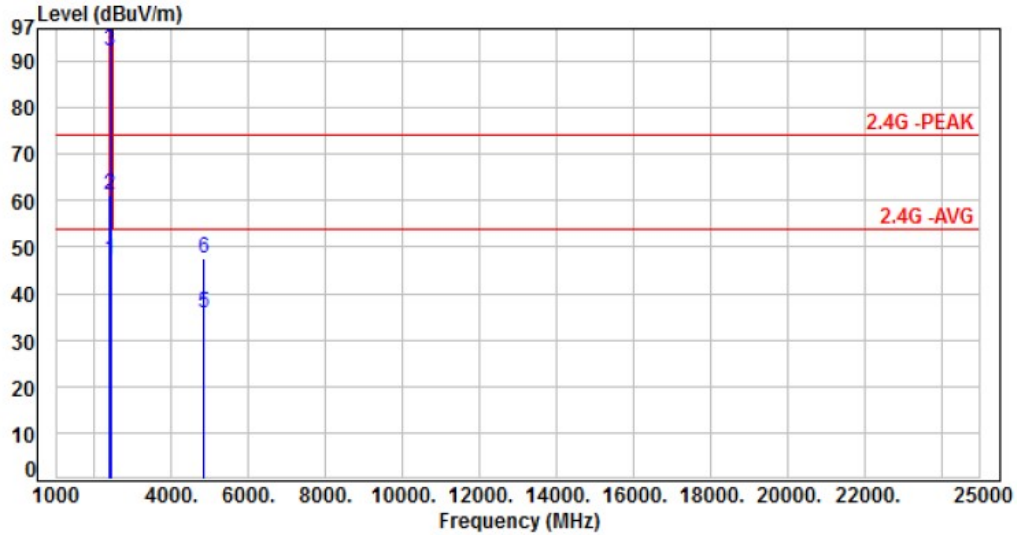


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	49.26	47.14	54.00	-6.86	Average	169	121	P
2	2390.00	-2.12	63.19	61.07	74.00	-12.93	Peak	169	121	P
3	2412.00	-2.10	94.15	92.05	200.00	-107.95	Average	169	121	P
4	2412.00	-2.10	106.59	104.49	200.00	-95.51	Peak	169	121	P
5	4824.00	6.09	29.86	35.95	54.00	-18.05	Average	100	195	P
6	4824.00	6.09	41.55	47.64	74.00	-26.36	Peak	100	195	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, 11ax HE20 CH06		:

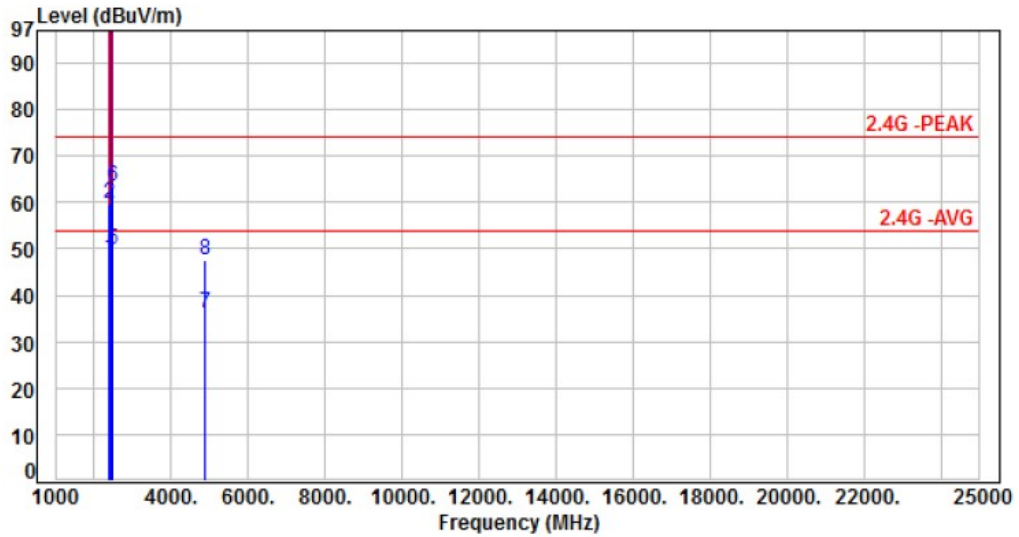


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	50.01	47.89	54.00	-6.11	Average	237	350	P
2	2390.00	-2.12	62.05	59.93	74.00	-14.07	Peak	237	350	P
3	2437.00	-2.07	115.46	113.39	200.00	-86.61	Average	237	350	P
4	2437.00	-2.07	119.53	117.46	200.00	-82.54	Peak	237	350	P
5	2483.50	-1.98	51.60	49.62	54.00	-4.38	Average	237	350	P
6	2483.50	-1.98	65.28	63.30	74.00	-10.70	Peak	237	350	P
7	4874.00	6.36	29.62	35.98	54.00	-18.02	Average	100	167	P
8	4874.00	6.36	41.39	47.75	74.00	-26.25	Peak	100	167	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, 11ax HE20 CH06		

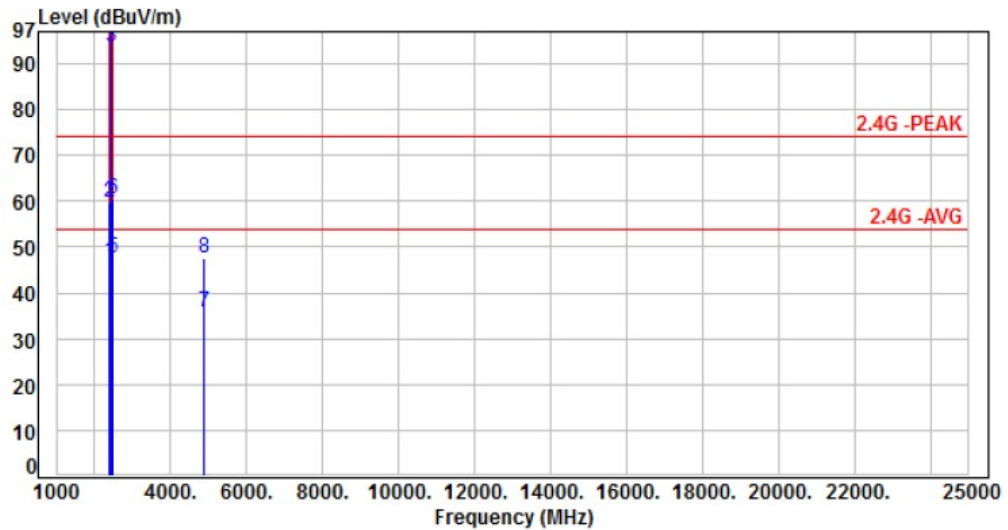


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	49.13	47.01	54.00	-6.99	Average	243	128	P
2	2390.00	-2.12	61.70	59.58	74.00	-14.42	Peak	243	128	P
3	2437.00	-2.07	95.78	93.71	200.00	-106.29	Average	243	128	P
4	2437.00	-2.07	100.73	98.66	200.00	-101.34	Peak	243	128	P
5	2483.50	-1.98	49.48	47.50	54.00	-6.50	Average	243	128	P
6	2483.50	-1.98	62.37	60.39	74.00	-13.61	Peak	243	128	P
7	4874.00	6.36	29.47	35.83	54.00	-18.17	Average	100	195	P
8	4874.00	6.36	41.27	47.63	74.00	-26.37	Peak	100	195	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, 11ax HE20 CH11		

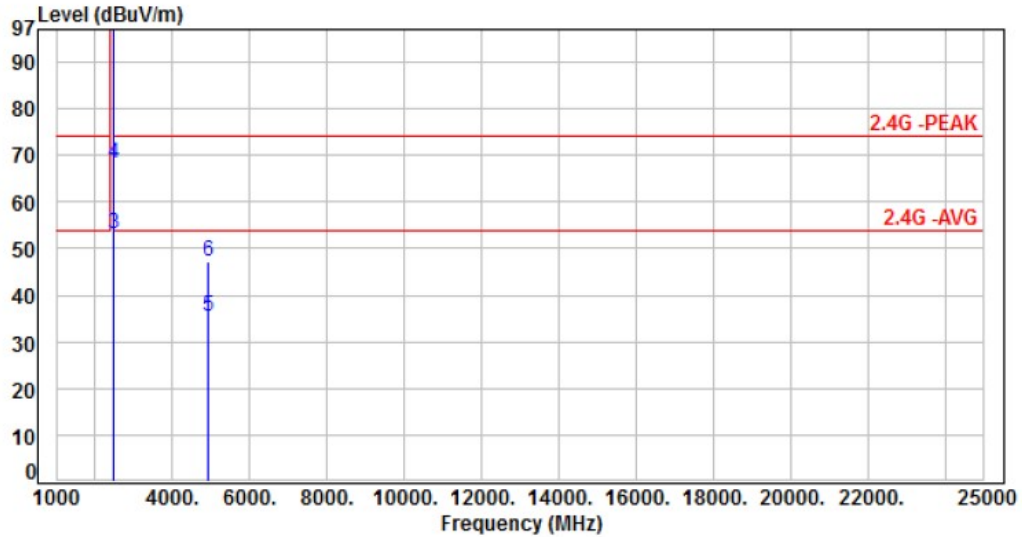


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	112.62	110.60	200.00	-89.40	Average	129	347	P
2	2462.00	-2.02	116.10	114.08	200.00	-85.92	Peak	129	347	P
3	2483.50	-1.98	55.15	53.17	54.00	-0.83	Average	129	347	P
4	2483.50	-1.98	70.29	68.31	74.00	-5.69	Peak	129	347	P
5	4924.00	6.48	28.83	35.31	54.00	-18.69	Average	100	161	P
6	4924.00	6.48	40.65	47.13	74.00	-26.87	Peak	100	161	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, 11ax HE20 CH11		

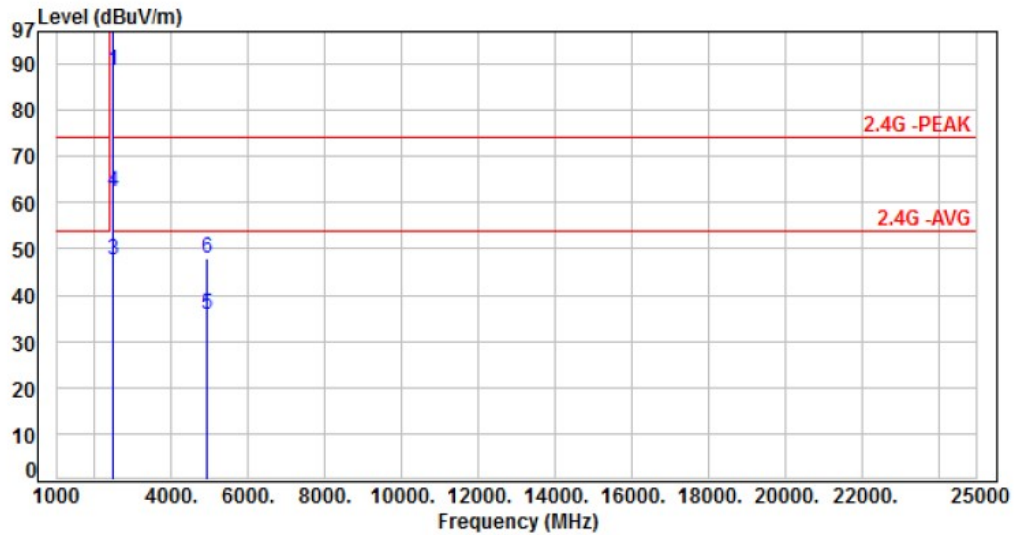


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	90.51	88.49	200.00	-111.51	Average	163	121	P
2	2462.00	-2.02	104.73	102.71	200.00	-97.29	Peak	163	121	P
3	2483.50	-1.98	49.57	47.59	54.00	-6.41	Average	163	121	P
4	2483.50	-1.98	64.39	62.41	74.00	-11.59	Peak	163	121	P
5	4924.00	6.48	29.18	35.66	54.00	-18.34	Average	100	196	P
6	4924.00	6.48	41.63	48.11	74.00	-25.89	Peak	100	196	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, 11ax HE40 CH03		:

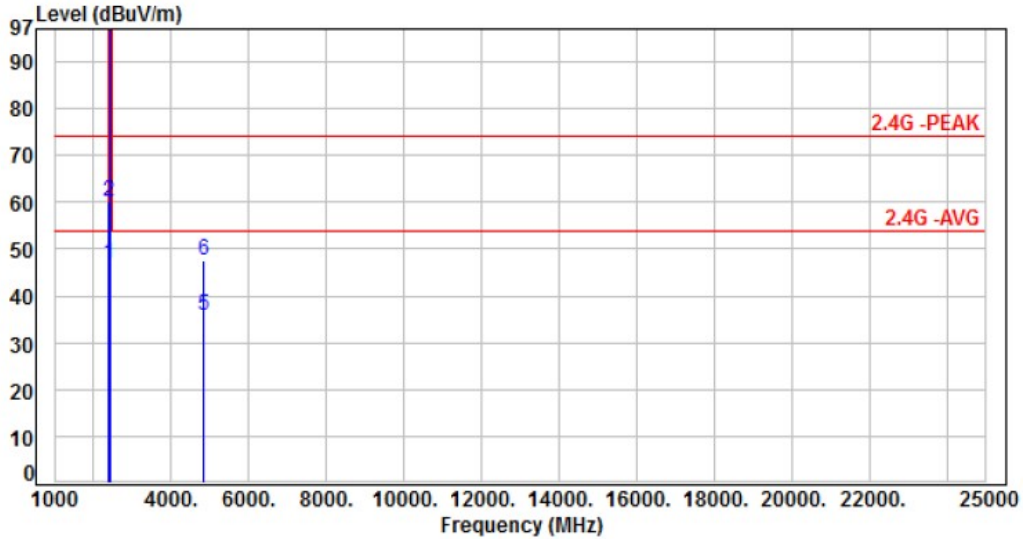


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	48.91	46.79	54.00	-7.21	Average	223	43	P
2	2390.00	-2.12	62.16	60.04	74.00	-13.96	Peak	223	43	P
3	2422.00	-2.08	111.94	109.86	200.00	-90.14	Average	223	43	P
4	2422.00	-2.08	113.94	111.86	200.00	-88.14	Peak	223	43	P
5	4844.00	6.23	29.52	35.75	54.00	-18.25	Average	100	166	P
6	4844.00	6.23	41.24	47.47	74.00	-26.53	Peak	100	166	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, 11ax HE40 CH03		:

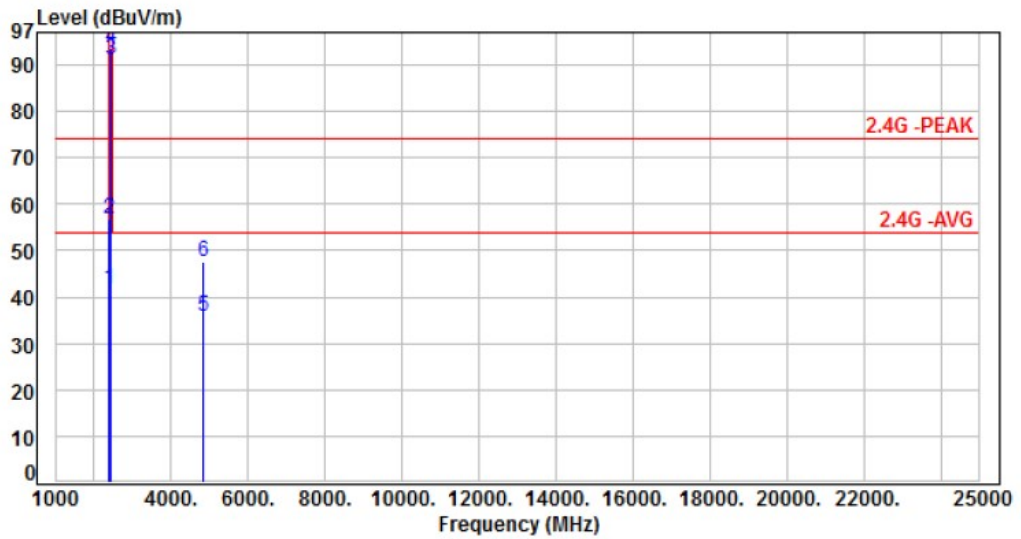


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	43.80	41.68	54.00	-12.32	Average	232	126	P
2	2390.00	-2.12	58.81	56.69	74.00	-17.31	Peak	232	126	P
3	2422.00	-2.08	93.17	91.09	200.00	-108.91	Average	232	126	P
4	2422.00	-2.08	95.71	93.63	200.00	-106.37	Peak	232	126	P
5	4844.00	6.23	29.72	35.95	54.00	-18.05	Average	100	194	P
6	4844.00	6.23	41.39	47.62	74.00	-26.38	Peak	100	194	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, 11ax HE40 CH06		

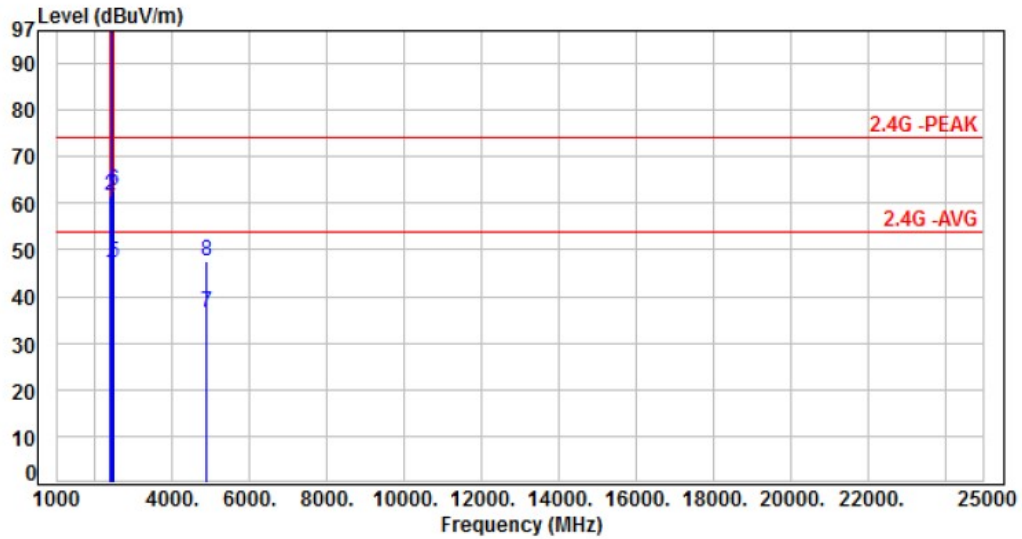


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	46.94	44.82	54.00	-9.18	Average	173	42	P
2	2390.00	-2.12	63.71	61.59	74.00	-12.41	Peak	173	42	P
3	2437.00	-2.07	111.54	109.47	200.00	-90.53	Average	173	42	P
4	2437.00	-2.07	114.01	111.94	200.00	-88.06	Peak	173	42	P
5	2483.50	-1.98	49.14	47.16	54.00	-6.84	Average	173	42	P
6	2483.50	-1.98	64.55	62.57	74.00	-11.43	Peak	173	42	P
7	4874.00	6.36	30.15	36.51	54.00	-17.49	Average	100	168	P
8	4874.00	6.36	41.29	47.65	74.00	-26.35	Peak	100	168	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, 11ax HE40 CH06		

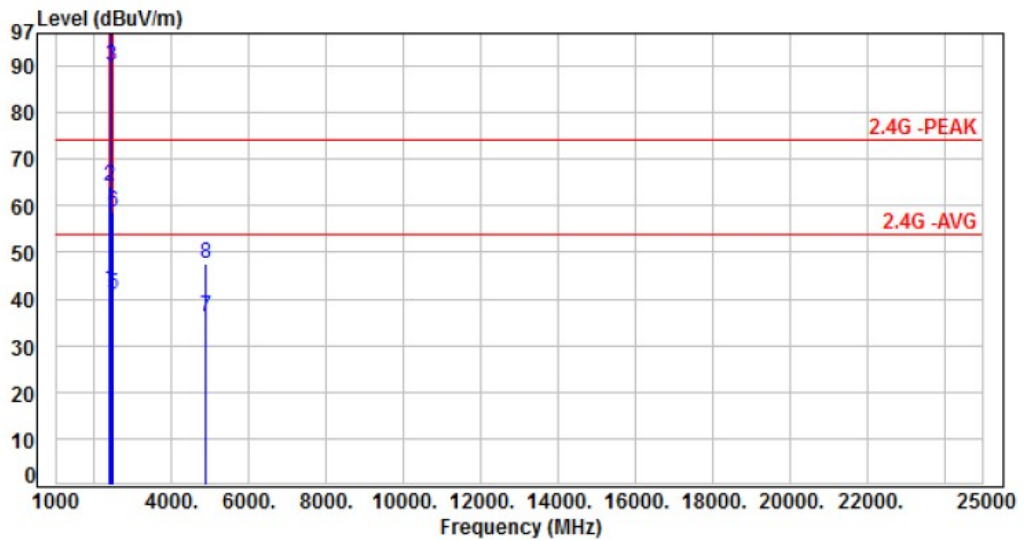


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	44.08	41.96	54.00	-12.04	Average	108	127	P
2	2390.00	-2.12	66.45	64.33	74.00	-9.67	Peak	108	127	P
3	2437.00	-2.07	91.97	89.90	200.00	-110.10	Average	108	127	P
4	2437.00	-2.07	102.66	100.59	200.00	-99.41	Peak	108	127	P
5	2483.50	-1.98	42.87	40.89	54.00	-13.11	Average	108	127	P
6	2483.50	-1.98	60.59	58.61	74.00	-15.39	Peak	108	127	P
7	4874.00	6.36	29.94	36.30	54.00	-17.70	Average	100	196	P
8	4874.00	6.36	41.19	47.55	74.00	-26.45	Peak	100	196	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, 11ax HE40 CH09		

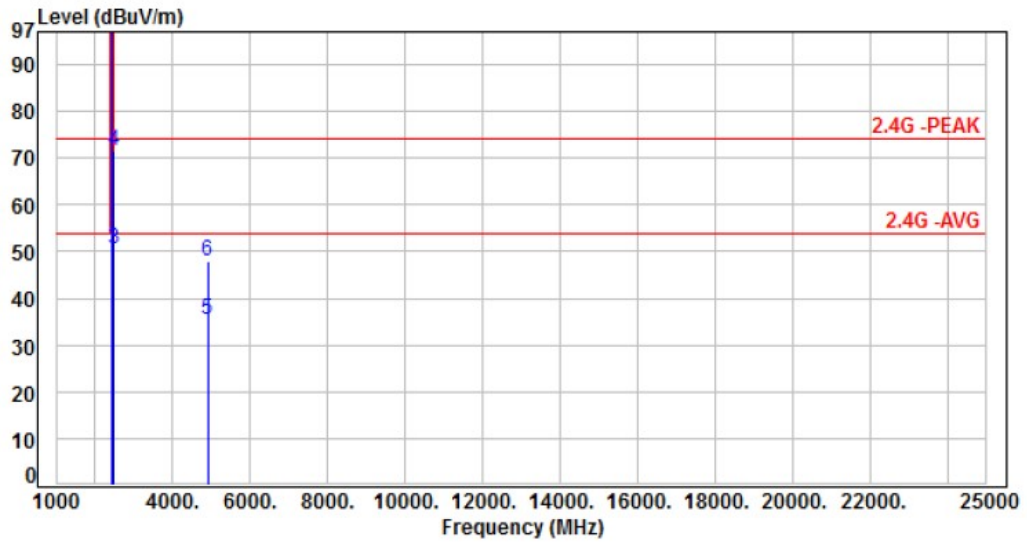


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-2.05	110.58	108.53	200.00	-91.47	Average	164	345	P
2	2452.00	-2.05	112.69	110.64	200.00	-89.36	Peak	164	345	P
3	2483.50	-1.98	52.34	50.36	54.00	-3.64	Average	164	345	P
4	2483.50	-1.98	73.52	71.54	74.00	-2.46	Peak	164	345	P
5	4904.00	6.46	28.86	35.32	54.00	-18.68	Average	100	166	P
6	4904.00	6.46	41.45	47.91	74.00	-26.09	Peak	100	166	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, 11ax HE40 CH09		

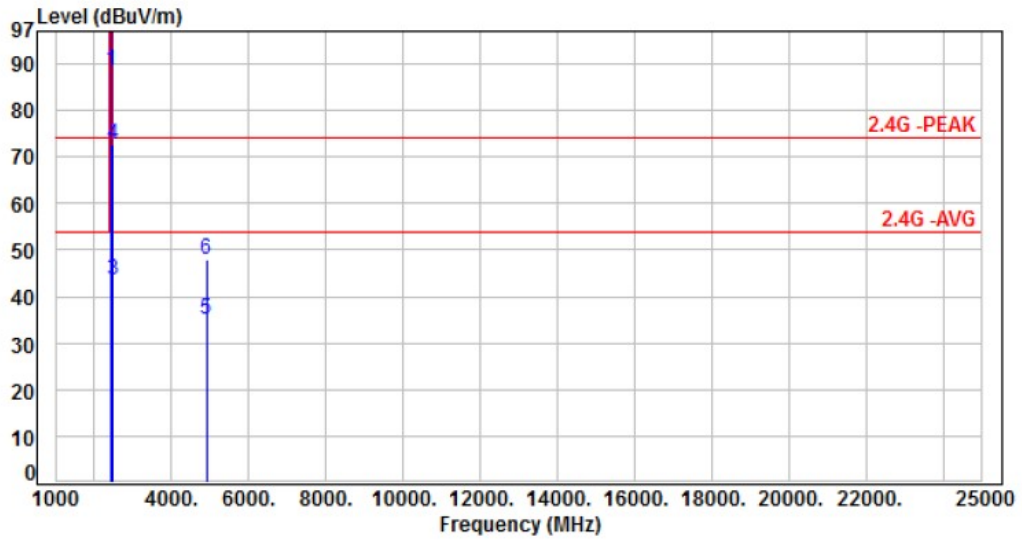


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-2.05	90.52	88.47	200.00	-111.53	Average	165	117	P
2	2452.00	-2.05	100.65	98.60	200.00	-101.40	Peak	165	117	P
3	2483.50	-1.98	45.47	43.49	54.00	-10.51	Average	165	117	P
4	2483.50	-1.98	74.68	72.70	74.00	-1.30	Peak	165	117	P
5	4904.00	6.46	28.52	34.98	54.00	-19.02	Average	100	199	P
6	4904.00	6.46	41.58	48.04	74.00	-25.96	Peak	100	199	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, 11b CH01		

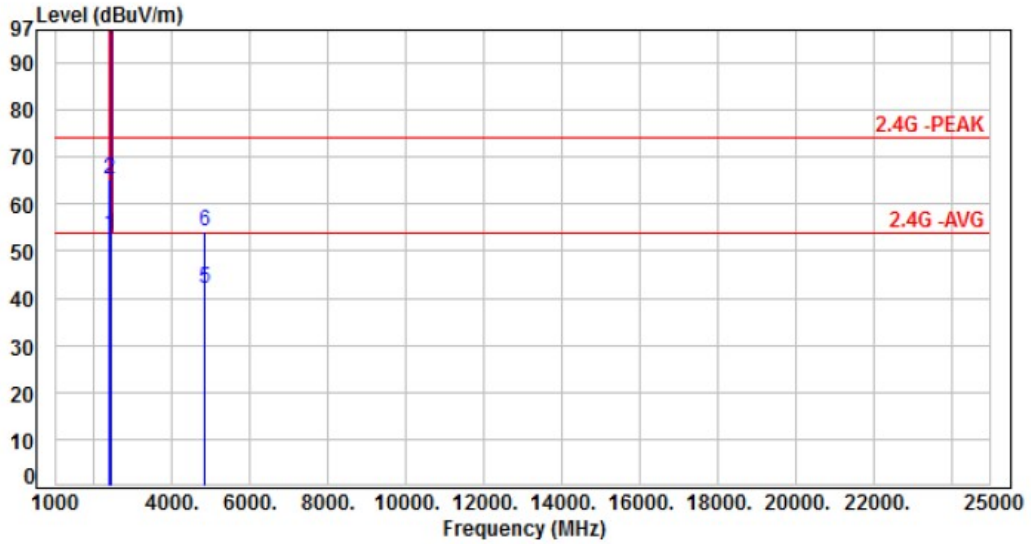


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	55.46	53.34	54.00	-0.66	Average	100	356	P
2	2390.00	-2.12	67.34	65.22	74.00	-8.78	Peak	100	356	P
3	2412.00	-2.10	120.90	118.80	200.00	-81.20	Average	100	356	P
4	2412.00	-2.10	124.18	122.08	200.00	-77.92	Peak	100	356	P
5	4824.00	6.09	35.98	42.07	54.00	-11.93	Average	278	360	P
6	4824.00	6.09	48.31	54.40	74.00	-19.60	Peak	278	360	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, 11b CH01		:

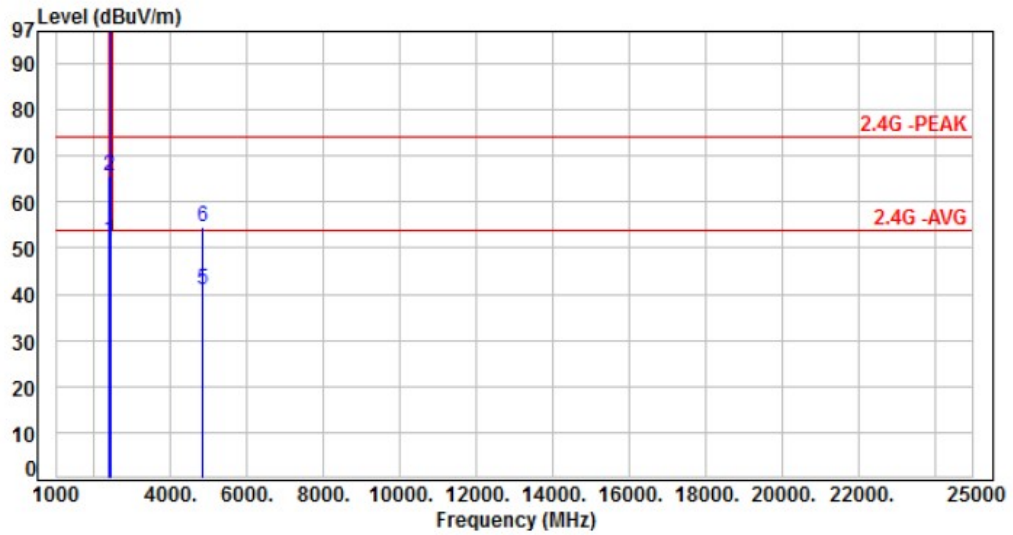


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	53.79	51.67	54.00	-2.33	Average	113	4	P
2	2390.00	-2.12	67.68	65.56	74.00	-8.44	Peak	113	4	P
3	2412.00	-2.10	107.21	105.11	200.00	-94.89	Average	113	4	P
4	2412.00	-2.10	110.33	108.23	200.00	-91.77	Peak	113	4	P
5	4824.00	6.09	34.69	40.78	54.00	-13.22	Average	100	36	P
6	4824.00	6.09	48.66	54.75	74.00	-19.25	Peak	100	36	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, 11b CH06		

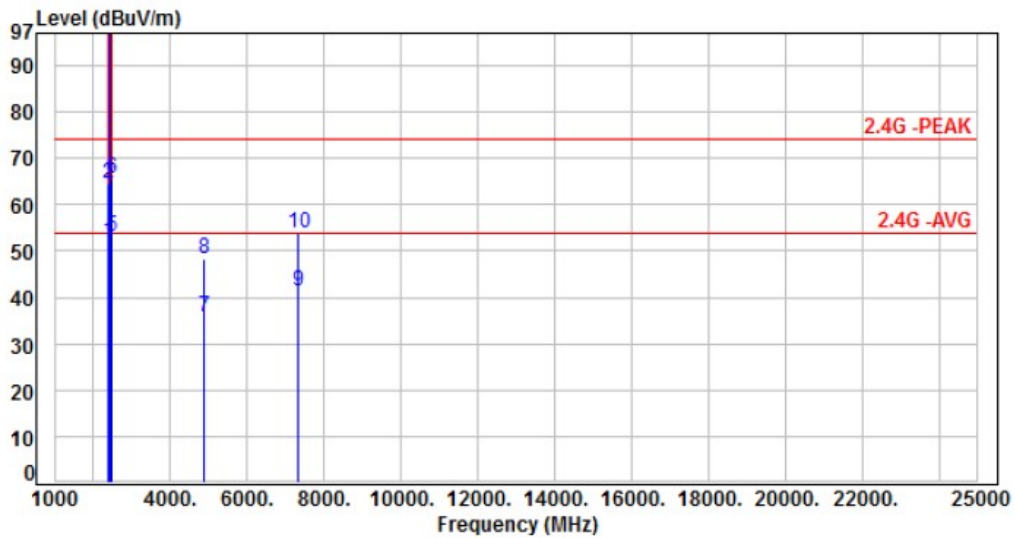


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	54.08	51.96	54.00	-2.04	Average	100	351	P
2	2390.00	-2.12	66.75	64.63	74.00	-9.37	Peak	100	351	P
3	2437.00	-2.07	123.45	121.38	200.00	-78.62	Average	100	351	P
4	2437.00	-2.07	126.70	124.63	200.00	-75.37	Peak	100	351	P
5	2483.50	-1.98	55.27	53.29	54.00	-0.71	Average	100	351	P
6	2483.50	-1.98	67.75	65.77	74.00	-8.23	Peak	100	351	P
7	4874.00	6.36	29.27	35.63	54.00	-18.37	Average	100	138	P
8	4874.00	6.36	41.80	48.16	74.00	-25.84	Peak	100	138	P
9	7311.00	11.42	29.73	41.15	54.00	-12.85	Average	100	146	P
10	7311.00	11.42	42.57	53.99	74.00	-20.01	Peak	100	146	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, 11b CH06		:

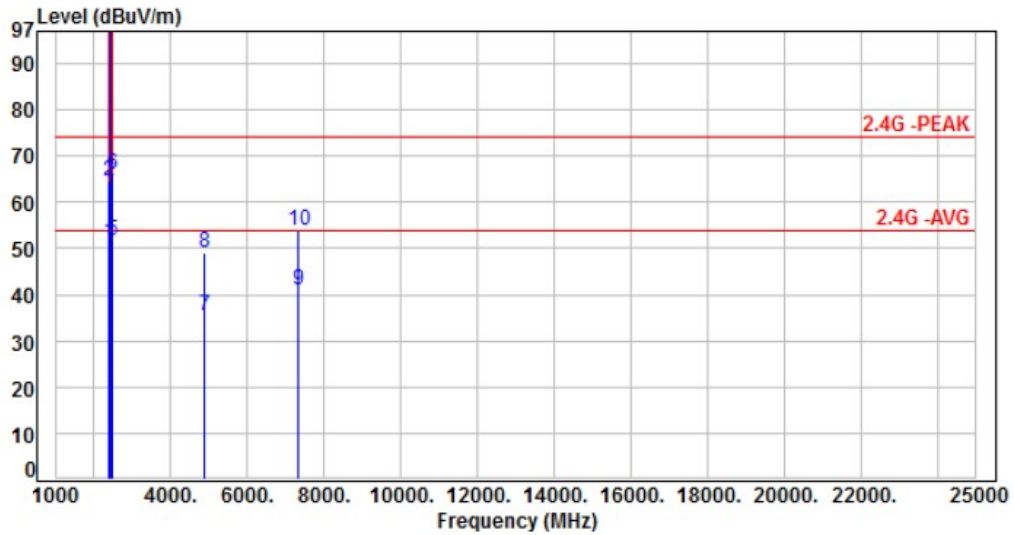


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	53.57	51.45	54.00	-2.55	Average	100	64	P
2	2390.00	-2.12	66.57	64.45	74.00	-9.55	Peak	100	64	P
3	2437.00	-2.07	108.59	106.52	200.00	-93.48	Average	100	64	P
4	2437.00	-2.07	111.68	109.61	200.00	-90.39	Peak	100	64	P
5	2483.50	-1.98	53.77	51.79	54.00	-2.21	Average	100	64	P
6	2483.50	-1.98	68.03	66.05	74.00	-7.95	Peak	100	64	P
7	4874.00	6.36	28.93	35.29	54.00	-18.71	Average	100	226	P
8	4874.00	6.36	42.69	49.05	74.00	-24.95	Peak	100	226	P
9	7311.00	11.42	29.68	41.10	54.00	-12.90	Average	100	196	P
10	7311.00	11.42	42.34	53.76	74.00	-20.24	Peak	100	196	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, 11b CH11		:

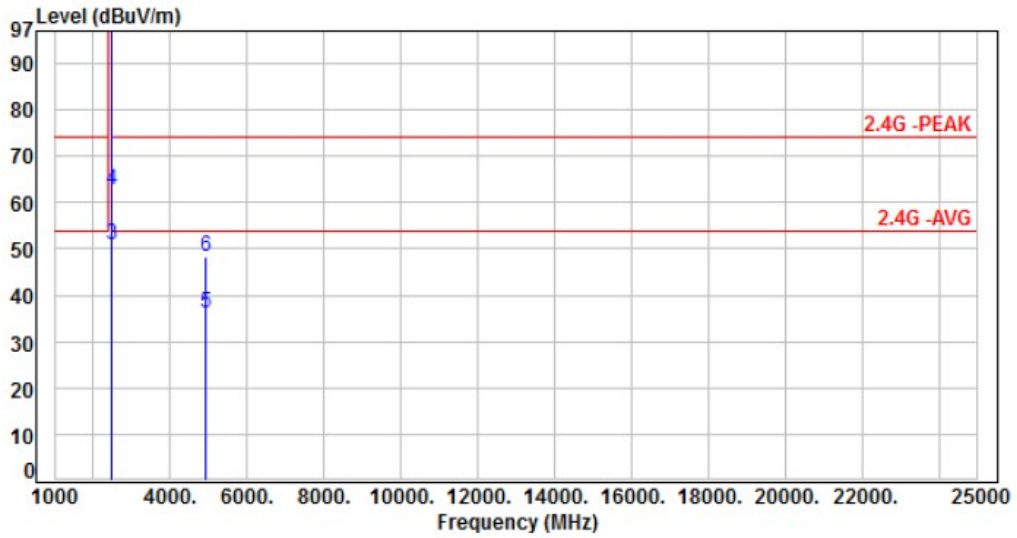


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	120.64	118.62	200.00	-81.38	Average	100	351	P
2	2462.00	-2.02	123.94	121.92	200.00	-78.08	Peak	100	351	P
3	2483.50	-1.98	52.85	50.87	54.00	-3.13	Average	100	351	P
4	2483.50	-1.98	64.73	62.75	74.00	-11.25	Peak	100	351	P
5	4924.00	6.48	29.69	36.17	54.00	-17.83	Average	100	214	P
6	4924.00	6.48	41.99	48.47	74.00	-25.53	Peak	100	214	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, 11b CH11		:

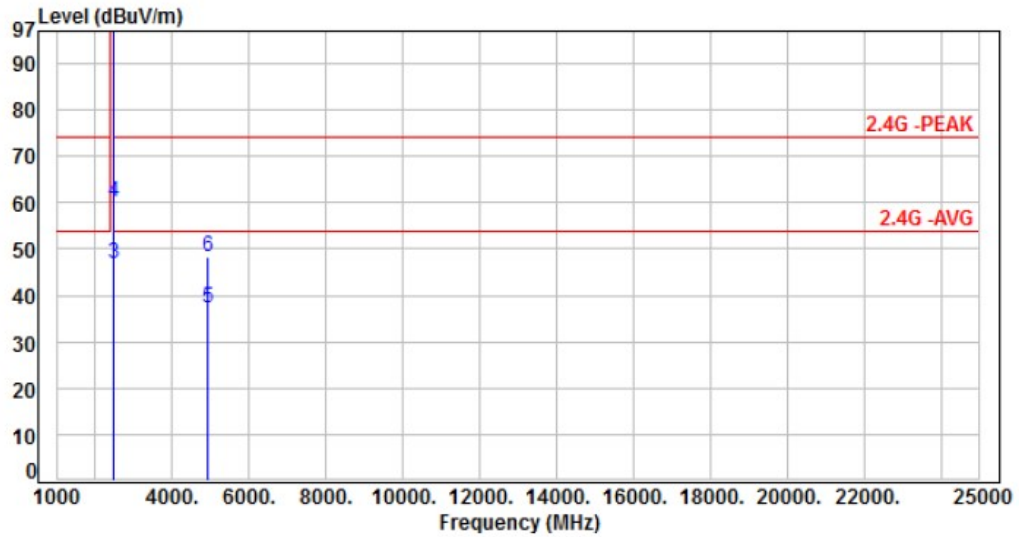


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	107.42	105.40	200.00	-94.60	Average	112	57	P
2	2462.00	-2.02	110.63	108.61	200.00	-91.39	Peak	112	57	P
3	2483.50	-1.98	48.83	46.85	54.00	-7.15	Average	112	57	P
4	2483.50	-1.98	62.12	60.14	74.00	-13.86	Peak	112	57	P
5	4924.00	6.48	30.64	37.12	54.00	-16.88	Average	100	137	P
6	4924.00	6.48	41.69	48.17	74.00	-25.83	Peak	100	137	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, 11g CH01		:

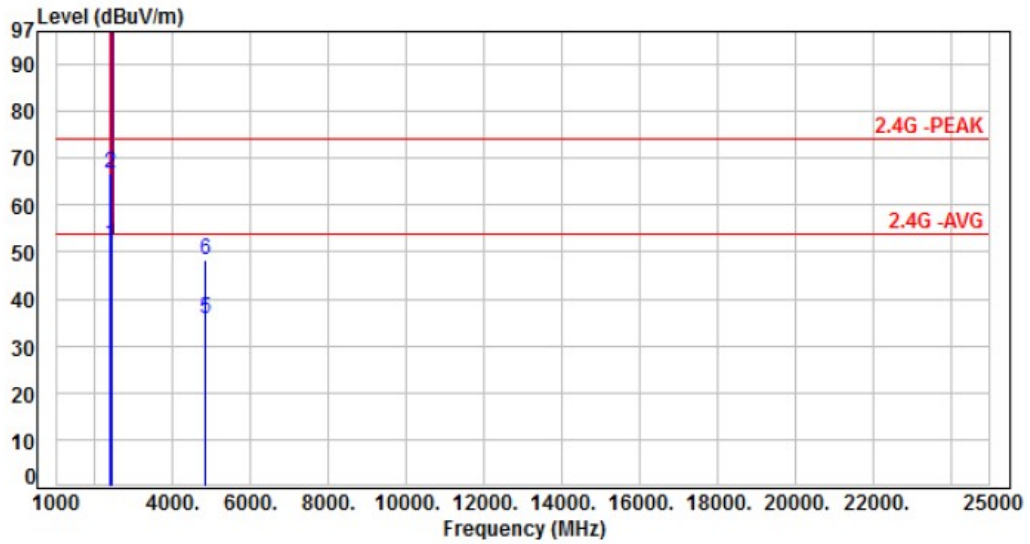


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	53.62	51.50	54.00	-2.50	Average	100	360	P
2	2390.00	-2.12	68.73	66.61	74.00	-7.39	Peak	100	360	P
3	2412.00	-2.10	113.24	111.14	200.00	-88.86	Average	100	360	P
4	2412.00	-2.10	123.69	121.59	200.00	-78.41	Peak	100	360	P
5	4824.00	6.09	29.67	35.76	54.00	-18.24	Average	100	117	P
6	4824.00	6.09	42.08	48.17	74.00	-25.83	Peak	100	117	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, 11g CH01		:

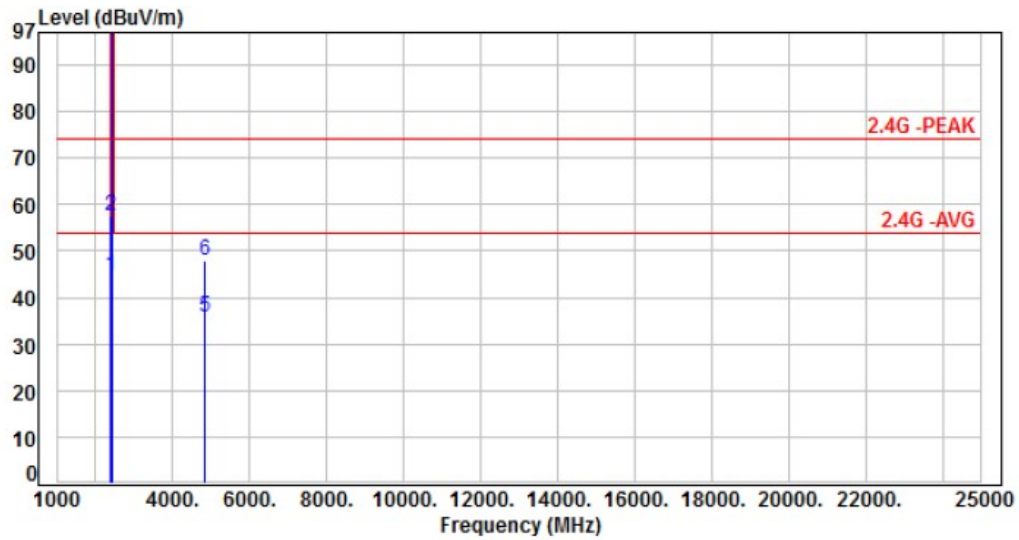


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	46.63	44.51	54.00	-9.49	Average	114	0	P
2	2390.00	-2.12	59.74	57.62	74.00	-16.38	Peak	114	0	P
3	2412.00	-2.10	99.54	97.44	200.00	-102.56	Average	114	0	P
4	2412.00	-2.10	109.82	107.72	200.00	-92.28	Peak	114	0	P
5	4824.00	6.09	29.63	35.72	54.00	-18.28	Average	100	226	P
6	4824.00	6.09	41.99	48.08	74.00	-25.92	Peak	100	226	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, 11g CH06		

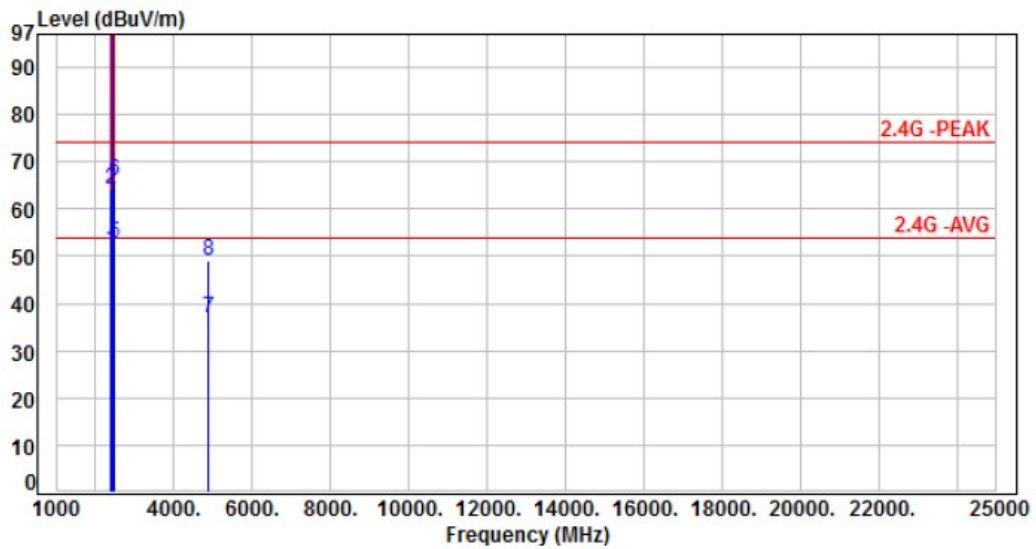


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	53.44	51.32	54.00	-2.68	Average	100	0	P
2	2390.00	-2.12	66.40	64.28	74.00	-9.72	Peak	100	0	P
3	2437.00	-2.07	120.51	118.44	200.00	-81.56	Average	100	0	P
4	2437.00	-2.07	131.17	129.10	200.00	-70.90	Peak	100	0	P
5	2483.50	-1.98	54.75	52.77	54.00	-1.23	Average	100	0	P
6	2483.50	-1.98	68.17	66.19	74.00	-7.81	Peak	100	0	P
7	4874.00	6.36	30.51	36.87	54.00	-17.13	Average	100	314	P
8	4874.00	6.36	42.61	48.97	74.00	-25.03	Peak	100	314	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, 11g CH06		:

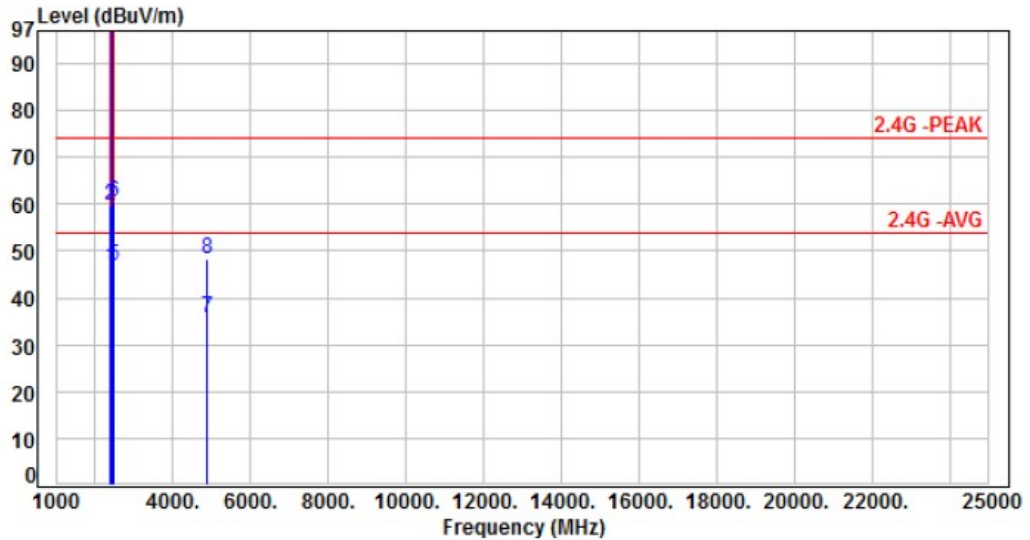


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	48.70	46.58	54.00	-7.42	Average	113	54	P
2	2390.00	-2.12	61.90	59.78	74.00	-14.22	Peak	113	54	P
3	2437.00	-2.07	105.38	103.31	200.00	-96.69	Average	113	54	P
4	2437.00	-2.07	115.61	113.54	200.00	-86.46	Peak	113	54	P
5	2483.50	-1.98	48.99	47.01	54.00	-6.99	Average	113	54	P
6	2483.50	-1.98	62.40	60.42	74.00	-13.58	Peak	113	54	P
7	4874.00	6.36	29.31	35.67	54.00	-18.33	Average	100	124	P
8	4874.00	6.36	42.11	48.47	74.00	-25.53	Peak	100	124	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 9, 11g CH11		

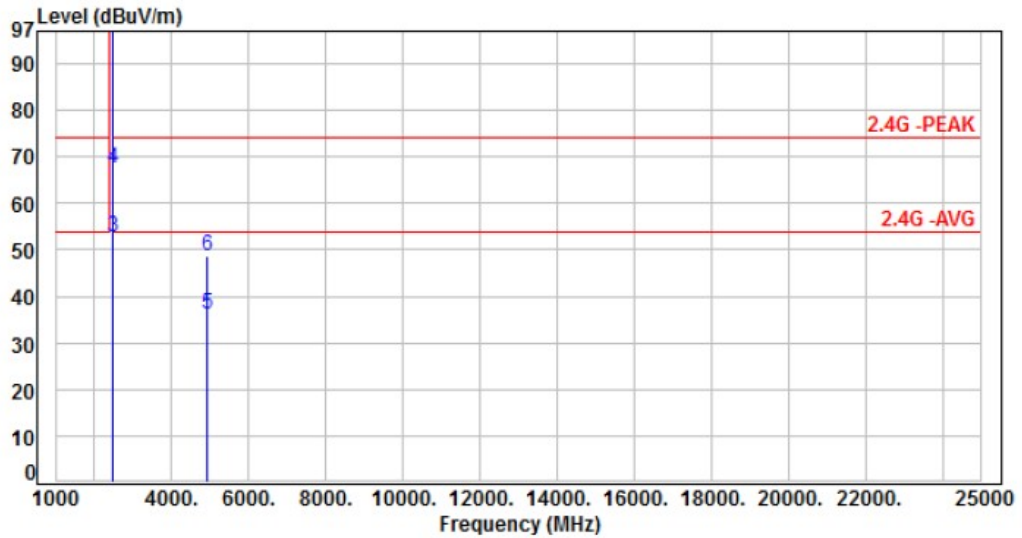


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	111.45	109.43	200.00	-90.57	Average	113	4	P
2	2462.00	-2.02	122.16	120.14	200.00	-79.86	Peak	113	4	P
3	2483.50	-1.98	54.67	52.69	54.00	-1.31	Average	113	4	P
4	2483.50	-1.98	69.55	67.57	74.00	-6.43	Peak	113	4	P
5	4924.00	6.48	29.61	36.09	54.00	-17.91	Average	100	166	P
6	4924.00	6.48	42.15	48.63	74.00	-25.37	Peak	100	166	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 9, 11g CH11		:

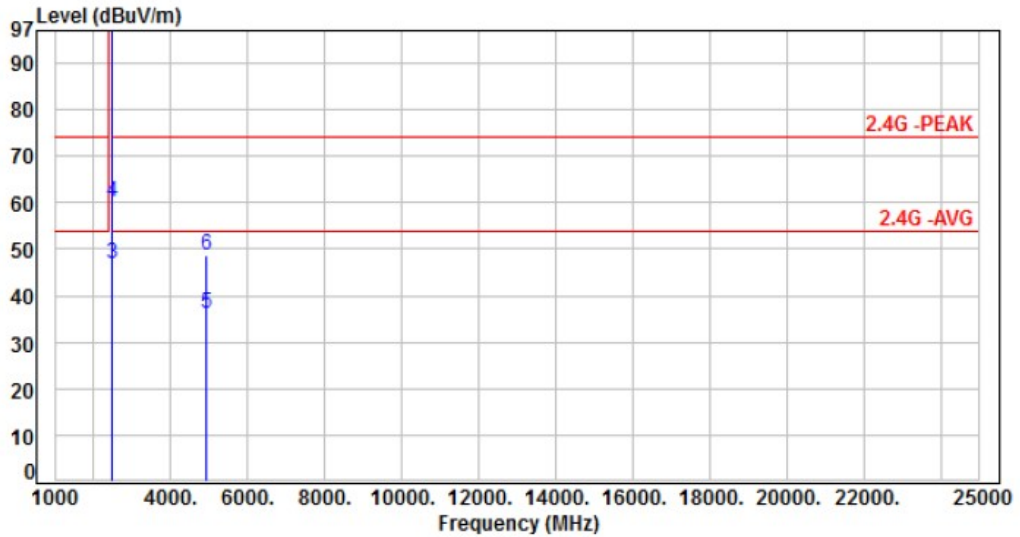


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	97.47	95.45	200.00	-104.55	Average	281	346	P
2	2462.00	-2.02	107.32	105.30	200.00	-94.70	Peak	281	346	P
3	2483.50	-1.98	48.96	46.98	54.00	-7.02	Average	281	346	P
4	2483.50	-1.98	62.06	60.08	74.00	-13.92	Peak	281	346	P
5	4924.00	6.48	29.74	36.22	54.00	-17.78	Average	100	182	P
6	4924.00	6.48	42.10	48.58	74.00	-25.42	Peak	100	182	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, 11ax HE20 CH01		

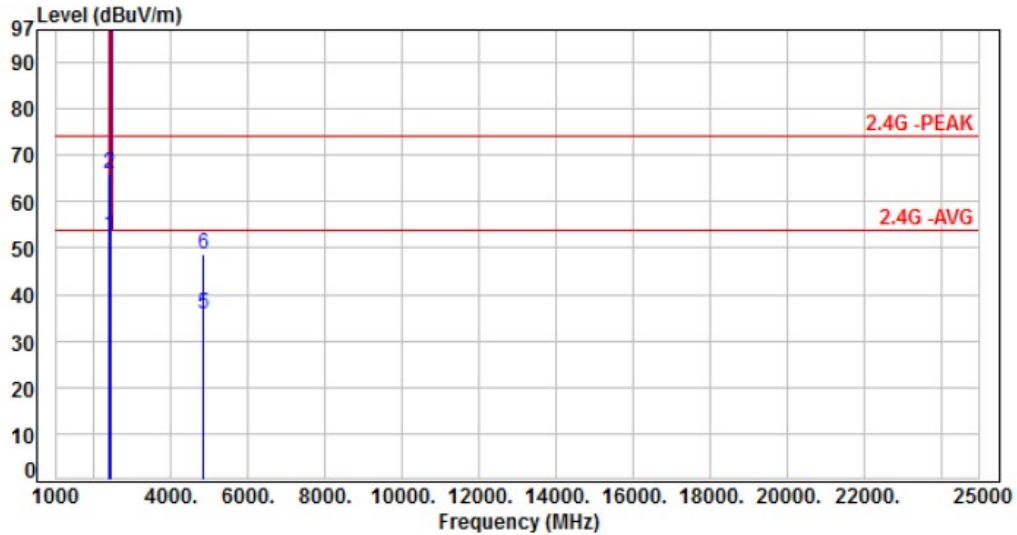


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	54.80	52.68	54.00	-1.32	Average	109	360	P
2	2390.00	-2.12	67.97	65.85	74.00	-8.15	Peak	109	360	P
3	2412.00	-2.10	113.54	111.44	200.00	-88.56	Average	109	360	P
4	2412.00	-2.10	126.24	124.14	200.00	-75.86	Peak	109	360	P
5	4824.00	6.09	29.61	35.70	54.00	-18.30	Average	100	225	P
6	4824.00	6.09	42.61	48.70	74.00	-25.30	Peak	100	225	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, 11ax HE20 CH01		:

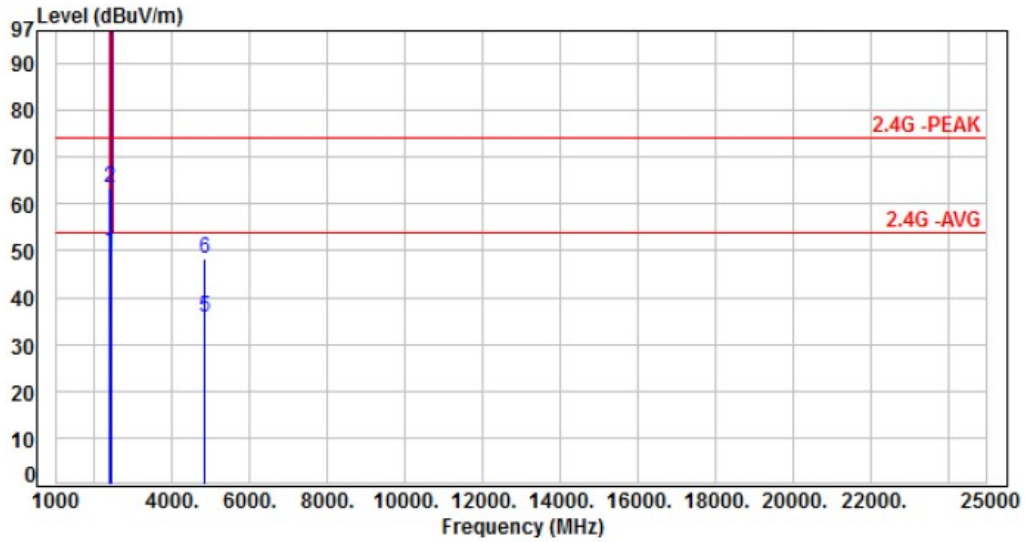


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	51.74	49.62	54.00	-4.38	Average	112	360	P
2	2390.00	-2.12	65.41	63.29	74.00	-10.71	Peak	112	360	P
3	2412.00	-2.10	99.74	97.64	200.00	-102.36	Average	112	360	P
4	2412.00	-2.10	112.26	110.16	200.00	-89.84	Peak	112	360	P
5	4824.00	6.09	29.64	35.73	54.00	-18.27	Average	100	174	P
6	4824.00	6.09	42.11	48.20	74.00	-25.80	Peak	100	174	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, 11ax HE20 CH06		

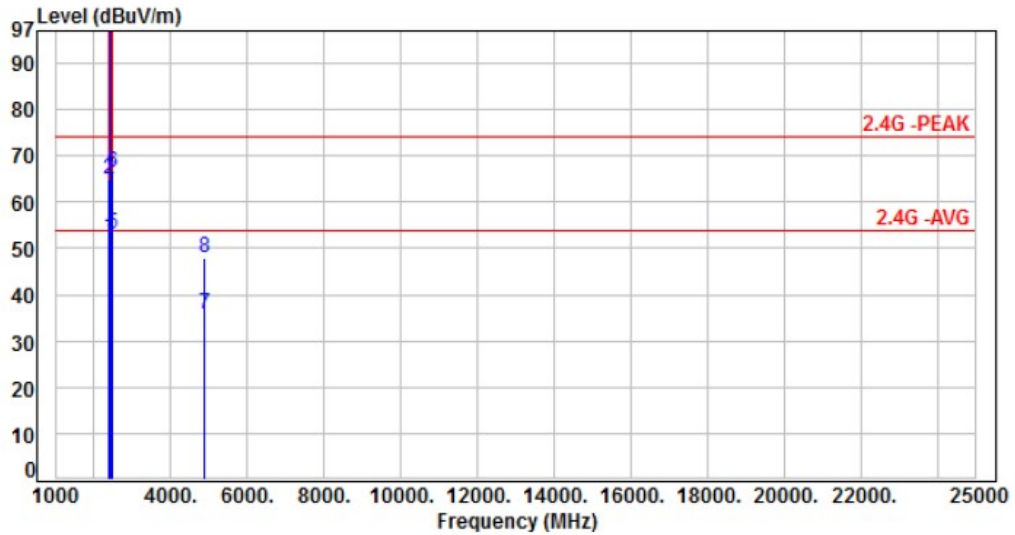


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	54.61	52.49	54.00	-1.51	Average	100	360	P
2	2390.00	-2.12	67.07	64.95	74.00	-9.05	Peak	100	360	P
3	2437.00	-2.07	120.64	118.57	200.00	-81.43	Average	100	360	P
4	2437.00	-2.07	134.10	132.03	200.00	-67.97	Peak	100	360	P
5	2483.50	-1.98	54.92	52.94	54.00	-1.06	Average	100	360	P
6	2483.50	-1.98	68.28	66.30	74.00	-7.70	Peak	100	360	P
7	4874.00	6.36	29.30	35.66	54.00	-18.34	Average	100	134	P
8	4874.00	6.36	41.69	48.05	74.00	-25.95	Peak	100	134	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, 11ax HE20 CH06		

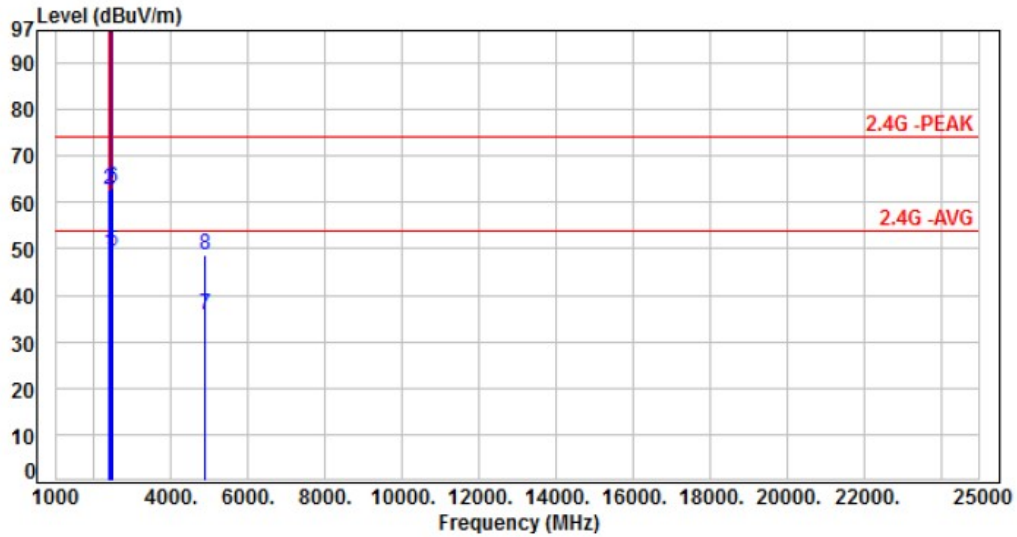


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	51.08	48.96	54.00	-5.04	Average	325	360	P
2	2390.00	-2.12	64.94	62.82	74.00	-11.18	Peak	325	360	P
3	2437.00	-2.07	104.58	102.51	200.00	-97.49	Average	325	360	P
4	2437.00	-2.07	117.63	115.56	200.00	-84.44	Peak	325	360	P
5	2483.50	-1.98	51.48	49.50	54.00	-4.50	Average	325	360	P
6	2483.50	-1.98	65.14	63.16	74.00	-10.84	Peak	325	360	P
7	4874.00	6.36	29.33	35.69	54.00	-18.31	Average	100	184	P
8	4874.00	6.36	42.17	48.53	74.00	-25.47	Peak	100	184	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, 11ax HE20 CH11		

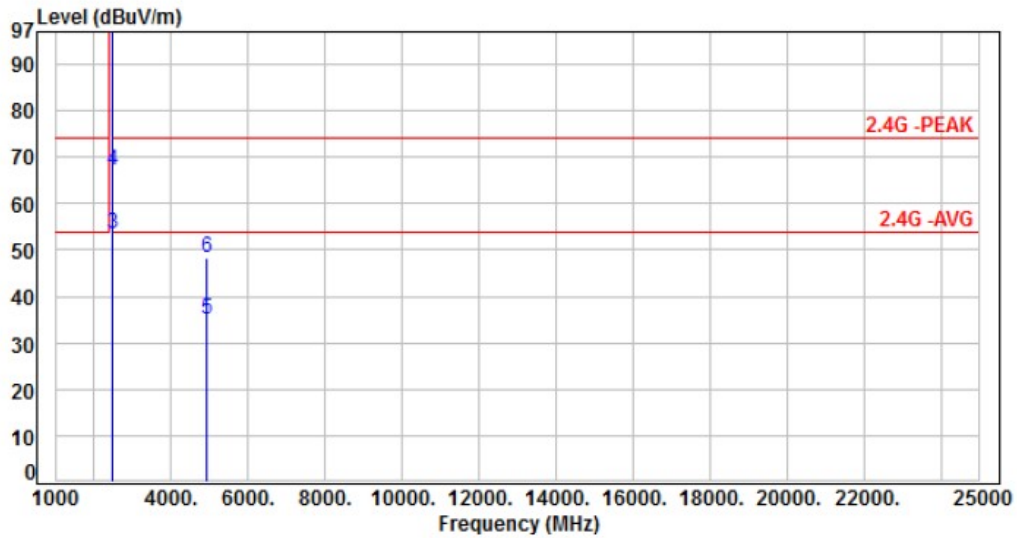


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	107.43	105.41	200.00	-94.59	Average	120	360	P
2	2462.00	-2.02	120.78	118.76	200.00	-81.24	Peak	120	360	P
3	2483.50	-1.98	55.30	53.32	54.00	-0.68	Average	120	360	P
4	2483.50	-1.98	69.15	67.17	74.00	-6.83	Peak	120	360	P
5	4924.00	6.48	28.59	35.07	54.00	-18.93	Average	100	257	P
6	4924.00	6.48	41.81	48.29	74.00	-25.71	Peak	100	257	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, 11ax HE20 CH11		

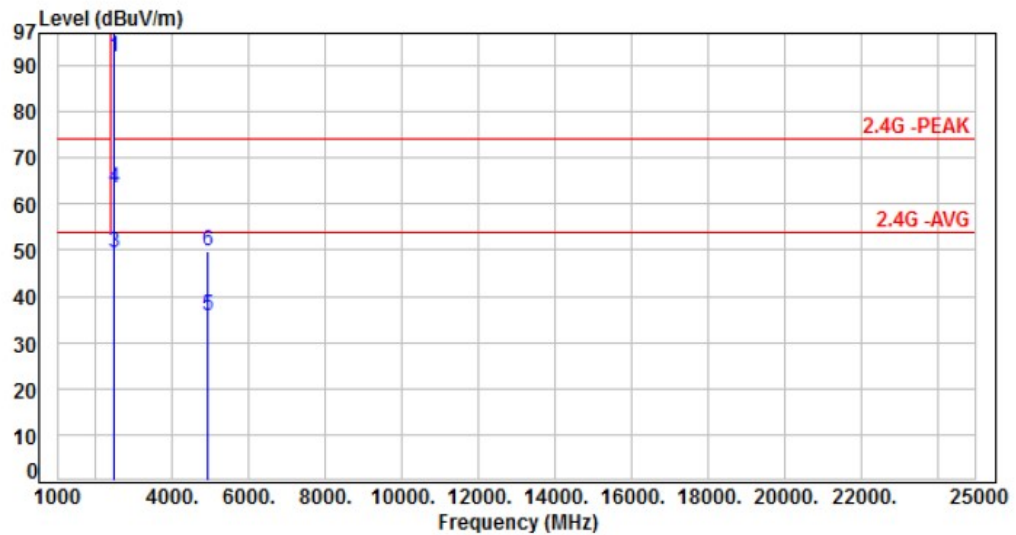


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	93.83	91.81	200.00	-108.19	Average	270	350	P
2	2462.00	-2.02	106.56	104.54	200.00	-95.46	Peak	270	350	P
3	2483.50	-1.98	51.48	49.50	54.00	-4.50	Average	270	350	P
4	2483.50	-1.98	65.29	63.31	74.00	-10.69	Peak	270	350	P
5	4924.00	6.48	29.28	35.76	54.00	-18.24	Average	100	217	P
6	4924.00	6.48	43.37	49.85	74.00	-24.15	Peak	100	217	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, 11ax HE40 CH03		:

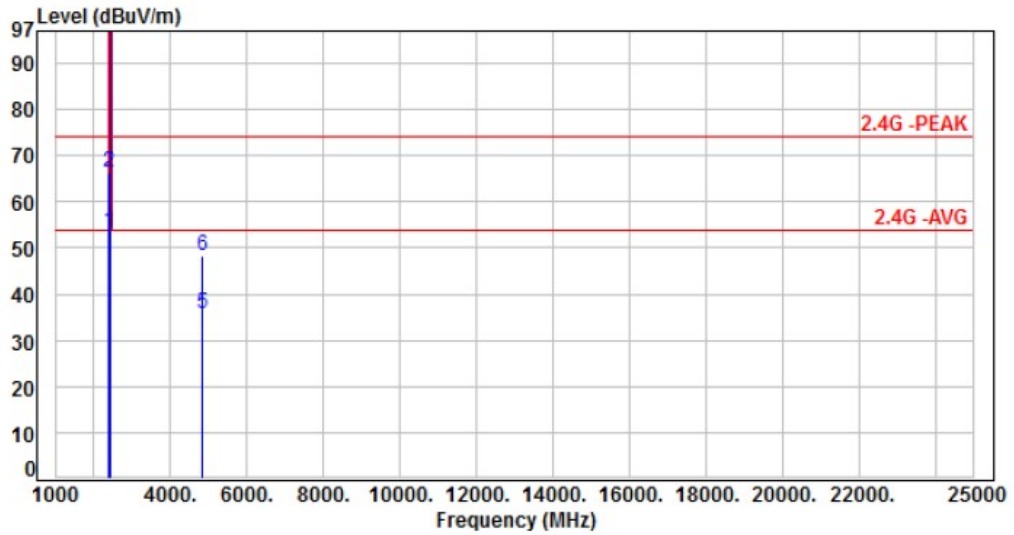


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	55.47	53.35	54.00	-0.65	Average	100	4	P
2	2390.00	-2.12	68.56	66.44	74.00	-7.56	Peak	100	4	P
3	2422.00	-2.08	105.16	103.08	200.00	-96.92	Average	100	4	P
4	2422.00	-2.08	117.11	115.03	200.00	-84.97	Peak	100	4	P
5	4844.00	6.23	29.65	35.88	54.00	-18.12	Average	100	318	P
6	4844.00	6.23	42.12	48.35	74.00	-25.65	Peak	100	318	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, 11ax HE40 CH03		:

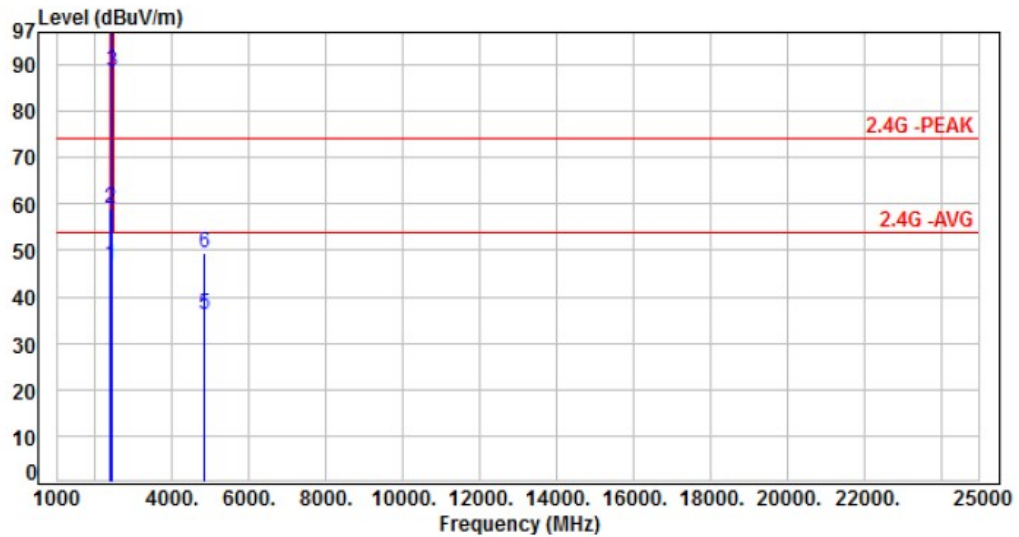


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	48.84	46.72	54.00	-7.28	Average	137	360	P
2	2390.00	-2.12	61.31	59.19	74.00	-14.81	Peak	137	360	P
3	2422.00	-2.08	90.70	88.62	200.00	-111.38	Average	137	360	P
4	2422.00	-2.08	103.01	100.93	200.00	-99.07	Peak	137	360	P
5	4844.00	6.23	29.75	35.98	54.00	-18.02	Average	100	193	P
6	4844.00	6.23	43.12	49.35	74.00	-24.65	Peak	100	193	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, 11ax HE40 CH06		

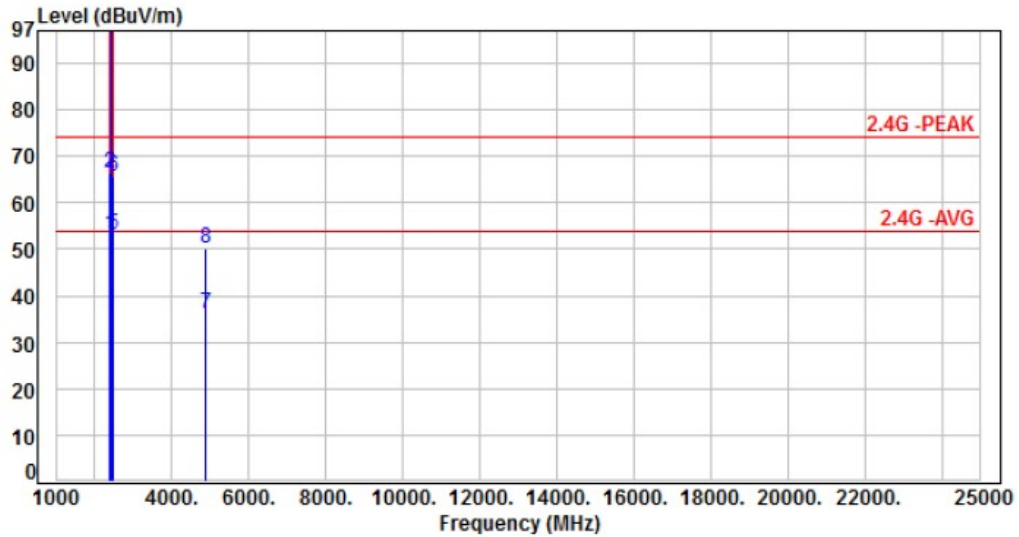


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	55.39	53.27	54.00	-0.73	Average	100	360	P
2	2390.00	-2.12	68.33	66.21	74.00	-7.79	Peak	100	360	P
3	2437.00	-2.07	117.23	115.16	200.00	-84.84	Average	100	360	P
4	2437.00	-2.07	129.83	127.76	200.00	-72.24	Peak	100	360	P
5	2483.50	-1.98	55.10	53.12	54.00	-0.88	Average	100	360	P
6	2483.50	-1.98	67.70	65.72	74.00	-8.28	Peak	100	360	P
7	4874.00	6.36	29.68	36.04	54.00	-17.96	Average	100	216	P
8	4874.00	6.36	43.94	50.30	74.00	-23.70	Peak	100	216	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, 11ax HE40 CH06		

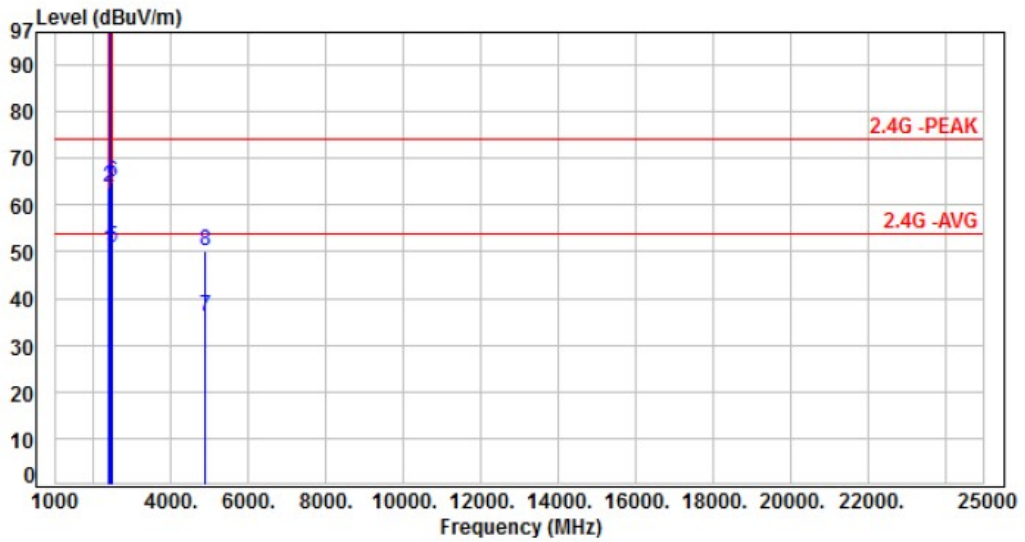


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	52.81	50.69	54.00	-3.31	Average	144	4	P
2	2390.00	-2.12	65.78	63.66	74.00	-10.34	Peak	144	4	P
3	2437.00	-2.07	102.45	100.38	200.00	-99.62	Average	144	4	P
4	2437.00	-2.07	113.37	111.30	200.00	-88.70	Peak	144	4	P
5	2483.50	-1.98	52.76	50.78	54.00	-3.22	Average	144	4	P
6	2483.50	-1.98	66.77	64.79	74.00	-9.21	Peak	144	4	P
7	4874.00	6.36	29.61	35.97	54.00	-18.03	Average	100	197	P
8	4874.00	6.36	43.91	50.27	74.00	-23.73	Peak	100	197	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, 11ax HE40 CH09		

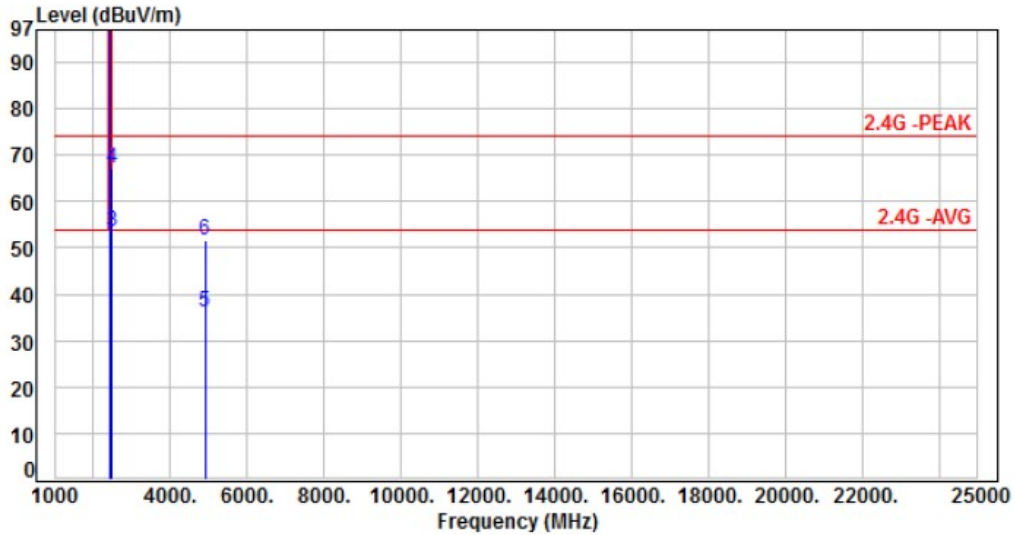


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-2.05	112.10	110.05	200.00	-89.95	Average	100	4	P
2	2452.00	-2.05	126.61	124.56	200.00	-75.44	Peak	100	4	P
3	2483.50	-1.98	55.40	53.42	54.00	-0.58	Average	100	4	P
4	2483.50	-1.98	69.11	67.13	74.00	-6.87	Peak	100	4	P
5	4904.00	6.46	29.65	36.11	54.00	-17.89	Average	100	199	P
6	4904.00	6.46	45.31	51.77	74.00	-22.23	Peak	100	199	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, 11ax HE40 CH09		:

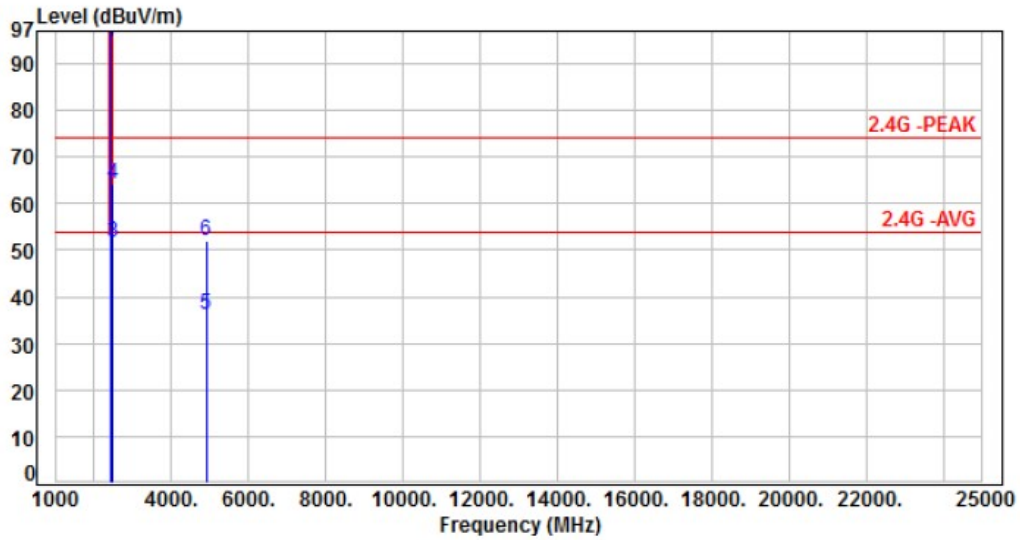


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-2.05	96.74	94.69	200.00	-105.31	Average	255	352	P
2	2452.00	-2.05	108.70	106.65	200.00	-93.35	Peak	255	352	P
3	2483.50	-1.98	53.65	51.67	54.00	-2.33	Average	255	352	P
4	2483.50	-1.98	66.30	64.32	74.00	-9.68	Peak	255	352	P
5	4904.00	6.46	29.87	36.33	54.00	-17.67	Average	100	314	P
6	4904.00	6.46	45.62	52.08	74.00	-21.92	Peak	100	314	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 12, 11ax HE20 CH01		

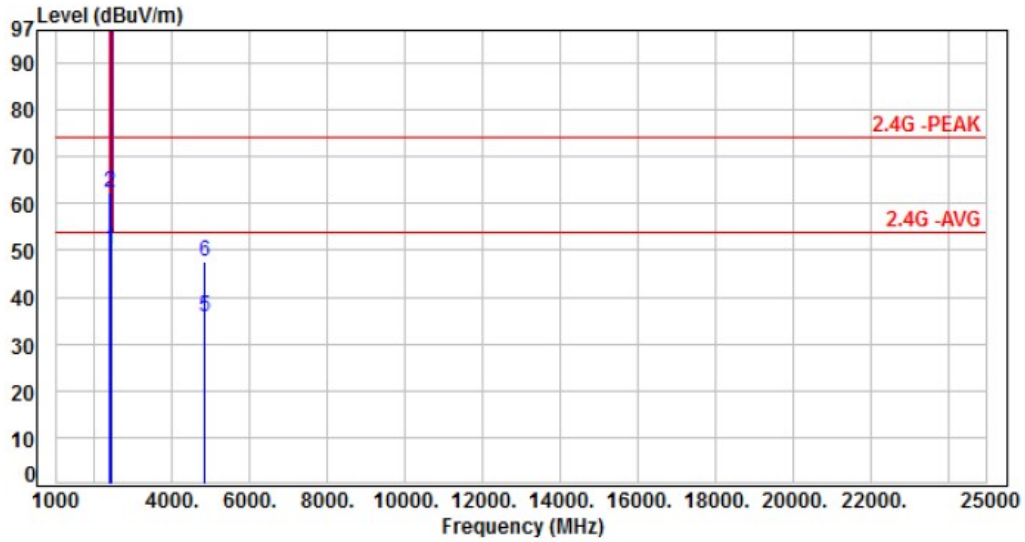

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	52.25	50.13	54.00	-3.87	Average	100	349	P
2	2390.00	-2.12	64.43	62.31	74.00	-11.69	Peak	100	349	P
3	2412.00	-2.10	113.51	111.41	200.00	-88.59	Average	100	349	P
4	2412.00	-2.10	116.93	114.83	200.00	-85.17	Peak	100	349	P
5	4824.00	6.09	29.51	35.60	54.00	-18.40	Average	100	161	P
6	4824.00	6.09	41.38	47.47	74.00	-26.53	Peak	100	161	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor