




Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 4, 11a CH165		:

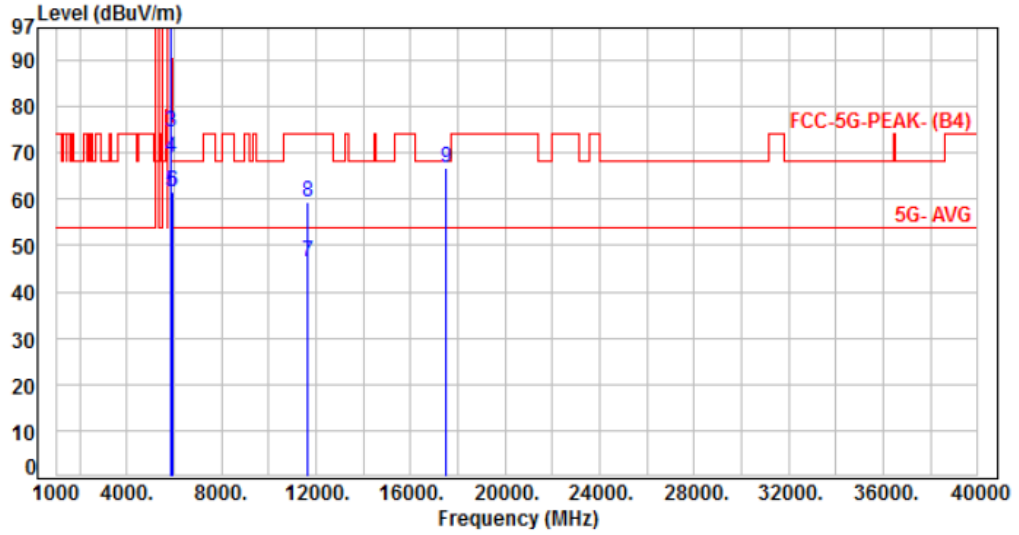


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	104.52	111.94	200.00	-88.06	Average	126	34	P
2	5825.00	7.42	114.55	121.97	200.00	-78.03	Peak	126	34	P
3	5850.00	7.43	67.05	74.48	122.20	-47.72	Peak	126	34	P
4	5855.00	7.45	61.53	68.98	110.80	-41.82	Peak	126	34	P
5	5875.00	7.54	54.06	61.60	105.20	-43.60	Peak	126	34	P
6	5925.00	7.66	53.99	61.65	68.20	-6.55	Peak	126	34	P
7	11650.00	18.08	28.40	46.48	54.00	-7.52	Average	100	239	P
8	11650.00	18.08	41.25	59.33	74.00	-14.67	Peak	100	239	P
9	17475.00	25.09	41.68	66.77	68.20	-1.43	Peak	100	226	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 4, 11a CH165		

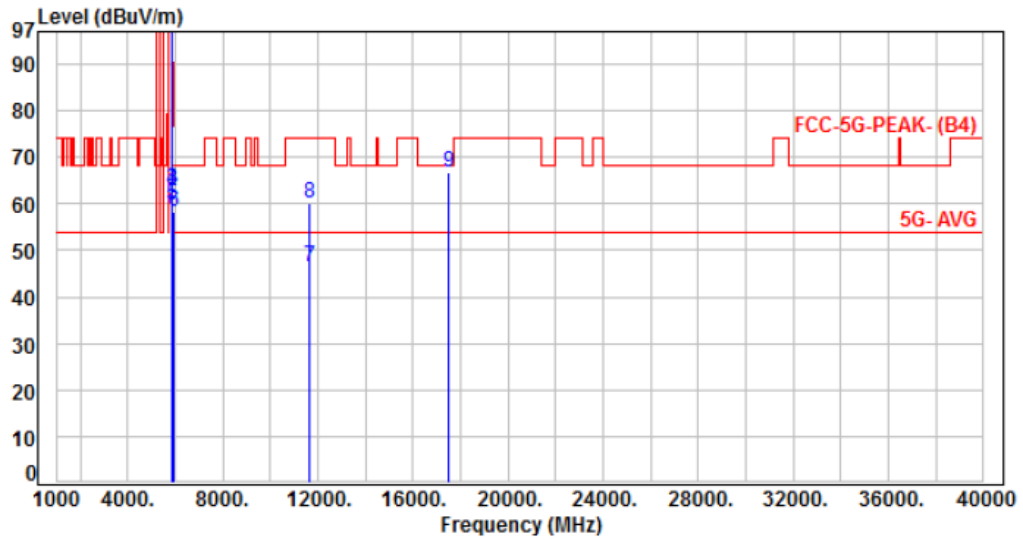


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	94.40	101.82	200.00	-98.18	Average	196	37	P
2	5825.00	7.42	104.73	112.15	200.00	-87.85	Peak	196	37	P
3	5850.00	7.43	55.60	63.03	122.20	-59.17	Peak	196	37	P
4	5855.00	7.45	55.59	63.04	110.80	-47.76	Peak	196	37	P
5	5875.00	7.54	52.26	59.80	105.20	-45.40	Peak	196	37	P
6	5925.00	7.66	50.79	58.45	68.20	-9.75	Peak	196	37	P
7	11650.00	18.08	28.42	46.50	54.00	-7.50	Average	100	138	P
8	11650.00	18.08	42.08	60.16	74.00	-13.84	Peak	100	138	P
9	17475.00	25.09	41.76	66.85	68.20	-1.35	Peak	100	297	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 1, 11ax HE20 CH36		:

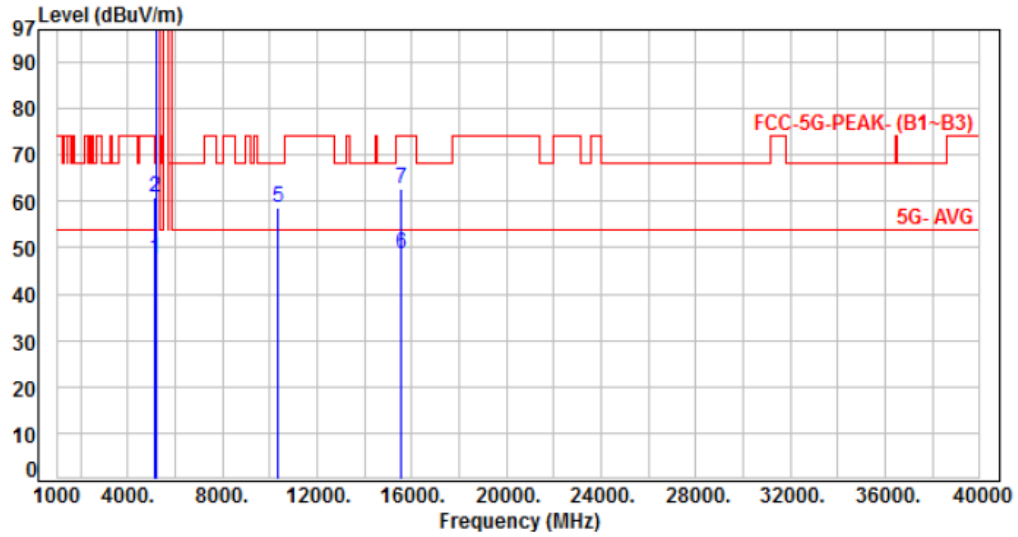


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.77	47.47	54.00	-6.53	Average	129	352	P
2	5150.00	6.70	54.21	60.91	74.00	-13.09	Peak	129	352	P
3	5180.00	6.85	97.56	104.41	200.00	-95.59	Average	129	352	P
4	5180.00	6.85	110.80	117.65	200.00	-82.35	Peak	129	352	P
5	10360.00	15.93	42.88	58.81	68.20	-9.39	Peak	100	314	P
6	15540.00	19.69	29.14	48.83	54.00	-5.17	Average	100	146	P
7	15540.00	19.69	43.16	62.85	74.00	-11.15	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 1, 11ax HE20 CH36		:

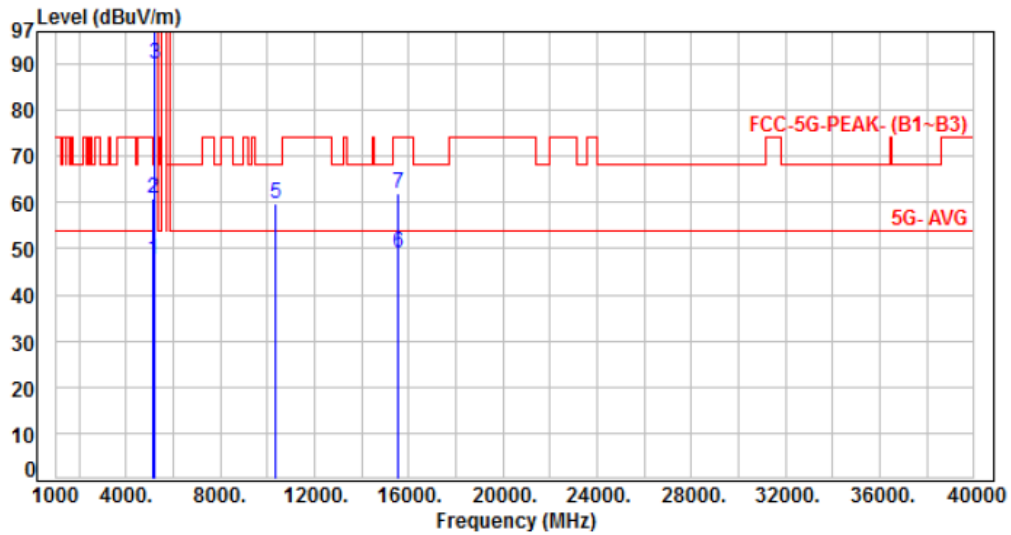


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.95	47.65	54.00	-6.35	Average	234	256	P
2	5150.00	6.70	54.26	60.96	74.00	-13.04	Peak	234	256	P
3	5180.00	6.85	83.26	90.11	200.00	-109.89	Average	234	256	P
4	5180.00	6.85	96.45	103.30	200.00	-96.70	Peak	234	256	P
5	10360.00	15.93	43.85	59.78	68.20	-8.42	Peak	100	269	P
6	15540.00	19.69	29.53	49.22	54.00	-4.78	Average	100	314	P
7	15540.00	19.69	42.21	61.90	74.00	-12.10	Peak	100	314	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 1, 11ax HE20 CH40		:

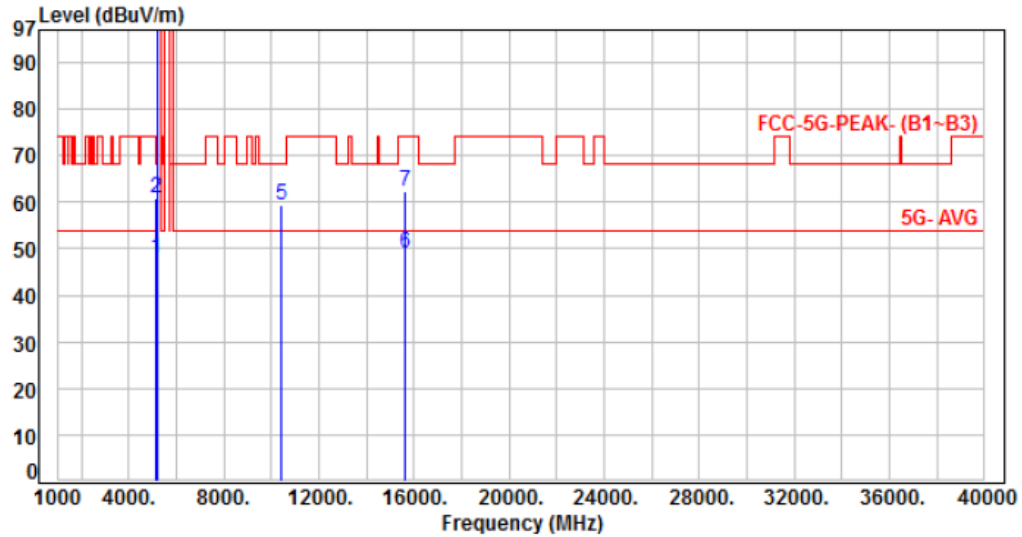


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	41.13	47.83	54.00	-6.17	Average	127	360	P
2	5150.00	6.70	54.08	60.78	74.00	-13.22	Peak	127	360	P
3	5200.00	6.95	97.79	104.74	200.00	-95.26	Average	127	360	P
4	5200.00	6.95	110.92	117.87	200.00	-82.13	Peak	127	360	P
5	10400.00	15.84	43.52	59.36	68.20	-8.84	Peak	100	314	P
6	15600.00	19.64	29.41	49.05	54.00	-4.95	Average	100	216	P
7	15600.00	19.64	42.75	62.39	74.00	-11.61	Peak	100	216	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 1, 11ax HE20 CH40		

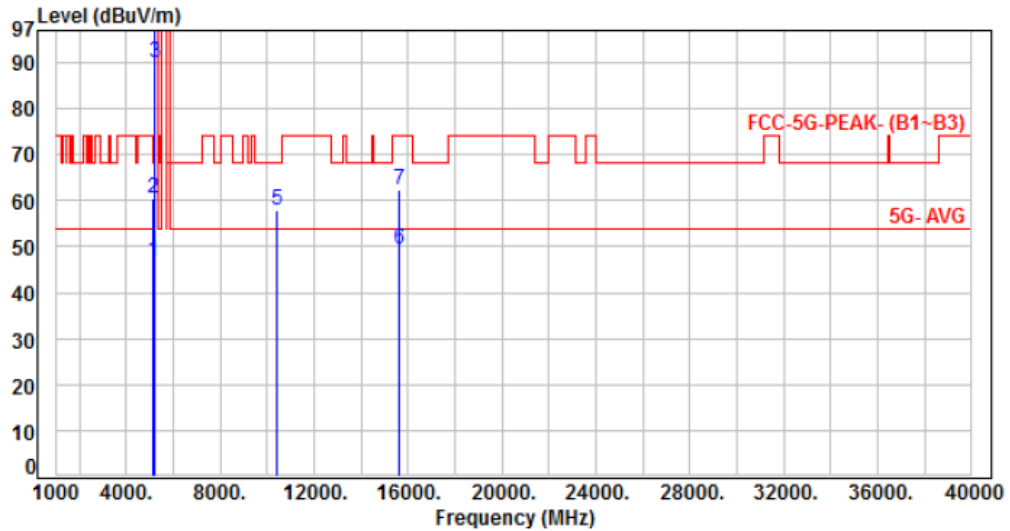


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.14	46.84	54.00	-7.16	Average	100	15	P
2	5150.00	6.70	53.79	60.49	74.00	-13.51	Peak	100	15	P
3	5200.00	6.95	83.14	90.09	200.00	-109.91	Average	100	15	P
4	5200.00	6.95	96.22	103.17	200.00	-96.83	Peak	100	15	P
5	10400.00	15.84	42.06	57.90	68.20	-10.30	Peak	100	52	P
6	15600.00	19.64	29.62	49.26	54.00	-4.74	Average	100	134	P
7	15600.00	19.64	42.62	62.26	74.00	-11.74	Peak	100	134	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 1, 11ax HE20 CH48		:

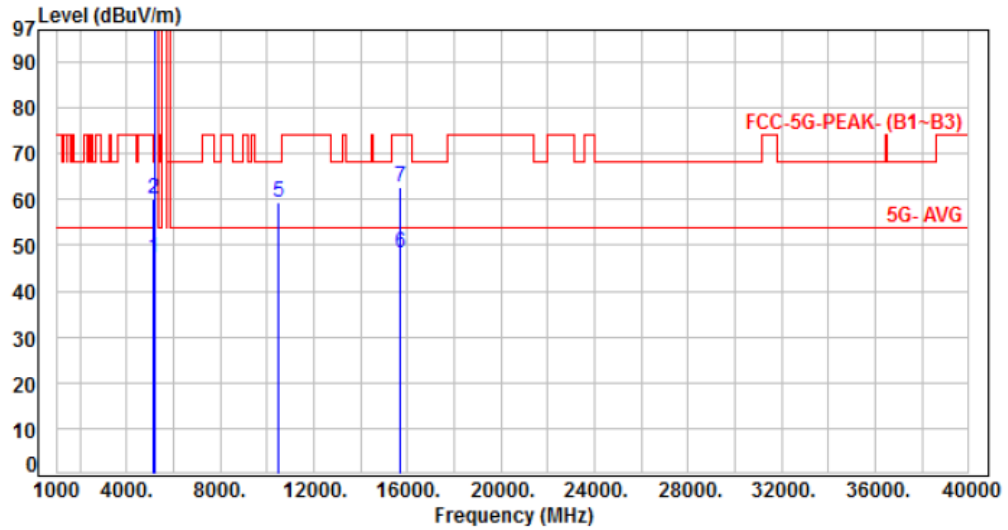


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.61	47.31	54.00	-6.69	Average	129	360	P
2	5150.00	6.70	53.26	59.96	74.00	-14.04	Peak	129	360	P
3	5240.00	7.00	97.84	104.84	200.00	-95.16	Average	129	360	P
4	5240.00	7.00	110.96	117.96	200.00	-82.04	Peak	129	360	P
5	10480.00	15.97	43.42	59.39	68.20	-8.81	Peak	100	147	P
6	15720.00	19.25	29.12	48.37	54.00	-5.63	Average	100	266	P
7	15720.00	19.25	43.34	62.59	74.00	-11.41	Peak	100	266	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 1, 11ax HE20 CH48		

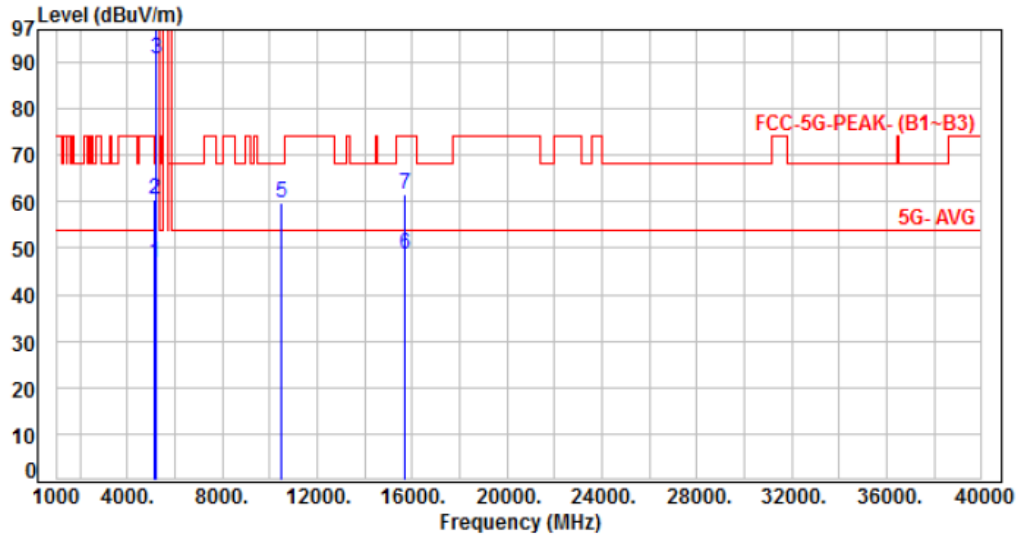


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.18	46.88	54.00	-7.12	Average	100	18	P
2	5150.00	6.70	53.79	60.49	74.00	-13.51	Peak	100	18	P
3	5240.00	7.00	83.68	90.68	200.00	-109.32	Average	100	18	P
4	5240.00	7.00	97.26	104.26	200.00	-95.74	Peak	100	18	P
5	10480.00	15.97	43.81	59.78	68.20	-8.42	Peak	100	154	P
6	15720.00	19.25	29.62	48.87	54.00	-5.13	Average	100	163	P
7	15720.00	19.25	42.53	61.78	74.00	-12.22	Peak	100	163	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 4, 11ax HE20 CH149		:

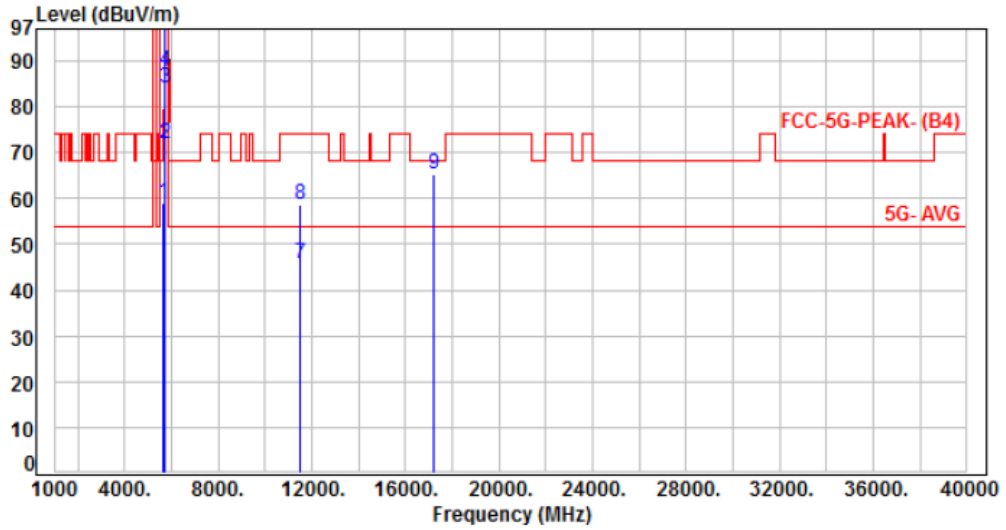


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	51.78	59.13	68.20	-9.07	Peak	121	31	P
2	5700.00	7.37	64.57	71.94	105.20	-33.26	Peak	121	31	P
3	5720.00	7.34	76.75	84.09	110.80	-26.71	Peak	121	31	P
4	5725.00	7.33	80.44	87.77	122.20	-34.43	Peak	121	31	P
5	5745.00	7.30	105.03	112.33	200.00	-87.67	Average	121	31	P
6	5745.00	7.30	117.81	125.11	200.00	-74.89	Peak	121	31	P
7	11490.00	17.72	27.84	45.56	54.00	-8.44	Average	100	188	P
8	11490.00	17.72	40.94	58.66	74.00	-15.34	Peak	100	188	P
9	17235.00	23.71	41.63	65.34	68.20	-2.86	Peak	100	239	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 4, 11ax HE20 CH149		

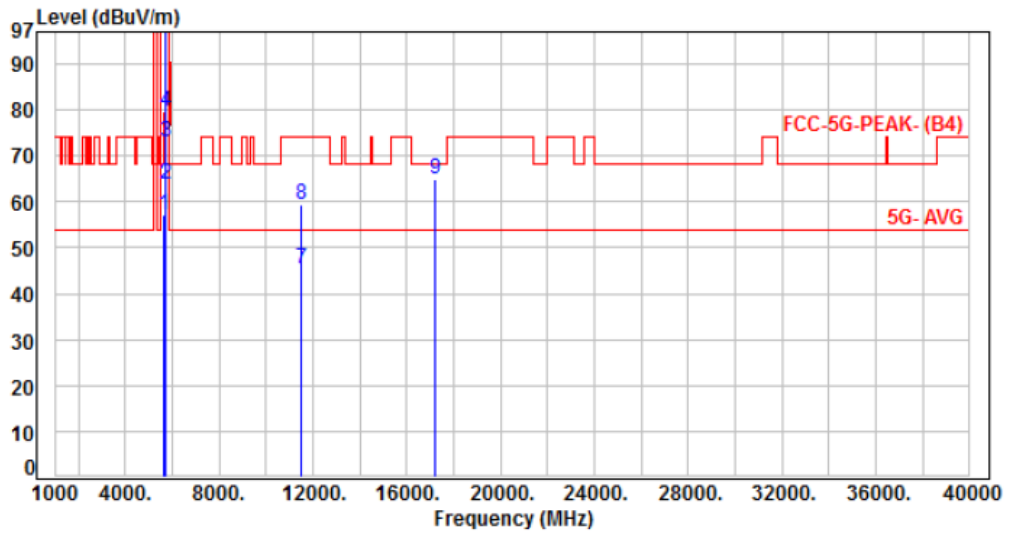


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	49.66	57.01	68.20	-11.19	Peak	187	39	P
2	5700.00	7.37	56.38	63.75	105.20	-41.45	Peak	187	39	P
3	5720.00	7.34	65.58	72.92	110.80	-37.88	Peak	187	39	P
4	5725.00	7.33	72.25	79.58	122.20	-42.62	Peak	187	39	P
5	5745.00	7.30	97.22	104.52	200.00	-95.48	Average	187	39	P
6	5745.00	7.30	109.91	117.21	200.00	-82.79	Peak	187	39	P
7	11490.00	17.72	27.60	45.32	54.00	-8.68	Average	100	84	P
8	11490.00	17.72	41.64	59.36	74.00	-14.64	Peak	100	84	P
9	17235.00	23.71	41.16	64.87	68.20	-3.33	Peak	100	189	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 4, 11ax HE20 CH157		:

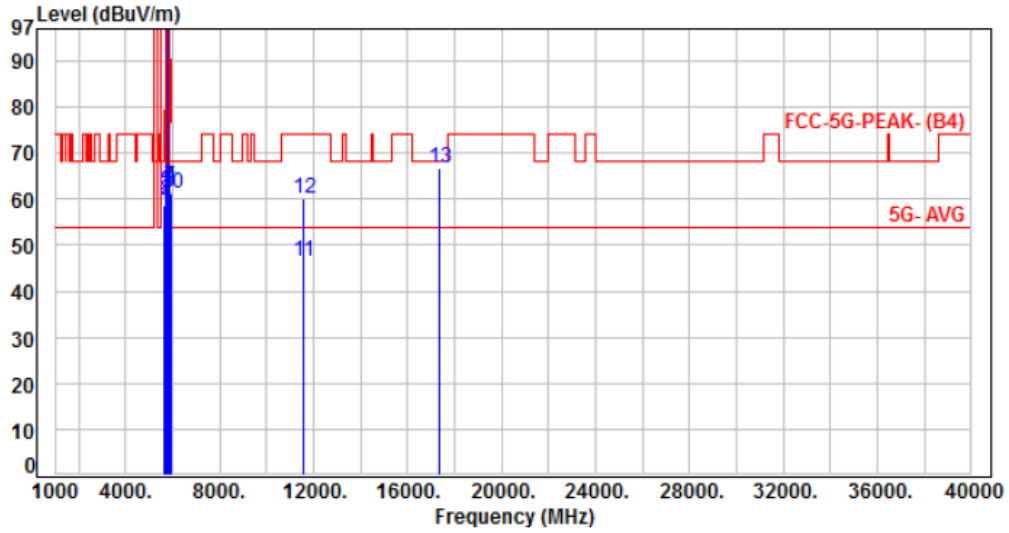


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	51.24	58.59	68.20	-9.61	Peak	129	32	P
2	5700.00	7.37	52.41	59.78	105.20	-45.42	Peak	129	32	P
3	5720.00	7.34	54.39	61.73	110.80	-49.07	Peak	129	32	P
4	5725.00	7.33	55.33	62.66	122.20	-59.54	Peak	129	32	P
5	5785.00	7.37	105.03	112.40	200.00	-87.60	Average	129	32	P
6	5785.00	7.37	118.14	125.51	200.00	-74.49	Peak	129	32	P
7	5850.00	7.43	55.17	62.60	122.20	-59.60	Peak	129	32	P
8	5855.00	7.45	54.30	61.75	110.80	-49.05	Peak	129	32	P
9	5875.00	7.54	54.71	62.25	105.20	-42.95	Peak	129	32	P
10	5925.00	7.66	53.74	61.40	68.20	-6.80	Peak	129	32	P
11	11570.00	17.92	28.63	46.55	54.00	-7.45	Average	100	119	P
12	11570.00	17.92	42.28	60.20	74.00	-13.80	Peak	100	119	P
13	17355.00	24.51	42.11	66.62	68.20	-1.58	Peak	100	291	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 4, 11ax HE20 CH157		

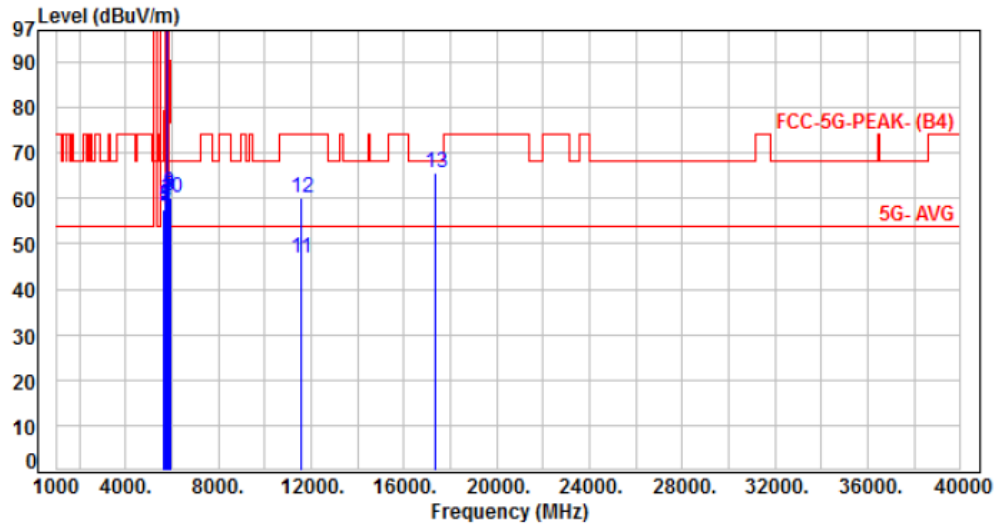


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	50.06	57.41	68.20	-10.79	Peak	219	42	P
2	5700.00	7.37	50.76	58.13	105.20	-47.07	Peak	219	42	P
3	5720.00	7.34	51.46	58.80	110.80	-52.00	Peak	219	42	P
4	5725.00	7.33	51.70	59.03	122.20	-63.17	Peak	219	42	P
5	5785.00	7.37	93.96	101.33	200.00	-98.67	Average	219	42	P
6	5785.00	7.37	107.16	114.53	200.00	-85.47	Peak	219	42	P
7	5850.00	7.43	52.28	59.71	122.20	-62.49	Peak	219	42	P
8	5855.00	7.45	53.20	60.65	110.80	-50.15	Peak	219	42	P
9	5875.00	7.54	53.63	61.17	105.20	-44.03	Peak	219	42	P
10	5925.00	7.66	52.59	60.25	68.20	-7.95	Peak	219	42	P
11	11570.00	17.92	28.84	46.76	54.00	-7.24	Average	100	131	P
12	11570.00	17.92	42.10	60.02	74.00	-13.98	Peak	100	131	P
13	17355.00	24.51	41.25	65.76	68.20	-2.44	Peak	100	247	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 4, 11ax HE20 CH165		:

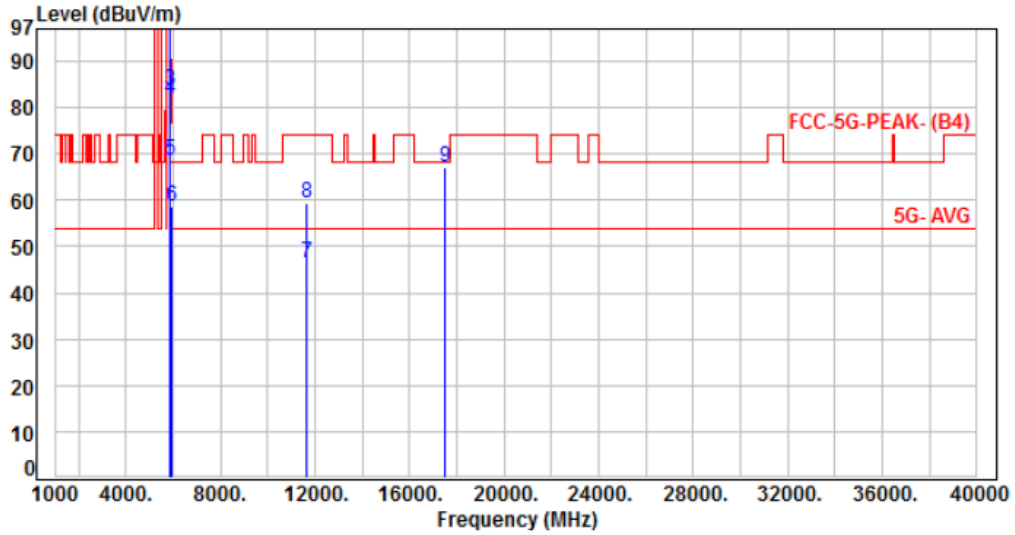


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	104.62	112.04	200.00	-87.96	Average	126	33	P
2	5825.00	7.42	117.55	124.97	200.00	-75.03	Peak	126	33	P
3	5850.00	7.43	76.26	83.69	122.20	-38.51	Peak	126	33	P
4	5855.00	7.45	74.30	81.75	110.80	-29.05	Peak	126	33	P
5	5875.00	7.54	61.22	68.76	105.20	-36.44	Peak	126	33	P
6	5925.00	7.66	50.86	58.52	68.20	-9.68	Peak	126	33	P
7	11650.00	18.08	28.55	46.63	54.00	-7.37	Average	100	136	P
8	11650.00	18.08	41.42	59.50	74.00	-14.50	Peak	100	136	P
9	17475.00	25.09	41.98	67.07	68.20	-1.13	Peak	100	264	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 4, 11ax HE20 CH165		

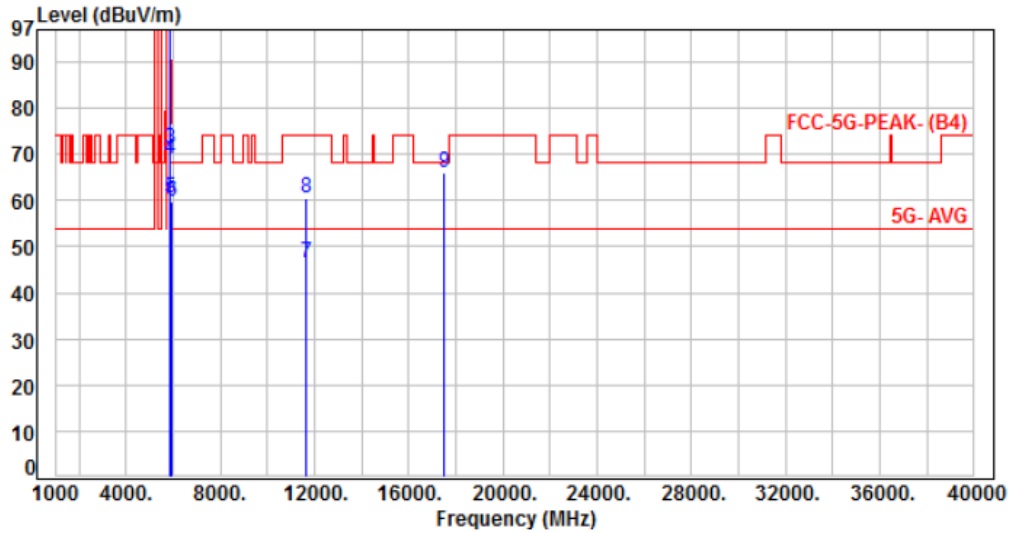


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	93.98	101.40	200.00	-98.60	Average	205	38	P
2	5825.00	7.42	106.97	114.39	200.00	-85.61	Peak	205	38	P
3	5850.00	7.43	63.90	71.33	122.20	-50.87	Peak	205	38	P
4	5855.00	7.45	61.45	68.90	110.80	-41.90	Peak	205	38	P
5	5875.00	7.54	52.86	60.40	105.20	-44.80	Peak	205	38	P
6	5925.00	7.66	51.96	59.62	68.20	-8.58	Peak	205	38	P
7	11650.00	18.08	28.32	46.40	54.00	-7.60	Average	100	158	P
8	11650.00	18.08	42.23	60.31	74.00	-13.69	Peak	100	158	P
9	17475.00	25.09	41.04	66.13	68.20	-2.07	Peak	100	256	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 1, 11ax HE40 CH38		:

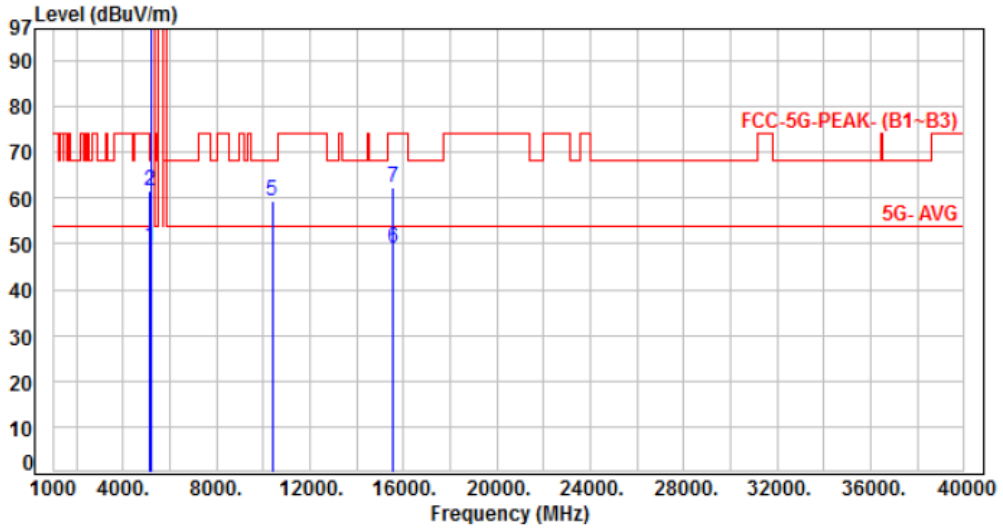


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	42.71	49.41	54.00	-4.59	Average	121	360	P
2	5150.00	6.70	55.05	61.75	74.00	-12.25	Peak	121	360	P
3	5190.00	6.90	93.78	100.68	200.00	-99.32	Average	121	360	P
4	5190.00	6.90	106.71	113.61	200.00	-86.39	Peak	121	360	P
5	10380.00	15.89	43.38	59.27	68.20	-8.93	Peak	100	124	P
6	15570.00	19.65	29.45	49.10	54.00	-4.90	Average	100	198	P
7	15570.00	19.65	42.60	62.25	74.00	-11.75	Peak	100	198	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 1, 11ax HE40 CH38		

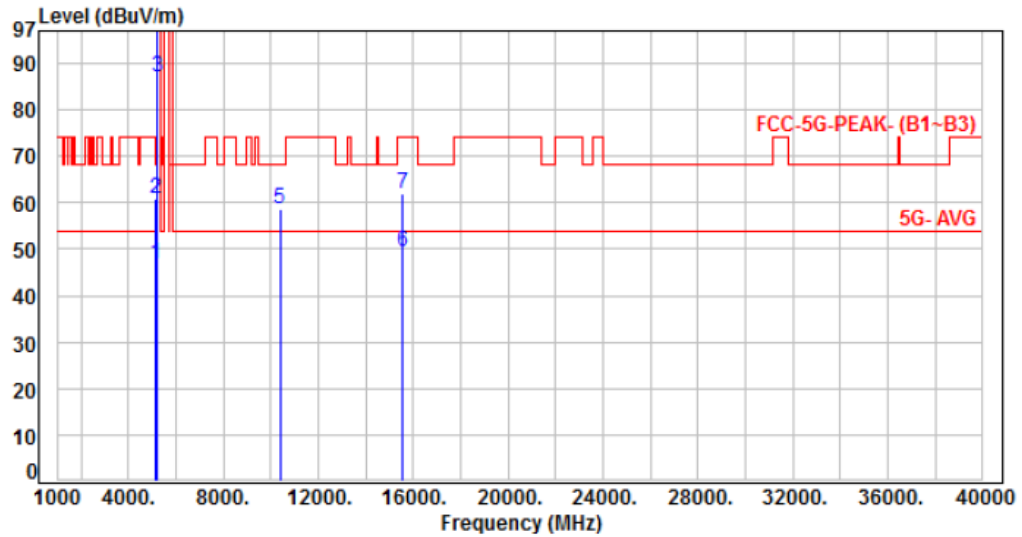


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.16	46.86	54.00	-7.14	Average	100	16	P
2	5150.00	6.70	54.05	60.75	74.00	-13.25	Peak	100	16	P
3	5190.00	6.90	80.05	86.95	200.00	-113.05	Average	100	16	P
4	5190.00	6.90	92.41	99.31	200.00	-100.69	Peak	100	16	P
5	10380.00	15.89	42.64	58.53	68.20	-9.67	Peak	100	235	P
6	15570.00	19.65	29.63	49.28	54.00	-4.72	Average	100	163	P
7	15570.00	19.65	42.34	61.99	74.00	-12.01	Peak	100	163	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 1, 11ax HE40 CH46		:

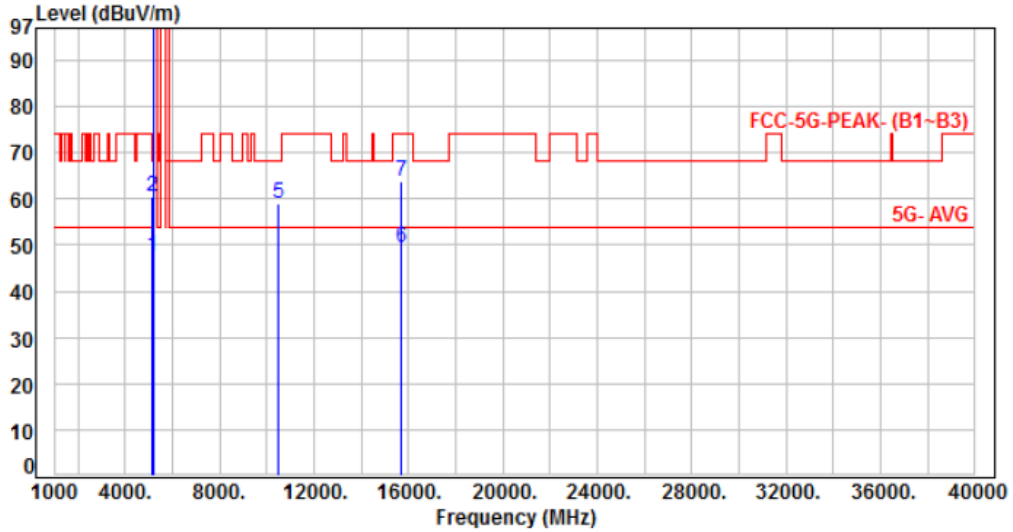


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.77	47.47	54.00	-6.53	Average	127	360	P
2	5150.00	6.70	53.88	60.58	74.00	-13.42	Peak	127	360	P
3	5230.00	6.99	94.61	101.60	200.00	-98.40	Average	127	360	P
4	5230.00	6.99	107.60	114.59	200.00	-85.41	Peak	127	360	P
5	10460.00	15.86	42.99	58.85	68.20	-9.35	Peak	100	123	P
6	15690.00	19.44	29.81	49.25	54.00	-4.75	Average	100	211	P
7	15690.00	19.44	44.35	63.79	74.00	-10.21	Peak	100	211	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 1, 11ax HE40 CH46		:

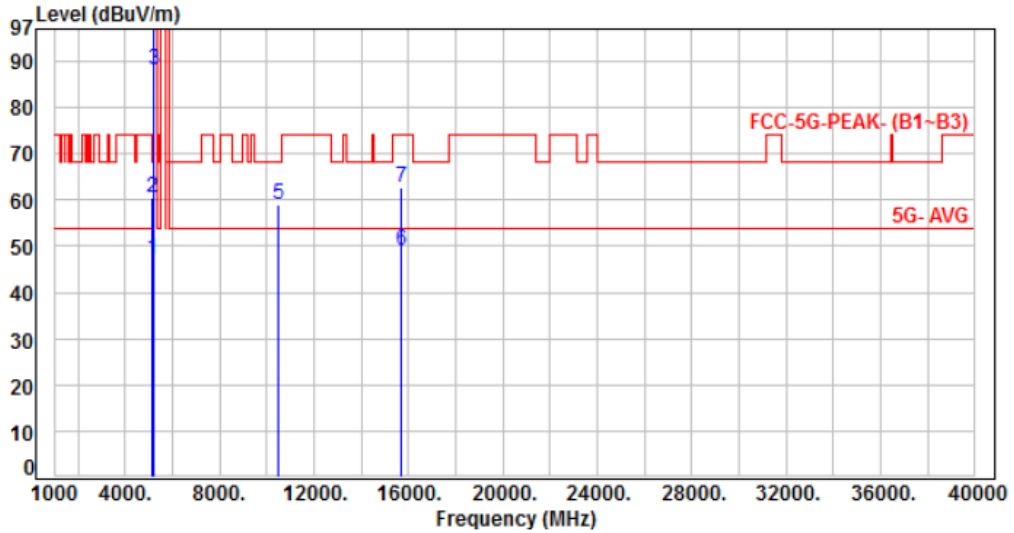


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.45	47.15	54.00	-6.85	Average	100	17	P
2	5150.00	6.70	53.66	60.36	74.00	-13.64	Peak	100	17	P
3	5230.00	6.99	81.04	88.03	200.00	-111.97	Average	100	17	P
4	5230.00	6.99	93.33	100.32	200.00	-99.68	Peak	100	17	P
5	10460.00	15.86	42.97	58.83	68.20	-9.37	Peak	100	314	P
6	15690.00	19.44	29.54	48.98	54.00	-5.02	Average	100	193	P
7	15690.00	19.44	43.24	62.68	74.00	-11.32	Peak	100	193	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 4, 11ax HE40 CH151		:

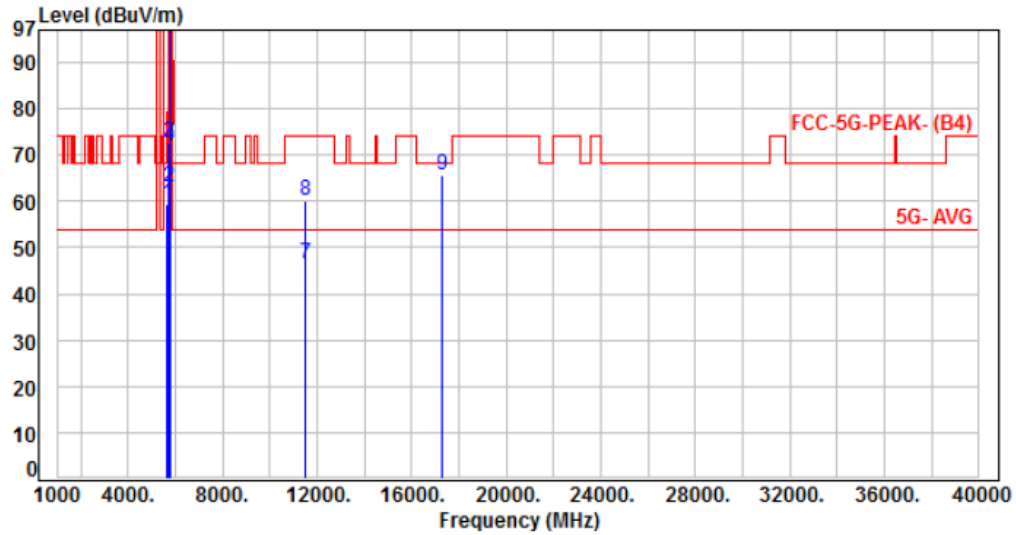


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	52.06	59.41	68.20	-8.79	Peak	115	34	P
2	5700.00	7.37	55.55	62.92	105.20	-42.28	Peak	115	34	P
3	5720.00	7.34	65.19	72.53	110.80	-38.27	Peak	115	34	P
4	5725.00	7.33	64.56	71.89	122.20	-50.31	Peak	115	34	P
5	5755.00	7.30	98.72	106.02	200.00	-93.98	Average	115	34	P
6	5755.00	7.30	111.53	118.83	200.00	-81.17	Peak	115	34	P
7	11510.00	17.79	28.79	46.58	54.00	-7.42	Average	100	258	P
8	11510.00	17.79	42.31	60.10	74.00	-13.90	Peak	100	258	P
9	17265.00	23.86	41.96	65.82	68.20	-2.38	Peak	100	314	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 4, 11ax HE40 CH151		

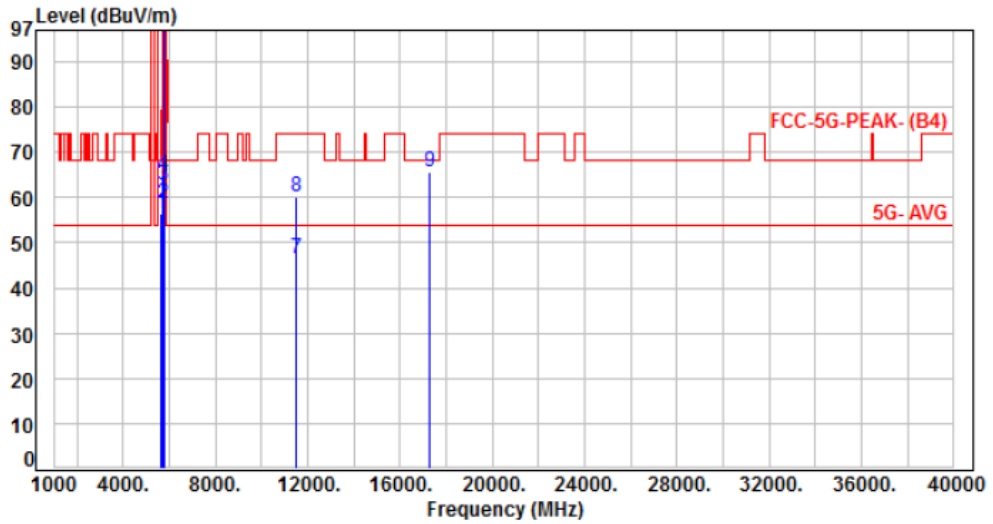


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	49.24	56.59	68.20	-11.61	Peak	206	45	P
2	5700.00	7.37	51.11	58.48	105.20	-46.72	Peak	206	45	P
3	5720.00	7.34	55.19	62.53	110.80	-48.27	Peak	206	45	P
4	5725.00	7.33	57.70	65.03	122.20	-57.17	Peak	206	45	P
5	5755.00	7.30	88.43	95.73	200.00	-104.27	Average	206	45	P
6	5755.00	7.30	102.55	109.85	200.00	-90.15	Peak	206	45	P
7	11510.00	17.79	28.72	46.51	54.00	-7.49	Average	100	58	P
8	11510.00	17.79	42.15	59.94	74.00	-14.06	Peak	100	58	P
9	17265.00	23.86	41.79	65.65	68.20	-2.55	Peak	100	246	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 4, 11ax HE40 CH159		:

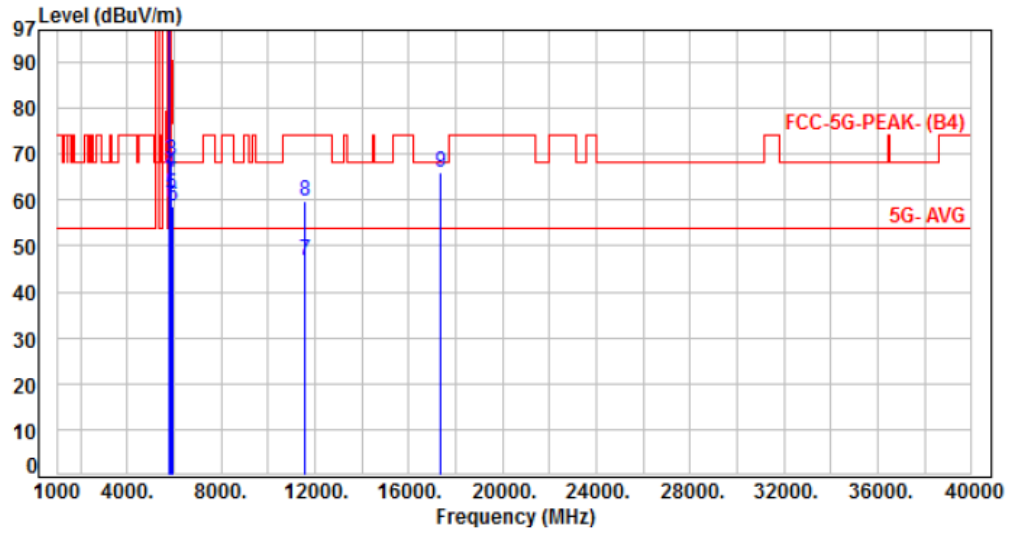


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	99.14	106.53	200.00	-93.47	Average	117	39	P
2	5795.00	7.39	111.63	119.02	200.00	-80.98	Peak	117	39	P
3	5850.00	7.43	61.18	68.61	122.20	-53.59	Peak	117	39	P
4	5855.00	7.45	58.47	65.92	110.80	-44.88	Peak	117	39	P
5	5875.00	7.54	53.58	61.12	105.20	-44.08	Peak	117	39	P
6	5925.00	7.66	51.08	58.74	68.20	-9.46	Peak	117	39	P
7	11590.00	17.95	28.81	46.76	54.00	-7.24	Average	100	318	P
8	11590.00	17.95	41.66	59.61	74.00	-14.39	Peak	100	318	P
9	17385.00	24.58	41.59	66.17	68.20	-2.03	Peak	100	263	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 4, 11ax HE40 CH159		

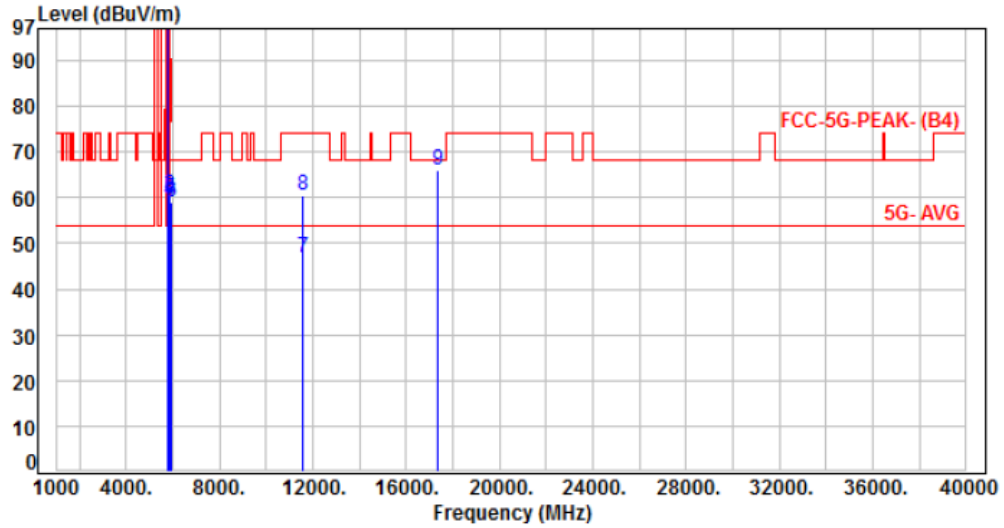


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	90.17	97.56	200.00	-102.44	Average	214	37	P
2	5795.00	7.39	102.94	110.33	200.00	-89.67	Peak	214	37	P
3	5850.00	7.43	53.09	60.52	122.20	-61.68	Peak	214	37	P
4	5855.00	7.45	51.76	59.21	110.80	-51.59	Peak	214	37	P
5	5875.00	7.54	52.10	59.64	105.20	-45.56	Peak	214	37	P
6	5925.00	7.66	51.17	58.83	68.20	-9.37	Peak	214	37	P
7	11590.00	17.95	28.71	46.66	54.00	-7.34	Average	100	222	P
8	11590.00	17.95	42.47	60.42	74.00	-13.58	Peak	100	222	P
9	17385.00	24.58	41.51	66.09	68.20	-2.11	Peak	100	214	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 1, 11ax HE80 CH42		:

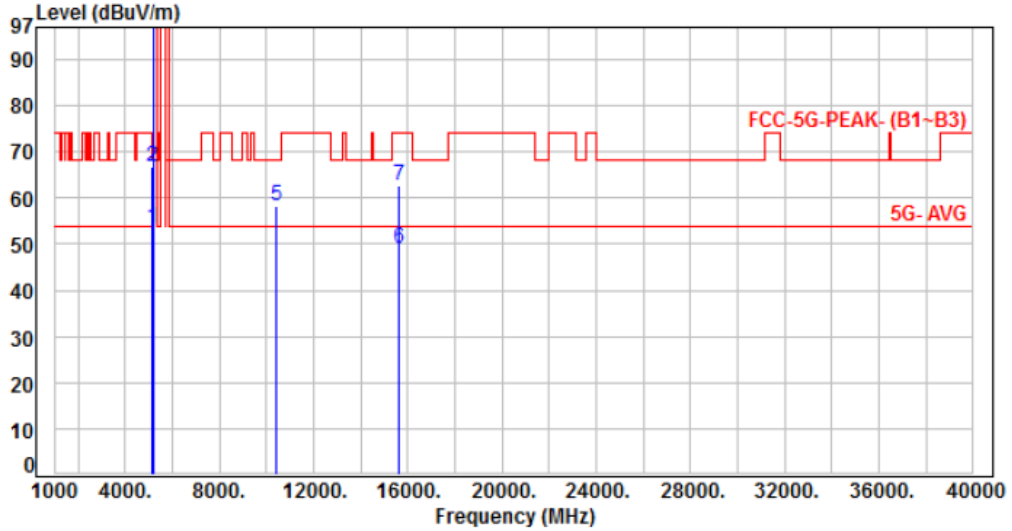


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	46.94	53.64	54.00	-0.36	Average	133	360	P
2	5150.00	6.70	59.91	66.61	74.00	-7.39	Peak	133	360	P
3	5210.00	6.97	92.19	99.16	200.00	-100.84	Average	133	360	P
4	5210.00	6.97	103.61	110.58	200.00	-89.42	Peak	133	360	P
5	10420.00	15.83	42.49	58.32	68.20	-9.88	Peak	100	166	P
6	15630.00	19.57	29.51	49.08	54.00	-4.92	Average	100	194	P
7	15630.00	19.57	43.17	62.74	74.00	-11.26	Peak	100	194	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 1, 11ax HE80 CH42		:

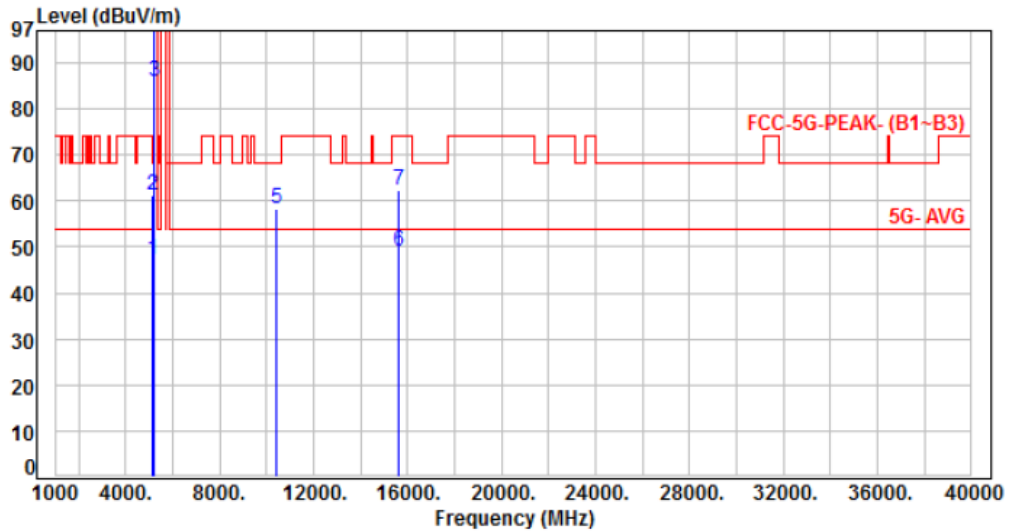


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.43	47.13	54.00	-6.87	Average	100	17	P
2	5150.00	6.70	54.64	61.34	74.00	-12.66	Peak	100	17	P
3	5210.00	6.97	78.99	85.96	200.00	-114.04	Average	100	17	P
4	5210.00	6.97	89.96	96.93	200.00	-103.07	Peak	100	17	P
5	10420.00	15.83	42.45	58.28	68.20	-9.92	Peak	100	192	P
6	15630.00	19.57	29.63	49.20	54.00	-4.80	Average	100	252	P
7	15630.00	19.57	42.94	62.51	74.00	-11.49	Peak	100	252	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 4, 11ax HE80 CH155		:

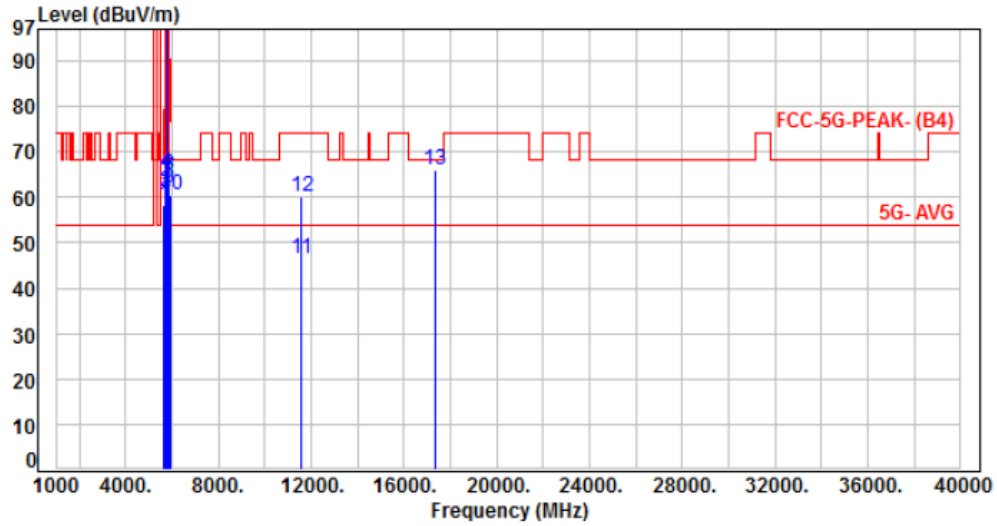


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	51.08	58.43	68.20	-9.77	Peak	115	360	P
2	5700.00	7.37	53.98	61.35	105.20	-43.85	Peak	115	360	P
3	5720.00	7.34	56.16	63.50	110.80	-47.30	Peak	115	360	P
4	5725.00	7.33	57.95	65.28	122.20	-56.92	Peak	115	360	P
5	5775.00	7.35	92.85	100.20	200.00	-99.80	Average	115	360	P
6	5775.00	7.35	104.60	111.95	200.00	-88.05	Peak	115	360	P
7	5850.00	7.43	56.89	64.32	122.20	-57.88	Peak	115	360	P
8	5855.00	7.45	57.42	64.87	110.80	-45.93	Peak	115	360	P
9	5875.00	7.54	54.30	61.84	105.20	-43.36	Peak	115	360	P
10	5925.00	7.66	52.70	60.36	68.20	-7.84	Peak	115	360	P
11	11550.00	17.88	28.63	46.51	54.00	-7.49	Average	100	147	P
12	11550.00	17.88	42.17	60.05	74.00	-13.95	Peak	100	147	P
13	17325.00	24.29	41.88	66.17	68.20	-2.03	Peak	100	166	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 4, 11ax HE80 CH155		

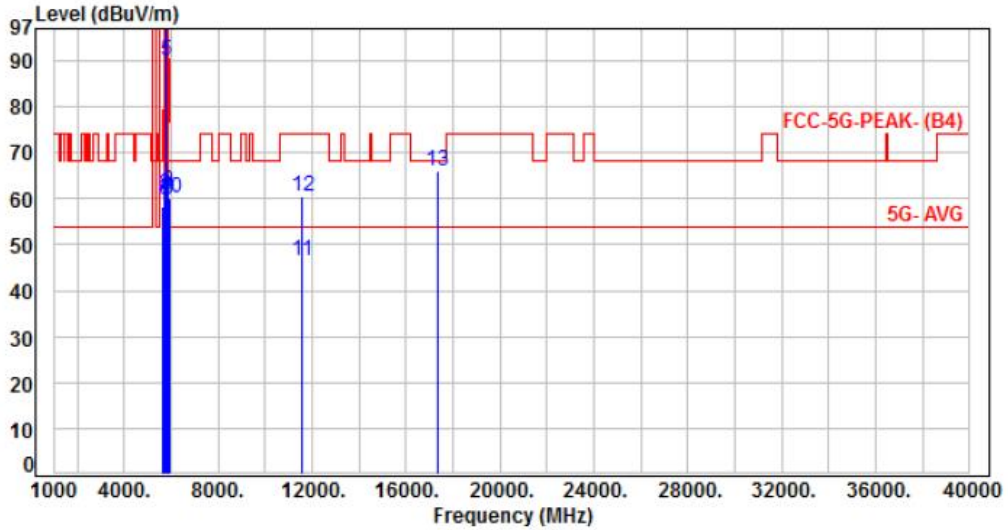


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	50.76	58.11	68.20	-10.09	Peak	204	42	P
2	5700.00	7.37	53.56	60.93	105.20	-44.27	Peak	204	42	P
3	5720.00	7.34	52.41	59.75	110.80	-51.05	Peak	204	42	P
4	5725.00	7.33	53.34	60.67	122.20	-61.53	Peak	204	42	P
5	5775.00	7.35	82.65	90.00	200.00	-110.00	Average	204	42	P
6	5775.00	7.35	95.22	102.57	200.00	-97.43	Peak	204	42	P
7	5850.00	7.43	52.77	60.20	122.20	-62.00	Peak	204	42	P
8	5855.00	7.45	54.23	61.68	110.80	-49.12	Peak	204	42	P
9	5875.00	7.54	52.11	59.65	105.20	-45.55	Peak	204	42	P
10	5925.00	7.66	52.51	60.17	68.20	-8.03	Peak	204	42	P
11	11550.00	17.88	28.45	46.33	54.00	-7.67	Average	100	339	P
12	11550.00	17.88	42.54	60.42	74.00	-13.58	Peak	100	339	P
13	17325.00	24.29	41.64	65.93	68.20	-2.27	Peak	100	158	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 1, 11ax HE20 CH36		:

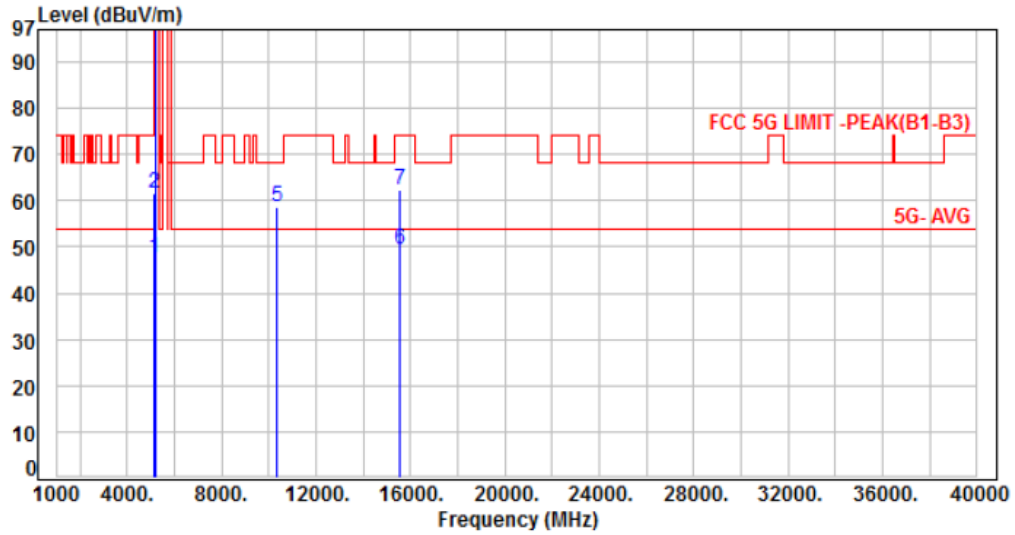


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.88	47.58	54.00	-6.42	Average	138	182	P
2	5150.00	6.70	54.75	61.45	74.00	-12.55	Peak	138	182	P
3	5180.00	6.85	93.00	99.85	200.00	-100.15	Average	138	182	P
4	5180.00	6.85	103.69	110.54	200.00	-89.46	Peak	138	182	P
5	10360.00	15.93	42.61	58.54	68.20	-9.66	Peak	100	225	P
6	15540.00	19.69	29.71	49.40	54.00	-4.60	Average	100	183	P
7	15540.00	19.69	42.57	62.26	74.00	-11.74	Peak	100	183	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 1, 11ax HE20 CH36		

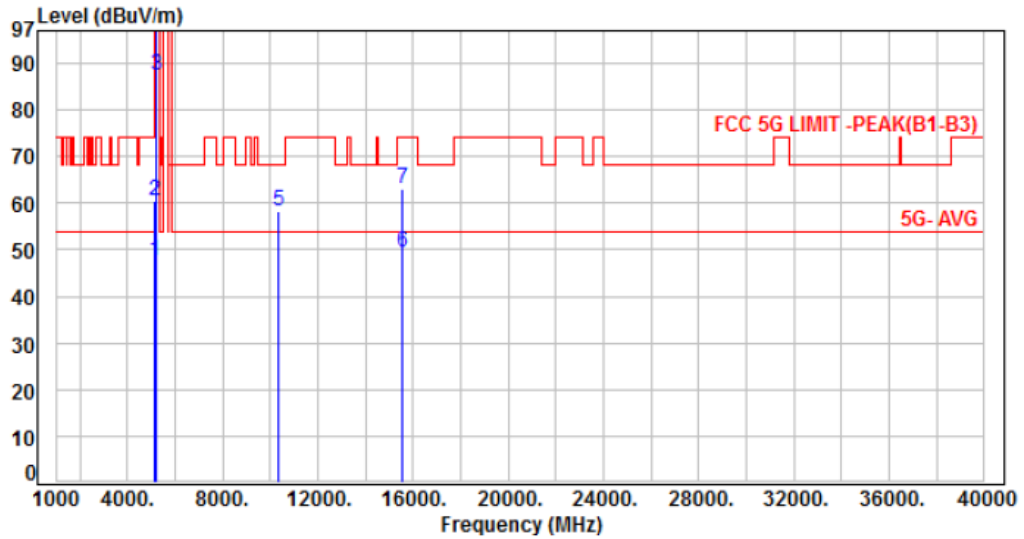


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.70	47.40	54.00	-6.60	Average	185	360	P
2	5150.00	6.70	53.94	60.64	74.00	-13.36	Peak	185	360	P
3	5180.00	6.85	80.46	87.31	200.00	-112.69	Average	185	360	P
4	5180.00	6.85	91.30	98.15	200.00	-101.85	Peak	185	360	P
5	10360.00	15.93	42.38	58.31	68.20	-9.89	Peak	100	152	P
6	15540.00	19.69	29.59	49.28	54.00	-4.72	Average	100	115	P
7	15540.00	19.69	43.39	63.08	74.00	-10.92	Peak	100	115	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 1, 11ax HE20 CH40		:

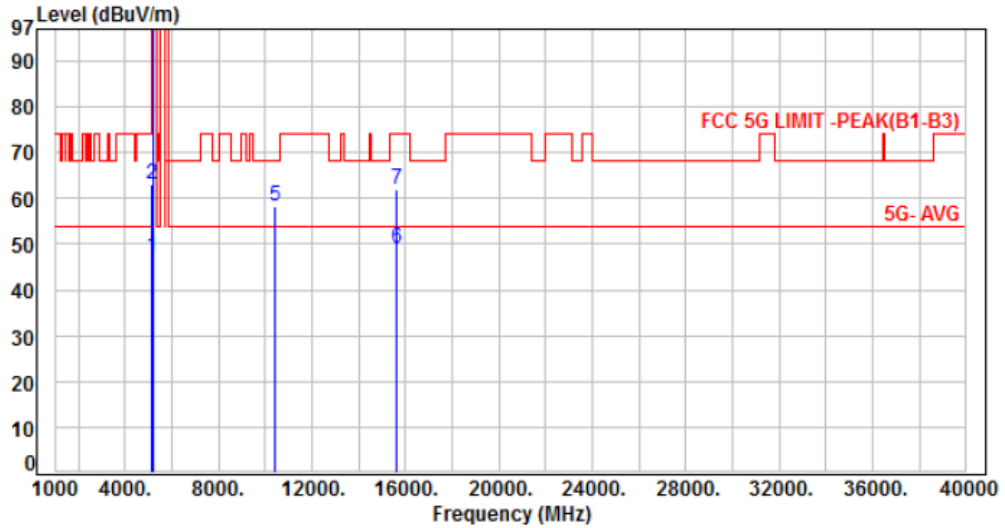


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.61	47.31	54.00	-6.69	Average	197	187	P
2	5150.00	6.70	56.20	62.90	74.00	-11.10	Peak	197	187	P
3	5200.00	6.95	93.69	100.64	200.00	-99.36	Average	197	187	P
4	5200.00	6.95	105.16	112.11	200.00	-87.89	Peak	197	187	P
5	10400.00	15.84	42.58	58.42	68.20	-9.78	Peak	100	211	P
6	15600.00	19.64	29.37	49.01	54.00	-4.99	Average	100	147	P
7	15600.00	19.64	42.49	62.13	74.00	-11.87	Peak	100	147	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 1, 11ax HE20 CH40		

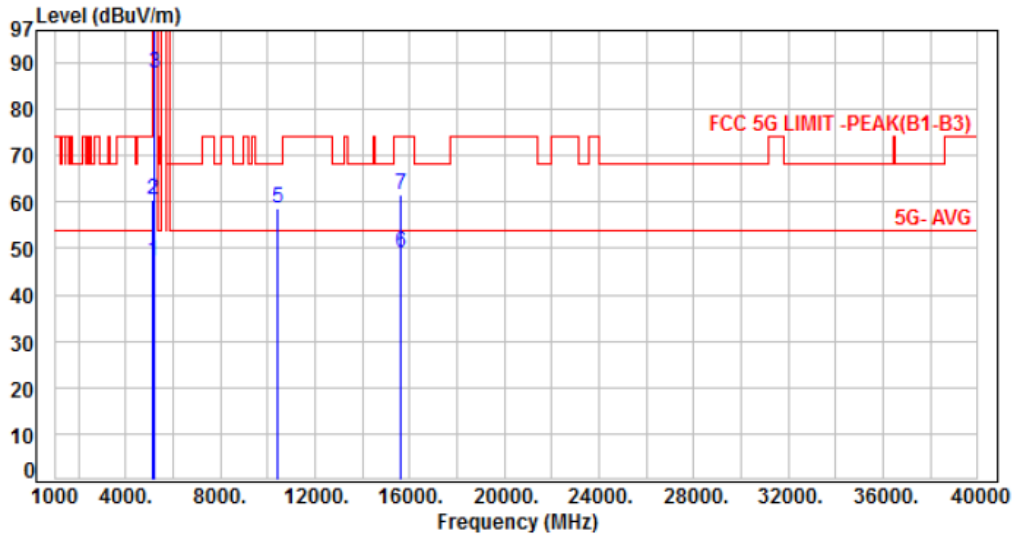


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.46	47.16	54.00	-6.84	Average	116	0	P
2	5150.00	6.70	53.80	60.50	74.00	-13.50	Peak	116	0	P
3	5200.00	6.95	80.92	87.87	200.00	-112.13	Average	116	0	P
4	5200.00	6.95	91.77	98.72	200.00	-101.28	Peak	116	0	P
5	10400.00	15.84	42.67	58.51	68.20	-9.69	Peak	100	216	P
6	15600.00	19.64	29.54	49.18	54.00	-4.82	Average	100	188	P
7	15600.00	19.64	41.91	61.55	74.00	-12.45	Peak	100	188	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 1, 11ax HE20 CH48		:

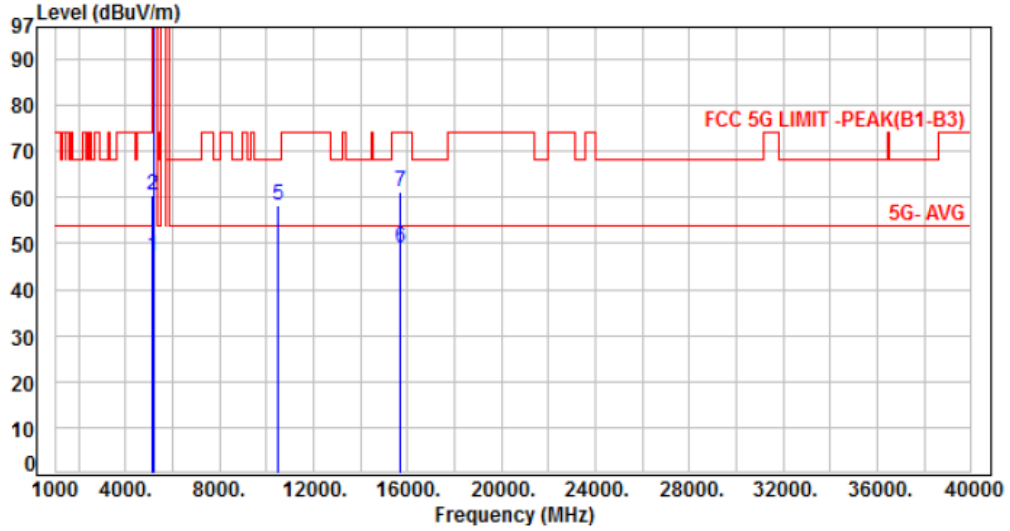


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.61	47.31	54.00	-6.69	Average	166	181	P
2	5150.00	6.70	53.89	60.59	74.00	-13.41	Peak	166	181	P
3	5240.00	7.00	92.40	99.40	200.00	-100.60	Average	166	181	P
4	5240.00	7.00	103.35	110.35	200.00	-89.65	Peak	166	181	P
5	10480.00	15.97	42.47	58.44	68.20	-9.76	Peak	100	225	P
6	15720.00	19.25	29.69	48.94	54.00	-5.06	Average	100	138	P
7	15720.00	19.25	42.15	61.40	74.00	-12.60	Peak	100	138	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 1, 11ax HE20 CH48		

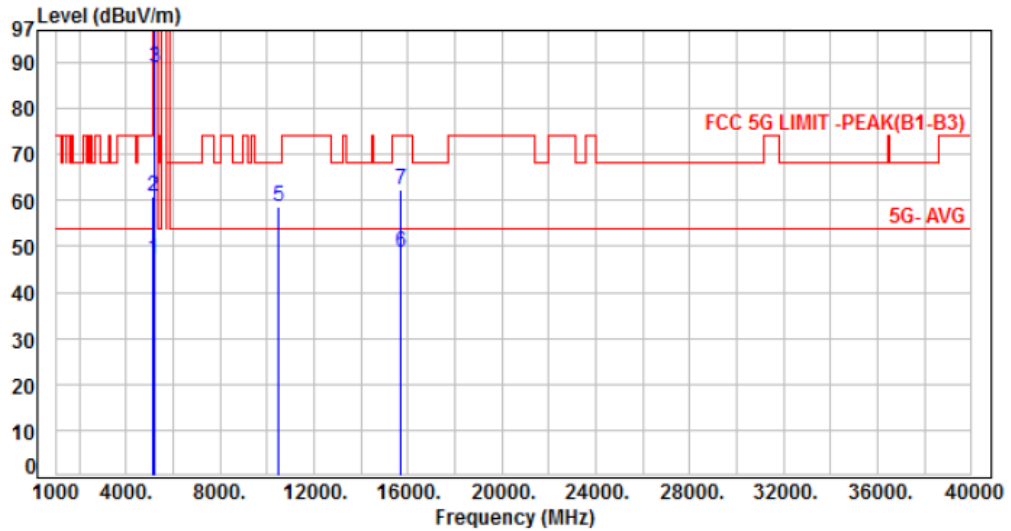


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.42	47.12	54.00	-6.88	Average	120	360	P
2	5150.00	6.70	54.07	60.77	74.00	-13.23	Peak	120	360	P
3	5240.00	7.00	82.04	89.04	200.00	-110.96	Average	120	360	P
4	5240.00	7.00	92.97	99.97	200.00	-100.03	Peak	120	360	P
5	10480.00	15.97	42.64	58.61	68.20	-9.59	Peak	100	215	P
6	15720.00	19.25	29.54	48.79	54.00	-5.21	Average	100	115	P
7	15720.00	19.25	43.26	62.51	74.00	-11.49	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 4, 11ax HE20 CH149		:

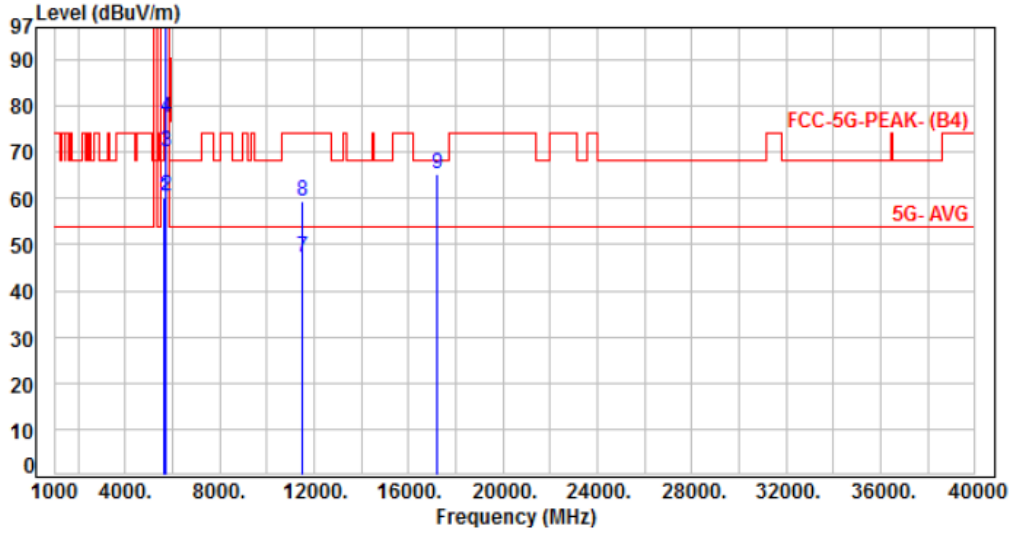


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	52.68	60.03	68.20	-8.17	Peak	117	30	P
2	5700.00	7.37	53.26	60.63	105.20	-44.57	Peak	117	30	P
3	5720.00	7.34	62.80	70.14	110.80	-40.66	Peak	117	30	P
4	5725.00	7.33	69.99	77.32	122.20	-44.88	Peak	117	30	P
5	5745.00	7.30	99.88	107.18	200.00	-92.82	Average	117	30	P
6	5745.00	7.30	111.68	118.98	200.00	-81.02	Peak	117	30	P
7	11490.00	17.72	29.58	47.30	54.00	-6.70	Average	100	245	P
8	11490.00	17.72	41.55	59.27	74.00	-14.73	Peak	100	245	P
9	17235.00	23.71	41.55	65.26	68.20	-2.94	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 4, 11ax HE20 CH149		

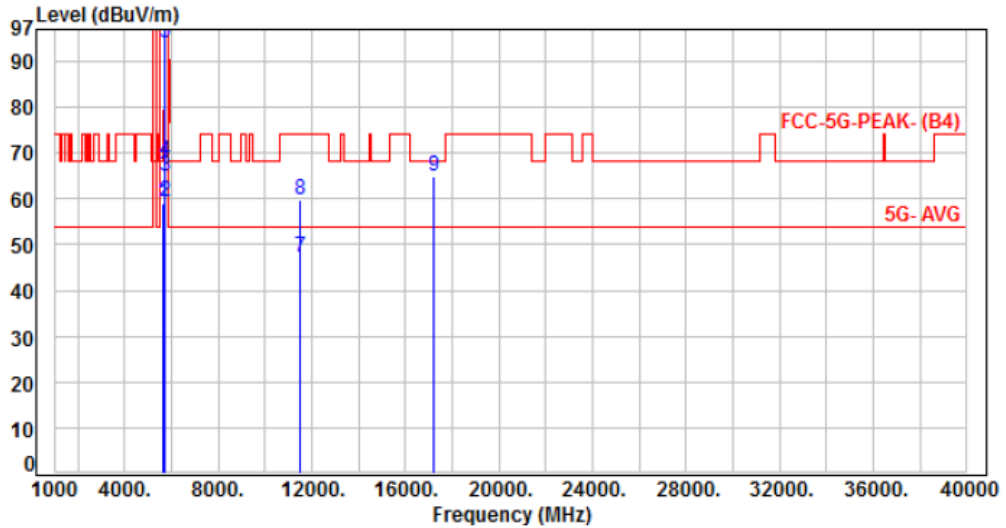


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	51.58	58.93	68.20	-9.27	Peak	100	338	P
2	5700.00	7.37	51.83	59.20	105.20	-46.00	Peak	100	338	P
3	5720.00	7.34	57.44	64.78	110.80	-46.02	Peak	100	338	P
4	5725.00	7.33	60.86	68.19	122.20	-54.01	Peak	100	338	P
5	5745.00	7.30	86.82	94.12	200.00	-105.88	Average	100	338	P
6	5745.00	7.30	99.85	107.15	200.00	-92.85	Peak	100	338	P
7	11490.00	17.72	29.67	47.39	54.00	-6.61	Average	100	169	P
8	11490.00	17.72	42.15	59.87	74.00	-14.13	Peak	100	169	P
9	17235.00	23.71	41.21	64.92	68.20	-3.28	Peak	100	167	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 4, 11ax HE20 CH157		:

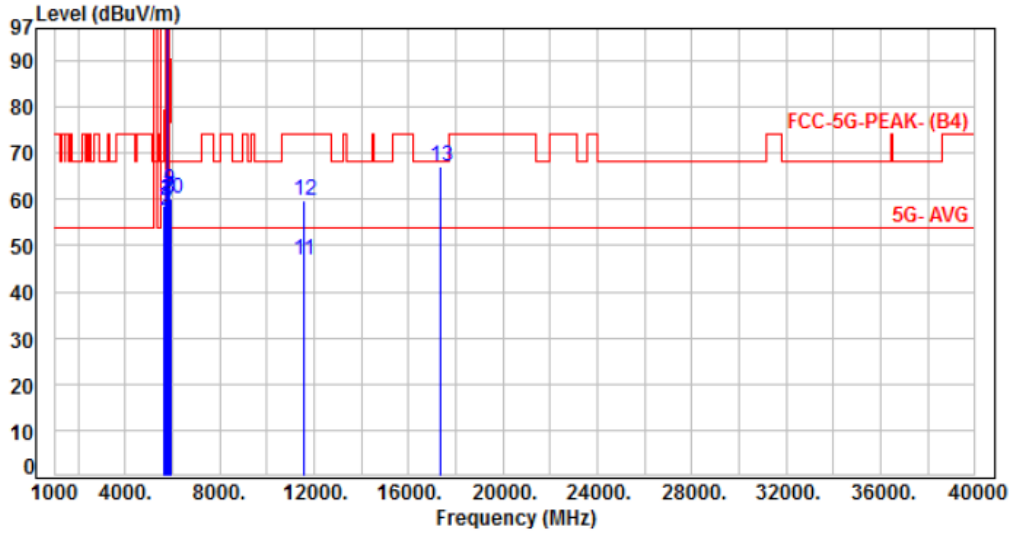


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	51.47	58.82	68.20	-9.38	Peak	118	34	P
2	5700.00	7.37	50.31	57.68	105.20	-47.52	Peak	118	34	P
3	5720.00	7.34	52.46	59.80	110.80	-51.00	Peak	118	34	P
4	5725.00	7.33	51.59	58.92	122.20	-63.28	Peak	118	34	P
5	5785.00	7.37	97.58	104.95	200.00	-95.05	Average	118	34	P
6	5785.00	7.37	112.53	119.90	200.00	-80.10	Peak	118	34	P
7	5850.00	7.43	53.12	60.55	122.20	-61.65	Peak	118	34	P
8	5855.00	7.45	52.67	60.12	110.80	-50.68	Peak	118	34	P
9	5875.00	7.54	54.28	61.82	105.20	-43.38	Peak	118	34	P
10	5925.00	7.66	52.63	60.29	68.20	-7.91	Peak	118	34	P
11	11570.00	17.92	29.01	46.93	54.00	-7.07	Average	100	137	P
12	11570.00	17.92	41.75	59.67	74.00	-14.33	Peak	100	137	P
13	17355.00	24.51	42.61	67.12	68.20	-1.08	Peak	100	158	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 4, 11ax HE20 CH157		

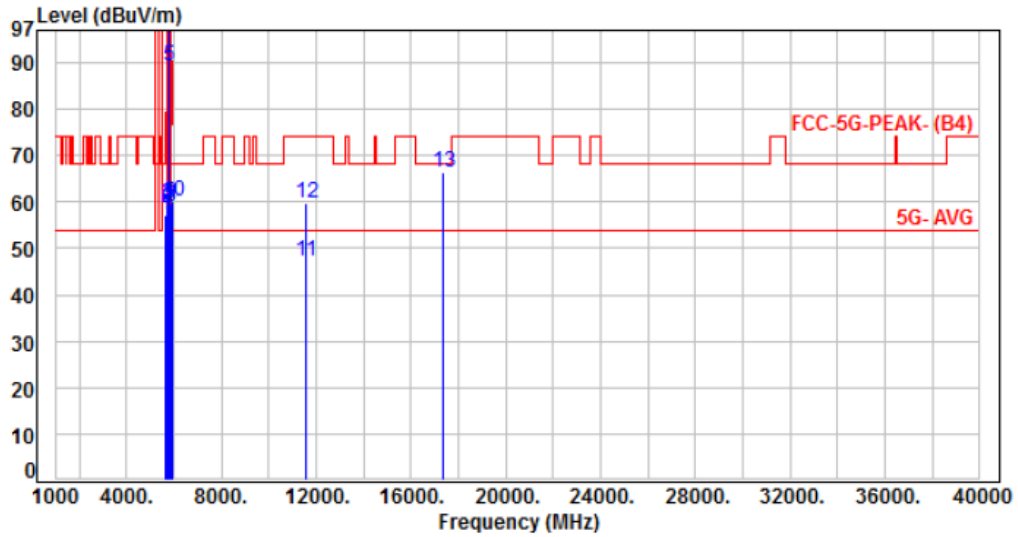


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	49.98	57.33	68.20	-10.87	Peak	100	336	P
2	5700.00	7.37	51.09	58.46	105.20	-46.74	Peak	100	336	P
3	5720.00	7.34	52.01	59.35	110.80	-51.45	Peak	100	336	P
4	5725.00	7.33	52.04	59.37	122.20	-62.83	Peak	100	336	P
5	5785.00	7.37	81.84	89.21	200.00	-110.79	Average	100	336	P
6	5785.00	7.37	91.21	98.58	200.00	-101.42	Peak	100	336	P
7	5850.00	7.43	51.47	58.90	122.20	-63.30	Peak	100	336	P
8	5855.00	7.45	51.68	59.13	110.80	-51.67	Peak	100	336	P
9	5875.00	7.54	52.05	59.59	105.20	-45.61	Peak	100	336	P
10	5925.00	7.66	52.45	60.11	68.20	-8.09	Peak	100	336	P
11	11570.00	17.92	29.15	47.07	54.00	-6.93	Average	100	225	P
12	11570.00	17.92	41.69	59.61	74.00	-14.39	Peak	100	225	P
13	17355.00	24.51	42.01	66.52	68.20	-1.68	Peak	100	246	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 4, 11ax HE20 CH165		:

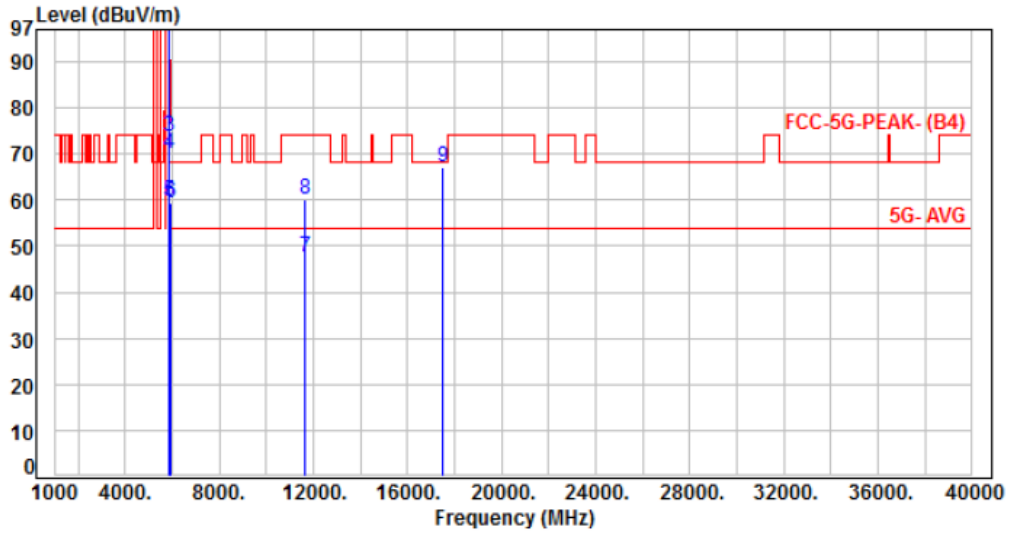


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	96.10	103.52	200.00	-96.48	Average	118	39	P
2	5825.00	7.42	110.90	118.32	200.00	-81.68	Peak	118	39	P
3	5850.00	7.43	66.37	73.80	122.20	-48.40	Peak	118	39	P
4	5855.00	7.45	62.80	70.25	110.80	-40.55	Peak	118	39	P
5	5875.00	7.54	52.25	59.79	105.20	-45.41	Peak	118	39	P
6	5925.00	7.66	51.90	59.56	68.20	-8.64	Peak	118	39	P
7	11650.00	18.08	29.68	47.76	54.00	-6.24	Average	100	45	P
8	11650.00	18.08	42.09	60.17	74.00	-13.83	Peak	100	45	P
9	17475.00	25.09	42.12	67.21	68.20	-0.99	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 4, 11ax HE20 CH165		

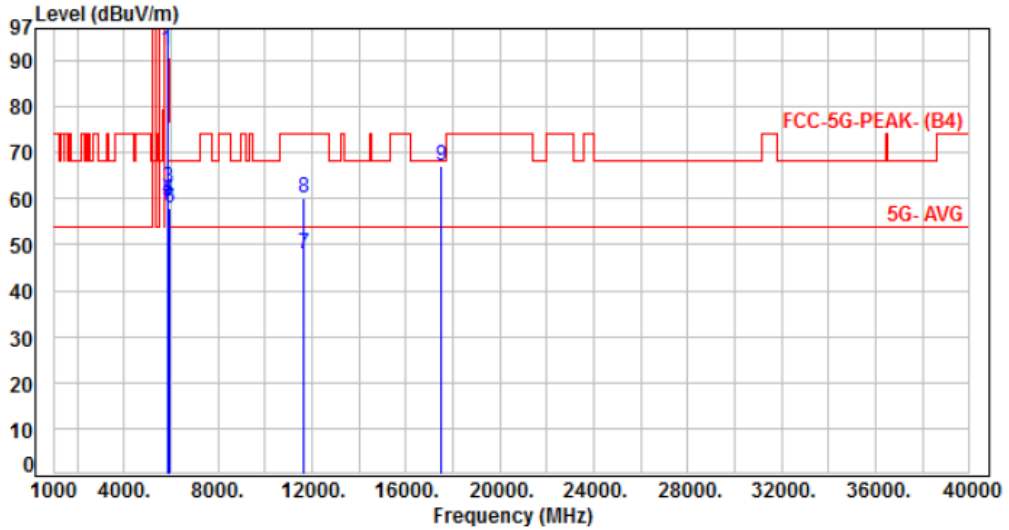


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	84.61	92.03	200.00	-107.97	Average	100	45	P
2	5825.00	7.42	98.19	105.61	200.00	-94.39	Peak	100	45	P
3	5850.00	7.43	54.93	62.36	122.20	-59.84	Peak	100	45	P
4	5855.00	7.45	52.39	59.84	110.80	-50.96	Peak	100	45	P
5	5875.00	7.54	51.70	59.24	105.20	-45.96	Peak	100	45	P
6	5925.00	7.66	50.13	57.79	68.20	-10.41	Peak	100	45	P
7	11650.00	18.08	29.90	47.98	54.00	-6.02	Average	100	259	P
8	11650.00	18.08	42.14	60.22	74.00	-13.78	Peak	100	259	P
9	17475.00	25.09	42.05	67.14	68.20	-1.06	Peak	100	139	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 1, 11ax HE40 CH38		:

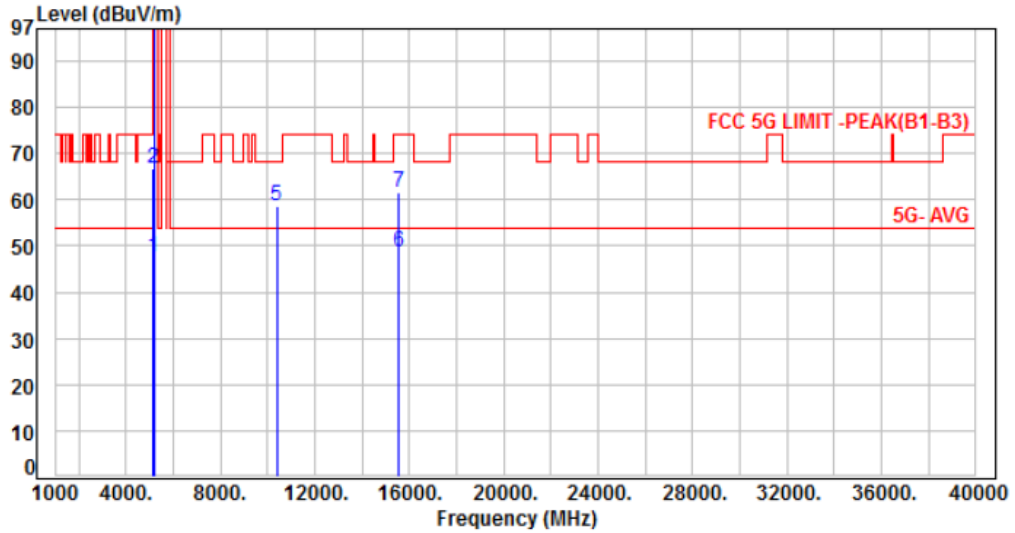


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.80	47.50	54.00	-6.50	Average	152	185	P
2	5150.00	6.70	60.07	66.77	74.00	-7.23	Peak	152	185	P
3	5190.00	6.90	90.31	97.21	200.00	-102.79	Average	152	185	P
4	5190.00	6.90	101.88	108.78	200.00	-91.22	Peak	152	185	P
5	10380.00	15.89	42.68	58.57	68.20	-9.63	Peak	100	153	P
6	15570.00	19.65	29.10	48.75	54.00	-5.25	Average	100	274	P
7	15570.00	19.65	41.96	61.61	74.00	-12.39	Peak	100	274	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 1, 11ax HE40 CH38		

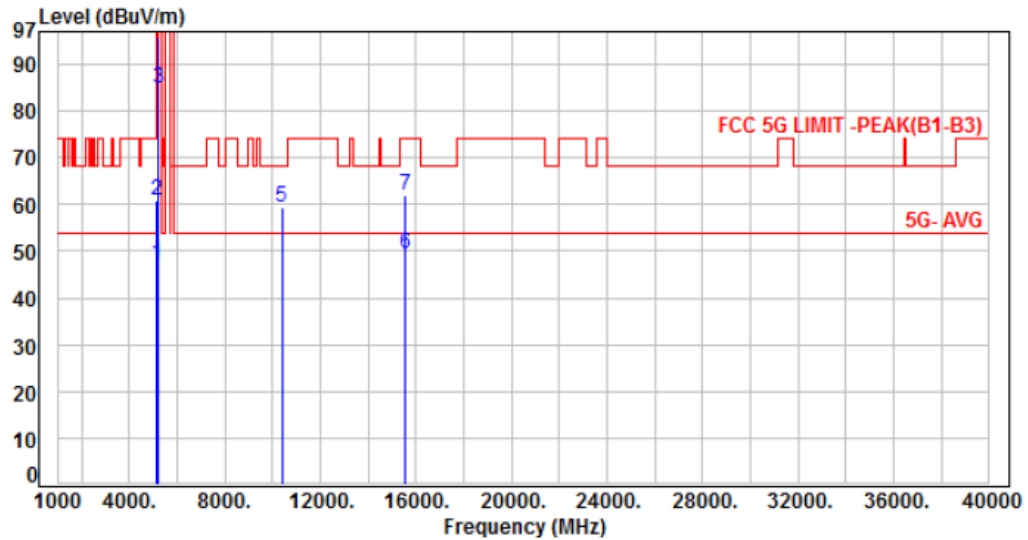

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	40.52	47.22	54.00	-6.78	Average	198	360	P
2	5150.00	6.70	54.08	60.78	74.00	-13.22	Peak	198	360	P
3	5190.00	6.90	77.85	84.75	200.00	-115.25	Average	198	360	P
4	5190.00	6.90	88.92	95.82	200.00	-104.18	Peak	198	360	P
5	10380.00	15.89	43.58	59.47	68.20	-8.73	Peak	100	199	P
6	15570.00	19.65	29.93	49.58	54.00	-4.42	Average	100	167	P
7	15570.00	19.65	42.26	61.91	74.00	-12.09	Peak	100	167	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor