




Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 10, Band 4, 11ax HE40 CH159		:

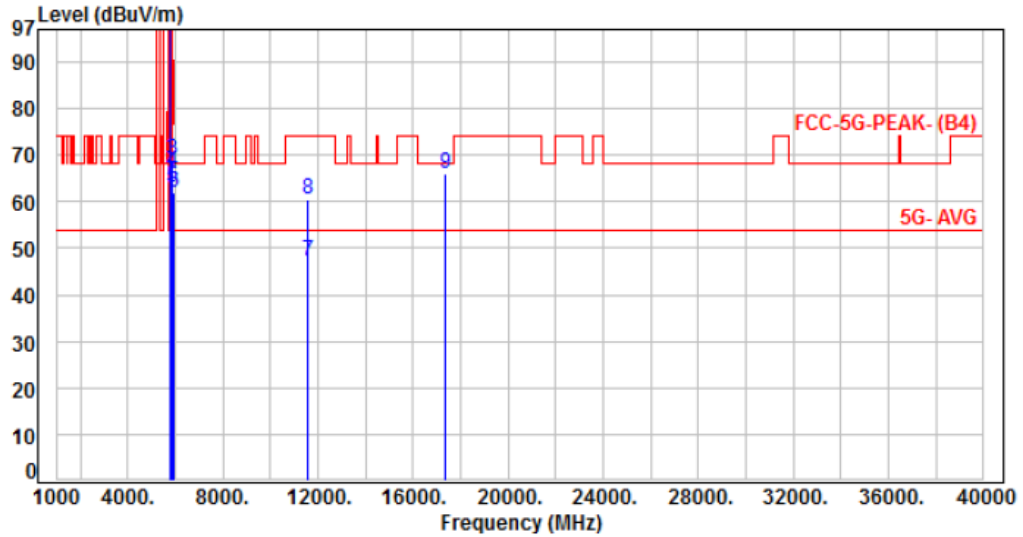


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	98.24	105.63	200.00	-94.37	Average	231	19	P
2	5795.00	7.39	111.73	119.12	200.00	-80.88	Peak	231	19	P
3	5850.00	7.43	61.60	69.03	122.20	-53.17	Peak	231	19	P
4	5855.00	7.45	58.95	66.40	110.80	-44.40	Peak	231	19	P
5	5875.00	7.54	55.69	63.23	105.20	-41.97	Peak	231	19	P
6	5925.00	7.66	54.43	62.09	68.20	-6.11	Peak	231	19	P
7	11590.00	17.95	29.12	47.07	54.00	-6.93	Average	100	171	P
8	11590.00	17.95	42.51	60.46	74.00	-13.54	Peak	100	171	P
9	17385.00	24.58	41.37	65.95	68.20	-2.25	Peak	100	88	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 10, Band 4, 11ax HE40 CH159		

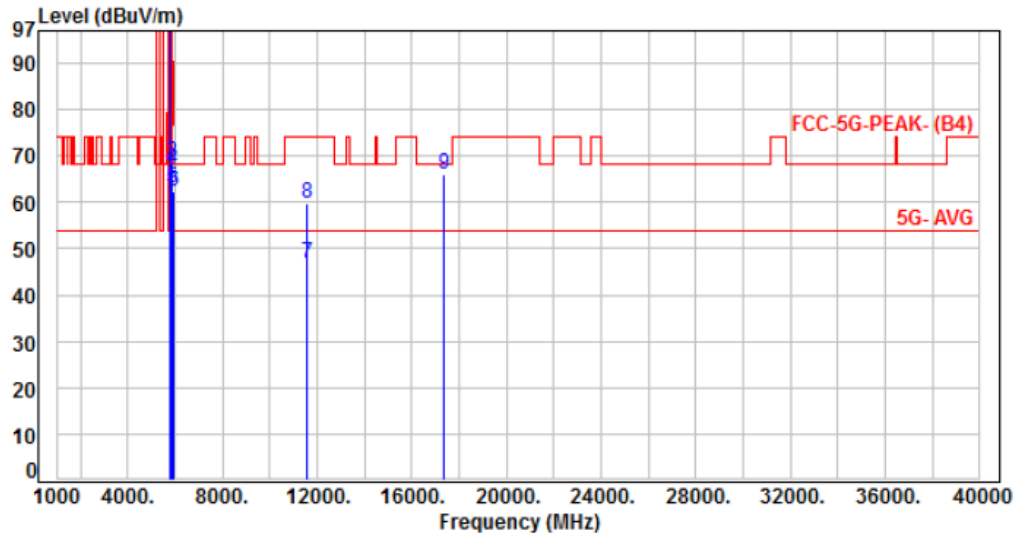


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	96.76	104.15	200.00	-95.85	Average	134	1	P
2	5795.00	7.39	109.24	116.63	200.00	-83.37	Peak	134	1	P
3	5850.00	7.43	61.13	68.56	122.20	-53.64	Peak	134	1	P
4	5855.00	7.45	59.84	67.29	110.80	-43.51	Peak	134	1	P
5	5875.00	7.54	55.62	63.16	105.20	-42.04	Peak	134	1	P
6	5925.00	7.66	54.63	62.29	68.20	-5.91	Peak	134	1	P
7	11590.00	17.95	28.85	46.80	54.00	-7.20	Average	100	42	P
8	11590.00	17.95	41.96	59.91	74.00	-14.09	Peak	100	42	P
9	17385.00	24.58	41.53	66.11	68.20	-2.09	Peak	100	223	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, Band 1, 11ax HE80 CH42		:

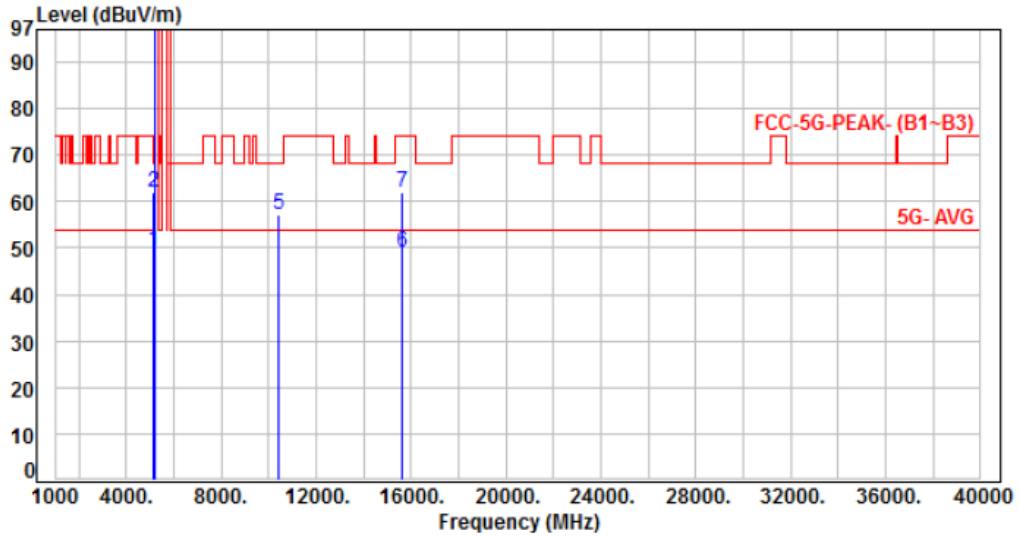


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	42.76	49.46	54.00	-4.54	Average	154	13	P
2	5150.00	6.70	55.14	61.84	74.00	-12.16	Peak	154	13	P
3	5210.00	6.97	91.43	98.40	200.00	-101.60	Average	154	13	P
4	5210.00	6.97	103.80	110.77	200.00	-89.23	Peak	154	13	P
5	10420.00	15.83	41.48	57.31	68.20	-10.89	Peak	100	164	P
6	15630.00	19.57	29.36	48.93	54.00	-5.07	Average	100	87	P
7	15630.00	19.57	42.33	61.90	74.00	-12.10	Peak	100	87	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, Band 1, 11ax HE80 CH42		

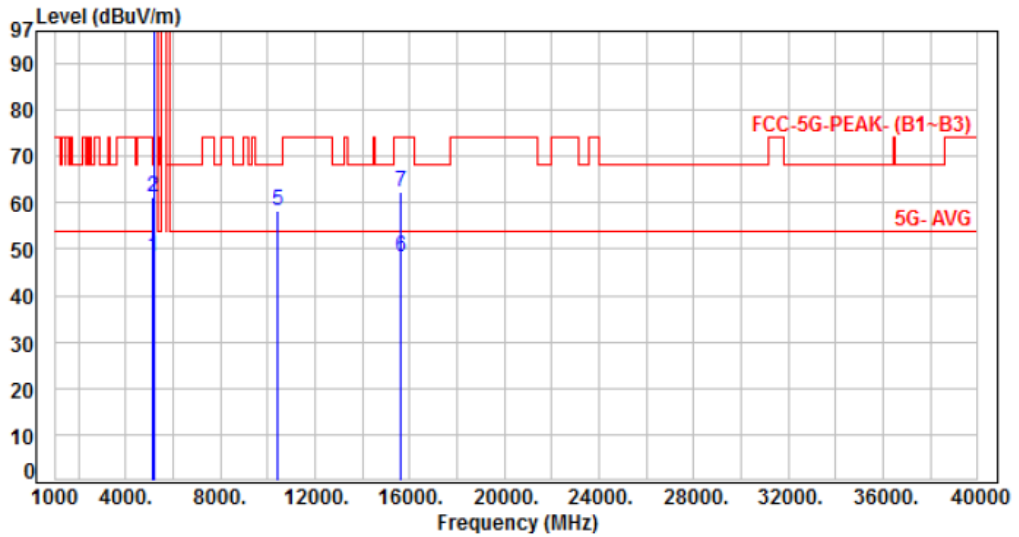


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	41.65	48.35	54.00	-5.65	Average	100	356	P
2	5150.00	6.70	54.50	61.20	74.00	-12.80	Peak	100	356	P
3	5210.00	6.97	90.18	97.15	200.00	-102.85	Average	100	356	P
4	5210.00	6.97	103.24	110.21	200.00	-89.79	Peak	100	356	P
5	10420.00	15.83	42.36	58.19	68.20	-10.01	Peak	100	51	P
6	15630.00	19.57	28.79	48.36	54.00	-5.64	Average	100	228	P
7	15630.00	19.57	42.83	62.40	74.00	-11.60	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, Band 4, 11ax HE80 CH155		:

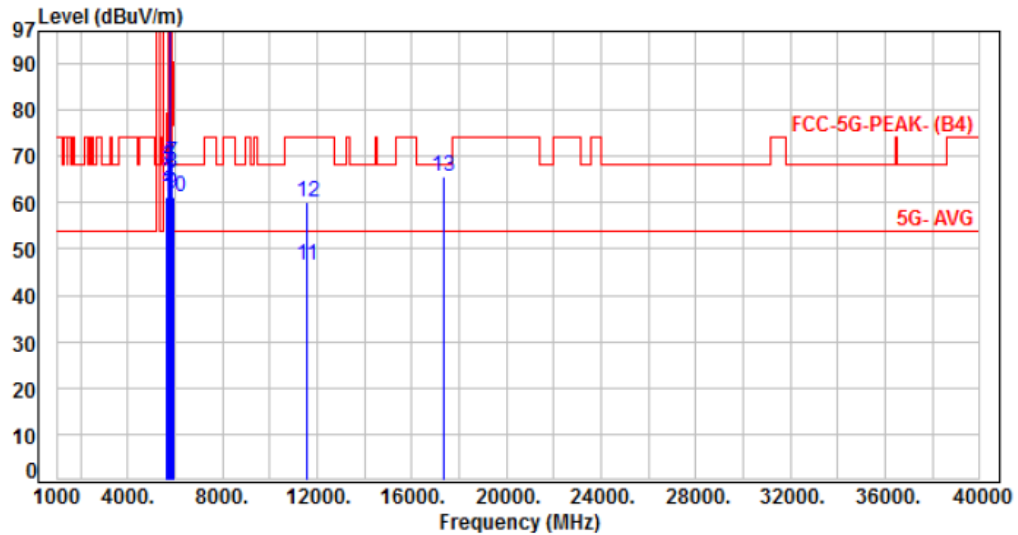


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	53.96	61.31	68.20	-6.89	Peak	248	18	P
2	5700.00	7.37	57.06	64.43	105.20	-40.77	Peak	248	18	P
3	5720.00	7.34	60.41	67.75	110.80	-43.05	Peak	248	18	P
4	5725.00	7.33	61.33	68.66	122.20	-53.54	Peak	248	18	P
5	5775.00	7.35	93.30	100.65	200.00	-99.35	Average	248	18	P
6	5775.00	7.35	105.43	112.78	200.00	-87.22	Peak	248	18	P
7	5850.00	7.43	61.20	68.63	122.20	-53.57	Peak	248	18	P
8	5855.00	7.45	58.98	66.43	110.80	-44.37	Peak	248	18	P
9	5875.00	7.54	54.57	62.11	105.20	-43.09	Peak	248	18	P
10	5925.00	7.66	53.61	61.27	68.20	-6.93	Peak	248	18	P
11	11550.00	17.88	28.58	46.46	54.00	-7.54	Average	100	169	P
12	11550.00	17.88	42.35	60.23	74.00	-13.77	Peak	100	169	P
13	17325.00	24.29	41.25	65.54	68.20	-2.66	Peak	100	79	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, Band 4, 11ax HE80 CH155		

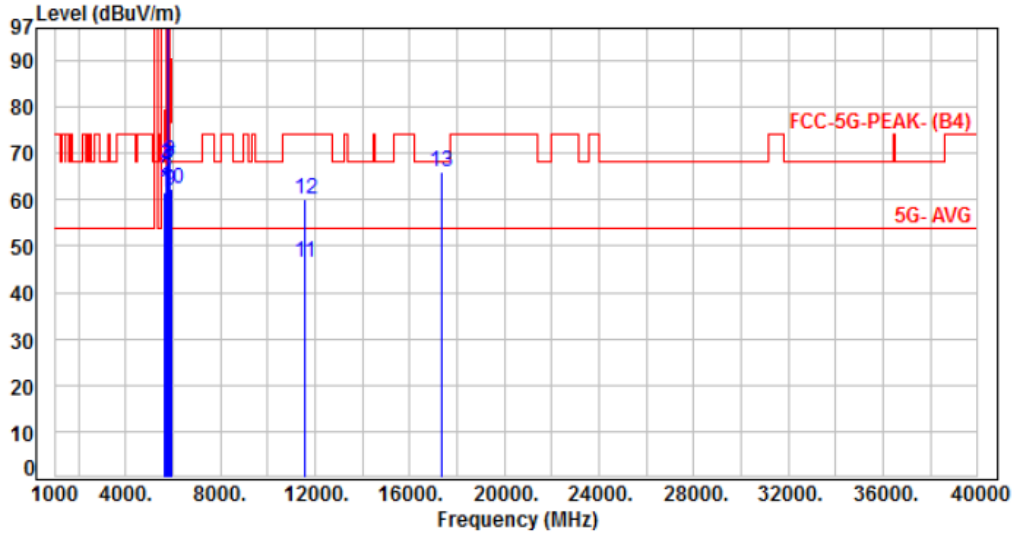


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.06	61.41	68.20	-6.79	Peak	148	346	P
2	5700.00	7.37	57.33	64.70	105.20	-40.50	Peak	148	346	P
3	5720.00	7.34	60.13	67.47	110.80	-43.33	Peak	148	346	P
4	5725.00	7.33	59.92	67.25	122.20	-54.95	Peak	148	346	P
5	5775.00	7.35	91.48	98.83	200.00	-101.17	Average	148	346	P
6	5775.00	7.35	105.31	112.66	200.00	-87.34	Peak	148	346	P
7	5850.00	7.43	59.81	67.24	122.20	-54.96	Peak	148	346	P
8	5855.00	7.45	60.92	68.37	110.80	-42.43	Peak	148	346	P
9	5875.00	7.54	54.26	61.80	105.20	-43.40	Peak	148	346	P
10	5925.00	7.66	54.61	62.27	68.20	-5.93	Peak	148	346	P
11	11550.00	17.88	28.64	46.52	54.00	-7.48	Average	100	48	P
12	11550.00	17.88	42.16	60.04	74.00	-13.96	Peak	100	48	P
13	17325.00	24.29	41.66	65.95	68.20	-2.25	Peak	100	225	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 12, Band 1, 11ax HE20 CH36		:

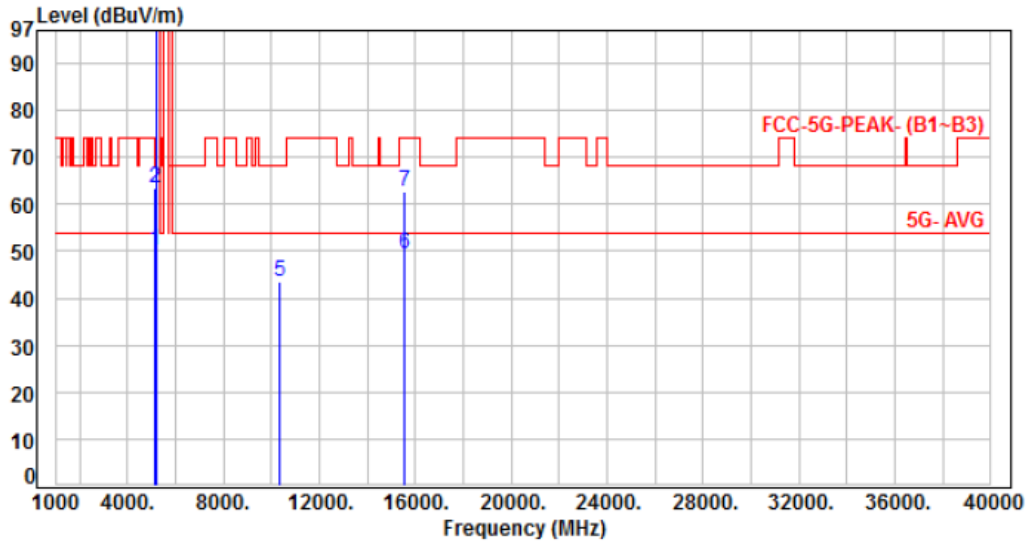


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.30	50.00	54.00	-4.00	Average	128	13	P
2	5150.00	6.70	56.84	63.54	74.00	-10.46	Peak	128	13	P
3	5180.00	6.85	93.22	100.07	200.00	-99.93	Average	128	13	P
4	5180.00	6.85	104.00	110.85	200.00	-89.15	Peak	128	13	P
5	10360.00	15.93	27.48	43.41	68.20	-24.79	Peak	100	227	P
6	15540.00	19.69	29.72	49.41	54.00	-4.59	Average	100	158	P
7	15540.00	19.69	43.14	62.83	74.00	-11.17	Peak	100	158	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 12, Band 1, 11ax HE20 CH36		

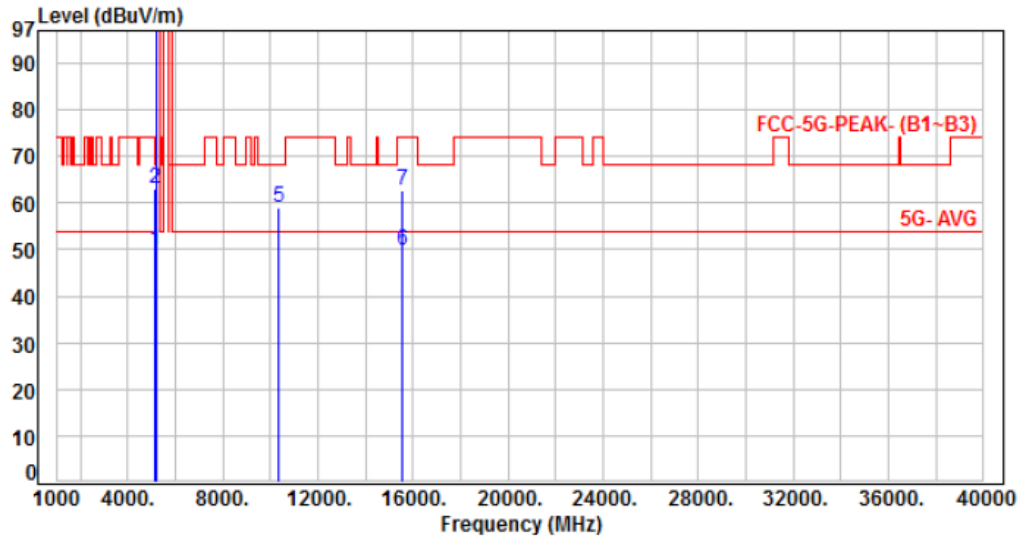


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.26	49.96	54.00	-4.04	Average	100	360	P
2	5150.00	6.70	56.40	63.10	74.00	-10.90	Peak	100	360	P
3	5180.00	6.85	91.73	98.58	200.00	-101.42	Average	100	360	P
4	5180.00	6.85	101.96	108.81	200.00	-91.19	Peak	100	360	P
5	10360.00	15.93	43.05	58.98	68.20	-9.22	Peak	100	317	P
6	15540.00	19.69	30.06	49.75	54.00	-4.25	Average	100	223	P
7	15540.00	19.69	42.99	62.68	74.00	-11.32	Peak	100	223	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 12, Band 1, 11ax HE20 CH40		:

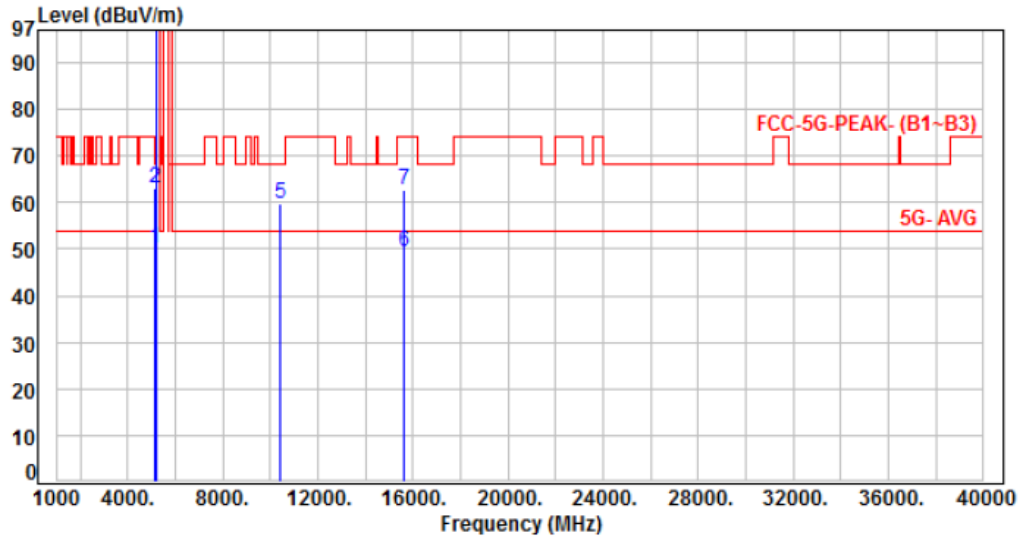


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.30	50.00	54.00	-4.00	Average	158	12	P
2	5150.00	6.70	56.44	63.14	74.00	-10.86	Peak	158	12	P
3	5200.00	6.95	93.18	100.13	200.00	-99.87	Average	158	12	P
4	5200.00	6.95	104.05	111.00	200.00	-89.00	Peak	158	12	P
5	10400.00	15.84	43.85	59.69	68.20	-8.51	Peak	100	157	P
6	15600.00	19.64	29.76	49.40	54.00	-4.60	Average	100	229	P
7	15600.00	19.64	43.03	62.67	74.00	-11.33	Peak	100	229	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 12, Band 1, 11ax HE20 CH40		

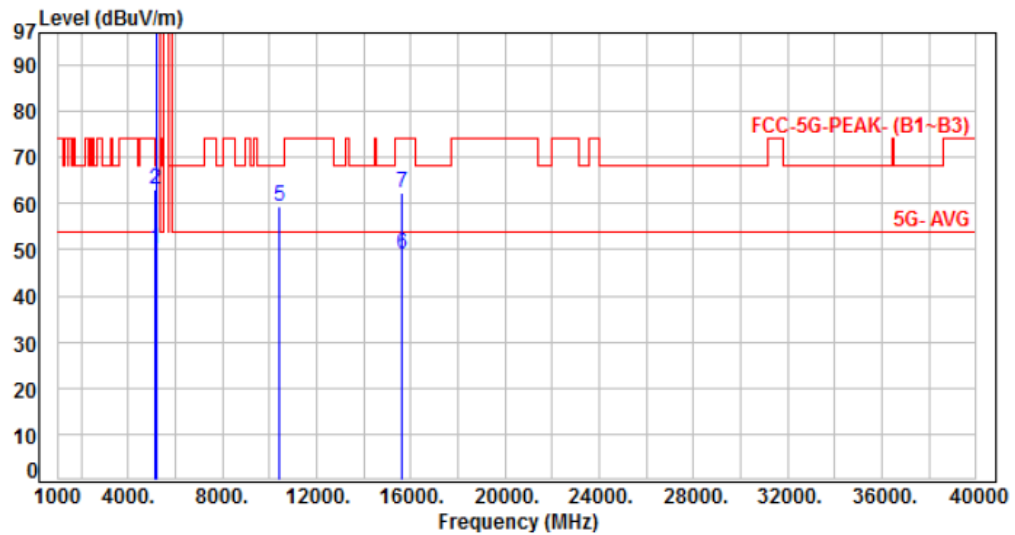


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.44	50.14	54.00	-3.86	Average	100	358	P
2	5150.00	6.70	56.25	62.95	74.00	-11.05	Peak	100	358	P
3	5200.00	6.95	91.43	98.38	200.00	-101.62	Average	100	358	P
4	5200.00	6.95	102.54	109.49	200.00	-90.51	Peak	100	358	P
5	10400.00	15.84	43.60	59.44	68.20	-8.76	Peak	100	185	P
6	15600.00	19.64	29.56	49.20	54.00	-4.80	Average	100	192	P
7	15600.00	19.64	42.63	62.27	74.00	-11.73	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 12, Band 1, 11ax HE20 CH48		:

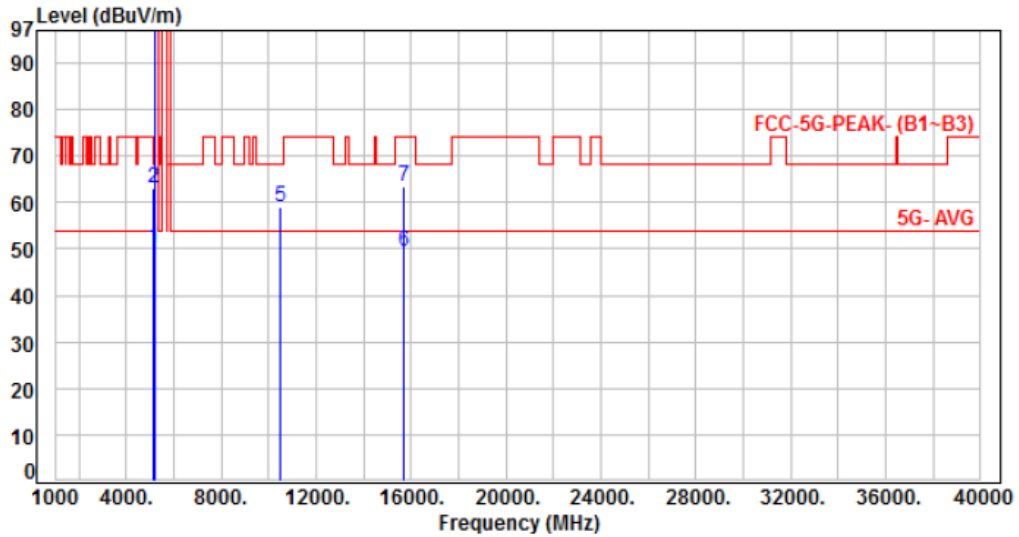


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.35	50.05	54.00	-3.95	Average	307	13	P
2	5150.00	6.70	56.27	62.97	74.00	-11.03	Peak	307	13	P
3	5240.00	7.00	93.73	100.73	200.00	-99.27	Average	307	13	P
4	5240.00	7.00	104.14	111.14	200.00	-88.86	Peak	307	13	P
5	10480.00	15.97	43.06	59.03	68.20	-9.17	Peak	100	161	P
6	15720.00	19.25	30.09	49.34	54.00	-4.66	Average	100	284	P
7	15720.00	19.25	44.27	63.52	74.00	-10.48	Peak	100	284	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 12, Band 1, 11ax HE20 CH48		

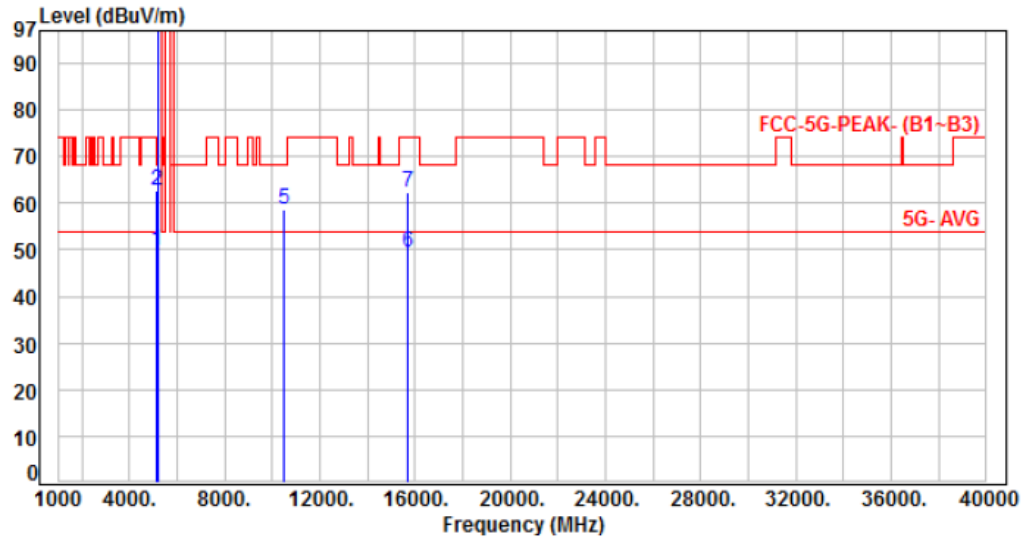


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.25	49.95	54.00	-4.05	Average	100	360	P
2	5150.00	6.70	56.05	62.75	74.00	-11.25	Peak	100	360	P
3	5240.00	7.00	92.05	99.05	200.00	-100.95	Average	100	360	P
4	5240.00	7.00	103.01	110.01	200.00	-89.99	Peak	100	360	P
5	10480.00	15.97	42.82	58.79	68.20	-9.41	Peak	100	133	P
6	15720.00	19.25	30.16	49.41	54.00	-4.59	Average	100	197	P
7	15720.00	19.25	43.19	62.44	74.00	-11.56	Peak	100	197	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 12, Band 4, 11ax HE20 CH149		:

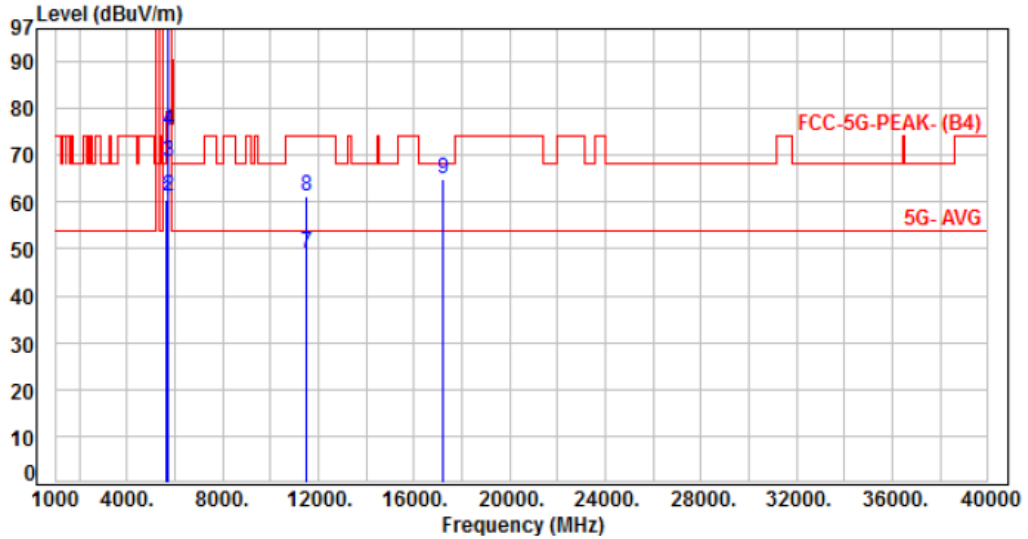


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	53.27	60.62	68.20	-7.58	Peak	278	23	P
2	5700.00	7.37	53.71	61.08	105.20	-44.12	Peak	278	23	P
3	5720.00	7.34	61.22	68.56	110.80	-42.24	Peak	278	23	P
4	5725.00	7.33	67.89	75.22	122.20	-46.98	Peak	278	23	P
5	5745.00	7.30	95.65	102.95	200.00	-97.05	Average	278	23	P
6	5745.00	7.30	112.81	120.11	200.00	-79.89	Peak	278	23	P
7	11490.00	17.72	31.49	49.21	54.00	-4.79	Average	100	134	P
8	11490.00	17.72	43.44	61.16	74.00	-12.84	Peak	100	134	P
9	17235.00	23.71	41.22	64.93	68.20	-3.27	Peak	100	263	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 12, Band 4, 11ax HE20 CH149		

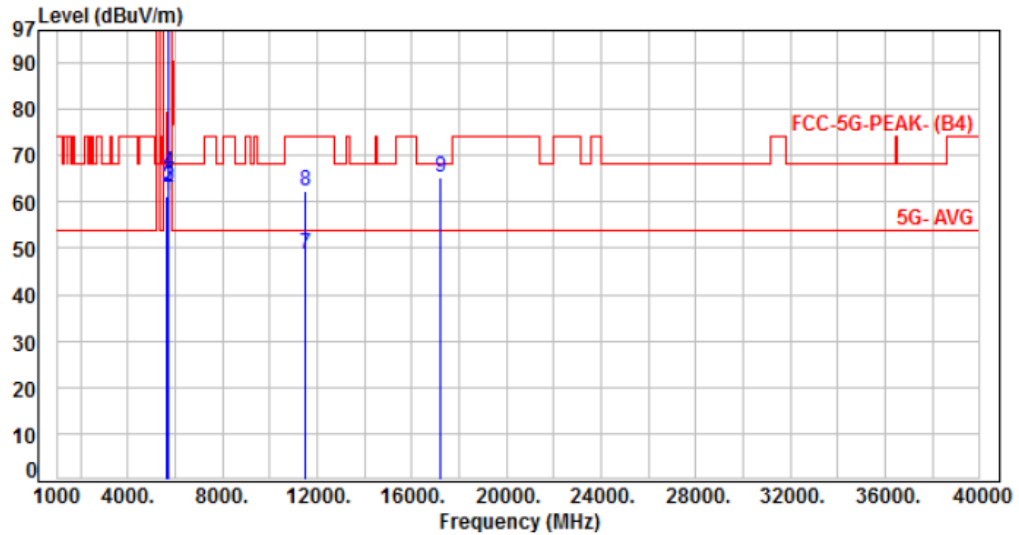


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.01	61.36	68.20	-6.84	Peak	100	357	P
2	5700.00	7.37	55.68	63.05	105.20	-42.15	Peak	100	357	P
3	5720.00	7.34	56.06	63.40	110.80	-47.40	Peak	100	357	P
4	5725.00	7.33	59.05	66.38	122.20	-55.82	Peak	100	357	P
5	5745.00	7.30	90.98	98.28	200.00	-101.72	Average	100	357	P
6	5745.00	7.30	109.64	116.94	200.00	-83.06	Peak	100	357	P
7	11490.00	17.72	30.86	48.58	54.00	-5.42	Average	100	234	P
8	11490.00	17.72	44.56	62.28	74.00	-11.72	Peak	100	234	P
9	17235.00	23.71	41.66	65.37	68.20	-2.83	Peak	100	163	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 12, Band 4, 11ax HE20 CH151		:

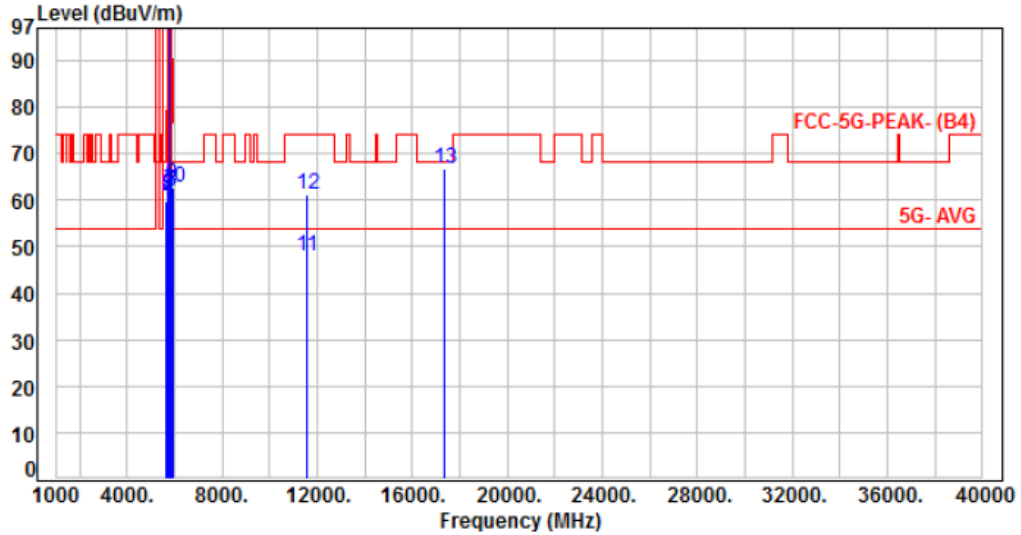


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	52.24	59.59	68.20	-8.61	Peak	273	23	P
2	5700.00	7.37	53.51	60.88	105.20	-44.32	Peak	273	23	P
3	5720.00	7.34	53.96	61.30	110.80	-49.50	Peak	273	23	P
4	5725.00	7.33	54.70	62.03	122.20	-60.17	Peak	273	23	P
5	5785.00	7.37	94.92	102.29	200.00	-97.71	Average	273	23	P
6	5785.00	7.37	110.52	117.89	200.00	-82.11	Peak	273	23	P
7	5850.00	7.43	54.18	61.61	122.20	-60.59	Peak	273	23	P
8	5855.00	7.45	54.41	61.86	110.80	-48.94	Peak	273	23	P
9	5875.00	7.54	55.76	63.30	105.20	-41.90	Peak	273	23	P
10	5925.00	7.66	54.93	62.59	68.20	-5.61	Peak	273	23	P
11	11570.00	17.92	30.06	47.98	54.00	-6.02	Average	100	169	P
12	11570.00	17.92	43.29	61.21	74.00	-12.79	Peak	100	169	P
13	17355.00	24.51	42.11	66.62	68.20	-1.58	Peak	100	264	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 12, Band 4, 11ax HE20 CH151		

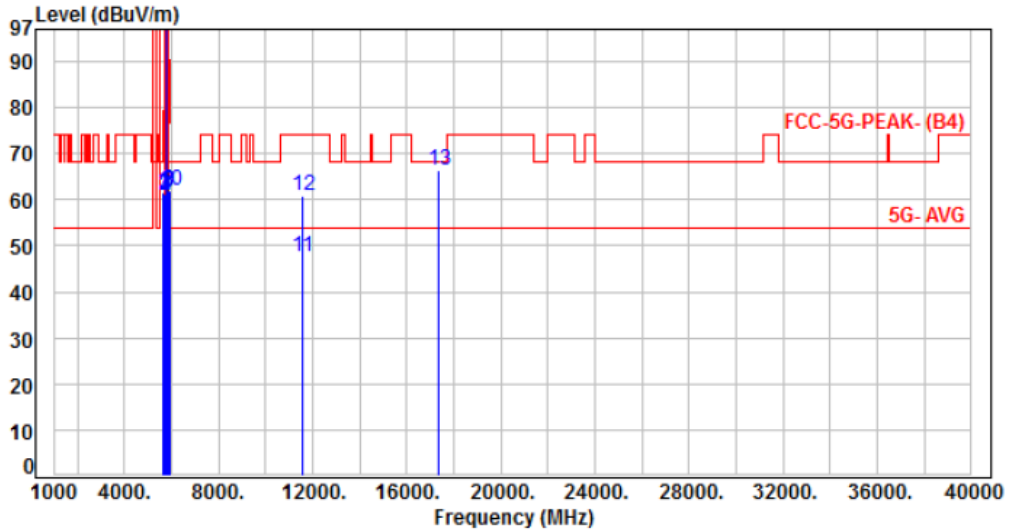


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.18	61.53	68.20	-6.67	Peak	138	360	P
2	5700.00	7.37	53.61	60.98	105.20	-44.22	Peak	138	360	P
3	5720.00	7.34	53.76	61.10	110.80	-49.70	Peak	138	360	P
4	5725.00	7.33	53.27	60.60	122.20	-61.60	Peak	138	360	P
5	5785.00	7.37	91.68	99.05	200.00	-100.95	Average	138	360	P
6	5785.00	7.37	109.00	116.37	200.00	-83.63	Peak	138	360	P
7	5850.00	7.43	54.32	61.75	122.20	-60.45	Peak	138	360	P
8	5855.00	7.45	53.99	61.44	110.80	-49.36	Peak	138	360	P
9	5875.00	7.54	54.54	62.08	105.20	-43.12	Peak	138	360	P
10	5925.00	7.66	54.22	61.88	68.20	-6.32	Peak	138	360	P
11	11570.00	17.92	29.83	47.75	54.00	-6.25	Average	100	314	P
12	11570.00	17.92	42.86	60.78	74.00	-13.22	Peak	100	314	P
13	17355.00	24.51	41.97	66.48	68.20	-1.72	Peak	100	256	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 12, Band 4, 11ax HE20 CH165		:

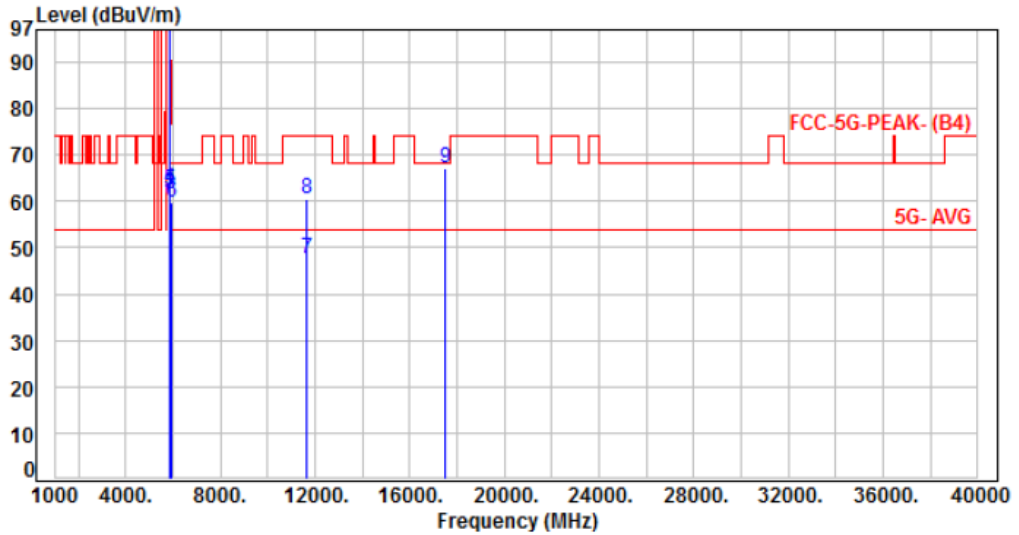


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	94.59	102.01	200.00	-97.99	Average	240	0	P
2	5825.00	7.42	111.46	118.88	200.00	-81.12	Peak	240	0	P
3	5850.00	7.43	54.22	61.65	122.20	-60.55	Peak	240	0	P
4	5855.00	7.45	55.18	62.63	110.80	-48.17	Peak	240	0	P
5	5875.00	7.54	54.66	62.20	105.20	-43.00	Peak	240	0	P
6	5925.00	7.66	51.99	59.65	68.20	-8.55	Peak	240	0	P
7	11650.00	18.08	29.66	47.74	54.00	-6.26	Average	100	334	P
8	11650.00	18.08	42.56	60.64	74.00	-13.36	Peak	100	334	P
9	17475.00	25.09	42.10	67.19	68.20	-1.01	Peak	100	269	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 12, Band 4, 11ax HE20 CH165		

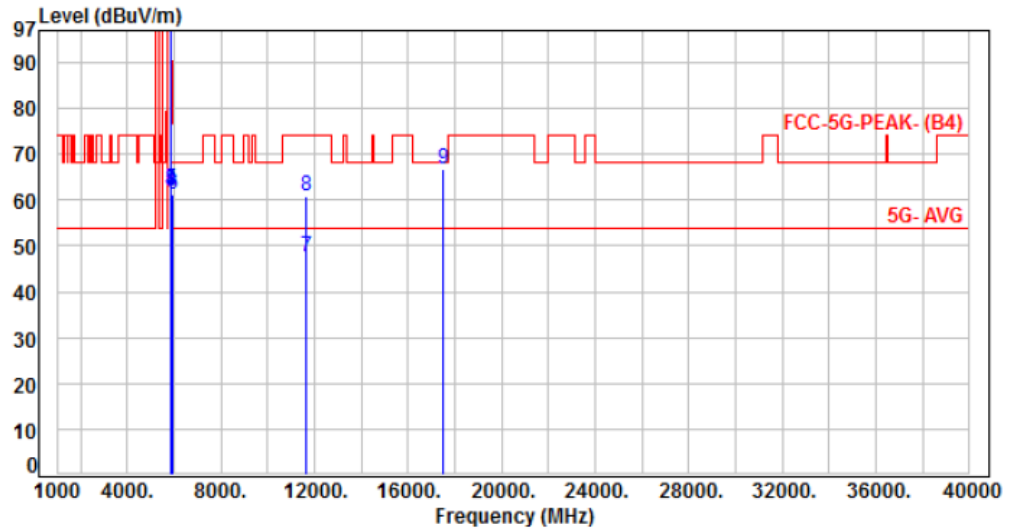


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	91.48	98.90	200.00	-101.10	Average	131	360	P
2	5825.00	7.42	109.89	117.31	200.00	-82.69	Peak	131	360	P
3	5850.00	7.43	54.58	62.01	122.20	-60.19	Peak	131	360	P
4	5855.00	7.45	54.68	62.13	110.80	-48.67	Peak	131	360	P
5	5875.00	7.54	54.73	62.27	105.20	-42.93	Peak	131	360	P
6	5925.00	7.66	53.72	61.38	68.20	-6.82	Peak	131	360	P
7	11650.00	18.08	29.35	47.43	54.00	-6.57	Average	100	266	P
8	11650.00	18.08	42.72	60.80	74.00	-13.20	Peak	100	266	P
9	17475.00	25.09	41.64	66.73	68.20	-1.47	Peak	100	133	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 1, 11ax HE40 CH38		:

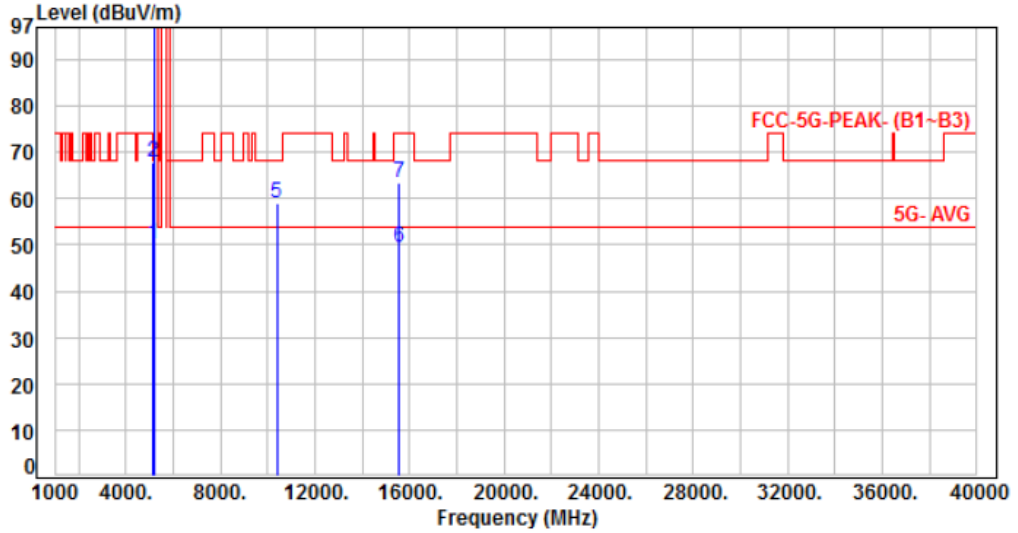


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.51	50.21	54.00	-3.79	Average	145	18	P
2	5150.00	6.70	61.04	67.74	74.00	-6.26	Peak	145	18	P
3	5190.00	6.90	92.25	99.15	200.00	-100.85	Average	145	18	P
4	5190.00	6.90	102.29	109.19	200.00	-90.81	Peak	145	18	P
5	10380.00	15.89	43.28	59.17	68.20	-9.03	Peak	100	134	P
6	15570.00	19.65	29.74	49.39	54.00	-4.61	Average	100	179	P
7	15570.00	19.65	43.78	63.43	74.00	-10.57	Peak	100	179	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 1, 11ax HE40 CH38		

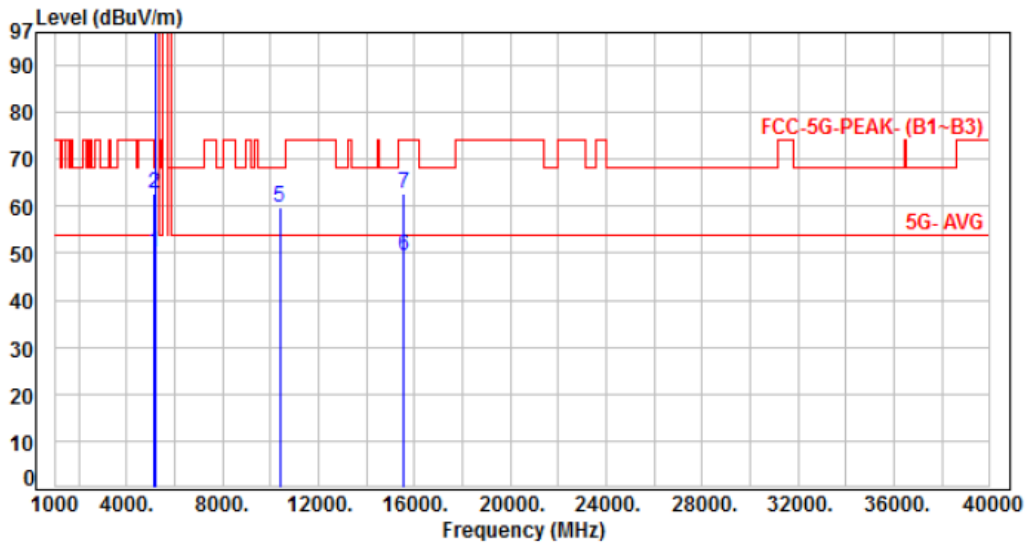


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.29	49.99	54.00	-4.01	Average	100	360	P
2	5150.00	6.70	55.92	62.62	74.00	-11.38	Peak	100	360	P
3	5190.00	6.90	90.23	97.13	200.00	-102.87	Average	100	360	P
4	5190.00	6.90	100.42	107.32	200.00	-92.68	Peak	100	360	P
5	10380.00	15.89	43.68	59.57	68.20	-8.63	Peak	100	287	P
6	15570.00	19.65	29.87	49.52	54.00	-4.48	Average	100	163	P
7	15570.00	19.65	43.23	62.88	74.00	-11.12	Peak	100	163	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 1, 11ax HE40 CH46		:

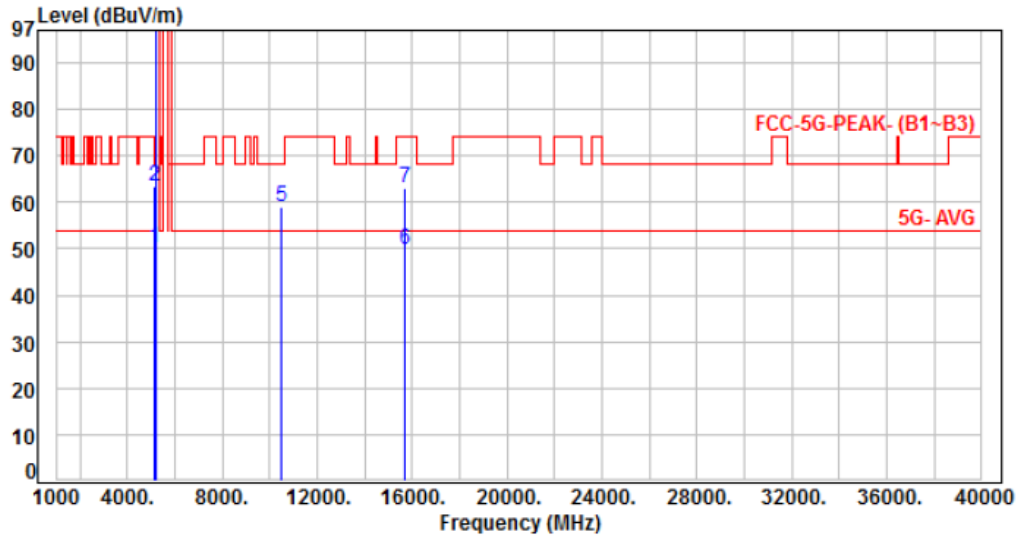


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.38	50.08	54.00	-3.92	Average	163	15	P
2	5150.00	6.70	56.64	63.34	74.00	-10.66	Peak	163	15	P
3	5230.00	6.99	92.12	99.11	200.00	-100.89	Average	163	15	P
4	5230.00	6.99	102.26	109.25	200.00	-90.75	Peak	163	15	P
5	10460.00	15.86	43.00	58.86	68.20	-9.34	Peak	100	259	P
6	15690.00	19.44	30.33	49.77	54.00	-4.23	Average	100	139	P
7	15690.00	19.44	43.58	63.02	74.00	-10.98	Peak	100	139	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 1, 11ax HE40 CH46		

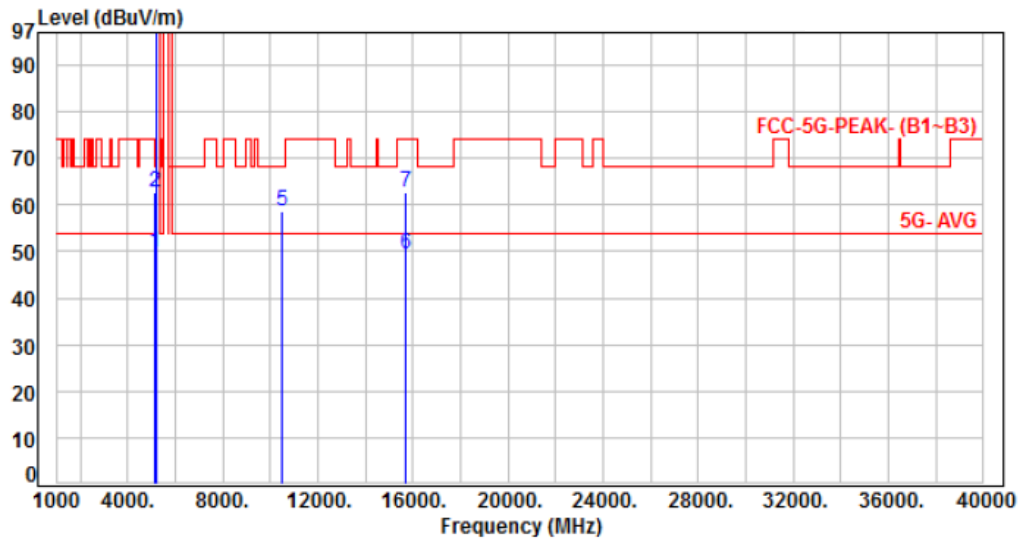


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.20	49.90	54.00	-4.10	Average	100	360	P
2	5150.00	6.70	56.17	62.87	74.00	-11.13	Peak	100	360	P
3	5230.00	6.99	90.90	97.89	200.00	-102.11	Average	100	360	P
4	5230.00	6.99	100.46	107.45	200.00	-92.55	Peak	100	360	P
5	10460.00	15.86	42.75	58.61	68.20	-9.59	Peak	100	227	P
6	15690.00	19.44	30.12	49.56	54.00	-4.44	Average	100	113	P
7	15690.00	19.44	43.39	62.83	74.00	-11.17	Peak	100	113	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 4, 11ax HE40 CH151		:

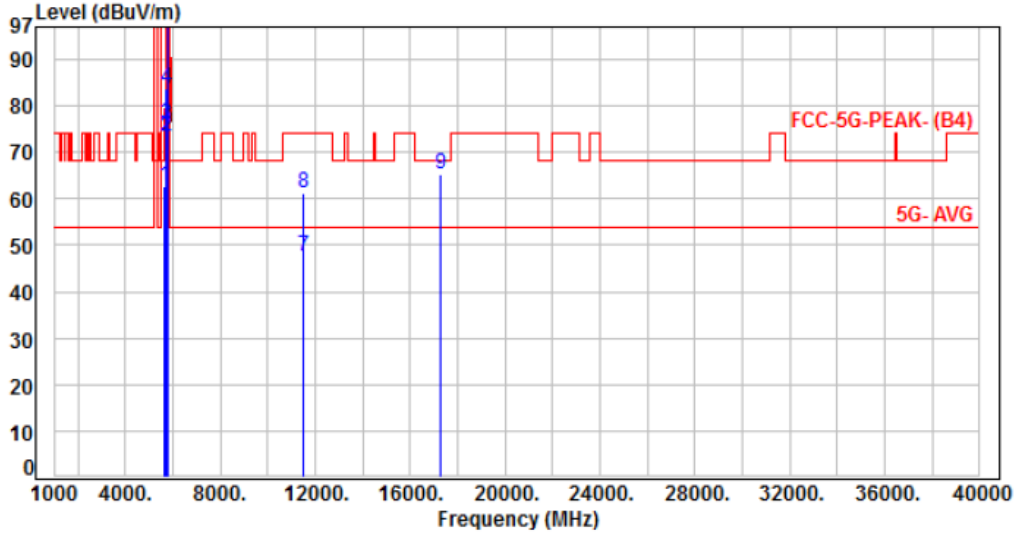


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.51	62.86	68.20	-5.34	Peak	261	21	P
2	5700.00	7.37	66.04	73.41	105.20	-31.79	Peak	261	21	P
3	5720.00	7.34	68.73	76.07	110.80	-34.73	Peak	261	21	P
4	5725.00	7.33	76.22	83.55	122.20	-38.65	Peak	261	21	P
5	5755.00	7.30	95.31	102.61	200.00	-97.39	Average	261	21	P
6	5755.00	7.30	109.10	116.40	200.00	-83.60	Peak	261	21	P
7	11510.00	17.79	29.75	47.54	54.00	-6.46	Average	100	264	P
8	11510.00	17.79	43.26	61.05	74.00	-12.95	Peak	100	264	P
9	17265.00	23.86	41.53	65.39	68.20	-2.81	Peak	100	314	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 4, 11ax HE40 CH151		

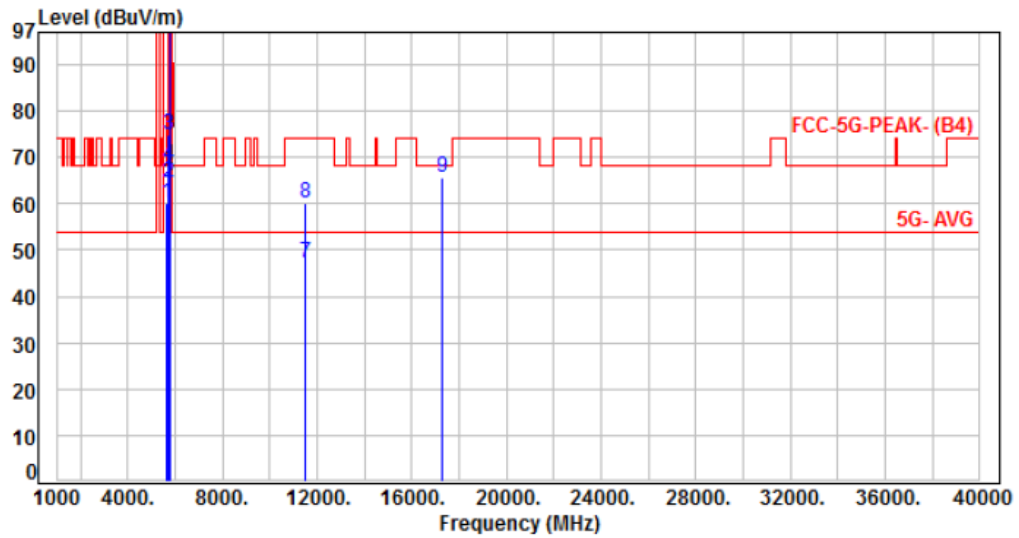


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	52.63	59.98	68.20	-8.22	Peak	137	360	P
2	5700.00	7.37	57.24	64.61	105.20	-40.59	Peak	137	360	P
3	5720.00	7.34	67.42	74.76	110.80	-36.04	Peak	137	360	P
4	5725.00	7.33	61.04	68.37	122.20	-53.83	Peak	137	360	P
5	5755.00	7.30	90.68	97.98	200.00	-102.02	Average	137	360	P
6	5755.00	7.30	106.47	113.77	200.00	-86.23	Peak	137	360	P
7	11510.00	17.79	29.49	47.28	54.00	-6.72	Average	100	279	P
8	11510.00	17.79	42.43	60.22	74.00	-13.78	Peak	100	279	P
9	17265.00	23.86	41.64	65.50	68.20	-2.70	Peak	100	197	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, Band 4, 11ax HE40 CH159		:

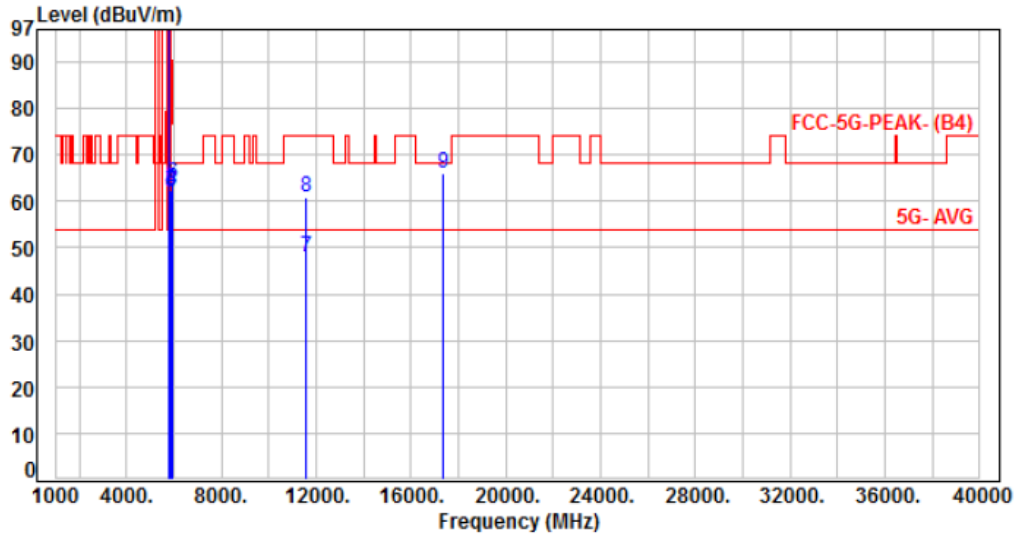


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	94.07	101.46	200.00	-98.54	Average	382	25	P
2	5795.00	7.39	105.91	113.30	200.00	-86.70	Peak	382	25	P
3	5850.00	7.43	54.88	62.31	122.20	-59.89	Peak	382	25	P
4	5855.00	7.45	54.92	62.37	110.80	-48.43	Peak	382	25	P
5	5875.00	7.54	54.52	62.06	105.20	-43.14	Peak	382	25	P
6	5925.00	7.66	56.25	63.91	68.20	-4.29	Peak	382	25	P
7	11590.00	17.95	29.88	47.83	54.00	-6.17	Average	100	128	P
8	11590.00	17.95	42.86	60.81	74.00	-13.19	Peak	100	128	P
9	17385.00	24.58	41.61	66.19	68.20	-2.01	Peak	100	119	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, Band 4, 11ax HE40 CH159		

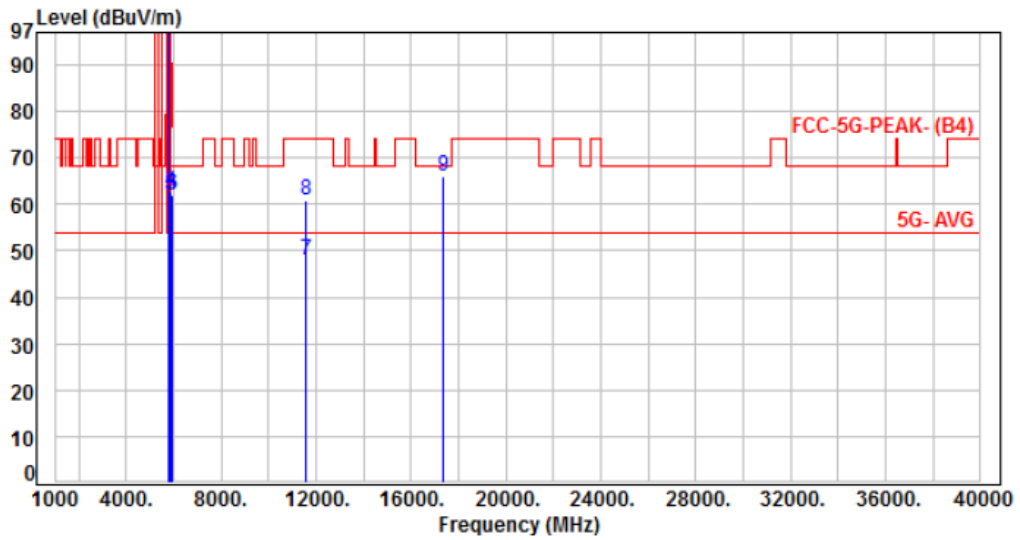


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	90.90	98.29	200.00	-101.71	Average	131	0	P
2	5795.00	7.39	106.17	113.56	200.00	-86.44	Peak	131	0	P
3	5850.00	7.43	54.67	62.10	122.20	-60.10	Peak	131	0	P
4	5855.00	7.45	55.39	62.84	110.80	-47.96	Peak	131	0	P
5	5875.00	7.54	54.51	62.05	105.20	-43.15	Peak	131	0	P
6	5925.00	7.66	54.14	61.80	68.20	-6.40	Peak	131	0	P
7	11590.00	17.95	30.01	47.96	54.00	-6.04	Average	100	217	P
8	11590.00	17.95	42.89	60.84	74.00	-13.16	Peak	100	217	P
9	17385.00	24.58	41.58	66.16	68.20	-2.04	Peak	100	226	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 1, 11ax HE80 CH42		:

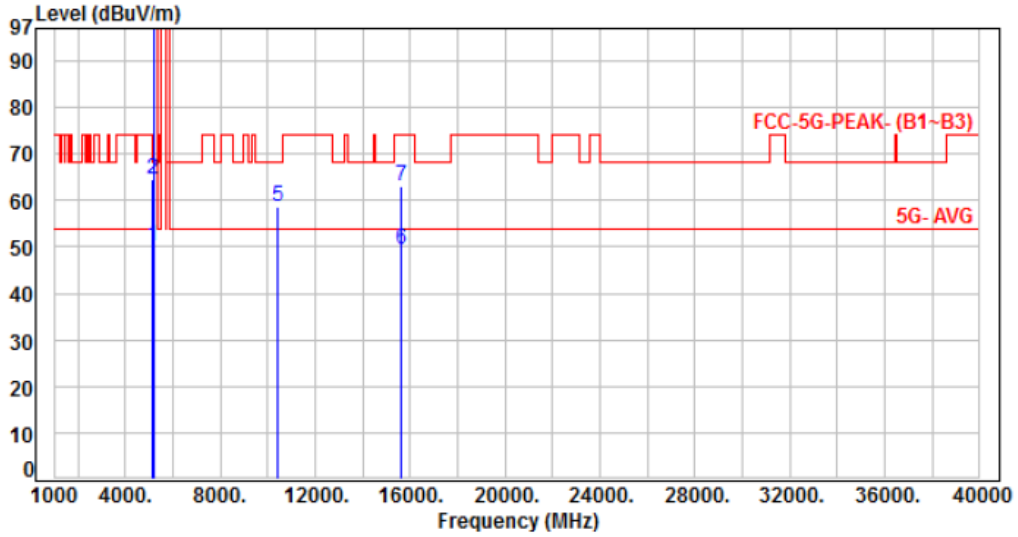


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.44	50.14	54.00	-3.86	Average	146	15	P
2	5150.00	6.70	57.85	64.55	74.00	-9.45	Peak	146	15	P
3	5210.00	6.97	92.18	99.15	200.00	-100.85	Average	146	15	P
4	5210.00	6.97	102.82	109.79	200.00	-90.21	Peak	146	15	P
5	10420.00	15.83	42.65	58.48	68.20	-9.72	Peak	100	163	P
6	15630.00	19.57	29.77	49.34	54.00	-4.66	Average	100	224	P
7	15630.00	19.57	43.44	63.01	74.00	-10.99	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 1, 11ax HE80 CH42		

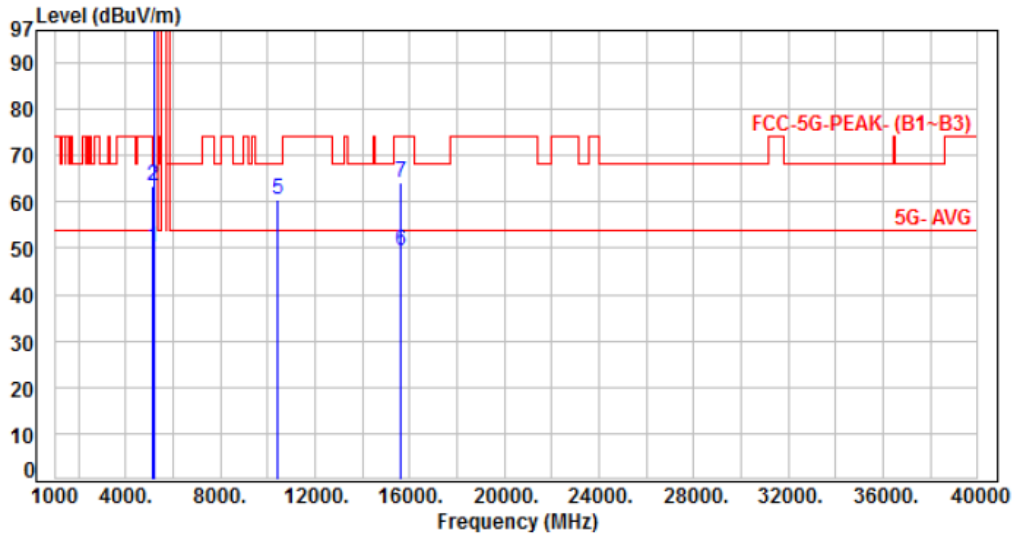


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.40	50.10	54.00	-3.90	Average	100	360	P
2	5150.00	6.70	56.77	63.47	74.00	-10.53	Peak	100	360	P
3	5210.00	6.97	90.00	96.97	200.00	-103.03	Average	100	360	P
4	5210.00	6.97	100.02	106.99	200.00	-93.01	Peak	100	360	P
5	10420.00	15.83	44.57	60.40	68.20	-7.80	Peak	100	226	P
6	15630.00	19.57	29.81	49.38	54.00	-4.62	Average	100	331	P
7	15630.00	19.57	44.62	64.19	74.00	-9.81	Peak	100	331	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 14, Band 4, 11ax HE80 CH155		:

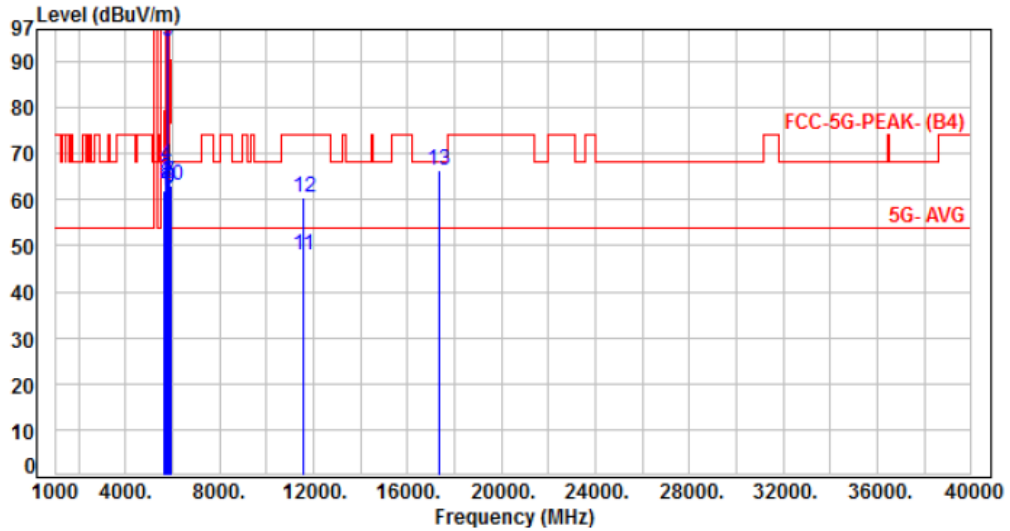


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.65	62.00	68.20	-6.20	Peak	252	22	P
2	5700.00	7.37	56.09	63.46	105.20	-41.74	Peak	252	22	P
3	5720.00	7.34	57.16	64.50	110.80	-46.30	Peak	252	22	P
4	5725.00	7.33	60.04	67.37	122.20	-54.83	Peak	252	22	P
5	5775.00	7.35	87.12	94.47	200.00	-105.53	Average	252	22	P
6	5775.00	7.35	105.31	112.66	200.00	-87.34	Peak	252	22	P
7	5850.00	7.43	56.31	63.74	122.20	-58.46	Peak	252	22	P
8	5855.00	7.45	55.23	62.68	110.80	-48.12	Peak	252	22	P
9	5875.00	7.54	54.85	62.39	105.20	-42.81	Peak	252	22	P
10	5925.00	7.66	55.28	62.94	68.20	-5.26	Peak	252	22	P
11	11550.00	17.88	29.96	47.84	54.00	-6.16	Average	100	138	P
12	11550.00	17.88	42.77	60.65	74.00	-13.35	Peak	100	138	P
13	17325.00	24.29	42.15	66.44	68.20	-1.76	Peak	100	263	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz from PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 14, Band 4, 11ax HE80 CH155		

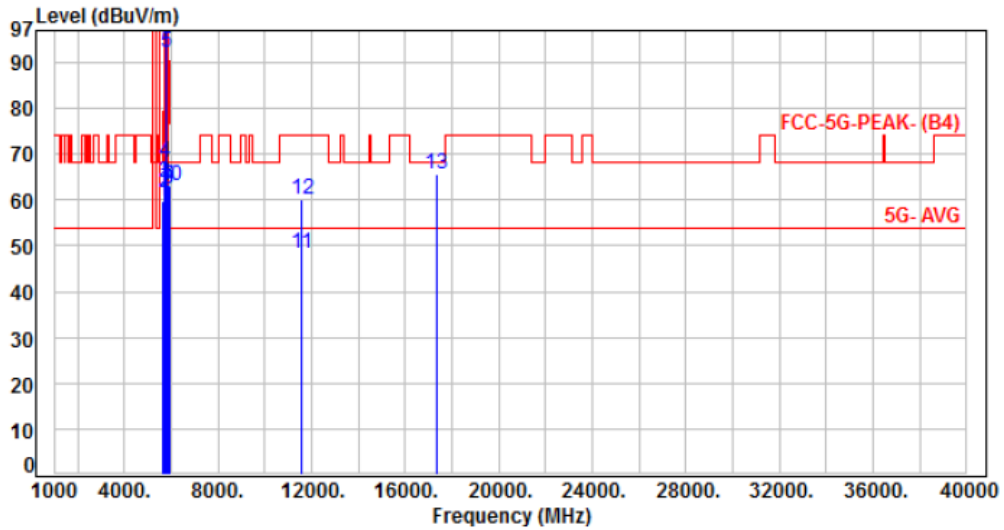

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	52.33	59.68	68.20	-8.52	Peak	232	360	P
2	5700.00	7.37	54.29	61.66	105.20	-43.54	Peak	232	360	P
3	5720.00	7.34	56.62	63.96	110.80	-46.84	Peak	232	360	P
4	5725.00	7.33	60.80	68.13	122.20	-54.07	Peak	232	360	P
5	5775.00	7.35	84.70	92.05	200.00	-107.95	Average	232	360	P
6	5775.00	7.35	101.72	109.07	200.00	-90.93	Peak	232	360	P
7	5850.00	7.43	55.78	63.21	122.20	-58.99	Peak	232	360	P
8	5855.00	7.45	55.01	62.46	110.80	-48.34	Peak	232	360	P
9	5875.00	7.54	54.91	62.45	105.20	-42.75	Peak	232	360	P
10	5925.00	7.66	55.35	63.01	68.20	-5.19	Peak	232	360	P
11	11550.00	17.88	30.25	48.13	54.00	-5.87	Average	100	196	P
12	11550.00	17.88	42.37	60.25	74.00	-13.75	Peak	100	196	P
13	17325.00	24.29	41.19	65.48	68.20	-2.72	Peak	100	223	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz