




Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 7 Straddle Channel, CH183		:

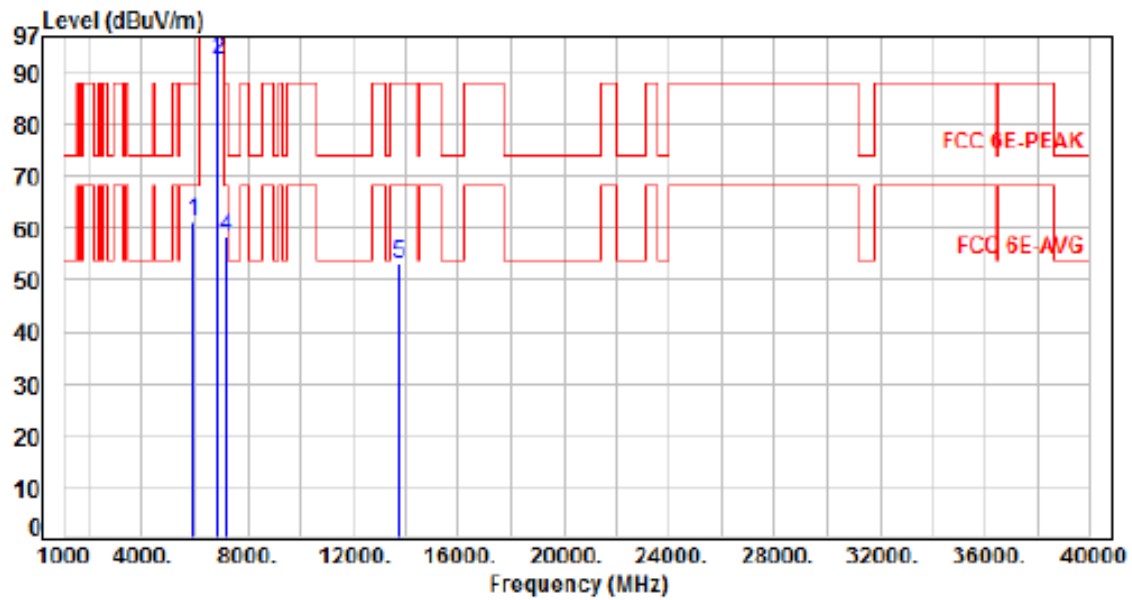


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.46	61.31	88.20	-26.89	Peak	255	307	P
2	6865.00	8.38	84.03	92.41	200.00	-107.59	Average	255	307	P
3	6865.00	8.38	96.39	104.77	200.00	-95.23	Peak	255	307	P
4	7135.00	8.91	49.51	58.42	88.20	-29.78	Peak	255	307	P
5	13730.00	19.29	33.81	53.10	88.20	-35.10	Peak	100	288	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 7 Straddle Channel, CH175		:

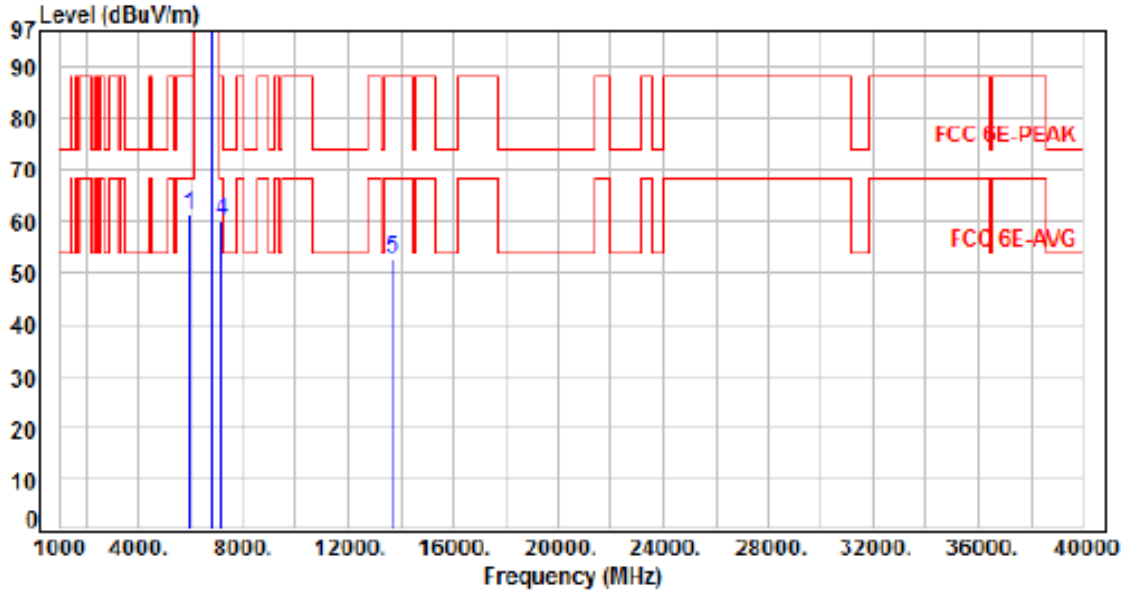


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.47	61.32	88.20	-26.88	Peak	100	360	P
2	6825.00	8.32	87.48	95.80	200.00	-104.20	Average	100	360	P
3	6825.00	8.32	100.02	108.34	200.00	-91.66	Peak	100	360	P
4	7135.00	8.91	51.11	60.02	88.20	-28.18	Peak	100	360	P
5	13650.00	19.06	33.80	52.86	88.20	-35.34	Peak	100	217	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 7 Straddle Channel, CH175		:

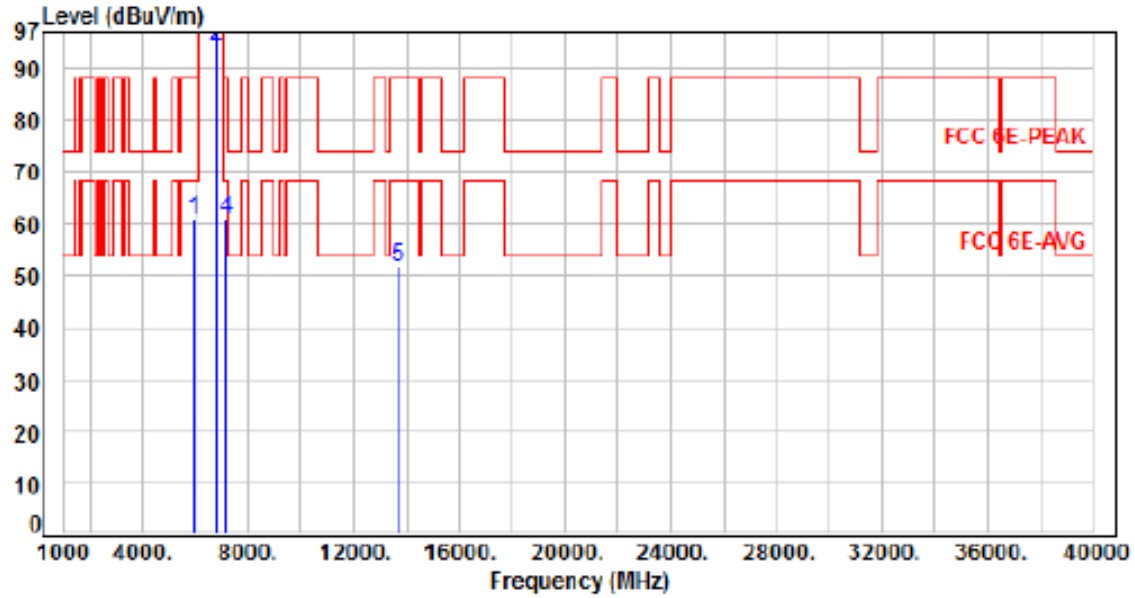


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.10	60.95	88.20	-27.25	Peak	254	302	P
2	6825.00	8.32	86.00	94.32	200.00	-105.68	Average	254	302	P
3	6825.00	8.32	98.52	106.84	200.00	-93.16	Peak	254	302	P
4	7135.00	8.91	51.98	60.89	88.20	-27.31	Peak	254	302	P
5	13650.00	19.06	32.70	51.76	88.20	-36.44	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 8, CH189		:

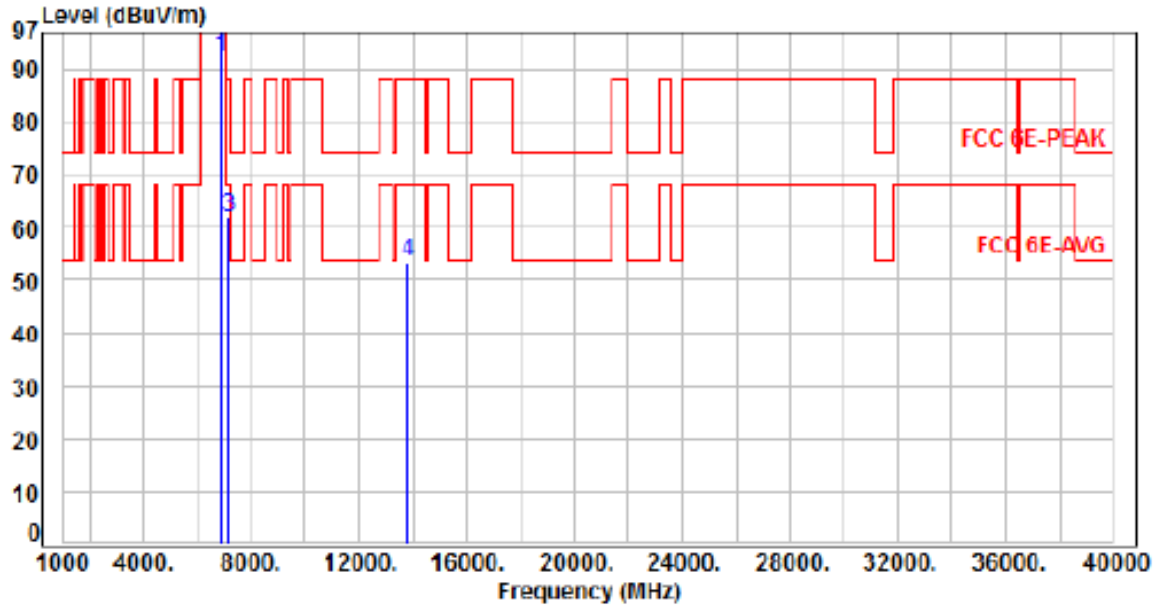


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	8.44	83.64	92.08	200.00	-107.92	Average	100	27	P
2	6895.00	8.44	96.97	105.41	200.00	-94.59	Peak	100	27	P
3	7135.00	8.91	53.16	62.07	88.20	-26.13	Peak	100	27	P
4	13790.00	19.31	34.30	53.61	88.20	-34.59	Peak	100	157	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 8, CH189		

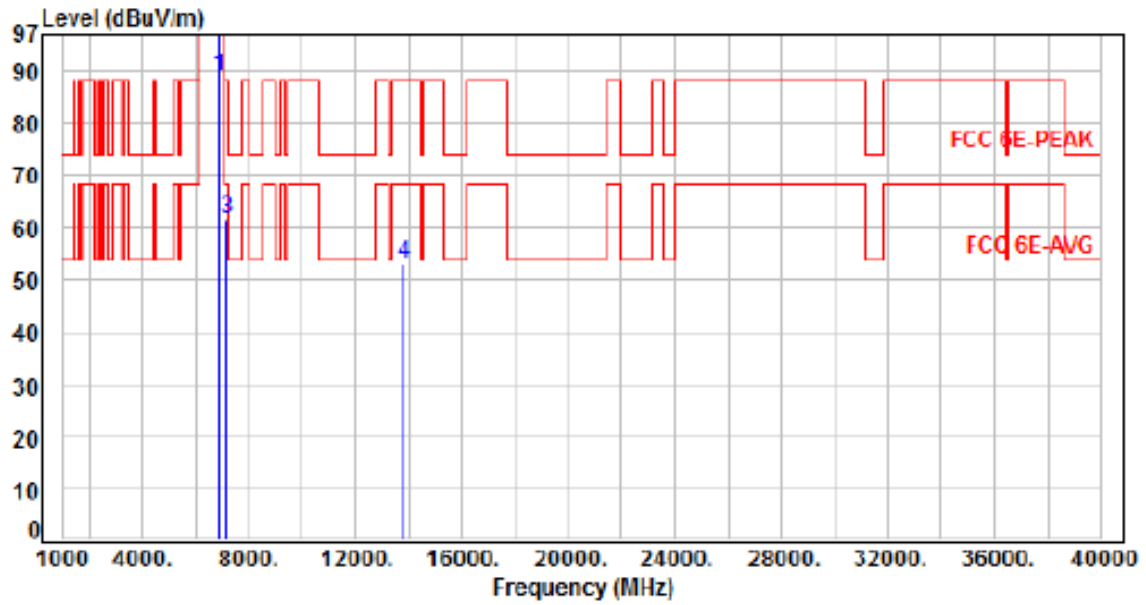


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	8.44	80.33	88.77	200.00	-111.23	Average	100	54	P
2	6895.00	8.44	93.83	102.27	200.00	-97.73	Peak	100	54	P
3	7135.00	8.91	52.71	61.62	88.20	-26.58	Peak	100	54	P
4	13790.00	19.31	33.62	52.93	88.20	-35.27	Peak	100	91	P

Note: Level=Reading+Factor
Margin=Level-limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 8, CH213		:

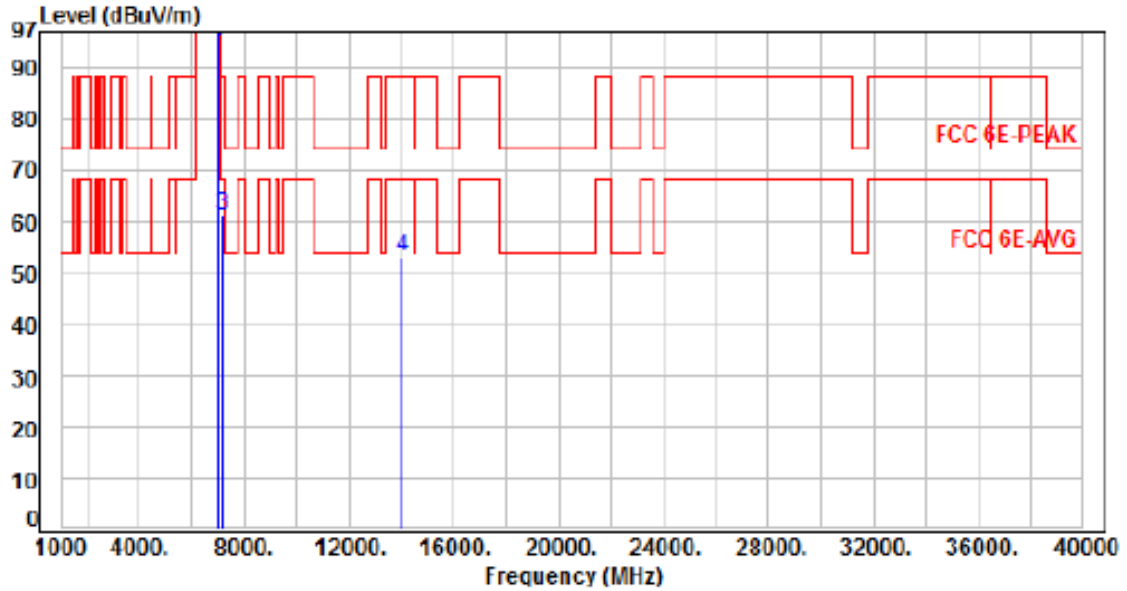

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	8.61	86.44	95.05	200.00	-104.95	Average	100	333	P
2	7015.00	8.61	100.44	109.05	200.00	-90.95	Peak	100	333	P
3	7135.00	8.91	52.36	61.27	88.20	-26.93	Peak	100	333	P
4	14030.00	19.99	32.96	52.95	88.20	-35.25	Peak	100	219	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, Band 8, CH213		:	

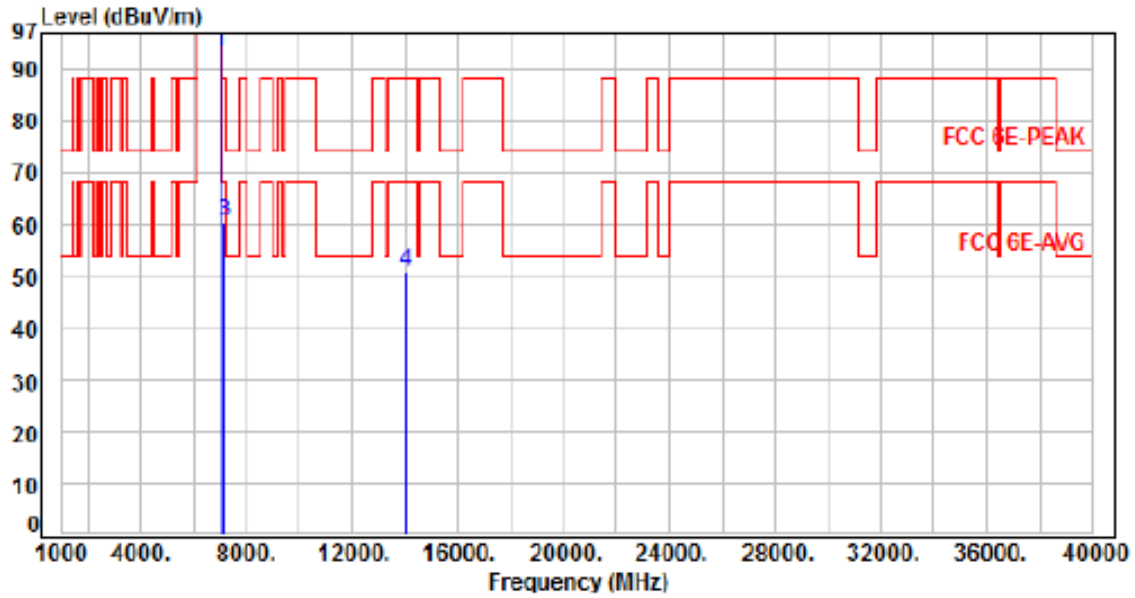


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	8.61	84.54	93.15	200.00	-106.85	Average	215	56	P
2	7015.00	8.61	98.27	106.88	200.00	-93.12	Peak	215	56	P
3	7135.00	8.91	51.46	60.37	88.20	-27.83	Peak	215	56	P
4	14030.00	19.99	30.78	50.77	88.20	-37.43	Peak	100	261	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 8, CH229		:

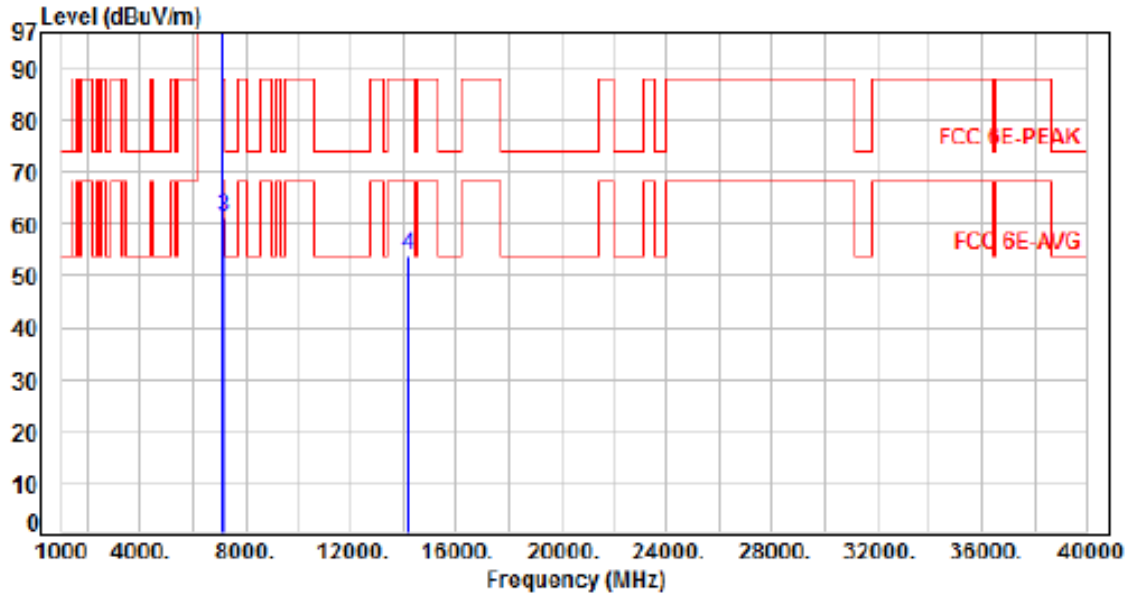


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	8.73	87.26	95.99	200.00	-104.01	Average	100	10	P
2	7095.00	8.73	100.77	109.50	200.00	-90.50	Peak	100	10	P
3	7135.00	6.91	52.50	61.41	88.20	-26.79	Peak	100	10	P
4	14190.00	20.23	33.51	53.74	88.20	-34.46	Peak	100	51	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, Band 8, CH229		:	

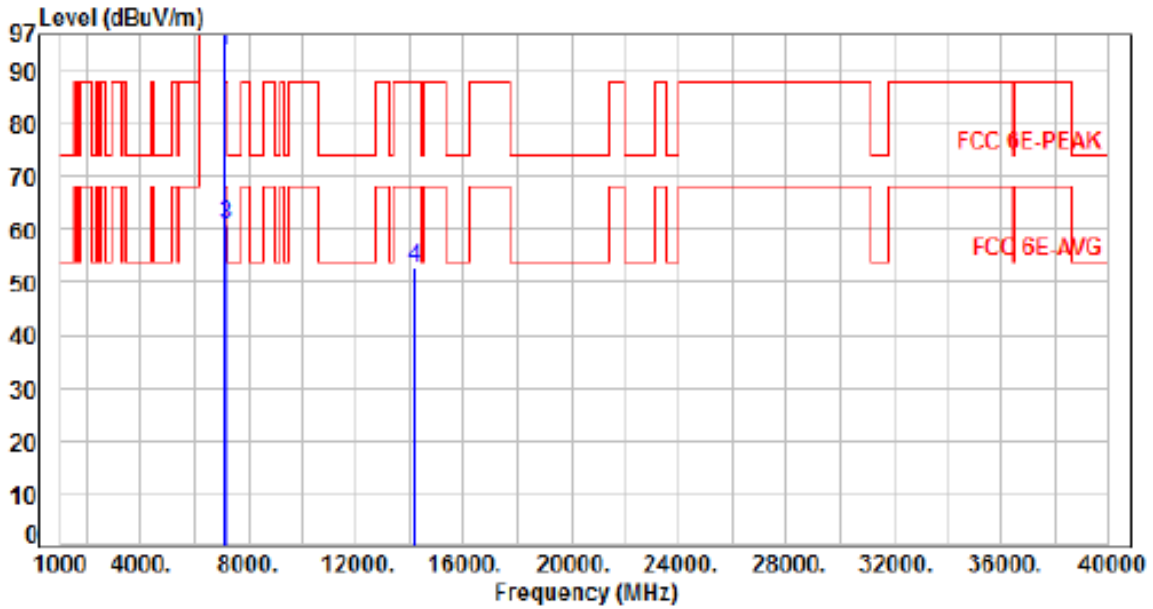


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	8.73	85.43	94.16	200.00	-105.84	Average	216	57	P
2	7095.00	8.73	98.94	107.67	200.00	-92.33	Peak	216	57	P
3	7135.00	8.91	51.99	60.90	88.20	-27.30	Peak	216	57	P
4	14190.00	20.23	32.40	52.63	88.20	-35.57	Peak	100	91	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, Band 8, CH233		:	

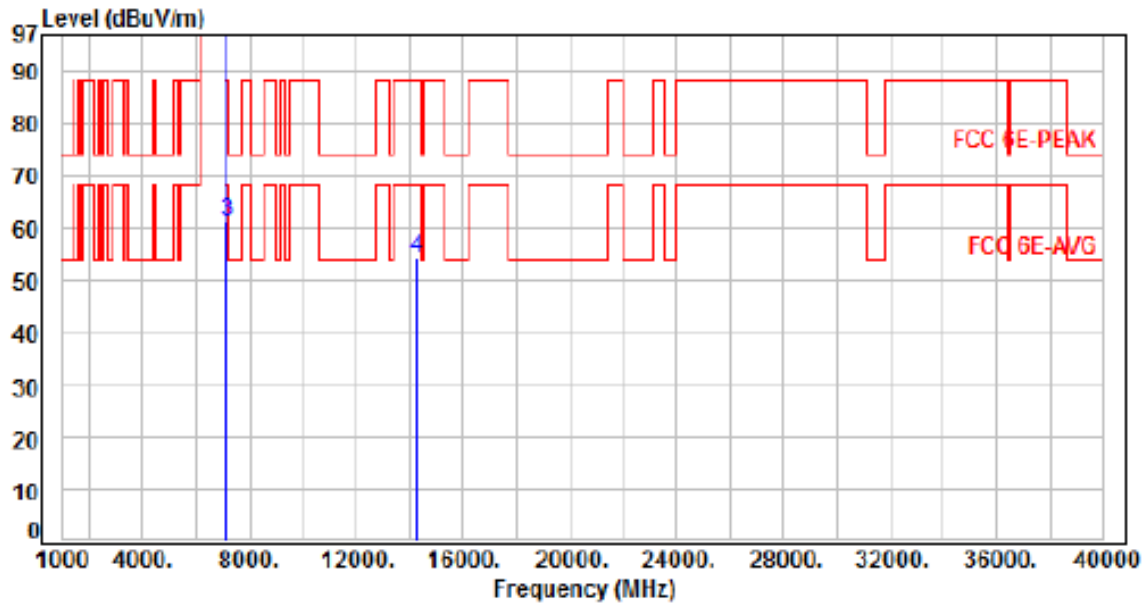


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	8.82	90.29	99.11	200.00	-100.89	Average	100	333	P
2	7115.00	8.82	103.81	112.63	200.00	-87.37	Peak	100	333	P
3	7135.00	8.91	52.17	61.08	88.20	-27.12	Peak	100	333	P
4	14230.00	20.26	33.81	54.07	88.20	-34.13	Peak	100	240	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 8, CH233		

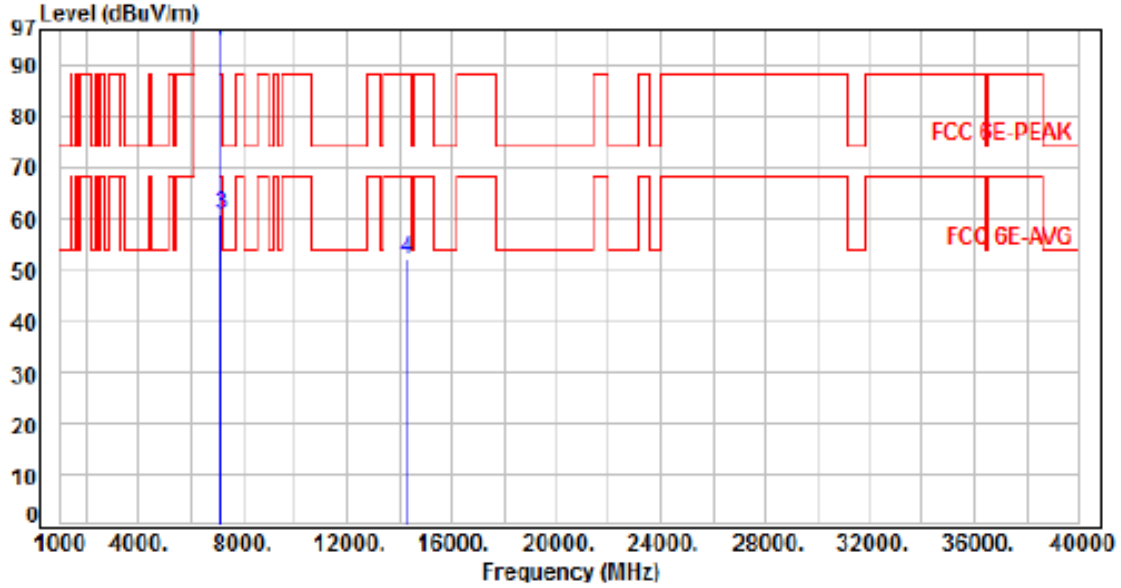


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	8.82	85.13	94.95	200.00	-105.05	Average	100	59	P
2	7115.00	8.82	99.44	108.26	200.00	-91.74	Peak	100	59	P
3	7135.00	8.91	51.99	60.90	88.20	-27.30	Peak	100	59	P
4	14230.00	20.26	31.81	52.07	88.20	-36.13	Peak	100	91	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 8, CH195		:

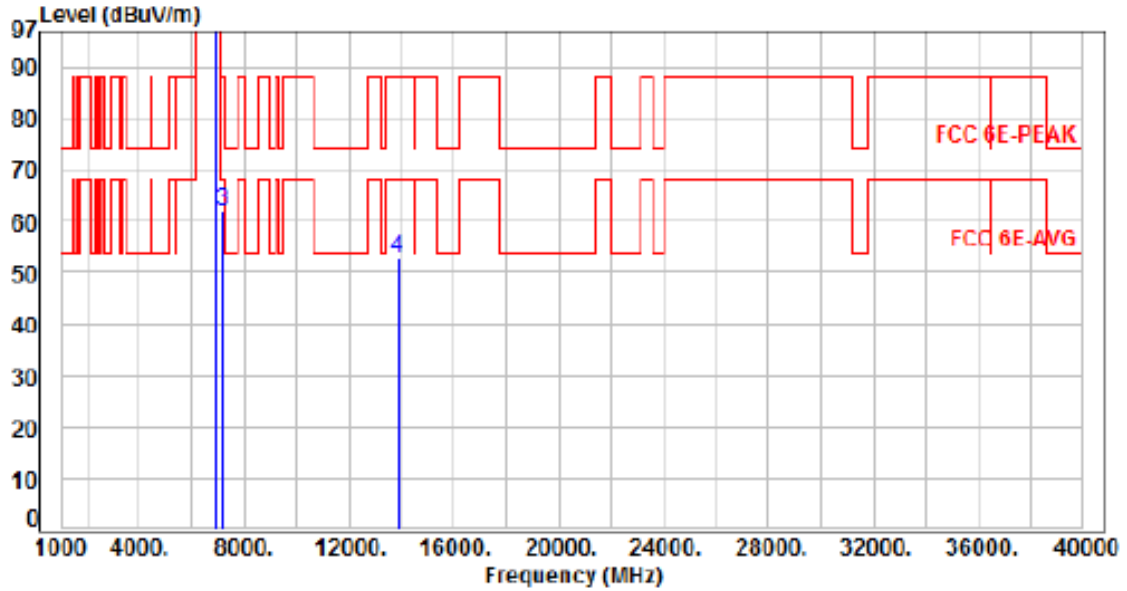


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	8.51	86.95	95.46	200.00	-104.54	Average	116	332	P
2	6925.00	8.51	99.89	108.40	200.00	-91.60	Peak	116	332	P
3	7135.00	8.91	52.97	61.88	88.20	-26.32	Peak	116	332	P
4	13850.00	19.48	33.40	52.88	88.20	-35.32	Peak	100	278	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 8, CH195		

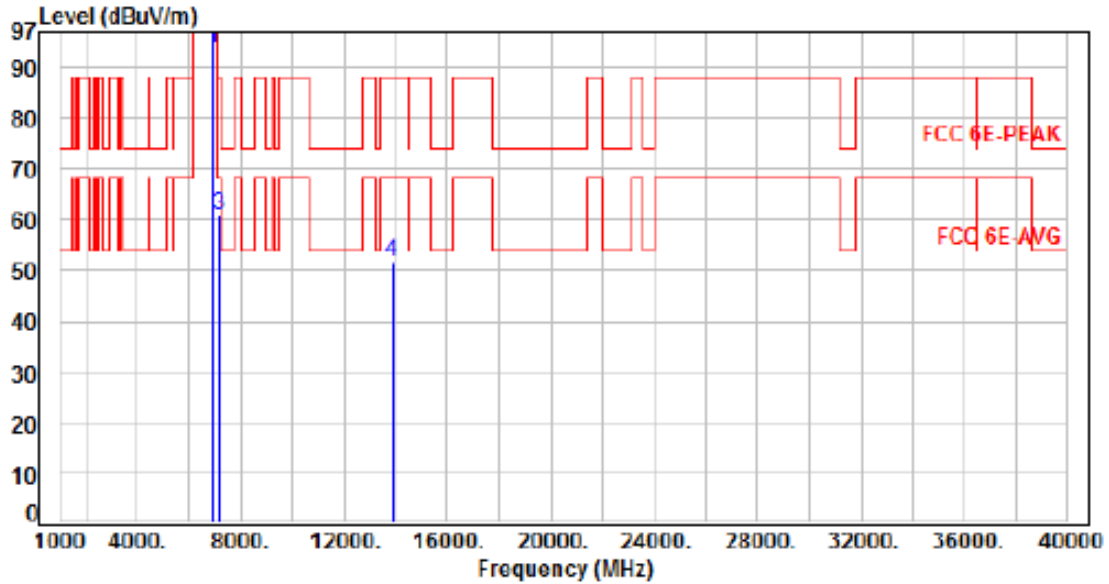


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	8.51	85.33	93.84	200.00	-106.16	Average	241	60	P
2	6925.00	8.51	97.25	105.76	200.00	-94.24	Peak	241	60	P
3	7135.00	8.91	52.01	60.92	88.20	-27.28	Peak	241	60	P
4	13850.00	19.48	32.18	51.66	88.20	-36.54	Peak	100	91	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 8, CH211		:

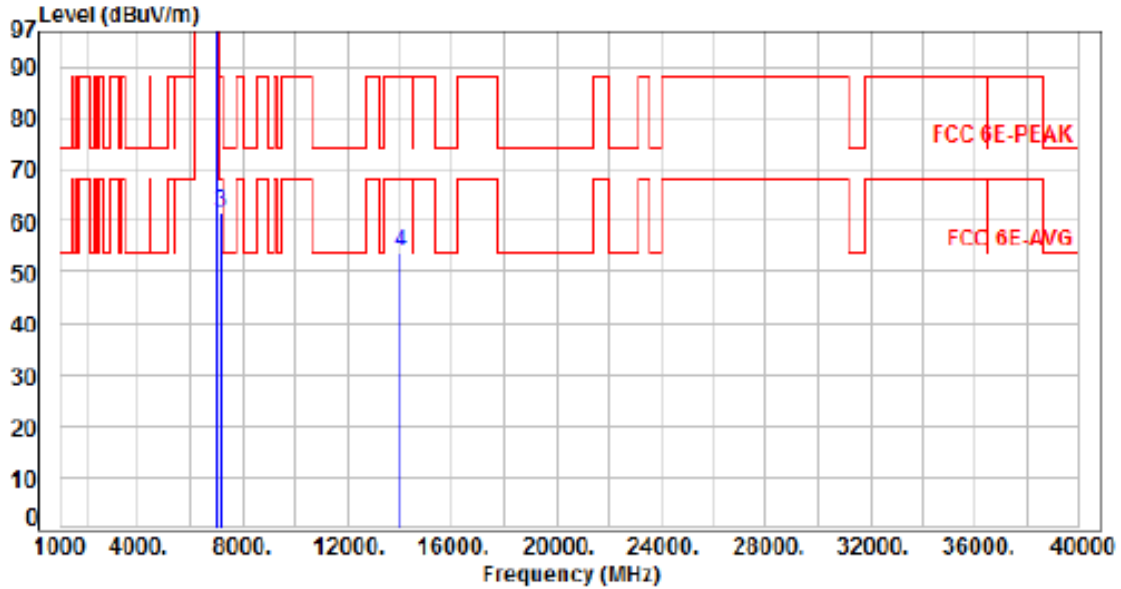

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	8.60	90.01	98.61	200.00	-101.39	Average	100	336	P
2	7005.00	8.60	103.04	111.64	200.00	-88.36	Peak	100	336	P
3	7135.00	8.91	52.68	61.59	88.20	-26.61	Peak	100	336	P
4	14010.00	19.99	33.79	53.78	88.20	-34.42	Peak	100	321	P

Note: Level-Reading+Factor


Margin-Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 8, CH211		:

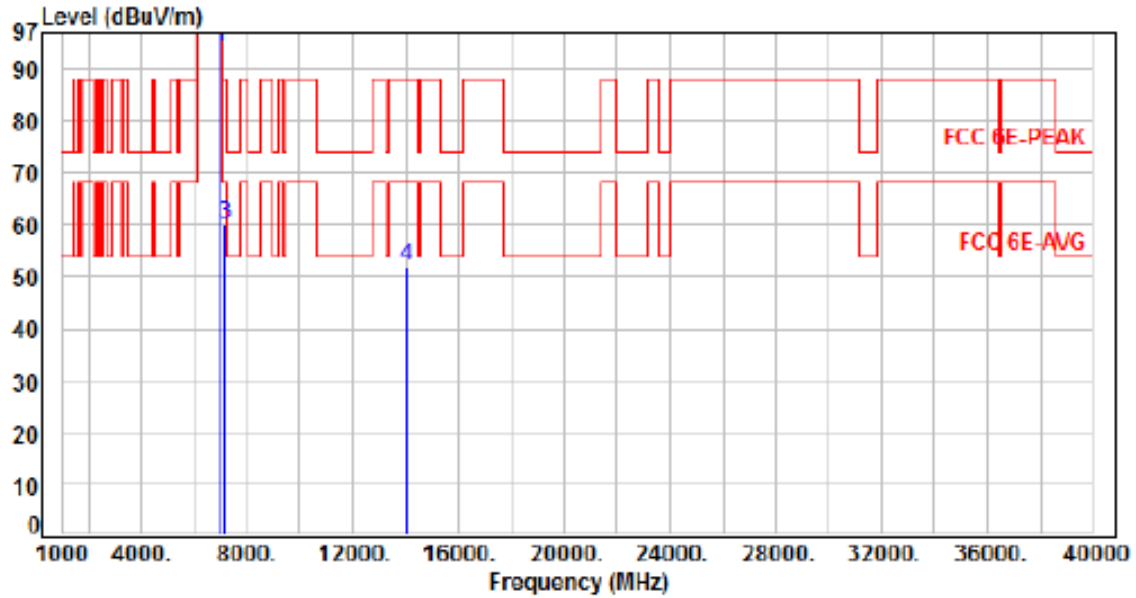


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	8.60	85.88	94.48	200.00	-105.52	Average	250	63	P
2	7005.00	8.60	99.87	108.47	200.00	-91.53	Peak	250	63	P
3	7135.00	8.91	51.09	60.00	88.20	-28.20	Peak	250	63	P
4	14010.00	19.99	32.18	52.17	88.20	-36.03	Peak	100	72	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 8, CH227		:

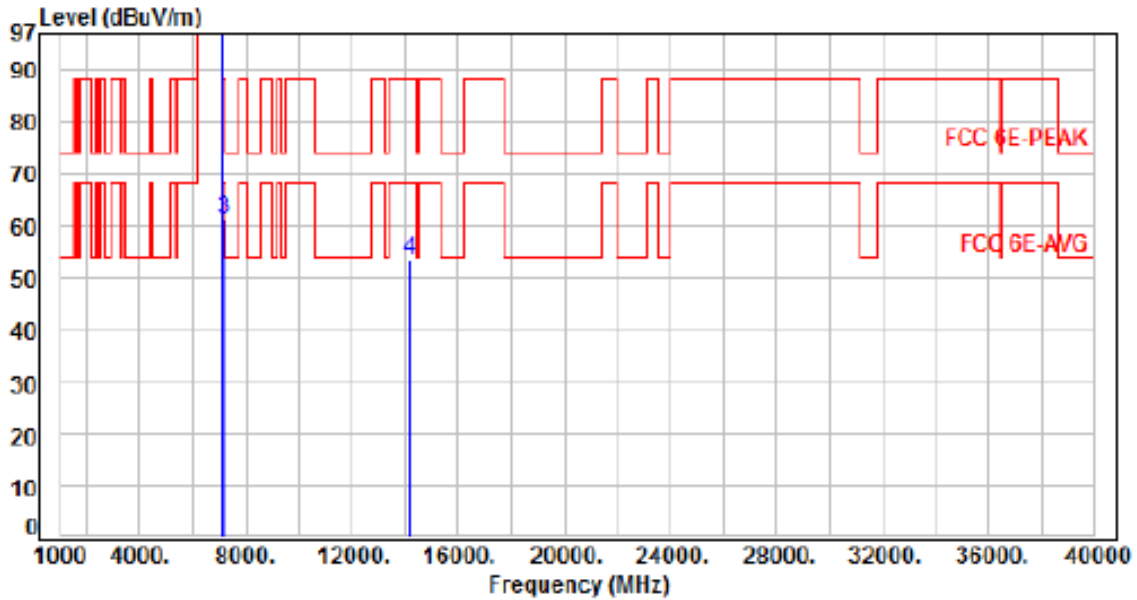

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	8.71	90.20	96.91	200.00	-101.09	Average	100	337	P
2	7085.00	8.71	103.25	111.97	200.00	-88.03	Peak	100	337	P
3	7135.00	8.91	52.20	61.11	88.20	-27.09	Peak	100	337	P
4	14170.00	20.19	33.20	53.39	88.20	-34.81	Peak	100	267	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 8, CH227		

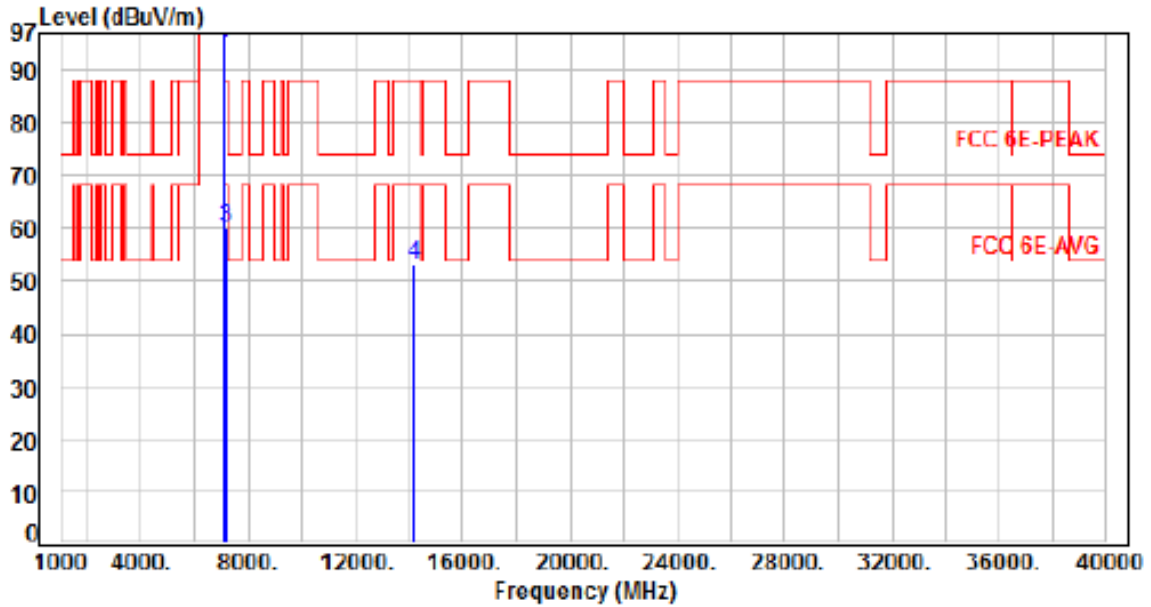


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	8.71	86.34	95.05	200.00	-104.95	Average	101	58	P
2	7085.00	8.71	99.57	108.28	200.00	-91.72	Peak	101	58	P
3	7135.00	8.91	51.20	60.11	88.20	-28.09	Peak	101	58	P
4	14170.00	20.19	32.80	52.99	88.20	-35.21	Peak	100	98	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 8, CH199		:

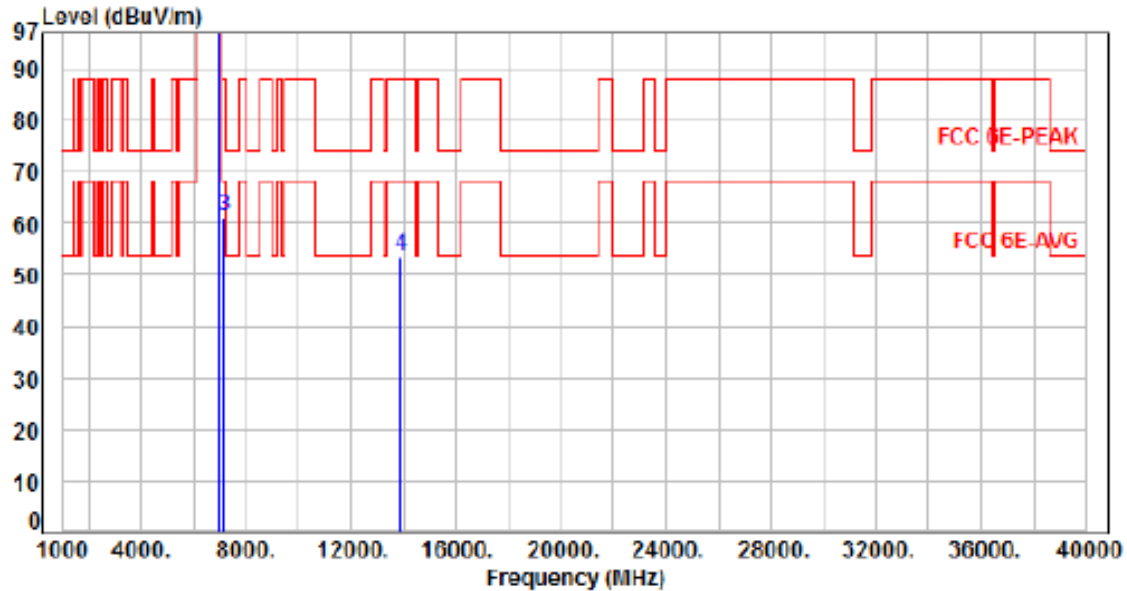

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	8.57	87.63	96.20	200.00	-103.80	Average	100	336	P
2	6945.00	8.57	100.52	109.09	200.00	-90.91	Peak	100	336	P
3	7135.00	8.91	52.38	61.29	88.20	-26.91	Peak	100	336	P
4	13890.00	19.61	33.90	53.51	88.20	-34.69	Peak	100	312	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 8, CH199		

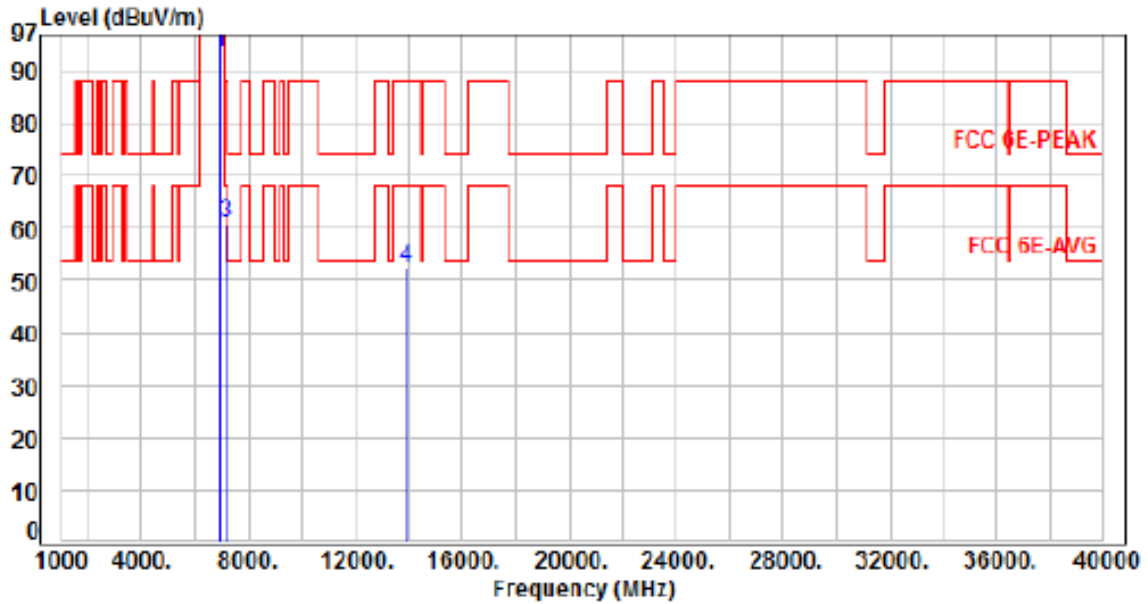


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	8.57	84.94	93.51	200.00	-106.49	Average	250	66	P
2	6945.00	8.57	98.29	106.86	200.00	-93.14	Peak	250	66	P
3	7135.00	8.91	51.82	60.73	88.20	-27.47	Peak	250	66	P
4	13890.00	19.61	32.80	52.41	88.20	-35.79	Peak	100	121	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 8, CH215		:

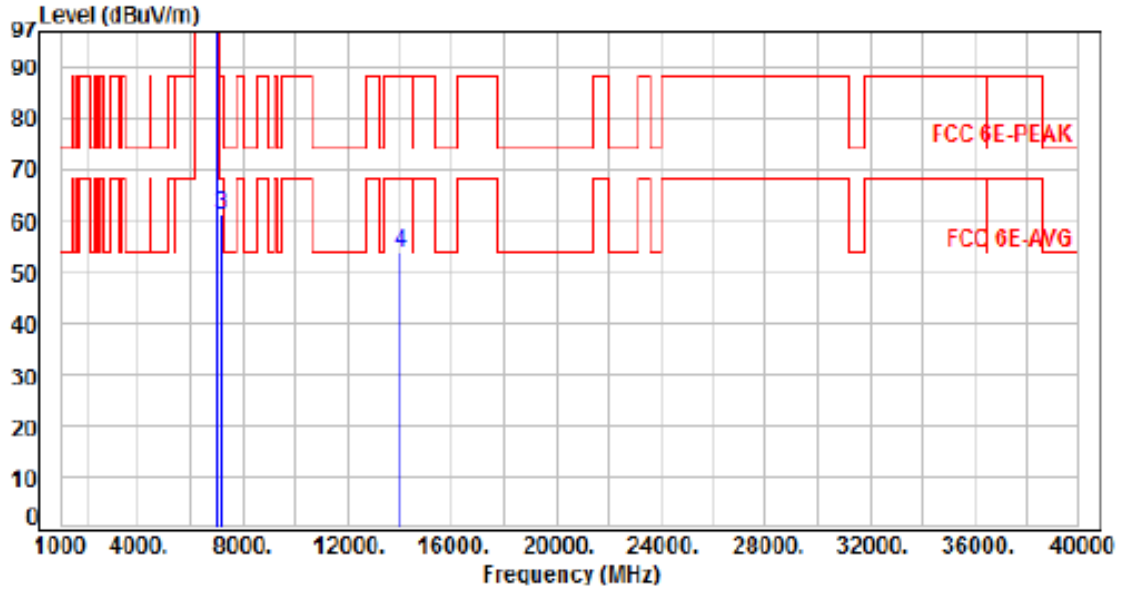


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	8.62	90.05	98.67	200.00	-101.33	Average	108	336	P
2	7025.00	8.62	102.40	111.02	200.00	-88.98	Peak	108	336	P
3	7135.00	8.91	52.21	61.12	88.20	-27.08	Peak	108	336	P
4	14050.00	20.00	34.03	54.03	88.20	-34.17	Peak	100	309	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 8, CH215		

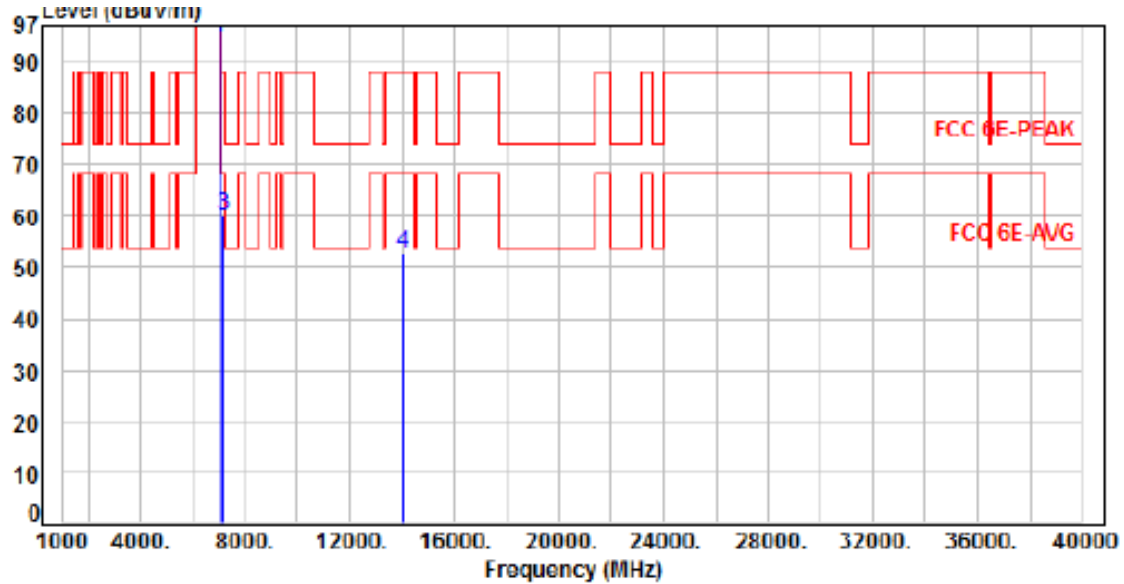


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	8.62	86.30	94.92	200.00	-105.08	Average	244	66	P
2	7025.00	8.62	99.02	107.64	200.00	-92.36	Peak	244	66	P
3	7135.00	8.91	51.31	60.22	88.20	-27.98	Peak	244	66	P
4	14050.00	20.00	32.91	52.91	88.20	-35.29	Peak	100	81	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 8, CH207		:

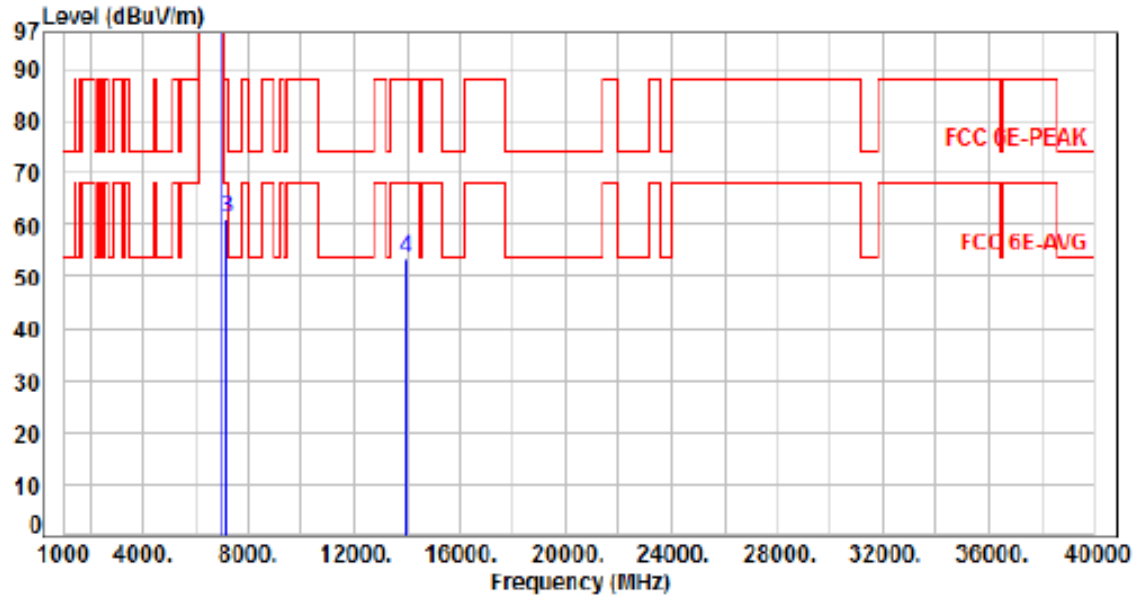


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	8.59	90.11	98.70	200.00	-101.30	Average	100	337	P
2	6985.00	8.59	99.72	108.31	200.00	-91.69	Peak	100	337	P
3	7135.00	8.91	52.42	61.33	88.20	-26.87	Peak	100	337	P
4	13970.00	19.88	33.50	53.38	88.20	-34.82	Peak	100	351	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Non BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, Band 8, CH207		:	

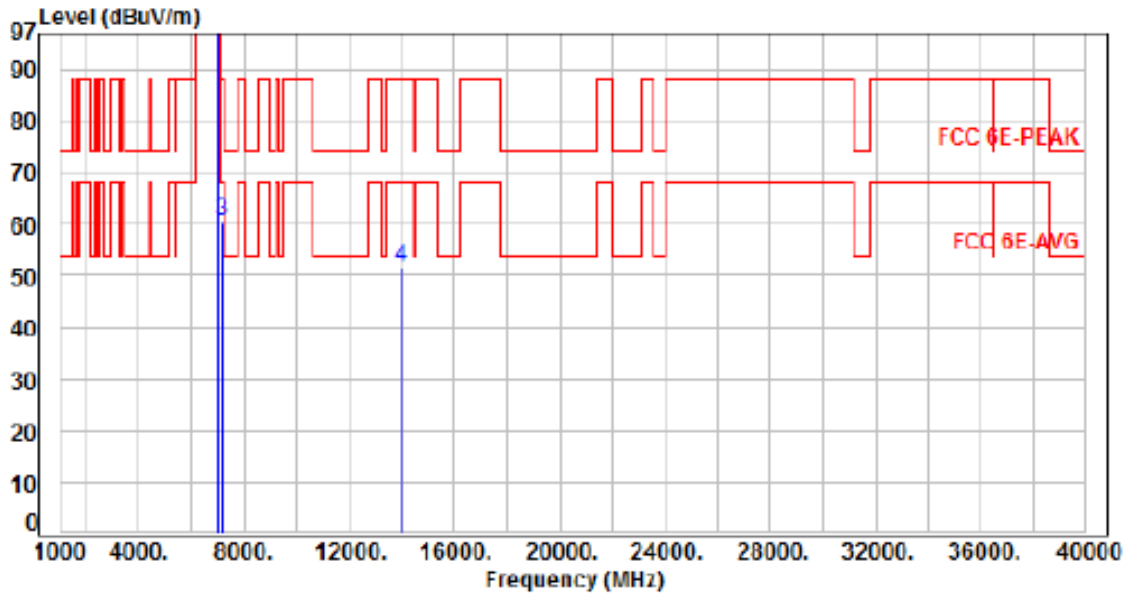


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	8.59	87.45	96.04	200.00	-103.96	Average	249	69	P
2	6985.00	8.59	97.59	106.18	200.00	-93.82	Peak	249	69	P
3	7135.00	8.91	51.60	60.51	88.20	-27.69	Peak	249	69	P
4	13970.00	19.88	31.93	51.81	88.20	-36.39	Peak	100	28	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 5, CH33		:

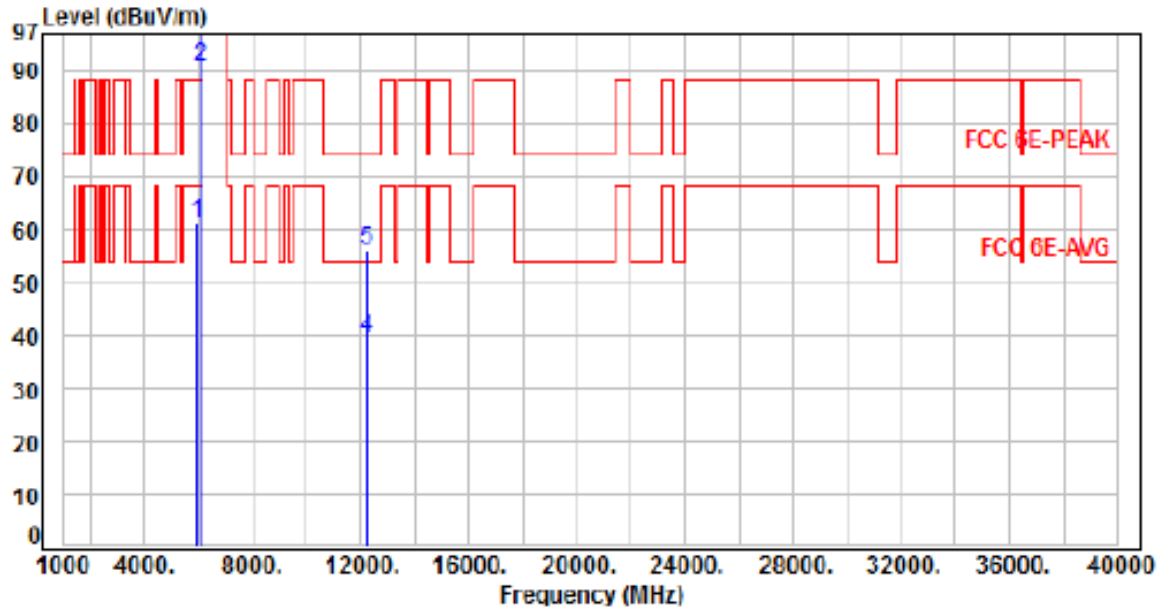


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.48	61.33	88.20	-26.87	Peak	282	16	P
2	6115.00	7.13	83.56	90.69	200.00	-109.31	Average	282	16	P
3	6115.00	7.13	97.89	105.02	200.00	-94.98	Peak	282	16	P
4	12230.00	14.85	24.47	39.32	54.00	-14.68	Average	100	66	P
5	12230.00	14.85	41.30	56.15	74.00	-17.85	Peak	100	66	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 5, CH33		

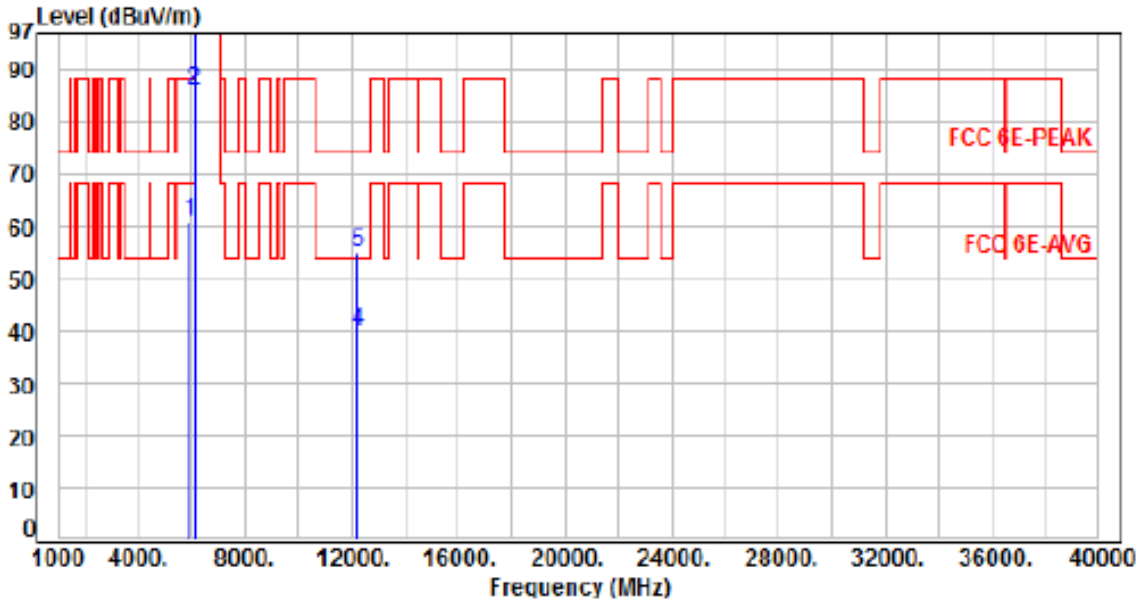


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.19	61.04	88.20	-27.16	Peak	377	311	P
2	6115.00	7.13	78.64	85.77	200.00	-114.23	Average	377	311	P
3	6115.00	7.13	92.73	99.86	200.00	-100.14	Peak	377	311	P
4	12230.00	14.85	24.91	39.76	54.00	-14.24	Average	100	145	P
5	12230.00	14.85	40.22	55.07	74.00	-18.93	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 5, CH61		:

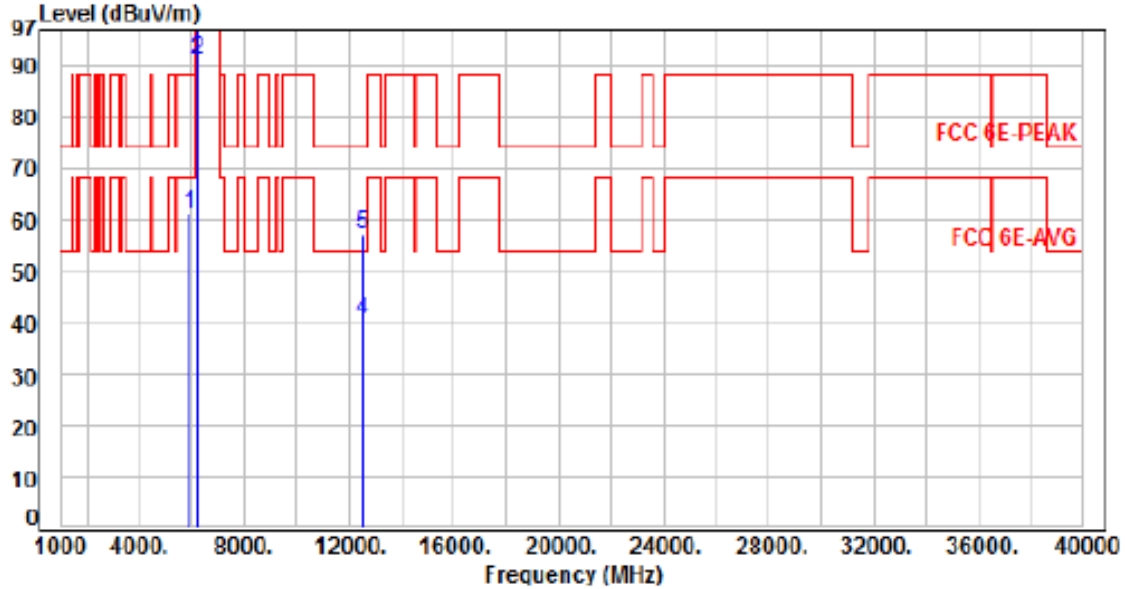


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.47	61.32	88.20	-26.88	Peak	276	26	P
2	6255.00	7.45	83.62	91.07	200.00	-108.93	Average	276	26	P
3	6255.00	7.45	97.98	105.43	200.00	-94.57	Peak	276	26	P
4	12510.00	15.13	25.59	40.72	54.00	-13.28	Average	100	148	P
5	12510.00	15.13	41.90	57.03	74.00	-16.97	Peak	100	148	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 5, CH61		

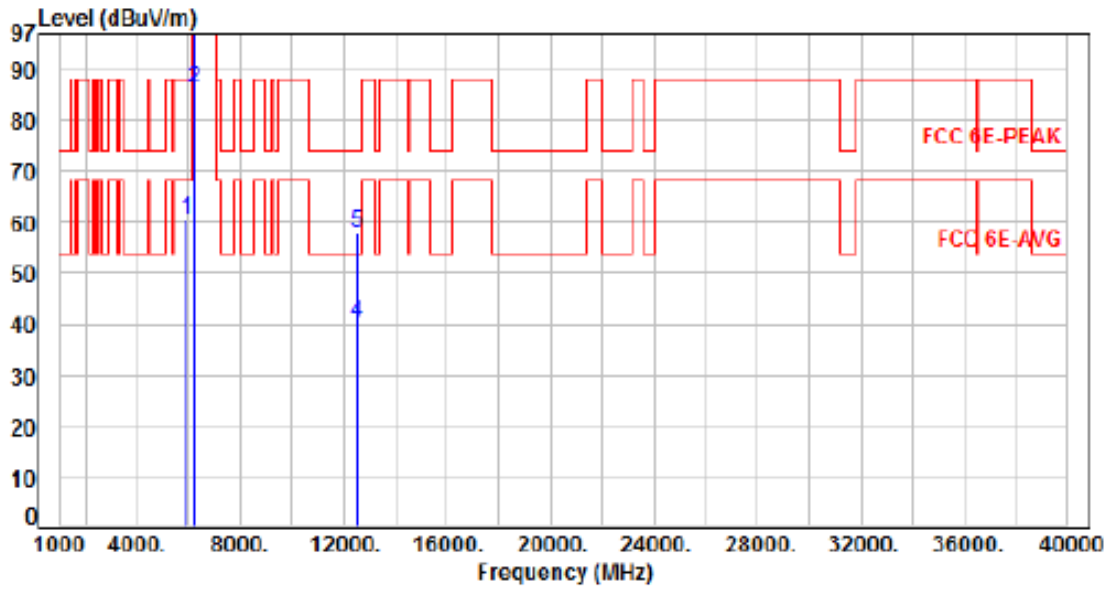


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.67	60.52	88.20	-27.68	Peak	375	304	P
2	6255.00	7.45	78.78	86.23	200.00	-113.77	Average	375	304	P
3	6255.00	7.45	93.27	100.72	200.00	-99.28	Peak	375	304	P
4	12510.00	15.13	24.98	40.11	54.00	-13.89	Average	100	69	P
5	12510.00	15.13	42.72	57.85	74.00	-16.15	Peak	100	69	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 5, CH93		:

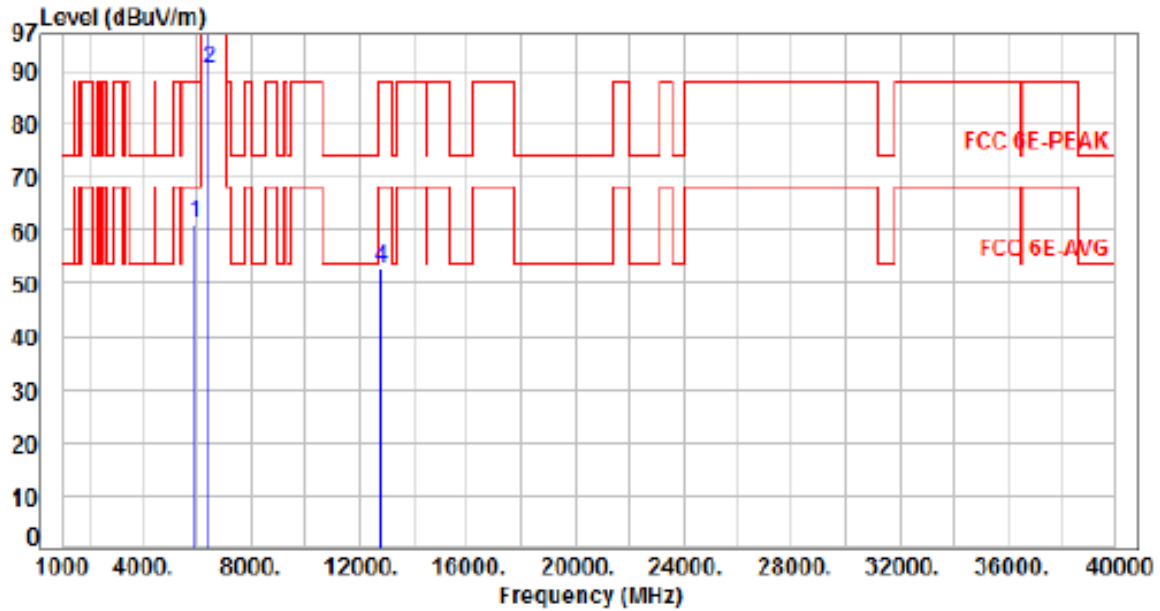


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.30	61.15	88.20	-27.05	Peak	287	9	P
2	6415.00	7.28	82.97	90.25	200.00	-109.75	Average	287	9	P
3	6415.00	7.28	97.21	104.49	200.00	-95.51	Peak	287	9	P
4	12830.00	16.10	36.71	52.81	88.20	-35.39	Peak	100	54	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 5, CH93		

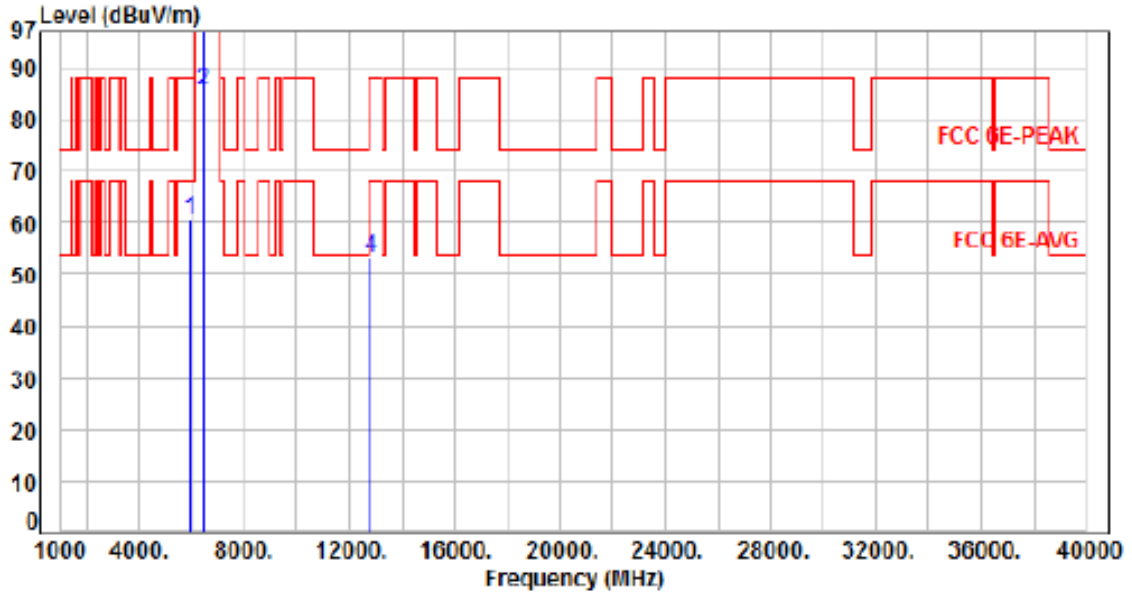


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.49	60.34	88.20	-27.86	Peak	382	310	P
2	6415.00	7.28	78.22	85.50	200.00	-114.50	Average	382	310	P
3	6415.00	7.28	92.68	99.96	200.00	-100.04	Peak	382	310	P
4	12830.00	16.10	37.12	53.22	88.20	-34.98	Peak	100	11	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 5, CH35		:

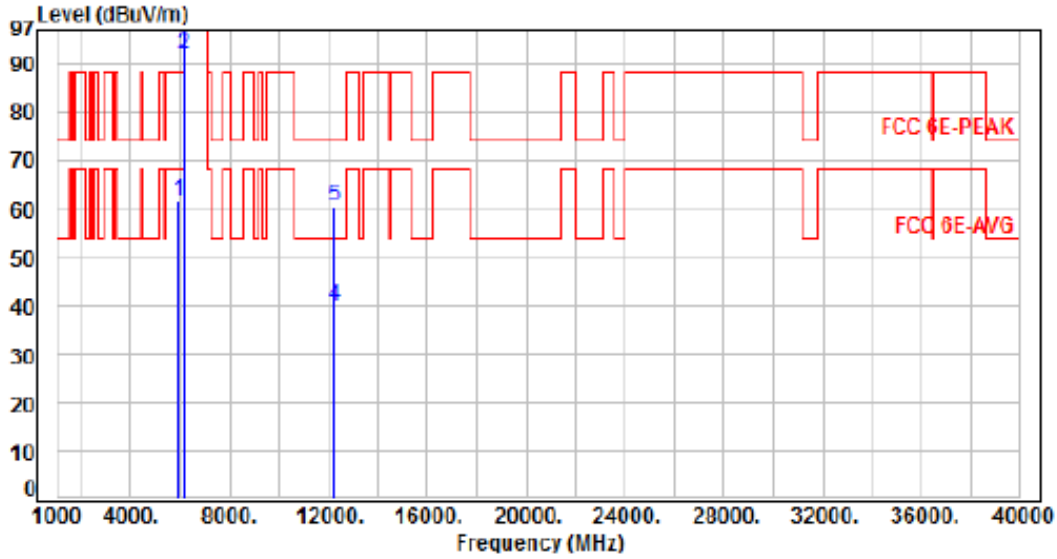


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.57	61.42	88.20	-26.78	Peak	100	10	P
2	6125.00	7.18	84.63	91.81	200.00	-108.19	Average	100	10	P
3	6125.00	7.18	97.84	105.02	200.00	-94.98	Peak	100	10	P
4	12250.00	14.86	24.87	39.73	54.00	-14.27	Average	100	330	P
5	12250.00	14.86	45.55	60.41	74.00	-13.59	Peak	100	330	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 6, Band 5, CH35		:	

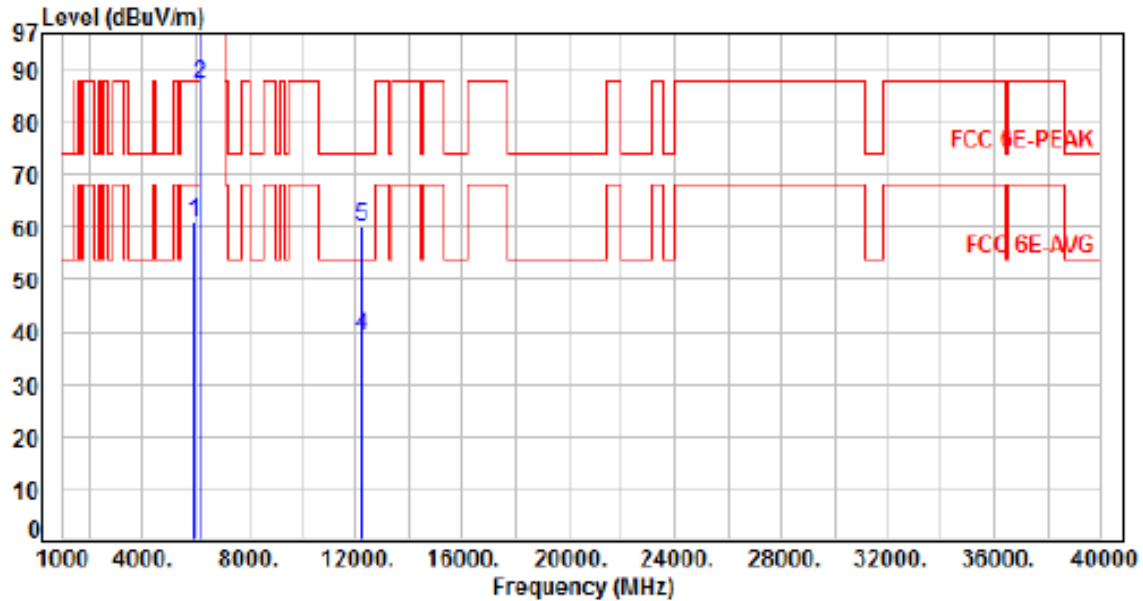


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.06	60.91	88.20	-27.29	Peak	374	300	P
2	6125.00	7.18	80.18	87.36	200.00	-112.64	Average	374	300	P
3	6125.00	7.18	93.67	100.85	200.00	-99.15	Peak	374	300	P
4	12250.00	14.86	24.41	39.27	54.00	-14.73	Average	100	99	P
5	12250.00	14.86	45.21	60.07	74.00	-13.93	Peak	100	99	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 5, CH59		:

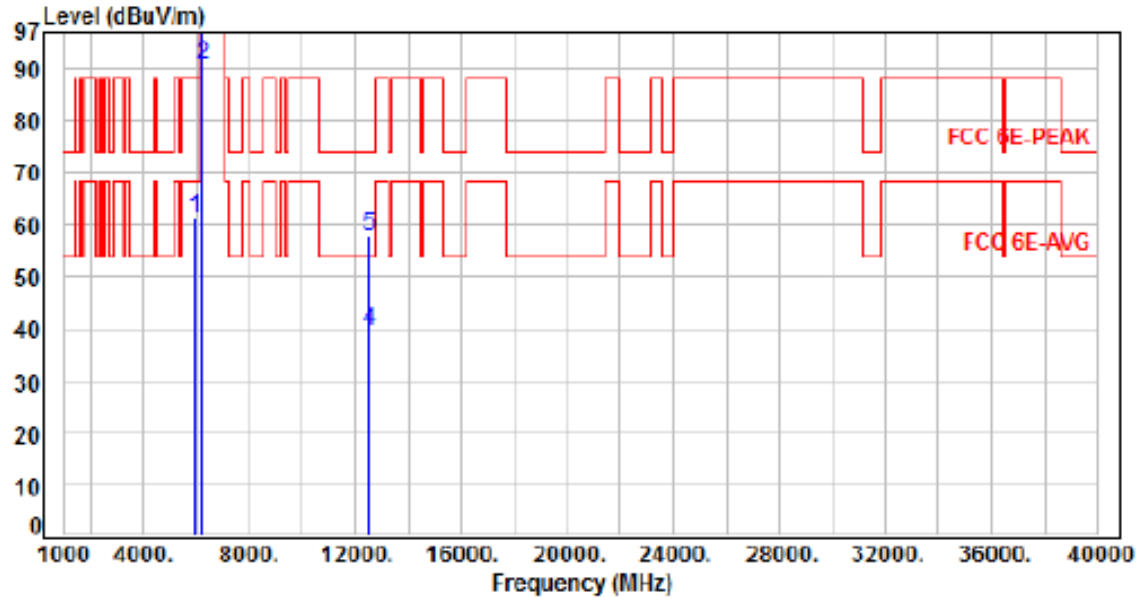


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.48	61.33	88.20	-26.87	Peak	100	17	P
2	6245.00	7.44	83.19	90.63	200.00	-109.37	Average	100	17	P
3	6245.00	7.44	96.83	104.27	200.00	-95.73	Peak	100	17	P
4	12490.00	15.11	24.39	39.50	54.00	-14.50	Average	100	291	P
5	12490.00	15.11	42.88	57.99	74.00	-16.01	Peak	100	291	P

Note: Level=Reading+Factor
 Margin=Level-limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 6, Band 5, CH59		:	

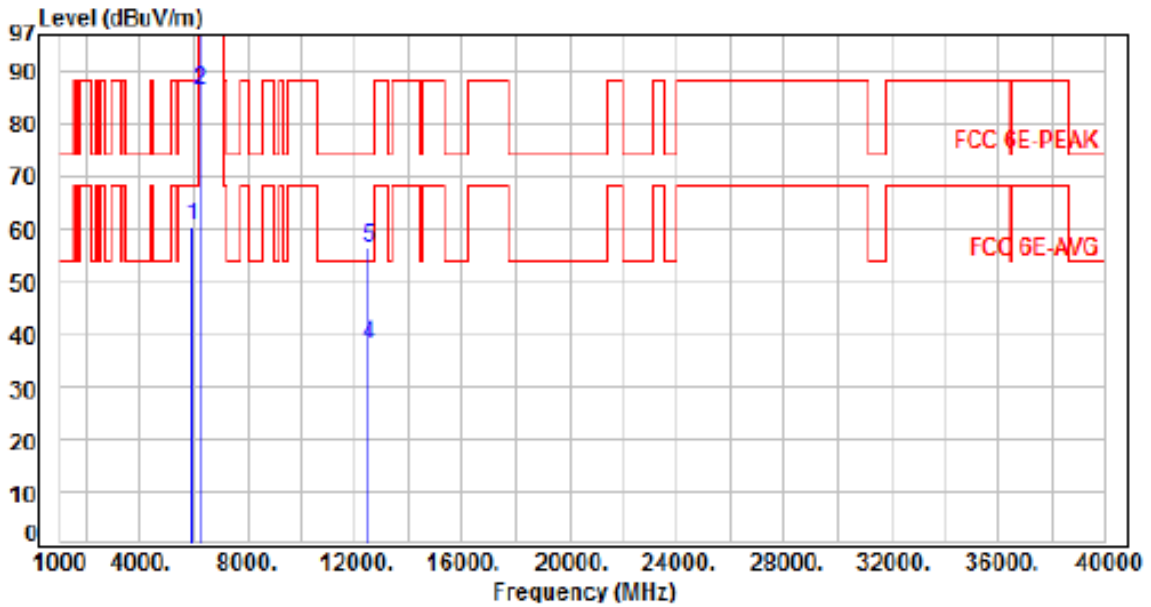

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.65	60.50	88.20	-27.70	Peak	384	299	P
2	6245.00	7.44	78.97	86.41	200.00	-113.59	Average	384	299	P
3	6245.00	7.44	92.59	100.03	200.00	-99.97	Peak	384	299	P
4	12490.00	15.11	22.97	38.08	54.00	-15.92	Average	100	93	P
5	12490.00	15.11	41.28	56.39	74.00	-17.61	Peak	100	93	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 5, CH91		:

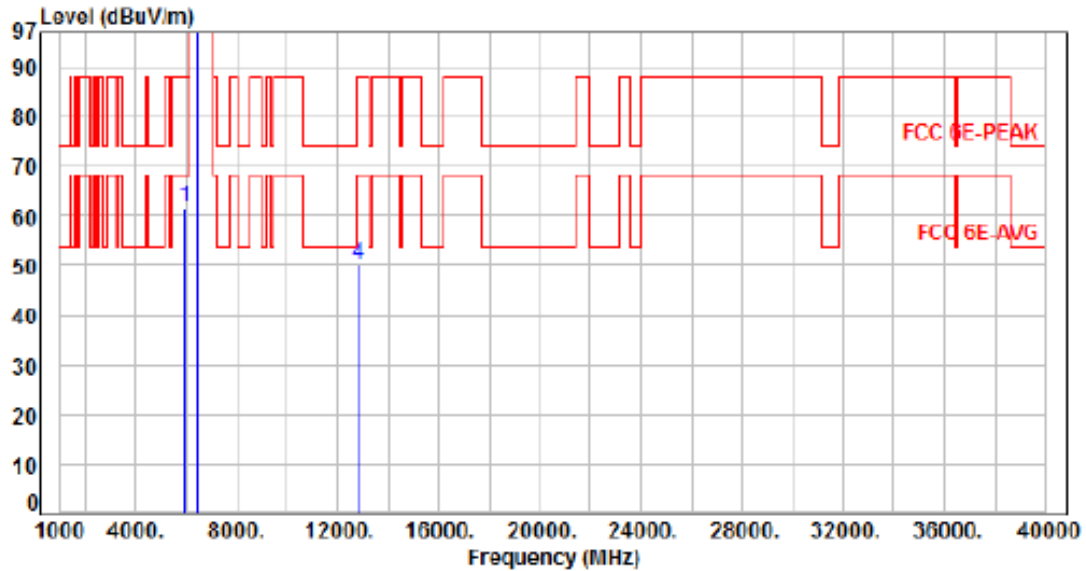


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.59	61.44	88.20	-26.76	Peak	100	15	P
2	6405.00	7.31	89.38	96.69	200.00	-103.31	Average	100	15	P
3	6405.00	7.31	102.89	110.20	200.00	-89.80	Peak	100	15	P
4	12810.00	16.05	34.10	50.15	88.20	-38.05	Peak	100	309	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 6, Band 5, CH91		:	

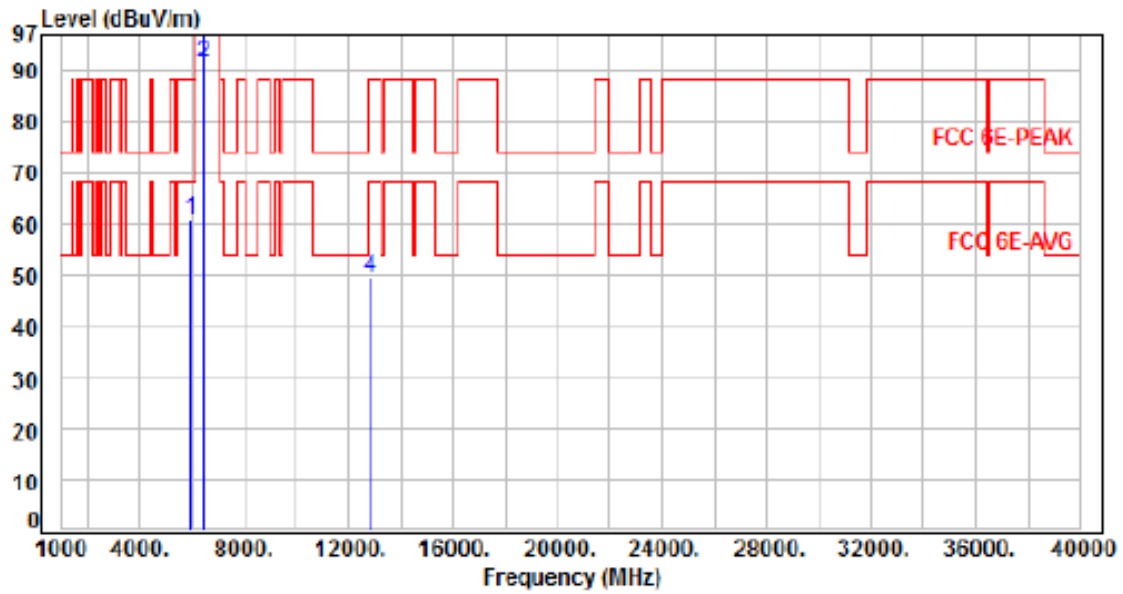


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.89	60.74	88.20	-27.46	Peak	388	302	P
2	6405.00	7.31	84.19	91.50	200.00	-108.50	Average	388	302	P
3	6405.00	7.31	96.84	104.15	200.00	-95.85	Peak	388	302	P
4	12810.00	16.05	33.19	49.24	88.20	-38.96	Peak	100	107	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 5, CH39		:

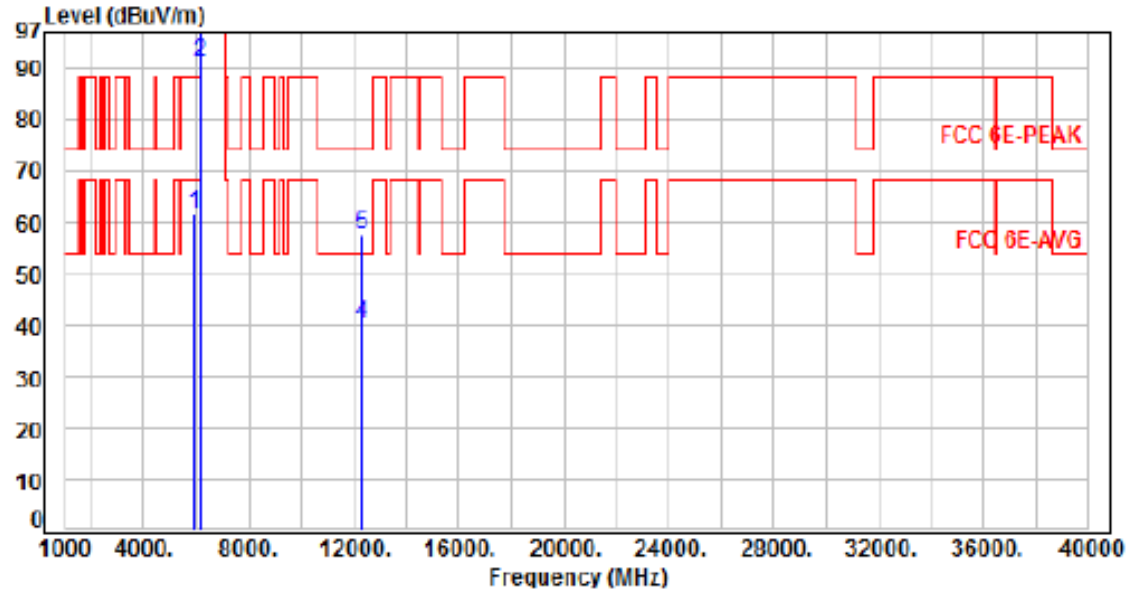


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.75	61.60	88.20	-26.60	Peak	100	20	P
2	6145.00	7.26	83.86	91.12	200.00	-108.88	Average	100	20	P
3	6145.00	7.26	97.86	105.12	200.00	-94.88	Peak	100	20	P
4	12290.00	14.90	25.18	40.08	54.00	-13.92	Average	100	338	P
5	12290.00	14.90	42.67	57.57	74.00	-16.43	Peak	100	338	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 7, Band 5, CH39		:	

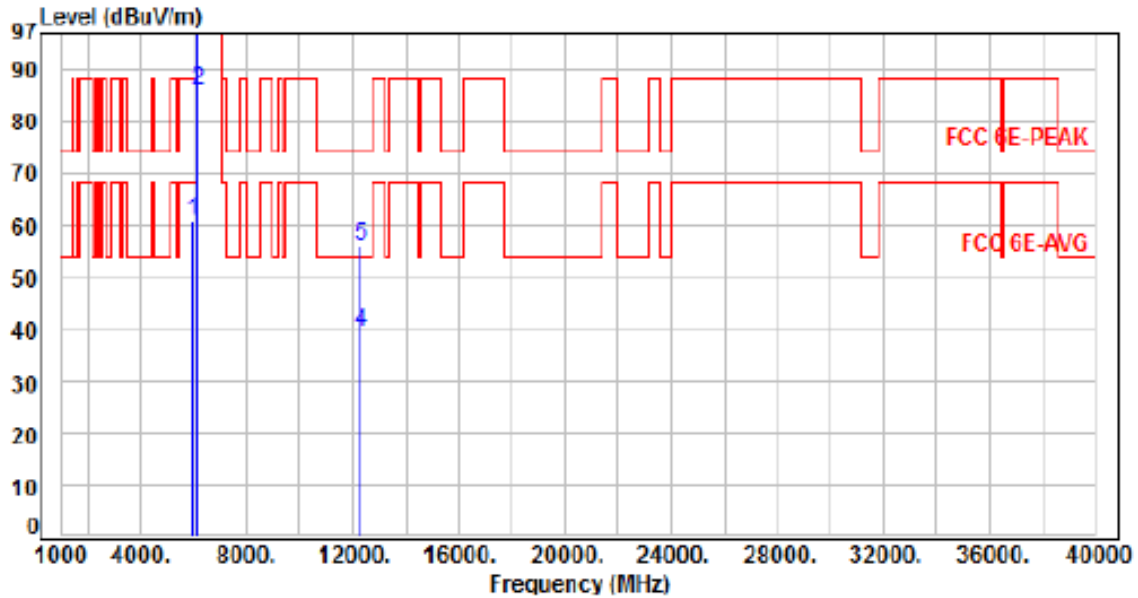

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.97	60.82	88.20	-27.38	Peak	388	309	P
2	6145.00	7.26	78.83	86.09	200.00	-113.91	Average	388	309	P
3	6145.00	7.26	92.46	99.72	200.00	-100.28	Peak	388	309	P
4	12290.00	14.90	24.61	39.51	54.00	-14.49	Average	100	183	P
5	12290.00	14.90	41.20	56.10	74.00	-17.90	Peak	100	183	P

Note: Level-Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 5, CH55		:

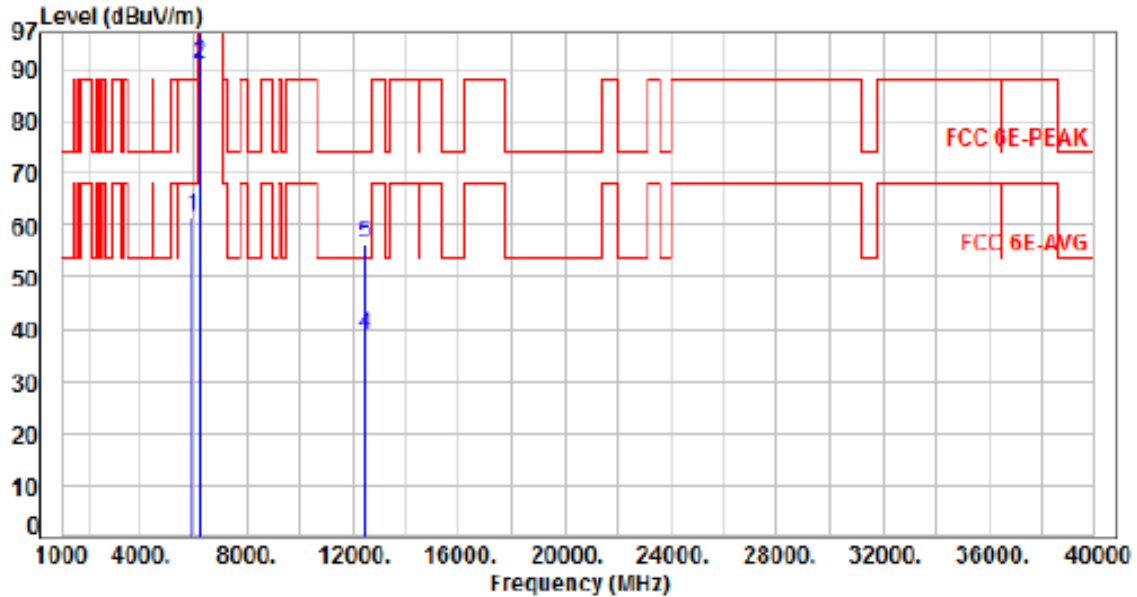


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.73	61.58	88.20	-26.62	Peak	100	27	P
2	6225.00	7.43	83.82	91.25	200.00	-108.75	Average	100	27	P
3	6225.00	7.43	97.31	104.74	200.00	-95.26	Peak	100	27	P
4	12450.00	15.11	23.44	38.55	54.00	-15.45	Average	100	169	P
5	12450.00	15.11	41.44	56.55	74.00	-17.45	Peak	100	169	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 5, CH55		

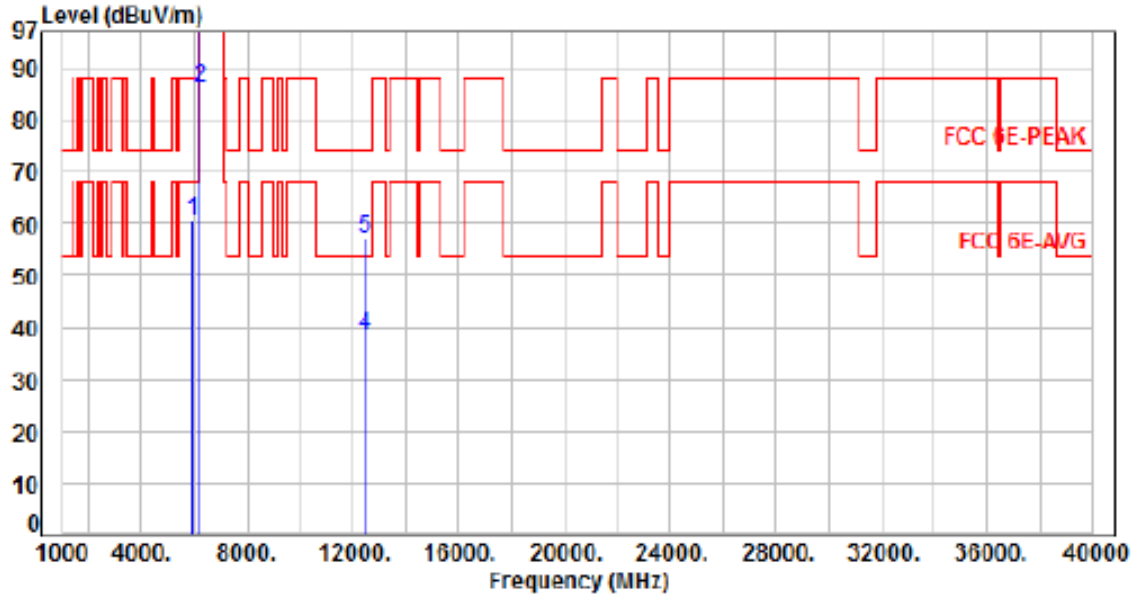


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.74	60.59	88.20	-27.61	Peak	362	304	P
2	6225.00	7.43	78.88	86.31	200.00	-113.69	Average	362	304	P
3	6225.00	7.43	92.64	100.07	200.00	-99.93	Peak	362	304	P
4	12450.00	15.11	23.27	38.38	54.00	-15.62	Average	100	12	P
5	12450.00	15.11	42.20	57.31	74.00	-16.69	Peak	100	12	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 5, CH87		:

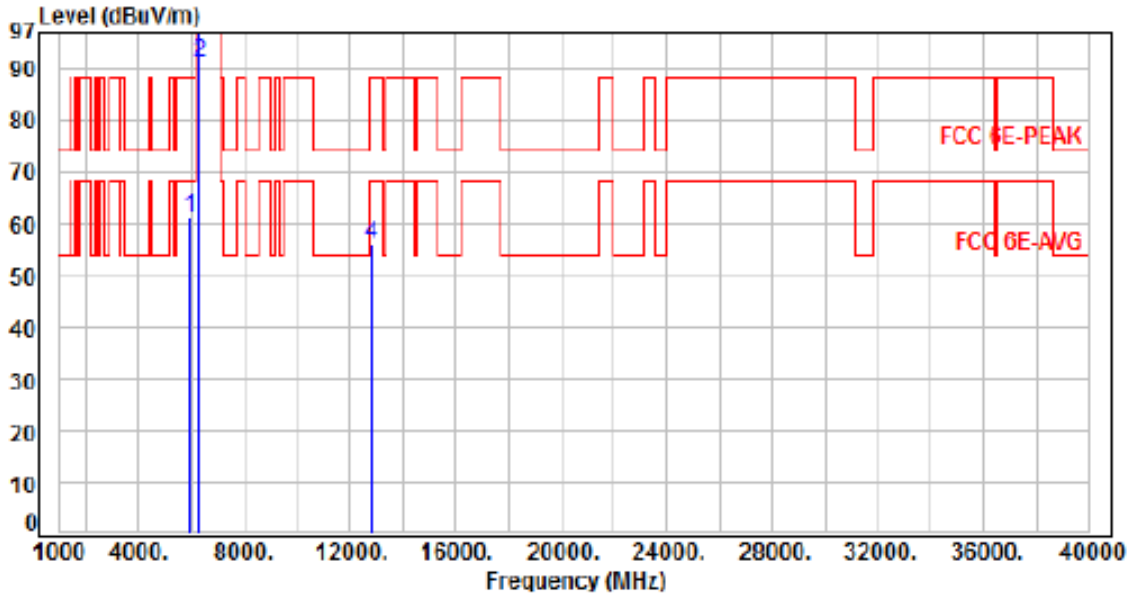


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.34	61.19	88.20	-27.01	Peak	100	18	P
2	6305.00	7.48	83.76	91.24	200.00	-108.76	Average	100	18	P
3	6305.00	7.48	97.74	105.22	200.00	-94.78	Peak	100	18	P
4	12770.00	15.90	40.27	56.17	88.20	-32.03	Peak	100	85	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 5, CH87		

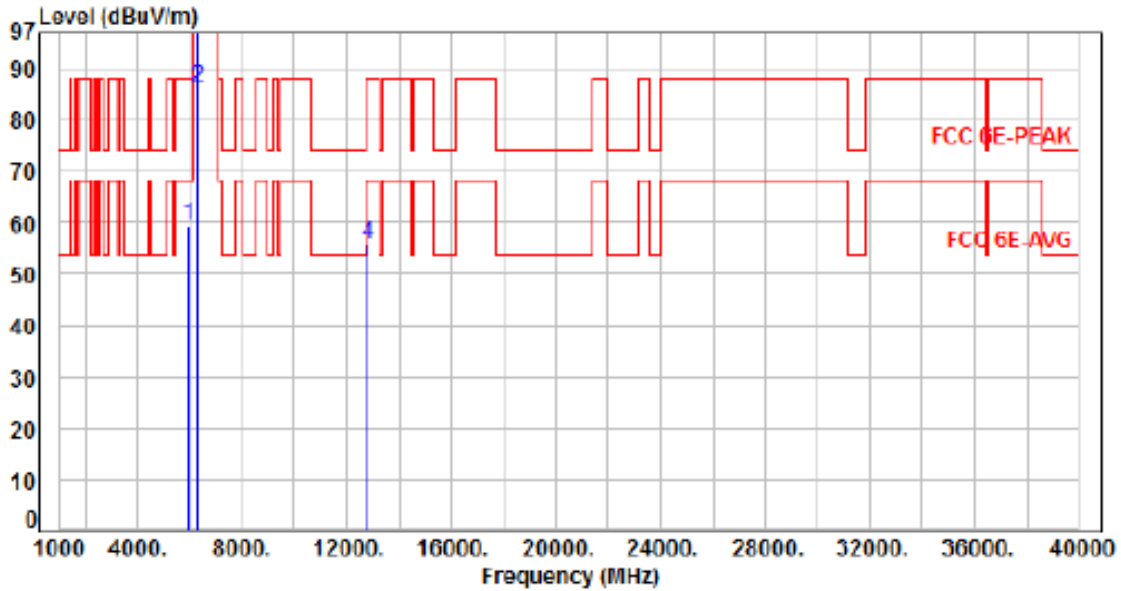


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	52.52	59.37	88.20	-28.83	Peak	391	304	P
2	6305.00	7.48	78.73	86.21	200.00	-113.79	Average	391	304	P
3	6305.00	7.48	92.69	100.17	200.00	-99.83	Peak	391	304	P
4	12770.00	15.90	39.78	55.68	88.20	-32.52	Peak	100	81	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 5, CH47		:

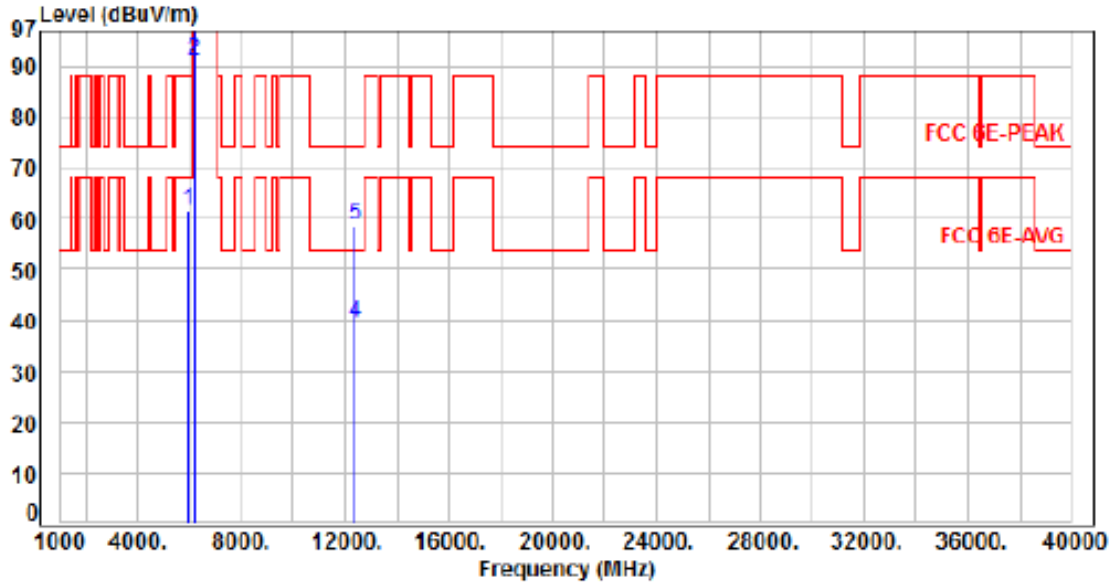


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.64	61.49	88.20	-26.71	Peak	304	8	P
2	6185.00	7.37	83.88	91.25	200.00	-108.75	Average	304	8	P
3	6185.00	7.37	97.61	104.98	200.00	-95.02	Peak	304	8	P
4	12370.00	15.06	24.52	39.58	54.00	-14.42	Average	100	139	P
5	12370.00	15.06	43.52	58.58	74.00	-15.42	Peak	100	139	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 5, CH47		

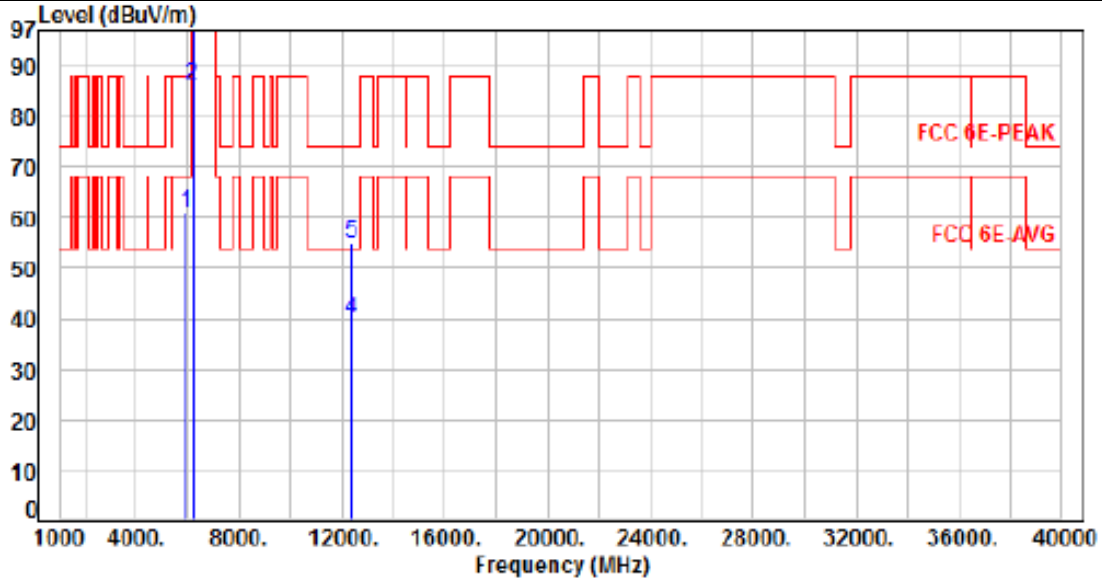


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.95	60.80	88.20	-27.40	Peak	384	304	P
2	6185.00	7.37	78.87	86.24	200.00	-113.76	Average	384	304	P
3	6185.00	7.37	91.64	99.01	200.00	-100.99	Peak	384	304	P
4	12370.00	15.06	24.83	39.89	54.00	-14.11	Average	100	98	P
5	12370.00	15.06	39.86	54.92	74.00	-19.08	Peak	100	98	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 5, CH79		:

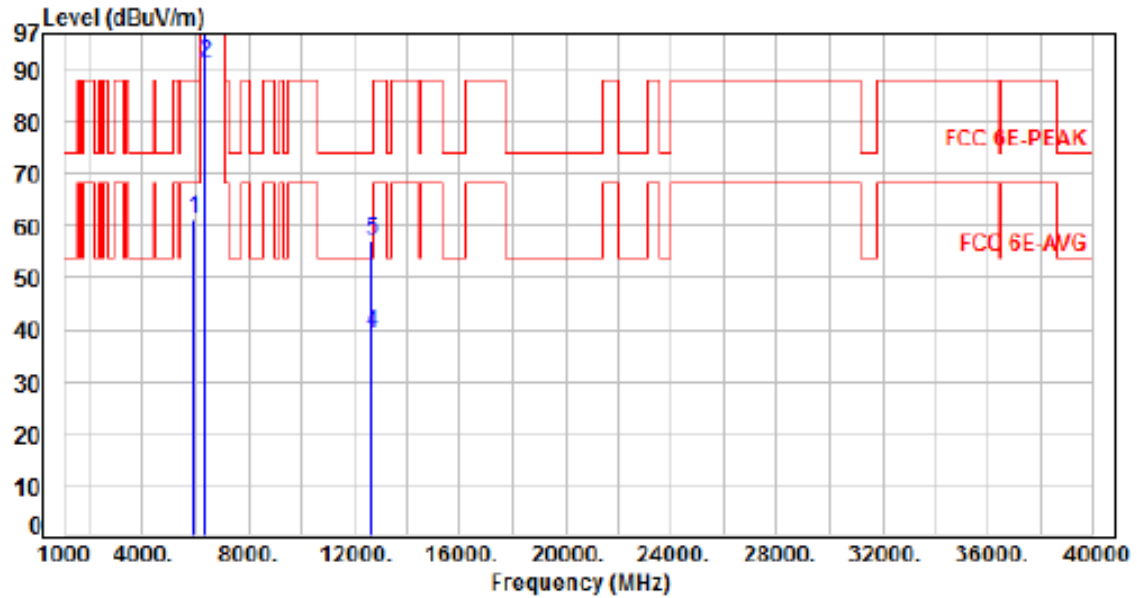


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.40	61.25	88.20	-26.95	Peak	309	13	P
2	6345.00	7.50	83.84	91.34	200.00	-108.66	Average	309	13	P
3	6345.00	7.50	97.57	105.07	200.00	-94.93	Peak	309	13	P
4	12690.00	15.56	23.47	39.03	54.00	-14.97	Average	100	128	P
5	12690.00	15.56	41.65	57.21	74.00	-16.79	Peak	100	128	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 5, CH79		

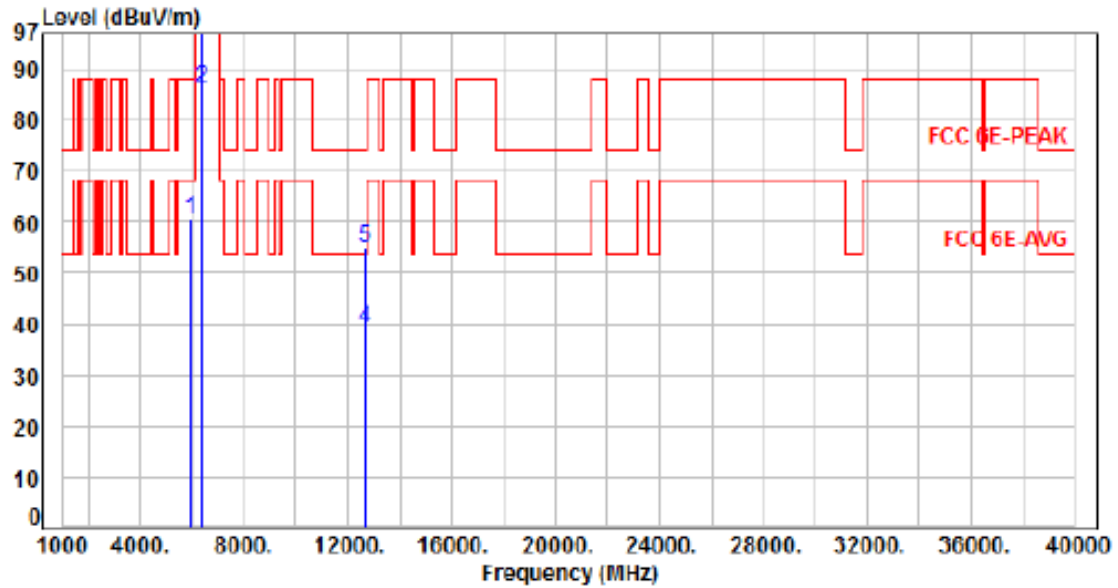


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.63	60.48	88.20	-27.72	Peak	379	307	P
2	6345.00	7.50	78.74	86.24	200.00	-113.76	Average	379	307	P
3	6345.00	7.50	91.57	99.07	200.00	-100.93	Peak	379	307	P
4	12690.00	15.56	23.57	39.13	54.00	-14.87	Average	100	243	P
5	12690.00	15.56	39.45	55.01	74.00	-18.99	Peak	100	243	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 6, CH97		:

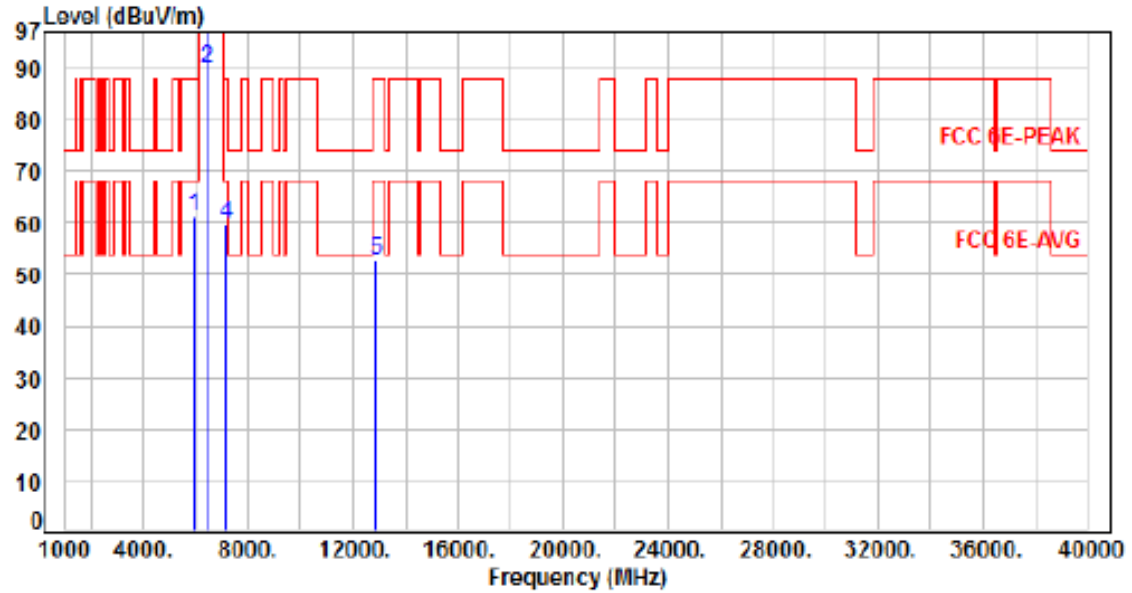


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.32	61.17	88.20	-27.03	Peak	126	22	P
2	6435.00	7.21	82.91	90.12	200.00	-109.88	Average	126	22	P
3	6435.00	7.21	96.48	103.69	200.00	-96.31	Peak	126	22	P
4	7135.00	8.91	50.91	59.82	88.20	-28.38	Peak	126	22	P
5	12870.00	16.20	36.69	52.89	88.20	-35.31	Peak	100	123	P

Note: Level=Reading+Factor
 Margin=Level-limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 5, Band 6, CH97		:	

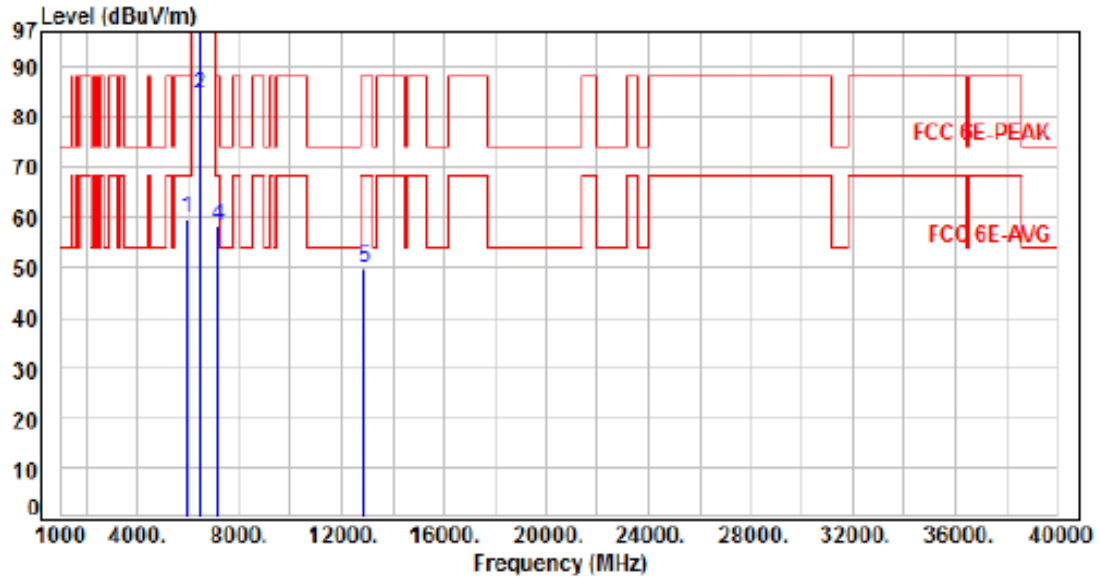


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	52.80	59.65	88.20	-28.55	Peak	259	61	P
2	6435.00	7.21	77.21	84.42	200.00	-115.58	Average	259	61	P
3	6435.00	7.21	93.01	100.22	200.00	-99.78	Peak	259	61	P
4	7135.00	8.91	49.21	58.12	88.20	-30.08	Peak	259	61	P
5	12870.00	16.20	33.55	49.75	88.20	-38.45	Peak	100	360	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 6, CH105		:

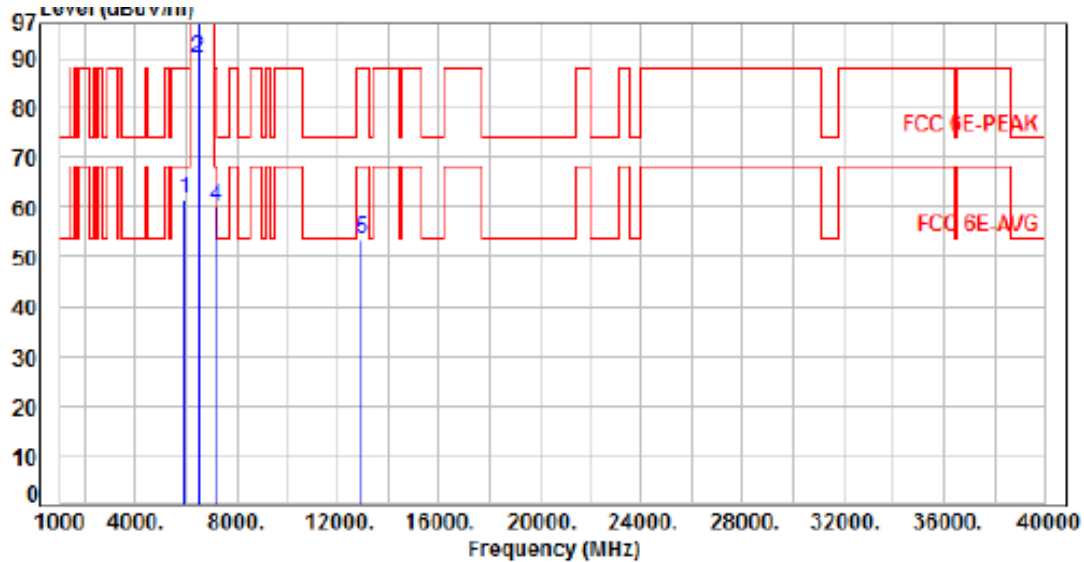

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.79	61.64	88.20	-26.56	Peak	100	22	P
2	6475.00	7.22	82.73	89.95	200.00	-110.05	Average	100	22	P
3	6475.00	7.22	96.89	104.11	200.00	-95.89	Peak	100	22	P
4	7135.00	8.91	51.20	60.11	88.20	-28.09	Peak	100	22	P
5	12950.00	16.54	36.89	53.43	88.20	-34.77	Peak	100	71	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 5, Band 6, CH105		:	

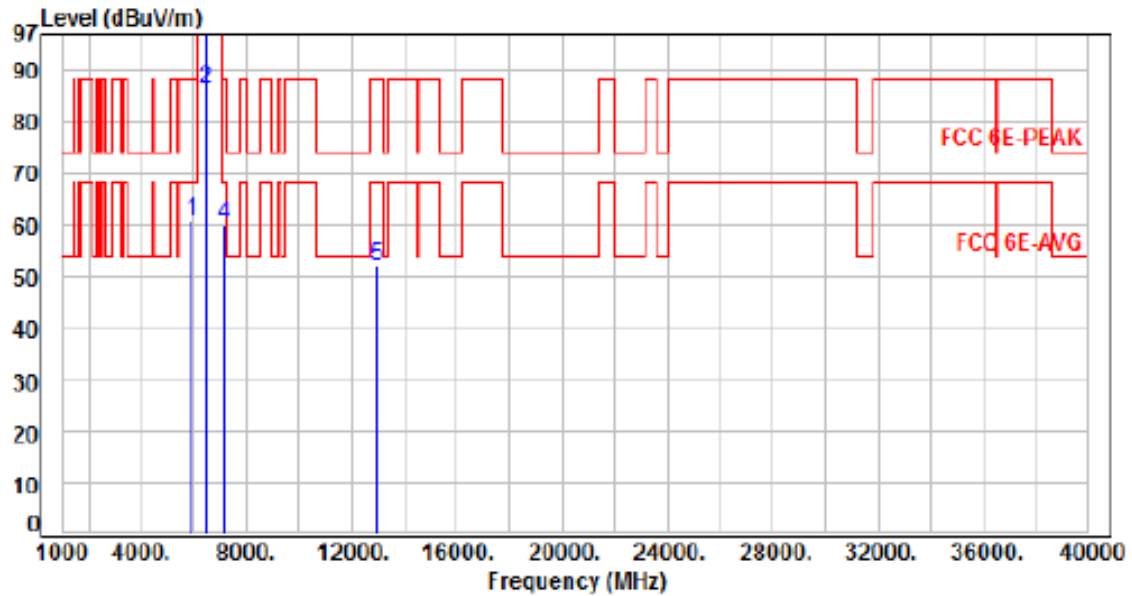


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.00	60.85	88.20	-27.35	Peak	257	294	P
2	6475.00	7.22	79.04	86.26	200.00	-113.74	Average	257	294	P
3	6475.00	7.22	91.84	99.06	200.00	-100.94	Peak	257	294	P
4	7135.00	8.91	51.19	60.10	88.20	-28.10	Peak	257	294	P
5	12950.00	16.54	35.41	51.95	88.20	-36.25	Peak	100	320	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 6, CH113		:

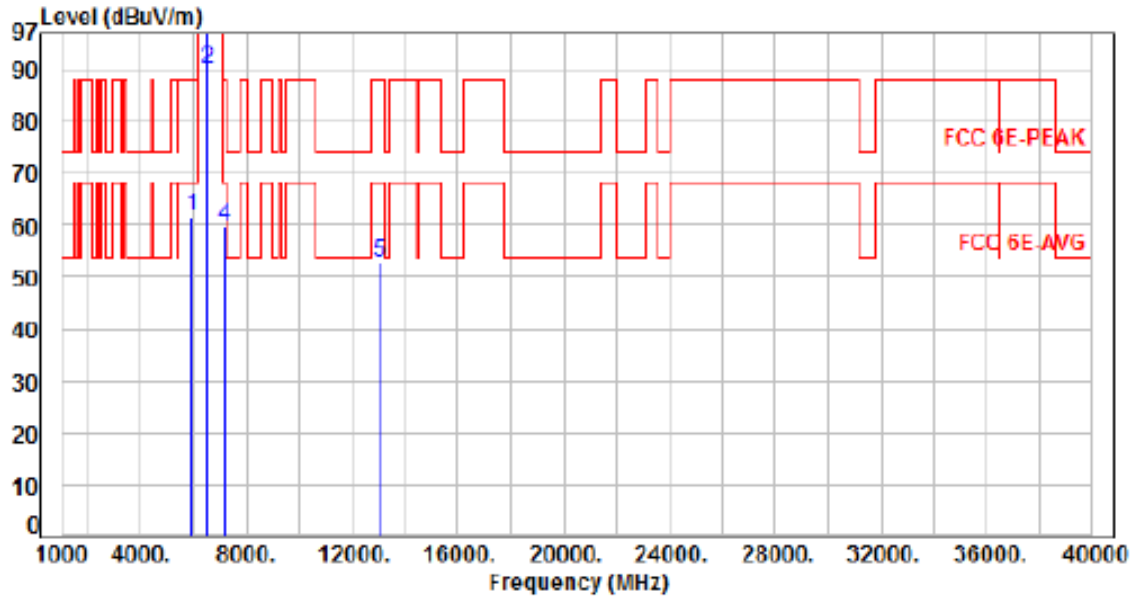

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.68	61.53	88.20	-26.67	Peak	100	19	P
2	6515.00	7.36	82.71	90.07	200.00	-109.93	Average	100	19	P
3	6515.00	7.36	95.98	103.34	200.00	-96.66	Peak	100	19	P
4	7135.00	8.91	50.98	59.89	88.20	-28.31	Peak	100	19	P
5	13030.00	16.89	35.80	52.69	88.20	-35.51	Peak	100	107	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 5, Band 6, CH113		:	

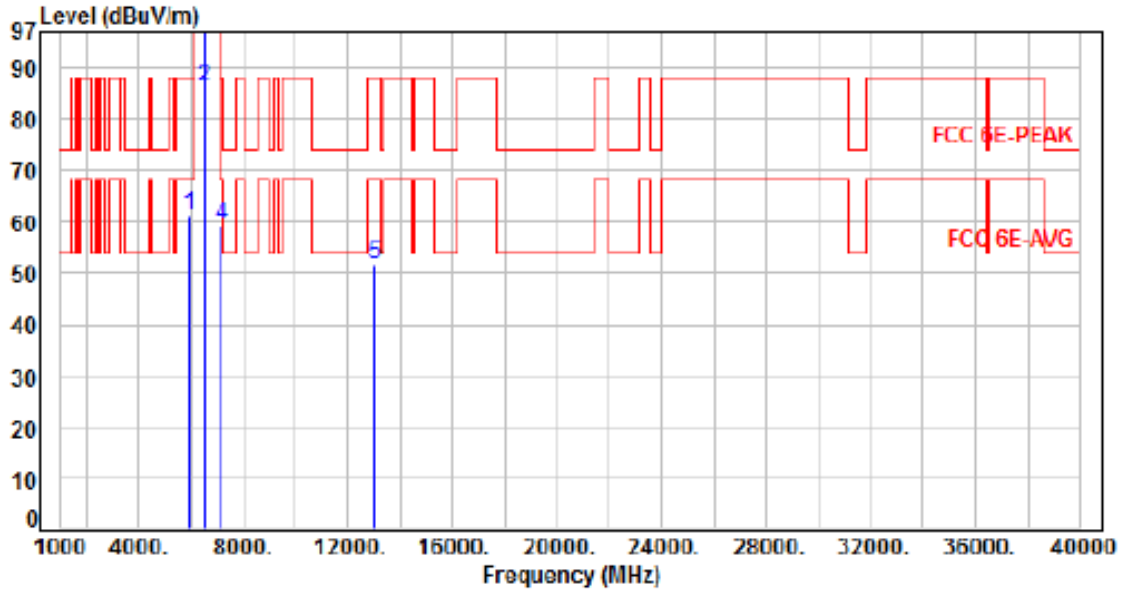


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.41	61.26	88.20	-26.94	Peak	266	294	P
2	6515.00	7.36	78.81	86.17	200.00	-113.83	Average	266	294	P
3	6515.00	7.36	93.06	100.42	200.00	-99.58	Peak	266	294	P
4	7135.00	8.91	50.48	59.39	88.20	-28.81	Peak	266	294	P
5	13030.00	16.89	34.81	51.70	88.20	-36.50	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 6, CH99		:

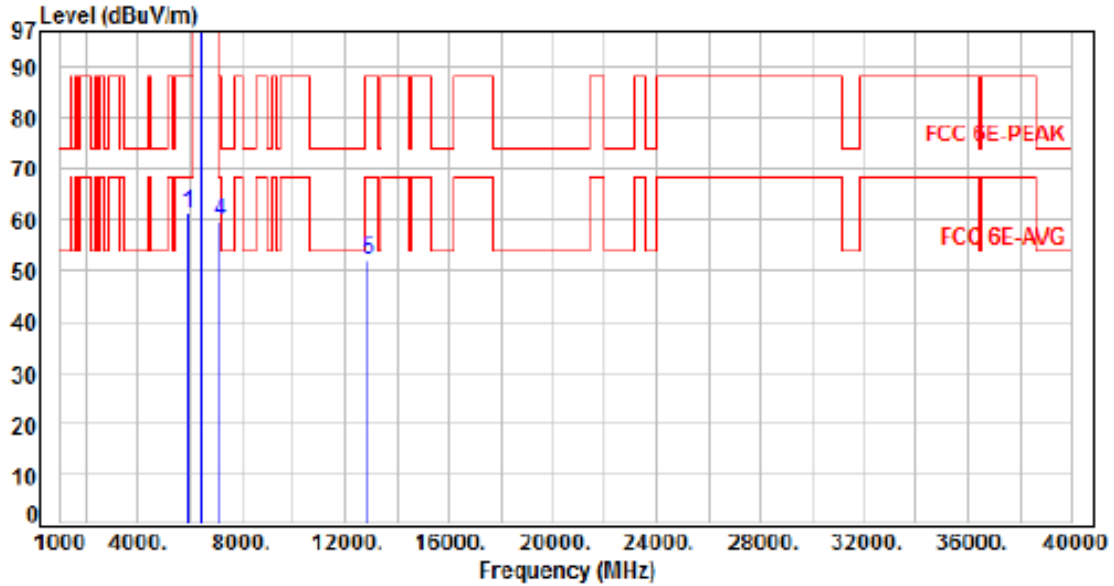


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.52	61.37	88.20	-26.83	Peak	100	24	P
2	6445.00	7.18	89.93	97.11	200.00	-102.89	Average	100	24	P
3	6445.00	7.18	103.44	110.62	200.00	-89.38	Peak	100	24	P
4	7135.00	8.91	50.89	59.80	88.20	-28.40	Peak	100	24	P
5	12890.00	16.24	35.70	51.94	88.20	-36.26	Peak	100	91	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 6, CH99		

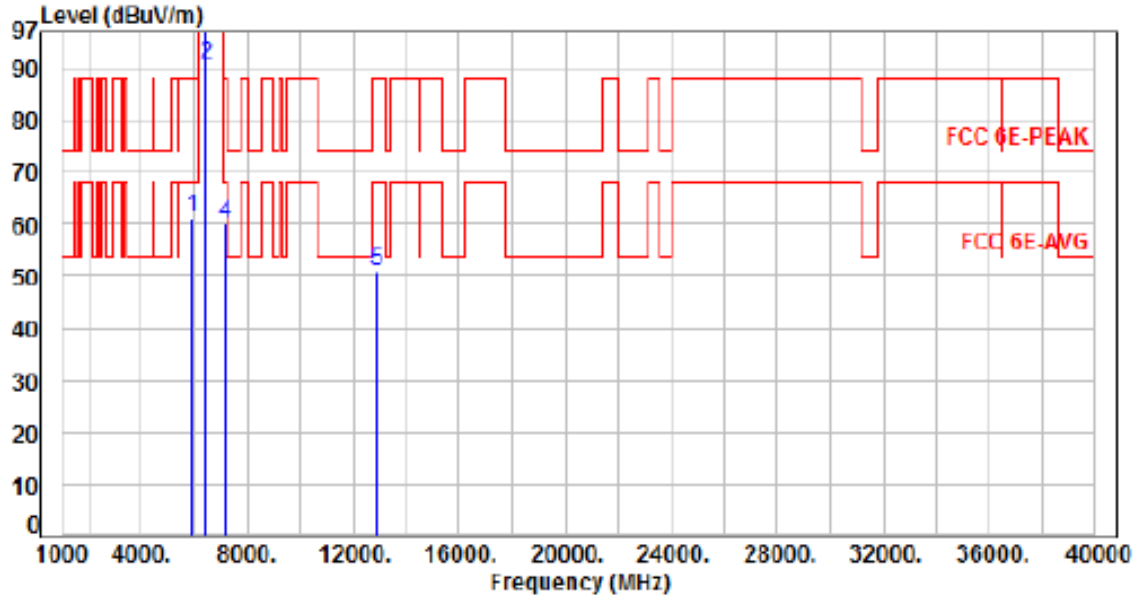


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.31	61.16	88.20	-27.04	Peak	243	294	P
2	6445.00	7.18	83.42	90.60	200.00	-109.40	Average	243	294	P
3	6445.00	7.18	96.57	103.75	200.00	-96.25	Peak	243	294	P
4	7135.00	8.91	51.11	60.02	88.20	-28.18	Peak	243	294	P
5	12890.00	16.24	34.60	50.84	88.20	-37.36	Peak	100	311	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 6, CH107		:

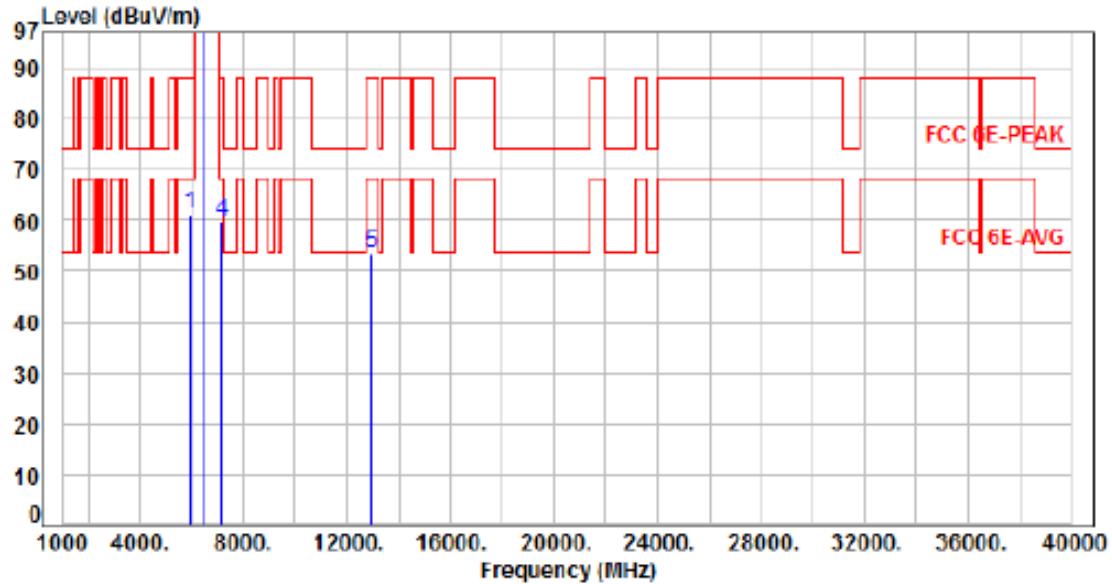


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.23	61.08	88.20	-27.12	Peak	100	18	P
2	6485.00	7.25	89.72	96.97	200.00	-103.03	Average	100	18	P
3	6485.00	7.25	103.37	110.62	200.00	-89.38	Peak	100	18	P
4	7135.00	8.91	50.79	59.70	88.20	-28.50	Peak	100	18	P
5	12970.00	16.64	36.71	53.35	88.20	-34.85	Peak	100	92	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 6, CH107		

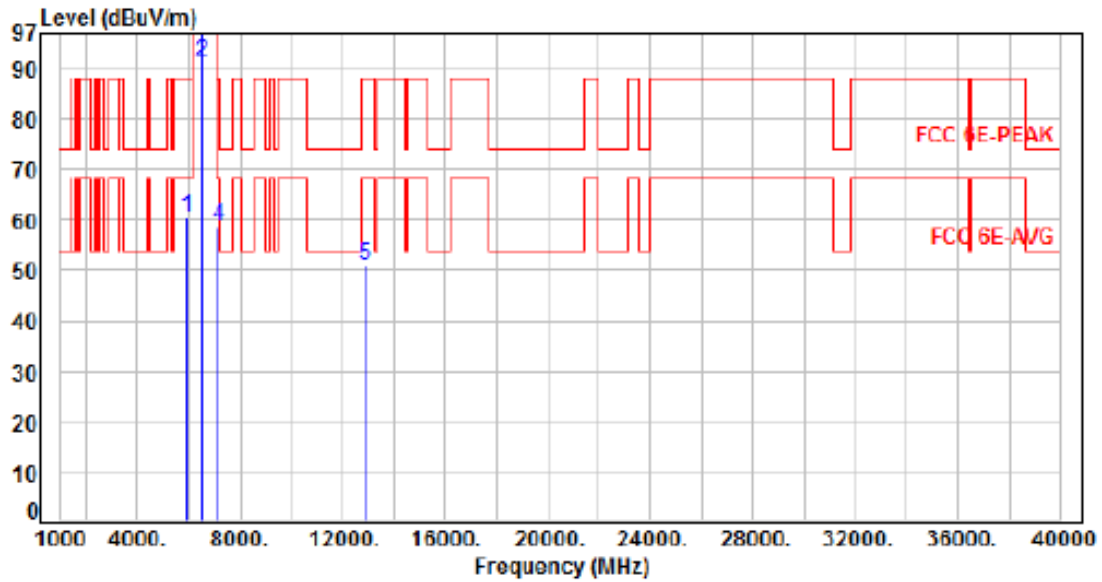


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.48	60.33	88.20	-27.87	Peak	258	294	P
2	6485.00	7.25	84.21	91.46	200.00	-108.54	Average	258	294	P
3	6485.00	7.25	97.36	104.61	200.00	-95.39	Peak	258	294	P
4	7135.00	8.91	49.88	58.79	88.20	-29.41	Peak	258	294	P
5	12890.00	16.24	34.50	50.74	88.20	-37.46	Peak	100	360	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 6, CH103		:

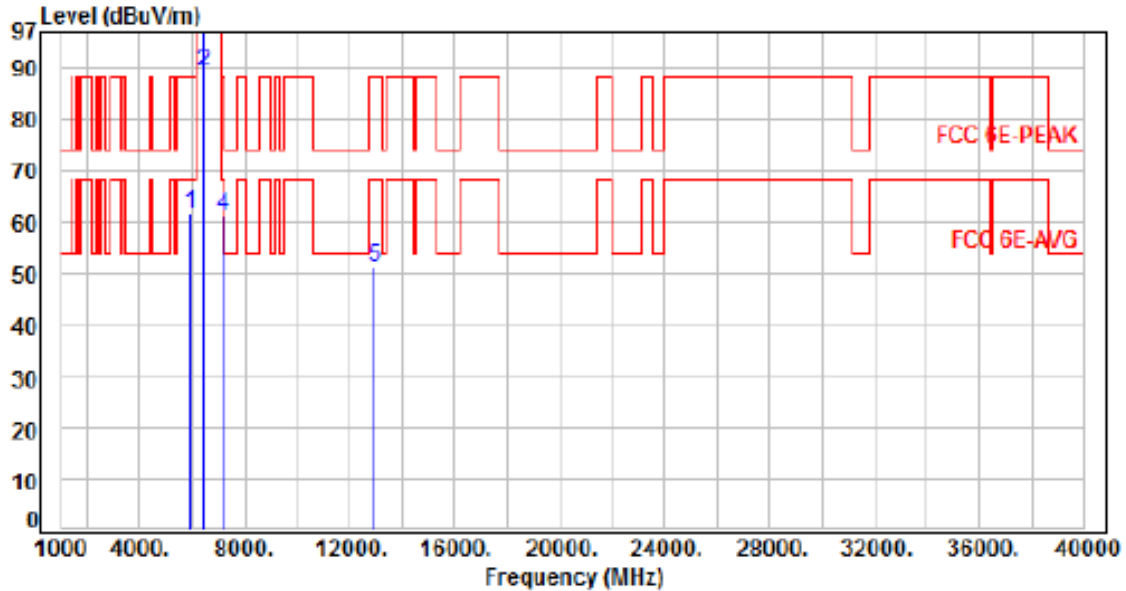


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.70	61.55	88.20	-26.65	Peak	117	26	P
2	6465.00	7.20	81.93	89.13	200.00	-110.87	Average	117	26	P
3	6465.00	7.20	96.35	103.55	200.00	-96.45	Peak	117	26	P
4	7135.00	8.91	52.21	61.12	88.20	-27.08	Peak	117	26	P
5	12930.00	16.43	35.00	51.43	88.20	-36.77	Peak	100	106	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 7, Band 6, CH103		:	

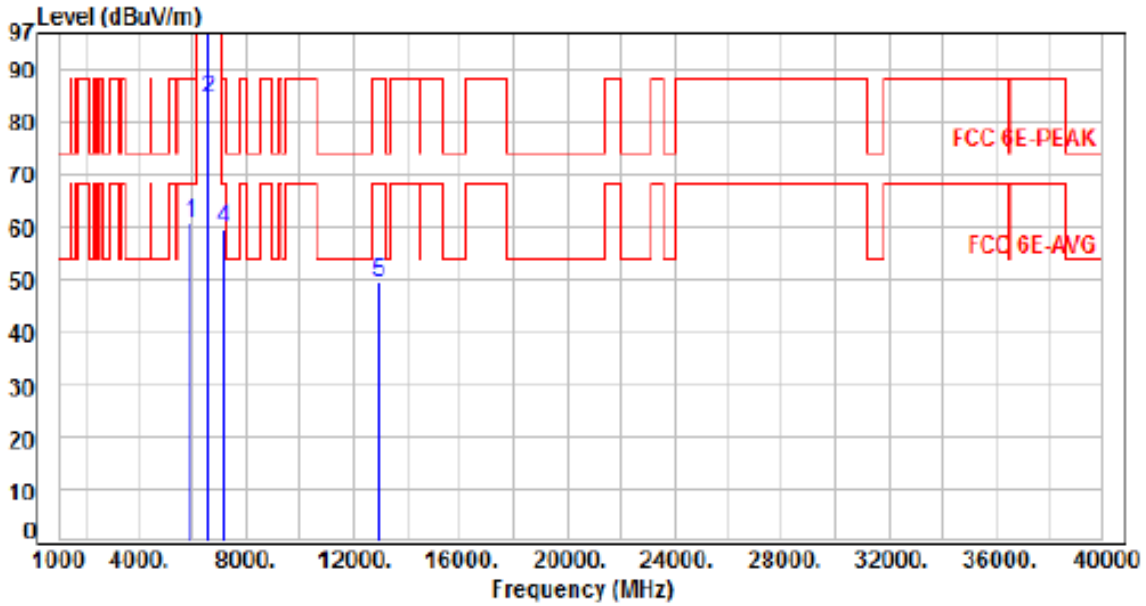


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.10	60.95	88.20	-27.25	Peak	270	290	P
2	6565.00	7.61	76.92	84.53	200.00	-115.47	Average	270	290	P
3	6565.00	7.61	91.67	99.28	200.00	-100.72	Peak	270	290	P
4	7135.00	8.91	50.99	59.90	88.20	-28.30	Peak	270	290	P
5	12930.00	16.43	33.07	49.50	88.20	-38.70	Peak	100	321	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 6 Straddle Channel, CH115		

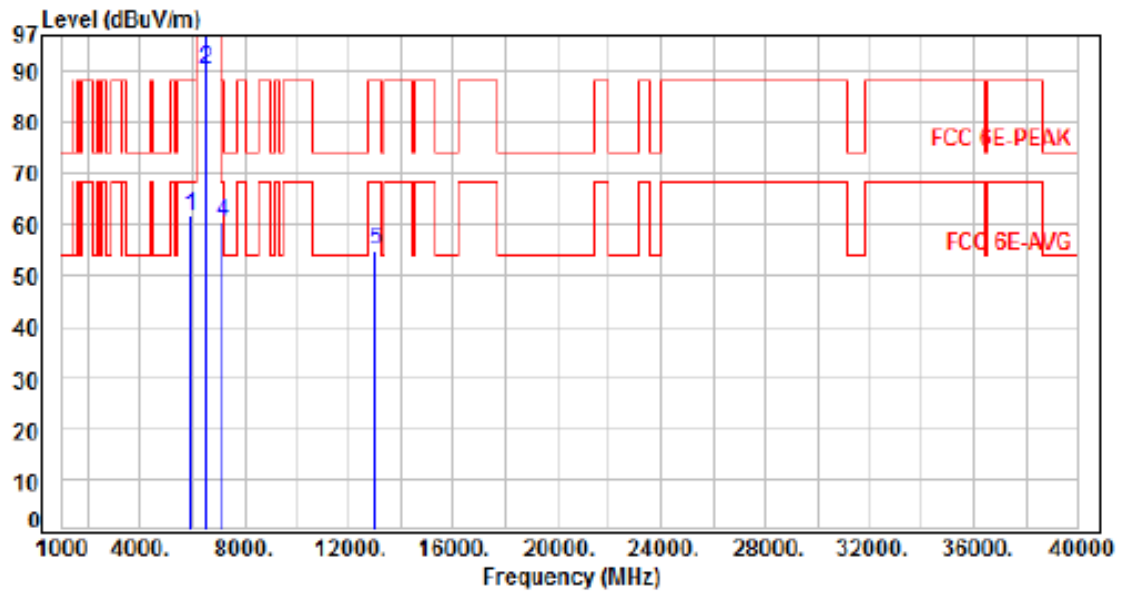


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.73	61.58	88.20	-26.62	Peak	278	265	P
2	6525.00	7.40	82.92	90.32	200.00	-109.68	Average	278	265	P
3	6525.00	7.40	96.99	104.39	200.00	-95.61	Peak	278	265	P
4	7135.00	8.91	51.51	60.42	88.20	-27.78	Peak	278	265	P
5	13050.00	16.95	37.85	54.80	88.20	-33.40	Peak	100	182	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6 , Band 6 Straddle Channel, CH115		:

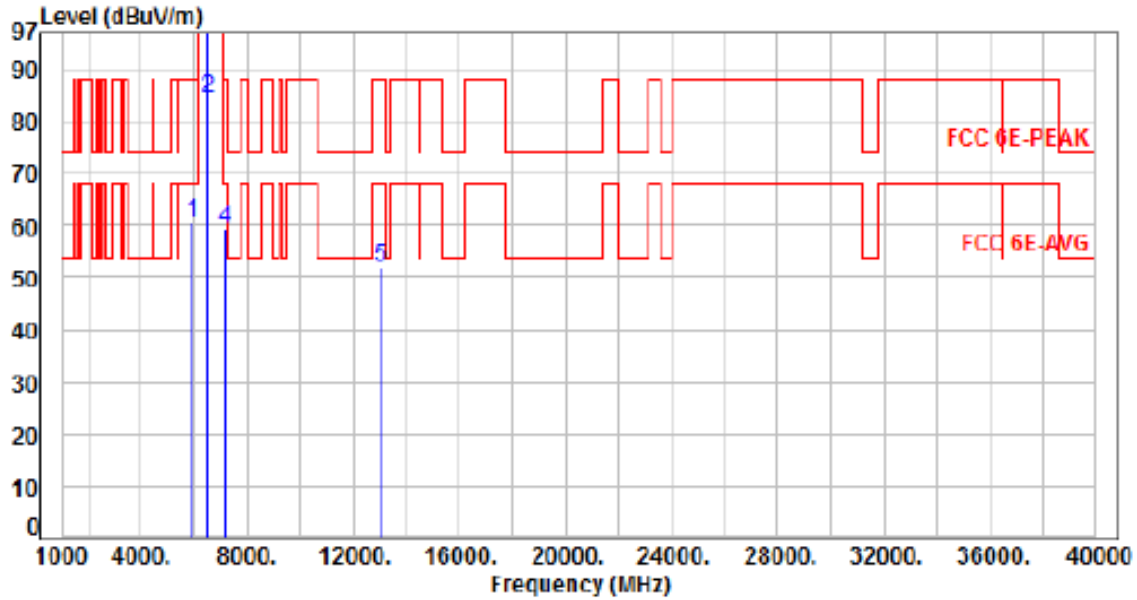


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.46	60.31	88.20	-27.89	Peak	241	128	P
2	6525.00	7.40	76.91	84.31	200.00	-115.69	Average	241	128	P
3	6525.00	7.40	91.96	99.36	200.00	-100.64	Peak	241	128	P
4	7135.00	8.91	50.41	59.32	88.20	-28.88	Peak	241	128	P
5	13050.00	16.95	35.18	52.13	88.20	-36.07	Peak	100	155	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 6 Straddle Channel, CH119		

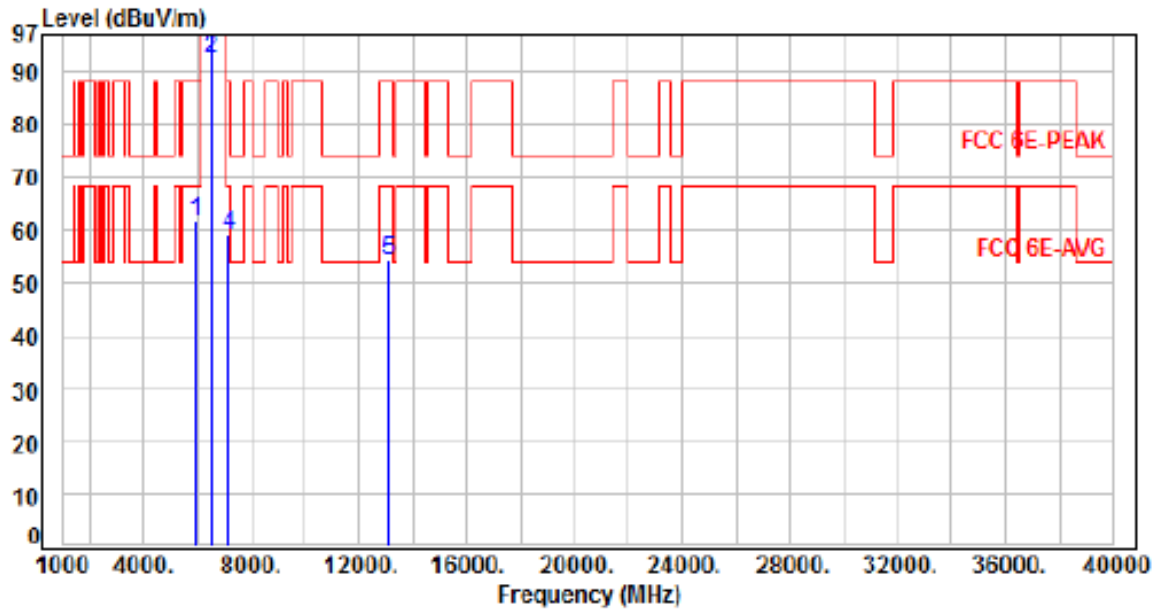

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.66	61.51	88.20	-26.69	Peak	248	293	P
2	6545.00	7.49	84.92	92.41	200.00	-107.59	Average	248	293	P
3	6545.00	7.49	97.83	105.32	200.00	-94.68	Peak	248	293	P
4	7135.00	8.91	50.09	59.00	88.20	-29.20	Peak	248	293	P
5	13090.00	17.07	37.12	54.19	88.20	-34.01	Peak	100	217	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 6 Straddle Channel, CH119		:

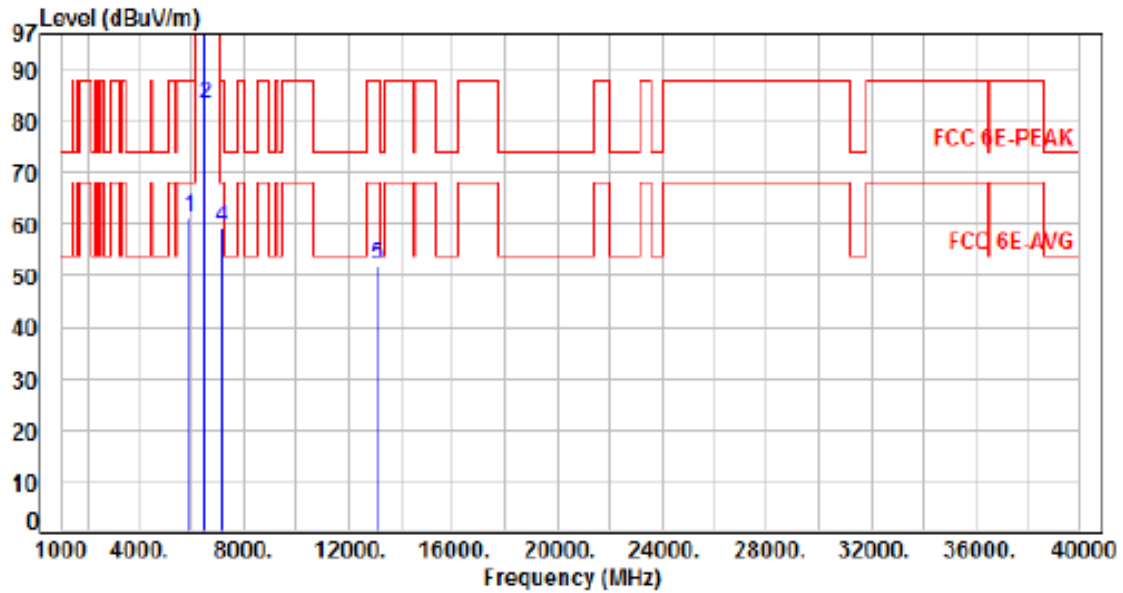


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.26	61.11	88.20	-27.09	Peak	238	98	P
2	6545.00	7.49	75.93	83.42	200.00	-116.58	Average	238	98	P
3	6545.00	7.49	92.07	99.56	200.00	-100.44	Peak	238	98	P
4	7135.00	8.91	50.31	59.22	88.20	-28.98	Peak	238	98	P
5	13090.00	17.07	34.99	52.06	88.20	-36.14	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 6 Straddle Channel, CH111		:

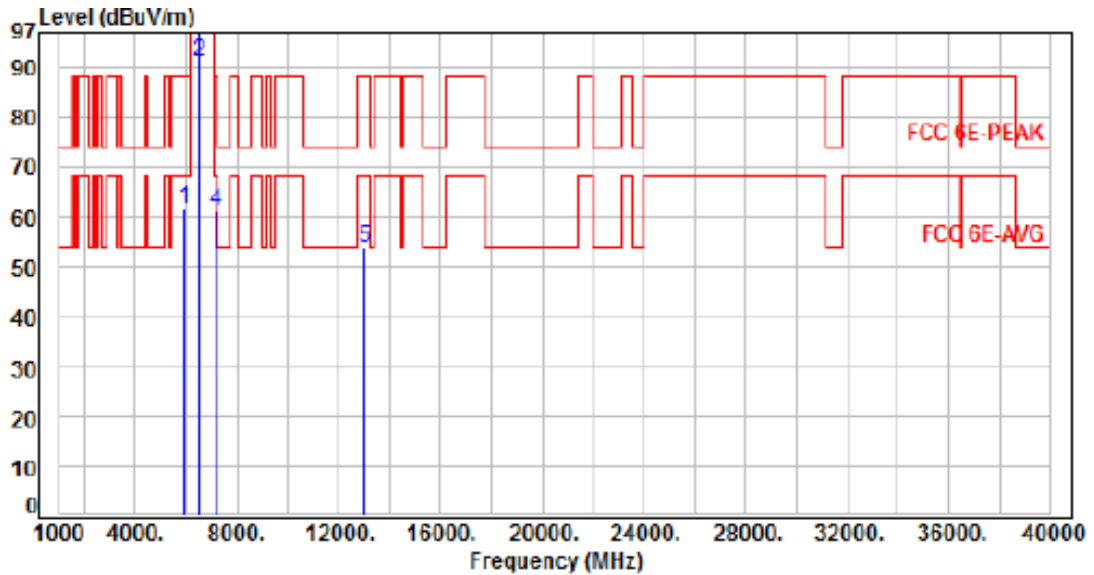


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.67	61.52	88.20	-26.68	Peak	261	283	P
2	6505.00	7.31	83.77	91.08	200.00	-108.92	Average	261	283	P
3	6505.00	7.31	96.61	103.92	200.00	-96.08	Peak	261	283	P
4	7135.00	8.91	52.41	61.32	88.20	-26.88	Peak	261	283	P
5	13010.00	16.83	37.16	53.99	88.20	-34.21	Peak	100	250	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 6 Straddle Channel, CH111		:

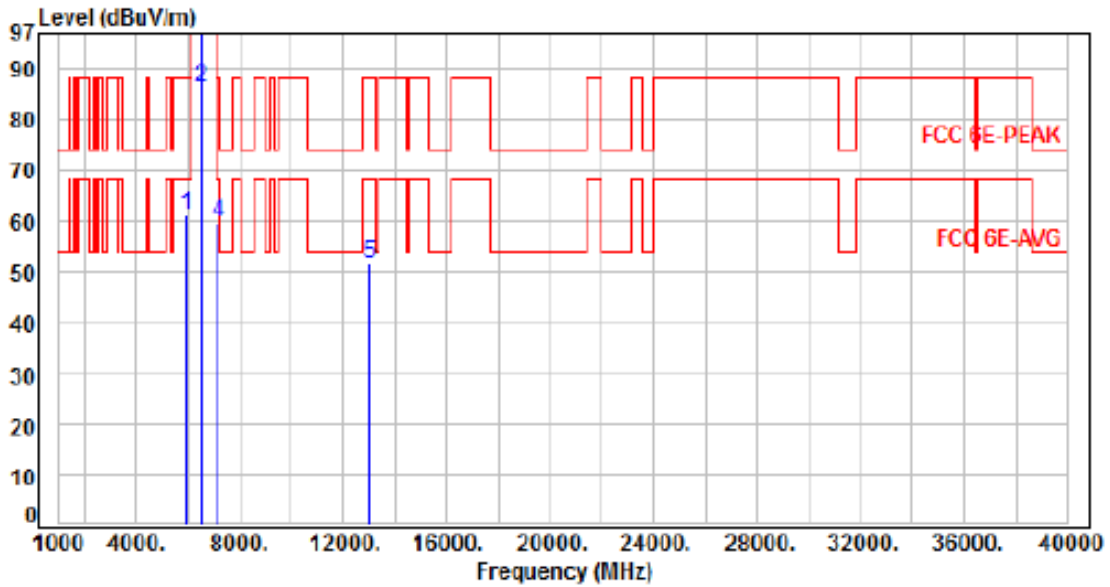


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.20	61.05	88.20	-27.15	Peak	288	117	P
2	6505.00	7.31	78.91	86.22	200.00	-113.78	Average	288	117	P
3	6505.00	7.31	91.68	98.99	200.00	-101.01	Peak	288	117	P
4	7135.00	8.91	50.98	59.89	88.20	-28.31	Peak	288	117	P
5	13010.00	16.83	34.91	51.74	88.20	-36.46	Peak	100	137	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 7, CH117		:

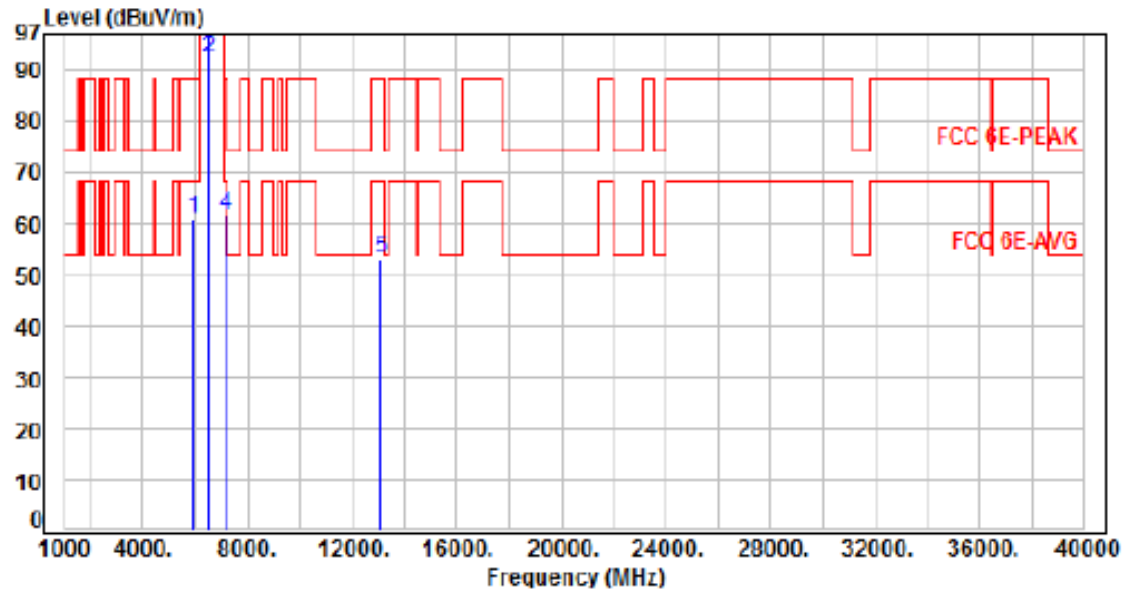


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.99	60.84	88.20	-27.36	Peak	135	25	P
2	6535.00	7.44	84.68	92.12	200.00	-107.88	Average	135	25	P
3	6535.00	7.44	94.42	101.86	200.00	-98.14	Peak	135	25	P
4	7135.00	8.91	52.77	61.68	88.20	-26.52	Peak	135	25	P
5	13070.00	17.01	36.21	53.22	88.20	-34.98	Peak	100	161	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 7, CH117		

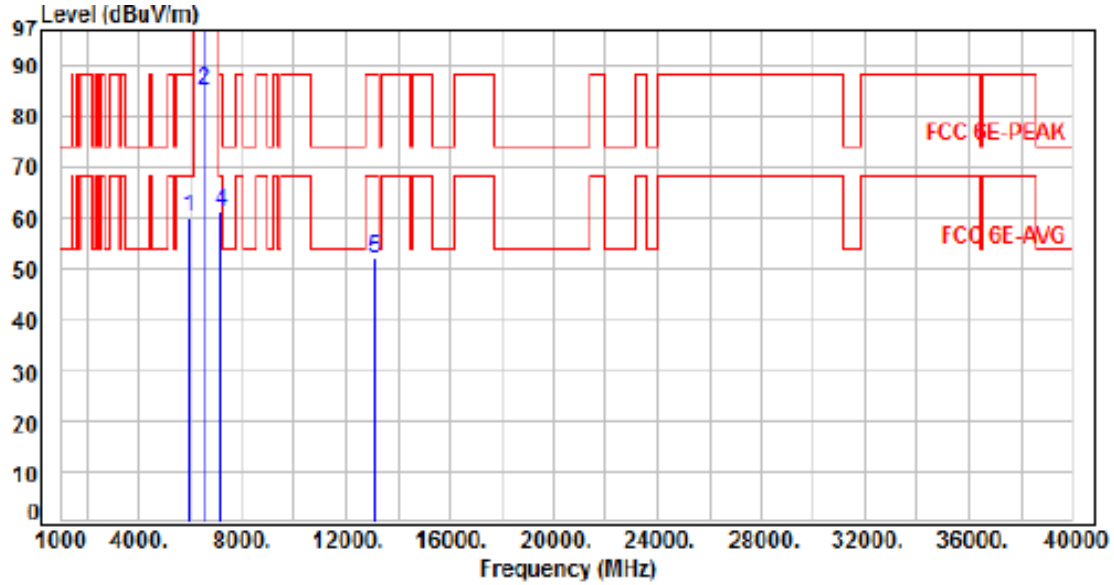


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.26	60.13	88.20	-28.07	Peak	255	298	P
2	6535.00	7.44	77.92	85.36	200.00	-114.64	Average	255	298	P
3	6535.00	7.44	91.85	99.29	200.00	-100.71	Peak	255	298	P
4	7135.00	8.91	52.40	61.31	88.20	-26.89	Peak	255	298	P
5	13070.00	17.01	34.81	51.82	88.20	-36.38	Peak	100	78	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 7, CH153		:

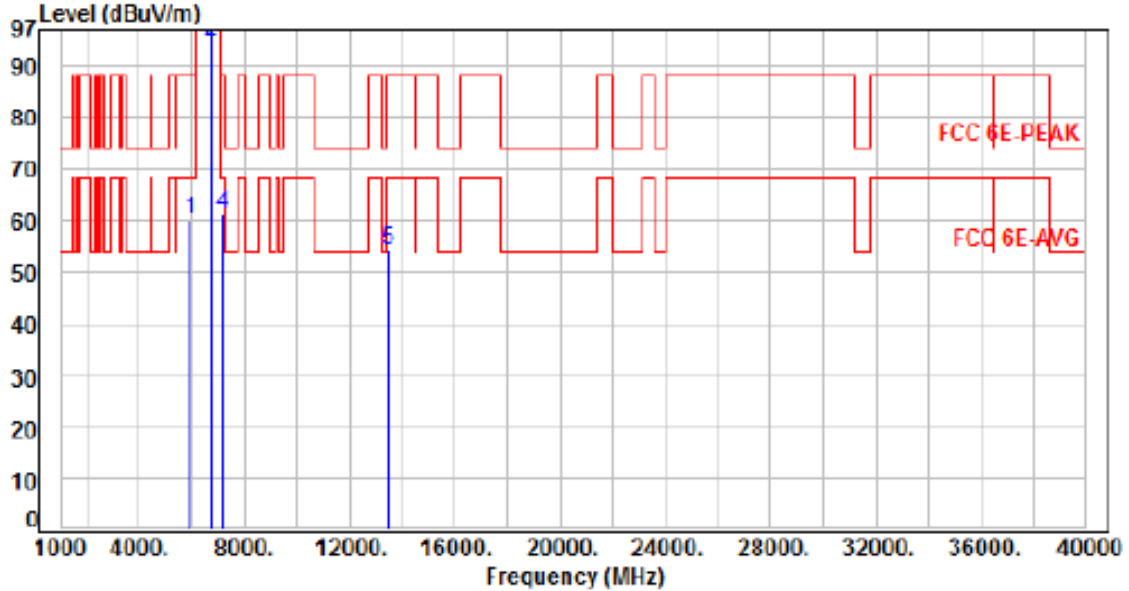


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.42	60.27	88.20	-27.93	Peak	126	29	P
2	6715.00	8.18	86.68	94.86	200.00	-105.14	Average	126	29	P
3	6715.00	8.18	98.31	106.49	200.00	-93.51	Peak	126	29	P
4	7135.00	8.91	52.30	61.21	88.20	-26.99	Peak	126	29	P
5	13430.00	18.50	35.81	54.31	88.20	-33.89	Peak	100	136	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming(1GHz ~ 18GHz)

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 5, Band 7, CH153		:	

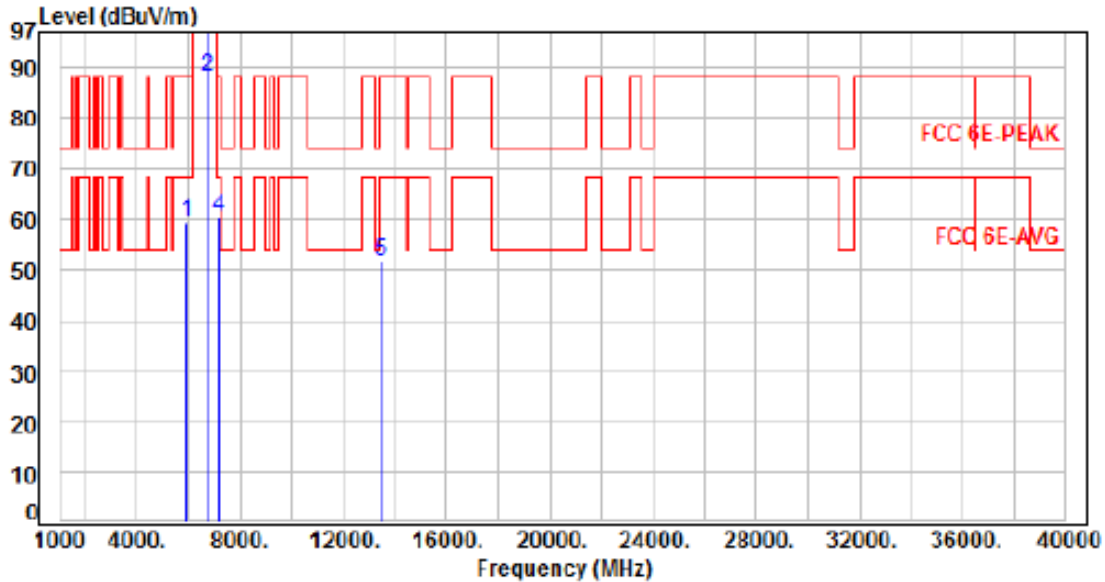


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.65	52.38	59.23	88.20	-28.97	Peak	265	303	P
2	6715.00	8.18	79.82	88.60	200.00	-112.00	Average	265	303	P
3	6715.00	8.18	94.92	103.10	200.00	-96.90	Peak	265	303	P
4	7135.00	8.91	51.58	60.49	88.20	-27.71	Peak	265	303	P
5	13430.00	18.50	33.08	51.58	88.20	-36.62	Peak	100	331	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 7, CH181		:

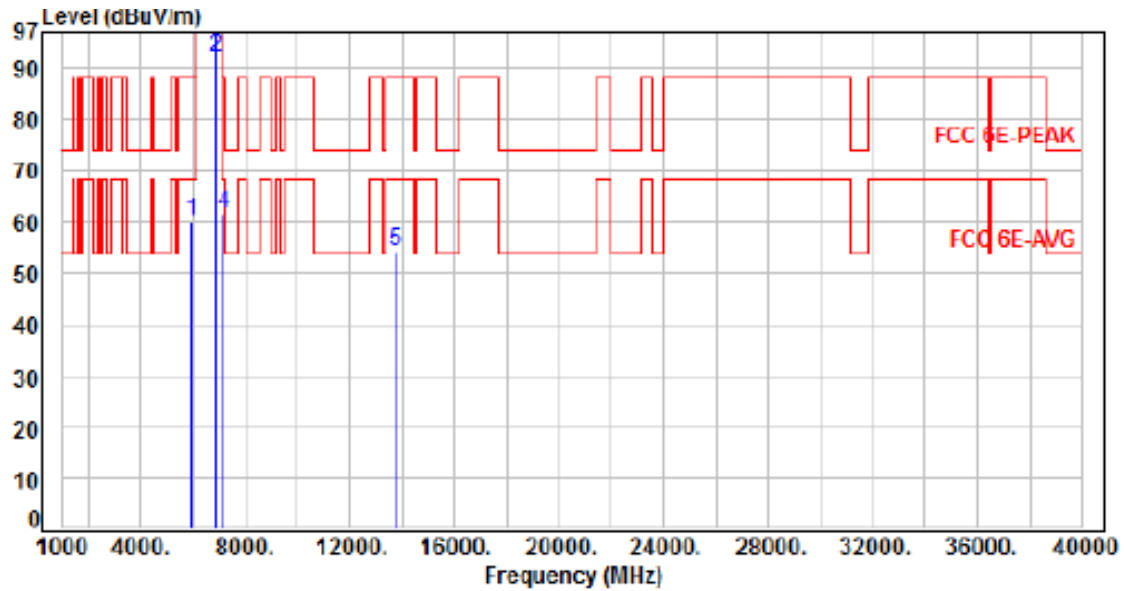


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.38	60.23	88.20	-27.97	Peak	100	25	P
2	6885.00	8.42	83.82	92.24	200.00	-107.76	Average	100	25	P
3	6885.00	8.42	97.52	105.94	200.00	-94.06	Peak	100	25	P
4	7135.00	8.91	52.54	61.45	88.20	-26.75	Peak	100	25	P
5	13710.00	19.28	34.94	54.22	88.20	-33.98	Peak	100	61	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 7, CH181		

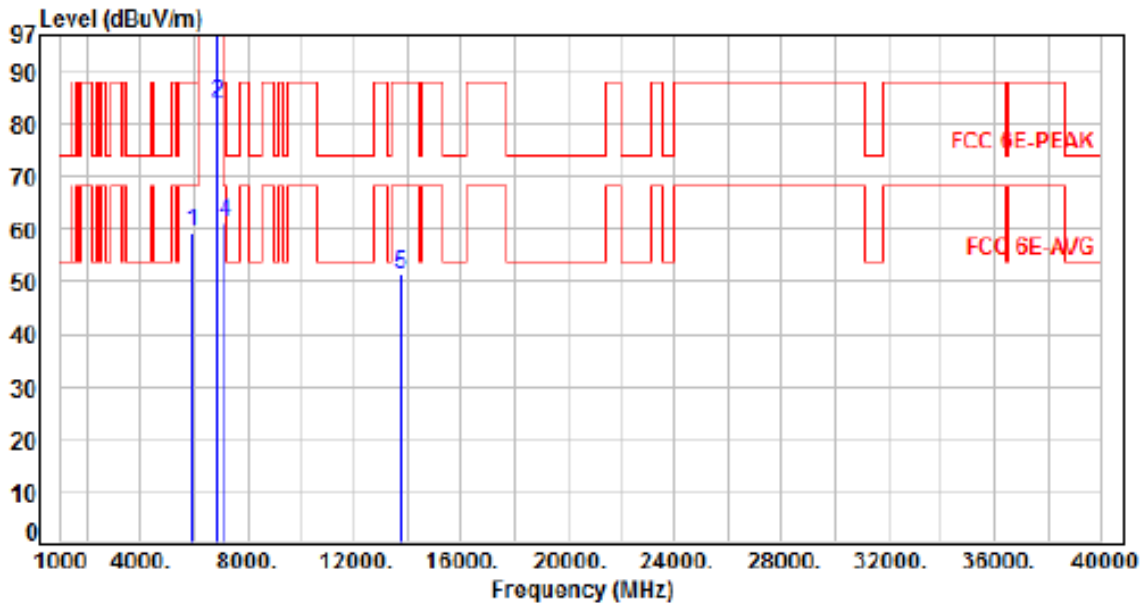


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	52.58	59.43	88.20	-28.77	Peak	233	69	P
2	6885.00	8.42	75.81	84.23	200.00	-115.77	Average	233	69	P
3	6885.00	8.42	91.82	100.24	200.00	-99.76	Peak	233	69	P
4	7135.00	8.91	52.29	61.20	88.20	-27.00	Peak	233	69	P
5	13710.00	19.28	31.98	51.26	88.20	-36.94	Peak	100	139	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 7, CH123		:

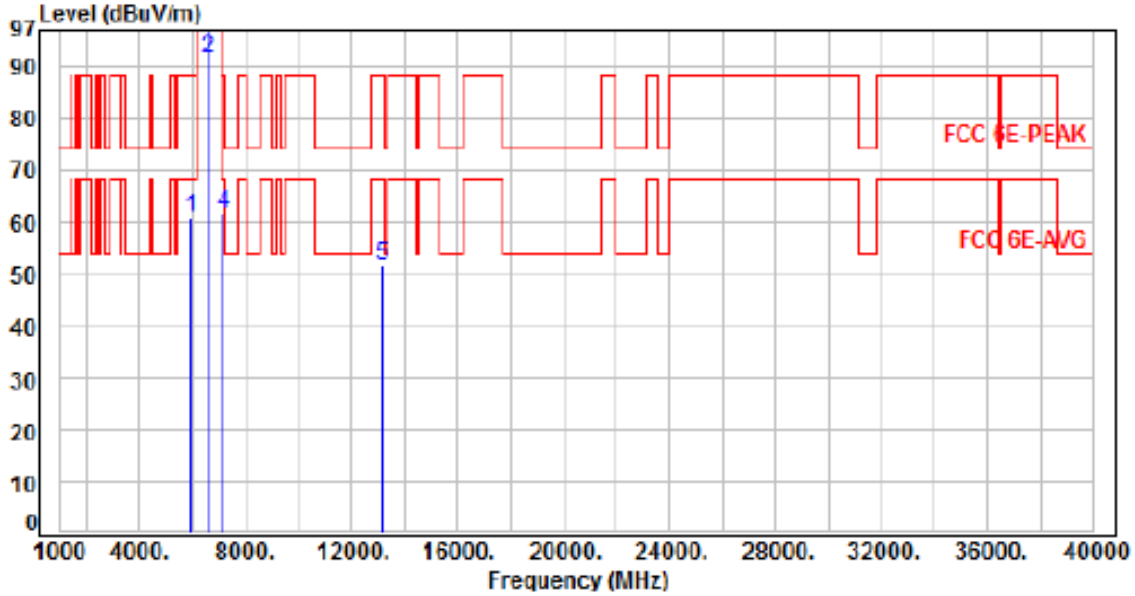

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.98	60.83	88.20	-27.37	Peak	110	23	P
2	6565.00	7.61	83.82	91.43	200.00	-108.57	Average	110	23	P
3	6565.00	7.61	96.82	104.43	200.00	-95.57	Peak	110	23	P
4	7135.00	8.91	52.56	61.47	88.20	-26.73	Peak	110	23	P
5	13130.00	17.26	34.55	51.81	88.20	-36.39	Peak	100	175	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 6, Band 7, CH123		:	

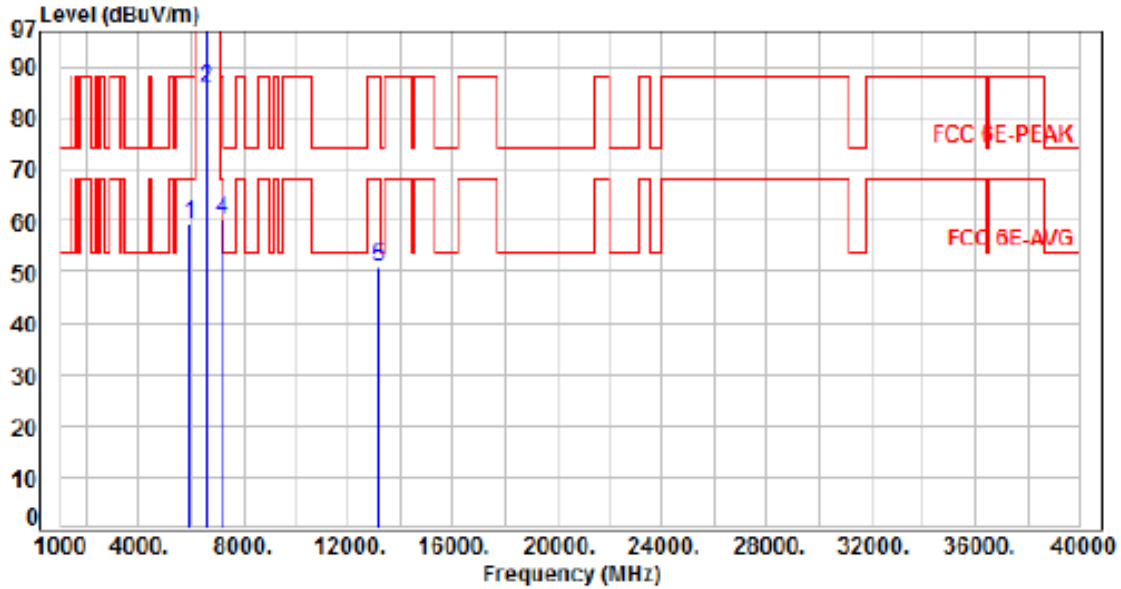


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	52.66	59.51	88.20	-28.69	Peak	276	299	P
2	6565.00	7.61	78.38	85.99	200.00	-114.01	Average	276	299	P
3	6565.00	7.61	92.77	100.38	200.00	-99.62	Peak	276	299	P
4	7135.00	8.91	51.38	60.29	88.20	-27.91	Peak	276	299	P
5	13130.00	17.26	33.57	50.83	88.20	-37.37	Peak	100	167	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 7, CH155		:

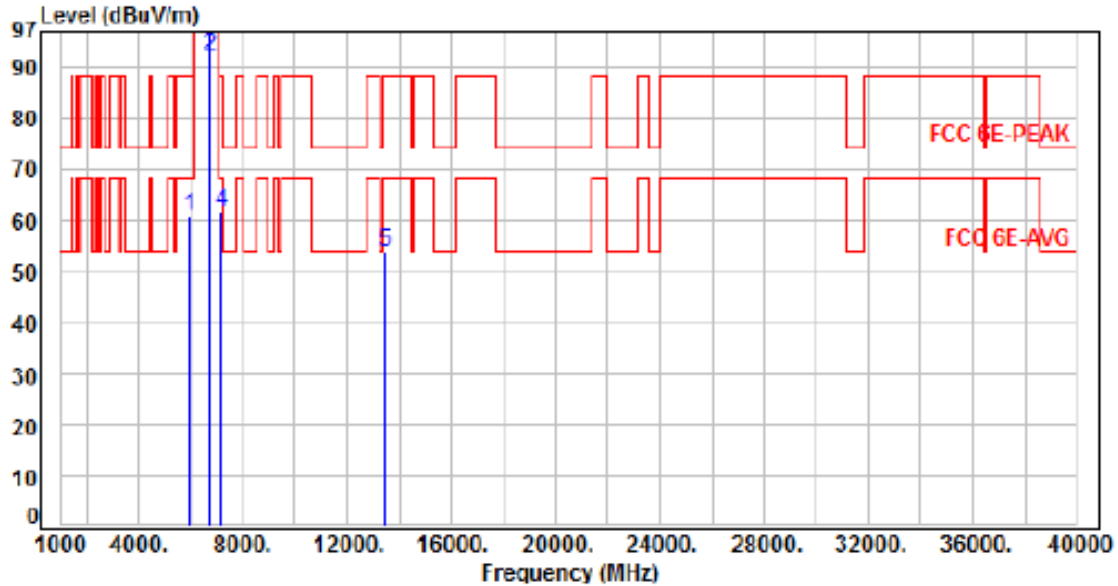

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.88	60.73	88.20	-27.47	Peak	100	20	P
2	6725.00	8.18	84.03	92.21	200.00	-107.79	Average	100	20	P
3	6725.00	8.18	97.21	105.39	200.00	-94.61	Peak	100	20	P
4	7135.00	8.91	52.58	61.49	88.20	-26.71	Peak	100	20	P
5	13450.00	18.56	35.12	53.68	88.20	-34.52	Peak	100	81	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 6, Band 7, CH155		:	

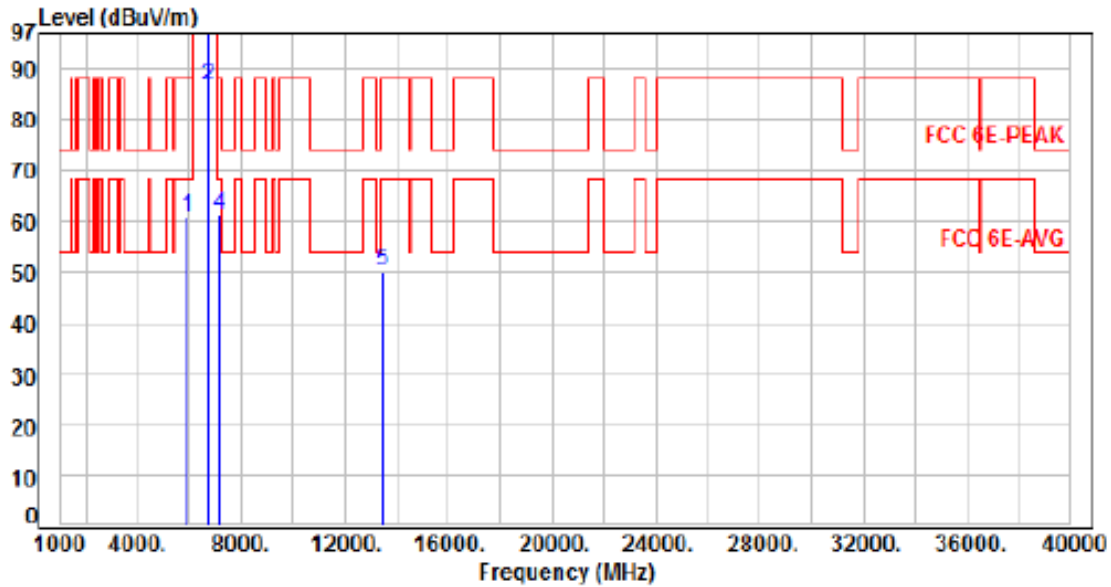

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.98	60.83	88.20	-27.37	Peak	256	299	P
2	6725.00	8.18	78.54	86.72	200.00	-113.28	Average	256	299	P
3	6725.00	8.18	92.76	100.94	200.00	-99.06	Peak	256	299	P
4	7135.00	8.91	52.21	61.12	88.20	-27.08	Peak	256	299	P
5	13450.00	18.56	31.65	50.21	88.20	-37.99	Peak	100	302	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 7, CH179		:

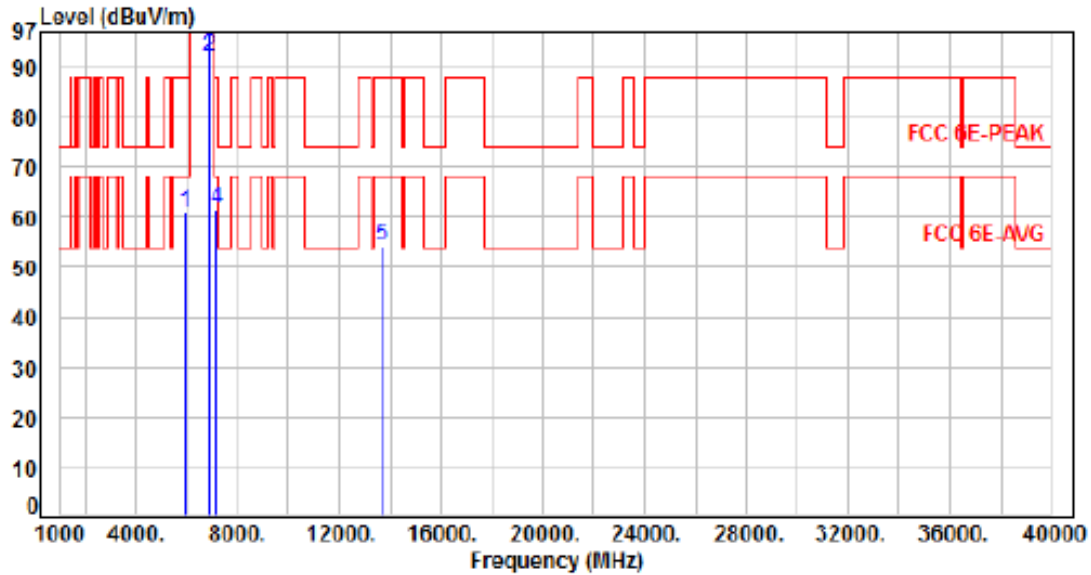


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.02	60.87	88.20	-27.33	Peak	102	21	P
2	6845.00	8.33	83.77	92.10	200.00	-107.90	Average	102	21	P
3	6845.00	8.33	96.60	104.93	200.00	-95.07	Peak	102	21	P
4	7135.00	8.91	52.76	61.69	88.20	-26.51	Peak	102	21	P
5	13690.00	19.23	34.99	54.22	88.20	-33.98	Peak	100	100	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 6, Band 7, CH179		:	

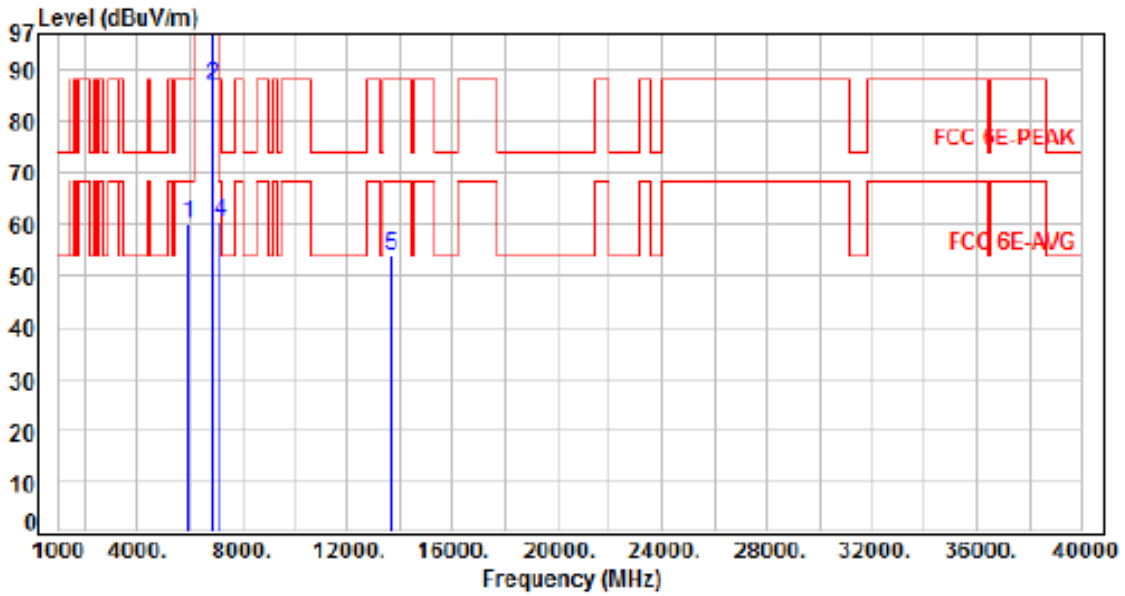


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.31	60.16	88.20	-28.04	Peak	244	69	P
2	6845.00	8.33	78.61	86.94	200.00	-113.06	Average	244	69	P
3	6845.00	8.33	92.88	101.21	200.00	-98.79	Peak	244	69	P
4	7135.00	8.91	51.69	60.60	88.20	-27.60	Peak	244	69	P
5	13690.00	19.23	34.53	53.76	88.20	-34.44	Peak	100	207	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 7, CH135		:

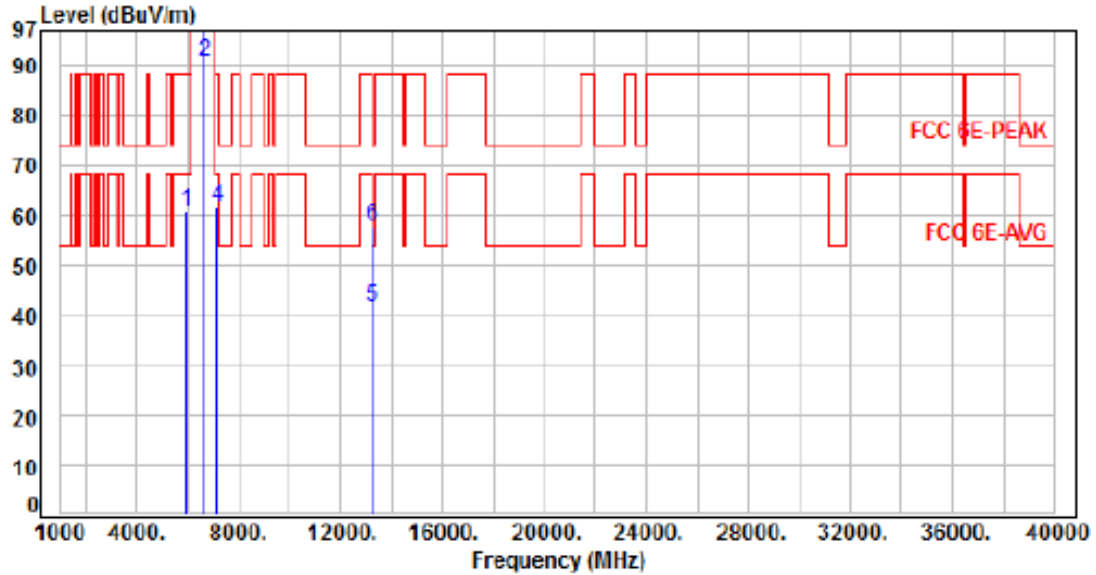


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.98	60.83	88.20	-27.37	Peak	100	21	P
2	6625.00	7.94	82.81	90.75	200.00	-109.25	Average	100	21	P
3	6625.00	7.94	95.96	103.90	200.00	-96.10	Peak	100	21	P
4	7135.00	8.91	52.55	61.46	88.20	-26.74	Peak	100	21	P
5	13250.00	17.75	23.81	41.56	54.00	-12.44	Average	100	99	P
6	13250.00	17.75	40.23	57.98	74.00	-16.02	Peak	100	99	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 7, Band 7, CH135		:	

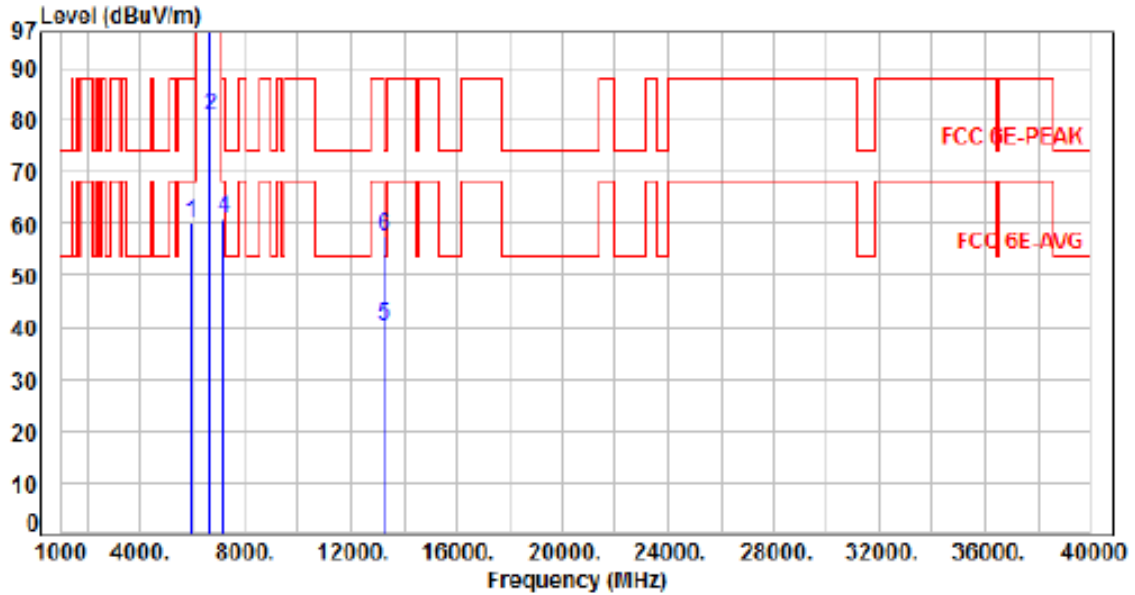


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.28	60.13	88.20	-28.07	Peak	258	294	P
2	6625.00	7.94	72.81	80.75	200.00	-119.25	Average	258	294	P
3	6625.00	7.94	92.74	100.68	200.00	-99.32	Peak	258	294	P
4	7135.00	8.91	52.03	60.94	88.20	-27.26	Peak	258	294	P
5	13250.00	17.75	22.29	40.04	54.00	-13.96	Average	100	360	P
6	13250.00	17.75	39.66	57.41	74.00	-16.59	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 7, CH151		:

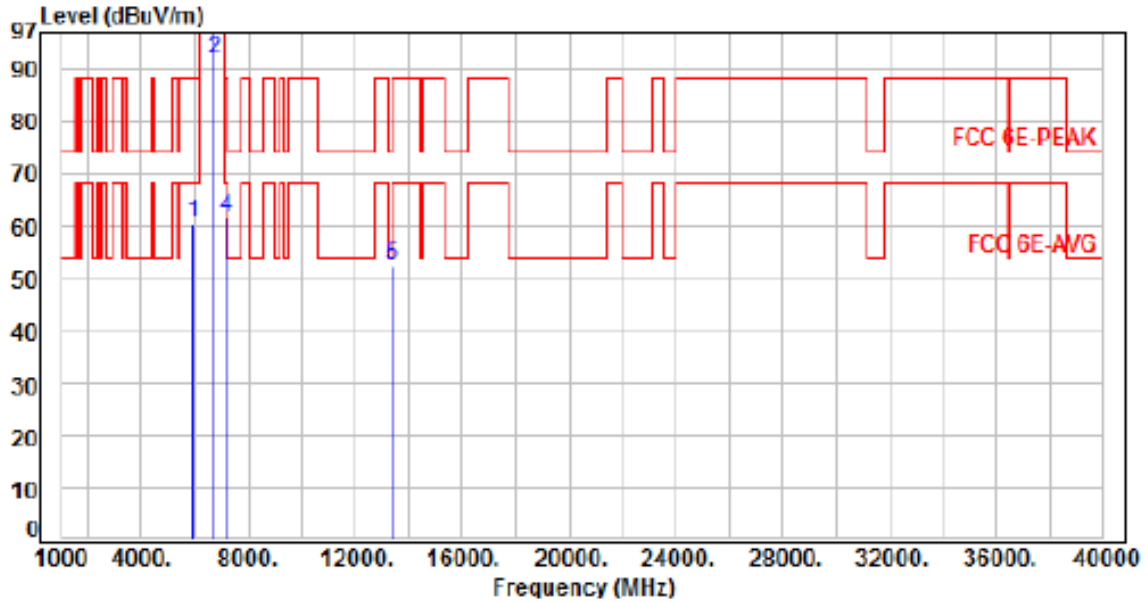


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.67	60.52	88.20	-27.68	Peak	121	20	P
2	6705.00	8.18	83.76	91.94	200.00	-108.06	Average	121	20	P
3	6785.00	8.18	92.57	100.75	200.00	-99.25	Peak	121	20	P
4	7135.00	8.91	52.69	61.60	88.20	-26.60	Peak	121	20	P
5	13410.00	18.44	34.03	52.47	88.20	-35.73	Peak	100	69	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 7, Band 7, CH151		:	

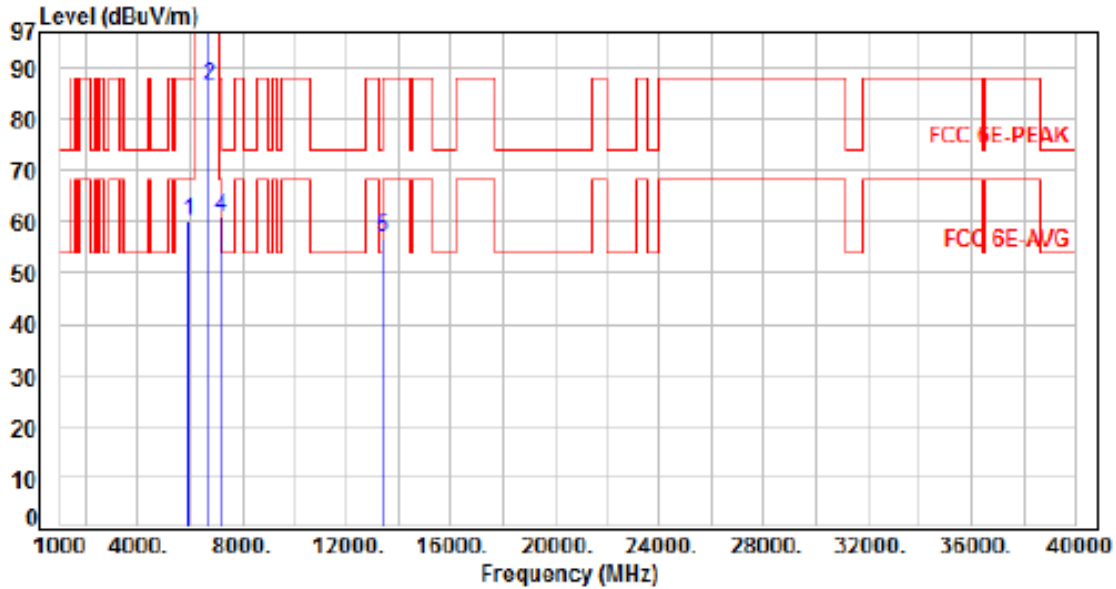


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.43	60.28	88.20	-27.92	Peak	262	296	P
2	6705.00	8.18	78.63	86.81	200.00	-113.19	Average	262	296	P
3	6705.00	8.18	92.88	101.06	200.00	-98.94	Peak	262	296	P
4	7135.00	8.91	52.00	60.91	88.20	-27.29	Peak	262	296	P
5	13410.00	18.44	38.21	56.65	88.20	-31.55	Peak	100	330	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 7, CH167		:

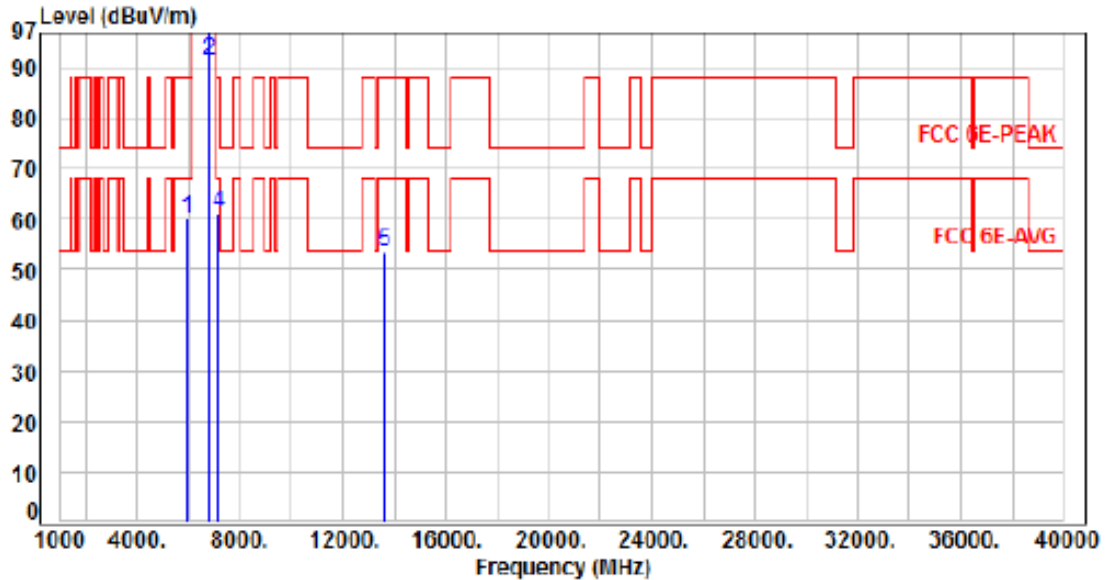


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	53.38	60.23	88.20	-27.97	Peak	100	20	P
2	6785.00	8.28	83.28	91.56	200.00	-108.44	Average	100	20	P
3	6785.00	8.28	92.44	100.72	200.00	-99.28	Peak	100	20	P
4	7135.00	8.91	52.42	61.33	88.20	-26.87	Peak	100	20	P
5	13570.00	18.80	34.53	53.33	88.20	-34.87	Peak	100	77	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 7, CH167		

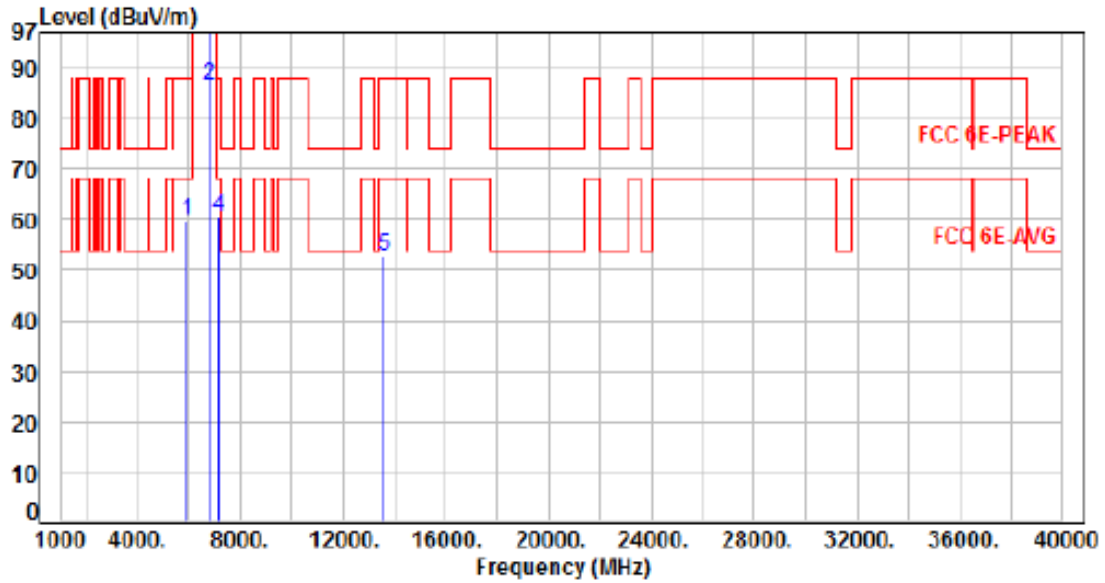


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	52.77	59.62	88.20	-28.58	Peak	217	67	P
2	6785.00	8.28	78.43	86.71	200.00	-113.29	Average	217	67	P
3	6785.00	8.28	92.67	100.95	200.00	-99.05	Peak	217	67	P
4	7135.00	8.91	51.71	60.62	88.20	-27.58	Peak	217	67	P
5	13570.00	18.80	33.81	52.61	88.20	-35.59	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 7, CH143		:

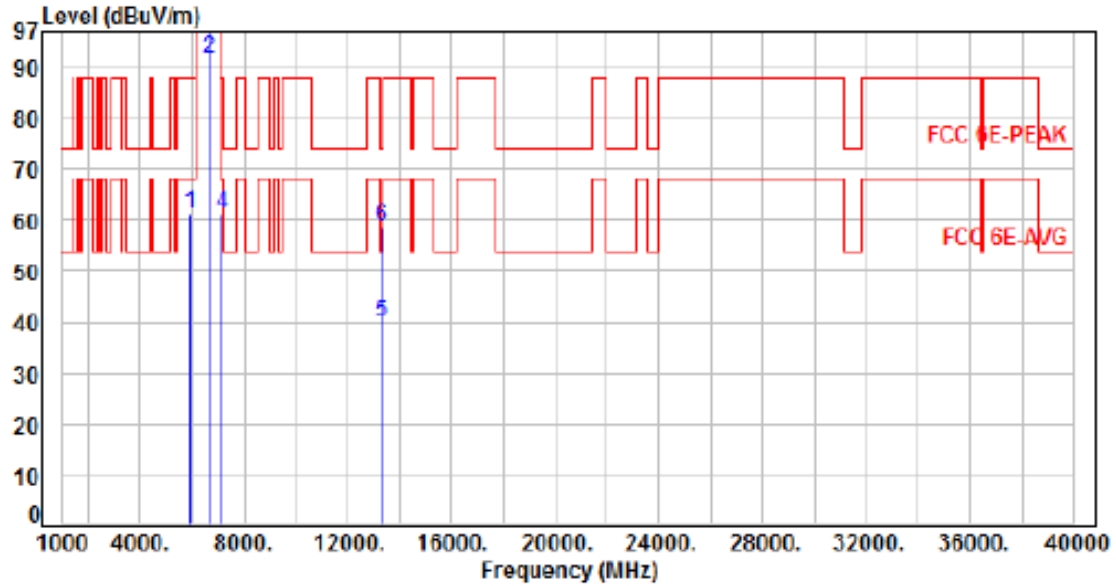


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.23	61.08	88.20	-27.12	Peak	100	22	P
2	6665.00	8.09	83.61	91.70	200.00	-108.30	Average	100	22	P
3	6665.00	8.09	97.58	105.67	200.00	-94.33	Peak	100	22	P
4	7135.00	8.91	52.50	61.41	88.20	-26.79	Peak	100	22	P
5	13330.00	18.06	21.91	39.97	54.00	-14.03	Average	100	97	P
6	13330.00	18.06	40.57	58.63	74.00	-15.37	Peak	100	97	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 8, Band 7, CH143		:	

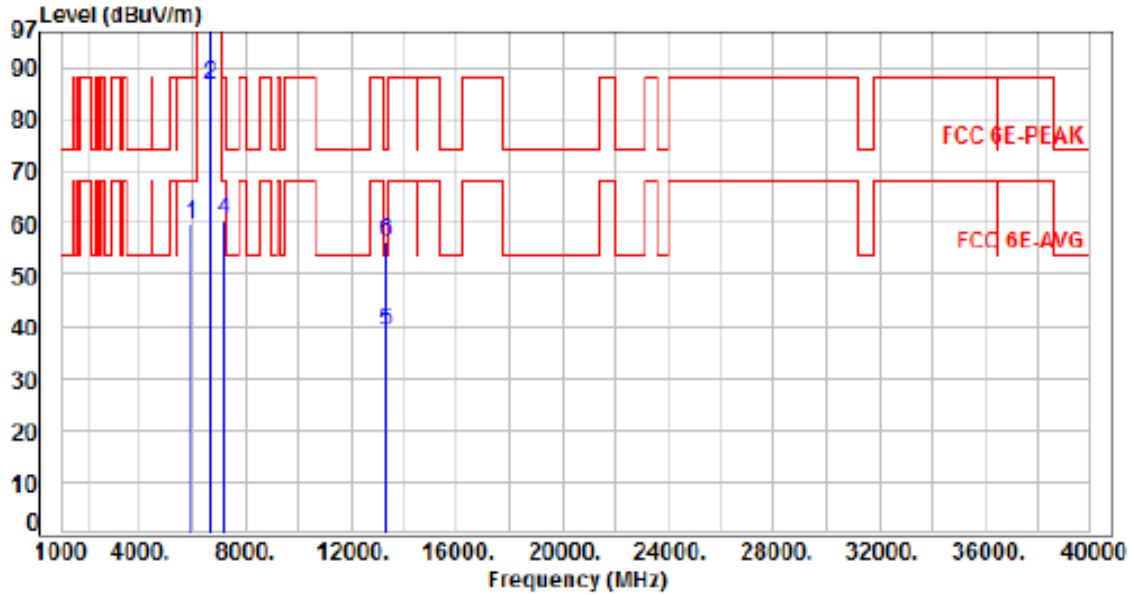


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azinuth (deg)	P/F
1	5925.00	6.85	52.91	59.76	88.20	-28.44	Peak	266	299	P
2	6665.00	8.09	78.62	86.71	200.00	-113.29	Average	266	299	P
3	6665.00	8.09	91.75	99.84	200.00	-100.16	Peak	266	299	P
4	7135.00	8.91	51.71	60.62	88.20	-27.58	Peak	266	299	P
5	13330.00	18.06	21.02	39.08	54.00	-14.92	Average	100	128	P
6	13330.00	18.06	38.42	56.48	74.00	-17.52	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 7 Straddle Channel, CH185		

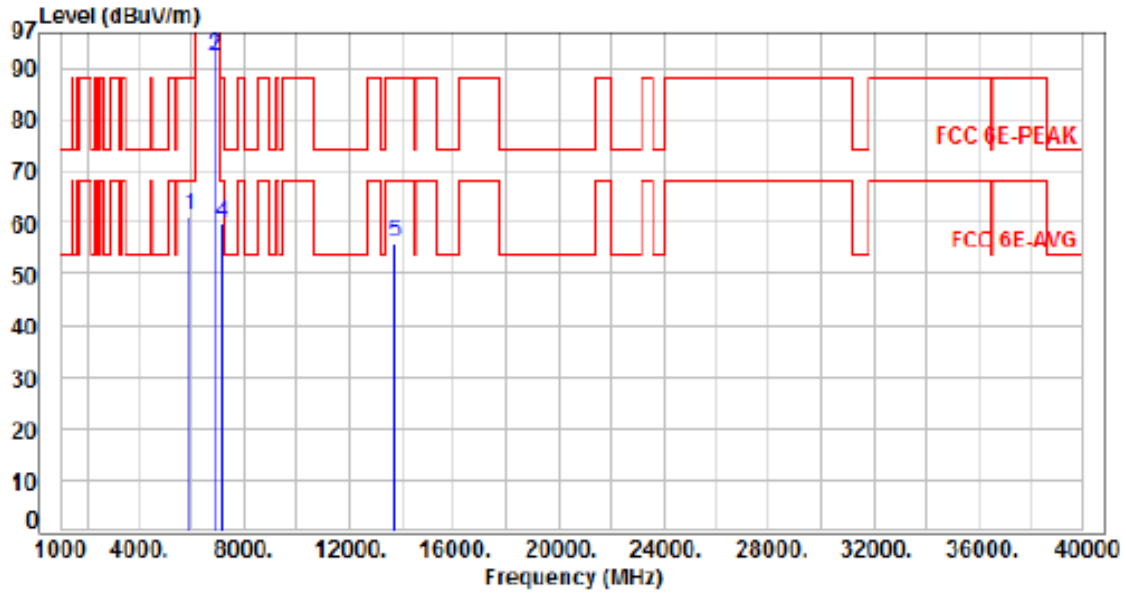

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.36	61.21	88.20	-26.99	Peak	274	288	P
2	6875.00	8.40	83.79	92.19	200.00	-107.81	Average	274	288	P
3	6875.00	8.40	96.82	105.22	200.00	-94.78	Peak	274	288	P
4	7135.00	8.91	50.90	59.81	88.20	-28.39	Peak	274	288	P
5	13750.00	19.29	36.83	56.12	88.20	-32.08	Peak	100	226	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 7 Straddle Channel, CH185		:

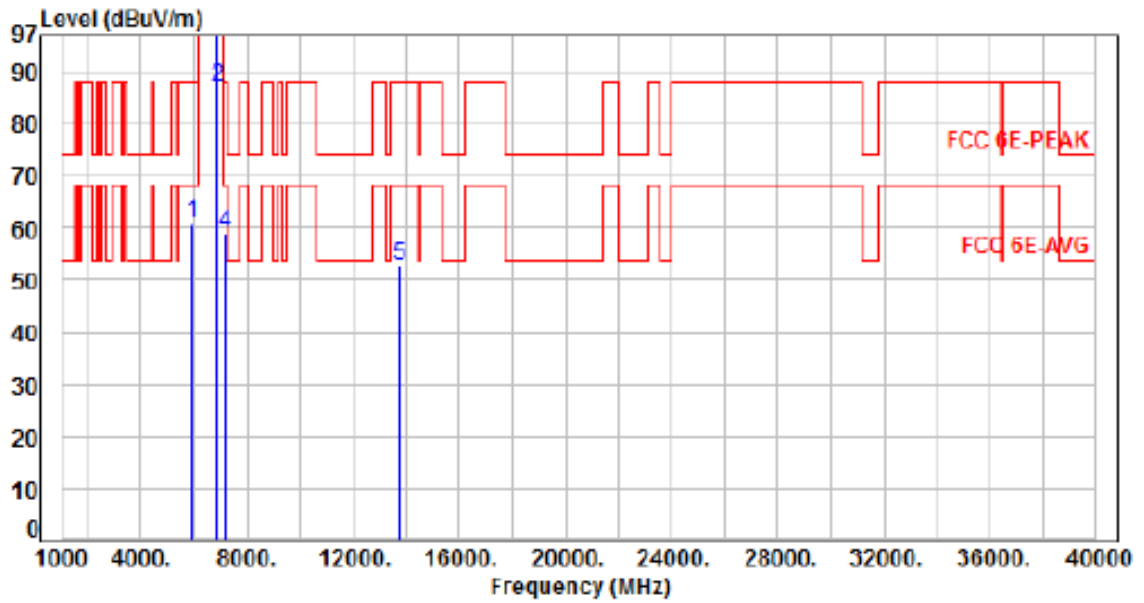


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.10	60.95	88.20	-27.25	Peak	251	119	P
2	6875.00	8.40	78.61	87.01	200.00	-112.99	Average	251	119	P
3	6875.00	8.40	92.06	100.46	200.00	-99.54	Peak	251	119	P
4	7135.00	8.91	50.21	59.12	88.20	-29.08	Peak	251	119	P
5	13750.00	19.29	33.61	52.90	88.20	-35.30	Peak	100	218	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 7 Straddle Channel, CH187		:

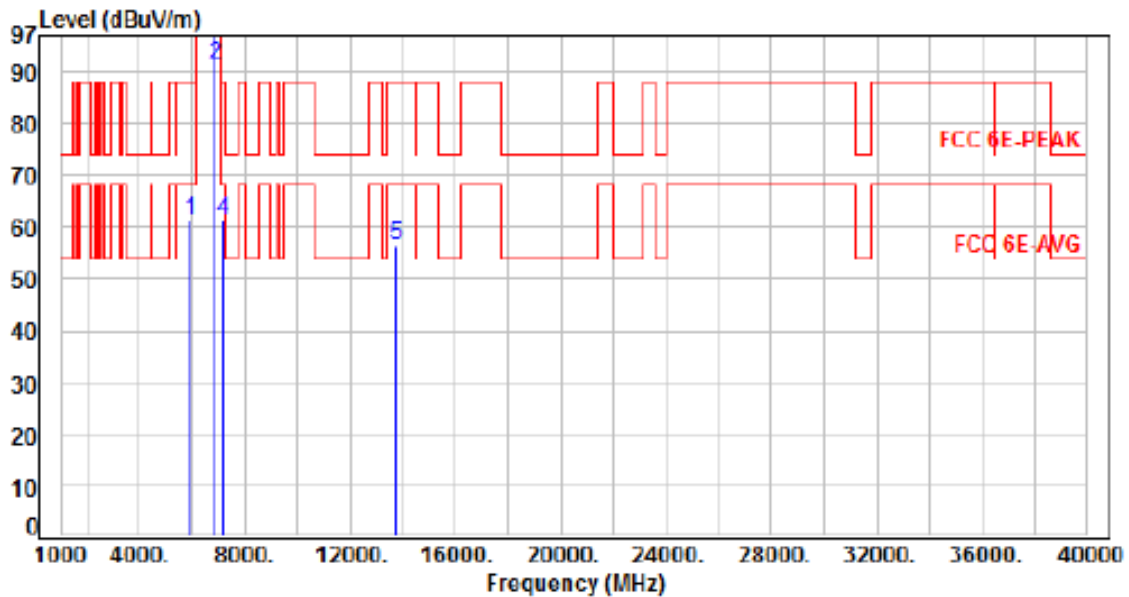


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.41	61.26	88.20	-26.94	Peak	268	293	P
2	6885.00	8.42	82.96	91.38	200.00	-108.62	Average	268	293	P
3	6885.00	8.42	96.89	105.31	200.00	-94.69	Peak	268	293	P
4	7135.00	8.91	52.21	61.12	88.20	-27.08	Peak	268	293	P
5	13770.00	19.30	37.21	56.51	88.20	-31.69	Peak	100	262	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 7 Straddle Channel, CH187		:

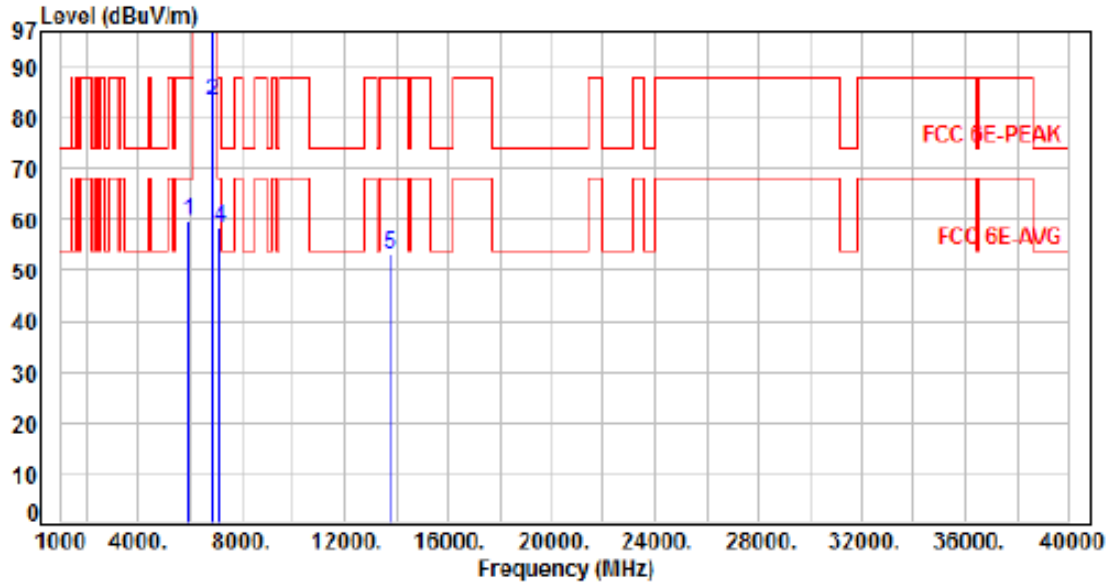


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	52.86	59.71	88.20	-28.49	Peak	224	106	P
2	6885.00	8.42	74.92	83.34	200.00	-116.66	Average	224	106	P
3	6885.00	8.42	91.99	100.41	200.00	-99.59	Peak	224	106	P
4	7135.00	8.91	49.31	58.22	88.20	-29.98	Peak	224	106	P
5	13770.00	19.30	33.86	53.16	88.20	-35.04	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, Band 7 Straddle Channel, CH183		:

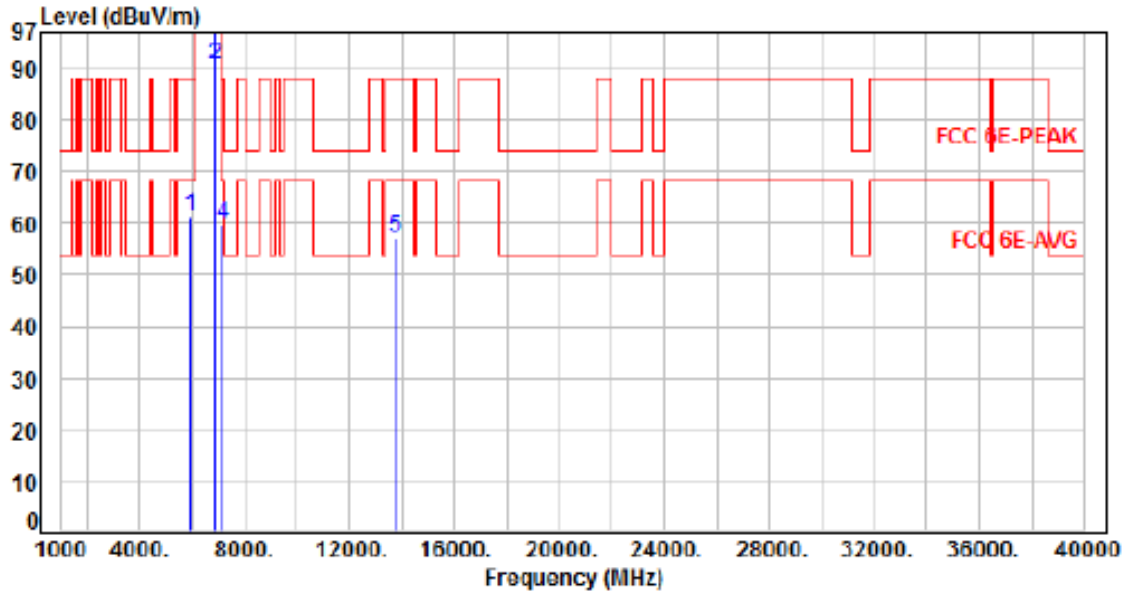

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.42	61.27	88.20	-26.93	Peak	283	269	P
2	6865.00	8.38	82.35	90.73	200.00	-109.27	Average	283	269	P
3	6865.00	8.38	96.87	105.25	200.00	-94.75	Peak	283	269	P
4	7135.00	8.91	50.89	59.80	88.20	-28.40	Peak	283	269	P
5	13730.00	19.29	37.87	57.16	88.20	-31.04	Peak	100	232	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, Band 7 Straddle Channel, CH183		:

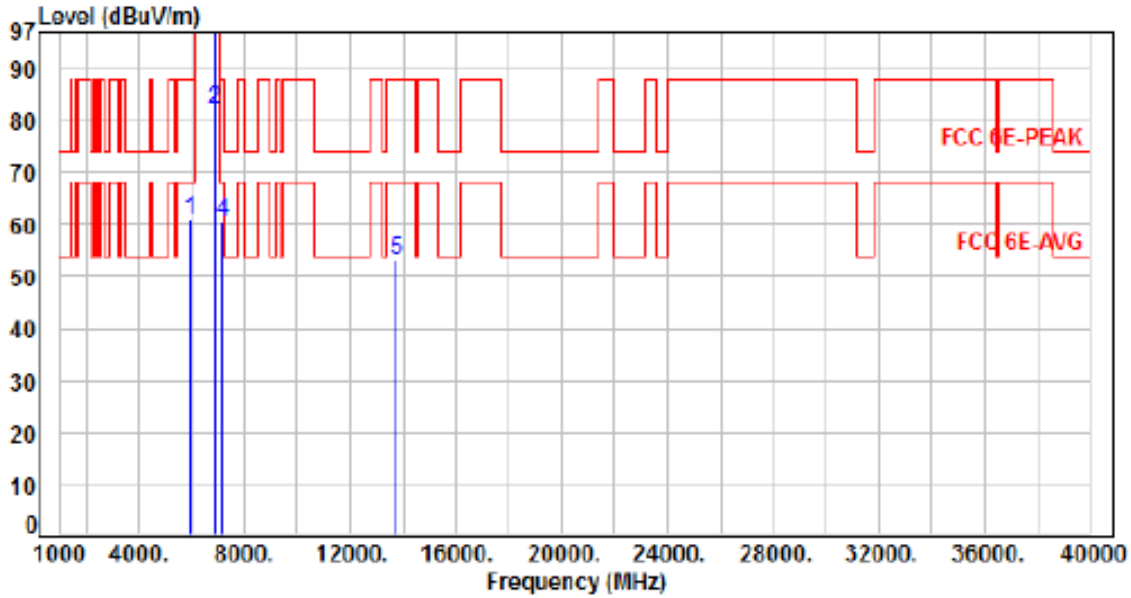


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.06	60.91	88.20	-27.29	Peak	241	113	P
2	6865.00	8.38	73.95	82.33	200.00	-117.67	Average	241	113	P
3	6865.00	8.38	91.65	100.03	200.00	-99.97	Peak	241	113	P
4	7135.00	8.91	51.51	60.42	88.20	-27.78	Peak	241	113	P
5	13730.00	19.29	33.65	52.94	88.20	-35.26	Peak	100	215	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 8, Band 7 Straddle Channel, CH175		

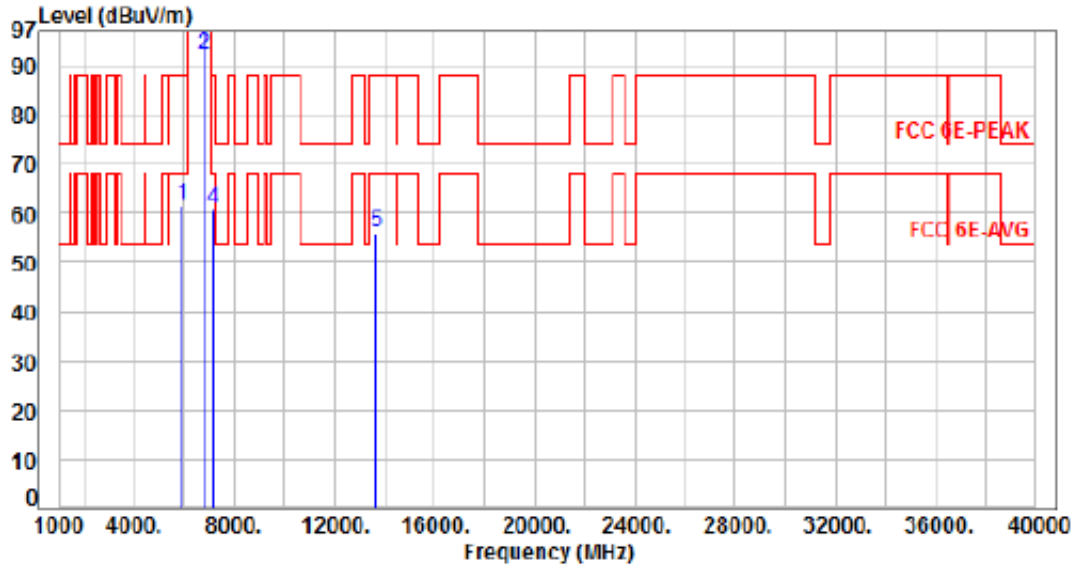


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.58	61.43	88.20	-26.77	Peak	256	294	P
2	6825.00	8.32	83.93	92.25	200.00	-107.75	Average	265	294	P
3	6825.00	8.32	97.82	106.14	200.00	-93.86	Peak	265	294	P
4	7135.00	8.91	52.11	61.02	88.20	-27.18	Peak	265	294	P
5	13650.00	19.06	37.11	56.17	88.20	-32.03	Peak	100	177	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 8, Band 7 Straddle Channel, CH175		:

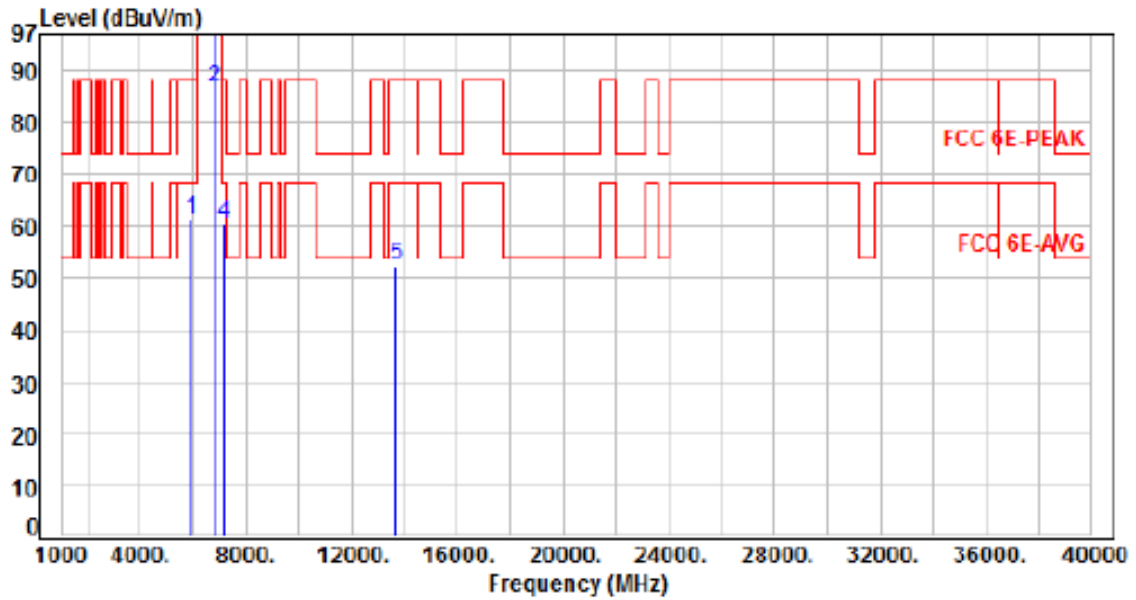

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	6.85	54.30	61.15	88.20	-27.05	Peak	303	292	P
2	6825.00	8.32	78.37	86.69	200.00	-113.31	Average	303	292	P
3	6825.00	8.32	92.62	100.94	200.00	-99.06	Peak	303	292	P
4	7135.00	8.91	51.68	60.59	88.20	-27.61	Peak	303	292	P
5	13650.00	19.06	33.37	52.43	88.20	-35.77	Peak	100	383	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 8, CH189		:

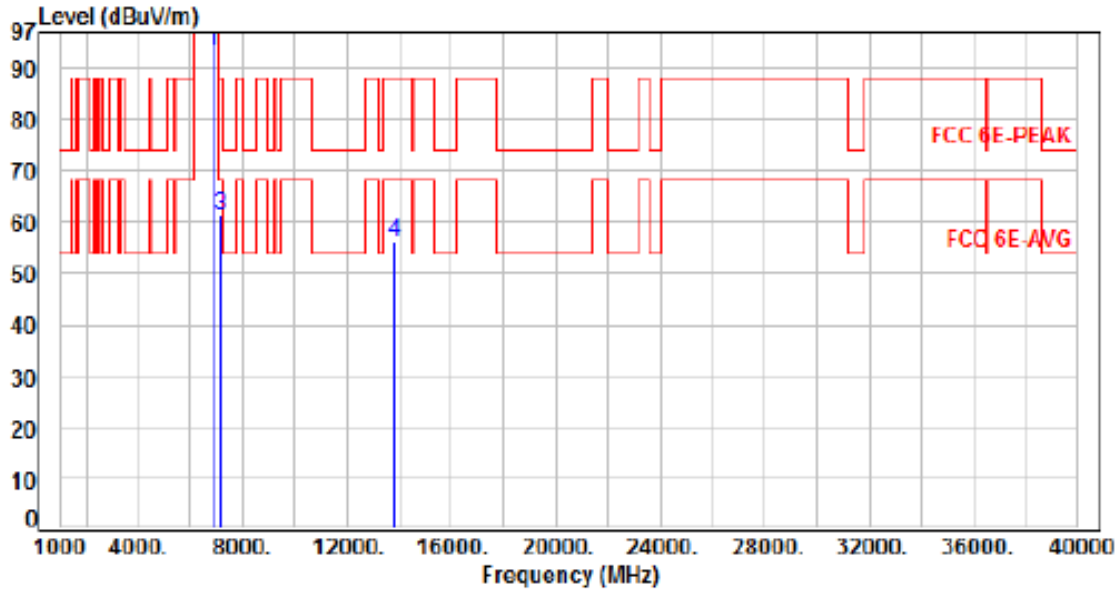


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	8.44	84.74	93.18	200.00	-106.82	Average	100	27	P
2	6895.00	8.44	98.27	106.71	200.00	-93.29	Peak	100	27	P
3	7135.00	8.91	52.43	61.34	88.20	-26.86	Peak	100	27	P
4	13790.00	19.31	36.80	56.11	88.20	-32.09	Peak	100	118	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 5, Band 8, CH189		:	

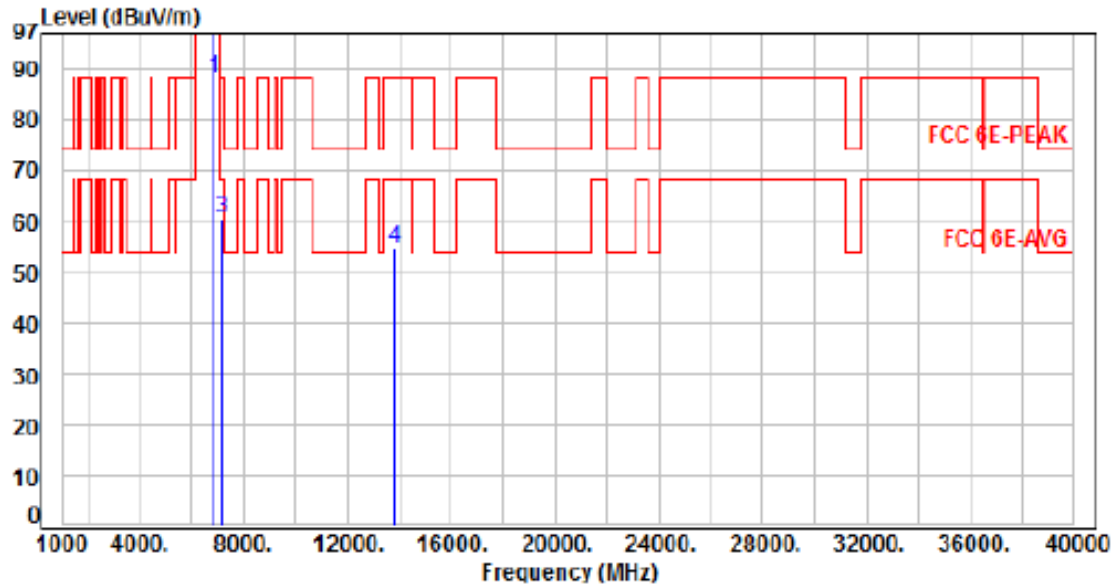


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	8.44	79.63	88.07	200.00	-111.93	Average	100	54	P
2	6895.00	8.44	94.67	103.11	200.00	-96.89	Peak	100	54	P
3	7135.00	8.91	51.71	60.62	88.20	-27.58	Peak	100	54	P
4	13790.00	19.31	35.42	54.73	88.20	-33.47	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	: DC 12V From adapter (120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 8, CH213		:

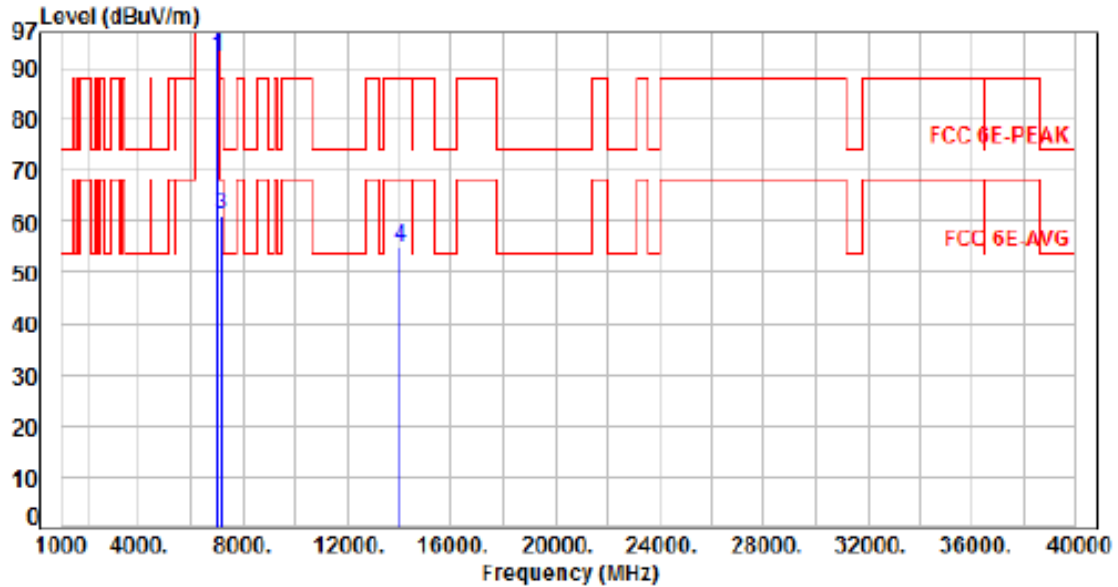


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	8.61	83.48	92.09	200.00	-107.91	Average	100	333	P
2	7015.00	8.61	93.76	102.37	200.00	-97.63	Peak	100	333	P
3	7135.00	8.91	52.34	61.25	88.20	-26.95	Peak	100	333	P
4	14030.00	19.99	34.86	54.85	88.20	-33.35	Peak	100	241	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



BeamForming

Power	:	DC 12V From adapter (120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 5, Band 8, CH213		:	

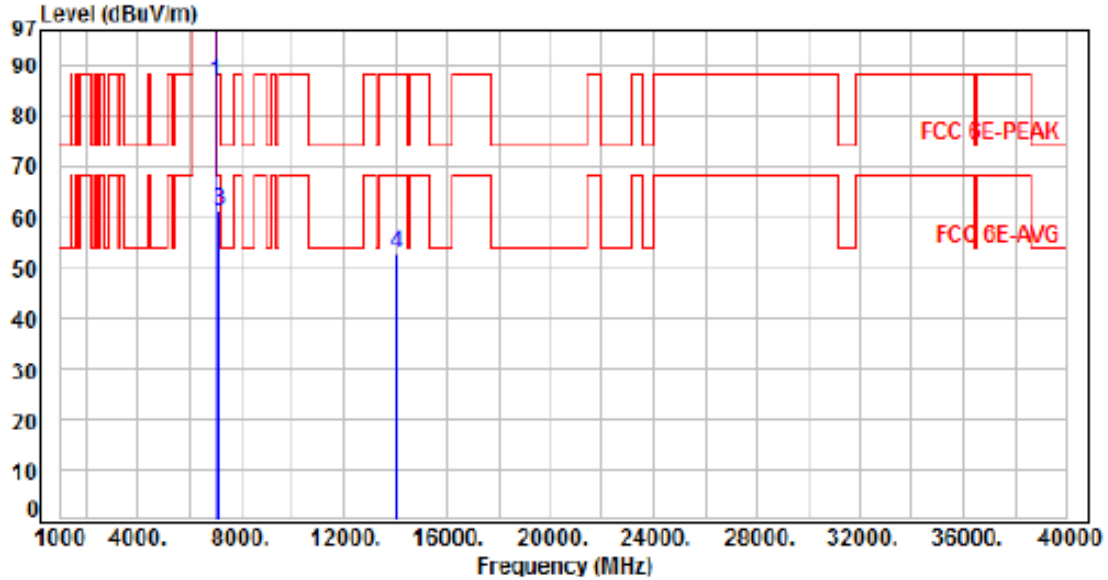

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7815.00	8.61	77.92	86.53	200.00	-113.47	Average	215	56	P
2	7815.00	8.61	92.06	100.67	200.00	-99.33	Peak	215	56	P
3	7135.00	8.91	52.26	61.17	88.20	-27.03	Peak	215	56	P
4	14030.00	19.99	32.58	52.57	88.20	-35.63	Peak	100	216	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor