

## Partial FCC Test Report

### (PART 24)

**Report No.:** RFBHTZ-WTW-P22090089-3

**FCC ID:** PPQ202008EG91NAXD

**Test Model:** EG91NAXD

**Received Date:** Sep. 16, 2022

**Test Date:** Feb. 09 ~ Feb. 10, 2023

**Issued Date:** Mar. 15, 2023

**Applicant:** LITE-ON Technology Corp.

**Address:** Bldg. C, 90, Chien 1 Rd., Chung-Ho, New Taipei City 23585, Taiwan  
(R.O.C.)

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results.....</b>	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units .....	9
3.3 Test Mode Applicability and Tested Channel Detail .....	10
3.4 EUT Operating Conditions .....	11
3.5 General Description of Applied Standards and references.....	11
<b>4 Test Types and Results .....</b>	<b>12</b>
4.1 Output Power Measurement.....	12
4.1.1 Limits of Output Power Measurement .....	12
4.1.2 Test Procedures.....	12
4.1.3 Test Setup.....	13
4.1.4 Test Results .....	14
4.2 Radiated Emission Measurement.....	21
4.2.1 Limits of Radiated Emission Measurement .....	27
4.2.2 Test Procedure .....	27
4.2.3 Deviation from Test Standard .....	27
4.2.4 Test Setup.....	28
4.2.5 Test Results .....	29
<b>5 Pictures of Test Arrangements.....</b>	<b>47</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>48</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBHTZ-WTW-P22090089-3	Original Release	Mar. 15, 2023

## 1 Certificate of Conformity

**Product:** EG91NAXD

**Brand:** LITEON

**Test Model:** EG91NAXD

**Sample Status:** Engineering Sample

**Applicant:** LITE-ON Technology Corp.

**Test Date:** Feb. 09 ~ Feb. 10, 2023

**Standards:** FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Gina Liu, **Date:** Mar. 15, 2023  
Gina Liu / Specialist

**Approved by :** Jeremy Lin, **Date:** Mar. 15, 2023  
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
24.232(d)	Peak to Average Ratio	N/A	Refer to Note
2.1055 24.235	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
24.238	Band Edge Measurements	N/A	Refer to Note
2.1051 24.238	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -18.01 dB at 44.55 MHz.

Note:

1. This report is a partial report, only test item of Effective Isotropic Radiated Power & Radiated Emissions were performed for this report. Other testing data please refer to TA Technology (Shanghai) Co., Ltd. report no.: R2006A0379-R2 and R2006A0379-R6.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	2.44 dB
	30 MHz ~ 200 MHz	2.95 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower &Turn Max-Full	MFA-440H	AT93021705	NA	NA
Turn Table Max-Full	MFT-201SS	NA	NA	NA
Turn Table Controller Max-Full	MG-7802	NA	NA	NA
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 27, 2022	Apr. 26, 2023
Signal Analyzer Agilent	N9010A	MY52220207	Jan. 03, 2023	Jan. 02, 2024
Pre-amplifier EMCI	EMC001340	980201	Sep. 23, 2022	Sep. 22, 2023
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	Jan. 07, 2023	Jan. 06, 2024
Pre-Amplifier EMCI	EMC 330H	980112	Oct. 01, 2022	Sep. 30, 2023
Bi_Log Antenna Schwarzbeck	VULB9168	9168-472	Oct. 21, 2022	Oct. 20, 2023
RF Coaxial Cable WORKEN	8D-FB	Cable-Ch10-01	Oct. 01, 2022	Sep. 30, 2023
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-969	Nov. 13, 2022	Nov. 12, 2023
Pre-Amplifier EMCI	EMC 012645	980115	Oct. 01, 2022	Sep. 30, 2023
RF Coaxial Cable EMCI	EMC104-SM-SM- 8000+3000	171005	Oct. 01, 2022	Sep. 30, 2023
RF Coaxial Cable HUBER SUHNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 01, 2022	Sep. 30, 2023
RF FLITER MICRO-TRONICS	BRM50716	060	Jan. 11, 2023	Jan. 10, 2024
RF FLITER MICRO-TRONICS	BRM17690	004	Jan. 11, 2023	Jan. 10, 2024
Boresight antenna tower fixture BV	BAF-02	7	NA	NA
Pre-Amplifier EMCI	EMC 184045	980116	Oct. 01, 2022	Sep. 30, 2023
Horn Antenna Schwarzbeck	BBHA 9170	148	Nov. 13, 2022	Nov. 12, 2023
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	Jul. 09, 2022	Jul. 08, 2023
RF Coaxial Cable EMCI	EMC102-KM-KM- 3000	150929	Jul. 09, 2022	Jul. 08, 2023
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 26, 2021	Aug. 25, 2023

Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HY - 966 chamber 5.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	EG91NAXD		
<b>Brand</b>	LITEON		
<b>Test Model</b>	EG91NAXD		
<b>Status of EUT</b>	Engineering Sample		
<b>Power Supply Rating</b>	208- 240Vac		
<b>Modulation Type</b>	WCDMA	QPSK	
	LTE	QPSK, 16QAM	
<b>Frequency Range</b>	WCDMA Band 2	1852.4 ~ 1907.6 MHz	
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz	
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz	
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz	
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz	
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz	
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz	
	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1914.3 MHz	
	LTE Band 25 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1913.5 MHz	
	LTE Band 25 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1912.5 MHz	
	LTE Band 25 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1910.0 MHz	
	LTE Band 25 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1907.5 MHz	
	LTE Band 25 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1905.0 MHz	
	<b>Max. EIRP Power</b>	WCDMA Band 2	245.471 mW (23.90dBm)
		QPSK	16QAM
LTE Band 2 (Channel Bandwidth: 1.4 MHz)		422.669 mW (26.26dBm)	348.337 mW (25.42dBm)
LTE Band 2 (Channel Bandwidth: 3 MHz)		396.278 mW (25.98dBm)	314.775 mW (24.98dBm)
LTE Band 2 (Channel Bandwidth: 5 MHz)		419.759 mW (26.23dBm)	331.131 mW (25.20dBm)
LTE Band 2 (Channel Bandwidth: 10 MHz)		398.107 mW (26.00dBm)	316.957 mW (25.01dBm)
LTE Band 2 (Channel Bandwidth: 15 MHz)		413.048 mW (26.16dBm)	328.095 mW (25.16dBm)
LTE Band 2 (Channel Bandwidth: 20 MHz)		423.643 mW (26.27dBm)	336.512 mW (25.27dBm)
LTE Band 25 (Channel Bandwidth: 1.4 MHz)		332.660 mW (25.22dBm)	270.396 mW (24.32dBm)
LTE Band 25 (Channel Bandwidth: 3 MHz)		306.196 mW (24.86dBm)	243.781 mW (23.87dBm)
LTE Band 25 (Channel Bandwidth: 5 MHz)		306.902 mW (24.87dBm)	233.884 mW (23.69dBm)
LTE Band 25 (Channel Bandwidth: 10 MHz)		339.625 mW (25.31dBm)	269.774 mW (24.31dBm)
LTE Band 25 (Channel Bandwidth: 15 MHz)		343.558 mW (25.36dBm)	333.426 mW (25.23dBm)

	LTE Band 25 (Channel Bandwidth: 20 MHz)	349.945 mW (25.44dBm)	271.644 mW (24.34dBm)
<b>Antenna Type</b>	Monopole Coupling with 2.7 dBi gain		
<b>Accessory Device</b>	N/A		
<b>Data Cable Supplied</b>	N/A		

Note:


1. This report is prepared for FCC class II permissive change. This report is issued as a supplementary report to TA Technology (Shanghai) Co., Ltd. report no.: R2006A0379-R2 and R2006A0379-R6. The difference compared with original report are adding end-product and antenna (Brand: Auden / Model: D32788-30). Therefore, only test item of Effective Isotropic Radiated Power & Radiated Emissions were performed for this report. Other testing data please refer to original report.
2. The EUT is authorized for use in specific End-product. Please refer to below for more details.

Model	W1-UC168-0MK1ER
<b>LTE module (FCC: PPQ202008EG91NAXD)</b>	✓
<b>Wi-Fi module (FCC: PPQLILYW131)</b>	✓
<b>RFID module (FCC: PPQRYORR2L)</b>	✓
<b>Ethernet</b>	✓
<b>LCD module</b>	✓

3. Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.



### 3.2 Configuration of System under Test

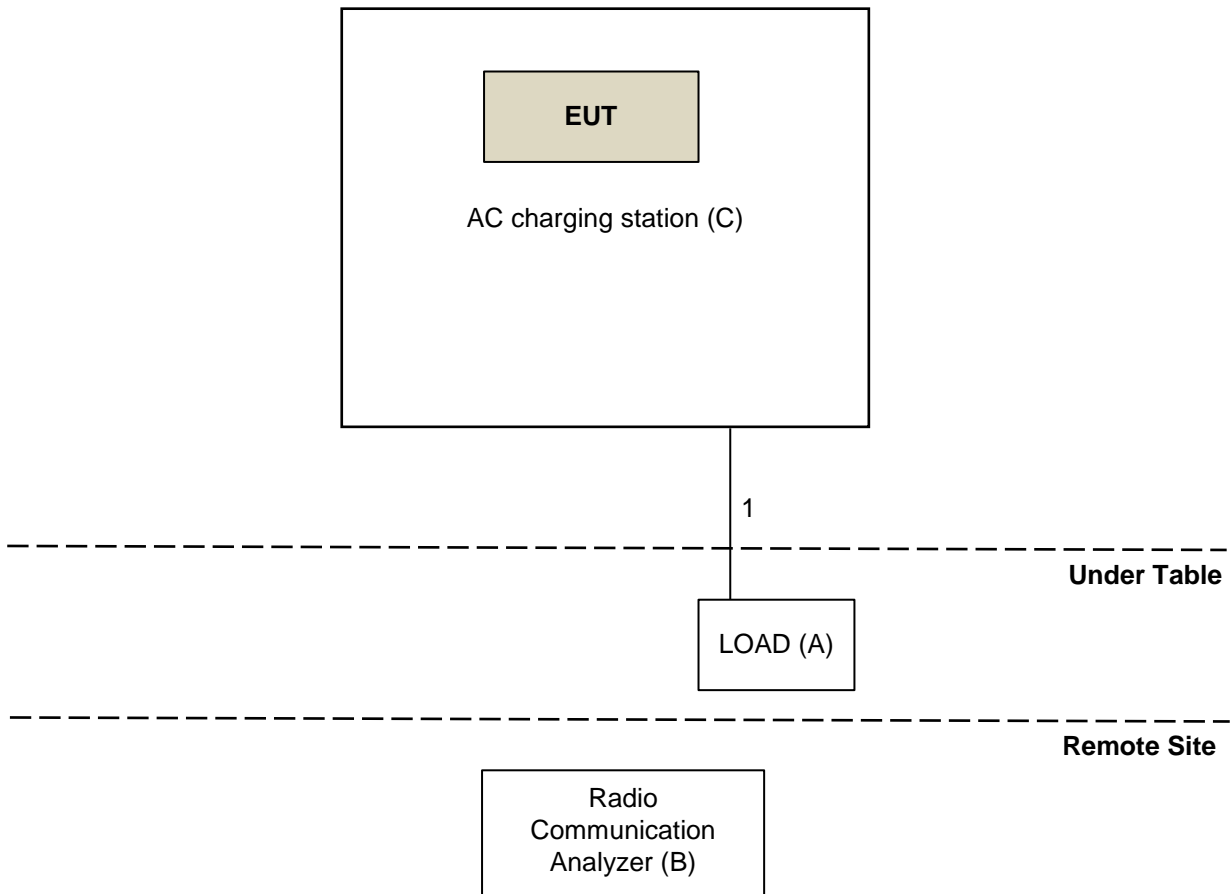

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	LOAD	NA	NA	NA	NA	Provided by Lab
B	Radio Communication Analyzer	Anritsu	MT8820C	6201300640	N/A	Provided by Lab
C	AC charging station	LITEON	EX-1193-M,	NA	NA	Provided by Client

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	2	1.8	N	0	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items B acted as communication partners to transfer data.

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
WCDMA Band 2	Z-Axis	Z-Axis
LTE Band 2	Z-Axis	Z-Axis
LTE Band 25	Z-Axis	Z-Axis

#### WCDMA Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
-	Radiated Emission	9262 to 9538	9262, 9400, 9538	WCDMA

#### LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

#### Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

## LTE Band 25

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK	1 RB / 0 RB Offset

### Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 60 % RH	120 Vac, 60 Hz	Vincent Chen
Radiated Emission	25 deg. C, 72 % RH	120 Vac, 60 Hz	Vincent Chen

### 3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### 3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

#### Test Standard:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**ANSI 63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.

#### References Test Guidance:

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-E 2016**

**NOTE:** All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

#### 4.1.2 Test Procedures


##### **EIRP / ERP Measurement:**

- a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
  - $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.
  - $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.


4.1.3 Test Setup

**EIRP / ERP Measurement:**

**<Radiated Emission below or equal 1 GHz>**

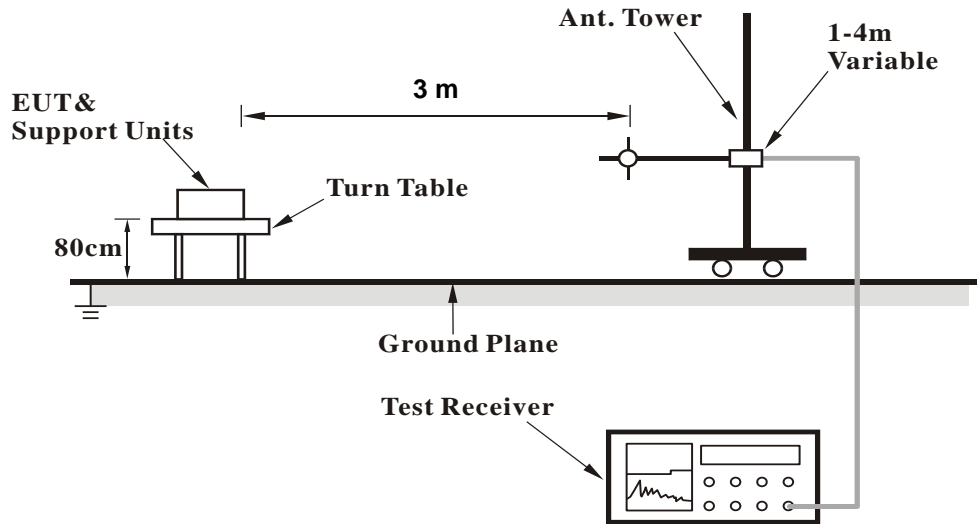

**<Radiated Emission above 1 GHz>**

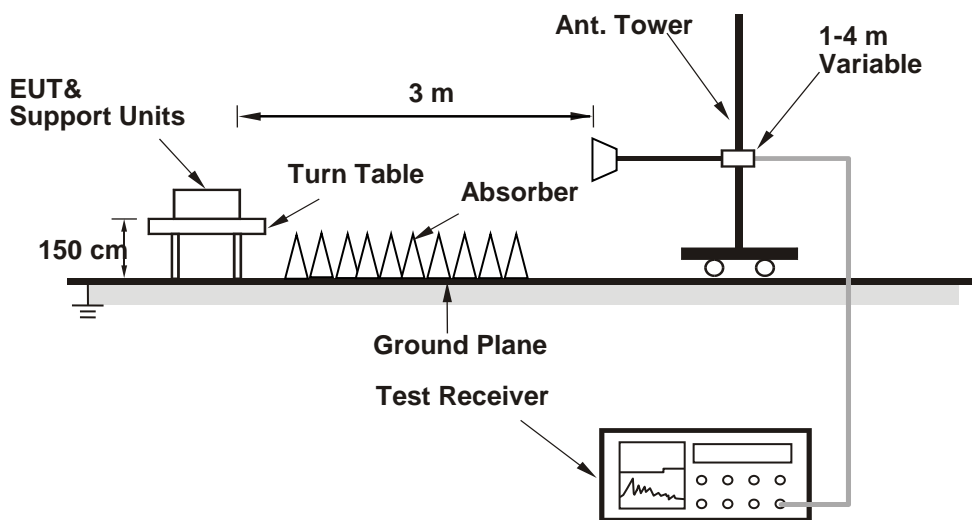

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.4 Test Results

##### EIRP Power (dBm)

WCDMA Band 2

Mode		TX channel 9262, 9400, 9538						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.40	22.75	33.00	-10.25	1.58 H	152	87.61	-64.86
2	1880.00	22.89	33.00	-10.11	1.52 H	203	87.66	-64.77
3	1907.60	22.83	33.00	-10.17	1.44 H	37	87.49	-64.66
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.40	23.76	33.00	-9.24	1.63 V	58	88.62	-64.86
2	<b>1880.00</b>	<b>23.90</b>	<b>33.00</b>	<b>-9.10</b>	<b>1.69 V</b>	<b>56</b>	<b>88.67</b>	<b>-64.77</b>
3	1907.60	23.84	33.00	-9.16	1.59 V	48	88.50	-64.66

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

##### Modulation Type: QPSK

LTE Band 2, Channel Bandwidth 1.4MHz

Mode		TX channel 18607, 18900, 19193						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	25.38	33.00	-7.62	1.56 H	72	90.24	-64.86
2	1880.00	25.48	33.00	-7.52	1.44 H	41	90.25	-64.77
3	1909.30	25.47	33.00	-7.53	1.63 H	35	90.12	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	26.24	33.00	-6.76	1.52 V	65	91.10	-64.86
2	<b>1880.00</b>	<b>26.26</b>	<b>33.00</b>	<b>-6.74</b>	<b>1.40 V</b>	<b>48</b>	<b>91.03</b>	<b>-64.77</b>
3	1909.30	26.25	33.00	-6.75	1.41 V	45	90.90	-64.65

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

## LTE Band 2, Channel Bandwidth 3MHz

Mode		TX channel 18615, 18900, 19185						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	24.78	33.00	-8.22	1.82 H	232	89.63	-64.85
2	1880.00	24.96	33.00	-8.04	1.12 H	54	89.73	-64.77
3	1908.50	24.77	33.00	-8.23	1.63 H	157	89.42	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	25.83	33.00	-7.17	1.53 V	53	90.68	-64.85
2	<b>1880.00</b>	<b>25.98</b>	<b>33.00</b>	<b>-7.02</b>	<b>1.40 V</b>	<b>47</b>	<b>90.75</b>	<b>-64.77</b>
3	1908.50	25.85	33.00	-7.15	1.35 V	33	90.50	-64.65

## Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

## LTE Band 2, Channel Bandwidth 5MHz

Mode		TX channel 18625, 18900, 19175						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	24.96	33.00	-8.04	2.01 H	178	89.82	-64.86
2	1880.00	25.26	33.00	-7.74	1.39 H	111	90.03	-64.77
3	1907.50	25.02	33.00	-7.98	2.74 H	236	89.68	-64.66
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	26.03	33.00	-6.97	1.63 V	57	90.89	-64.86
2	<b>1880.00</b>	<b>26.23</b>	<b>33.00</b>	<b>-6.77</b>	<b>1.43 V</b>	<b>49</b>	<b>91.00</b>	<b>-64.77</b>
3	1907.50	26.06	33.00	-6.94	1.52 V	56	90.72	-64.66

## Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value

## LTE Band 2, Channel Bandwidth 10MHz

Mode		TX channel 18650, 18900, 19150						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	24.84	33.00	-8.16	1.42 H	76	89.68	-64.84
2	1880.00	24.98	33.00	-8.02	1.72 H	22	89.75	-64.77
3	1905.00	24.86	33.00	-8.14	1.57 H	106	89.53	-64.67
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	25.87	33.00	-7.13	1.52 V	65	90.71	-64.84
2	<b>1880.00</b>	<b>26.00</b>	<b>33.00</b>	<b>-7.00</b>	<b>1.43 V</b>	<b>51</b>	<b>90.77</b>	<b>-64.77</b>
3	1905.00	25.88	33.00	-7.12	1.62 V	37	90.55	-64.67

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## LTE Band 2, Channel Bandwidth 15MHz

Mode		TX channel 18675, 18900, 19125						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	24.41	33.00	-8.59	1.42 H	100	89.25	-64.84
2	1880.00	24.56	33.00	-8.44	1.35 H	67	89.33	-64.77
3	1902.50	24.48	33.00	-8.52	1.52 H	33	89.16	-64.68
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	26.14	33.00	-6.86	1.38 V	56	90.98	-64.84
2	<b>1880.00</b>	<b>26.16</b>	<b>33.00</b>	<b>-6.84</b>	<b>1.43 V</b>	<b>49</b>	<b>90.93</b>	<b>-64.77</b>
3	1902.50	26.05	33.00	-6.95	1.26 V	96	90.73	-64.68

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$



LTE Band 2, Channel Bandwidth 20MHz

Mode		TX channel 18675, 18900, 19125						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	25.02	33.00	-7.98	2.03 H	67	89.85	-64.83
2	1880.00	25.14	33.00	-7.86	1.28 H	124	89.91	-64.77
3	1900.00	25.24	33.00	-7.76	1.13 H	256	89.94	-64.70
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	26.25	33.00	-6.75	1.53 V	97	91.08	-64.83
<b>2</b>	<b>1880.00</b>	<b>26.27</b>	<b>33.00</b>	<b>-6.73</b>	<b>1.35 V</b>	<b>58</b>	<b>91.04</b>	<b>-64.77</b>
3	1900.00	26.26	33.00	-6.74	1.43 V	77	90.96	-64.70

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

**Modulation Type: 16QAM**

LTE Band 2, Channel Bandwidth 1.4MHz

Mode		TX channel 18607, 18900, 19193						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	24.38	33.00	-8.62	1.56 H	72	89.24	-64.86
2	1880.00	24.35	33.00	-8.65	1.44 H	41	89.12	-64.77
3	1909.30	24.55	33.00	-8.45	1.63 H	35	89.20	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	<b>1850.70</b>	<b>25.42</b>	<b>33.00</b>	<b>-7.58</b>	<b>1.52 V</b>	<b>65</b>	<b>90.28</b>	<b>-64.86</b>
2	1880.00	25.33	33.00	-7.67	1.40 V	48	90.10	-64.77
3	1909.30	25.25	33.00	-7.75	1.41 V	45	89.90	-64.65

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

LTE Band 2, Channel Bandwidth 3MHz

Mode		TX channel 18615, 18900, 19185						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	23.38	33.00	-9.62	1.56 H	72	88.24	-64.86
2	1880.00	23.23	33.00	-9.77	1.44 H	41	88.00	-64.77
3	1909.30	23.45	33.00	-9.55	1.63 H	35	88.10	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	24.78	33.00	-8.22	1.53 V	53	89.63	-64.85
2	<b>1880.00</b>	<b>24.98</b>	<b>33.00</b>	<b>-8.02</b>	<b>1.40 V</b>	<b>47</b>	<b>89.75</b>	<b>-64.77</b>
3	1908.50	24.79	33.00	-8.21	1.35 V	33	89.44	-64.65

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## LTE Band 2, Channel Bandwidth 5MHz

Mode		TX channel 18625, 18900, 19175						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	23.93	33.00	-9.07	2.01 H	178	88.79	-64.86
2	1880.00	24.13	33.00	-8.87	1.39 H	111	88.90	-64.77
3	1907.50	24.02	33.00	-8.98	2.74 H	236	88.68	-64.66
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	25.03	33.00	-7.97	1.63 V	57	89.89	-64.86
2	<b>1880.00</b>	<b>25.20</b>	<b>33.00</b>	<b>-7.80</b>	<b>1.43 V</b>	<b>49</b>	<b>89.97</b>	<b>-64.77</b>
3	1907.50	25.06	33.00	-7.94	1.52 V	56	89.72	-64.66

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## LTE Band 2, Channel Bandwidth 10MHz

Mode		TX channel 18650, 18900, 19150						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	23.68	33.00	-9.32	1.42 H	76	88.52	-64.84
2	1880.00	23.98	33.00	-9.02	1.72 H	22	88.75	-64.77
3	1905.00	23.83	33.00	-9.17	1.57 H	106	88.50	-64.67
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	24.69	33.00	-8.31	1.52 V	65	89.53	-64.84
2	<b>1880.00</b>	<b>25.01</b>	<b>33.00</b>	<b>-7.99</b>	<b>1.43 V</b>	<b>51</b>	<b>89.78</b>	<b>-64.77</b>
3	1905.00	24.59	33.00	-8.41	1.62 V	37	89.26	-64.67

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## LTE Band 2, Channel Bandwidth 15MHz

Mode		TX channel 18675, 18900, 19125						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	23.41	33.00	-9.59	1.42 H	100	88.25	-64.84
2	1880.00	23.46	33.00	-9.54	1.35 H	67	88.23	-64.77
3	1902.50	23.35	33.00	-9.65	1.52 H	33	88.03	-64.68
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	25.01	33.00	-7.99	1.38 V	56	89.85	-64.84
<b>2</b>	<b>1880.00</b>	<b>25.16</b>	<b>33.00</b>	<b>-7.84</b>	<b>1.43 V</b>	<b>49</b>	<b>89.93</b>	<b>-64.77</b>
3	1902.50	25.00	33.00	-8.00	1.26 V	96	89.68	-64.68

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## LTE Band 2, Channel Bandwidth 20MHz

Mode		TX channel 18675, 18900, 19125						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	24.00	33.00	-9.00	2.03 H	67	88.83	-64.83
2	1880.00	24.15	33.00	-8.85	1.28 H	124	88.92	-64.77
3	1900.00	24.24	33.00	-8.76	1.13 H	256	88.94	-64.70
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	25.25	33.00	-7.75	1.53 V	97	90.08	-64.83
<b>2</b>	<b>1880.00</b>	<b>25.27</b>	<b>33.00</b>	<b>-7.73</b>	<b>1.35 V</b>	<b>58</b>	<b>90.04</b>	<b>-64.77</b>
3	1900.00	25.26	33.00	-7.74	1.43 V	77	89.96	-64.70

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

**Modulation Type: QPSK**

LTE Band 25, Channel Bandwidth 1.4MHz

Mode		TX channel 26047, 26365, 26683						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	24.04	33.00	-8.96	1.82 H	152	88.90	-64.86
2	1882.50	24.24	33.00	-8.76	1.48 H	99	88.99	-64.75
3	1914.30	24.19	33.00	-8.81	2.11 H	120	88.81	-64.62
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	25.06	33.00	-7.94	1.52 V	35	89.92	-64.86
<b>2</b>	<b>1882.50</b>	<b>25.22</b>	<b>33.00</b>	<b>-7.78</b>	<b>1.38 V</b>	<b>47</b>	<b>89.97</b>	<b>-64.75</b>
3	1914.30	25.20	33.00	-7.80	1.52 V	65	89.82	-64.62

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

LTE Band 25, Channel Bandwidth 3MHz

Mode		TX channel 26055, 26365, 26675						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	23.67	33.00	-9.33	1.42 H	35	88.52	-64.85
2	1882.50	23.84	33.00	-9.16	1.72 H	56	88.59	-64.75
3	1913.50	23.80	33.00	-9.20	1.57 H	39	88.43	-64.63
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	24.71	33.00	-8.29	1.35 V	45	89.56	-64.85
<b>2</b>	<b>1882.50</b>	<b>24.86</b>	<b>33.00</b>	<b>-8.14</b>	<b>1.41 V</b>	<b>39</b>	<b>89.61</b>	<b>-64.75</b>
3	1913.50	24.84	33.00	-8.16	1.23 V	71	89.47	-64.63

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## LTE Band 25, Channel Bandwidth 5MHz

Mode		TX channel 26065, 26365, 26665						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	23.70	33.00	-9.30	1.45 H	263	88.56	-64.86
2	1882.50	23.88	33.00	-9.12	1.72 H	52	88.63	-64.75
3	1912.50	23.83	33.00	-9.17	1.11 H	152	88.46	-64.63
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1852.50	24.71	33.00	-8.29	1.38 V	42	89.57	-64.86
2	<b>1882.50</b>	<b>24.87</b>	<b>33.00</b>	<b>-8.13</b>	<b>1.45 V</b>	<b>48</b>	<b>89.62</b>	<b>-64.75</b>
3	1912.50	24.84	33.00	-8.16	1.52 V	65	89.47	-64.63

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## LTE Band 25, Channel Bandwidth 10MHz

Mode		TX channel 26090, 26365, 26640						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	24.16	33.00	-8.84	1.42 H	56	89.00	-64.84
2	1882.50	24.30	33.00	-8.70	1.35 H	22	89.05	-64.75
3	1910.00	24.25	33.00	-8.75	1.42 H	4	88.90	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1855.00	25.17	33.00	-7.83	1.35 V	42	90.01	-64.84
2	<b>1882.50</b>	<b>25.31</b>	<b>33.00</b>	<b>-7.69</b>	<b>1.42 V</b>	<b>49</b>	<b>90.06</b>	<b>-64.75</b>
3	1910.00	25.26	33.00	-7.74	1.38 V	51	89.91	-64.65

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## LTE Band 25, Channel Bandwidth 15MHz

Mode		TX channel 26115, 26365, 26615						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	24.43	33.00	-8.57	1.35 H	56	89.27	-64.84
2	1882.50	24.46	33.00	-8.54	1.52 H	47	89.21	-64.75
3	1907.50	24.50	33.00	-8.50	1.47 H	44	89.16	-64.66
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	25.34	33.00	-7.66	1.82 V	56	90.18	-64.84
2	<b>1882.50</b>	<b>25.36</b>	<b>33.00</b>	<b>-7.64</b>	<b>1.62 V</b>	<b>46</b>	<b>90.11</b>	<b>-64.75</b>
3	1907.50	25.35	33.00	-7.65	1.52 V	58	90.01	-64.66

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## LTE Band 25, Channel Bandwidth 20MHz

Mode		TX channel 26140, 26365, 26590						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	24.62	33.00	-8.38	1.23 H	125	89.45	-64.83
2	1882.50	24.77	33.00	-8.23	1.57 H	136	89.52	-64.75
3	1905.00	24.71	33.00	-8.29	1.78 H	222	89.38	-64.67
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	25.36	33.00	-7.64	1.56 V	49	90.19	-64.83
2	<b>1882.50</b>	<b>25.44</b>	<b>33.00</b>	<b>-7.56</b>	<b>1.62 V</b>	<b>47</b>	<b>90.19</b>	<b>-64.75</b>
3	1905.00	25.37	33.00	-7.63	1.52 V	27	90.04	-64.67

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

**Modulation Type: 16QAM**

LTE Band 25, Channel Bandwidth 1.4MHz

Mode		TX channel 26047, 26365, 26683						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	23.20	33.00	-9.80	1.82 H	152	88.06	-64.86
2	1882.50	23.12	33.00	-9.88	1.48 H	99	87.87	-64.75
3	1914.30	23.22	33.00	-9.78	2.11 H	120	87.84	-64.62
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1850.70	24.06	33.00	-8.94	1.52 V	35	88.92	-64.86
2	1882.50	24.12	33.00	-8.88	1.38 V	47	88.87	-64.75
<b>3</b>	<b>1914.30</b>	<b>24.32</b>	<b>33.00</b>	<b>-8.68</b>	<b>1.52 V</b>	<b>65</b>	<b>88.94</b>	<b>-64.62</b>

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

LTE Band 25, Channel Bandwidth 3MHz

Mode		TX channel 26055, 26365, 26675						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1851.50	22.57	33.00	-10.43	1.42 H	35	87.42	-64.85
2	1882.50	22.68	33.00	-10.32	1.72 H	56	87.43	-64.75
3	1913.50	22.80	33.00	-10.20	1.57 H	39	87.43	-64.63
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
<b>1</b>	<b>1851.50</b>	<b>23.87</b>	<b>33.00</b>	<b>-9.13</b>	<b>1.35 V</b>	<b>45</b>	<b>88.72</b>	<b>-64.85</b>
2	1882.50	23.79	33.00	-9.21	1.41 V	39	88.54	-64.75
3	1913.50	23.68	33.00	-9.32	1.23 V	71	88.31	-64.63

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$



LTE Band 25, Channel Bandwidth 5MHz

Mode		TX channel 26065, 26365, 26665						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1852.50	22.67	33.00	-10.33	1.45 H	263	87.53	-64.86
2	1882.50	22.79	33.00	-10.21	1.72 H	52	87.54	-64.75
3	1912.50	22.78	33.00	-10.22	1.11 H	152	87.41	-64.63
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1852.50	23.57	33.00	-9.43	1.38 V	42	88.43	-64.86
2	<b>1882.50</b>	<b>23.69</b>	<b>33.00</b>	<b>-9.31</b>	<b>1.45 V</b>	<b>48</b>	<b>88.44</b>	<b>-64.75</b>
3	1912.50	23.68	33.00	-9.32	1.52 V	65	88.31	-64.63

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

LTE Band 25, Channel Bandwidth 10MHz

Mode		TX channel 26090, 26365, 26640						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1855.00	23.16	33.00	-9.84	1.42 H	56	88.00	-64.84
2	1882.50	23.23	33.00	-9.77	1.35 H	22	87.98	-64.75
3	1910.00	23.12	33.00	-9.88	1.42 H	4	87.77	-64.65
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1855.00	24.17	33.00	-8.83	1.35 V	42	89.01	-64.84
2	<b>1882.50</b>	<b>24.31</b>	<b>33.00</b>	<b>-8.69</b>	<b>1.42 V</b>	<b>49</b>	<b>89.06</b>	<b>-64.75</b>
3	1910.00	24.25	33.00	-8.75	1.38 V	51	88.90	-64.65

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## LTE Band 25, Channel Bandwidth 15MHz

Mode		TX channel 26115, 26365, 26615						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	23.34	33.00	-9.66	1.35 H	56	88.18	-64.84
2	1882.50	23.46	33.00	-9.54	1.52 H	47	88.21	-64.75
3	1907.50	23.35	33.00	-9.65	1.47 H	44	88.01	-64.66
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1857.50	24.23	33.00	-8.77	1.82 V	56	89.07	-64.84
2	1882.50	24.36	33.00	-8.64	1.62 V	46	89.11	-64.75
<b>3</b>	<b>1907.50</b>	<b>25.23</b>	<b>33.00</b>	<b>-7.77</b>	<b>1.52 V</b>	<b>58</b>	<b>89.89</b>	<b>-64.66</b>

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## LTE Band 25, Channel Bandwidth 20MHz

Mode		TX channel 26140, 26365, 26590						
Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	23.56	33.00	-9.44	1.23 H	125	88.39	-64.83
2	1882.50	23.68	33.00	-9.32	1.57 H	136	88.43	-64.75
3	1905.00	23.57	33.00	-9.43	1.78 H	222	88.24	-64.67
Antenna Polarity & Test Distance: Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1860.00	24.16	33.00	-8.84	1.56 V	49	88.99	-64.83
<b>2</b>	<b>1882.50</b>	<b>24.34</b>	<b>33.00</b>	<b>-8.66</b>	<b>1.62 V</b>	<b>47</b>	<b>89.09</b>	<b>-64.75</b>
3	1905.00	24.24	33.00	-8.76	1.52 V	27	88.91	-64.67

## Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$

## 4.2 Radiated Emission Measurement

### 4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit is equal to -13 dBm.

### 4.2.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7  
EIRP (dBm) =  $E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.  
ERP (dBm) =  $E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

### 4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

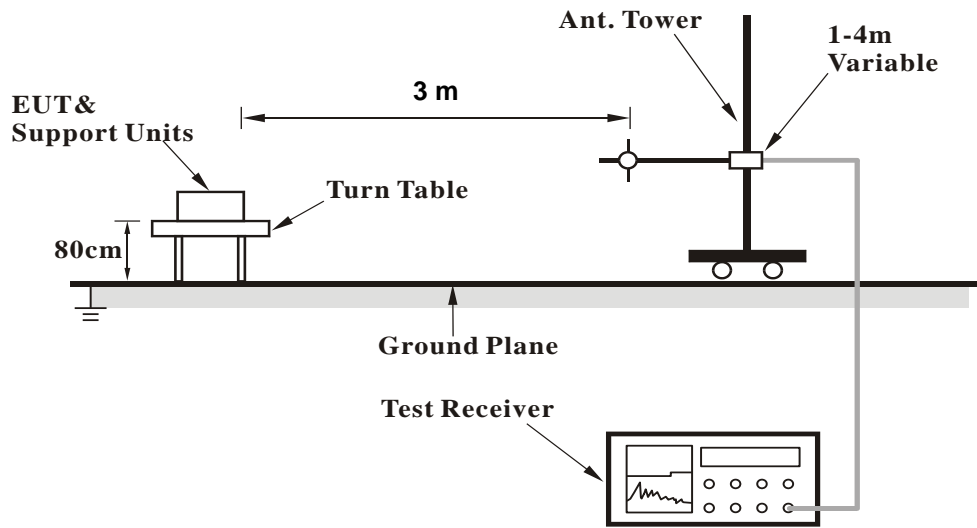

<Radiated Emission above 1 GHz>

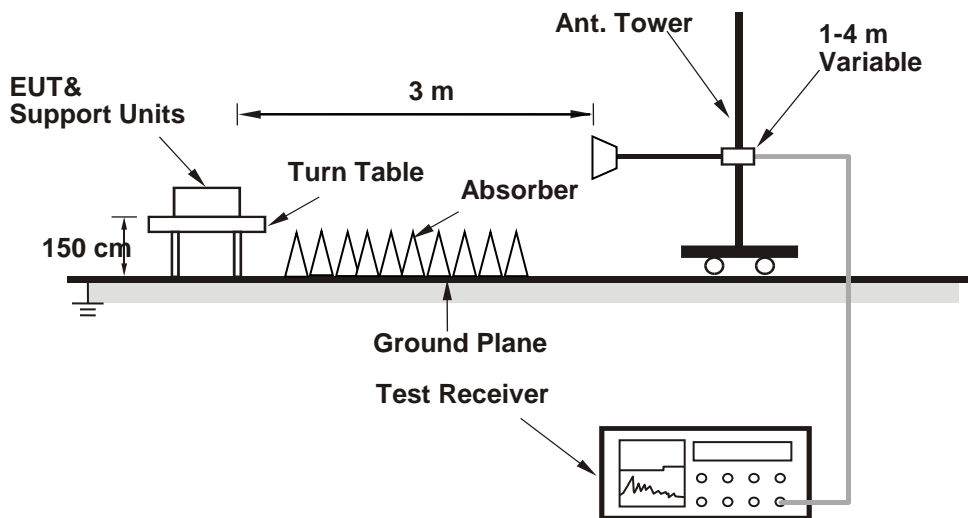

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

Below 1GHz


WCDMA Band 2

<b>RF Mode</b>	TX WCDMA Band II	<b>Channel</b>	CH 9262 : 1852.4 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	65.89	-42.51	-13.00	-29.51	1.50 H	326	66.51	-109.02
2	248.25	-40.04	-13.00	-27.04	2.00 H	202	68.89	-108.93
3	499.48	-37.61	-13.00	-24.61	1.00 H	43	64.56	-102.17
4	599.39	-36.29	-13.00	-23.29	1.50 H	98	64.36	-100.65
5	676.02	-43.45	-13.00	-30.45	1.00 H	2	55.87	-99.32
6	903.97	-47.27	-13.00	-34.27	2.00 H	92	48.99	-96.26

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

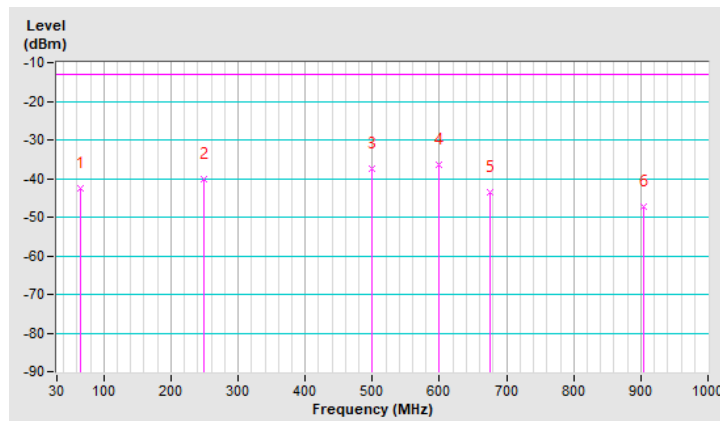


<b>RF Mode</b>	TX WCDMA Band II	<b>Channel</b>	CH 9262 : 1852.4 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.52	-31.54	-13.00	-18.54	1.00 V	229	75.92	-107.46
2	73.65	-35.00	-13.00	-22.00	1.50 V	85	75.37	-110.37
3	251.16	-42.28	-13.00	-29.28	2.00 V	42	66.56	-108.84
4	401.51	-42.17	-13.00	-29.17	1.00 V	259	62.59	-104.76
5	599.39	-37.99	-13.00	-24.99	1.50 V	347	62.66	-100.65
6	881.66	-51.91	-13.00	-38.91	2.00 V	330	44.60	-96.51

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

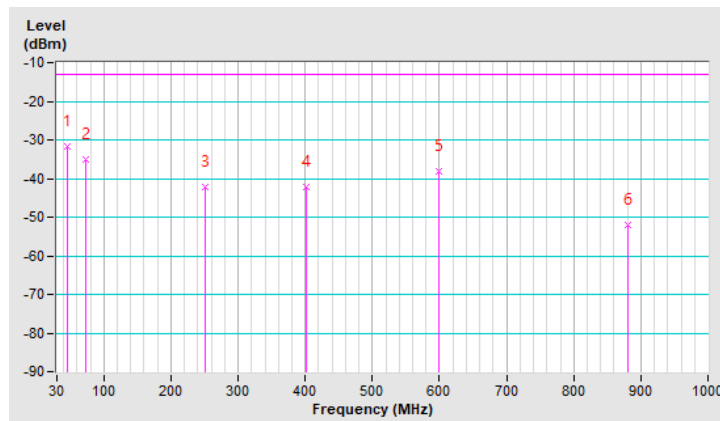


LTE Band 2

<b>RF Mode</b>	TX LTE Band II-10MHz	<b>Channel</b>	CH 18900 : 1880 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.52	-44.22	-13.00	-31.22	1.00 H	180	63.24	-107.46
2	65.89	-42.38	-13.00	-29.38	2.00 H	317	66.64	-109.02
3	247.28	-41.01	-13.00	-28.01	1.00 H	199	67.95	-108.96
4	474.26	-43.31	-13.00	-30.31	1.50 H	265	59.46	-102.77
5	598.42	-39.54	-13.00	-26.54	1.50 H	317	61.13	-100.67
6	819.58	-53.25	-13.00	-40.25	1.00 H	231	43.44	-96.69

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

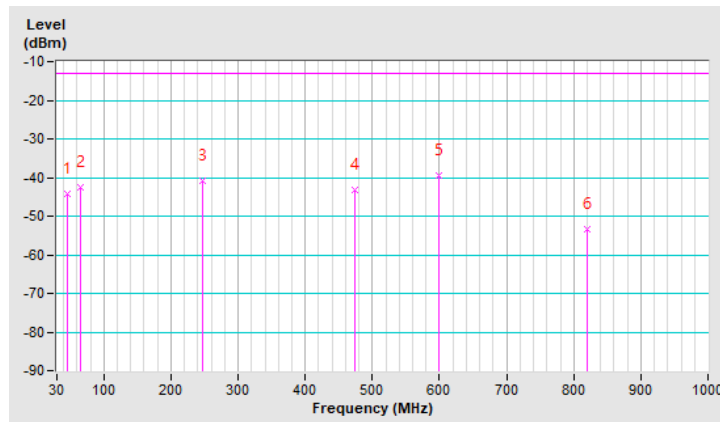


<b>RF Mode</b>	TX LTE Band II-10MHz	<b>Channel</b>	CH 18900 : 1880 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.52	-31.91	-13.00	-18.91	1.50 V	220	75.55	-107.46
2	73.65	-34.66	-13.00	-21.66	1.00 V	92	75.71	-110.37
3	251.16	-42.10	-13.00	-29.10	2.00 V	52	66.74	-108.84
4	402.48	-42.92	-13.00	-29.92	1.00 V	331	61.82	-104.74
5	492.69	-39.16	-13.00	-26.16	1.50 V	2	63.19	-102.35
6	654.68	-42.46	-13.00	-29.46	1.00 V	338	57.14	-99.60

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

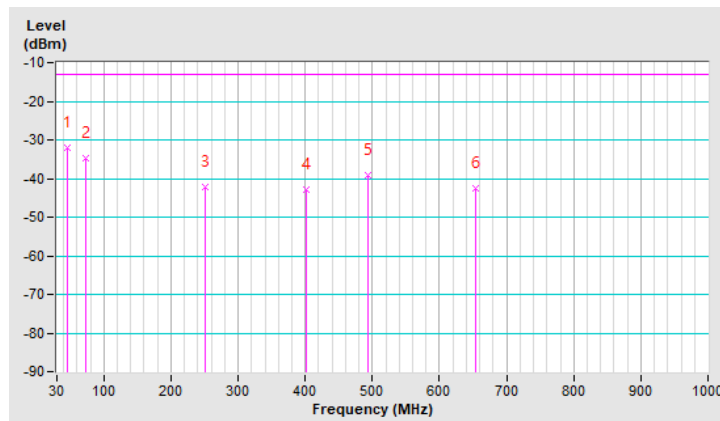




LTE Band 25

<b>RF Mode</b>	TX LTE Band 25-20MHz	<b>Channel</b>	CH 26365 : 1882.5 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	65.89	-42.66	-13.00	-29.66	1.50 H	323	66.36	-109.02
2	249.22	-40.76	-13.00	-27.76	1.00 H	201	68.14	-108.90
3	500.45	-40.56	-13.00	-27.56	2.00 H	53	61.59	-102.15
4	599.39	-38.41	-13.00	-25.41	1.00 H	54	62.24	-100.65
5	668.26	-43.51	-13.00	-30.51	1.50 H	45	55.93	-99.44
6	912.70	-51.93	-13.00	-38.93	1.50 H	10	44.19	-96.12

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

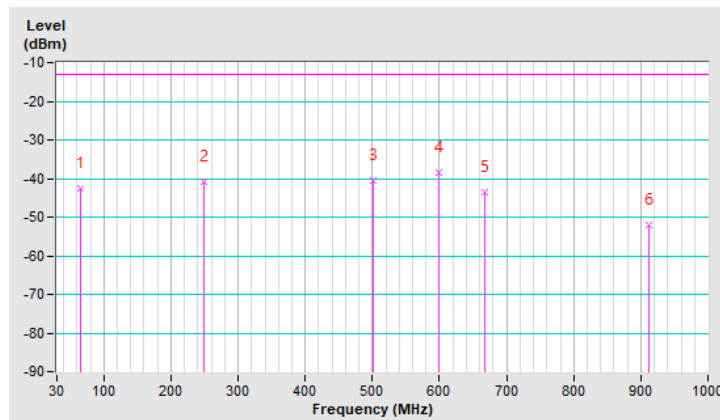


<b>RF Mode</b>	TX LTE Band 25-20MHz	<b>Channel</b>	CH 26365 : 1882.5 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	44.55	-31.01	-13.00	-18.01	1.00 V	233	76.54	-107.55
2	73.65	-35.12	-13.00	-22.12	1.50 V	94	75.25	-110.37
3	250.19	-42.39	-13.00	-29.39	2.00 V	44	66.49	-108.88
4	404.42	-40.36	-13.00	-27.36	1.00 V	238	64.35	-104.71
5	495.60	-39.24	-13.00	-26.24	1.50 V	353	63.05	-102.29
6	743.92	-46.60	-13.00	-33.60	2.00 V	355	50.83	-97.43

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

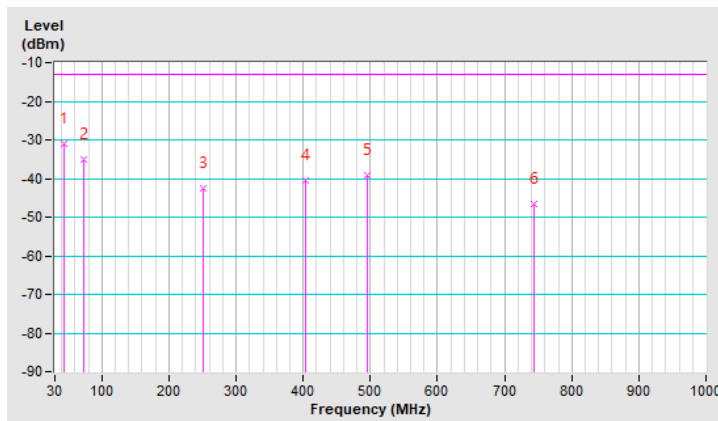

### Above 1GHz

#### WCDMA Band 2

<b>RF Mode</b>	WCDMA Band II	<b>Channel</b>	CH 9262 : 1852.4 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3704.80	-52.02	-13.00	-39.02	1.07 H	152	56.86	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3704.80	-47.28	-13.00	-34.28	1.38 V	272	61.60	-108.88

#### Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	WCDMA Band II	<b>Channel</b>	CH 9400 : 1880 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-52.08	-13.00	-39.08	1.12 H	146	56.91	-108.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-47.34	-13.00	-34.34	1.58 V	283	61.65	-108.99

#### Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	WCDMA Band II	<b>Channel</b>	CH 9538 : 1907.6 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.20	-51.97	-13.00	-38.97	1.06 H	165	56.89	-108.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.20	-47.23	-13.00	-34.23	1.42 V	277	61.63	-108.86

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 2

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 18607 : 1850.7 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	3701.40	-51.99	-13.00	-38.99	1.26 H	197	56.89	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	3701.40	-47.23	-13.00	-34.23	1.59 V	277	61.65	-108.88

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 18900 : 1880 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	3760.00	-51.98	-13.00	-38.98	1.25 H	152	57.01	-108.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	3760.00	-47.24	-13.00	-34.24	1.52 V	273	61.75	-108.99

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 19193 : 1909.3 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-51.88	-13.00	-38.88	1.36 H	204	56.96	-108.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-47.14	-13.00	-34.14	1.65 V	288	61.70	-108.84

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 18625 : 1852.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-50.96	-13.00	-37.96	1.36 H	157	57.92	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-47.22	-13.00	-34.22	1.13 V	235	61.66	-108.88

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 18900 : 1880 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-51.95	-13.00	-38.95	1.13 H	165	57.04	-108.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-47.21	-13.00	-34.21	1.46 V	267	61.78	-108.99

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 19175 : 1907.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-51.89	-13.00	-38.89	1.23 H	159	56.99	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-47.15	-13.00	-34.15	1.56 V	257	61.73	-108.88

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 18700 : 1860 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-50.96	-13.00	-37.96	1.28 H	172	57.97	-108.93
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-47.22	-13.00	-34.22	1.00 V	242	61.71	-108.93

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 18900 : 1880 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-51.92	-13.00	-38.92	1.39 H	175	57.07	-108.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-47.18	-13.00	-34.18	1.59 V	275	61.81	-108.99

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 19100 : 1900 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-51.98	-13.00	-38.98	1.35 H	168	57.02	-109.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-47.24	-13.00	-34.24	1.24 V	236	61.76	-109.00

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 25

<b>RF Mode</b>	LTE Band 25 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 26047 : 1850.7 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-50.49	-13.00	-37.49	1.42 H	203	58.39	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-51.10	-13.00	-38.10	1.77 V	135	57.78	-108.88

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 25 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 26365 : 1882.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-50.55	-13.00	-37.55	1.52 H	197	58.45	-109.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-51.16	-13.00	-38.16	1.86 V	168	57.84	-109.00

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 25 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 26683 : 1914.3 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3828.60	-50.34	-13.00	-37.34	1.56 H	188	58.42	-108.76
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3828.60	-50.95	-13.00	-37.95	1.89 V	154	57.81	-108.76

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 25 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 26055 : 1851.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-50.39	-13.00	-37.39	1.23 H	263	58.49	-108.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-51.07	-13.00	-38.07	1.63 V	178	57.81	-108.88

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 25 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 26365 : 1882.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-50.50	-13.00	-37.50	1.35 H	224	58.50	-109.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-51.13	-13.00	-38.13	1.65 V	188	57.87	-109.00

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 25 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 26665 : 1912.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3825.00	-50.26	-13.00	-37.26	1.58 H	252	58.52	-108.78
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3825.00	-50.94	-13.00	-37.94	1.54 V	176	57.84	-108.78

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 25 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 26140 : 1860 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-50.83	-13.00	-37.83	1.52 H	248	58.10	-108.93
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-51.05	-13.00	-38.05	1.35 V	295	57.88	-108.93

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 25 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 26365 : 1882.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-50.45	-13.00	-37.45	1.62 H	257	58.55	-109.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-51.08	-13.00	-38.08	1.55 V	217	57.92	-109.00

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 25 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 26590 : 1905 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-50.39	-13.00	-37.39	1.67 H	252	58.53	-108.92
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-51.02	-13.00	-38.02	1.42 V	225	57.90	-108.92

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---