



FCC RADIO TEST REPORT

Applicant	: LITE-ON Technology Corp.
Address	: Bldg. C, 90, Chien 1 Rd., Chung-Ho, New Taipei City, 23585, Taiwan
Equipment	: 802.11b/g/n 2Tx2R + BT5.0 USB WLAN Module
Model No.	: WCBN4606L
Trade Name	: LITE-ON
FCC ID.	: PPQ-WCBN4606L

I HEREBY CERTIFY THAT :

The sample was received on Dec. 12, 2019 and the testing was completed on Dec. 27, 2019 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channes.....	7
2.3 Test Mode & Test Software	8
2.4 Description of Test System.....	8
2.5 General Information of Test.....	9
2.6 Measurement Uncertainty	9
3. Test Equipment and Ancillaries Used for Tests.....	10
4. Antenna Requirements.....	12
4.1 Standard Applicable	12
4.2 Antenna Construction and Directional Gain.....	12
5. Test of AC Power Line Conducted Emission	13
5.1 Test Limit	13
5.2 Test Procedures	13
5.3 Typical Test Setup	14
5.4 Test Result and Data	15
5.5 Test Photographs	17
6. Test of Radiated Spurious Emission.....	18
6.1 Test Limit	18
6.2 Test Procedures.....	18
6.3 Typical Test Setup	19
6.4 Test Result and Data (9kHz ~ 30MHz).....	20
6.5 Test Result and Data (30MHz ~ 1GHz).....	20
6.6 Test Result and Data (1GHz ~ 25GHz).....	22
6.7 Restricted Bands of Operation.....	34
6.8 Test Photographs (30MHz ~ 1GHz)	35
6.9 Test Photographs (1GHz ~ 25GHz)	36
7. Test of Conducted Spurious Emission	37
7.1 Test Limit	37
7.2 Test Procedure	37
7.3 Test Setup Layout	37
7.4 Test Result and Data.....	37
8. 20dB Bandwidth Measurement Data.....	45
8.1 Test Limit	45
8.2 Test Procedures	45
8.3 Test Setup Layout	45
8.4 Test Result and Data.....	45
9. Frequencies Separation	48
9.1 Test Limit	48
9.2 Test Procedures	48



9.3	Test Setup Layout	48
9.4	Test Result and Data	48
10.	Dwell Time on each channel	51
10.1	Test Limit	51
10.2	Test Procedures	51
10.3	Test Setup Layout	51
10.4	Test Result and Data	51
11.	Number of Hopping Channels	54
11.1	Test Limit	54
11.2	Test Procedures	54
11.3	Test Setup Layout	54
11.4	Test Result and Data	54
12.	Maximum Peak Output Power	56
12.1	Test Limit	56
12.2	Test Procedures	56
12.3	Test Setup Layout	56
12.4	Test Result and Data	57
13.	Radio Frequency Exposure	58
13.1	EUT Specification	58
13.2	Test Results	59



History of this test report

Report No.	Issue Date	Description
TEFB1912122	Dec. 30, 2019	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(1)	. Channel Carrier Frequencies Separation	PASS
15.247(a)(1)	. 20dB Bandwidth	PASS
15.247(a)(1)	. Dwell Time	PASS
15.247(b)	. Number of Hopping Channels	PASS
15.247(b)	. Peak Output Power Measurement Data	PASS

*The lab has lowered the uncertainty risk of test equipment, environment, and staff technicians according to ISO-IEC17025. Therefore we define test result as compliant when it complies with the standard without further evaluation of test result uncertainty.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(TEFD1912122).



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	BT : 2400-2483.5MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps
Antenna Type	PIFA Antenna
Antenna Gain	BT: 2400-2480MHz: 3.74dBi

Note:

*For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Antenna Number	Brand Name	Model Name	Ant. Type	Connector	Support	Max Peak Gain	Antenna Gain includes Cable loss
Antenna 1	HONGBO	290-10569	PIFA	I-Pex	BT	BT : 3.74	Yes
Antenna 2	PSA	RFMTA401030IMLB702	PIFA	I-Pex	BT	BT : 3.74	Yes
Antenna 3	HONGBO	290-10843	PIFA	I-Pex	BT	BT : 3.05	Yes
Antenna 4	PSA	RFMTA401050IMLB706	PIFA	I-Pex	BT	BT : 3.05	Yes
Antenna 5	HONGBO	290-10844	PIFA	I-Pex	BT	BT : 2.38	Yes
Antenna 6	PSA	RFMTA401080IMLB704	PIFA	I-Pex	BT	BT : 1.72	Yes
Antenna 7	PSA	RFMTA340730IMLB305	PIFA	I-Pex	BT	BT : -0.5	Yes

Antenna Number	Brand Name	Model Name	Ant. Type	Connector	Support	Max Peak Gain	Antenna Gain includes Cable loss
Antenna A	Walsin	RFMTA100600NNLB002	PIFA	N/A	WIFI	WIFI: 1.5	N/A
Antenna B	Walsin	RFMTA100600NNLB002	PIFA	N/A	WIFI	WIFI: 2.4	N/A

Note:

1. For more detailed information, please refer to the Antenna's specifications.
2. Antenna 1 generated the worst case, it was reported as the final data.



2.2 Carrier Frequency of Channes

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	*78	2480
19	2421	*39	2441	59	2461	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode & Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10
- The complete test system included Notebook and EUT for RF test.
- An executive program, "RtlBlueoohMP.dll & RTLBTAPP ver. 5.3.1.2 & 5.2.2.39" under Windows OS system was executed to transmit and receive data via WLAN.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)
caused "Test Mode 3" generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)
caused "Test Mode 3" generated the worst case, they were reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)
caused "Test Mode 1, 3" generated the worst case, they were reported as the final data.	

2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Vostro 3560	N/A	Adapter / 1.8m / NS
USB Cable	N/A	N/A	1.0m / NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Vostro 3560	N/A	Adapter / 1.8m / NS
USB Cable	N/A	N/A	1.0m / NS	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Vostro 3560	N/A	Adapter / 1.8m / NS
USB Cable	N/A	N/A	1.0m / NS	N/A



2.5 General Information of Test

Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 40,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Finish Date	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2019/12/27	22°C / 60%	Nick Guan
Radiated Emissions	3M02-NK	2019/12/23	24°C / 52%	Vic Yeh
AC Power Line Conducted Emission	CON01-NK	2019/12/24	22°C / 46%	Nick Guan

2.6 Measurement Uncertainty

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±1.60dB
Radiated Spurious Emission(9KHz~30MHz)	±3.405dB
Radiated Spurious Emission(30MHz~1GHz)	±5.326dB
Radiated Spurious Emission(1GHz~25GHz)	±5.918dB
Conducted Spurious Emission	±2.156dB
6dB Bandwidth	±4.401%
20dB Bandwidth	±4.40%
Occupied Bandwidth	±4.41%
Peak Output Power(Conducted Power Meter)	±1.31dB
Dwell Time	±0.11%
Power Spectral Density	±2.146dB
Duty Cycle	±0.17%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2019/09/24	2020/09/23
Bilog Antenna	Schwarzbeck	VULB9168	369	2019/03/29	2020/03/28
Active Loop Antenna	EMCO	6507	40855	2019/05/24	2020/05/23
Horn Antenna	EMCO	3115	31589	2019/04/01	2020/03/31
Horn Antenna	EMCO	3116	31974	2019/09/17	2020/09/16
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2019/05/14	2020/05/13
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2019/03/28	2020/03/27
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2019/08/02	2020/08/01
Preamplifier	EM Electronics corp.	EM330	60660	2019/03/11	2020/03/10
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2019/09/20	2020/09/19
Preamplifier	Agilent	8449B	3008A01954	2019/03/11	2020/03/10
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2019/11/07	2020/11/06
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2019/04/09	2020/04/08
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1316	2019/09/20	2020/09/19
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805443/4	2019/05/20	2020/05/19
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805796/4	2019/05/20	2020/05/19
Cable-8m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805795/4	2019/05/20	2020/05/19
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2019/03/28	2020/03/27
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2019/08/02	2020/08/01
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
Attenuator	KEYSIGHT	8491B	MY39250703	2019/09/12	2020/09/11
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2019/08/28	2020/08/27
Power Meter	Anritsu	ML2495A	1224005	2019/04/11	2020/04/10
Power Sensor	Anritsu	MA2411B	1207295	2019/04/09	2020/04/08



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100443	2019/03/29	2020/03/28
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-568	2019/03/15	2020/03/14
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101934	2019/03/12	2020/03/11
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130606	2019/03/14	2020/03/13
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	PIFA Antenna
Antenna Gain	3.74 dBi

Antenna Number	Brand Name	Model Name	Ant. Type	Connector	Support	Max Peak Gain	Antenna Gain includes Cable loss
Antenna 1	HONGBO	290-10569	PIFA	I-Pex	BT	BT : 3.74	Yes
Antenna 2	PSA	RFMTA401030IMLB702	PIFA	I-Pex	BT	BT : 3.74	Yes
Antenna 3	HONGBO	290-10843	PIFA	I-Pex	BT	BT : 3.05	Yes
Antenna 4	PSA	RFMTA401050IMLB706	PIFA	I-Pex	BT	BT : 3.05	Yes
Antenna 5	HONGBO	290-10844	PIFA	I-Pex	BT	BT : 2.38	Yes
Antenna 6	PSA	RFMTA401080IMLB704	PIFA	I-Pex	BT	BT : 1.72	Yes
Antenna 7	PSA	RFMTA340730IMLB305	PIFA	I-Pex	BT	BT : -0.5	Yes

Antenna Number	Brand Name	Model Name	Ant. Type	Connector	Support	Max Peak Gain	Antenna Gain includes Cable loss
Antenna A	Walsin	RFMTA100600NNLB002	PIFA	N/A	WIFI	WIFI: 1.5	N/A
Antenna B	Walsin	RFMTA100600NNLB002	PIFA	N/A	WIFI	WIFI: 2.4	N/A

Note:

1. For more detailed information, please refer to the Antenna's specifications.
2. Antenna 1 generated the worst case, it was reported as the final data.



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

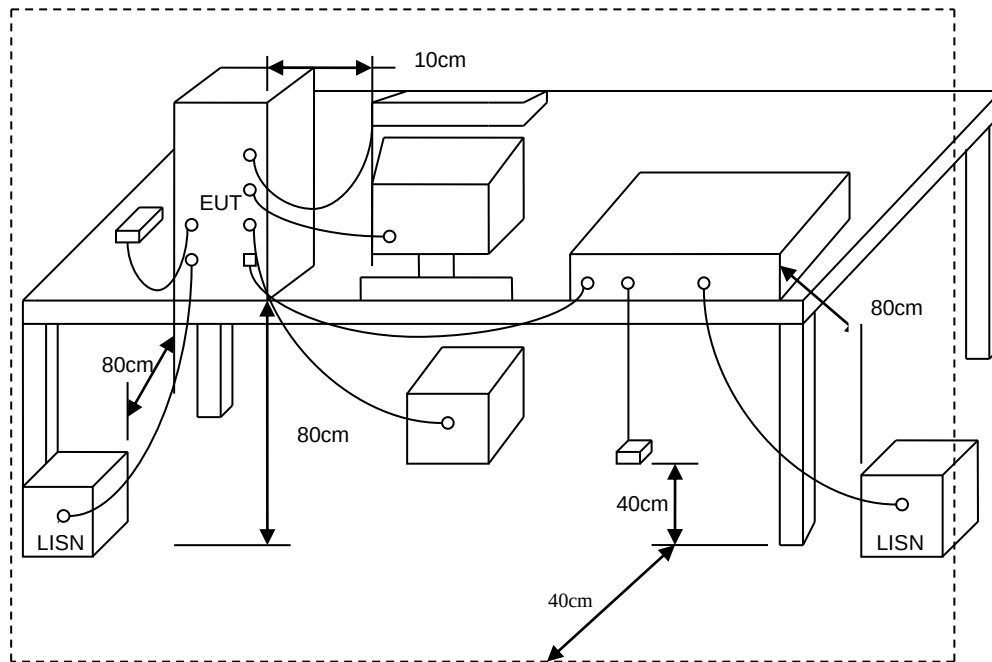



5.4 Test Result and Data

Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	LINE
Test Mode	:	Mode 3		:	

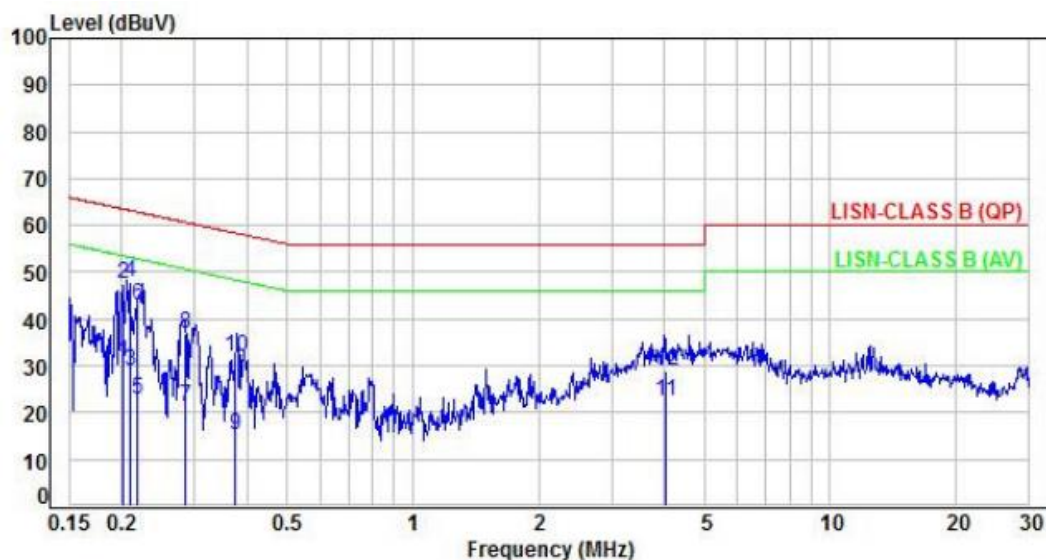

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.20	9.92	20.94	30.86	53.56	-22.70	Average	P
2	0.20	9.92	37.48	47.40	63.56	-16.16	QP	P
3	0.21	9.92	19.04	28.96	53.21	-24.25	Average	P
4	0.21	9.92	38.00	47.92	63.21	-15.29	QP	P
5	0.22	9.92	12.90	22.82	52.86	-30.04	Average	P
6	0.22	9.92	32.86	42.78	62.86	-20.08	QP	P
7	0.28	9.93	11.46	21.39	50.67	-29.28	Average	P
8	0.28	9.93	26.76	36.69	60.67	-23.98	QP	P
9	0.38	9.94	5.15	15.09	48.37	-33.28	Average	P
10	0.38	9.94	21.97	31.91	58.37	-26.46	QP	P
11	4.03	10.09	12.29	22.38	46.00	-23.62	Average	P
12	4.03	10.09	18.79	28.88	56.00	-27.12	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	NEUTRAL
Test Mode	:	Mode 3		:	

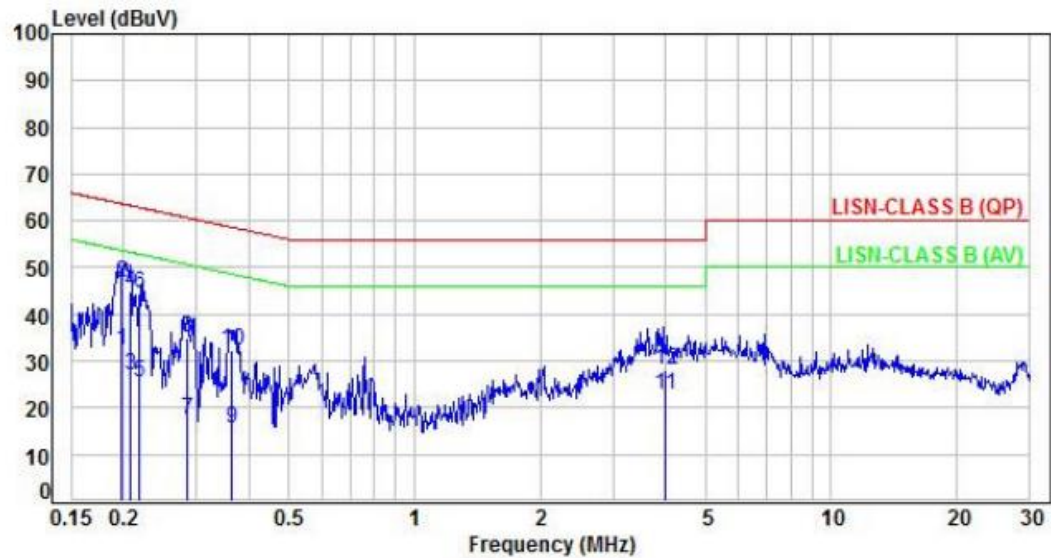

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.20	9.95	22.29	32.24	53.67	-21.43	Average	P
2	0.20	9.95	36.96	46.91	63.67	-16.76	QP	P
3	0.21	9.95	17.20	27.15	53.33	-26.18	Average	P
4	0.21	9.95	35.10	45.05	63.33	-18.28	QP	P
5	0.22	9.95	15.44	25.39	52.88	-27.49	Average	P
6	0.22	9.95	34.39	44.34	62.88	-18.54	QP	P
7	0.28	9.95	7.55	17.50	50.67	-33.17	Average	P
8	0.28	9.95	25.07	35.02	60.67	-25.65	QP	P
9	0.36	9.96	5.78	15.74	48.67	-32.93	Average	P
10	0.36	9.96	22.32	32.28	58.67	-26.39	QP	P
11	4.00	10.11	12.56	22.67	46.00	-23.33	Average	P
12	4.00	10.11	18.08	28.19	56.00	-27.81	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




6.3 Typical Test Setup


Below 30MHz test setup

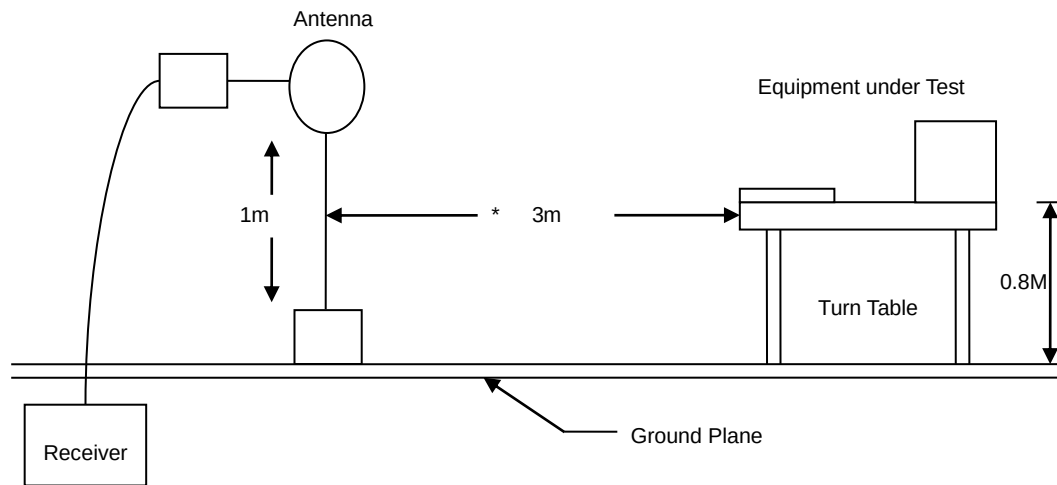

30MHz- 1GHz Test Setup

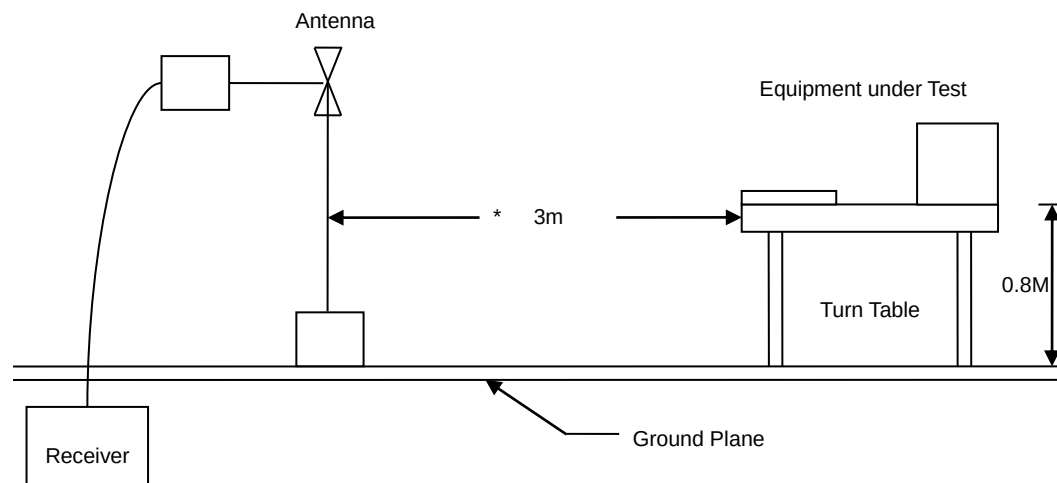

Above 1GHz Test Setup

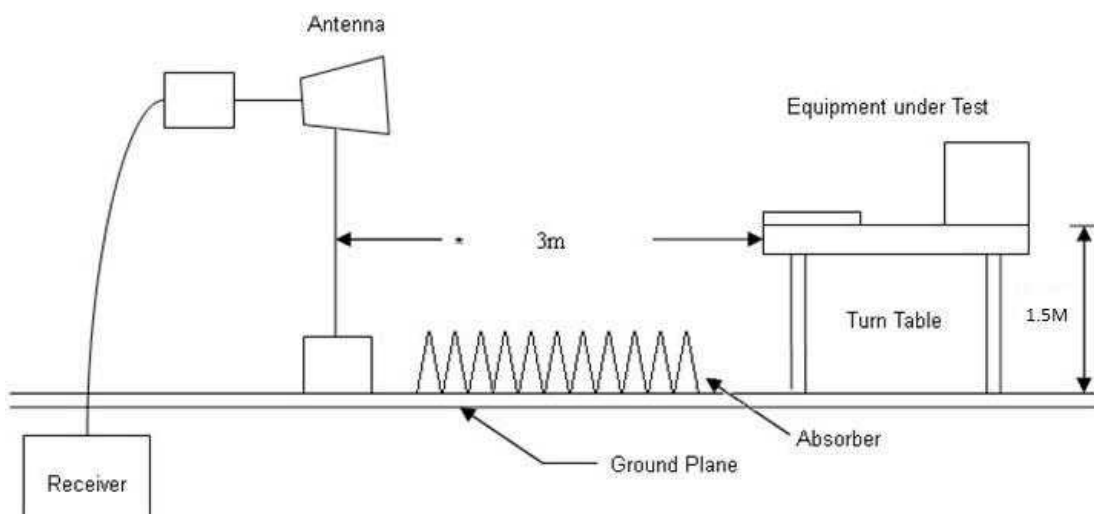




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3		:	

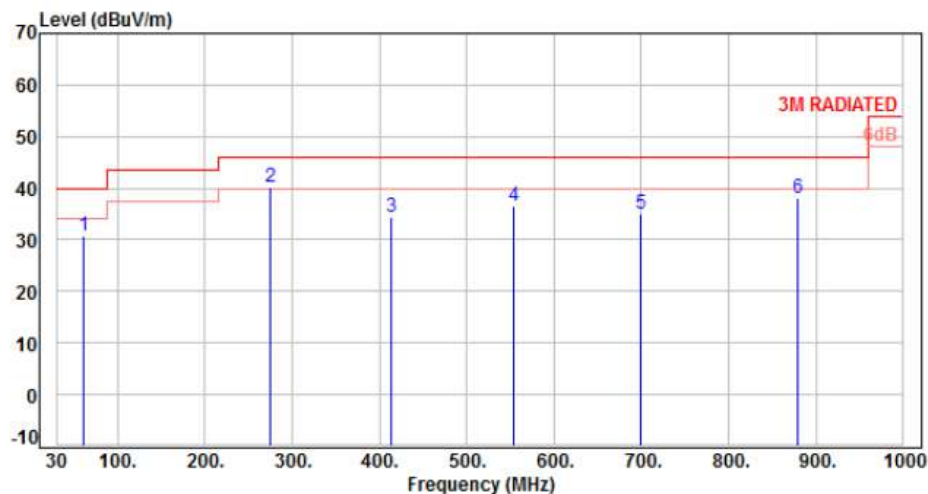

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	61.04	-10.17	40.92	30.75	40.00	-9.25	Peak	100	0	P
2	274.44	-9.21	49.46	40.25	46.00	-5.75	Peak	100	0	P
3	414.12	-5.37	39.65	34.28	46.00	-11.72	Peak	100	0	P
4	553.80	-2.46	39.06	36.60	46.00	-9.40	Peak	100	0	P
5	699.30	0.09	34.92	35.01	46.00	-10.99	Peak	100	0	P
6	879.72	2.98	35.14	38.12	46.00	-7.88	Peak	100	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3		:	

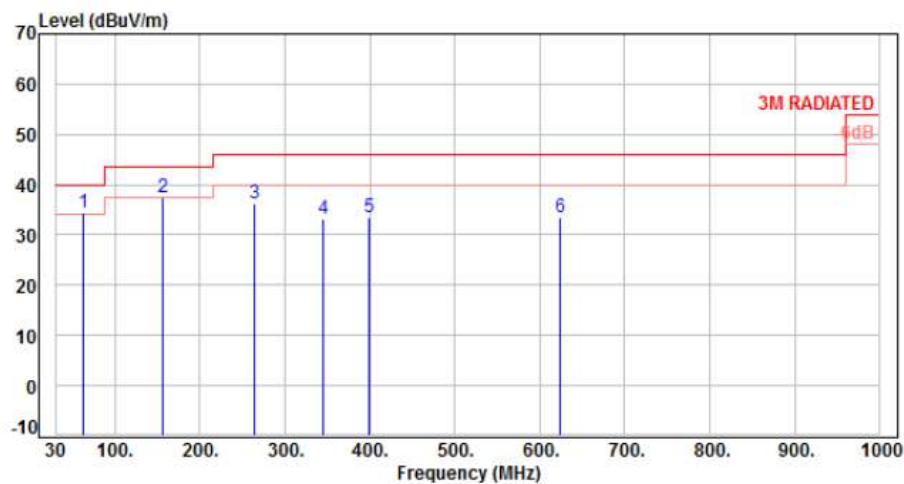

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	62.98	-10.48	44.90	34.42	40.00	-5.58	Peak	100	0	P
2	156.10	-9.47	46.88	37.41	43.50	-6.09	Peak	100	0	P
3	264.74	-9.76	46.13	36.37	46.00	-9.63	Peak	100	0	P
4	344.28	-7.25	40.58	33.33	46.00	-12.67	Peak	100	0	P
5	398.60	-5.74	39.28	33.54	46.00	-12.46	Peak	100	0	P
6	623.64	-0.76	34.24	33.48	46.00	-12.52	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH00, DH5		:	

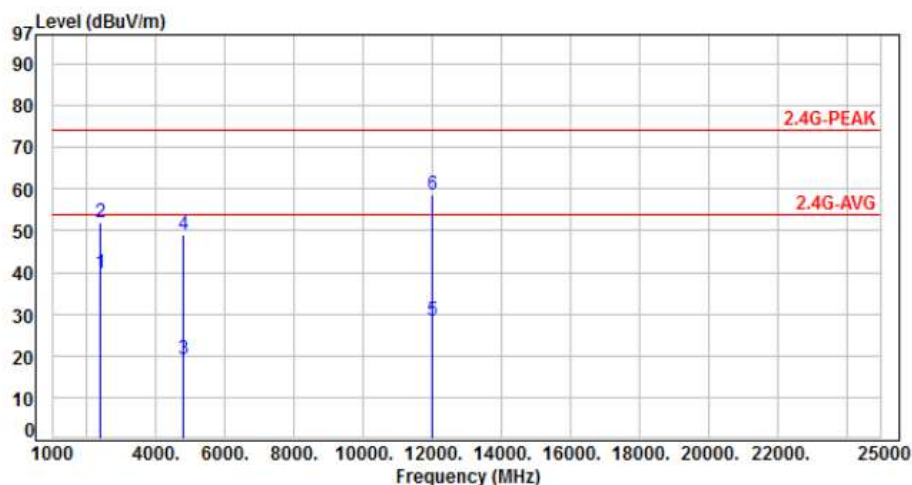

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	43.47	39.83	54.00	-14.17	Average	384	4	P
2	2390.00	-3.64	55.75	52.11	74.00	-21.89	Peak	384	4	P
3	4804.00	3.65	15.38	19.03	54.00	-34.97	Average	116	24	P
4	4804.00	3.65	45.48	49.13	74.00	-24.87	Peak	116	24	P
5	12010.00	13.50	15.02	28.52	54.00	-25.48	Average	100	128	P
6	12010.00	13.50	45.12	58.62	74.00	-15.38	Peak	100	128	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH00, DH5		:	

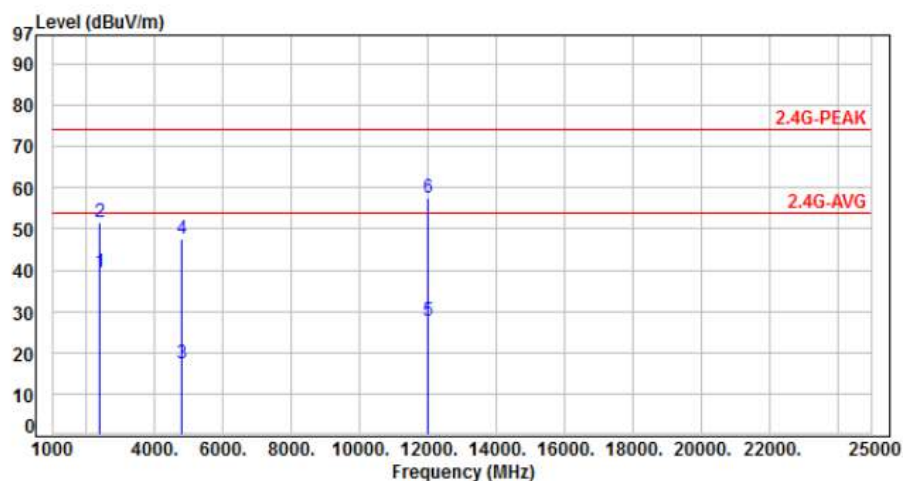

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	43.13	39.49	54.00	-14.51	Average	310	82	P
2	2390.00	-3.64	55.37	51.73	74.00	-22.27	Peak	310	82	P
3	4804.00	3.65	13.84	17.49	54.00	-36.51	Average	146	80	P
4	4804.00	3.65	43.94	47.59	74.00	-26.41	Peak	146	80	P
5	12010.00	13.50	14.08	27.58	54.00	-26.42	Average	100	225	P
6	12010.00	13.50	44.18	57.68	74.00	-16.32	Peak	100	225	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH39, DH5		:	

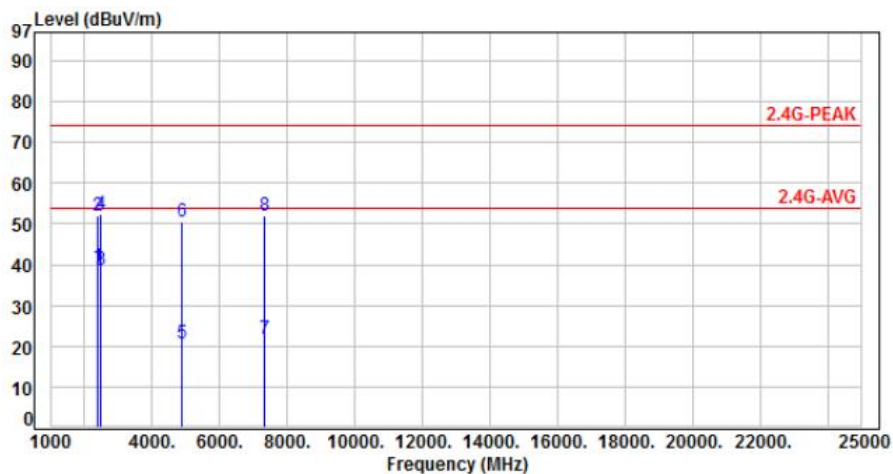

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.96	39.32	54.00	-14.68	Average	338	43	P
2	2390.00	-3.64	55.62	51.98	74.00	-22.02	Peak	338	43	P
3	2483.50	-3.30	42.10	38.80	54.00	-15.20	Average	338	43	P
4	2483.50	-3.30	55.68	52.38	74.00	-21.62	Peak	338	43	P
5	4882.00	3.97	16.59	20.56	54.00	-33.44	Average	100	51	P
6	4882.00	3.97	46.69	50.66	74.00	-23.34	Peak	100	51	P
7	7323.00	8.84	13.08	21.92	54.00	-32.08	Average	100	126	P
8	7323.00	8.84	43.18	52.02	74.00	-21.98	Peak	100	126	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH39, DH5		:	

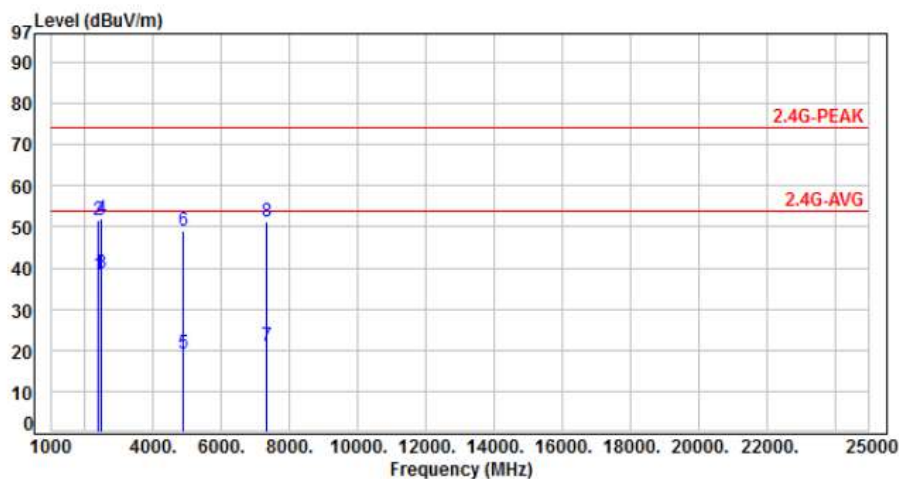

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.03	38.39	54.00	-15.61	Average	326	48	P
2	2390.00	-3.64	55.36	51.72	74.00	-22.28	Peak	326	48	P
3	2483.50	-3.30	42.15	38.85	54.00	-15.15	Average	326	48	P
4	2483.50	-3.30	55.40	52.10	74.00	-21.90	Peak	326	48	P
5	4882.00	3.97	15.09	19.06	54.00	-34.94	Average	100	114	P
6	4882.00	3.97	45.19	49.16	74.00	-24.84	Peak	100	114	P
7	7323.00	8.84	12.35	21.19	54.00	-32.81	Average	100	162	P
8	7323.00	8.84	42.45	51.29	74.00	-22.71	Peak	100	162	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH78, DH5		:	

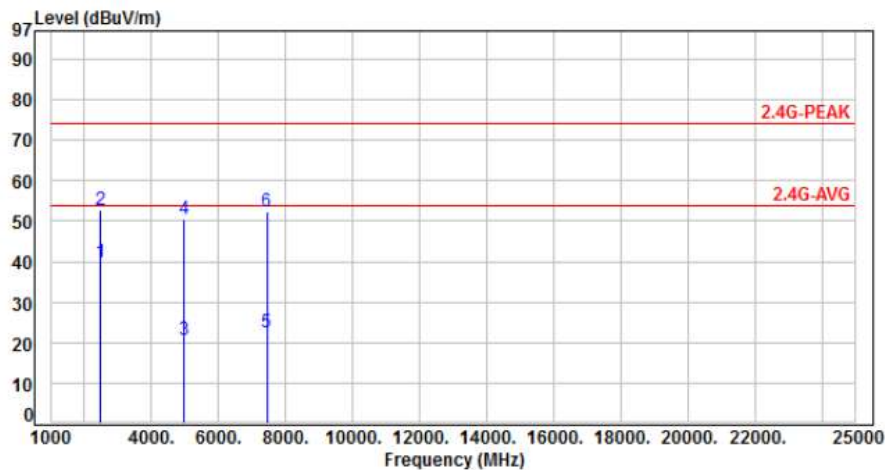

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	43.07	39.77	54.00	-14.23	Average	335	51	P
2	2483.50	-3.30	55.93	52.63	74.00	-21.37	Peak	335	51	P
3	4960.00	4.21	16.26	20.47	54.00	-33.53	Average	113	54	P
4	4960.00	4.21	46.36	50.57	74.00	-23.43	Peak	113	54	P
5	7440.00	8.98	13.46	22.44	54.00	-31.56	Average	100	108	P
6	7440.00	8.98	43.56	52.54	74.00	-21.46	Peak	100	108	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH78, DH5		:	

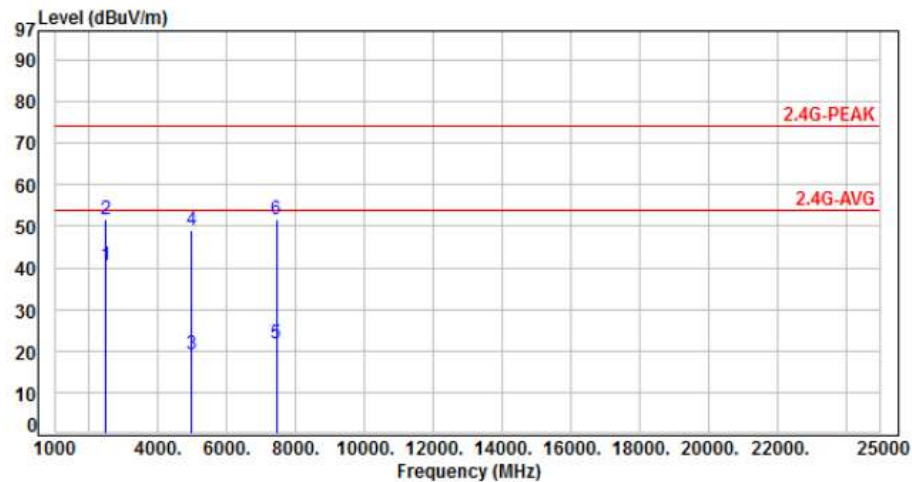

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	43.94	40.64	54.00	-13.36	Average	306	47	P
2	2483.50	-3.30	55.08	51.78	74.00	-22.22	Peak	306	47	P
3	4960.00	4.21	14.88	19.09	54.00	-34.91	Average	100	95	P
4	4960.00	4.21	44.98	49.19	74.00	-24.81	Peak	100	95	P
5	7440.00	8.98	12.66	21.64	54.00	-32.36	Average	100	167	P
6	7440.00	8.98	42.76	51.74	74.00	-22.26	Peak	100	167	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH00, 3DH5		:	

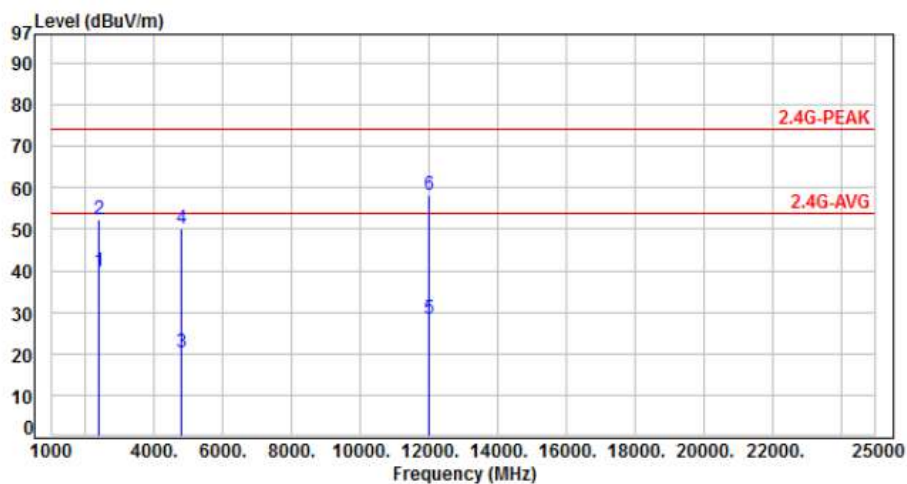

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	43.38	39.74	54.00	-14.26	Average	381	10	P
2	2390.00	-3.64	55.92	52.28	74.00	-21.72	Peak	381	10	P
3	4804.00	3.65	16.56	20.21	54.00	-33.79	Average	110	33	P
4	4804.00	3.65	46.66	50.31	74.00	-23.69	Peak	110	33	P
5	12010.00	13.50	14.85	28.35	54.00	-25.65	Average	100	122	P
6	12010.00	13.50	44.95	58.45	74.00	-15.55	Peak	100	122	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH00, 3DH5		:	

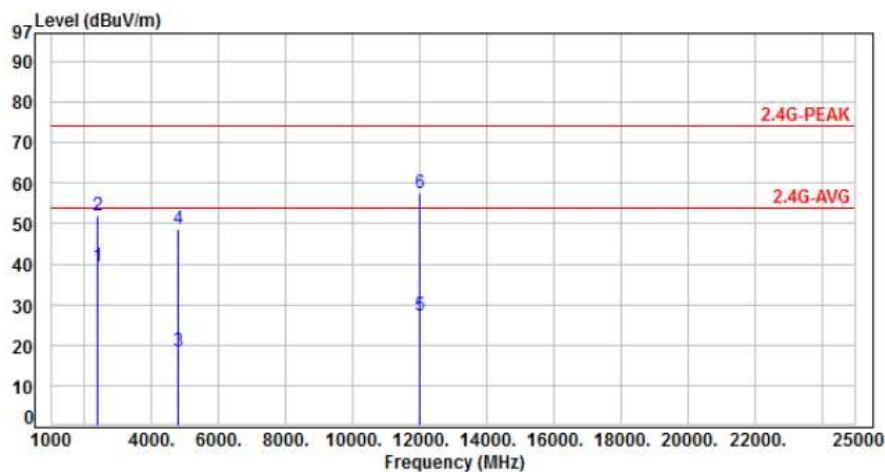

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	43.05	39.41	54.00	-14.59	Average	305	61	P
2	2390.00	-3.64	55.52	51.88	74.00	-22.12	Peak	305	61	P
3	4804.00	3.65	14.79	18.44	54.00	-35.56	Average	305	61	P
4	4804.00	3.65	44.89	48.54	74.00	-25.46	Peak	305	61	P
5	12010.00	13.50	13.92	27.42	54.00	-26.58	Average	100	218	P
6	12010.00	13.50	44.02	57.52	74.00	-16.48	Peak	100	218	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH39, 3DH5		:	

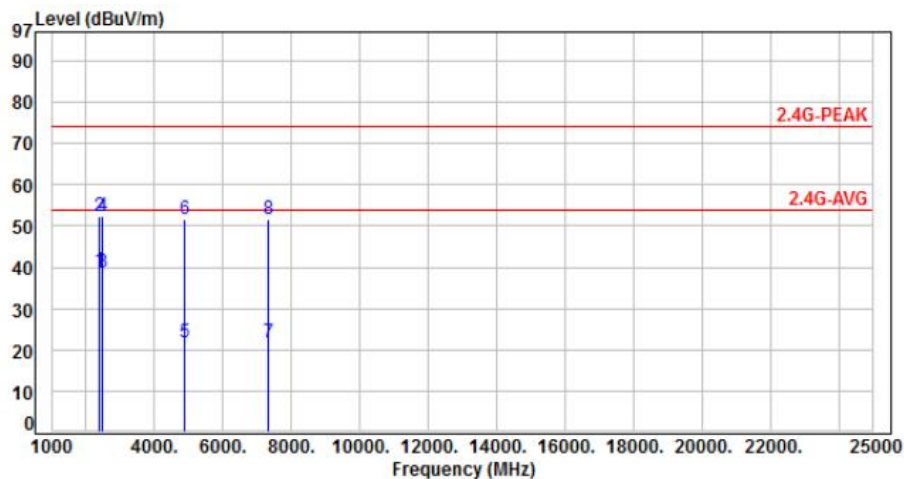

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.82	39.18	54.00	-14.82	Average	332	45	P
2	2390.00	-3.64	55.89	52.25	74.00	-21.75	Peak	332	45	P
3	2483.50	-3.30	42.05	38.75	54.00	-15.25	Average	336	42	P
4	2483.50	-3.30	55.85	52.55	74.00	-21.45	Peak	336	42	P
5	4882.00	3.97	17.74	21.71	54.00	-32.29	Average	100	55	P
6	4882.00	3.97	47.84	51.81	74.00	-22.19	Peak	100	55	P
7	7323.00	8.84	12.86	21.70	54.00	-32.30	Average	100	133	P
8	7323.00	8.84	42.96	51.80	74.00	-22.20	Peak	100	133	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH39, 3DH5		:	

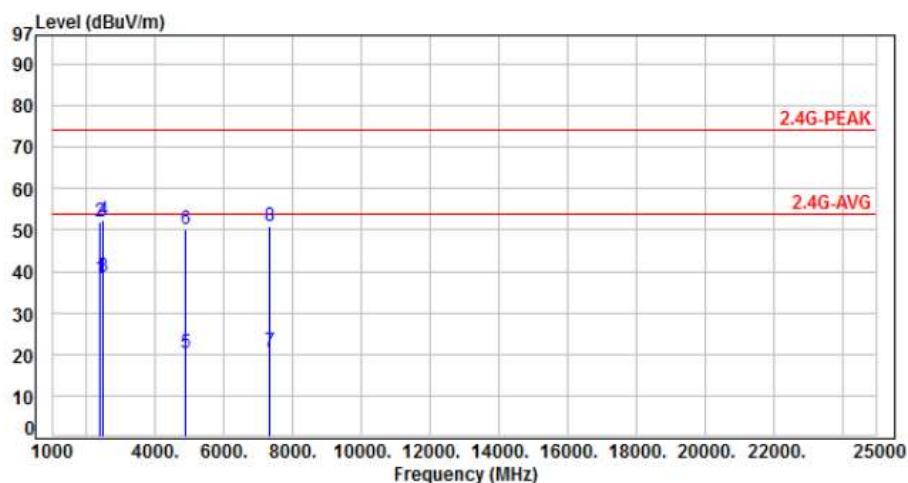

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	41.92	38.28	54.00	-15.72	Average	323	50	P
2	2390.00	-3.64	55.51	51.87	74.00	-22.13	Peak	323	50	P
3	2483.50	-3.30	42.03	38.73	54.00	-15.27	Average	323	50	P
4	2483.50	-3.30	55.68	52.38	74.00	-21.62	Peak	323	50	P
5	4882.00	3.97	16.20	20.17	54.00	-33.83	Average	100	121	P
6	4882.00	3.97	46.30	50.27	74.00	-23.73	Peak	100	121	P
7	7323.00	8.84	11.98	20.82	54.00	-33.18	Average	100	152	P
8	7323.00	8.84	42.08	50.92	74.00	-23.08	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH78, 3DH5		:	

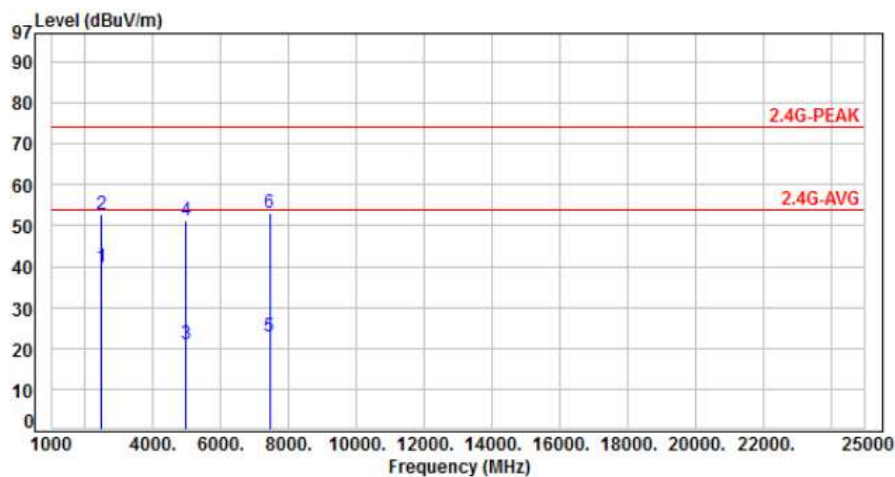

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	43.13	39.83	54.00	-14.17	Average	336	52	P
2	2483.50	-3.30	55.96	52.66	74.00	-21.34	Peak	336	52	P
3	4960.00	4.21	16.95	21.16	54.00	-32.84	Average	100	48	P
4	4960.00	4.21	47.05	51.26	74.00	-22.74	Peak	100	48	P
5	7440.00	8.98	13.85	22.83	54.00	-31.17	Average	100	111	P
6	7440.00	8.98	43.95	52.93	74.00	-21.07	Peak	100	111	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH78, 3DH5		:	

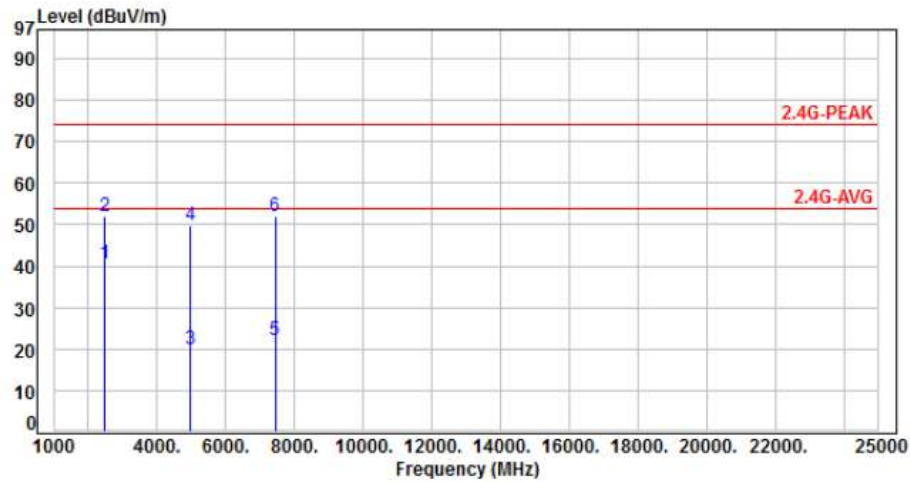

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	43.99	40.69	54.00	-13.31	Average	309	45	P
2	2483.50	-3.30	55.20	51.90	74.00	-22.10	Peak	309	45	P
3	4960.00	4.21	15.54	19.75	54.00	-34.25	Average	100	99	P
4	4960.00	4.21	45.64	49.85	74.00	-24.15	Peak	100	99	P
5	7440.00	8.98	12.99	21.97	54.00	-32.03	Average	100	171	P
6	7440.00	8.98	43.09	52.07	74.00	-21.93	Peak	100	171	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data






Note: Test plots refer to the following pages.



Modulation Type: GFSK, CH00






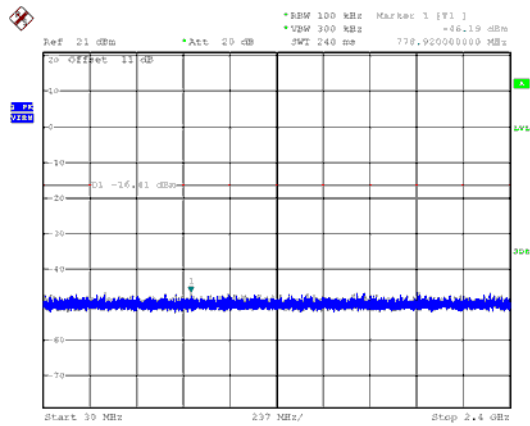








Modulation Type: GFSK, CH39

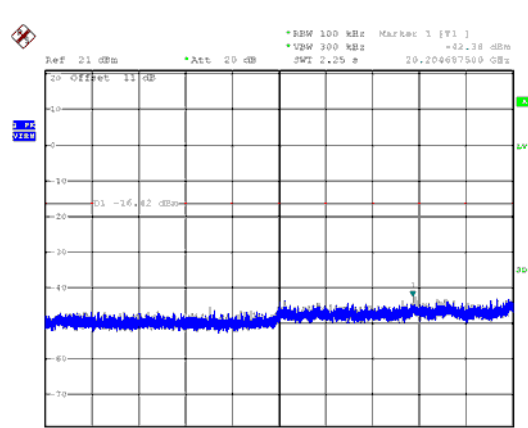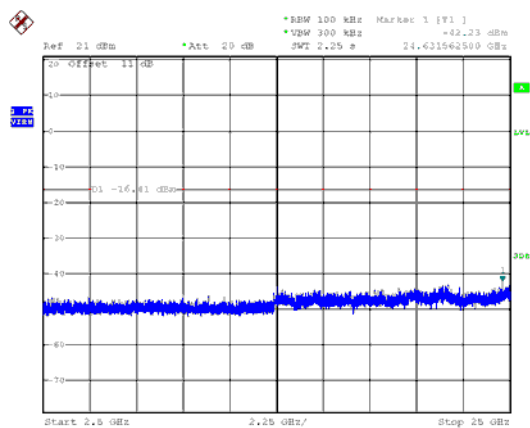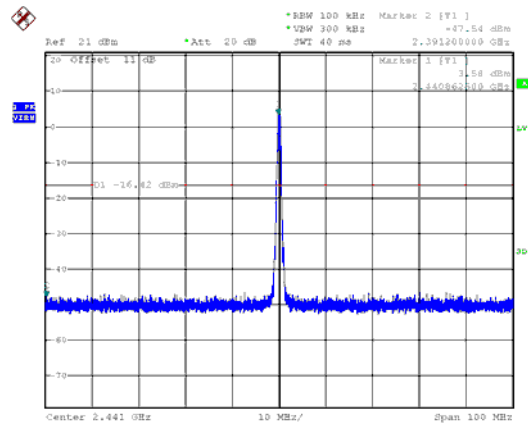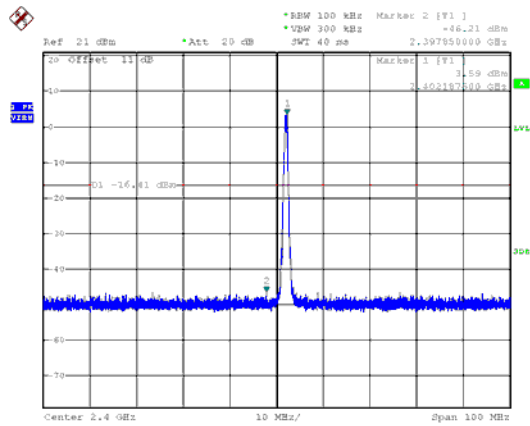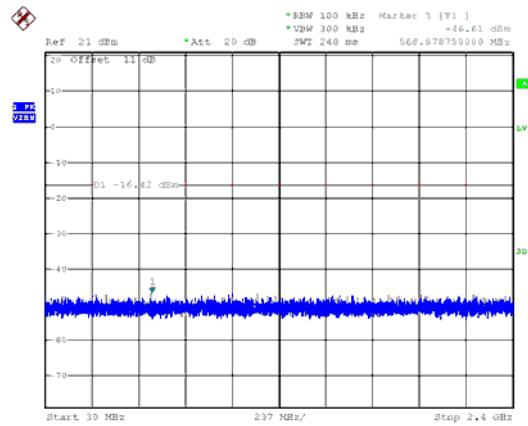




Modulation Type: GFSK, CH78

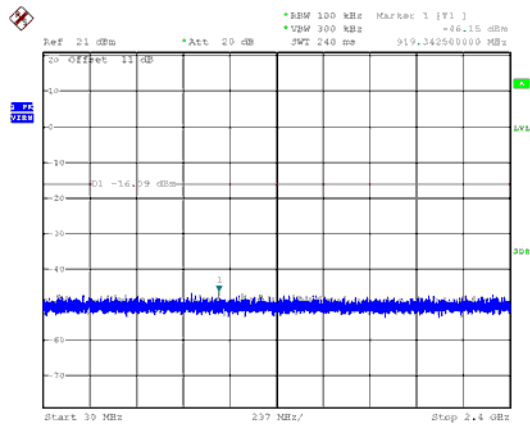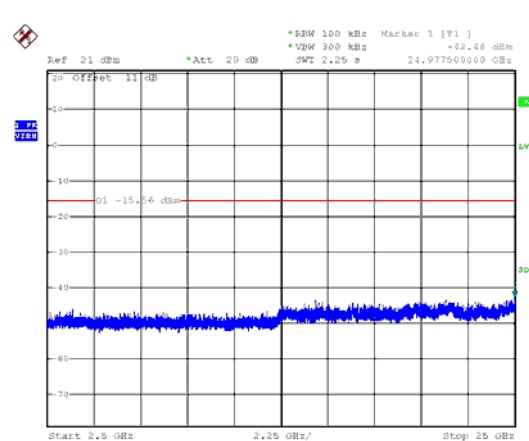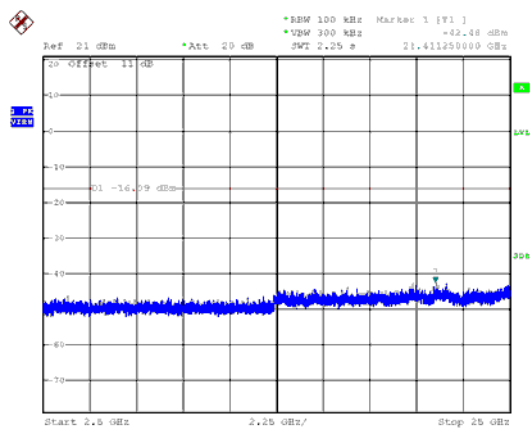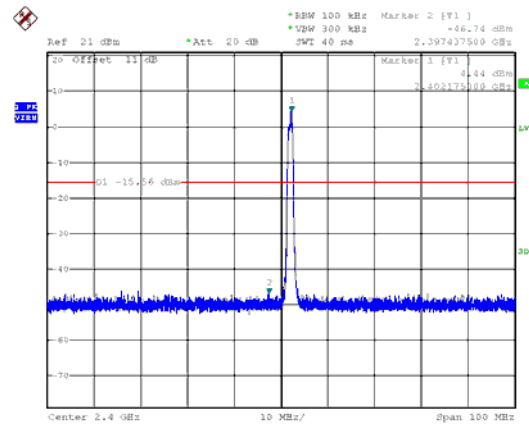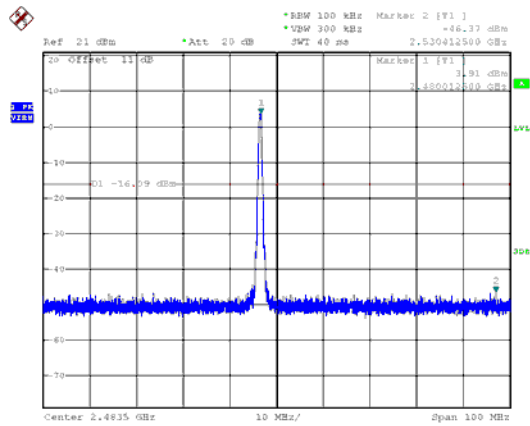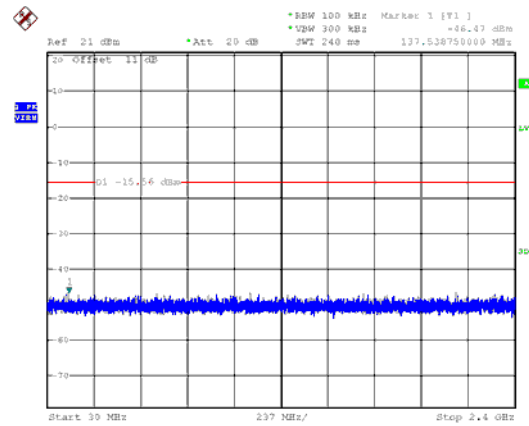Modulation Type: $\pi/4$ -DQPSK, CH00

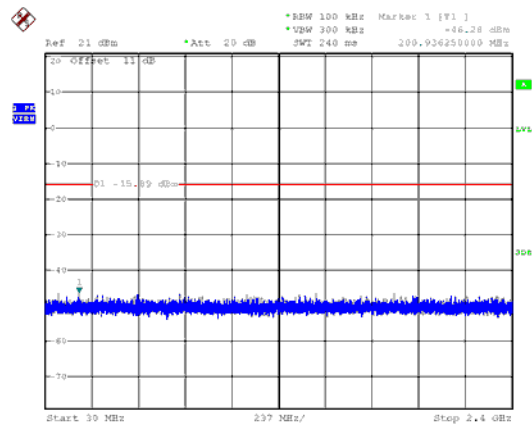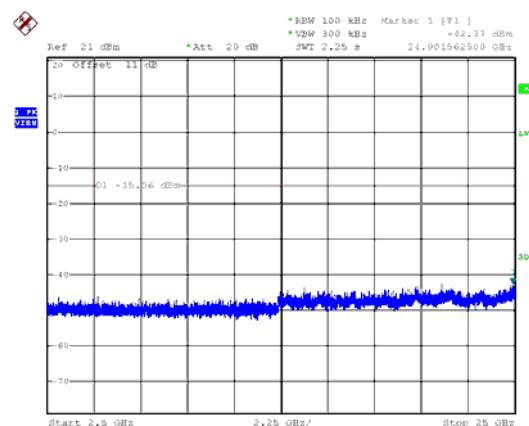
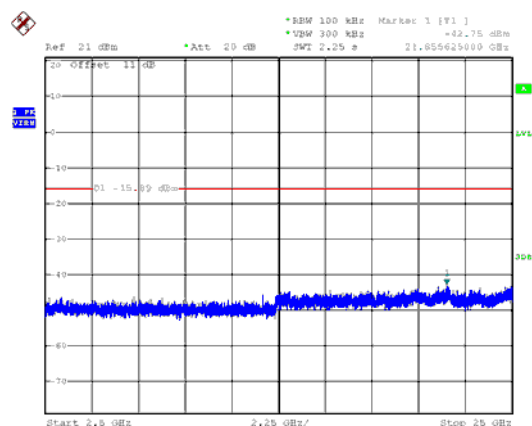
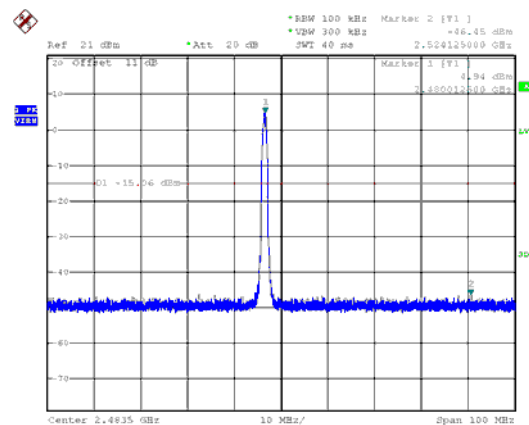
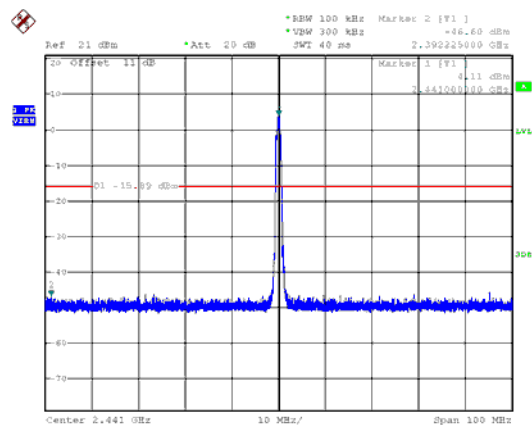
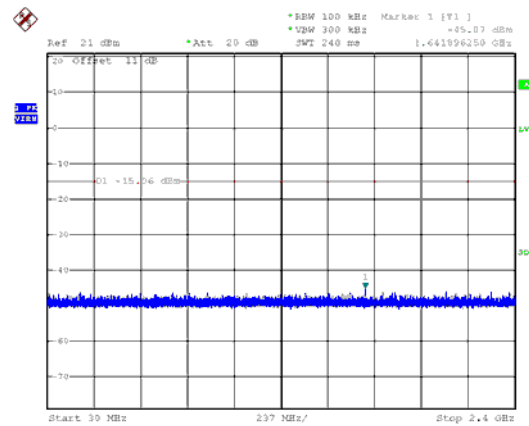
Modulation Type: $\pi/4$ -DQPSK, CH39Modulation Type: $\pi/4$ -DQPSK, CH78



Modulation Type: 8DPSK, CH00



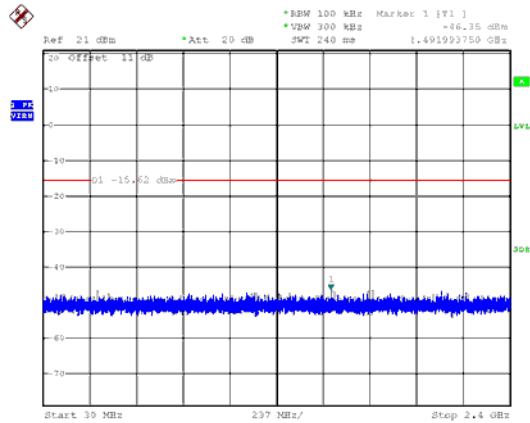


Modulation Type: 8DPSK, CH39

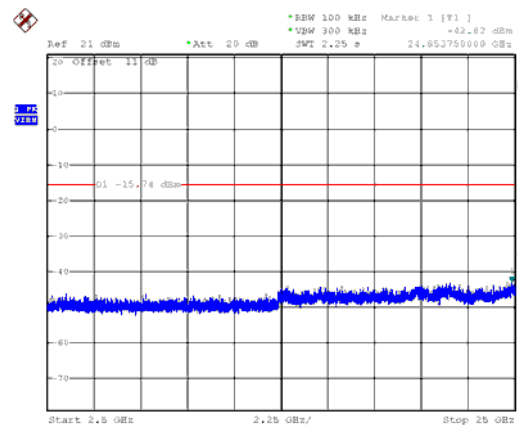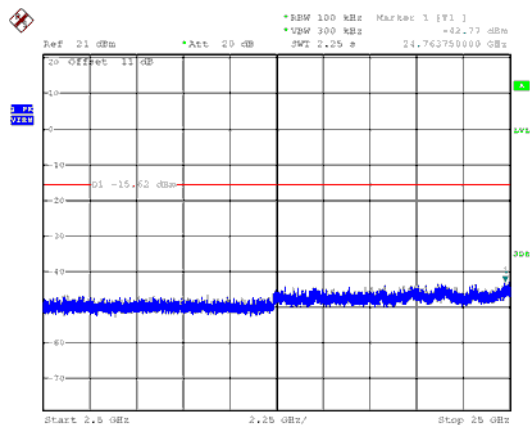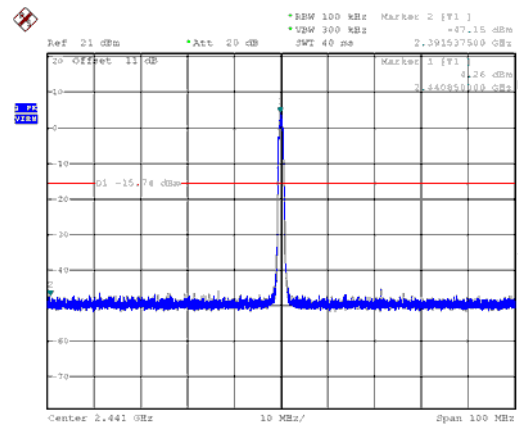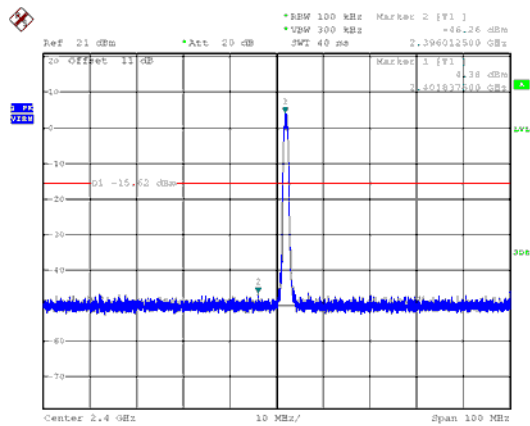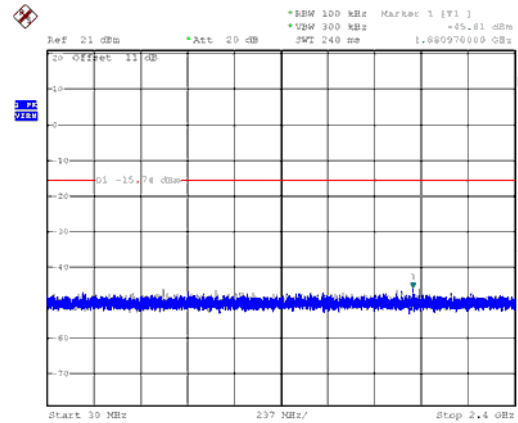



Modulation Type: 8DPSK, CH78



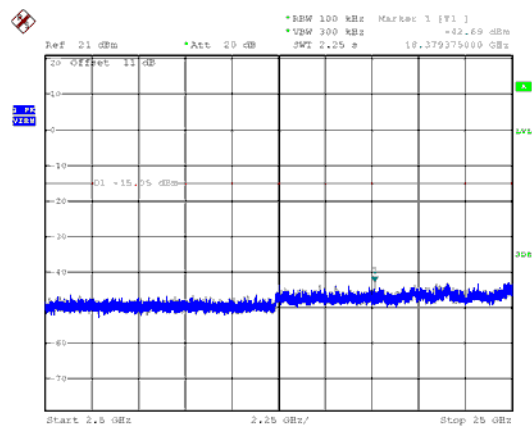
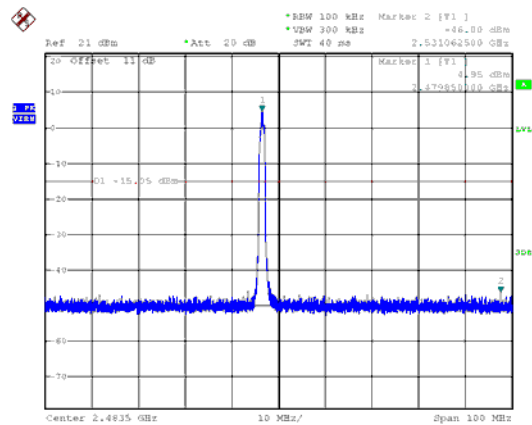
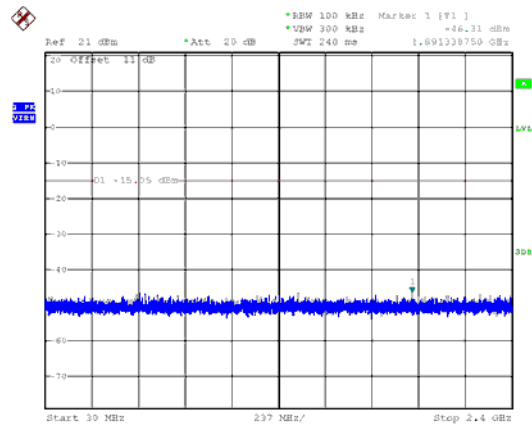




Ref 21 dBm Att 20 dB BW 100 kHz Marker 1 [V1] =46.25 dBm
 VSWR 300 kHz SWI 240 ms 224.04375000 MHz




20 Offset 11 dB
 10
 0
 -10
 -20
 -30
 -40
 -50
 -60
 -70

D1 -15.61 dBm
 Start 30 MHz 237 MHz/ Step 2.4 GHz

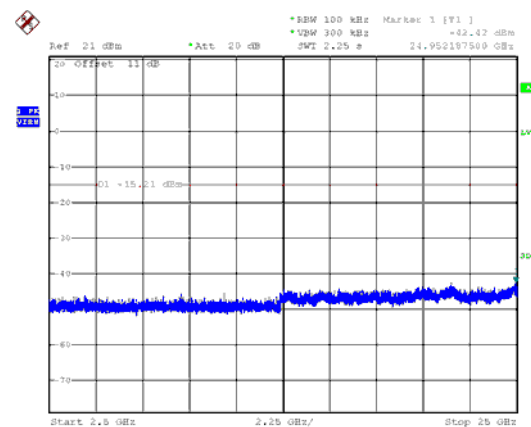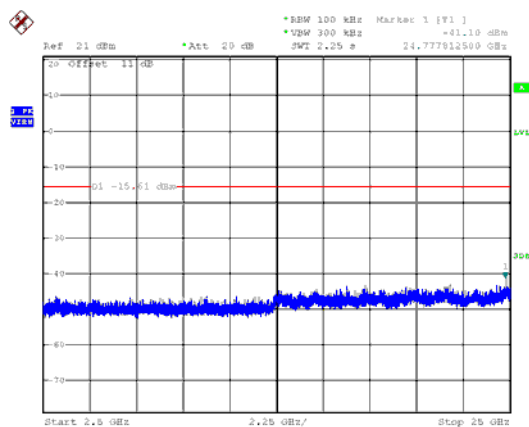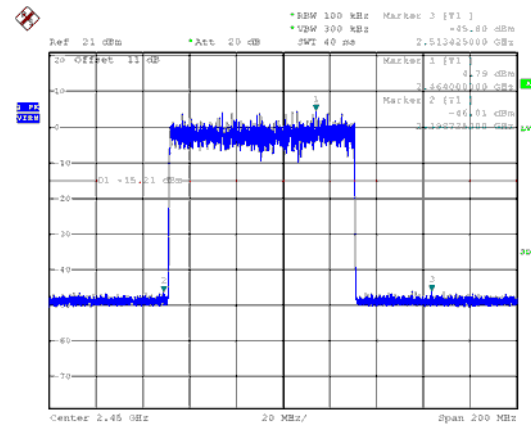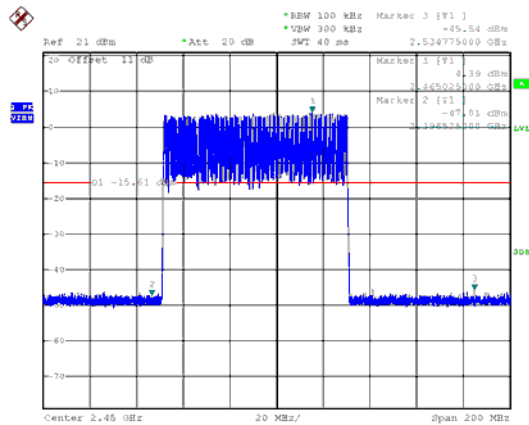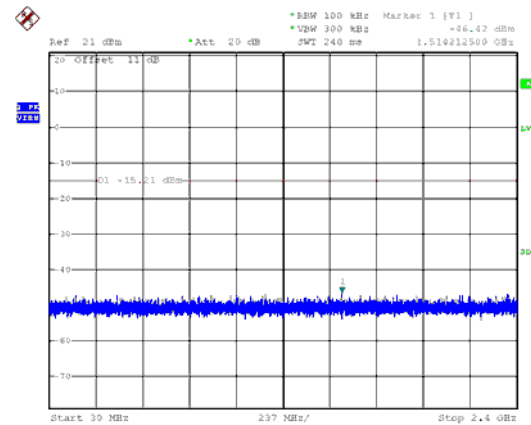



Modulation Type: 8DPSK

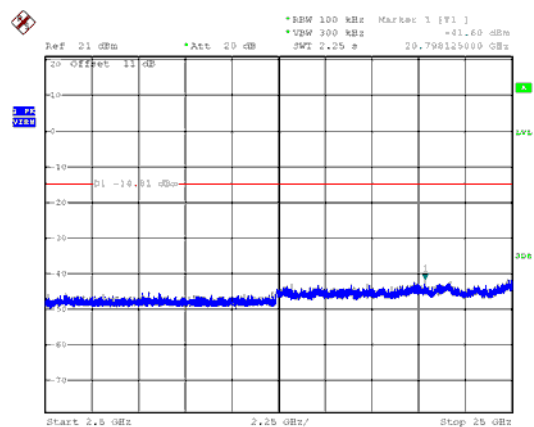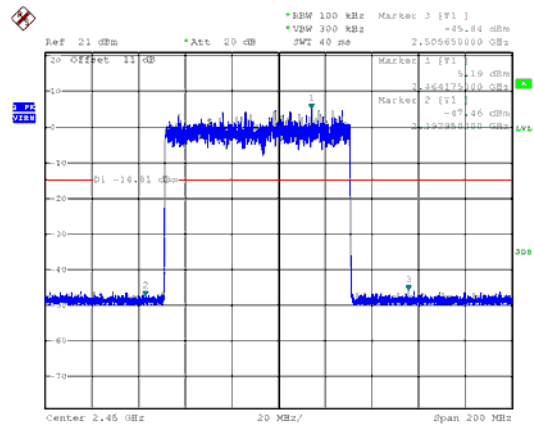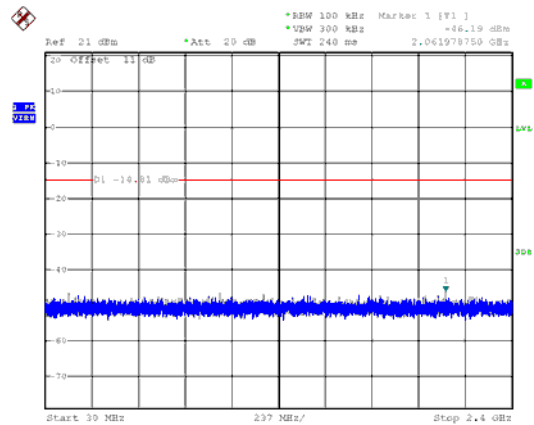



8. 20dB Bandwidth Measurement Data


8.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

8.2 Test Procedures



- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

8.3 Test Setup Layout




8.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	20dB Bandwidth (MHz)	2/3 20dB Bandwidth (MHz)
GFSK	0	2402	0.970	0.647
	39	2441	0.970	0.647
	78	2480	0.970	0.647
$\pi/4$ -DQPSK	0	2402	1.290	0.860
	39	2441	1.280	0.853
	78	2480	1.280	0.853
8DPSK	0	2402	1.310	0.873
	39	2441	1.300	0.867
	78	2480	1.300	0.867

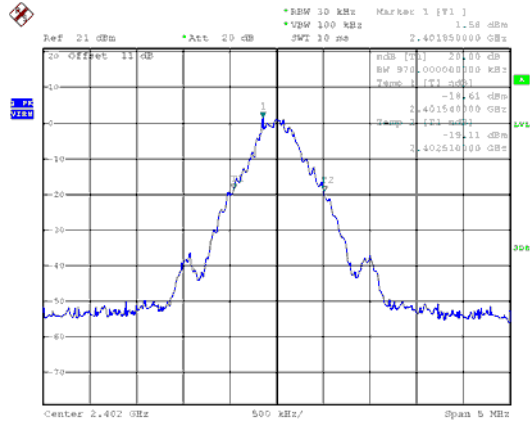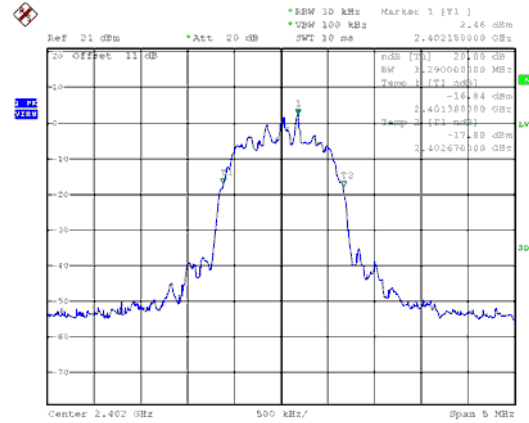Modulation Type: GFSK
CH00Modulation Type: $\pi/4$ -DQPSK
CH00


CH39

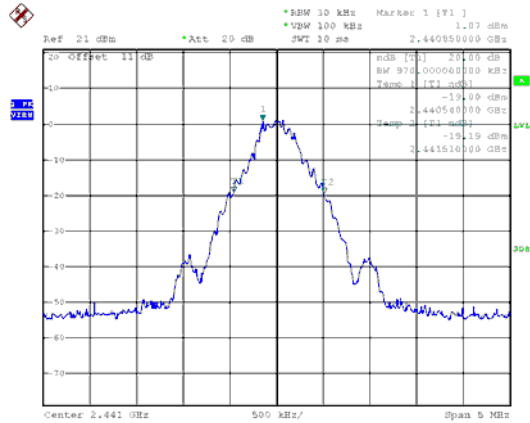


CH39

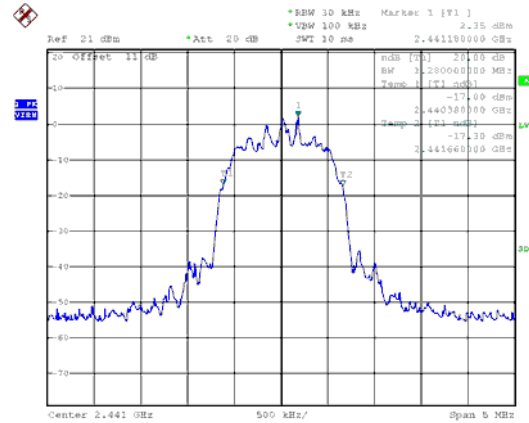


CH78

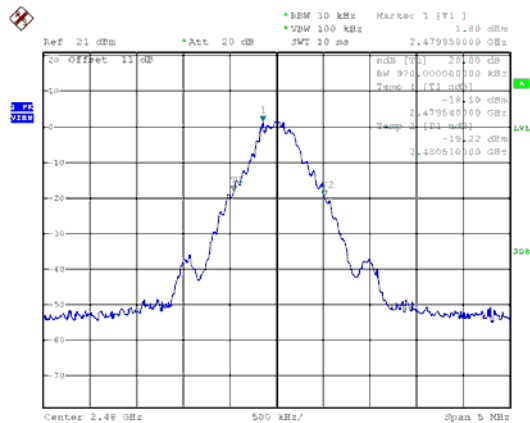


CH78

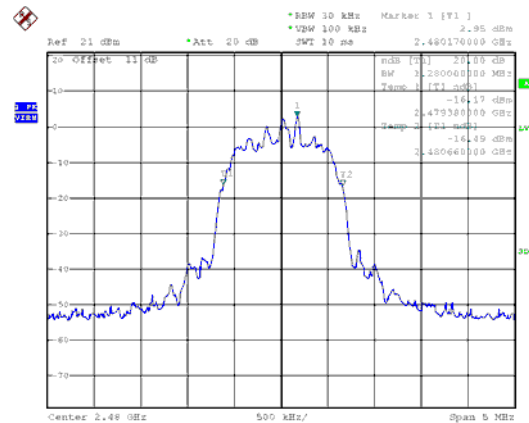


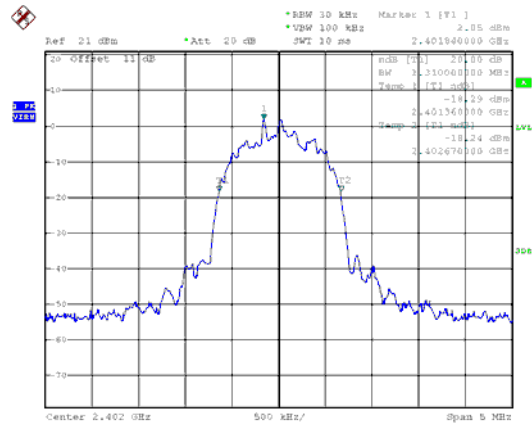Modulation Type: 8DSPK
CH00

CH39

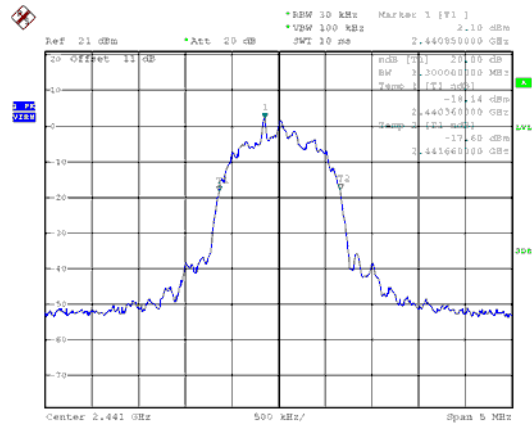

CH78

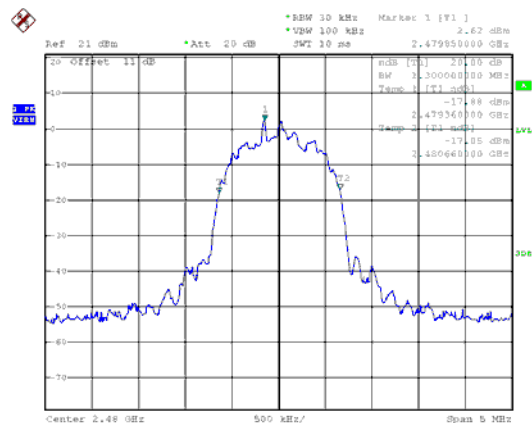



9. Frequencies Separation


9.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

9.2 Test Procedures



- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.

9.3 Test Setup Layout




9.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
GFSK	0	2402	1.002	0.647
	39	2441	1.002	0.647
	78	2480	1.002	0.647
$\pi/4$ -DQPSK	0	2402	1.002	0.860
	39	2441	1.002	0.853
	78	2480	1.002	0.853
8DPSK	0	2402	1.002	0.873
	39	2441	1.002	0.867
	78	2480	1.002	0.867

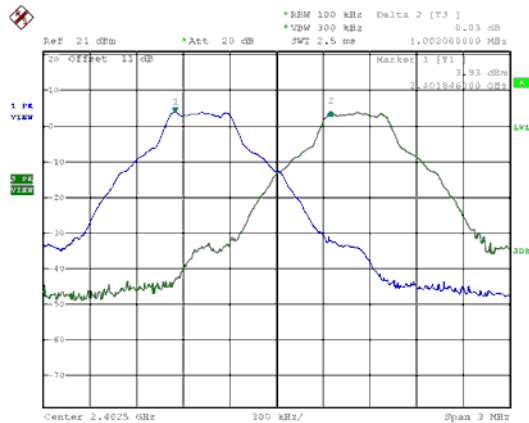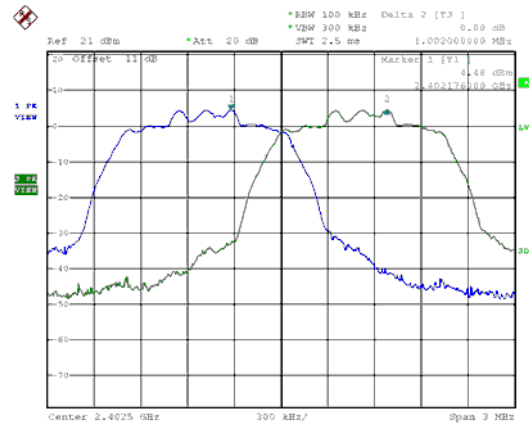Modulation Type: GFSK
CH00Modulation Type: $\pi/4$ -DQPSK
CH00


CH39

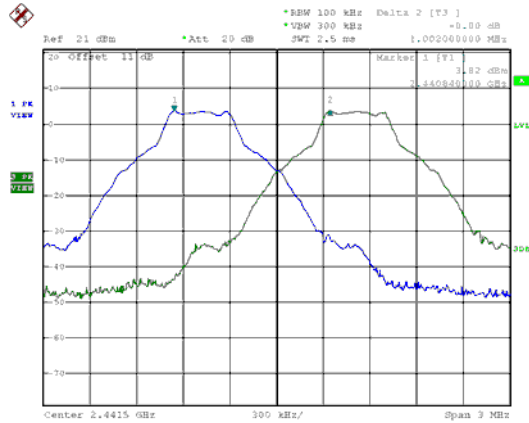


CH39

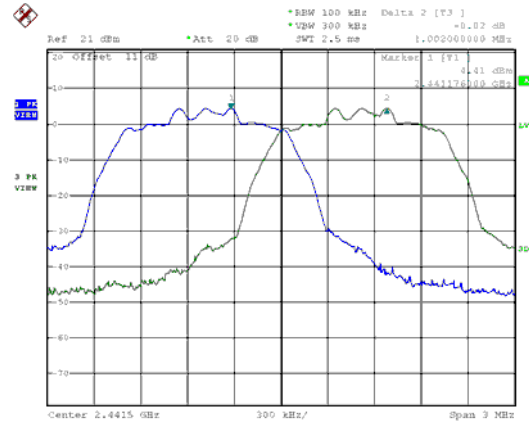


CH78

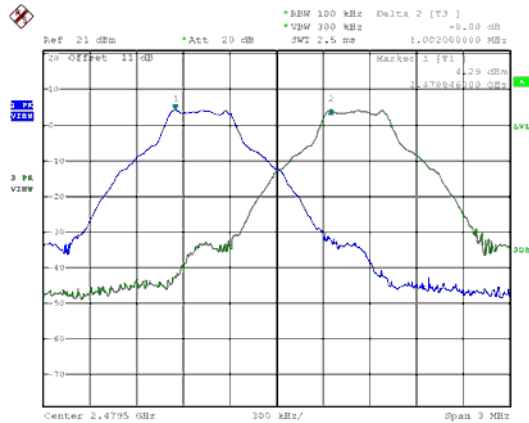


CH78

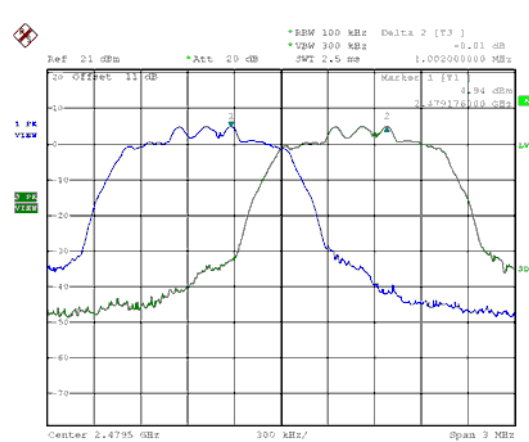


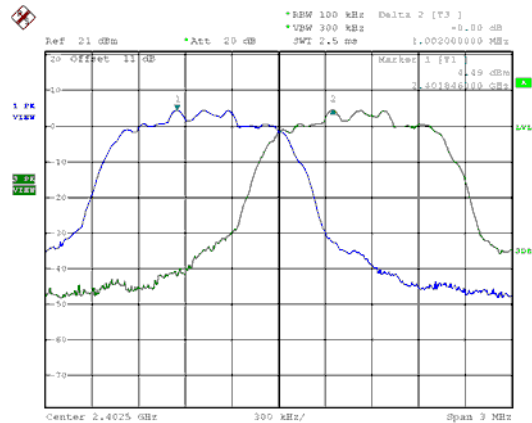Modulation Type: 8DSPK
CH00

CH39

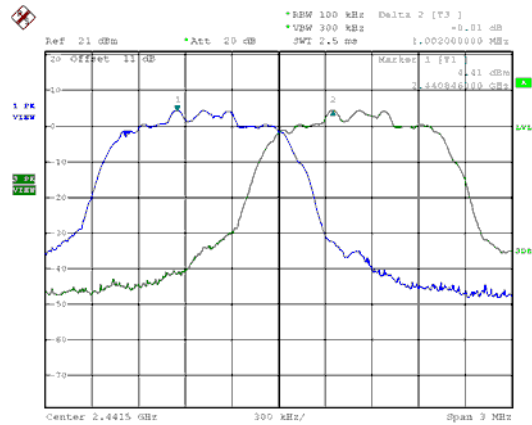

CH78

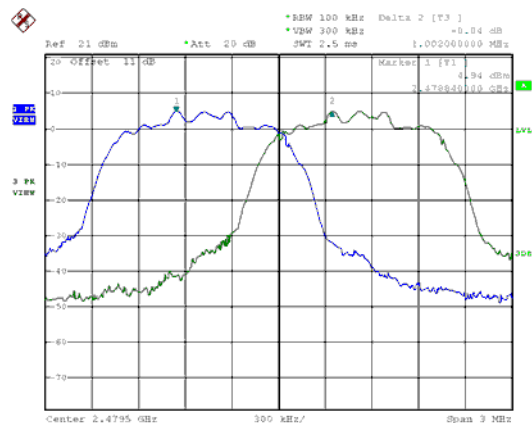



10. Dwell Time on each channel


10.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Measure the time duration of one transmission on the measured frequency.

10.3 Test Setup Layout





10.4 Test Result and Data

Channel	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 31.6 (79 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
GFSK-DH1	2402	0.400	320.10	128.04	400
GFSK-DH3	2402	1.660	159.90	265.43	400
GFSK-DH5	2402	2.940	106.81	314.02	400
$\pi/4$ -DQPSK-DH1	2402	0.410	320.10	131.24	400
$\pi/4$ -DQPSK-DH3	2402	1.660	159.90	265.43	400
$\pi/4$ -DQPSK-DH5	2402	2.940	106.81	314.02	400
8DPSK-DH1	2402	0.410	320.10	131.24	400
8DPSK-DH3	2402	1.660	159.90	265.43	400
8DPSK-DH5	2402	2.940	106.81	314.02	400



Channel	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 8 (20 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
AFH-DH1	2402-2421	0.400	160.00	64.00	400
AFH-DH3	2402-2421	1.660	80.00	132.80	400
AFH-DH5	2402-2421	2.940	53.33	156.79	400





Modulation Type: GFSK(DH1)

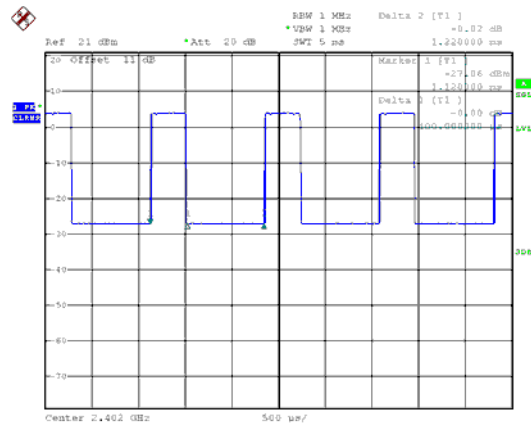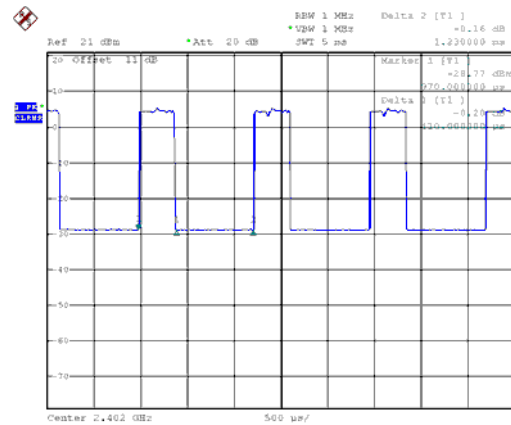Modulation Type: $\pi/4$ -DQPSK (DH1)

Modulation Type: GFSK(DH3)

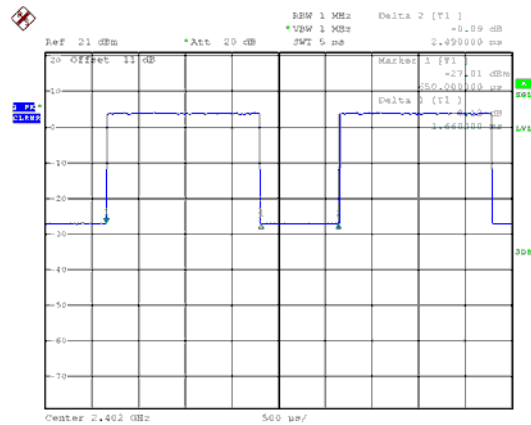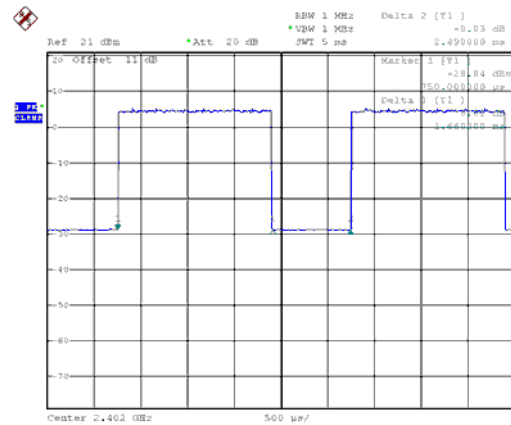
Modulation Type: $\pi/4$ -DQPSK (DH3)

Modulation Type: GFSK(DH5)

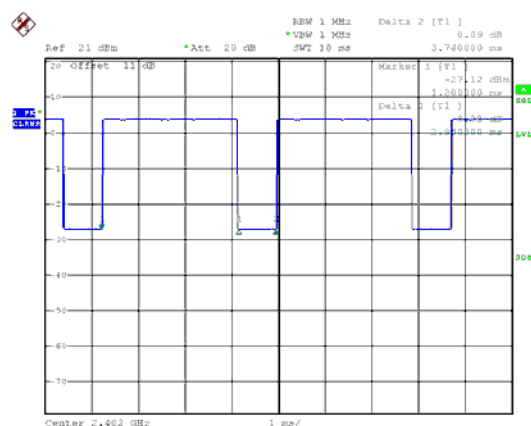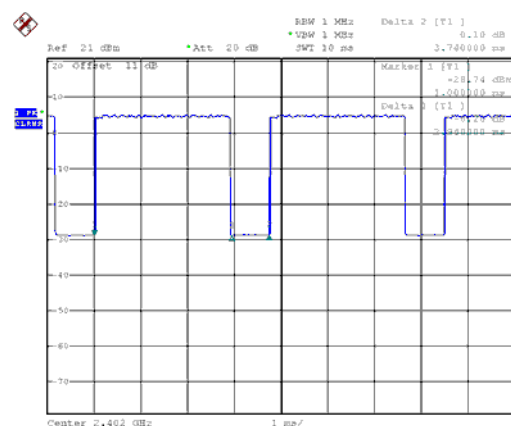
Modulation Type: $\pi/4$ -DQPSK (DH5)




Modulation Type: 8DSPK (DH1)

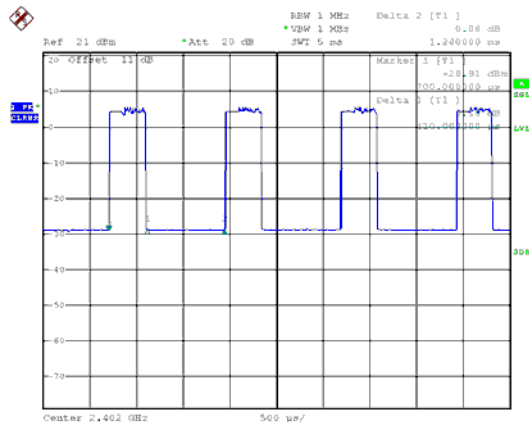


Modulation Type: AFH (DH1)

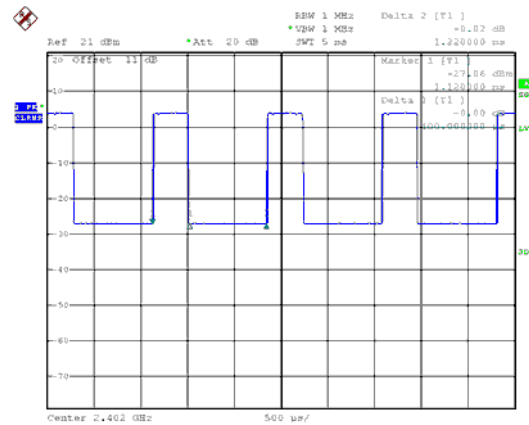


Modulation Type: 8DSPK (DH3)

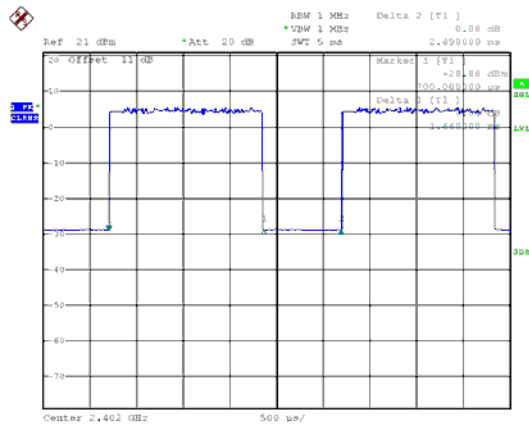


Modulation Type: AFH (DH3)

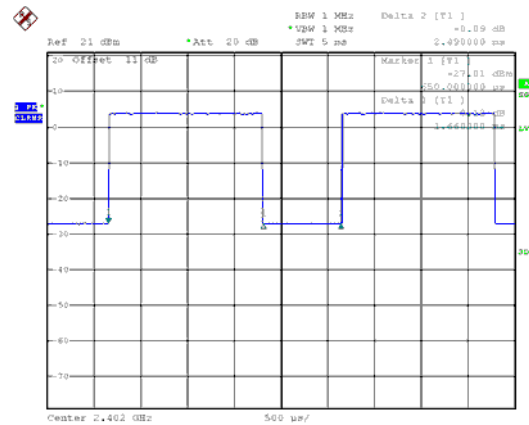

Modulation Type: 8DSPK (DH5)

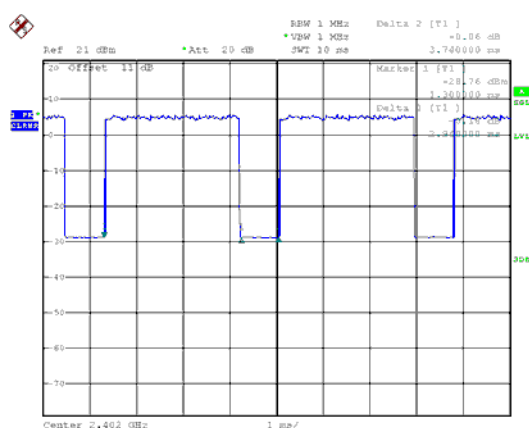

Modulation Type: AFH (DH5)

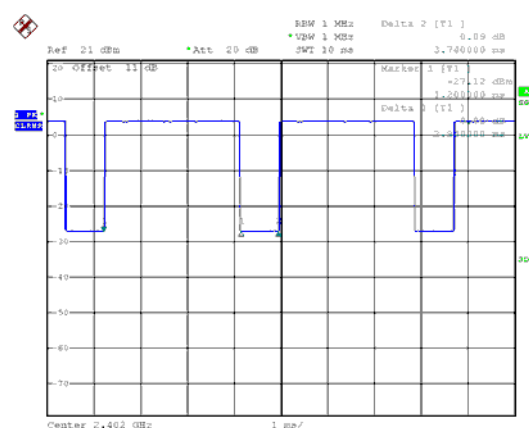



11. Number of Hopping Channels


11.1 Test Limit

Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

11.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. 2. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- c. 3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

11.3 Test Setup Layout




11.4 Test Result and Data


Modulation Type	Hopping Channels
GFSK	79
$\pi/4$ -DQPSK	79
8DPSK	79




Modulation Type: GFSK

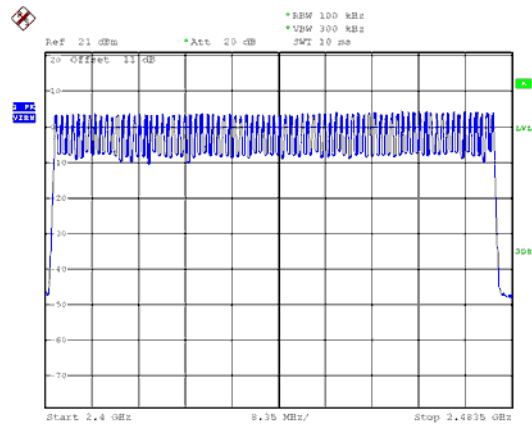

Modulation Type: $\pi/4$ -DQPSK

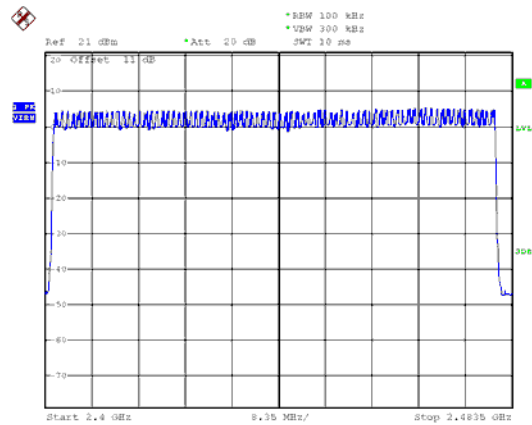

Modulation Type: 8DPSK

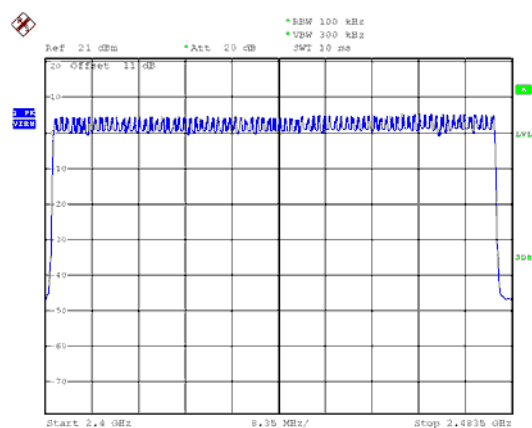



12. Maximum Peak Output Power

12.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

12.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

12.3 Test Setup Layout





12.4 Test Result and Data

Modulation Type	Setting	Channel	Frequency (MHz)	PK Output Power (dBm)	PK Output Power (mW)
GFSK	Default	0	2402	4.04	2.535
	Default	39	2441	3.93	2.472
	Default	78	2480	4.49	2.812
$\pi/4$ -DQPSK	Default	0	2402	5.99	3.972
	Default	39	2441	5.92	3.908
	Default	78	2480	6.37	4.335
8DPSK	Default	0	2402	6.61	4.581
	Default	39	2441	6.39	4.355
	Default	78	2480	6.93	4.932

Modulation Type	Setting	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
GFSK	Default	0	2402	3.66	2.323
	Default	39	2441	3.62	2.301
	Default	78	2480	4.16	2.606
$\pi/4$ -DQPSK	Default	0	2402	3.32	2.148
	Default	39	2441	3.21	2.094
	Default	78	2480	3.77	2.382
8DPSK	Default	0	2402	3.29	2.133
	Default	39	2441	3.24	2.109
	Default	78	2480	3.82	2.410

Note: Average power is for reference only.

AFH Mode

Modulation Type	Setting	Channel	Frequency (MHz)	PK Output Power (dBm)	PK Output Power (mW)
GFSK	Default	0-19	2402-2421	4.12	2.582
$\pi/4$ -DQPSK	Default	0-19	2402-2421	6.08	4.055
8DPSK	Default	0-19	2402-2421	6.41	4.375

AFH Mode

Modulation Type	Setting	Channel	Frequency (MHz)	AV Output Power (dBm)	AV Output Power (mW)
GFSK	Default	0-19	2402-2421	3.75	2.371
$\pi/4$ -DQPSK	Default	0-19	2402-2421	3.42	2.198
8DPSK	Default	0-19	2402-2421	3.54	2.259

Note: Average power is for reference only.