



FCC RADIO TEST REPORT

Applicant	: LITE-ON Technology Corp.
Address	: Bldg. C, 90, Chien 1 Rd., Chung-Ho, New Taipei City, 23585, Taiwan
Equipment	: 802.11b/g/n 2Tx2R + BT5.0 USB WLAN Module
Model No.	: WCBN4606L
Trade Name	: LITE-ON
FCC ID.	: PPQ-WCBN4606L

I HEREBY CERTIFY THAT :

The sample was received on Dec. 12, 2019 and the testing was completed on Dec. 27, 2019 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software	8
2.4 Description of Test System.....	8
2.5 General Information of Test.....	9
2.6 Measurement Uncertainty	9
3. Test Equipment and Ancillaries Used for Tests	10
4. Antenna Requirements	12
4.1 Standard Applicable	12
4.2 Antenna Construction and Directional Gain.....	12
5. Test of AC Power Line Conducted Emission	13
5.1 Test Limit	13
5.2 Test Procedures	13
5.3 Typical Test Setup	14
5.4 Test Result and Data	15
5.5 Test Photographs	17
6. Test of Spurious Emission (Radiated)	18
6.1 Test Limit	18
6.2 Test Procedures	18
6.3 Typical Test Setup	19
6.4 Test Result and Data (9kHz ~ 30MHz).....	20
6.5 Test Result and Data (30MHz ~ 1GHz).....	20
6.6 Test Result and Data (1GHz ~ 25GHz).....	22
6.7 Restricted Bands of Operation	34
6.8 Test Photographs (30MHz ~ 1GHz)	35
6.9 Test Photographs (1GHz ~ 25GHz)	36
7. Test of Spurious Emission (Conducted).....	37
7.1 Test Limit	37
7.2 Test Procedure	37
7.3 Test Setup Layout	37
7.4 Test Result and Data	37
8. On Time, Duty Cycle and Measurement methods	42
8.1 Test Limit	42
8.2 Test Procedure	42
8.3 Test Setup Layout	42
8.4 Test Result and Data	42
9. 6dB Bandwidth Measurement Data	44
9.1 Test Limit	44



9.2	Test Procedures	44
9.3	Test Setup Layout	44
9.4	Test Result and Data	44
10.	Maximum Peak and Average Output Power	47
10.1	Test Limit	47
10.2	Test Procedures	47
10.3	Test Setup Layout	47
10.4	Test Result and Data	47
11.	Power Spectral Density	48
11.1	Test Limit	48
11.2	Test Procedures	48
11.3	Test Setup Layout	48
11.4	Test Result and Data	48
12.	Radio Frequency Exposure	51
12.1	Applicable Standards	51
12.2	EUT Specification	51
12.3	Test Results	52
12.4	Calculation	52
12.5	Maximum Permissible Exposure	53



History of this test report

Report No.	Issue Date	Description
TEFQ1912122	Dec. 30, 2019	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.209 15.205	Radiated Spurious Emission	PASS
15.247(d)	Conducted Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)	Maximum Peak Output Power	PASS
15.247(e)	Power Spectral Density	PASS

*The lab has lowered the uncertainty risk of test equipment, environment, and staff technicians according to ISO-IEC17025. Therefore we define test result as compliant when it complies with the standard without further evaluation of test result uncertainty.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(TEFD1912122).



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	BLE: 2400-2483.5MHz
Modulation Type	BLE: GFSK
Modulation Technology	DTS
Data Rate	BLE: GFSK: 1Mbps, 2Mbps
Antenna Type	PIFA Antenna
Antenna Gain	BLE: 2400-2480MHz: 3.74dBi

Note:

*For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Antenna Number	Brand Name	Model Name	Ant. Type	Connector	Support	Max Peak Gain	Antenna Gain includes Cable loss
Antenna 1	HONGBO	290-10569	PIFA	I-Pex	BT	BT : 3.74	Yes
Antenna 2	PSA	RFMTA401030IMLB702	PIFA	I-Pex	BT	BT : 3.74	Yes
Antenna 3	HONGBO	290-10843	PIFA	I-Pex	BT	BT : 3.05	Yes
Antenna 4	PSA	RFMTA401050IMLB706	PIFA	I-Pex	BT	BT : 3.05	Yes
Antenna 5	HONGBO	290-10844	PIFA	I-Pex	BT	BT : 2.38	Yes
Antenna 6	PSA	RFMTA401080IMLB704	PIFA	I-Pex	BT	BT : 1.72	Yes
Antenna 7	PSA	RFMTA340730IMLB305	PIFA	I-Pex	BT	BT : -0.5	Yes

Antenna Number	Brand Name	Model Name	Ant. Type	Connector	Support	Max Peak Gain	Antenna Gain includes Cable loss
Antenna A	Walsin	RFMTA100600NNLB002	PIFA	N/A	WIFI	WIFI: 1.5	N/A
Antenna B	Walsin	RFMTA100600NNLB002	PIFA	N/A	WIFI	WIFI: 2.4	N/A

Note:

1. For more detailed information, please refer to the Antenna's specifications.
2. Antenna 1 generated the worst case, it was reported as the final data.



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	*19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	*39	2480
12	2426	26	2454	--	--
13	2428	27	2456	--	--

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- The complete test system included Notebook and EUT for RF test.
- An executive program, "RtlBlueoothMP.dll & RTLBTAPP ver. 5.3.1.2 & 5.2.2.39" under Windows OS system was executed to transmit and receive data via WLAN.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	GFSK (2Mbps)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	GFSK (2Mbps)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	GFSK (2Mbps)
caused "Test Mode 1~2" generated the worst case, it was reported as the final data.	

2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Vostro 3560	N/A	Adapter / 1.8m / NS
USB Cable	N/A	N/A	1.0m / NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Vostro 3560	N/A	Adapter / 1.8m / NS
USB Cable	N/A	N/A	1.0m / NS	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Vostro 3560	N/A	Adapter / 1.8m / NS
USB Cable	N/A	N/A	1.0m / NS	N/A



2.5 General Information of Test

Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Finish Date	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2019/12/27	22°C / 60%	Nick Guan
Radiated Emissions	3M02-NK	2019/12/23	24°C / 52%	Vic Yeh
AC Power Line Conducted Emission	CON01-NK	2019/12/24	22°C / 46%	Nick Guan

2.6 Measurement Uncertainty

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±1.60dB
Radiated Spurious Emission(9KHz~30MHz)	±3.405dB
Radiated Spurious Emission(30MHz~1GHz)	±5.326dB
Radiated Spurious Emission(1GHz~25GHz)	±5.918dB
Conducted Spurious Emission	±2.156dB
6dB Bandwidth	±4.401%
20dB Bandwidth	±4.40%
Occupied Bandwidth	±4.41%
Peak Output Power(Conducted Power Meter)	±1.31dB
Dwell Time	±0.11%
Power Spectral Density	±2.146dB
Duty Cycle	±0.17%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2019/09/24	2020/09/23
Bilog Antenna	Schwarzbeck	VULB9168	369	2019/03/29	2020/03/28
Active Loop Antenna	EMCO	6507	40855	2019/05/24	2020/05/23
Horn Antenna	EMCO	3115	31589	2019/04/01	2020/03/31
Horn Antenna	EMCO	3116	31974	2019/09/17	2020/09/16
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2019/05/14	2020/05/13
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2019/03/28	2020/03/27
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2019/08/02	2020/08/01
Preamplifier	EM Electronics corp.	EM330	60660	2019/03/11	2020/03/10
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2019/09/20	2020/09/19
Preamplifier	Agilent	8449B	3008A01954	2019/03/11	2020/03/10
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2019/11/07	2020/11/06
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2019/04/09	2020/04/08
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1316	2019/09/20	2020/09/19
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805443/4	2019/05/20	2020/05/19
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805796/4	2019/05/20	2020/05/19
Cable-8m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805795/4	2019/05/20	2020/05/19
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2019/03/28	2020/03/27
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2019/08/02	2020/08/01
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
Attenuator	KEYSIGHT	8491B	MY39250703	2019/09/12	2020/09/11
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2019/08/28	2020/08/27
Power Meter	Anritsu	ML2495A	1224005	2019/04/11	2020/04/10
Power Sensor	Anritsu	MA2411B	1207295	2019/04/09	2020/04/08



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100443	2019/03/29	2020/03/28
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-568	2019/03/15	2020/03/14
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101934	2019/03/12	2020/03/11
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130606	2019/03/14	2020/03/13
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	PIFA Antenna
Antenna Gain	3.74 dBi

Antenna Number	Brand Name	Model Name	Ant. Type	Connector	Support	Max Peak Gain	Antenna Gain includes Cable loss
Antenna 1	HONGBO	290-10569	PIFA	I-Pex	BT	BT : 3.74	Yes
Antenna 2	PSA	RFMTA401030IMLB702	PIFA	I-Pex	BT	BT : 3.74	Yes
Antenna 3	HONGBO	290-10843	PIFA	I-Pex	BT	BT : 3.05	Yes
Antenna 4	PSA	RFMTA401050IMLB706	PIFA	I-Pex	BT	BT : 3.05	Yes
Antenna 5	HONGBO	290-10844	PIFA	I-Pex	BT	BT : 2.38	Yes
Antenna 6	PSA	RFMTA401080IMLB704	PIFA	I-Pex	BT	BT : 1.72	Yes
Antenna 7	PSA	RFMTA340730IMLB305	PIFA	I-Pex	BT	BT : -0.5	Yes

Antenna Number	Brand Name	Model Name	Ant. Type	Connector	Support	Max Peak Gain	Antenna Gain includes Cable loss
Antenna A	Walsin	RFMTA100600NNLB002	PIFA	N/A	WIFI	WIFI: 1.5	N/A
Antenna B	Walsin	RFMTA100600NNLB002	PIFA	N/A	WIFI	WIFI: 2.4	N/A

Note:

1. For more detailed information, please refer to the Antenna's specifications.
2. Antenna 1 generated the worst case, it was reported as the final data.



5. Test of AC Power Line Conducted Emission

The power supply is DC source, so this item doesn't require testing.

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

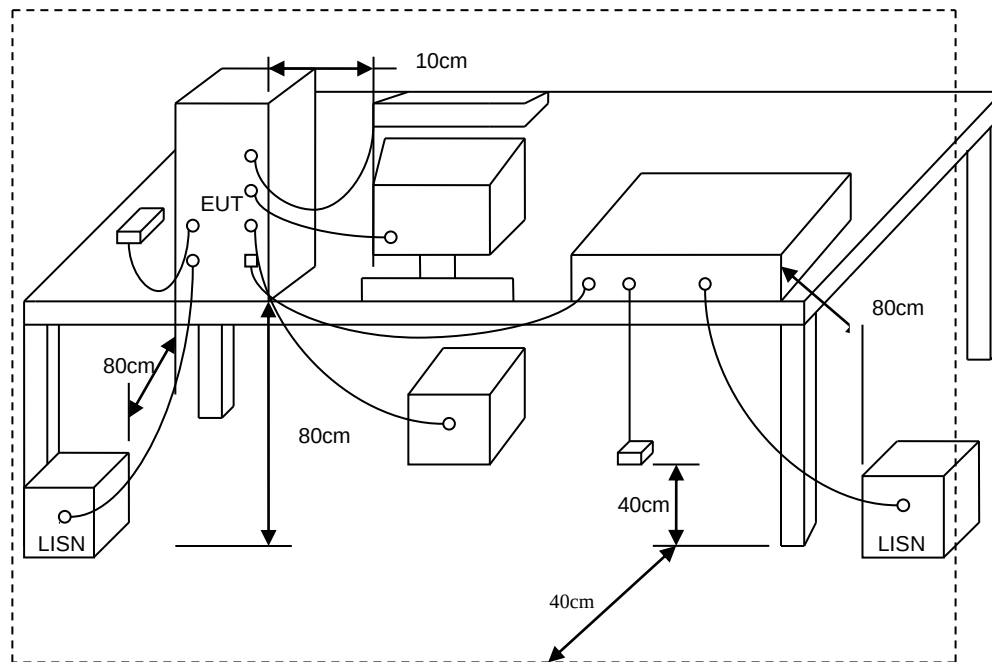



5.4 Test Result and Data

Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	LINE
Test Mode	:	Mode 1		:	

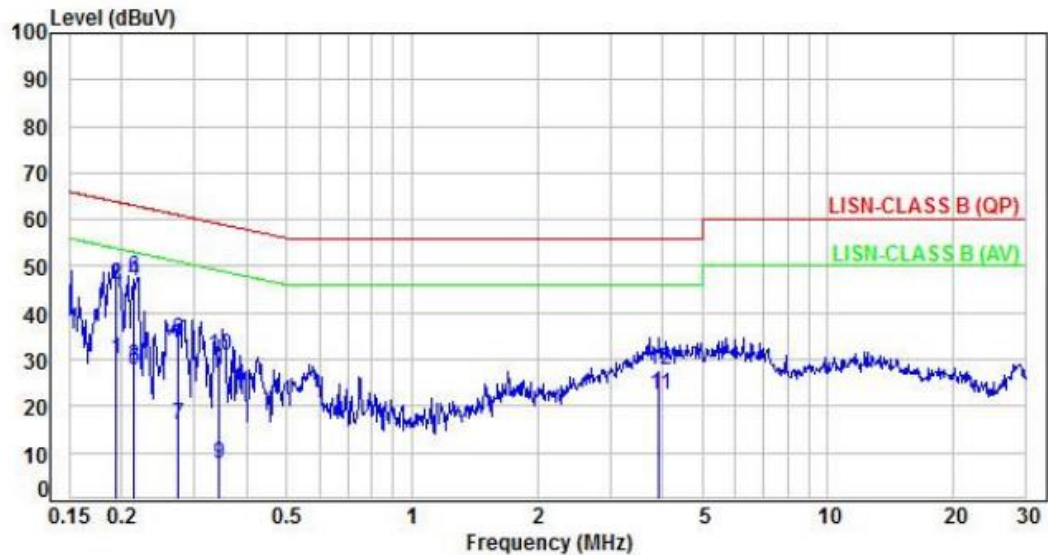

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.19	9.92	20.01	29.93	53.88	-23.95	Average	P
2	0.19	9.92	36.19	46.11	63.88	-17.77	QP	P
3	0.21	9.92	18.62	28.54	53.08	-24.54	Average	P
4	0.21	9.92	36.96	46.88	63.08	-16.20	QP	P
5	0.21	9.92	17.78	27.70	53.04	-25.34	Average	P
6	0.21	9.92	37.43	47.35	63.04	-15.69	QP	P
7	0.27	9.92	6.24	16.16	51.03	-34.87	Average	P
8	0.27	9.92	24.27	34.19	61.03	-26.84	QP	P
9	0.34	9.94	-2.28	7.66	49.15	-41.49	Average	P
10	0.34	9.94	20.89	30.83	59.15	-28.32	QP	P
11	3.93	10.09	12.38	22.47	46.00	-23.53	Average	P
12	3.93	10.09	17.80	27.89	56.00	-28.11	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	NEUTRAL
Test Mode	:	Mode 1		:	

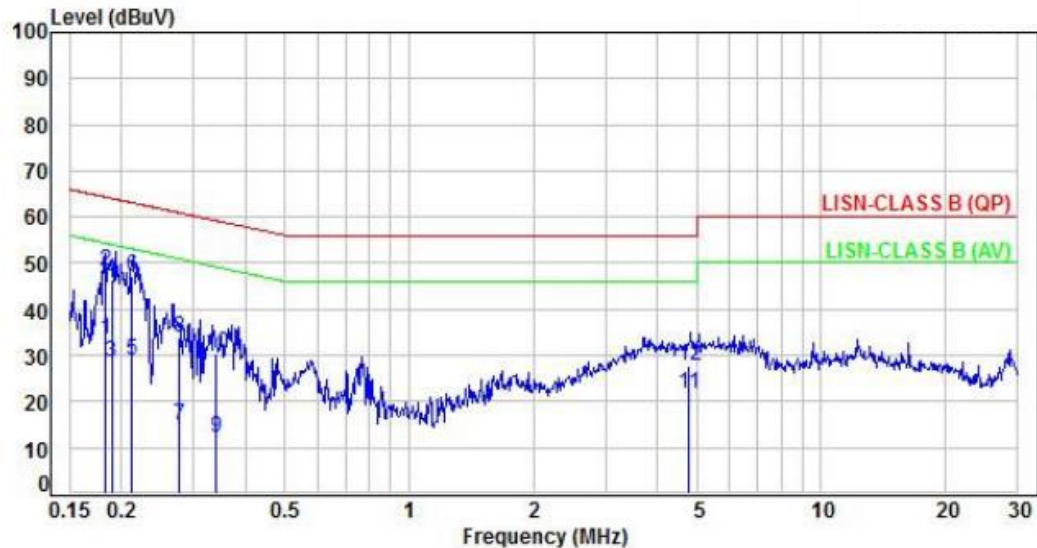

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.18	9.95	23.38	33.33	54.38	-21.05	Average	P
2	0.18	9.95	38.22	48.17	64.38	-16.21	QP	P
3	0.19	9.95	18.57	28.52	54.07	-25.55	Average	P
4	0.19	9.95	36.25	46.20	64.07	-17.87	QP	P
5	0.21	9.95	18.77	28.72	53.15	-24.43	Average	P
6	0.21	9.95	37.30	47.25	63.15	-15.90	QP	P
7	0.28	9.95	4.92	14.87	50.96	-36.09	Average	P
8	0.28	9.95	23.77	33.72	60.96	-27.24	QP	P
9	0.34	9.96	2.37	12.33	49.18	-36.85	Average	P
10	0.34	9.96	20.42	30.38	59.18	-28.80	QP	P
11	4.76	10.15	11.66	21.81	46.00	-24.19	Average	P
12	4.76	10.15	17.43	27.58	56.00	-28.42	QP	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




6.3 Typical Test Setup


Below 30MHz test setup

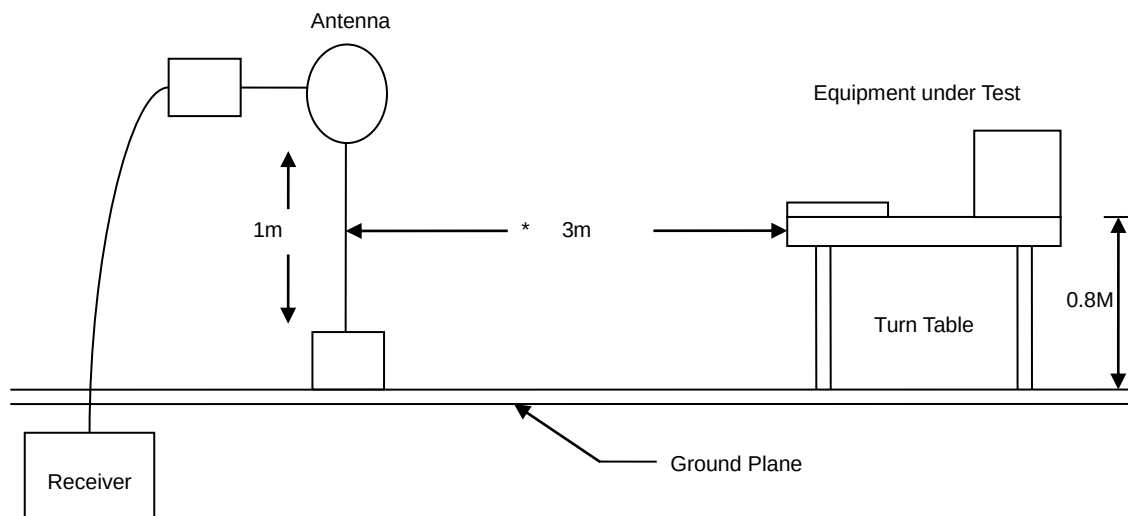

30MHz- 1GHz Test Setup

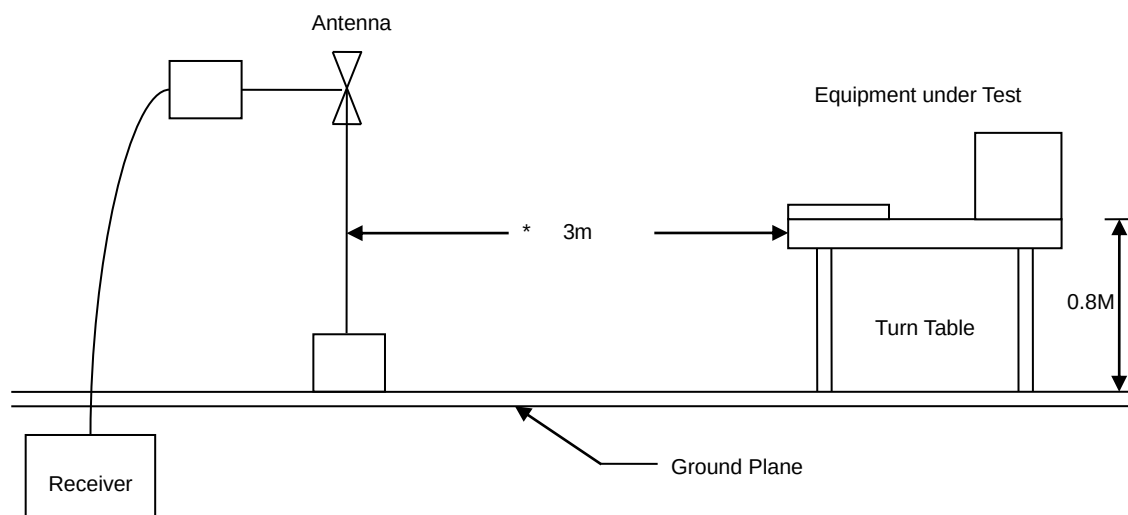

Above 1GHz Test Setup

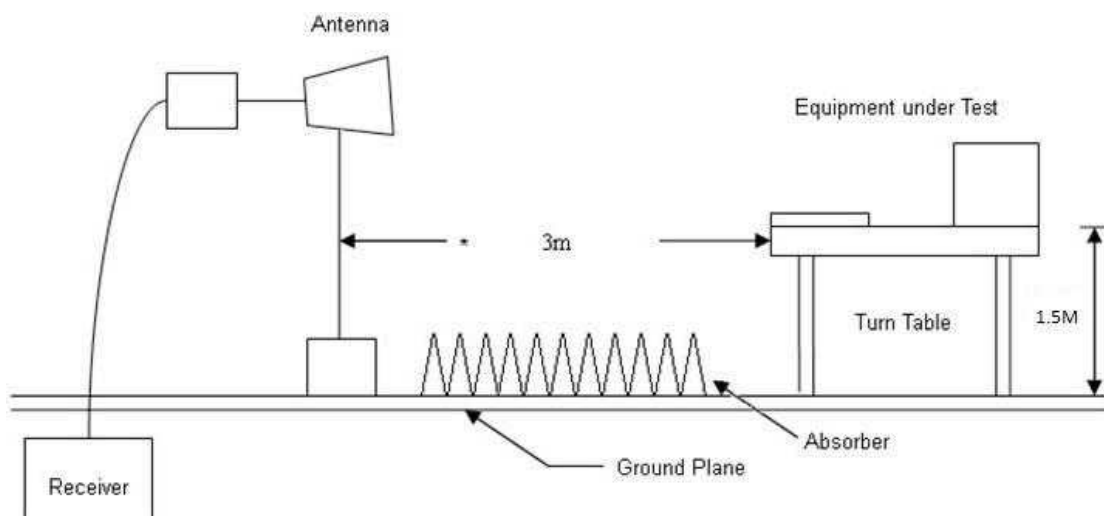



6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.


6.5 Test Result and Data (30MHz ~ 1GHz)

Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1		:	





Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1		:	

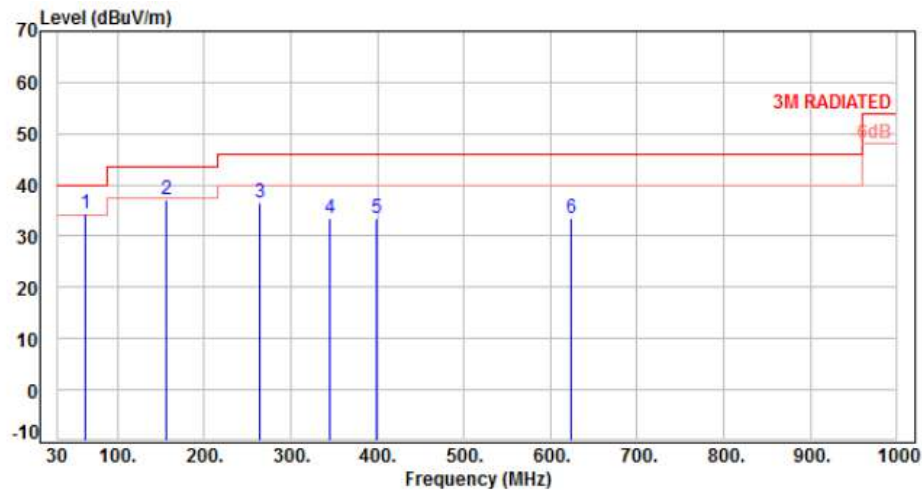

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	62.87	-10.45	44.94	34.49	40.00	-5.51	Peak	100	0	P
2	156.23	-9.47	46.77	37.30	43.50	-6.20	Peak	100	0	P
3	264.93	-9.75	46.22	36.47	46.00	-9.53	Peak	100	0	P
4	344.28	-7.25	40.80	33.55	46.00	-12.45	Peak	100	0	P
5	398.29	-5.74	39.11	33.37	46.00	-12.63	Peak	100	0	P
6	623.71	-0.76	34.37	33.61	46.00	-12.39	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH00		:	

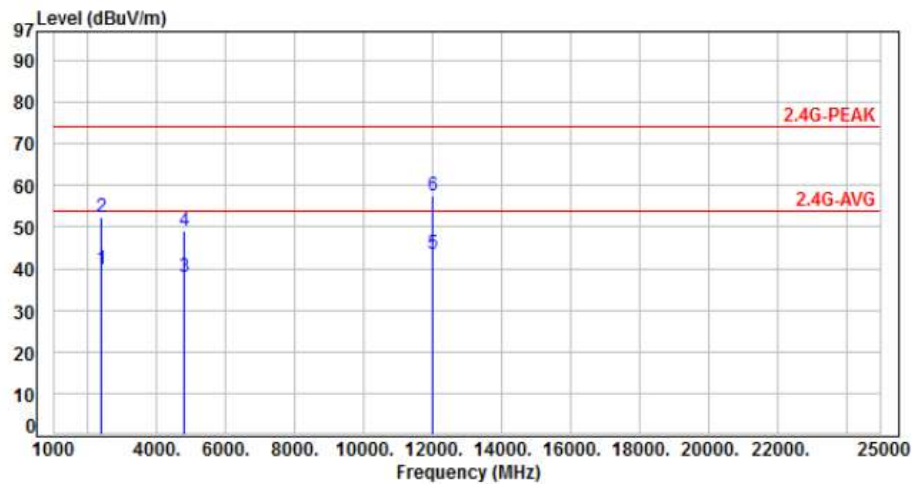

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	43.60	39.96	54.00	-14.04	Average	348	50	P
2	2390.00	-3.64	55.83	52.19	74.00	-21.81	Peak	348	50	P
3	4804.00	3.65	34.46	38.11	54.00	-15.89	Average	110	50	P
4	4804.00	3.65	45.24	48.89	74.00	-25.11	Peak	110	50	P
5	12010.00	13.50	30.03	43.53	54.00	-10.47	Average	100	115	P
6	12010.00	13.50	44.16	57.66	74.00	-16.34	Peak	100	115	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH00		:	

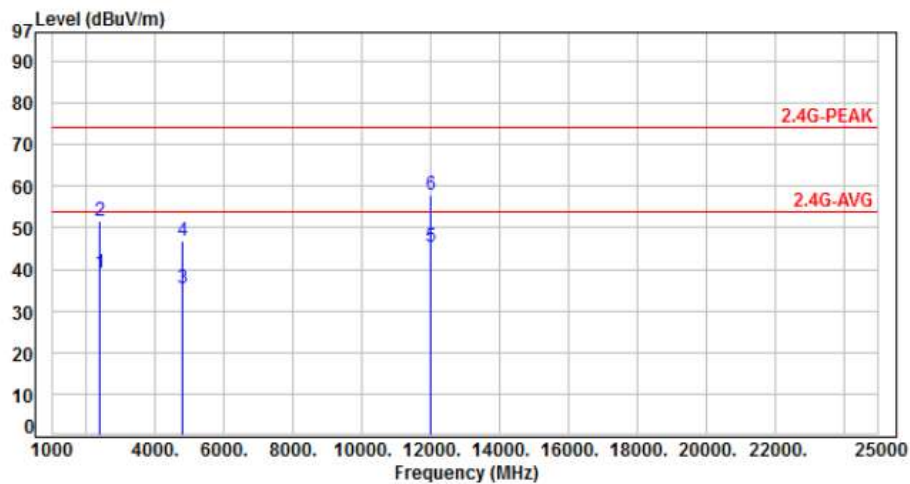

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.82	39.18	54.00	-14.82	Average	330	52	P
2	2390.00	-3.64	55.13	51.49	74.00	-22.51	Peak	330	52	P
3	4804.00	3.65	31.62	35.27	54.00	-18.73	Average	150	85	P
4	4804.00	3.65	43.20	46.85	74.00	-27.15	Peak	150	85	P
5	12010.00	13.50	31.85	45.35	54.00	-8.65	Average	100	213	P
6	12010.00	13.50	44.54	58.04	74.00	-15.96	Peak	100	213	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH19		:	

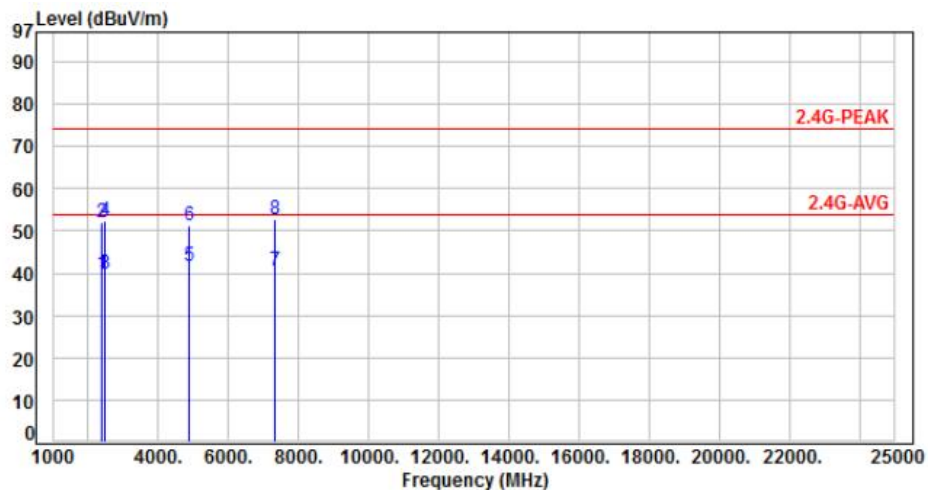

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	43.65	40.01	54.00	-13.99	Average	339	50	P
2	2390.00	-3.64	55.72	52.08	74.00	-21.92	Peak	339	50	P
3	2483.50	-3.30	42.95	39.65	54.00	-14.35	Average	339	50	P
4	2483.50	-3.30	55.81	52.51	74.00	-21.49	Peak	339	50	P
5	4880.00	3.97	37.89	41.86	54.00	-12.14	Average	100	52	P
6	4880.00	3.97	47.36	51.33	74.00	-22.67	Peak	100	52	P
7	7320.00	8.83	31.60	40.43	54.00	-13.57	Average	100	110	P
8	7320.00	8.83	43.96	52.79	74.00	-21.21	Peak	100	110	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH19		:	

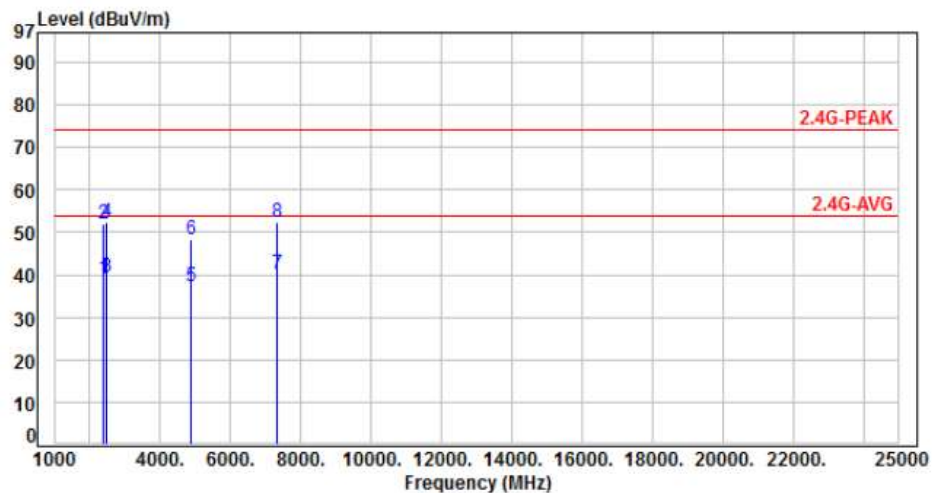

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.77	39.13	54.00	-14.87	Average	324	41	P
2	2390.00	-3.64	55.54	51.90	74.00	-22.10	Peak	324	41	P
3	2483.50	-3.30	42.75	39.45	54.00	-14.55	Average	324	41	P
4	2483.50	-3.30	55.54	52.24	74.00	-21.76	Peak	324	41	P
5	4880.00	3.97	33.15	37.12	54.00	-16.88	Average	100	102	P
6	4880.00	3.97	44.46	48.43	74.00	-25.57	Peak	100	102	P
7	7320.00	8.83	31.49	40.32	54.00	-13.68	Average	100	155	P
8	7320.00	8.83	43.59	52.42	74.00	-21.58	Peak	100	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH39		:	

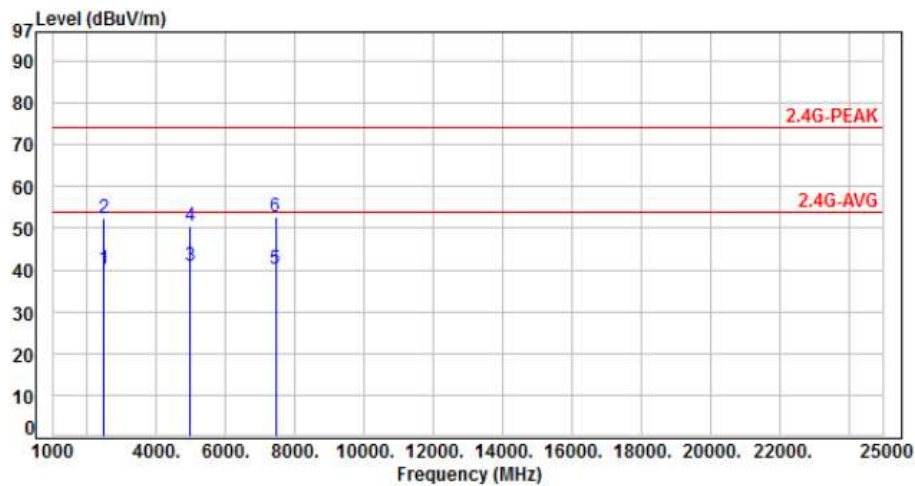

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	43.52	40.22	54.00	-13.78	Average	331	16	P
2	2483.50	-3.30	55.59	52.29	74.00	-21.71	Peak	331	16	P
3	4960.00	4.21	36.83	41.04	54.00	-12.96	Average	113	48	P
4	4960.00	4.21	46.45	50.66	74.00	-23.34	Peak	113	48	P
5	7440.00	8.98	31.38	40.36	54.00	-13.64	Average	100	108	P
6	7440.00	8.98	43.89	52.87	74.00	-21.13	Peak	100	108	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH39		:	

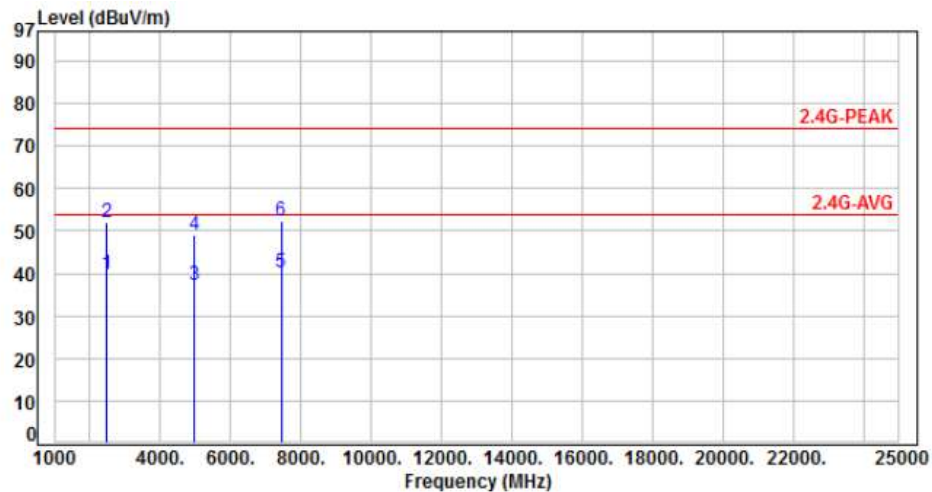

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	43.27	39.97	54.00	-14.03	Average	334	48	P
2	2483.50	-3.30	55.14	51.84	74.00	-22.16	Peak	334	48	P
3	4960.00	4.21	32.92	37.13	54.00	-16.87	Average	110	96	P
4	4960.00	4.21	44.89	49.10	74.00	-24.90	Peak	110	96	P
5	7440.00	8.98	31.25	40.23	54.00	-13.77	Average	100	156	P
6	7440.00	8.98	43.41	52.39	74.00	-21.61	Peak	100	156	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH00		:	

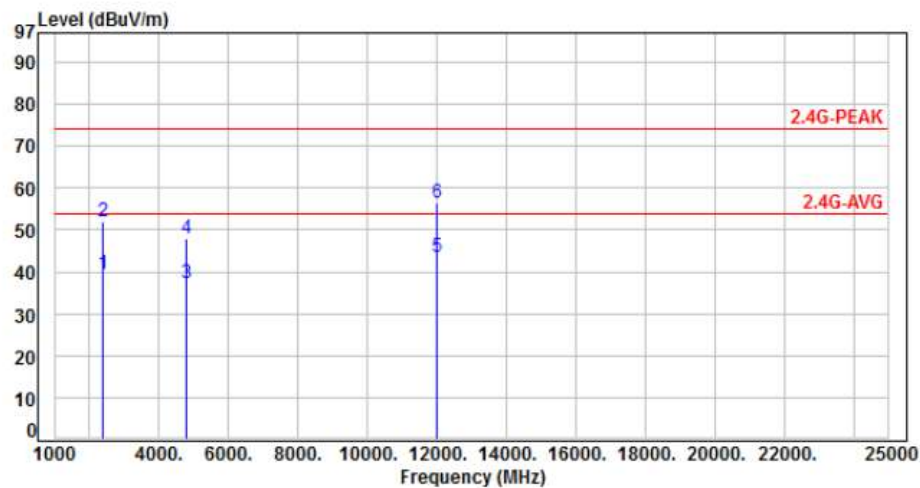

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	43.14	39.50	54.00	-14.50	Average	309	49	P
2	2390.00	-3.64	55.55	51.91	74.00	-22.09	Peak	309	49	P
3	4804.00	3.65	33.60	37.25	54.00	-16.75	Average	100	45	P
4	4804.00	3.65	44.23	47.88	74.00	-26.12	Peak	100	45	P
5	12010.00	13.50	30.15	43.65	54.00	-10.35	Average	100	119	P
6	12010.00	13.50	42.91	56.41	74.00	-17.59	Peak	100	119	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH00		:	

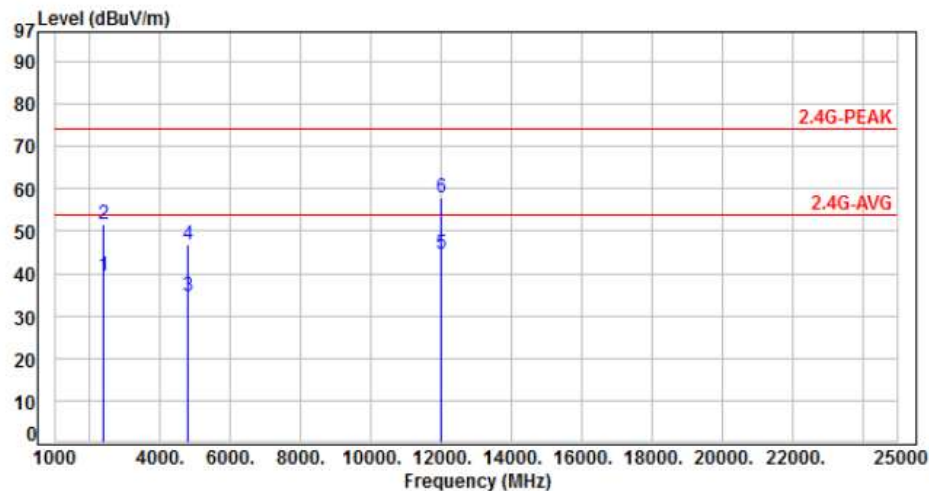

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.94	39.30	54.00	-14.70	Average	324	50	P
2	2390.00	-3.64	55.42	51.78	74.00	-22.22	Peak	324	50	P
3	4804.00	3.65	31.09	34.74	54.00	-19.26	Average	153	96	P
4	4804.00	3.65	43.08	46.73	74.00	-27.27	Peak	153	96	P
5	12010.00	13.50	31.06	44.56	54.00	-9.44	Average	100	218	P
6	12010.00	13.50	44.31	57.81	74.00	-16.19	Peak	100	218	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode2, CH19		:	

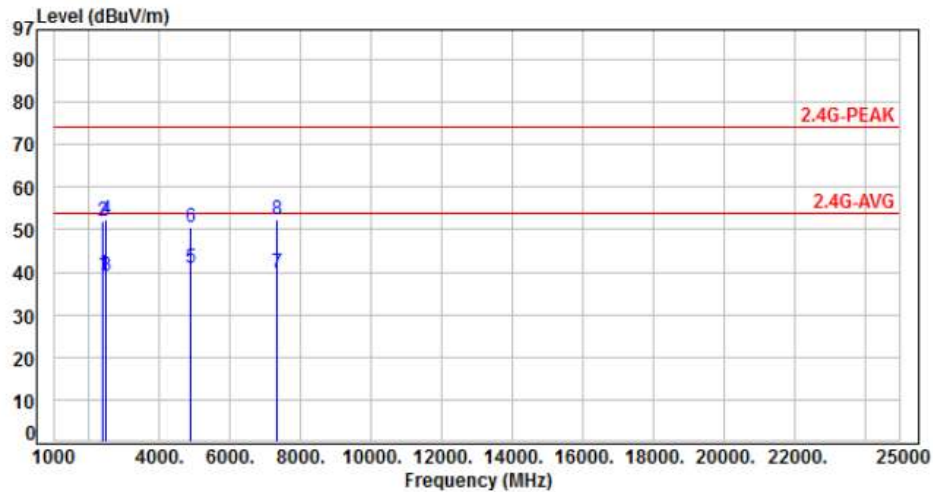

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	43.22	39.58	54.00	-14.42	Average	335	49	P
2	2390.00	-3.64	55.49	51.85	74.00	-22.15	Peak	335	49	P
3	2483.50	-3.30	42.38	39.08	54.00	-14.92	Average	335	49	P
4	2483.50	-3.30	55.53	52.23	74.00	-21.77	Peak	335	49	P
5	4880.00	3.97	36.95	40.92	54.00	-13.08	Average	100	47	P
6	4880.00	3.97	46.47	50.44	74.00	-23.56	Peak	100	47	P
7	7320.00	8.83	30.83	39.66	54.00	-14.34	Average	100	115	P
8	7320.00	8.83	43.39	52.22	74.00	-21.78	Peak	100	115	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode2, CH19		:	

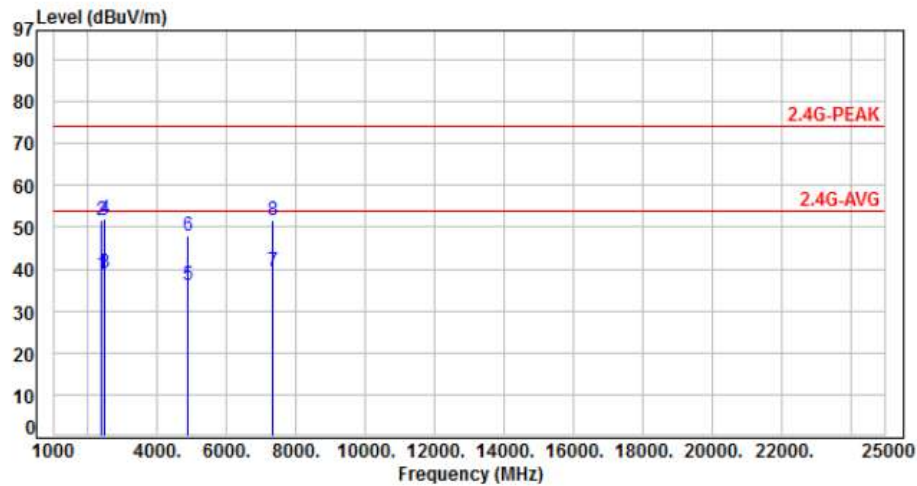

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.64	42.33	38.69	54.00	-15.31	Average	321	46	P
2	2390.00	-3.64	55.19	51.55	74.00	-22.45	Peak	321	46	P
3	2483.50	-3.30	42.40	39.10	54.00	-14.90	Average	321	46	P
4	2483.50	-3.30	55.18	51.88	74.00	-22.12	Peak	321	46	P
5	4880.00	3.97	32.28	36.25	54.00	-17.75	Average	100	109	P
6	4880.00	3.97	44.16	48.13	74.00	-25.87	Peak	100	109	P
7	7320.00	8.83	30.75	39.58	54.00	-14.42	Average	100	151	P
8	7320.00	8.83	42.64	51.47	74.00	-22.53	Peak	100	151	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode2, CH39		:	

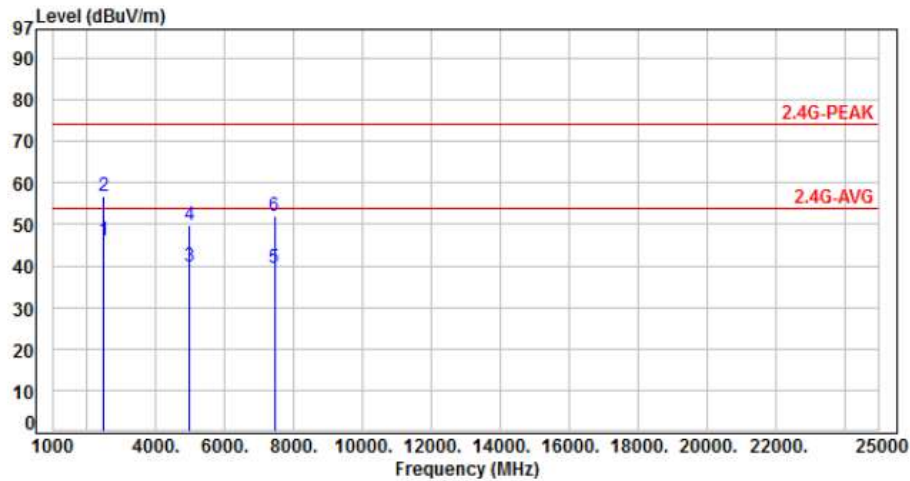

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	49.41	46.11	54.00	-7.89	Average	342	52	P
2	2483.50	-3.30	60.11	56.81	74.00	-17.19	Peak	342	52	P
3	4960.00	4.21	35.72	39.93	54.00	-14.07	Average	115	56	P
4	4960.00	4.21	45.59	49.80	74.00	-24.20	Peak	115	56	P
5	7440.00	8.98	30.52	39.50	54.00	-14.50	Average	100	115	P
6	7440.00	8.98	42.93	51.91	74.00	-22.09	Peak	100	115	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode2, CH39		:	

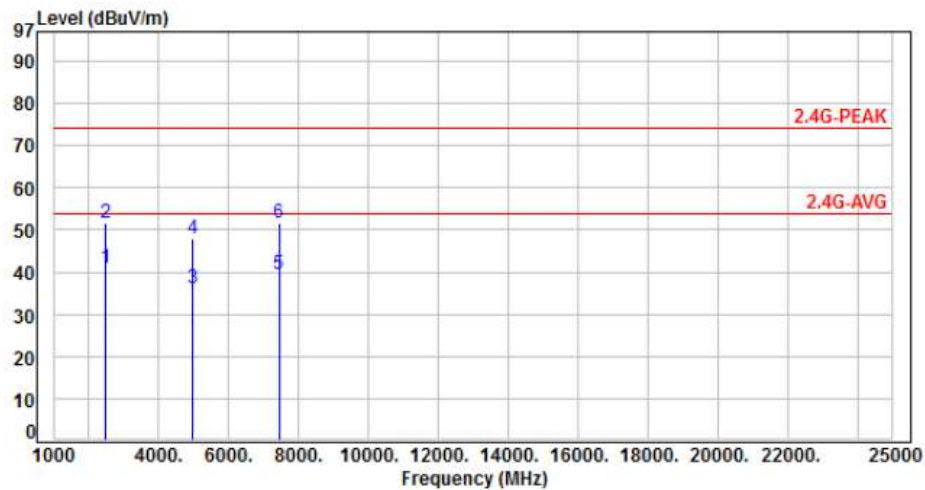

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-3.30	44.32	41.02	54.00	-12.98	Average	300	42	P
2	2483.50	-3.30	54.89	51.59	74.00	-22.41	Peak	300	42	P
3	4960.00	4.21	31.86	36.07	54.00	-17.93	Average	105	97	P
4	4960.00	4.21	43.87	48.08	74.00	-25.92	Peak	105	97	P
5	7440.00	8.98	30.37	39.35	54.00	-14.65	Average	100	162	P
6	7440.00	8.98	42.56	51.54	74.00	-22.46	Peak	100	162	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Spurious Emission (Conducted)


7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure







- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout






7.4 Test Result and Data







Note: Test plots refer to the following pages.

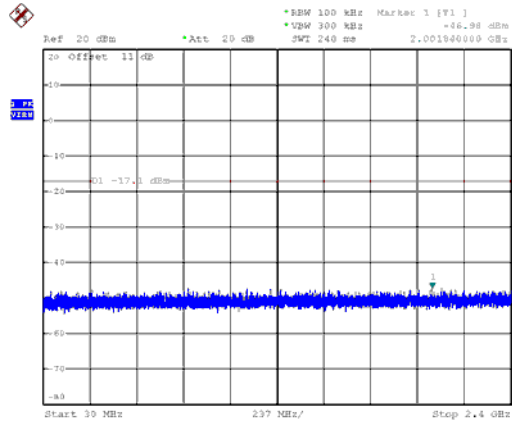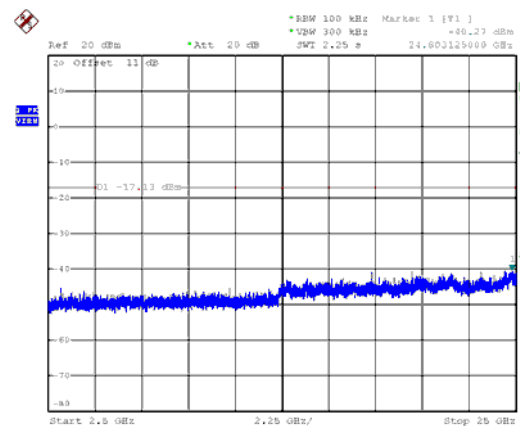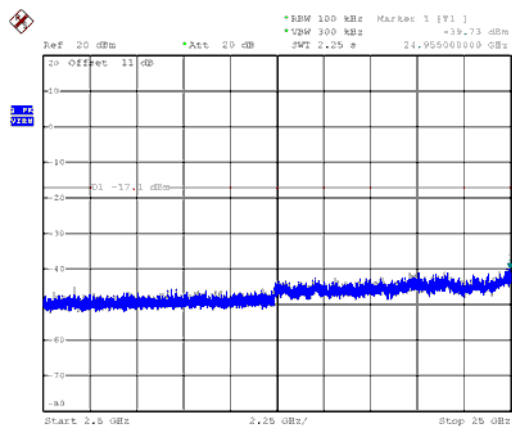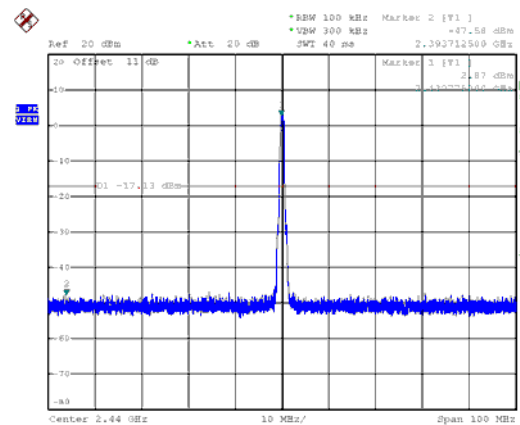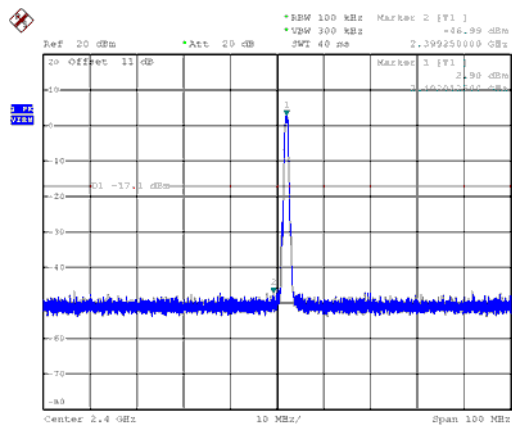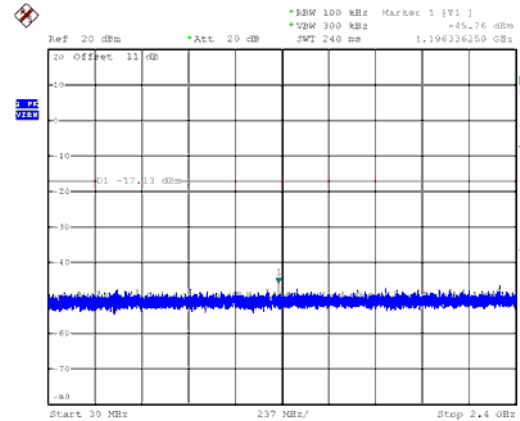Modulation Type: GFSK 1Mbps
CH00Modulation Type: GFSK 1Mbps
CH19






Modulation Type: GFSK 1Mbps
CH39

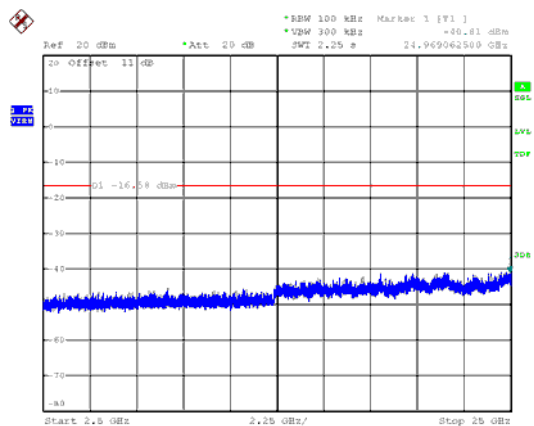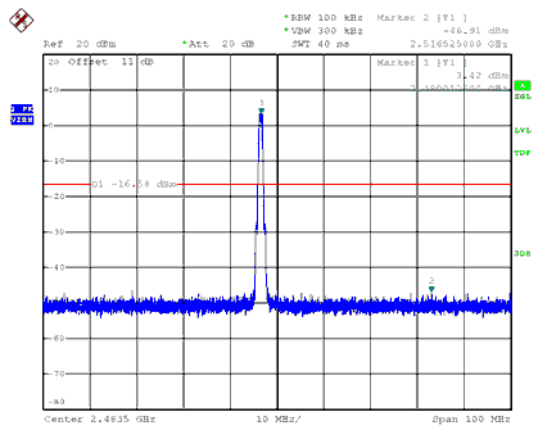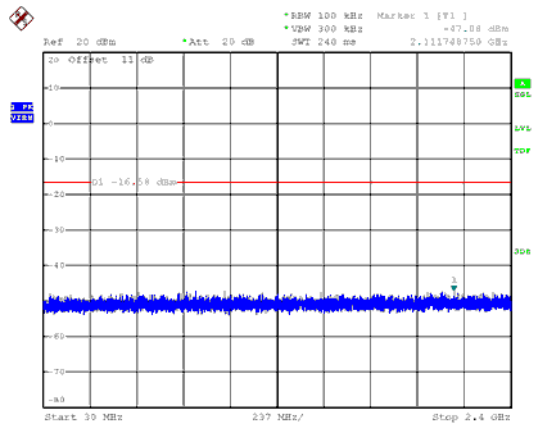

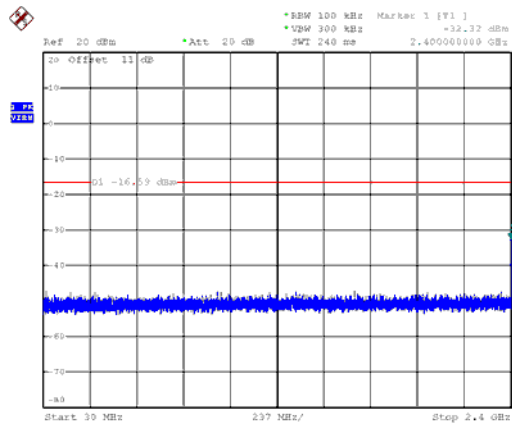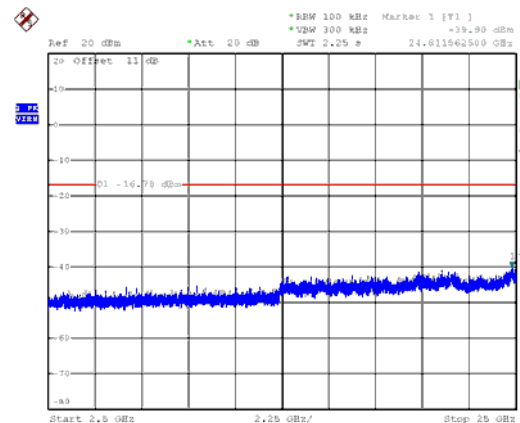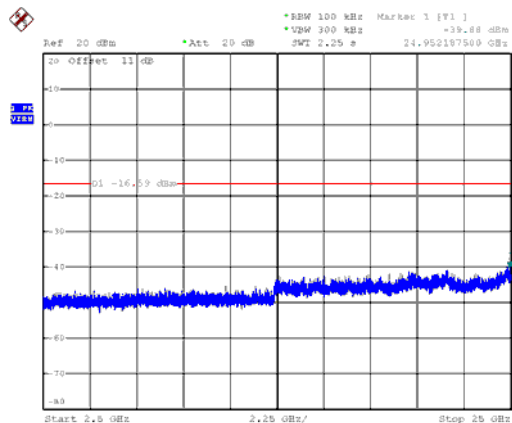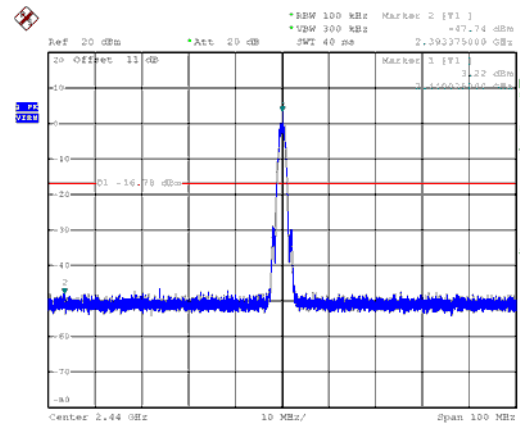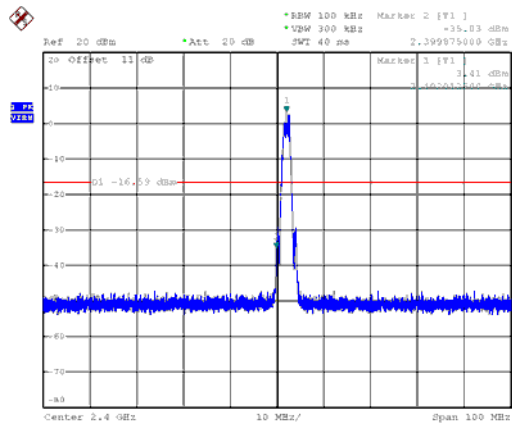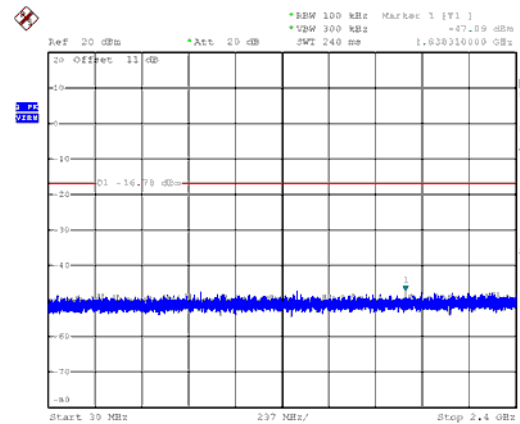Modulation Type: GFSK 2Mbps
CH00Modulation Type: GFSK 2Mbps
CH19



Modulation Type: GFSK 2Mbps
CH39

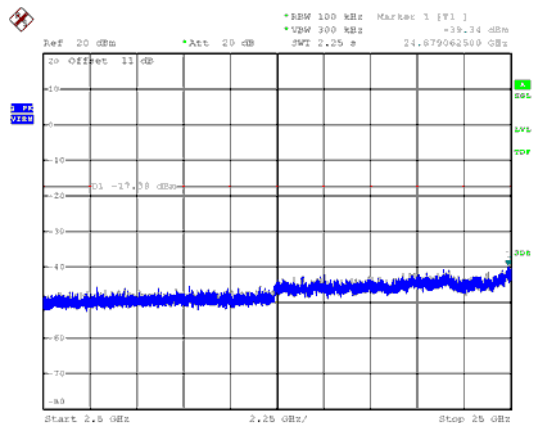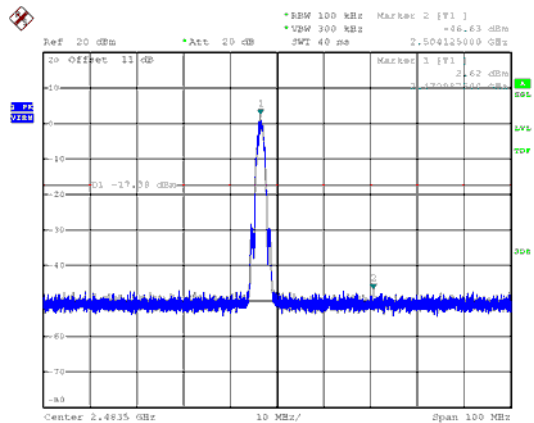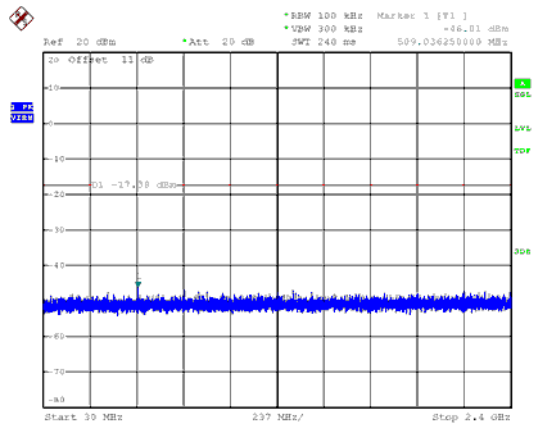



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout




8.4 Test Result and Data


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
GFSK(1Mbps)	2.18	2.50	87.04%
GFSK(2Mbps)	1.12	1.87	59.94%



Modulation Type: GFSK (1Mbps)

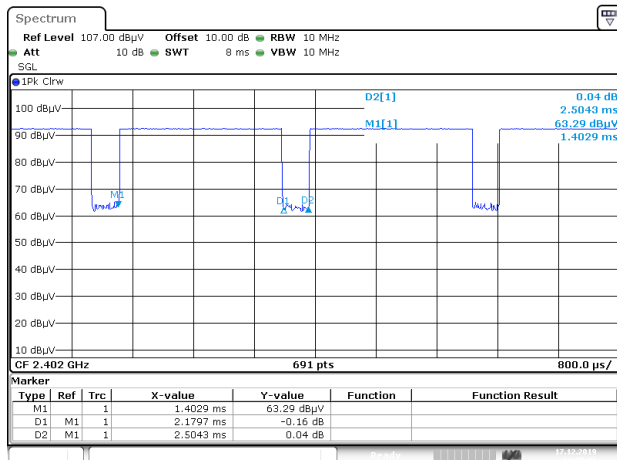

Modulation Type: GFSK (1Mbps)

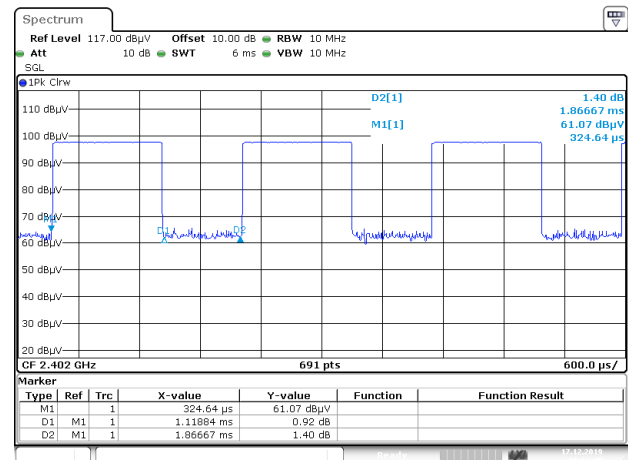



9. 6dB Bandwidth Measurement Data


9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout



9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK(1Mbps)	0	2402	663.00	500
	19	2440	663.00	500
	39	2480	666.00	500

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK(2Mbps)	0	2402	1155.00	500
	19	2440	1145.00	500
	39	2480	1140.00	500



10. Maximum Peak and Average Output Power


10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

10.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



10.4 Test Result and Data

BT5(1M bps)

Power Set	Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)		Power Output (mW)	
				Peak	Average	Peak	Average
Default	GFSK	0	2402	3.91	3.53	2.460	2.254
Default		19	2440	3.81	3.48	2.404	2.228
Default		39	2480	4.32	3.98	2.704	2.500

BT5(2M bps)

Power Set	Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)		Power Output (mW)	
				Peak	Average	Peak	Average
Default	GFSK	0	2402	4.01	3.62	2.518	2.301
Default		19	2440	3.83	3.45	2.415	2.213
Default		39	2480	4.29	3.92	2.685	2.466

*Average Power is for reference only



11. Power Spectral Density


11.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

11.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.

11.3 Test Setup Layout




11.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Limit
GFSK(1Mbps)	0	2402	-12.64	8.00
	19	2440	-10.55	8.00
	39	2480	-11.12	8.00


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Limit
GFSK(2Mbps)	0	2402	-13.45	8.00
	19	2440	-13.88	8.00
	39	2480	-13.97	8.00




Modulation Type: GFSK (1Mbps)
CH00

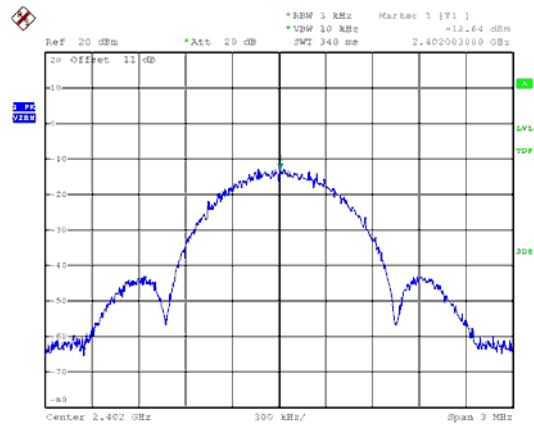

CH19

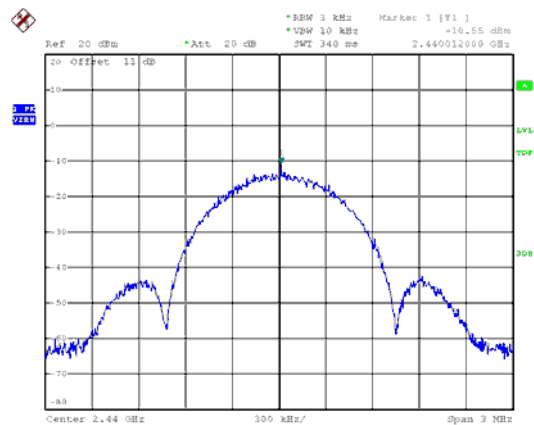


CH39

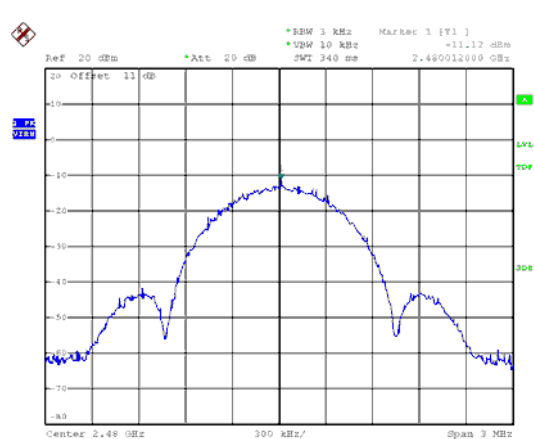




Modulation Type: GFSK (2Mbps)
CH00

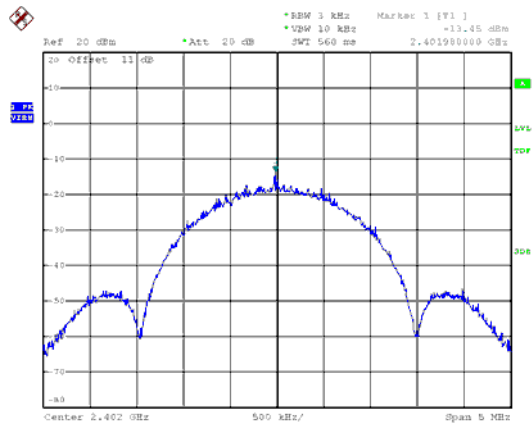

CH19

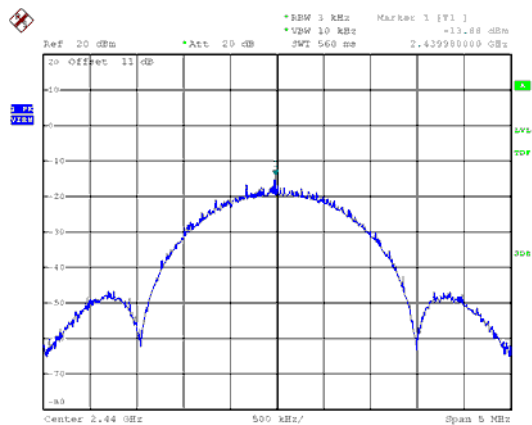

CH39

