



Antenna Test Report

**Heyuan Xunwei Communication Technology
Co., Ltd**

RF: Chenchuanming

Date: 2024.05.20

Office address: Zone M, 8/F, Building 1, Baisha Xinxing Industrial Park, No. 3011,
Shahe West Road, Nanshan District, Shenzhen

Contents:

Test equipment

Antenna information

Matching circuit

LTE Antenna gain


Antenna size diagram

Test equipment

Wireless communications test set: CMW500

Network Analyzer: Agilent 5071B

Anechoic Chamber : SATIMO SG24

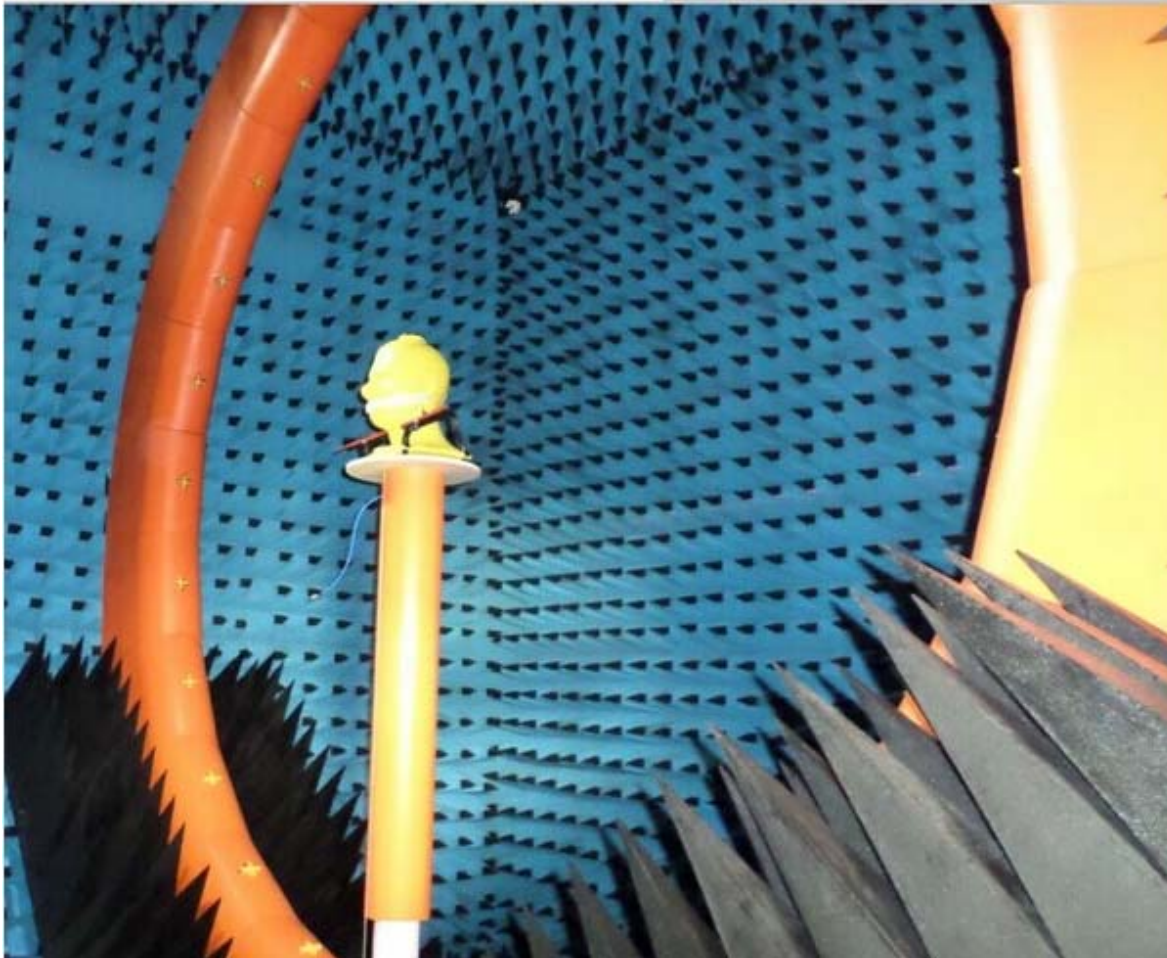


Antenna information

Customer	Boat of wealth
Antenna type	GSM,WCDMA,LTE:FPC BT:Wired
Antenna band	GSM900/1800/850/1900 WCDMA-B2/B5/B8 LTE-B2/4/7/8/28AB BT

frequency range (MHz)	703–960	1710–2170	2500–2690
VSWR	<3.5	<3.5	<3.5

Matching circuit (No modification)

RF modal

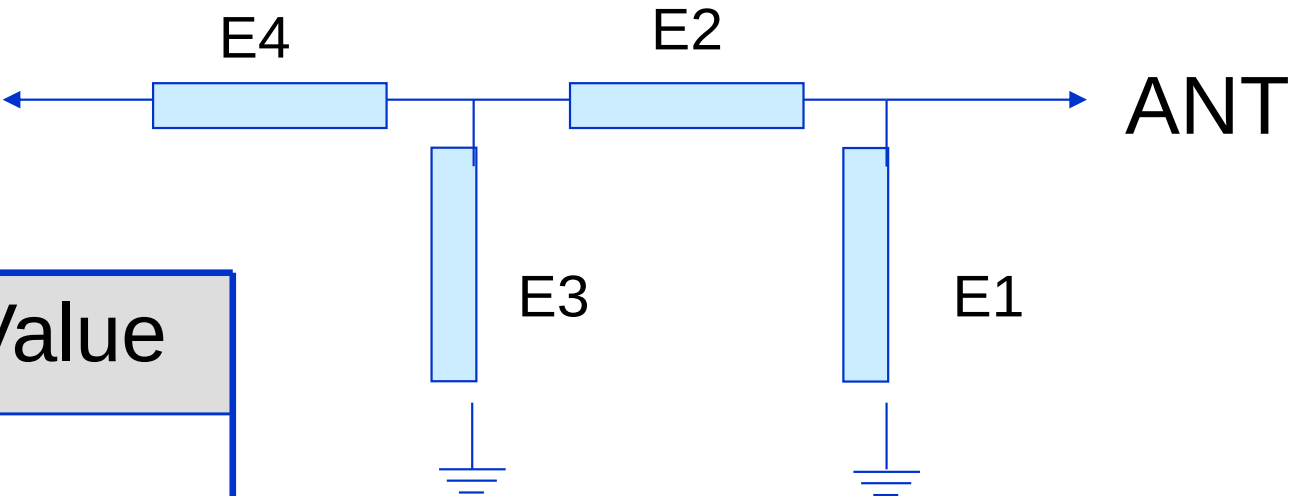

Element	Value
E1	
E2	
E3	
E4	

LTE Antenna gain

Antenna Max. Peak Gain:

GSM850 (824-894MHz) : -0.93dBi

PCS1900 (1850-1990MHz) : 2.09dBi

WCDMA-B2 (1850-1990MHz) : 2.09dBi

WCDMA-B5 (824-894MHz) : -0.93dBi




LTE-B2 (1850-1990MHz) : 2.09dBi

LTE-B4 (1710-2155MHz) : 2.15dBi

LTE-B7 (2500-2690MHz) : 0.37dBi




BT (2400-2500MHz) : -0.16dBi

Main antenna Peak Gain(703~960M)

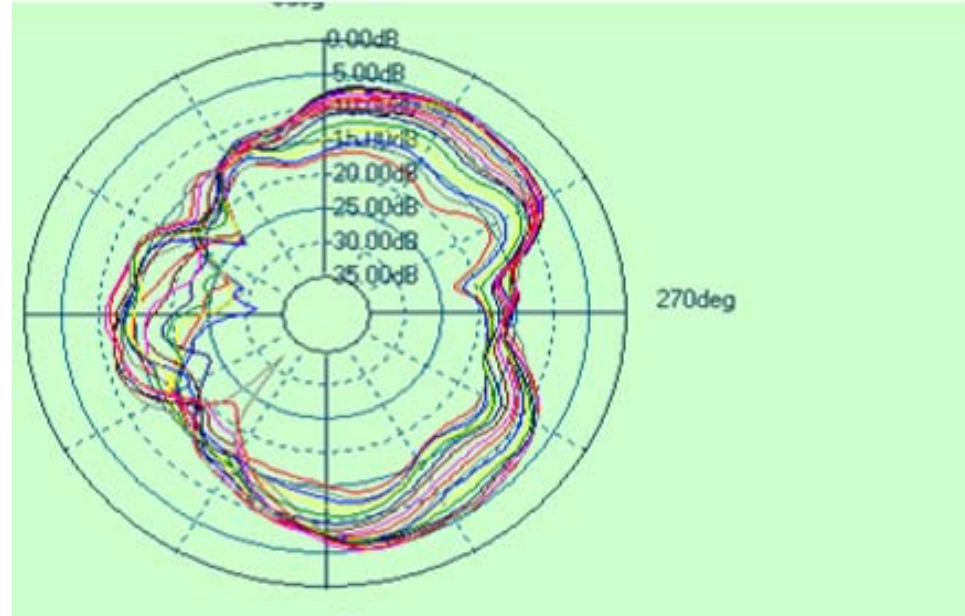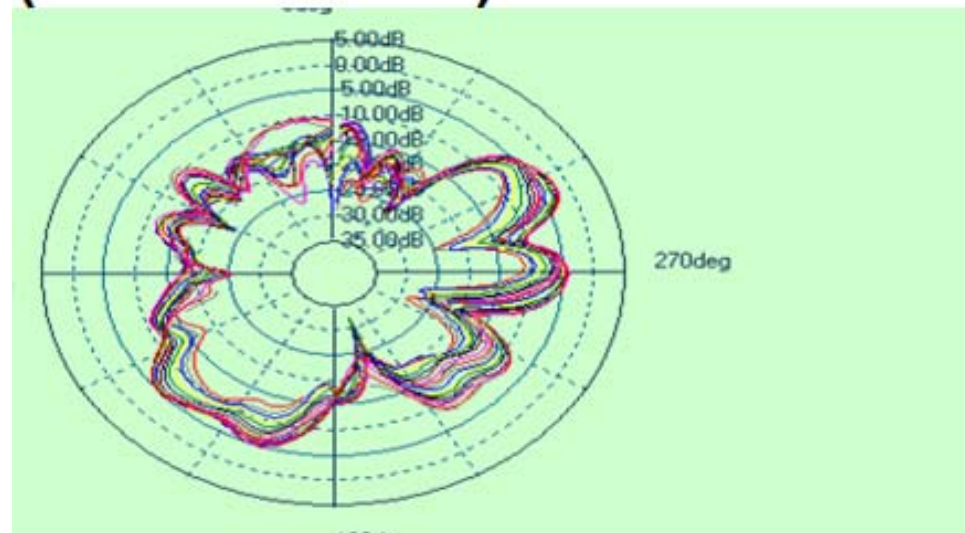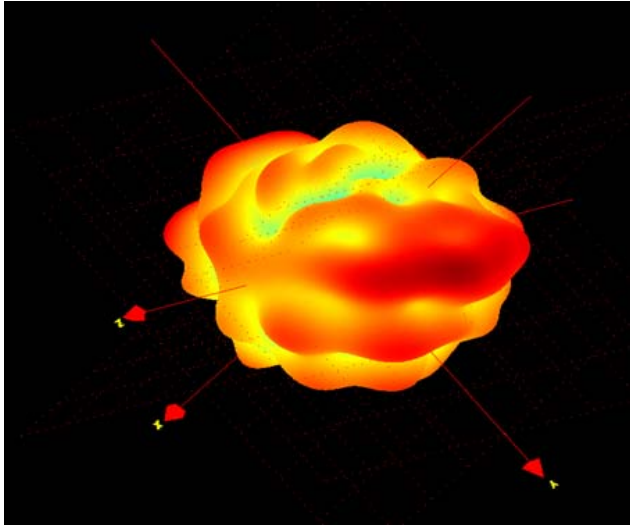



Freq (MHZ)	Effi (%)
703	24.8
824	26.7
960	27.4

2.3 Main antenna Peak Gain(2490~2690M)

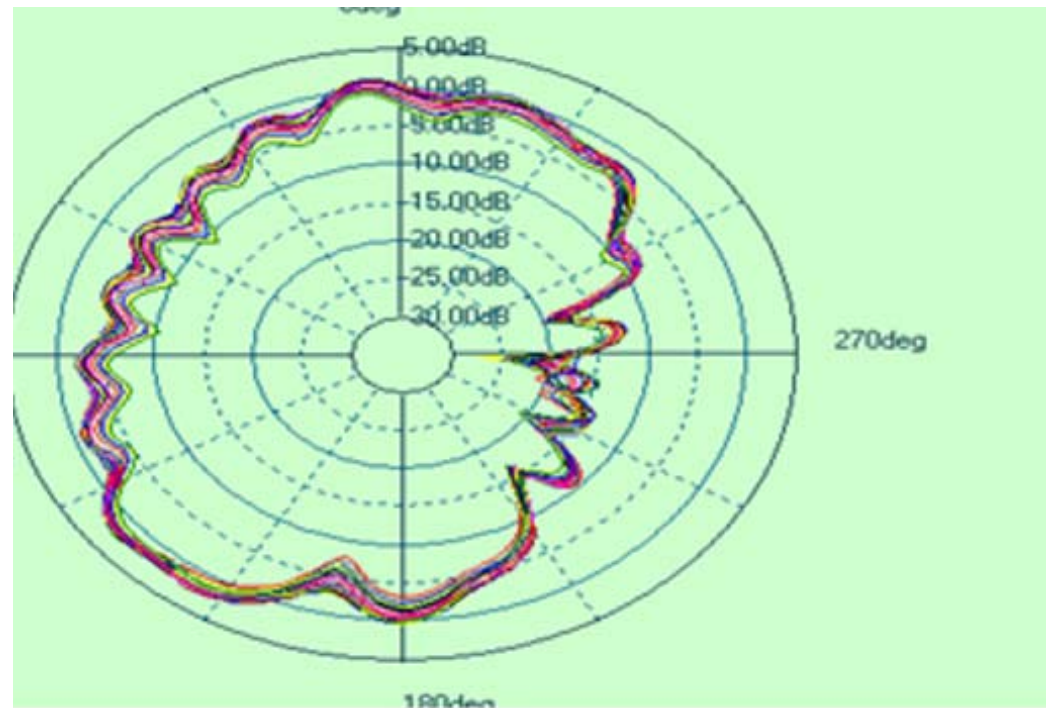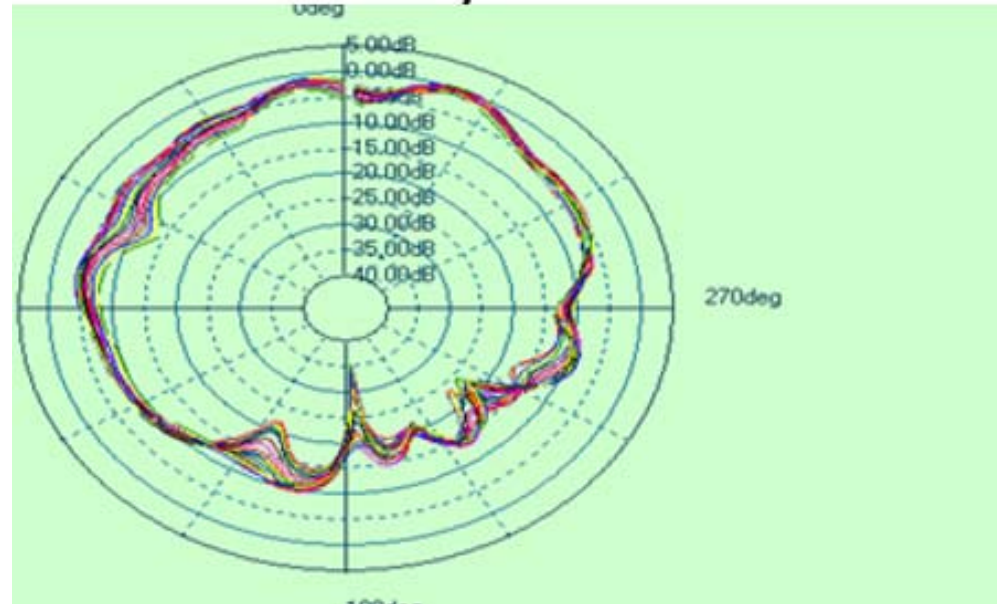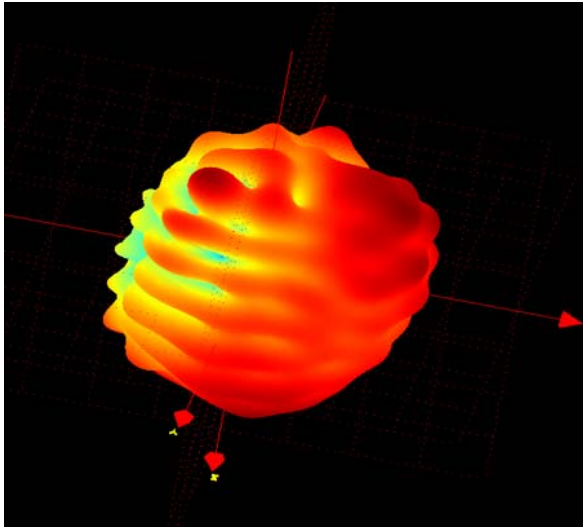


Freq (MHZ)	Effi (%)
2590	38.7



2.3 DIV antenna Peak Gain(1710~2170M)

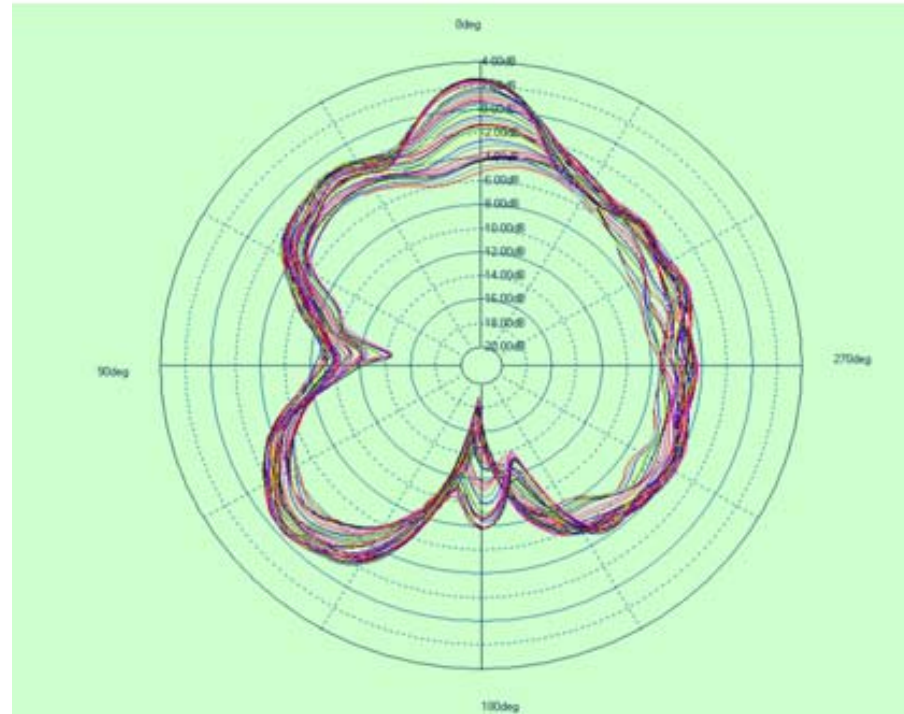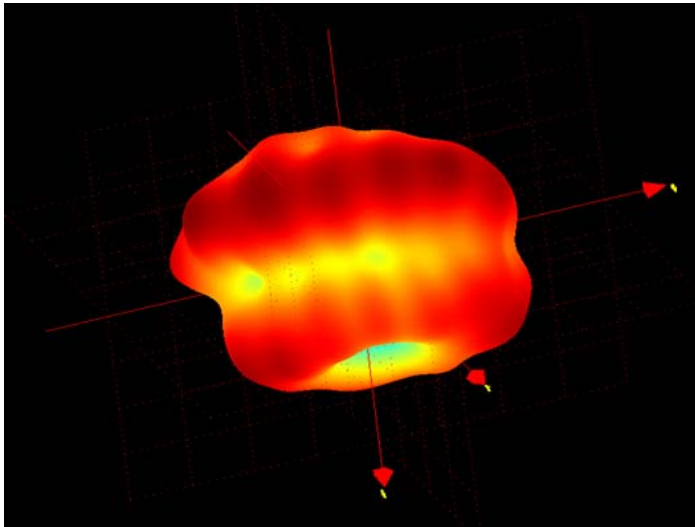


Freq (MHZ)	Effi (%)
1880	34.6
1990	36.8
2110	35.4

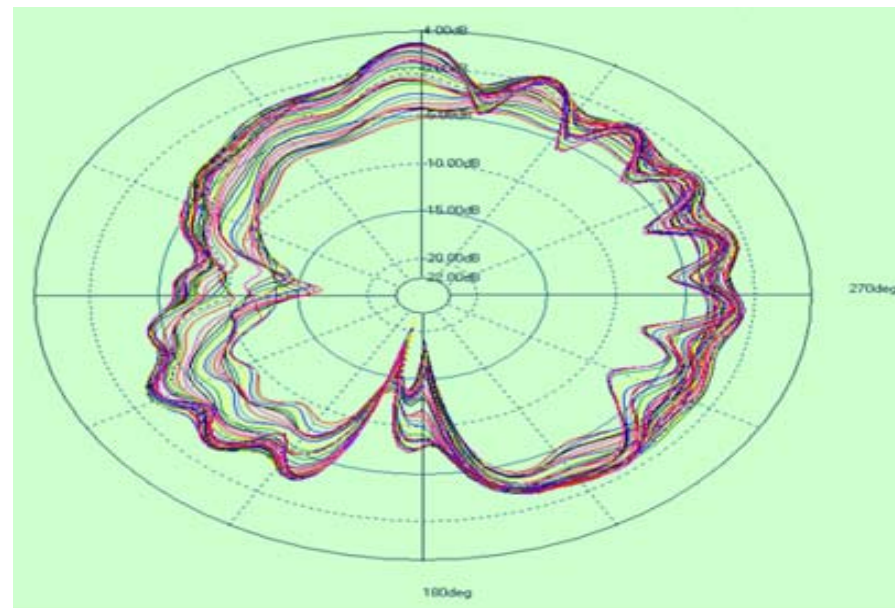


2.3 BT antenna Peak Gain(2400-2500M)

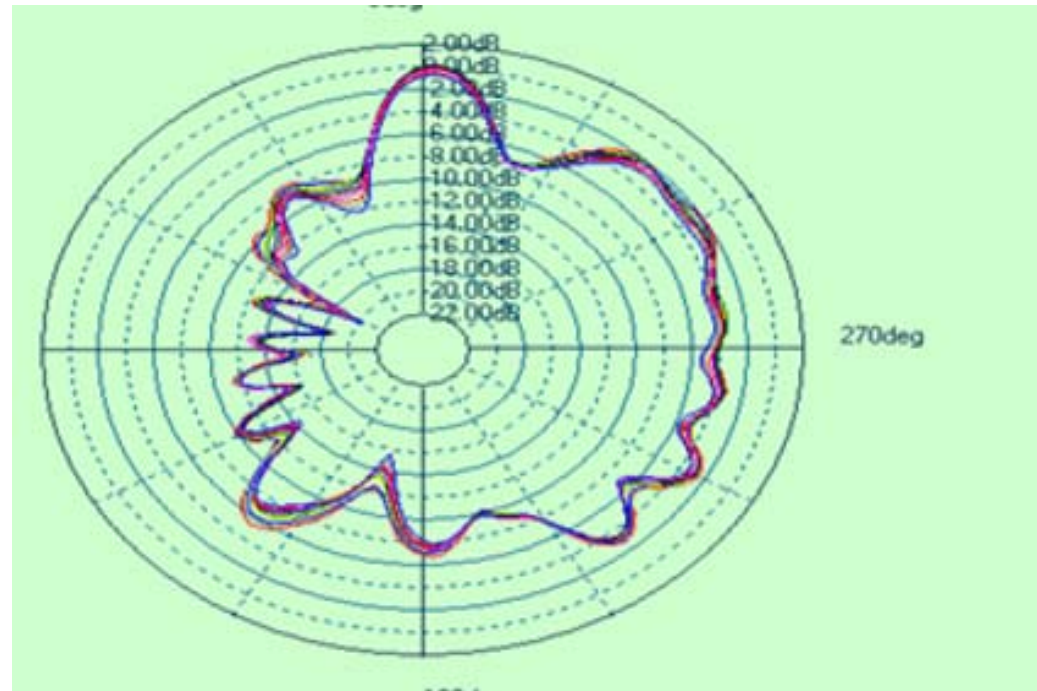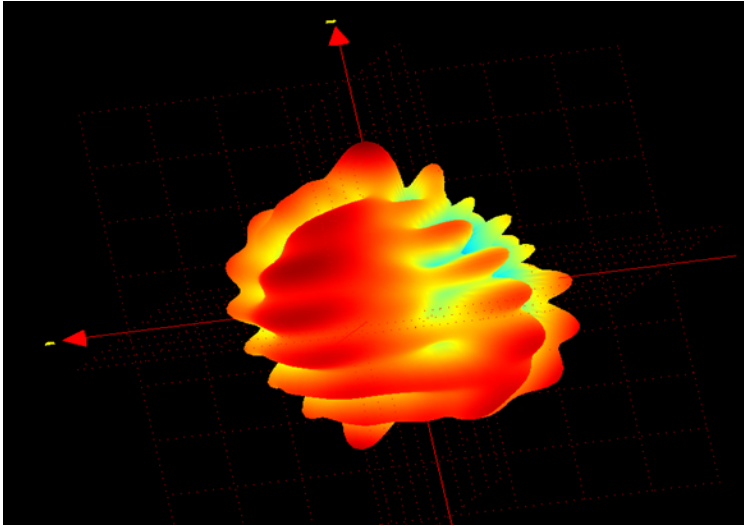

Freq (MHZ)	Effi (%)
2450	34.7

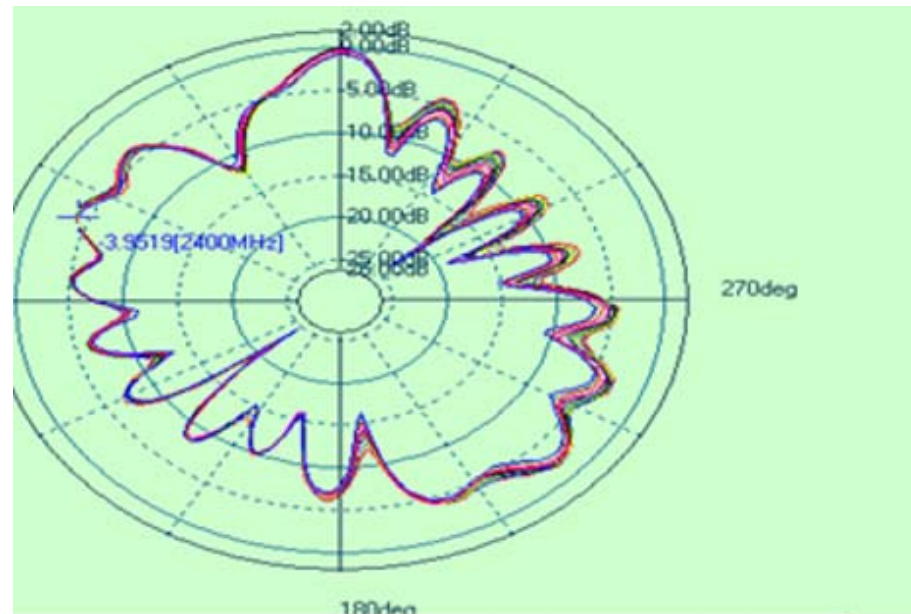

Antenna size diagram

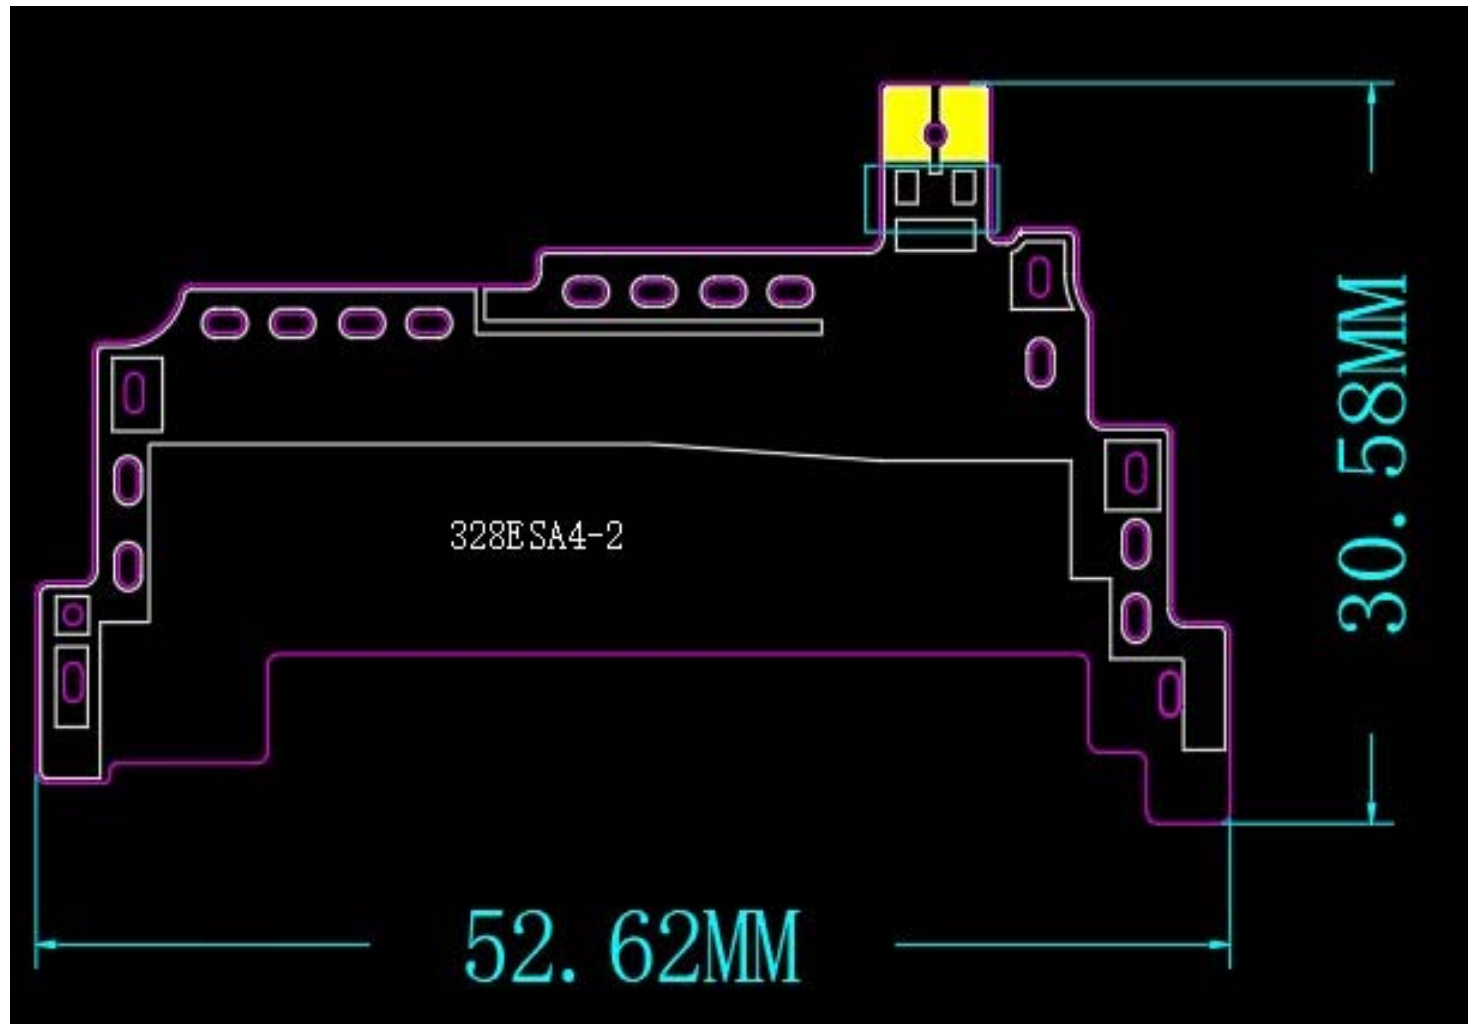

BT Antenna size diagram

