Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer)**:**

Occupied Bandwidth		
Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest	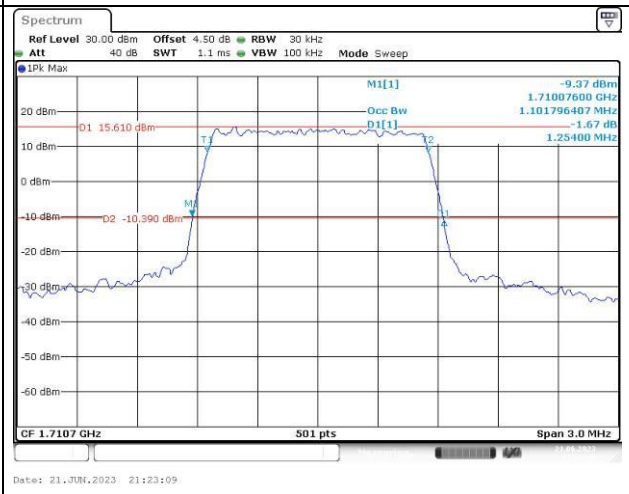	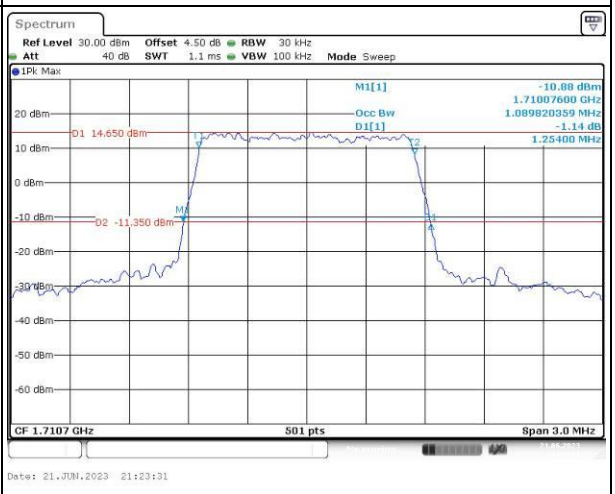
Middle	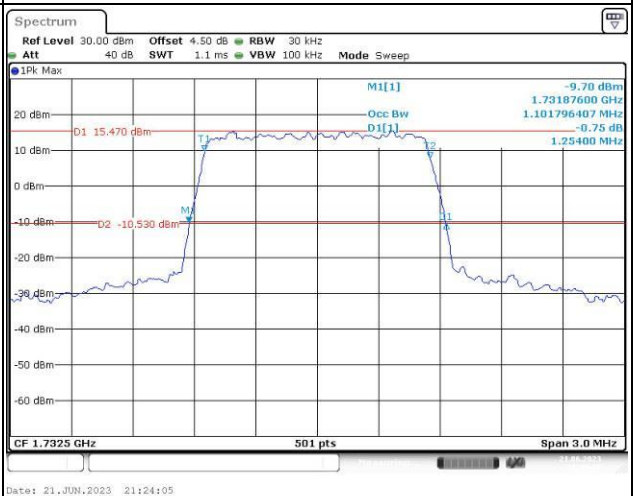	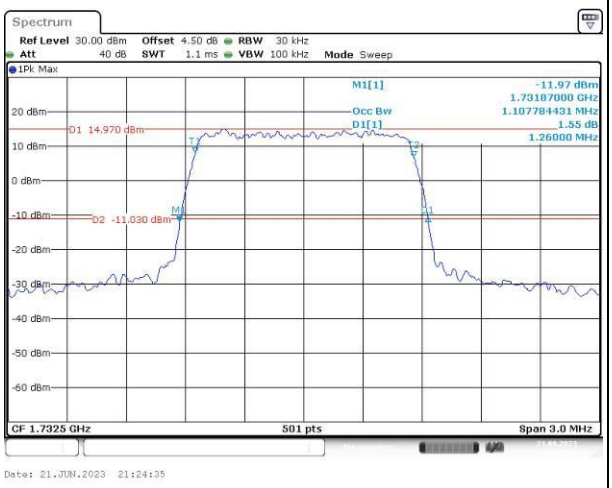
Highest	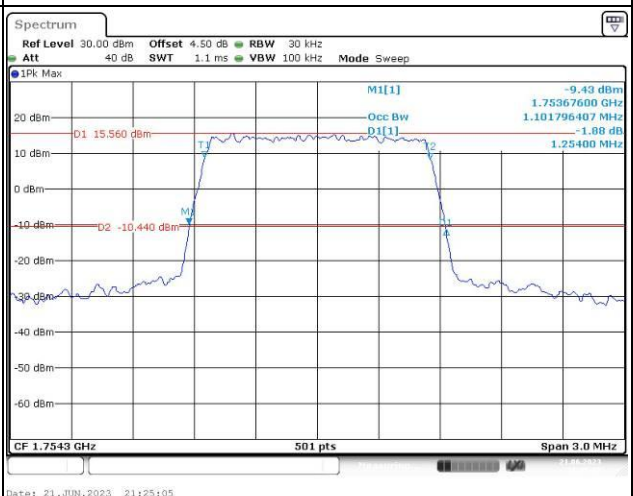	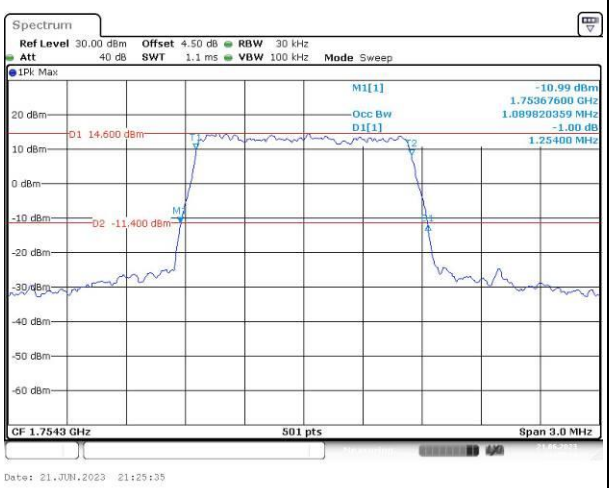

Occupied Bandwidth		
Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	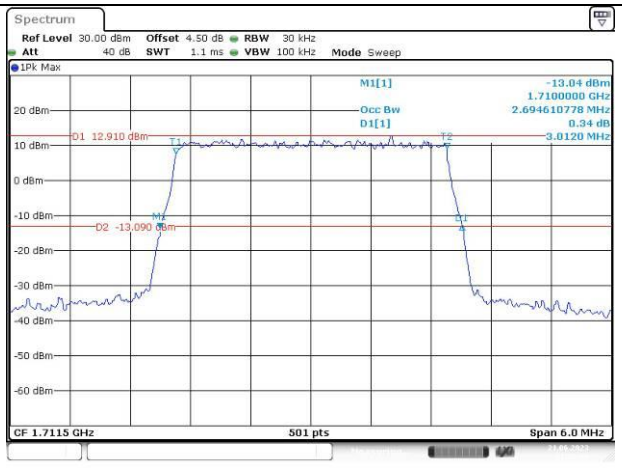	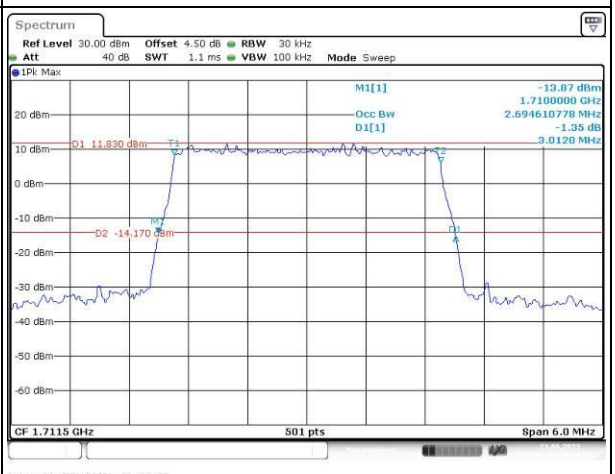
Middle	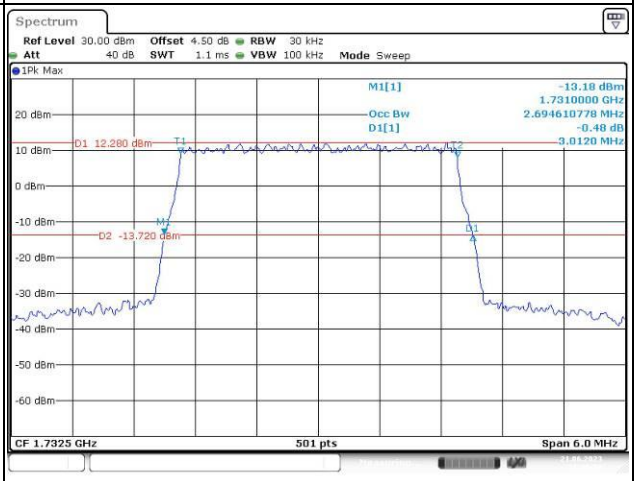	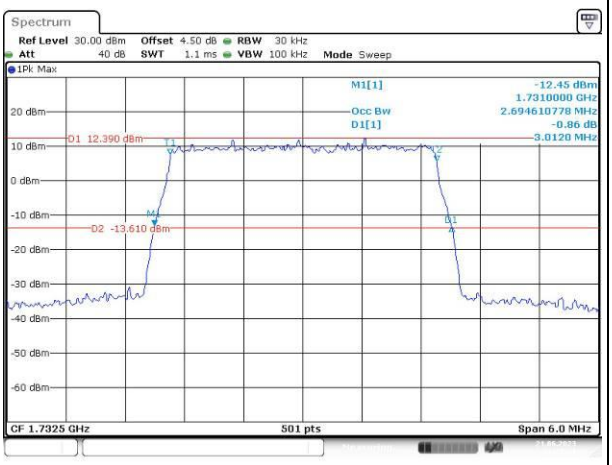
Highest	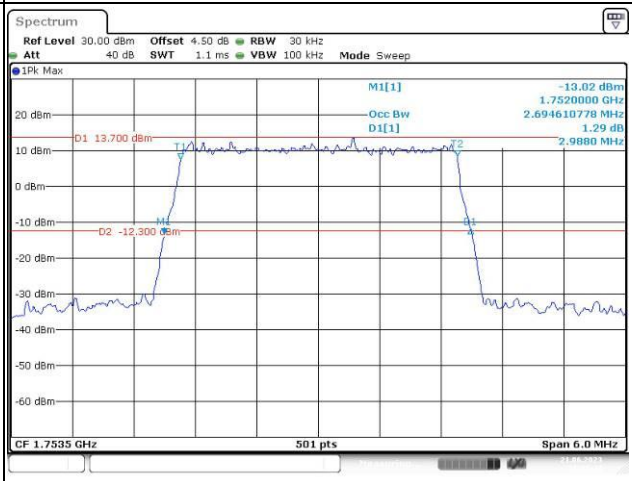	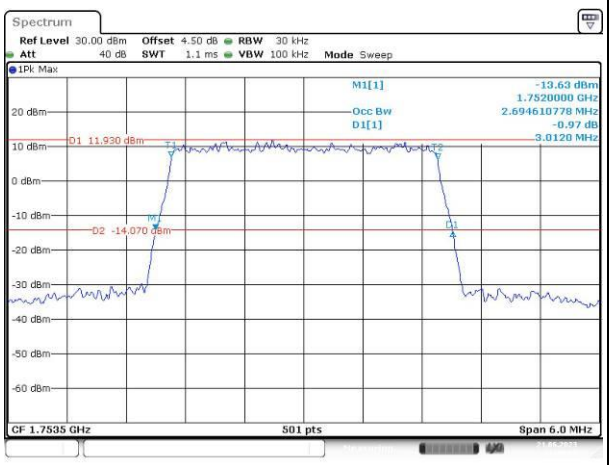

Occupied Bandwidth		
Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	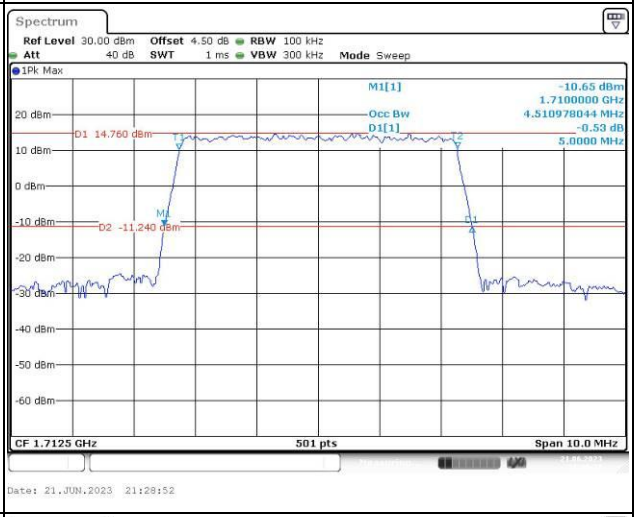	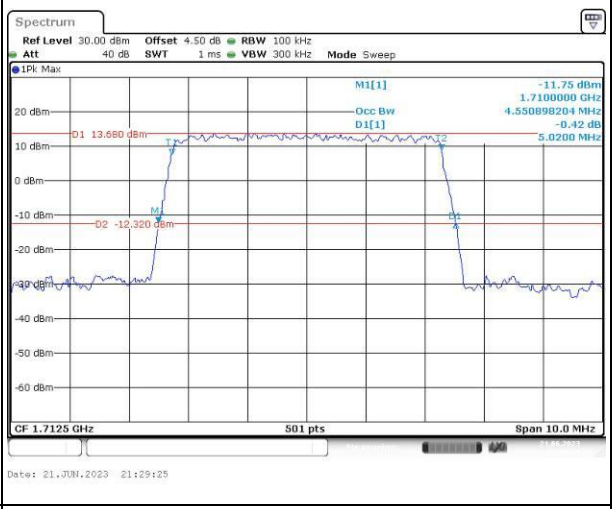
Middle	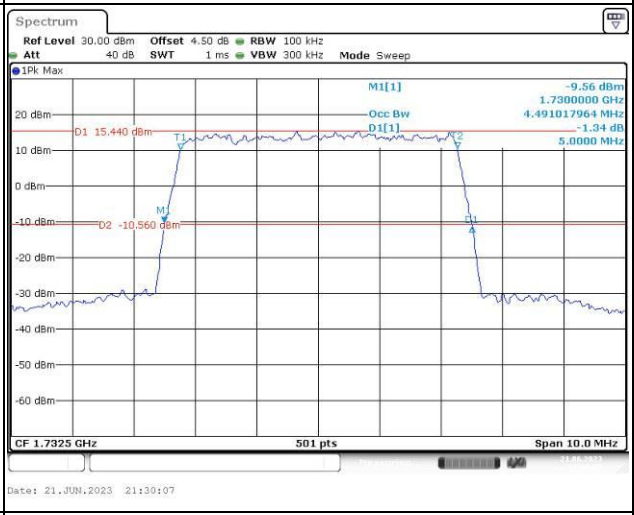	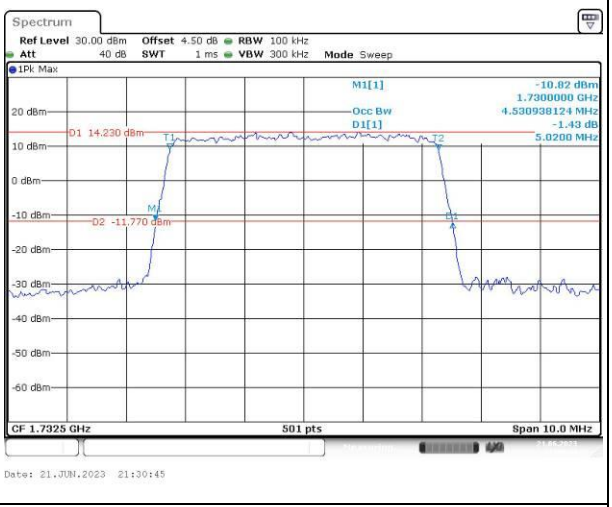
Highest	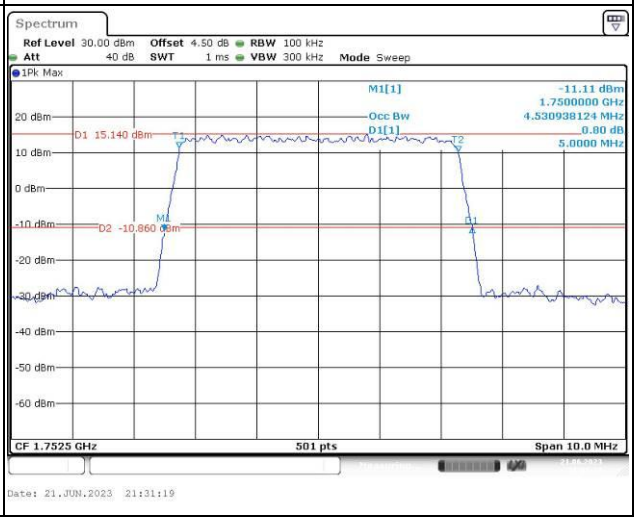	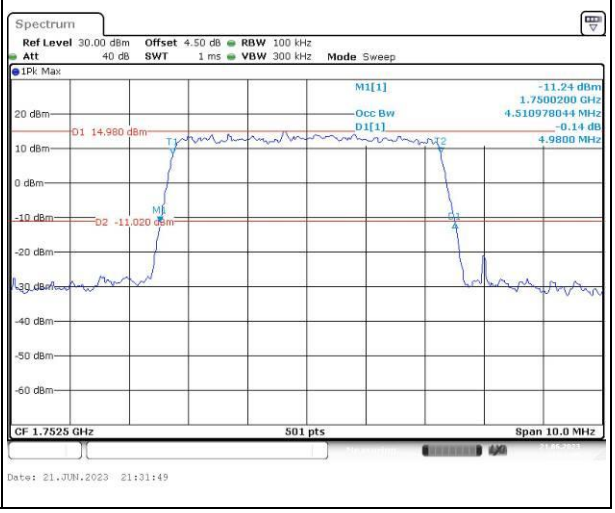

Occupied Bandwidth		
Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	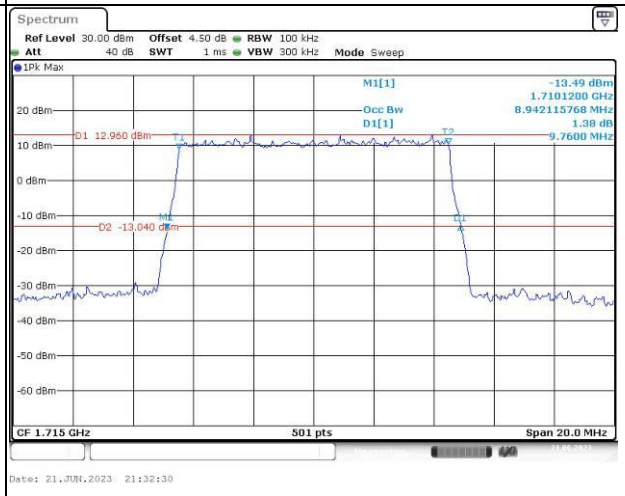	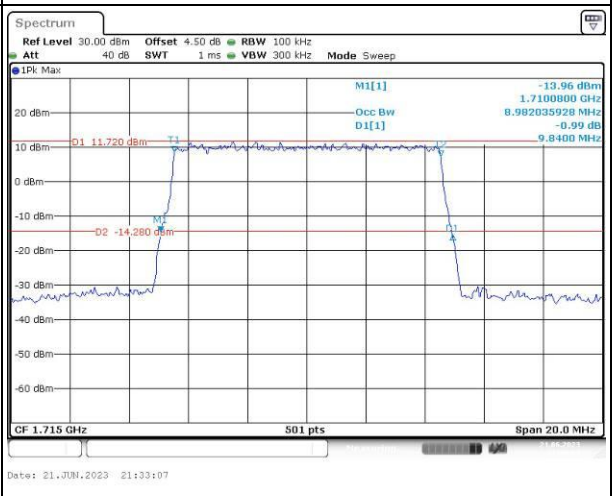
Middle	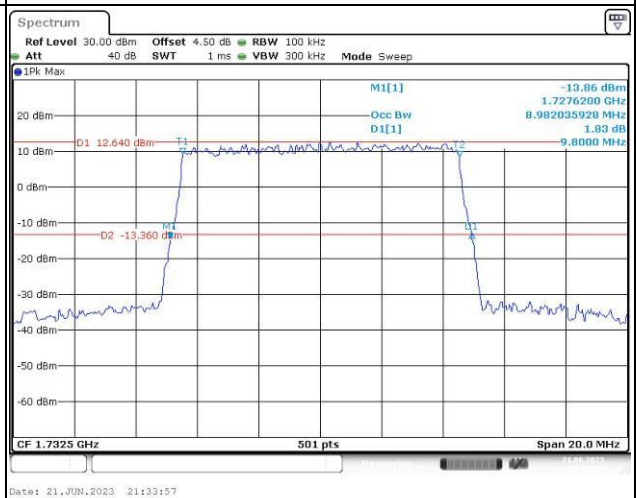	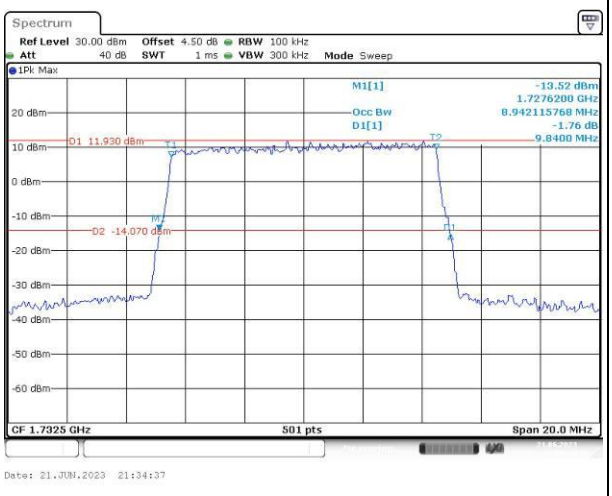
Highest	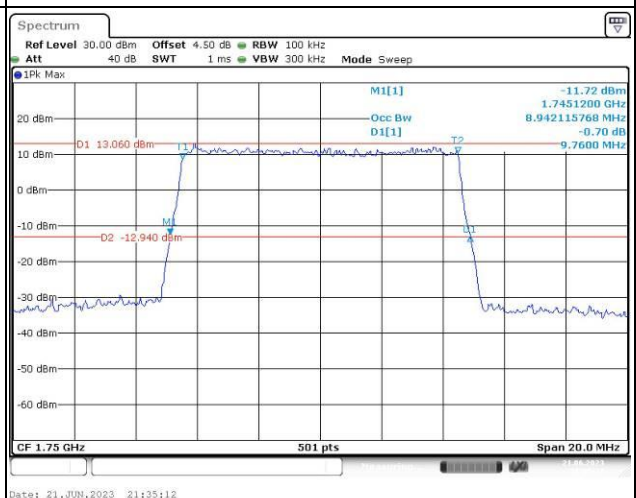	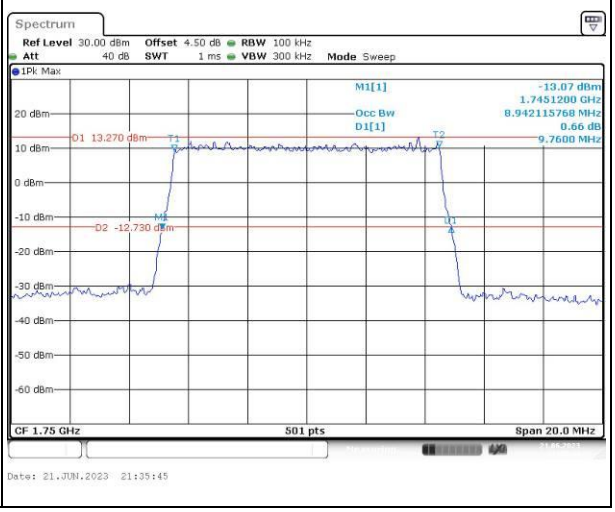

Occupied Bandwidth		
Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	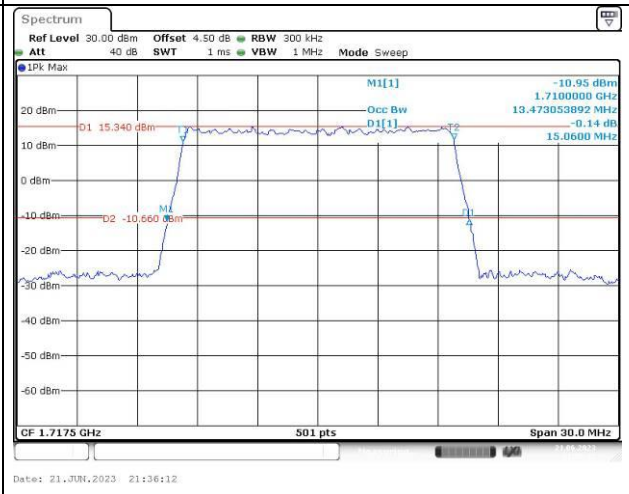	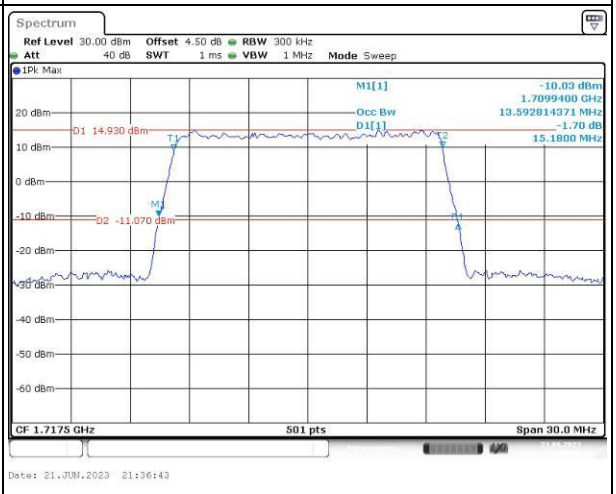
Middle	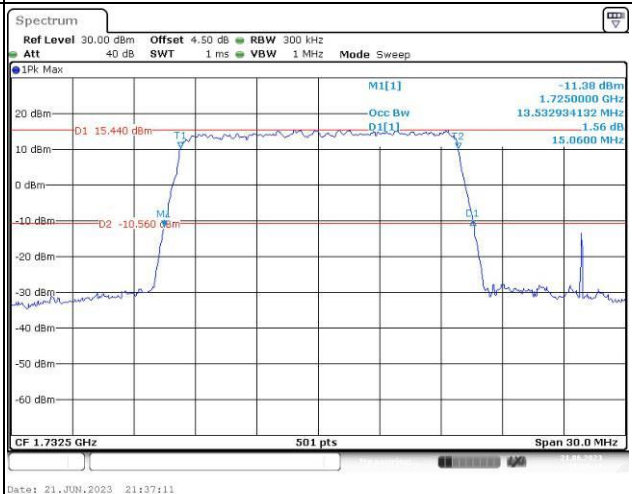	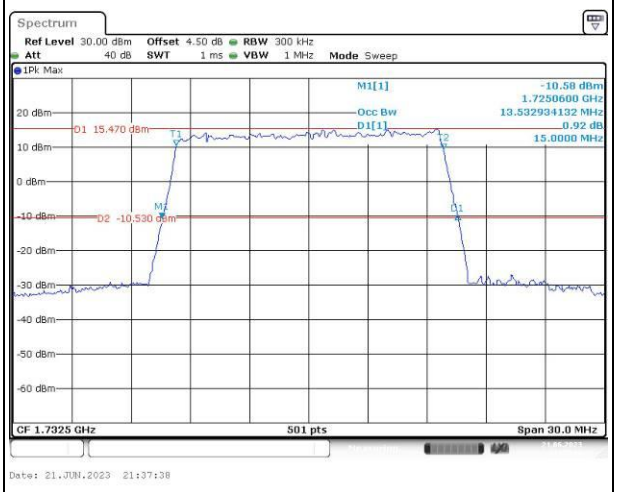
Highest	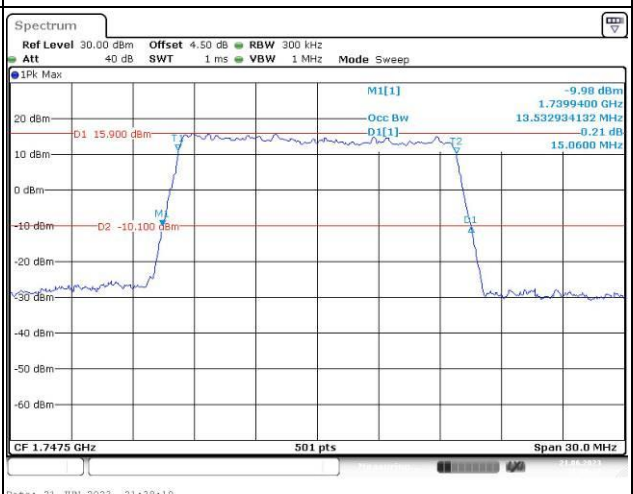	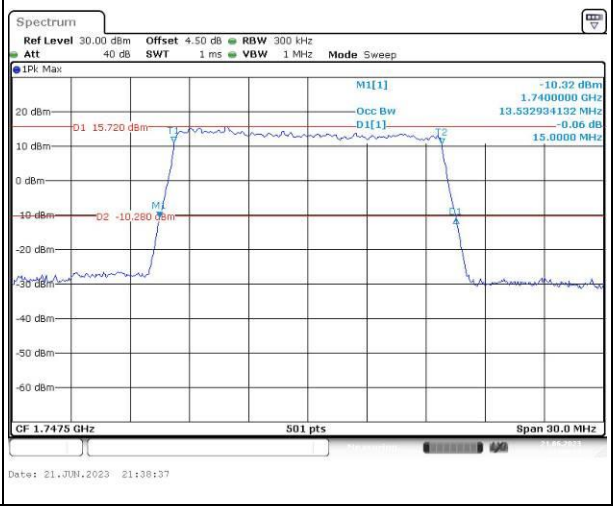

Occupied Bandwidth		
Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	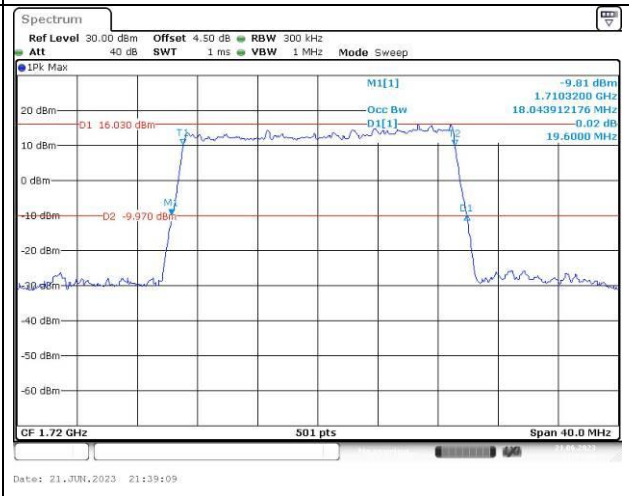	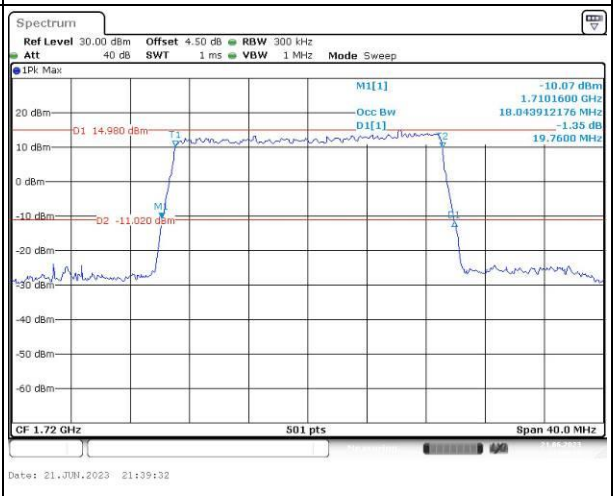
Middle	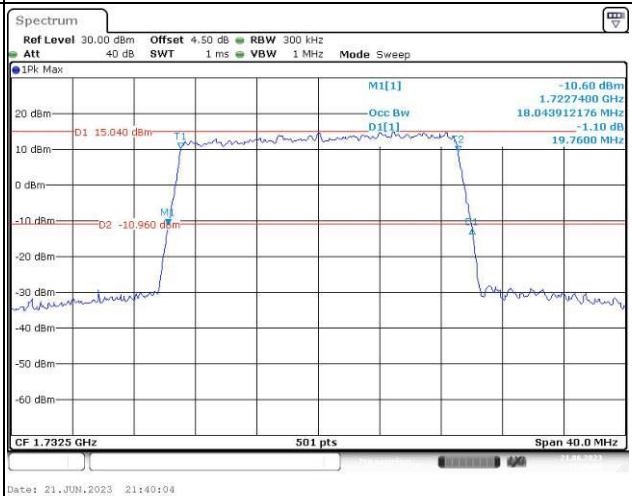	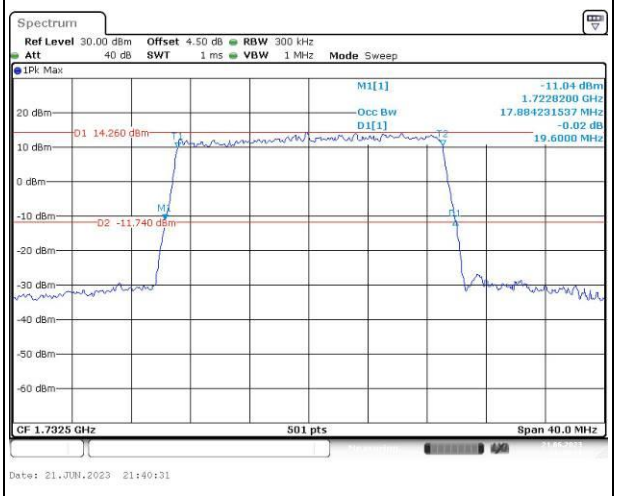
Highest	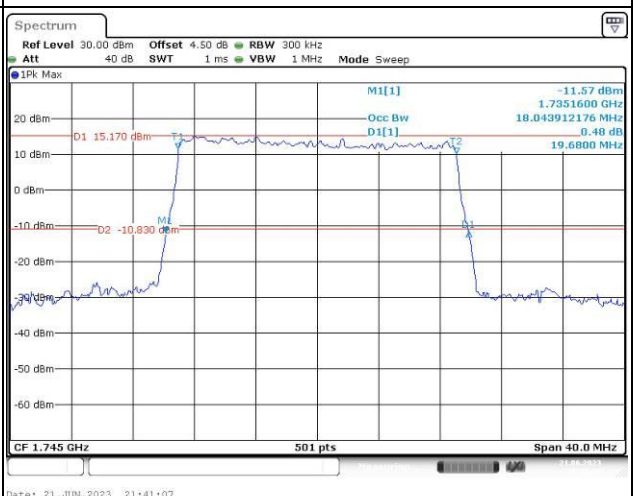	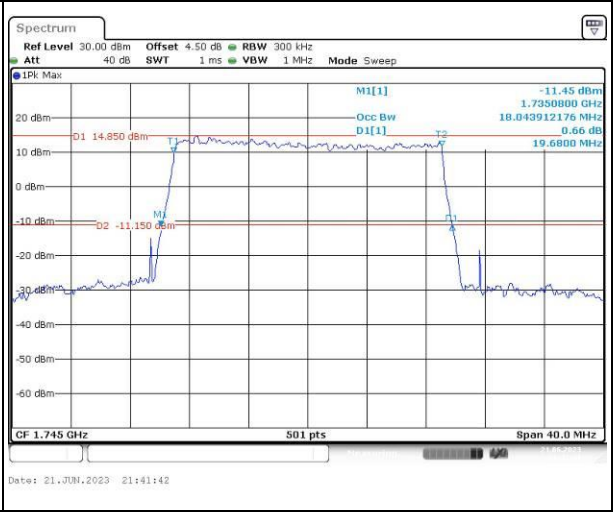

Spurious Emissions at Antenna Terminal		
Channel	**1.4MHz Bandwidth QPSK**	
Lowest	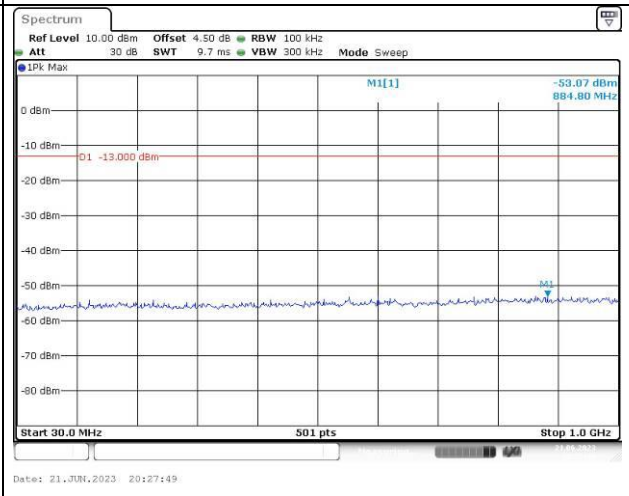	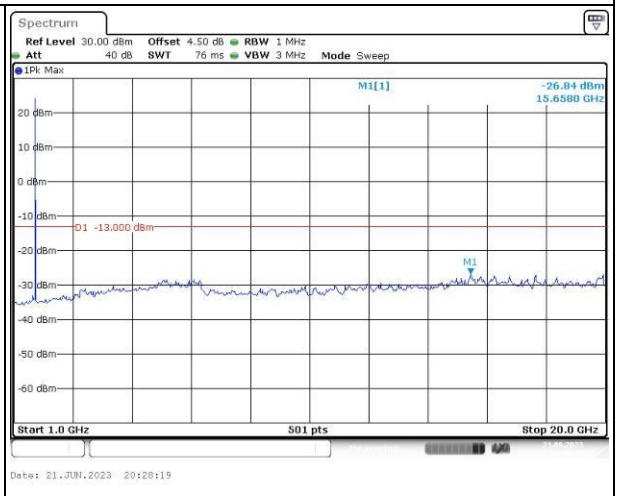
Middle	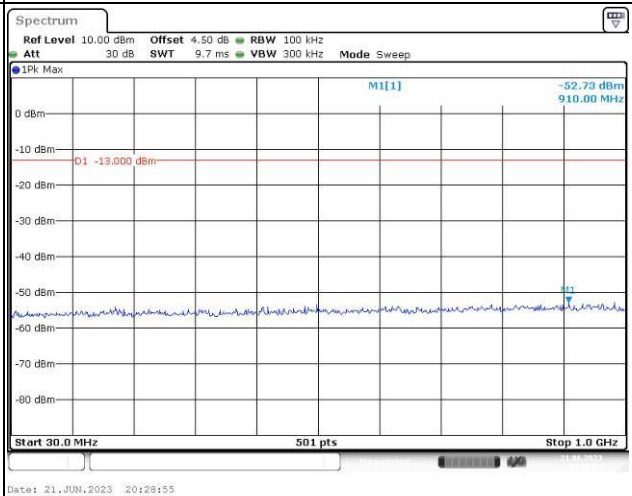	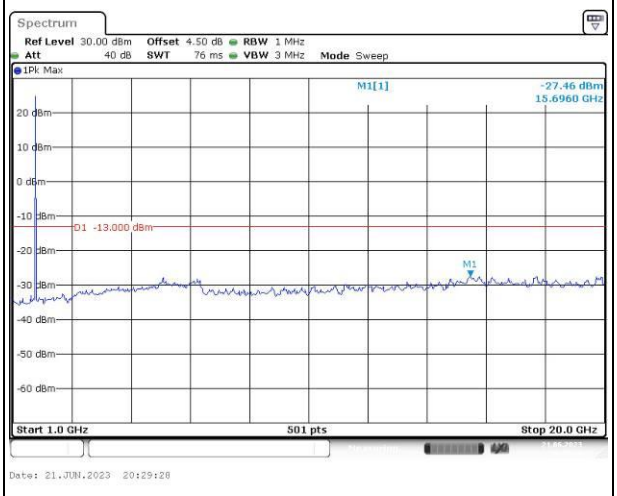
Highest	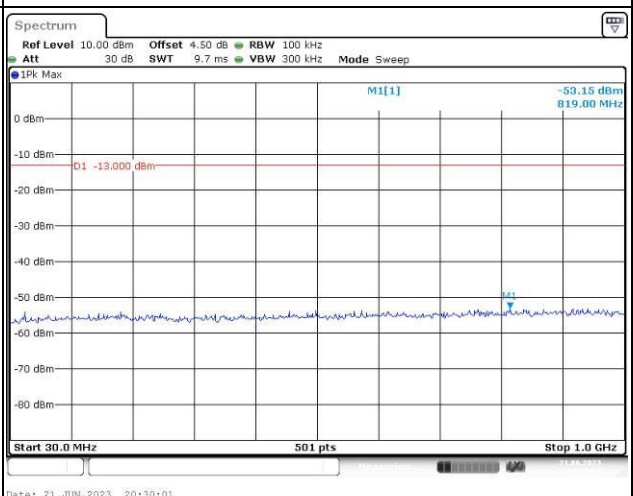	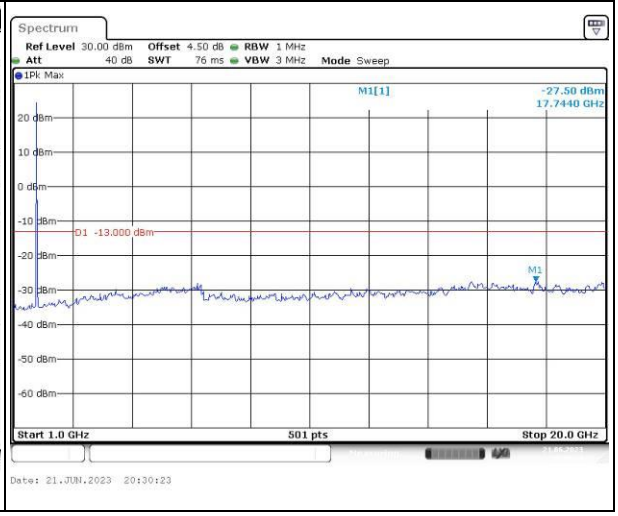

Spurious Emissions at Antenna Terminal		
Channel	**3MHz Bandwidth QPSK**	
Lowest	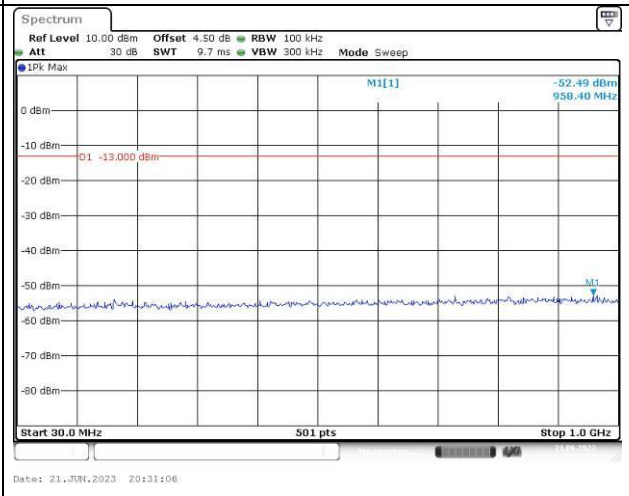	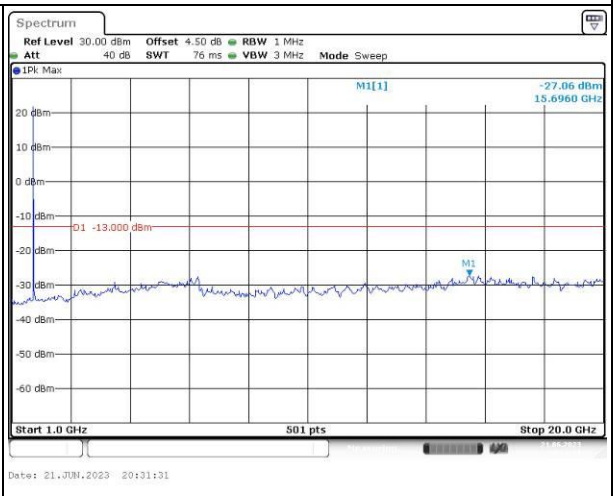
Middle	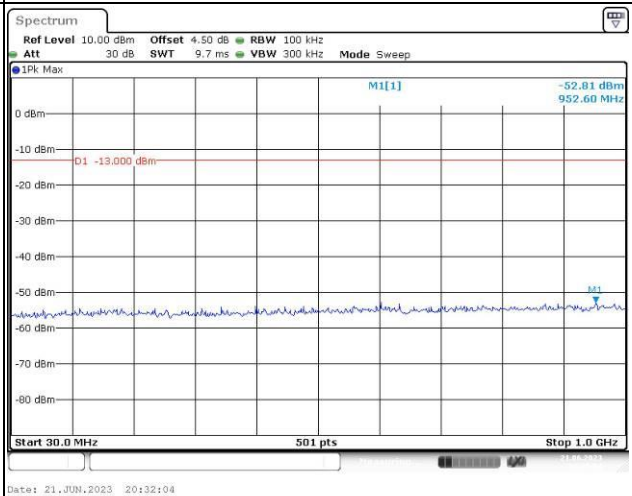	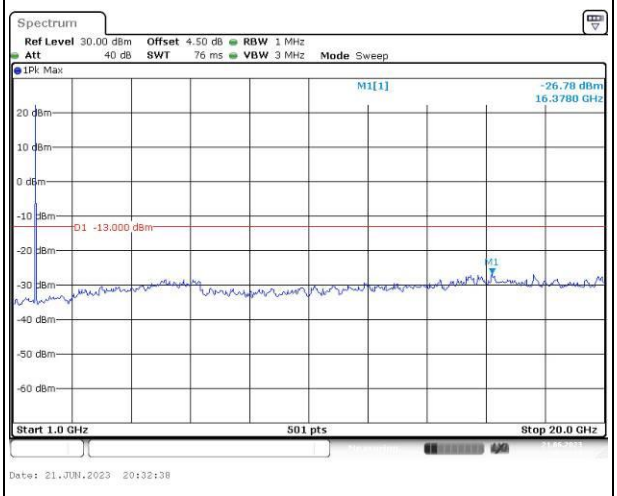
Highest	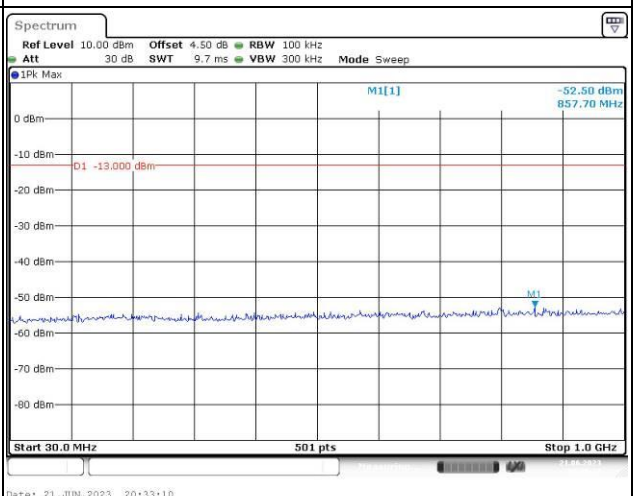	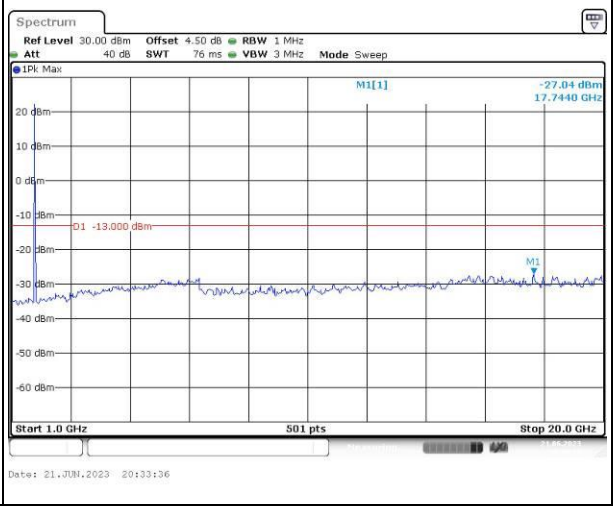

Spurious Emissions at Antenna Terminal		
Channel	**5MHz Bandwidth QPSK**	
Lowest	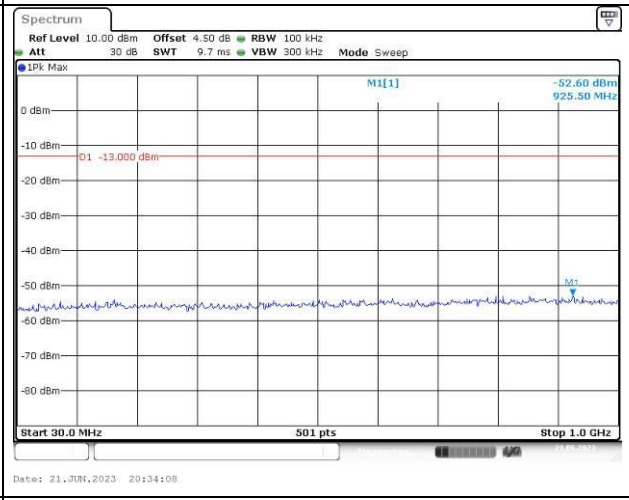	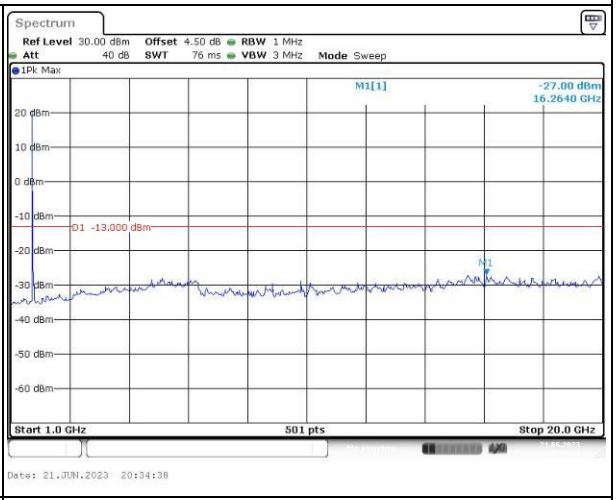
Middle	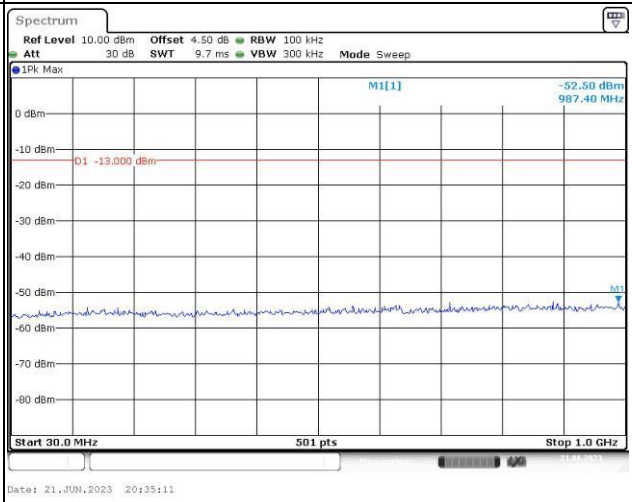	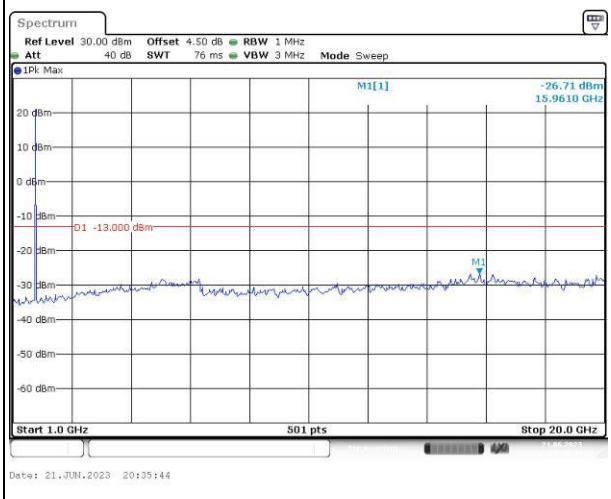
Highest	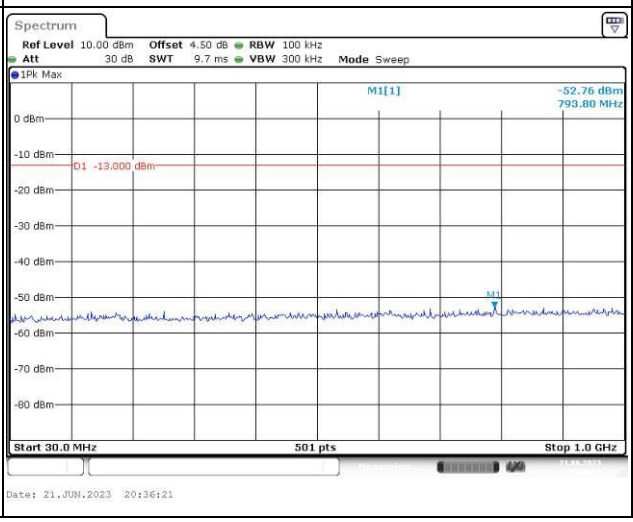	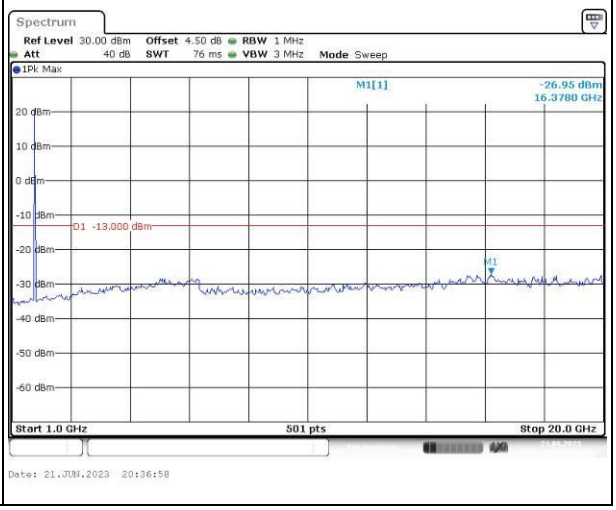

Spurious Emissions at Antenna Terminal		
Channel	**10MHz Bandwidth QPSK**	
Lowest	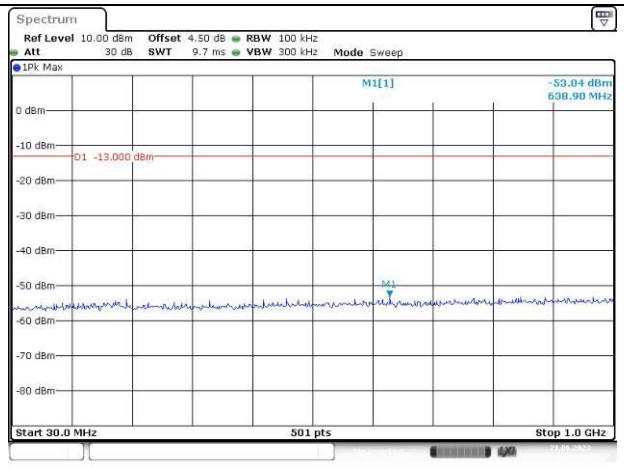	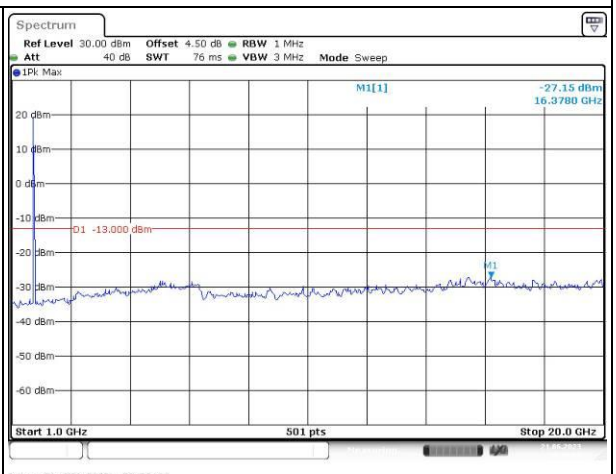
Middle	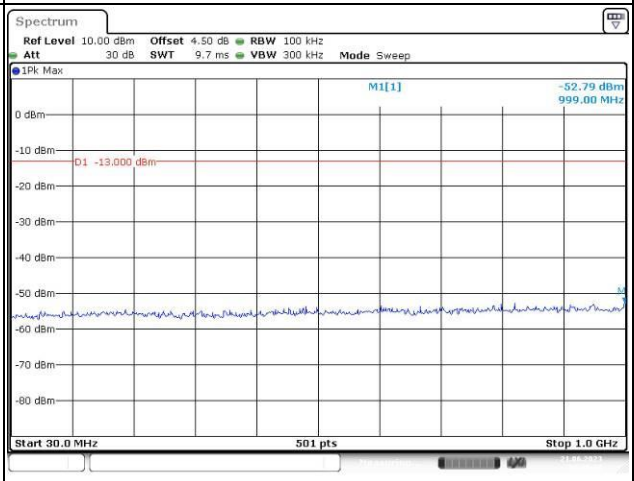	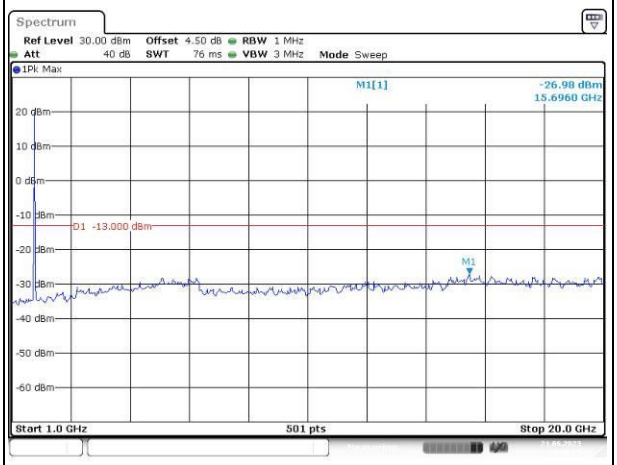
Highest	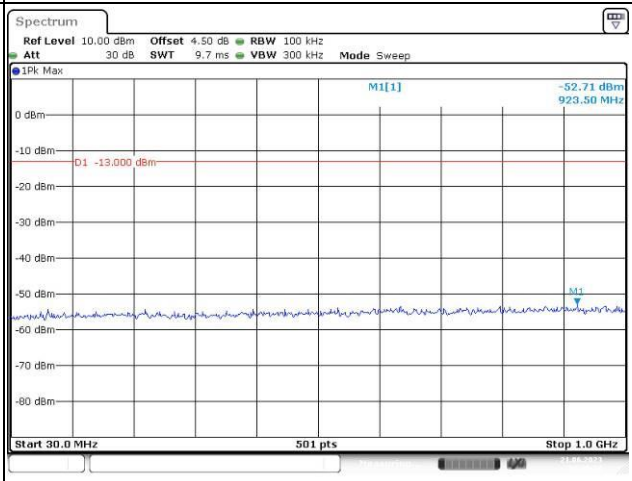	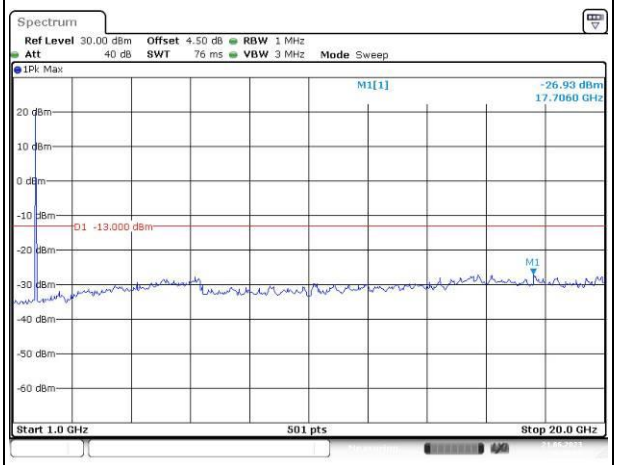

Spurious Emissions at Antenna Terminal		
Channel	**15MHz Bandwidth QPSK**	
Lowest	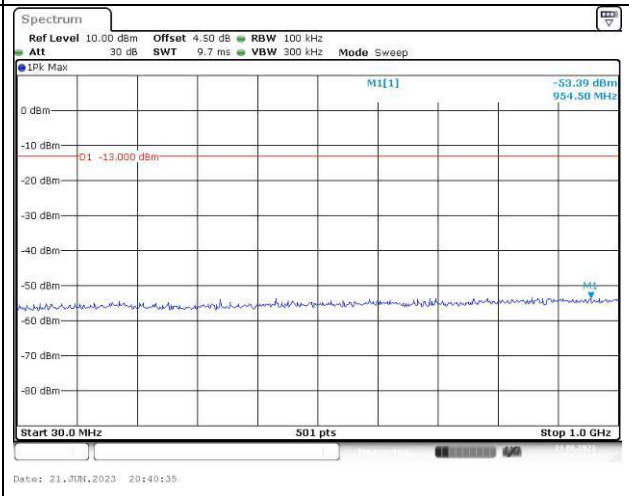	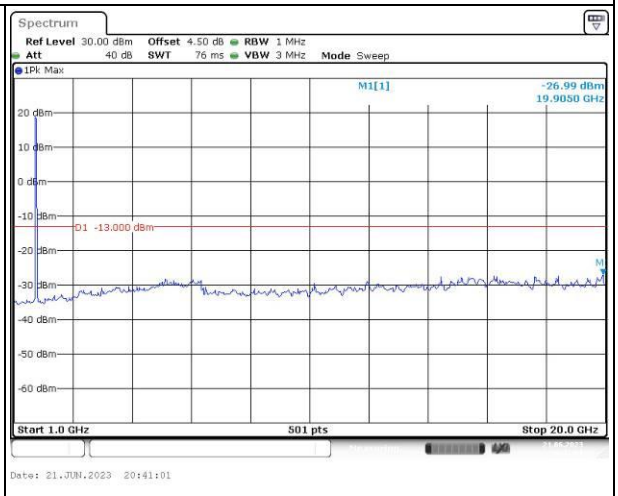
Middle	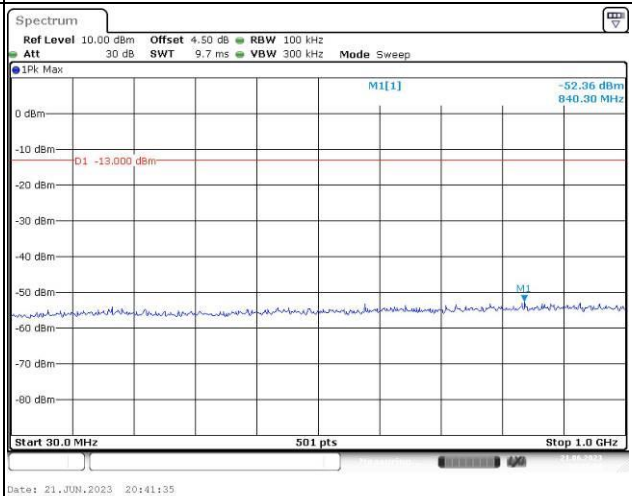	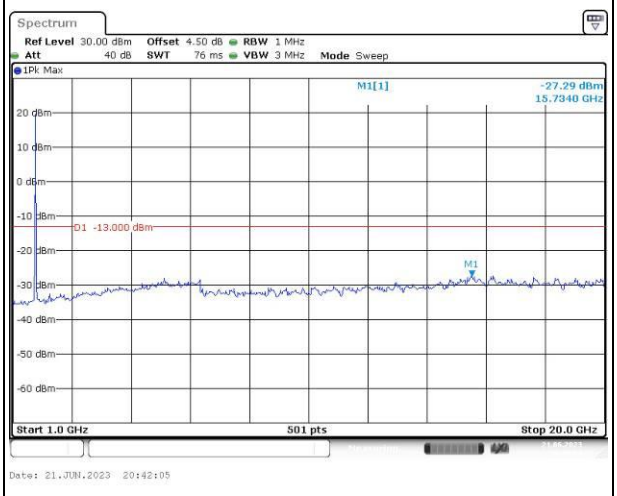
Highest	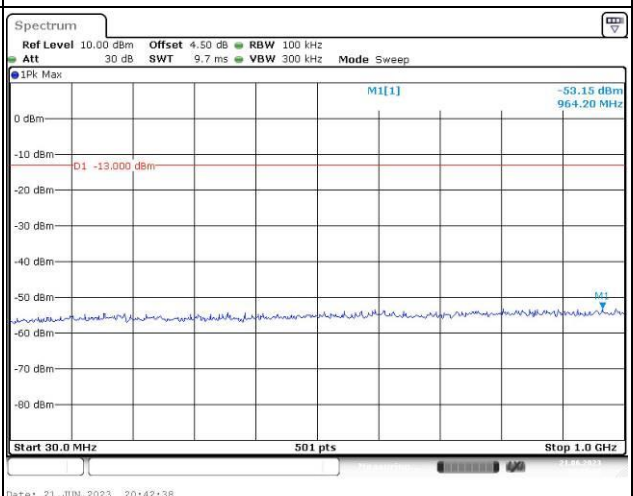	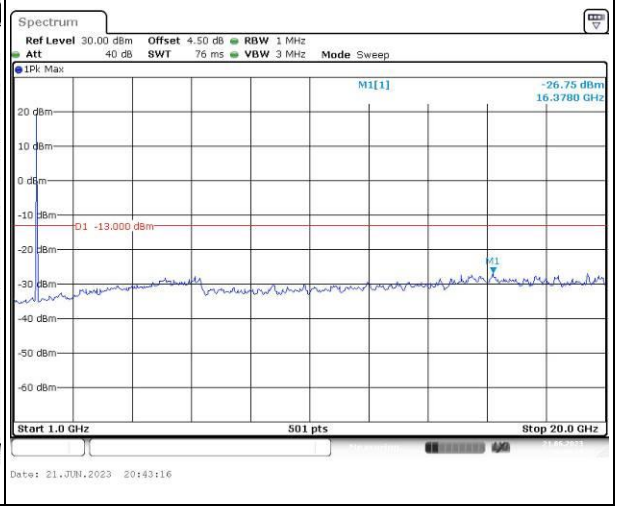

Spurious Emissions at Antenna Terminal		
Channel	**20MHz Bandwidth QPSK**	
Lowest	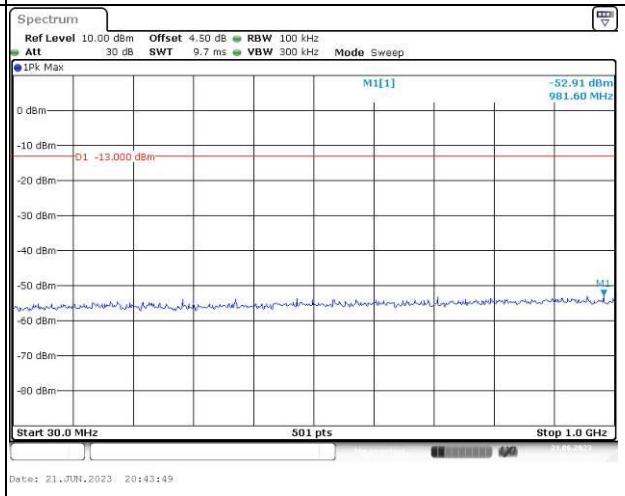	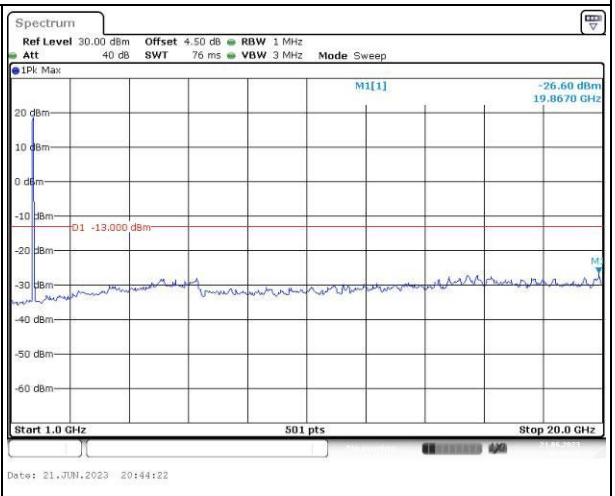
Middle	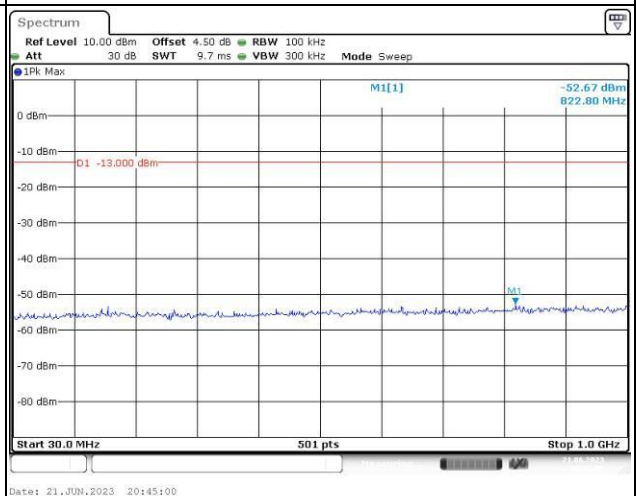	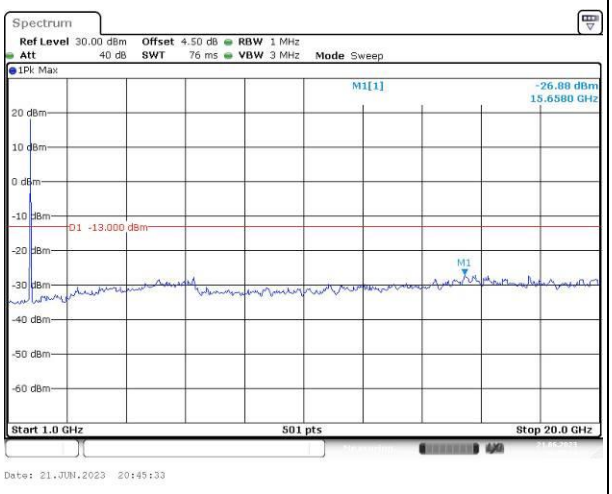
Highest	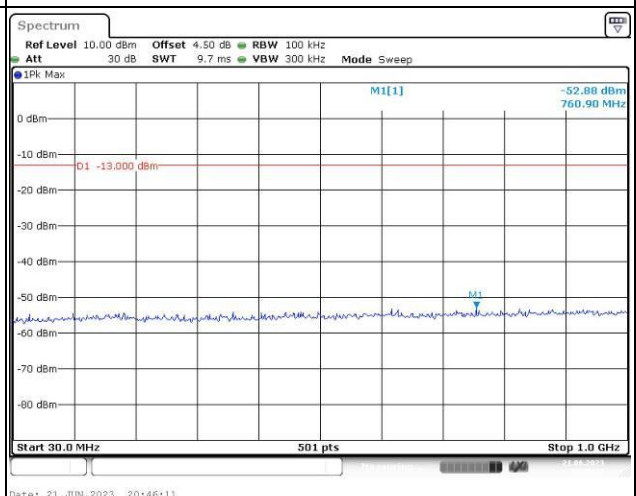	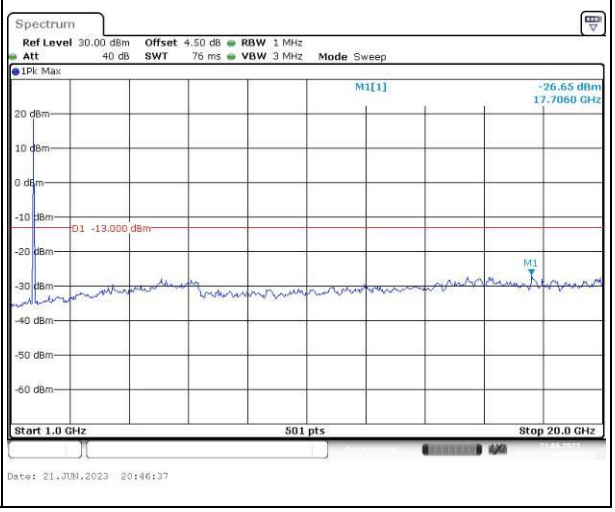

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 1.4MHz	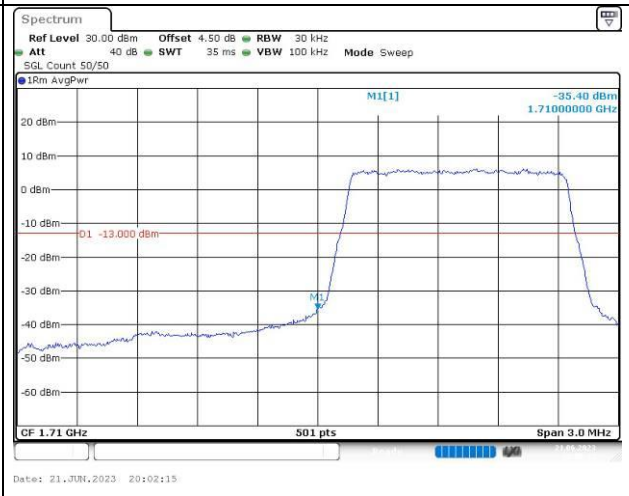	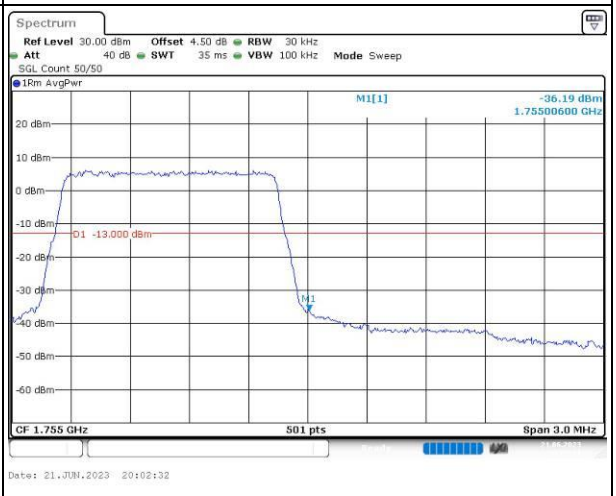
QPSK 3MHz	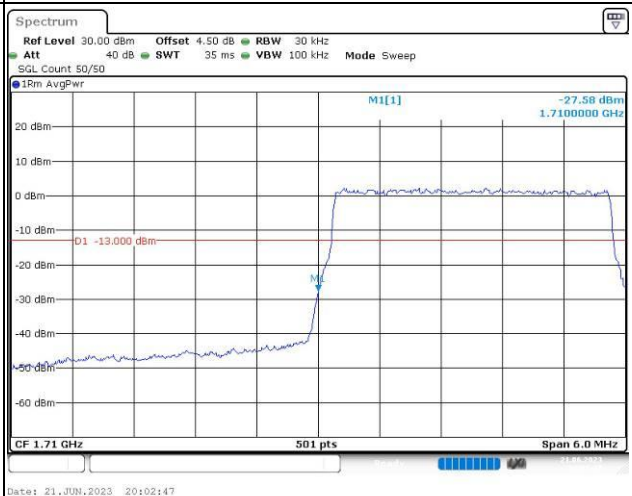	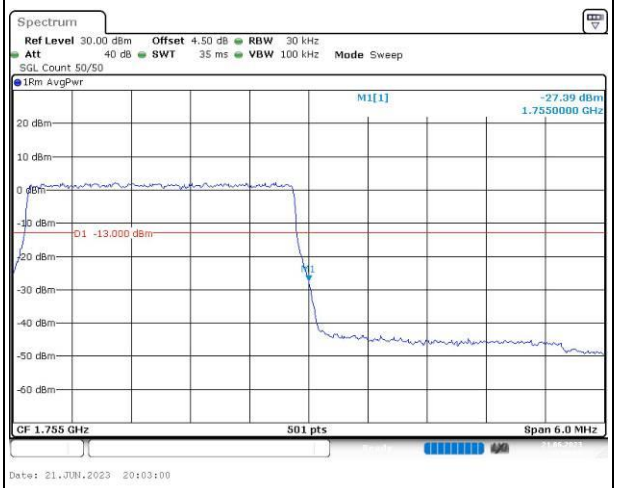
QPSK 5MHz	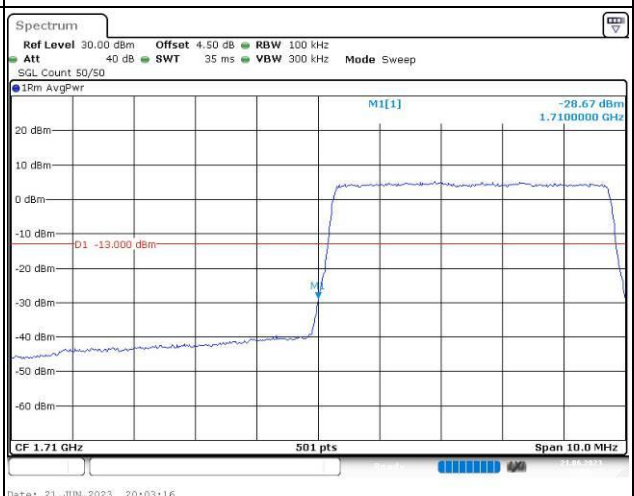	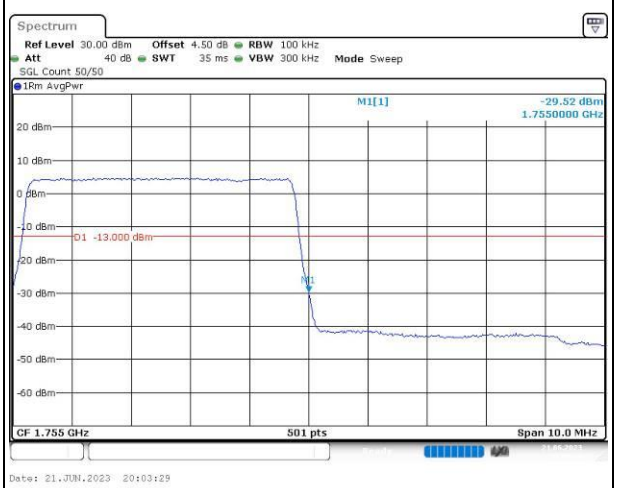

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 10MHz	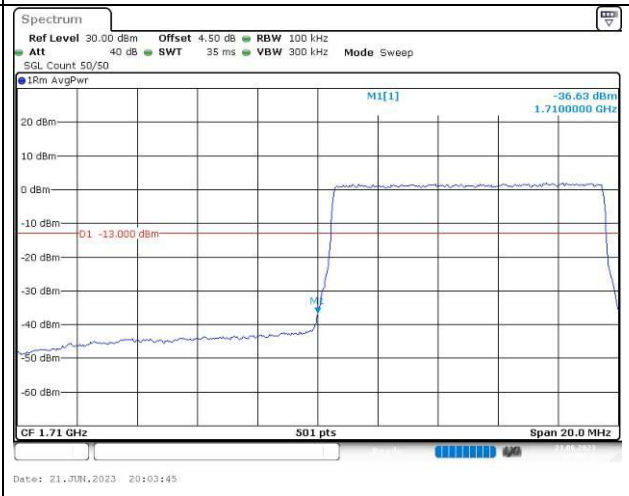	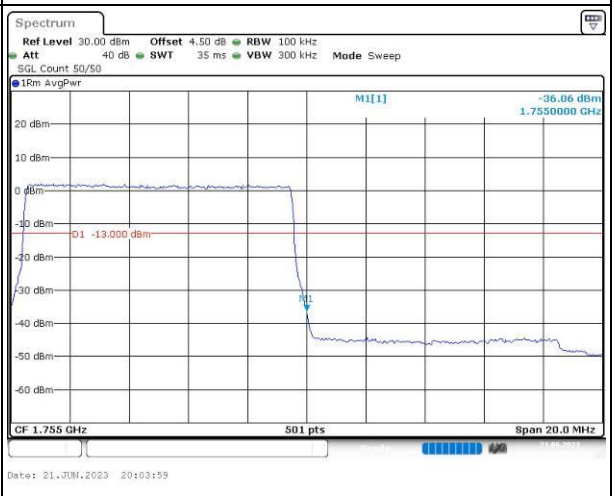
QPSK 15MHz	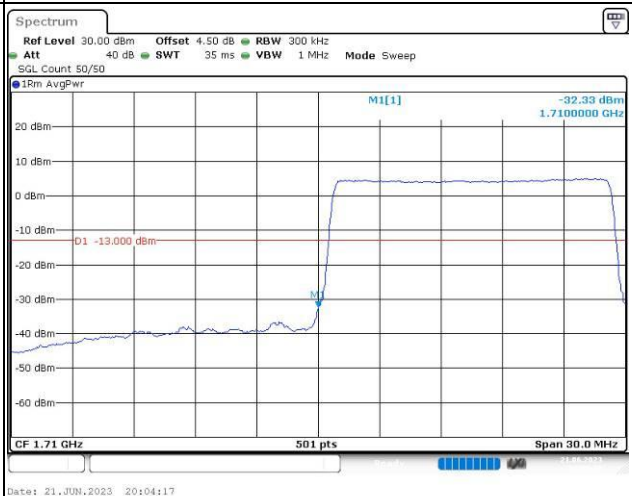	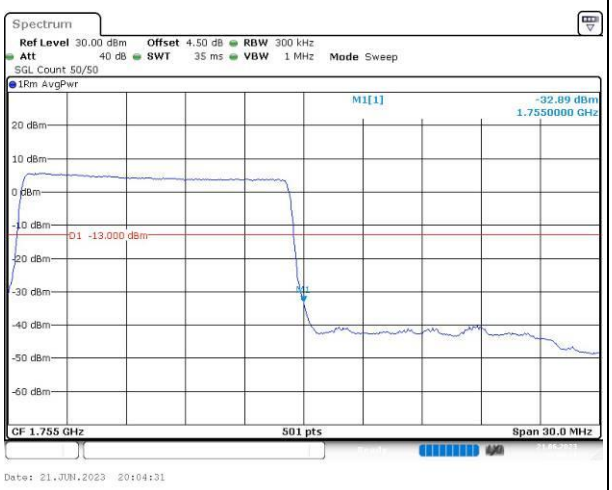
QPSK 20MHz	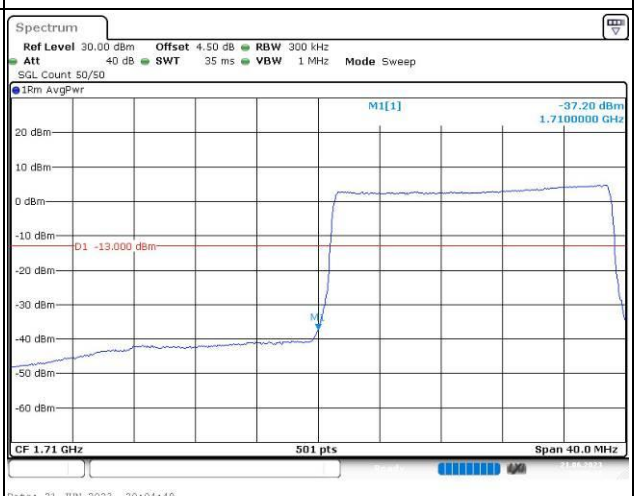	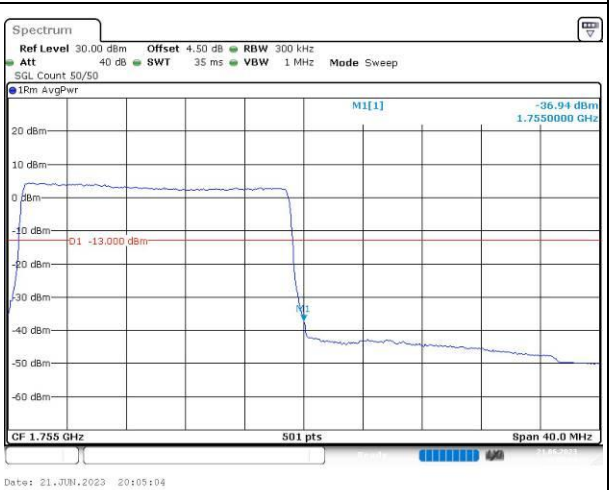

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 1.4MHz	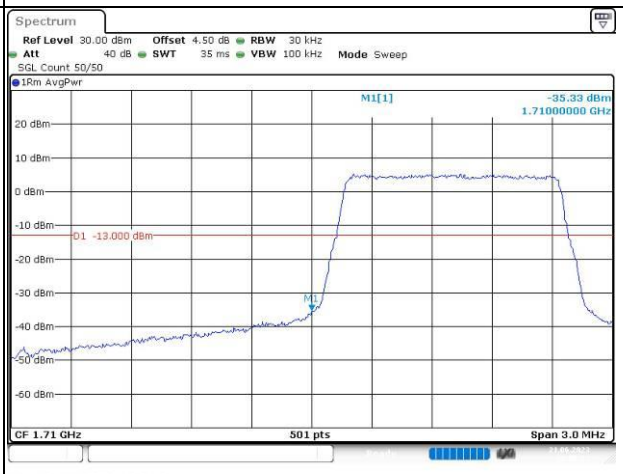	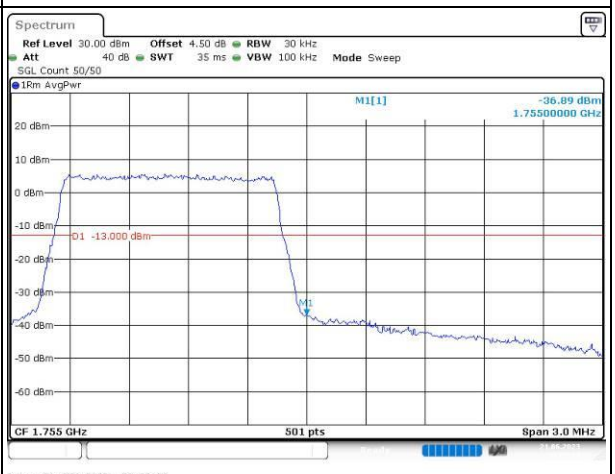
16QAM 3MHz	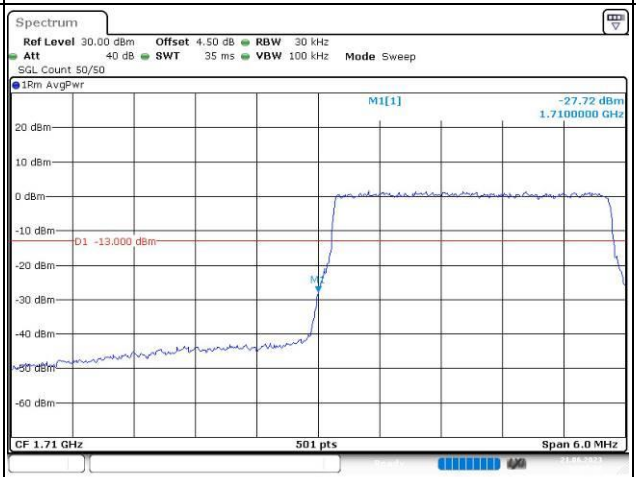	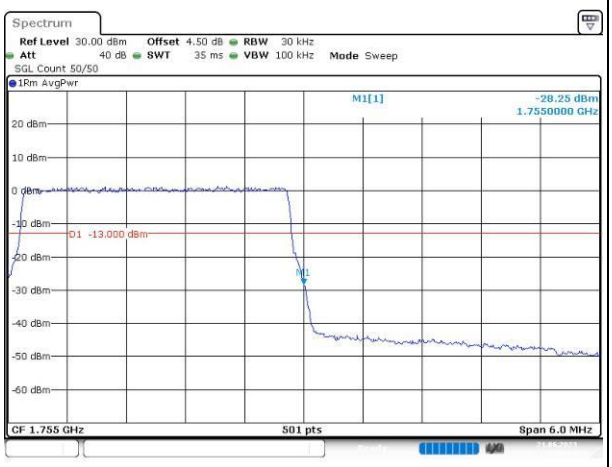
16QAM 5MHz	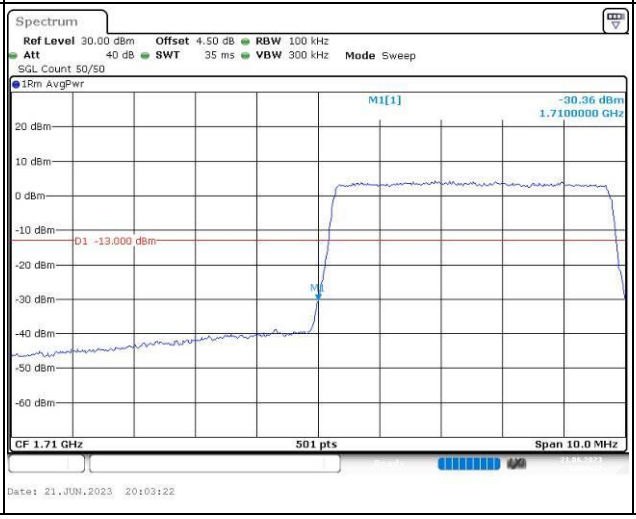	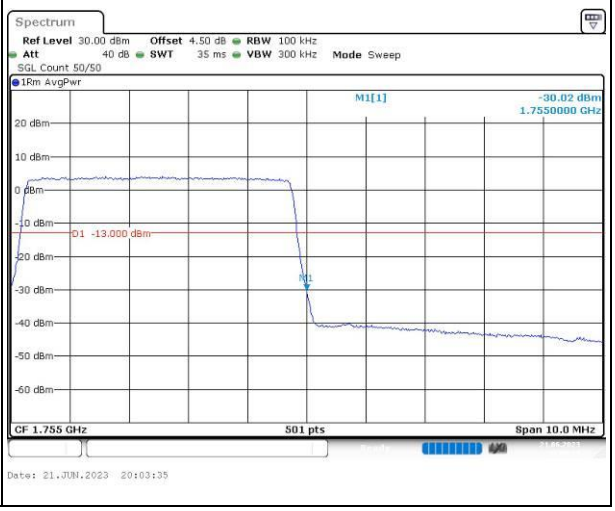

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 10MHz	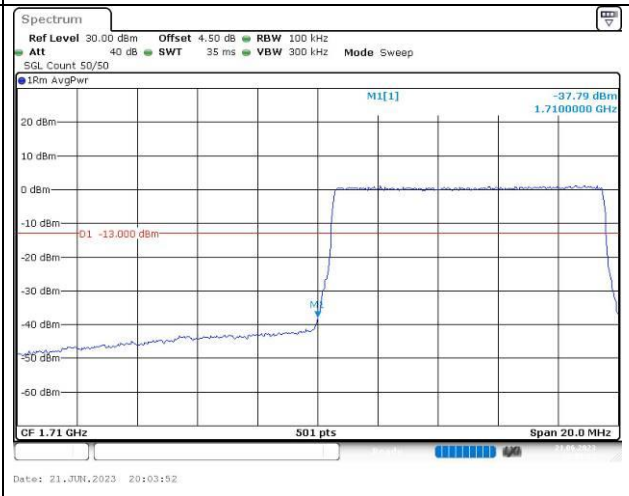	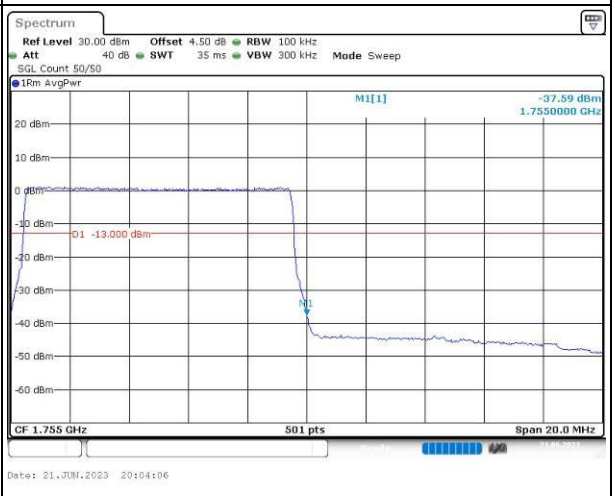
16QAM 15MHz	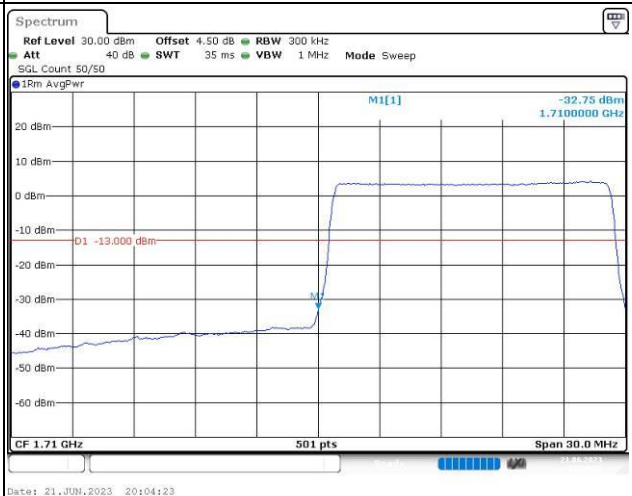	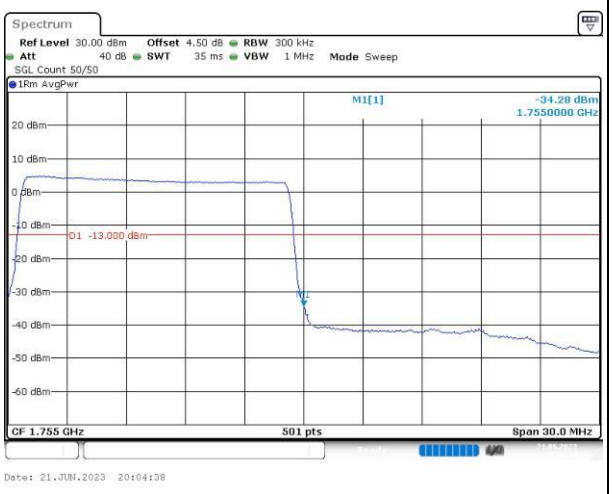
16QAM 20MHz	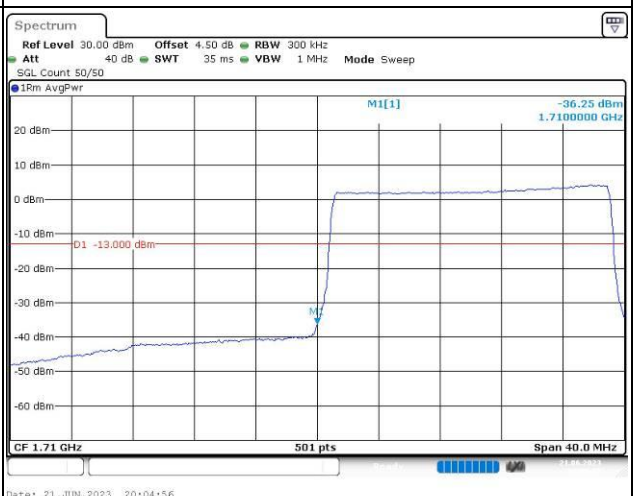	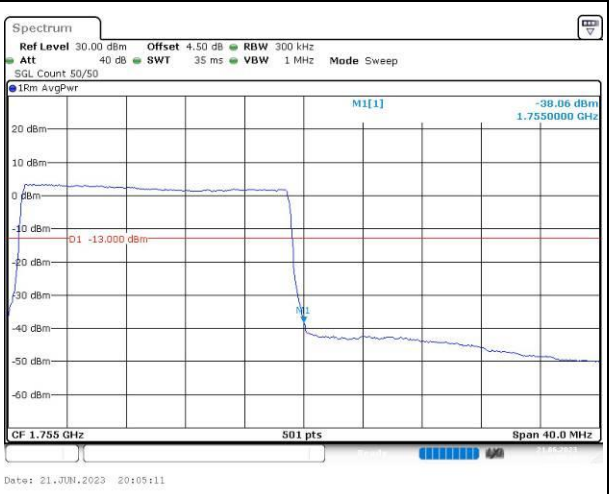

4.7 Antenna Port Test Data and Results for LTE Band 7

Serial Number:	271I-3	Test Date:	2023/06/16~2023/06/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Zero Luo	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	23.7~27.5	Relative Humidity: (%)	38~59	ATM Pressure: (kPa)	99.8~100.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/9/29	2023/9/28
UNI-T	Multimeter	UT39A+	C210582554	N/A	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	2022/7/15	2023/7/14

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2502.5	2535	2567.5
10MHz	2505	2535	2565
15MHz	2507.5	2535	2562.5
20MHz	2510	2535	2560

Test Data:

FCC §2.1046; § 27.50(h)(2)						
RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	20.89	20.82	20.99	20.31	33
	RB1#13	20.93	20.85	20.88		
	RB1#24	20.78	20.78	20.89		
	RB15#0	19.82	19.88	20.02		
	RB15#10	19.76	19.93	20		
	RB25#0	19.9	19.9	19.98		
5MHz 16QAM	RB1#0	19.86	19.45	19.14	19.2	33
	RB1#13	19.85	19.43	19.17		
	RB1#24	19.88	19.45	19.22		
	RB15#0	18.88	19.06	19.09		
	RB15#10	19.4	19.02	19.08		
	RB25#0	19.61	18.93	19.06		
10MHz QPSK	RB1#0	20.85	20.9	20.83	20.27	33
	RB1#25	20.91	20.9	20.85		
	RB1#49	20.95	20.85	20.87		
	RB25#0	19.85	19.92	19.95		
	RB25#25	19.88	19.91	19.9		
	RB50#0	19.81	19.88	19.97		
10MHz 16QAM	RB1#0	19.91	19.38	20.03	19.37	33
	RB1#25	19.91	19.41	20.05		
	RB1#49	19.96	19.47	20.04		
	RB25#0	19.53	19.71	19.01		
	RB25#25	19.12	19.67	19.06		
	RB50#0	19.04	19.08	19.03		
15MHz QPSK	RB1#0	20.82	20.92	20.76	20.27	33
	RB1#38	20.86	20.91	20.88		
	RB1#74	20.95	20.93	20.87		
	RB36#0	19.88	19.96	19.93		
	RB36#39	19.83	19.89	19.97		
	RB75#0	19.86	19.98	19.88		
15MHz 16QAM	RB1#0	19.98	20.31	20.09	19.7	33
	RB1#38	20.08	20.37	20.09		
	RB1#74	20.15	20.38	20.2		
	RB36#0	19.1	19.02	19.17		
	RB36#39	19.57	19.05	19.08		
	RB75#0	19.05	19.08	19.05		
20MHz QPSK	RB1#0	20.92	20.85	20.92	20.37	33
	RB1#50	20.98	20.83	20.95		
	RB1#99	21.05	20.85	20.95		

	RB50#0	19.79	19.99	19.8		
	RB50#50	19.97	19.86	20		
	RB100#0	19.93	19.89	19.92		
20MHz 16QAM	RB1#0	20.08	20.69	19.89	20.13	33
	RB1#50	20.05	20.81	19.87		
	RB1#99	20.13	20.73	19.87		
	RB50#0	19.02	18.98	19.08		
	RB50#50	18.97	19	19.05		
	RB100#0	18.99	19.06	19.05		
Note: EIRP=Conducted Power(dBm) - L_C(dB) + G_T(dBi)						
					Result:	**Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit(dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	5.36	4.78	4.41	13
	RB100#0	4.12	4.2	3.91	13
20MHz 16QAM	RB1#0	6.52	4.96	5.3	13
	RB100#0	5.74	5.83	5.57	13
				Result:	**Pass**

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.511	4.511	4.511	5.02	4.98	4.98
5MHz 16QAM	4.531	4.531	4.511	5	5.02	4.98
10MHz QPSK	8.942	8.982	8.942	9.76	9.84	9.8
10MHz 16QAM	8.982	8.982	8.942	9.8	9.84	9.8
15MHz QPSK	13.473	13.533	13.473	15.06	15.06	15
15MHz 16QAM	13.593	13.533	13.533	15.18	15	15
20MHz QPSK	18.044	18.044	17.964	19.68	19.84	19.52
20MHz 16QAM	18.124	17.964	17.964	19.84	19.68	19.6
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, §27.53:Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

FCC §2.1051, §27.53:Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

FCC §2.1055, §27.54: Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.7	2501.088	2500.00	2569.002	2570
	-20	3.7	2501.064	2500.00	2569.032	2570
	-10	3.7	2501.040	2500.00	2569.054	2570
	0	3.7	2501.088	2500.00	2569.005	2570
	10	3.7	2501.034	2500.00	2569.061	2570
	20	3.7	2501.058	2500.00	2569.022	2570
	30	3.7	2501.091	2500.00	2569.005	2570
	40	3.7	2501.082	2500.00	2569.012	2570
	50	3.7	2501.020	2500.00	2569.075	2570
Frequency Stability vs. Voltage	20	3.3	2501.043	2500.00	2569.049	2570
	20	4.2	2501.092	2500.00	2569.006	2570
					Result:	**Pass**

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.7	2501.010	2500.00	2569.082	2570
	-20	3.7	2501.082	2500.00	2569.011	2570
	-10	3.7	2501.093	2500.00	2569.005	2570
	0	3.7	2501.058	2500.00	2569.040	2570
	10	3.7	2501.056	2500.00	2569.040	2570
	20	3.7	2501.058	2500.00	2569.022	2570
	30	3.7	2501.062	2500.00	2569.033	2570
	40	3.7	2501.059	2500.00	2569.039	2570
	50	3.7	2501.036	2500.00	2569.060	2570
Frequency Stability vs. Voltage	20	3.3	2501.083	2500.00	2569.009	2570
	20	4.2	2501.045	2500.00	2569.051	2570
					Result:	**Pass**

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer)**:**

Occupied Bandwidth		
Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	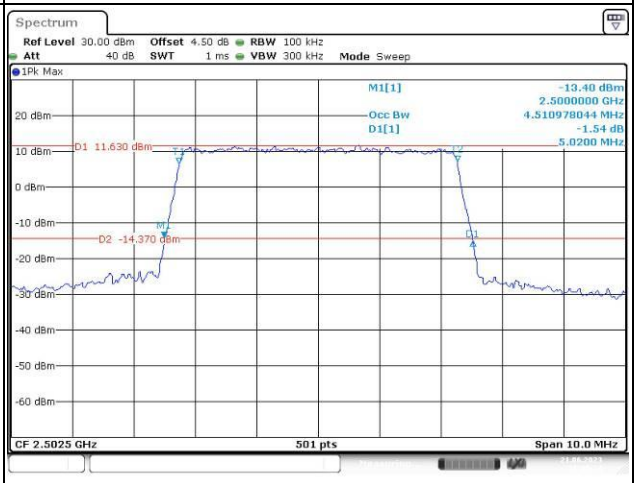	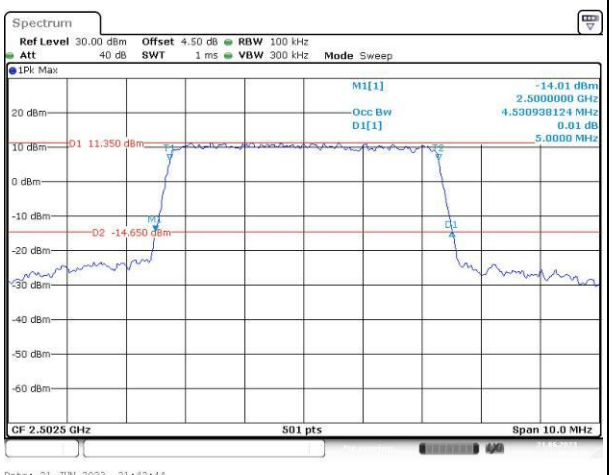
Middle	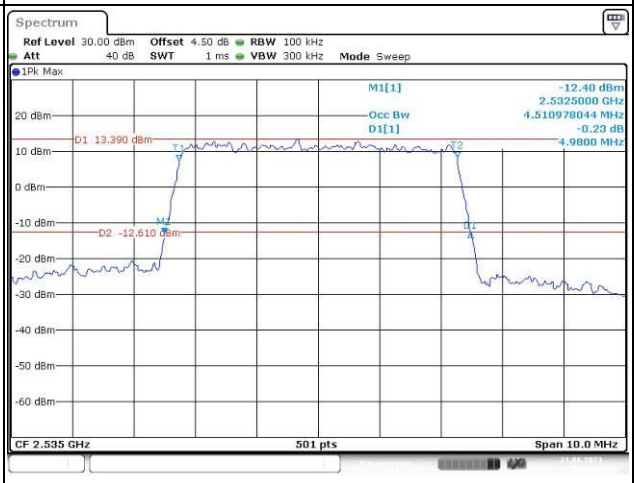	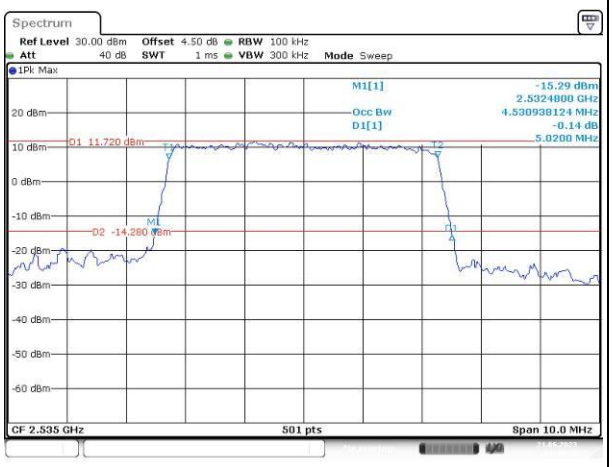
Highest	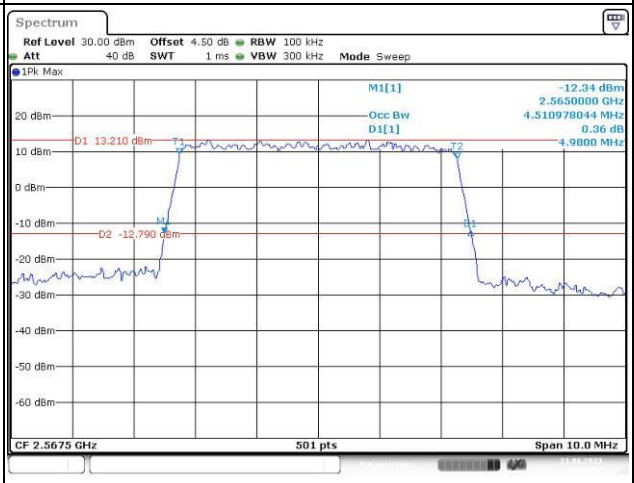	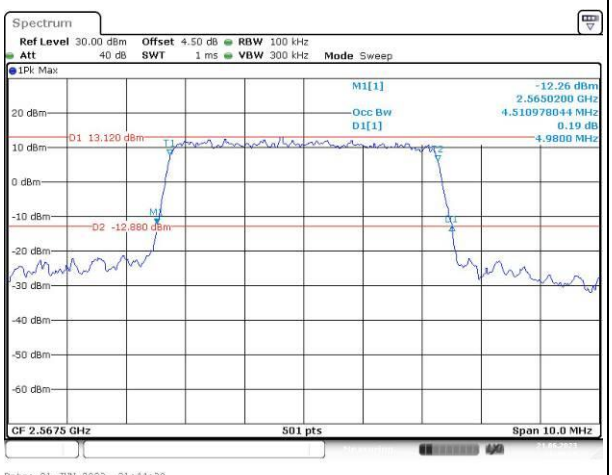

Occupied Bandwidth		
Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	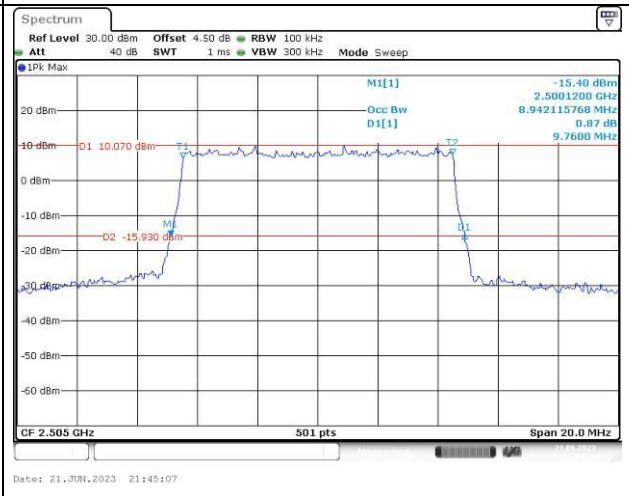	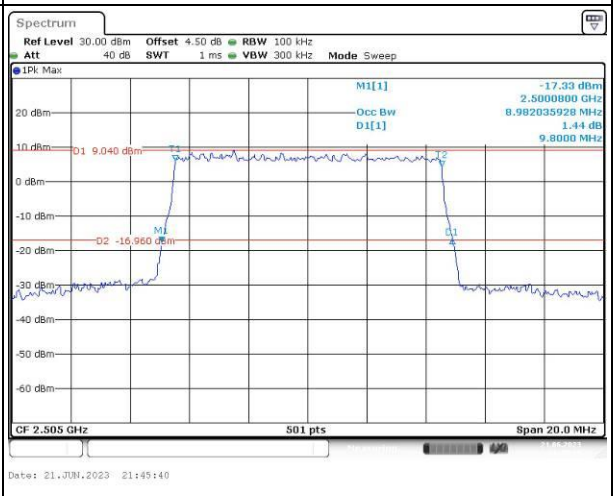
Middle	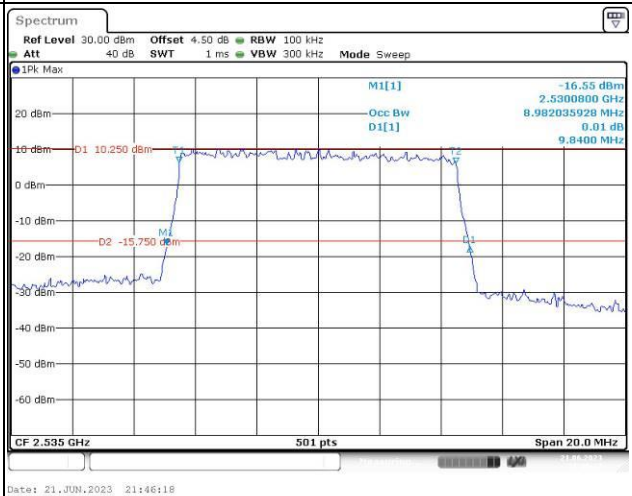	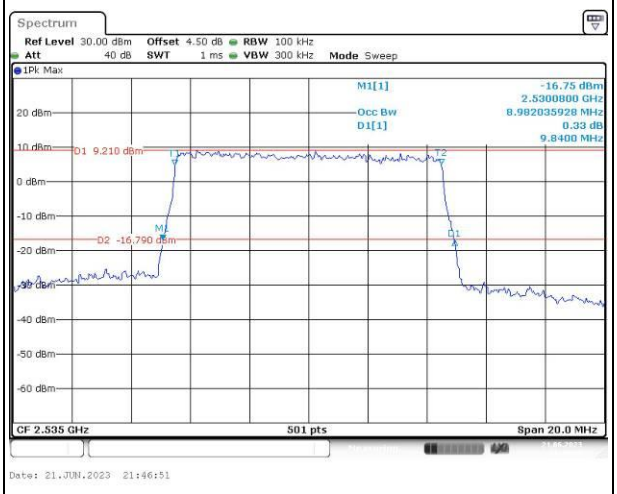
Highest