

Global EMC Inc. Labs EMC & RF Test Report

As per

RSS 210 Issue 7:2007

&


FCC Part 15 Subpart C:2008,

15.209 & 15.231(e)

Unlicensed Intentional Radiators

on the

Combi RFID Master MC30RG

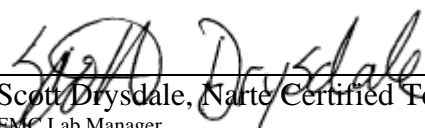
Scott Drysdale, Nette Certified Technician
EMC Lab Manager
Global EMC Inc.
180 Brodie Dr, Unit 2
Richmond Hill, ON L4B 3K8
Canada
Ph: (905) 883-3919

Testing produced for



See Appendix A for full customer & EUT details.





Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Table of Contents

Table of Contents	2
Report Scope	3
Summary	4
Test Results Summary	5
Justifications, Descriptions, or Deviations.....	6
Applicable Standards, Specifications and Methods.....	7
Sample calculation(s).....	8
Document Revision Status.....	8
Definitions and Acronyms	9
Testing Facility	10
Calibrations and Accreditations	10
Testing Environmental Conditions and Dates	11
Detailed Test Results Section	12
Radiated Emissions of Spurious Emissions and Emissions Below 30 MHz	13
Duty Cycle of Periodically Operated Transmitters.....	32
Radiated Emissions of 433.92 MHz Fundamental	36
20 dB Bandwidth of Periodically Operated Transmitters.....	41
Appendix A – EUT/Customer Summary	45
Appendix B – EUT and Test Setup Photographs.....	47

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Report Scope

This report addresses the EMC verification testing and test results of the Combi RFID Master MC30RG, herein referred to as EUT (Equipment Under Test) performed at Global EMC Labs.

The EUT was tested for compliance against the following standards:


RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

The results contained in this report relate only to the item(s) tested.

This report does not imply product endorsement by A2LA or any other accreditation agency, any government, or Global EMC Inc.


Opinions/interpretations expressed in this report, if any, are outside the scope of Global EMC Inc accreditation. Any opinions expressed do not necessarily reflect the opinions of Global EMC Inc, unless otherwise stated.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Summary


The results contained in this report relate only to the item(s) tested.

EUT FCC Certification #, FCC ID:	PQC-MC30RG
EUT Industry Canada Certification #, IC:	4113A-MC30RG
EUT Passed all tests performed.	Yes (see test results summary)
Tests conducted by	Scott Drysdale

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Test Results Summary

Standard/Method	Description	Class/Limit	Result
FCC 15.203	Antenna Requirement	Unique	Pass See Justification
FCC 15.205 RSS 210 (Table 1)	Restricted Bands for intentional operation	Not allowed	Pass
FCC 15.207	Power line conducted emissions	QuasiPeak Average	See Justification
FCC 15.209 RSS-210 (Table 2) FCC 15.231(e) RSS-210 (Table 5)	Intentional / Spurious Radiated emissions	QuasiPeak Average	Pass
FCC 15.231(e) RSS-210 A1.1.1(b)	Automatic transmission Transmission time	< 1 seconds	Pass
FCC 15.231 (e) RSS-210 A1.1.1(c)	Transmission off time	> 30 x TX interval > 10 seconds	Pass
FCC 15.231 (c) RSS-210 A1.1.3	20 dB Bandwidth	< 0.25% of carrier	Pass
Overall Result			PASS

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

All tests were performed by Scott Drysdale.

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '*'.

Justifications, Descriptions, or Deviations


The following justifications for tests not performed or deviations from the above listed specifications apply:

For the Antenna requirement specified in FCC 15.203 (RSS 210 section 5.5), this device is designed with an integral antenna which meets the requirements of FCC 15.203. No external connectors are provided.

For the Restricted Bands of operation as specified in FCC 15.205, the EUT is designed to only operate at 125 kHz and 433.92 MHz, neither is in a restricted band.


For the power line conducted emissions requirements, the EUT is DC powered by 24VDC, and this test does not apply.

The EUT was scanned in both horizontal and vertical polarity for emissions, and the worst case results are presented in this report. Polarity notations represent the polarity of the measuring antenna.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Applicable Standards, Specifications and Methods

ANSI C63.4:2003	- Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CFR 47 FCC 15	- Code of Federal Regulations – Radio Frequency Devices
CISPR 22:1997	- Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement
ICES-003:2004	- Digital Apparatus - Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard
ISO 17025:2005	- General Requirements for the competence of testing and calibration laboratories
RSS 210:2007	- Issue 7: Spectrum Management and Telecommunications Policy. Radio Standards Specification Low Power Licence-Exempt Radiocommunication Devices

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Sample calculation(s)


Margin = limit – (received signal + antenna factor + cable loss – pre-amp gain)

Margin = 50.5dBuV/m – (50dBuV + 10dB + 2.5dB – 20dB)

Margin = 8.5 dB

Document Revision Status

Revision 1 - January 26, 2010

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Definitions and Acronyms

The following definitions and acronyms are applicable in this report.
See also ANSI C63.14.

AE – Auxillary Equipment.

BW – Bandwidth. Unless otherwise stated, this refers to the 6 dB bandwidth.

EMC – Electro-Magnetic Compatibility

EMI – Electro-Magnetic Immunity


EUT – Equipment Under Test

ITE – Information Technology Equipment with a primary function(s) of entry, storage, display, retrieval, transmission, processing, switching, or control, of data.

LISN – Line impedance stabilization network

NCR – No Calibration Required

RF – Radio Frequency


Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Testing Facility

Testing for EMC on the EUT was carried out at Global EMC labs in Toronto, Ontario, Canada. The testing lab consists of a 3m semi-anechoic chamber calibrated to be able to allow measurements on an EUT with a maximum width or length of up to 2m and height up to 3m. The chamber is equipped with a turn table that is capable of testing devices up to 3300lb in weight. This facility is capable of testing products that are rated for 120 Vac and 240Vac single phase, or 208 Vac 3 phase input. DC capability is also available. The chamber is equipped with an antenna mast that controls polarization and height from the control room adjoining the shielded chamber. Radiated emissions measurements are performed using a Bilog, and Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN.

Calibrations and Accreditations


The measurement site used is registered with Federal Communications Commission (FCC) and Industry Canada (IC). This site is calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 “Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”. The semi-anechoic chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. All measuring equipment is calibrated on an annual or bi-annual basis as listed for each respective test.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	


Testing Environmental Conditions and Dates

Following were the environmental conditions in the facility during time of testing –

Date	Test	Init.	Temperature (°C)	Humidity (%)	Pressure (kPa)
Dec 5-30, 2009	All	SD	20-25°C	30-45%	100 -103kPa
Jan 18-26, 2010	Re-test	SD	20-25°C	30-45%	100 -103kPa

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Detailed Test Results Section

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Radiated Emissions of Spurious Emissions and Emissions Below 30 MHz

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

Limit(s) and Method

The method is as defined in ANSI C63.4:2003.

The limits are as defined in FCC Part 15, Section 15.209 and 15.231 (e), whichever limit permits the higher field strength. The below table represents the 15.209 limits, which are presented as worst case.


0.009 MHz to 0.49 MHz, $2400/F^3$ uV/m, at 300 meters
0.49 to 1.7 MHz, $24000/F^3$ uV/m, at 30 meters
1.7 MHz to 30 MHz, 30 uV/m, at 30 meters
30 MHz to 88 MHz, 100 uV/m (40.0 dBuV/m¹) at 3 m
88 MHz to 216 MHz, 150 uV/m (43.5 dBuV/m¹) at 3 m
216 MHz to 960 MHz, 200 uV/m (46.4 dBuV/m¹) at 3 m
Above 960 MHz, 500 uV/m (54.0 dBuV/m¹) at 3 m
Above 1000 MHz², 500 uV/m (54 dBuV/m) at 3m

Note: A peak limit that is 20 dB higher than the limits specified above applies.


¹Limit below 1 GHz is measured with 120 kHz measurement bandwidth and a using a Quasi Peak detector. If the limit is exceeded with the Quasi-Peak detector, it will be re-measured with an Average detector and compared against the limits specified in 15.231(e) if so applicable. The detector (and method) used shall be noted in the final measurement table in this report.

²Limit above 1 GHz is is with 1 MHz measurement bandwidth and using an Average detector, and scanned in accordance with 15.33 to above the 5th harmonic.

³F is frequency in kHz.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Typical Radiated Emissions Setup

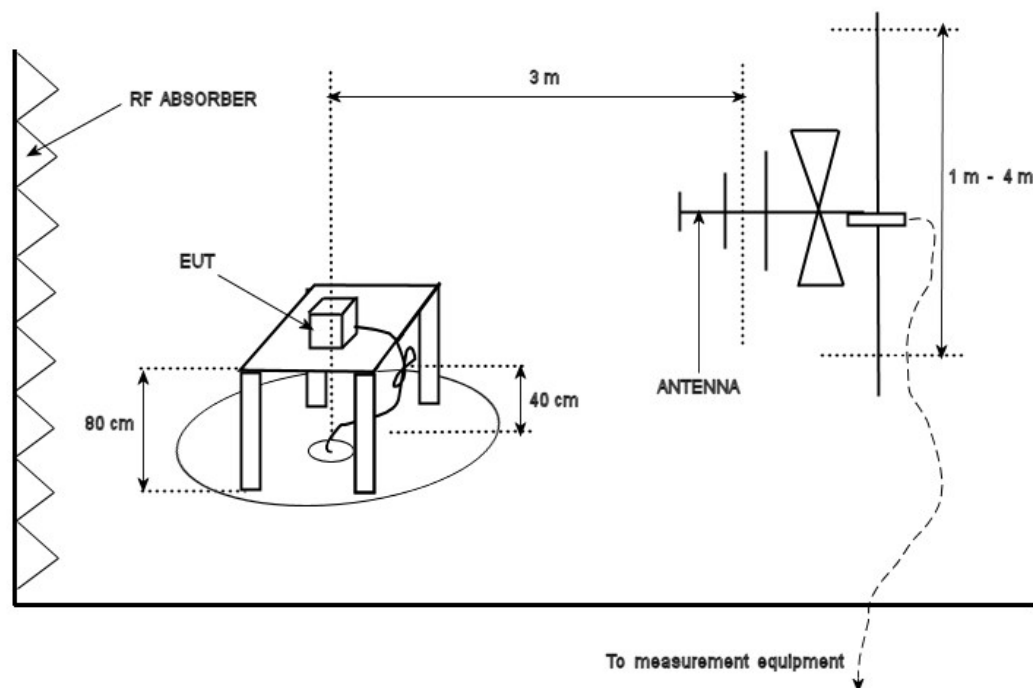


Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is ± 4.4 dB with a 'k=2' coverage factor and a 95% confidence level.

Preliminary Graphs


Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector, or with the appropriate factors taken into account please refer to the final measurement table where applicable. The graph shown below is a maximized peak measurement graph, measured with a resolution bandwidth greater than the final required detector and over a full 0-360 rotation of the EUT. This peaking process is done as a worst case measurement. This process enables the detection of frequencies of concern for final measurement, and provides considerable time savings.


In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to a minimum of a 5 GHz.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Measurement of 125 kHz at 100 m (raw)


17:49:06 DEC 02, 2009

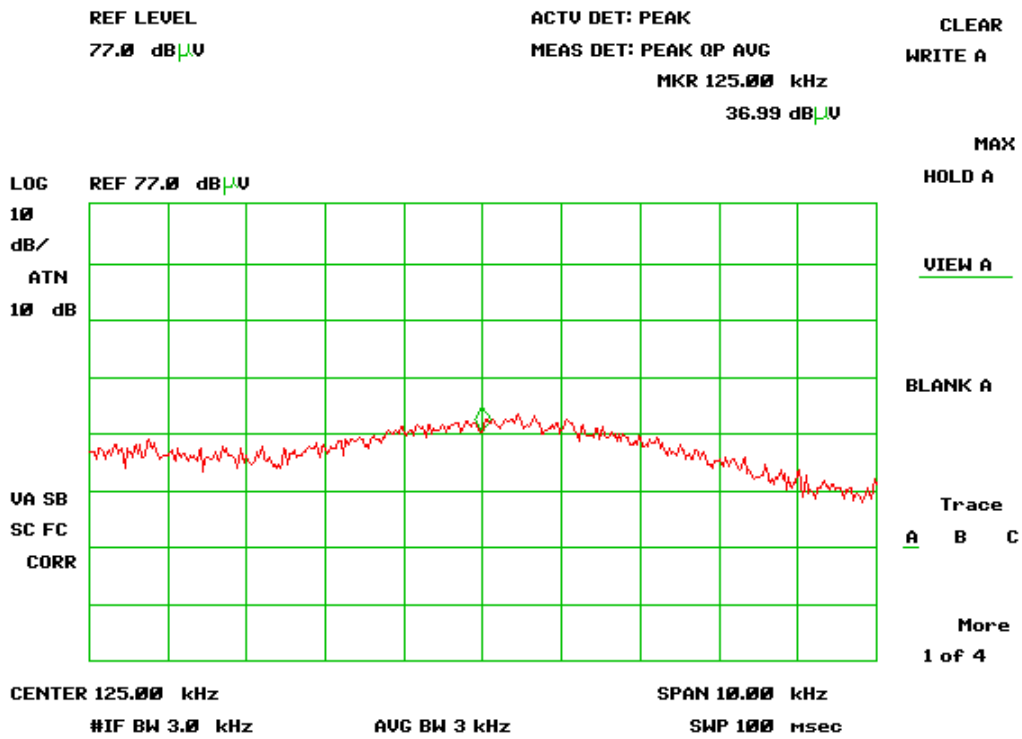


Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Measurement of 125 kHz at 30 meter (raw)


17:42:50 DEC 02, 2009

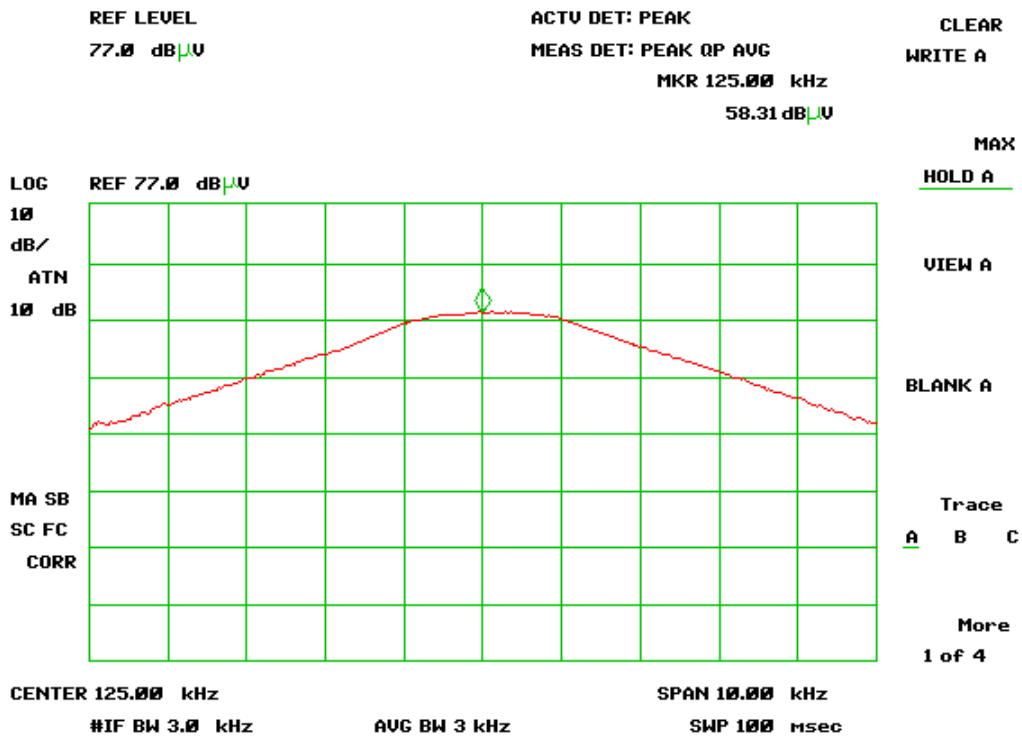


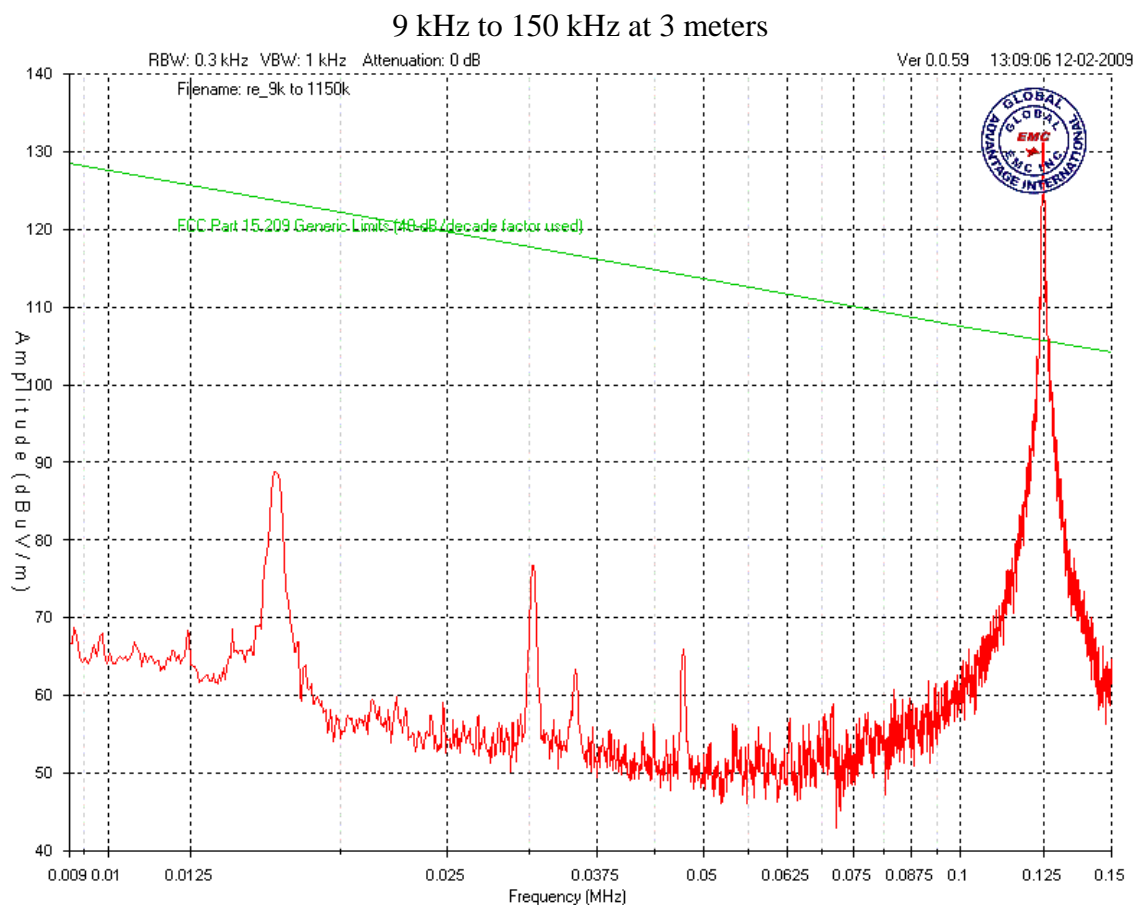
Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Measurement of 125 kHz at 10 meter (raw)

17:39:02 DEC 02, 2009

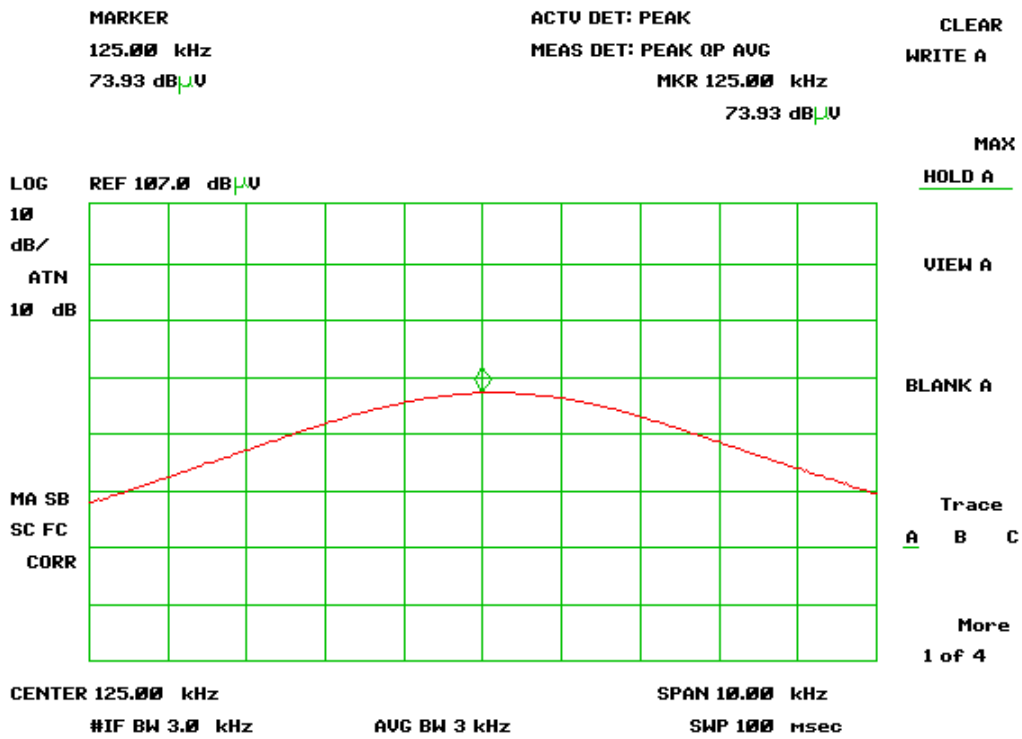


Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	





Note: The peak shown at 125 kHz was found to meet the requirements when the measured extrapolation factor was used instead of 40 dB/decade. Refer to tables.

The device was additionally scanned 0.15 MHz to 30 MHz and no emissions were found to exceed the limit.


Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	


Vertical – Peak Emissions Graph (125 kHz on)

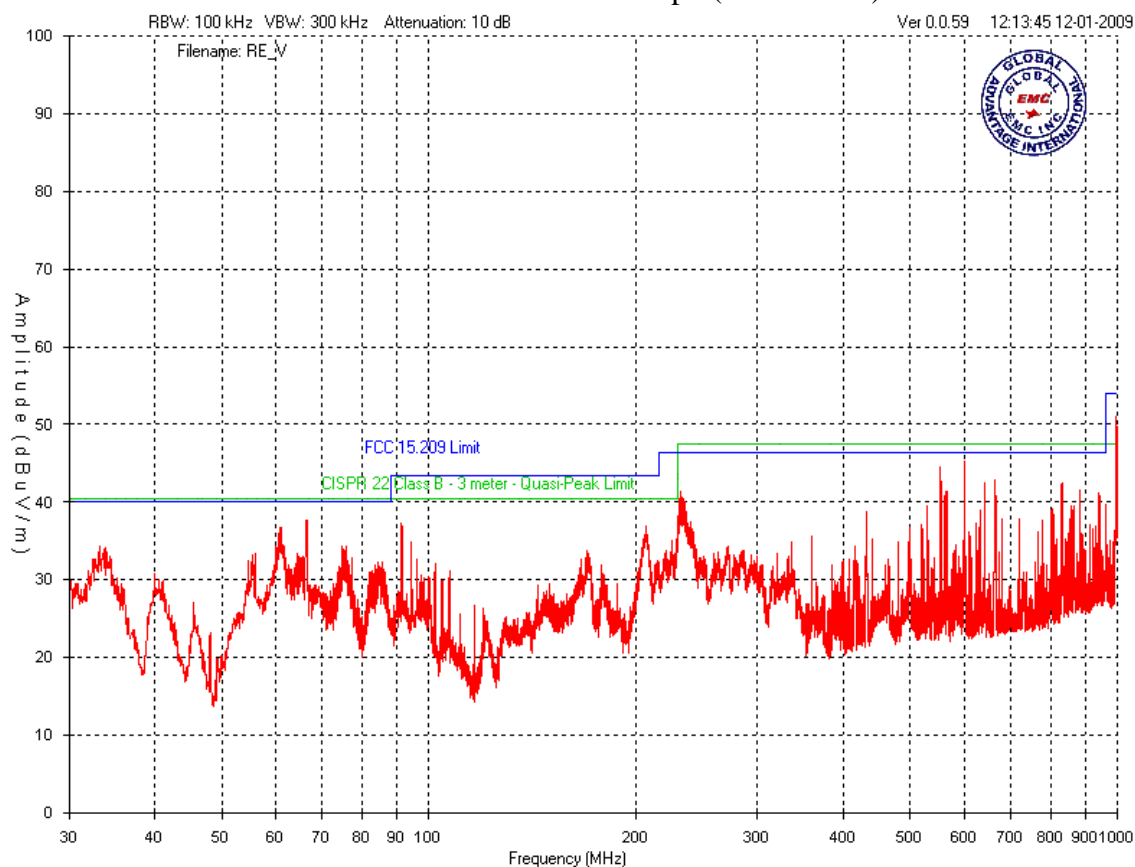



Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	


Vertical – Peak emissions graph (433.92 MHz on)

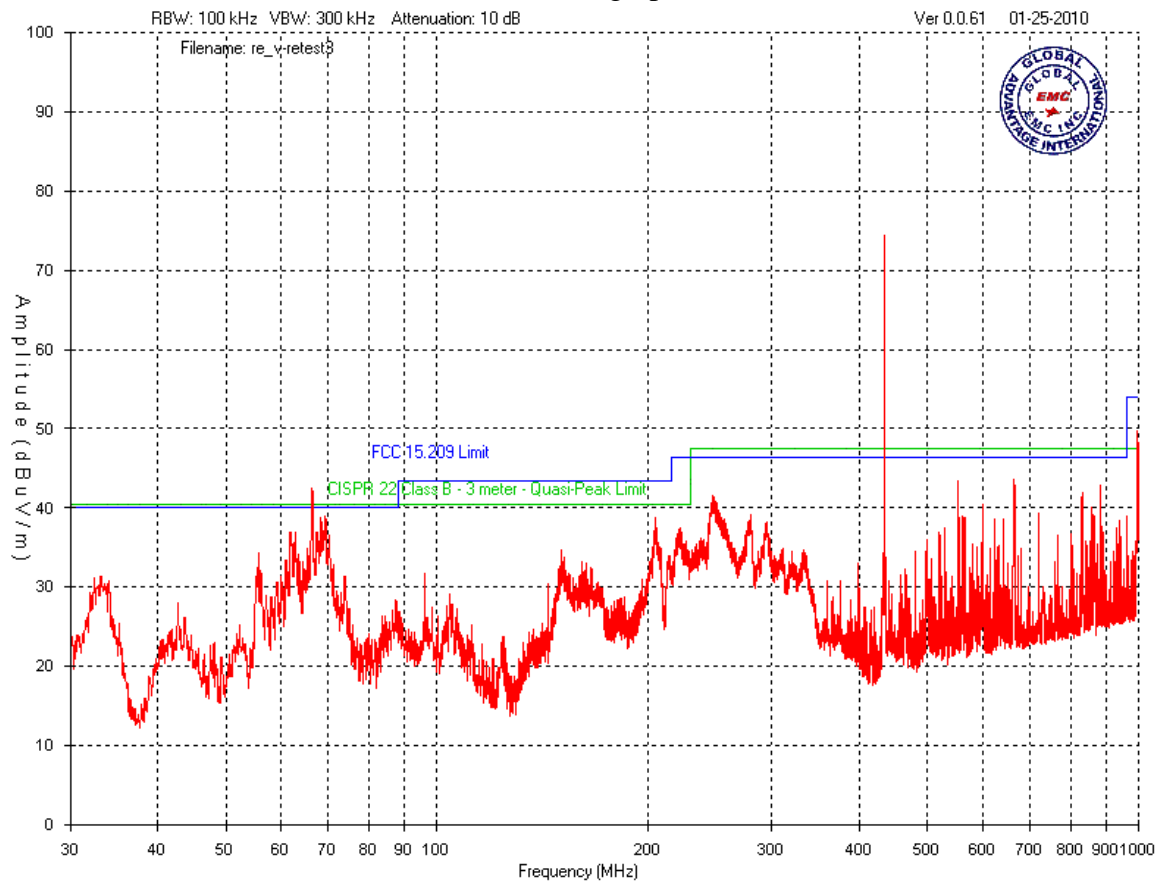


Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

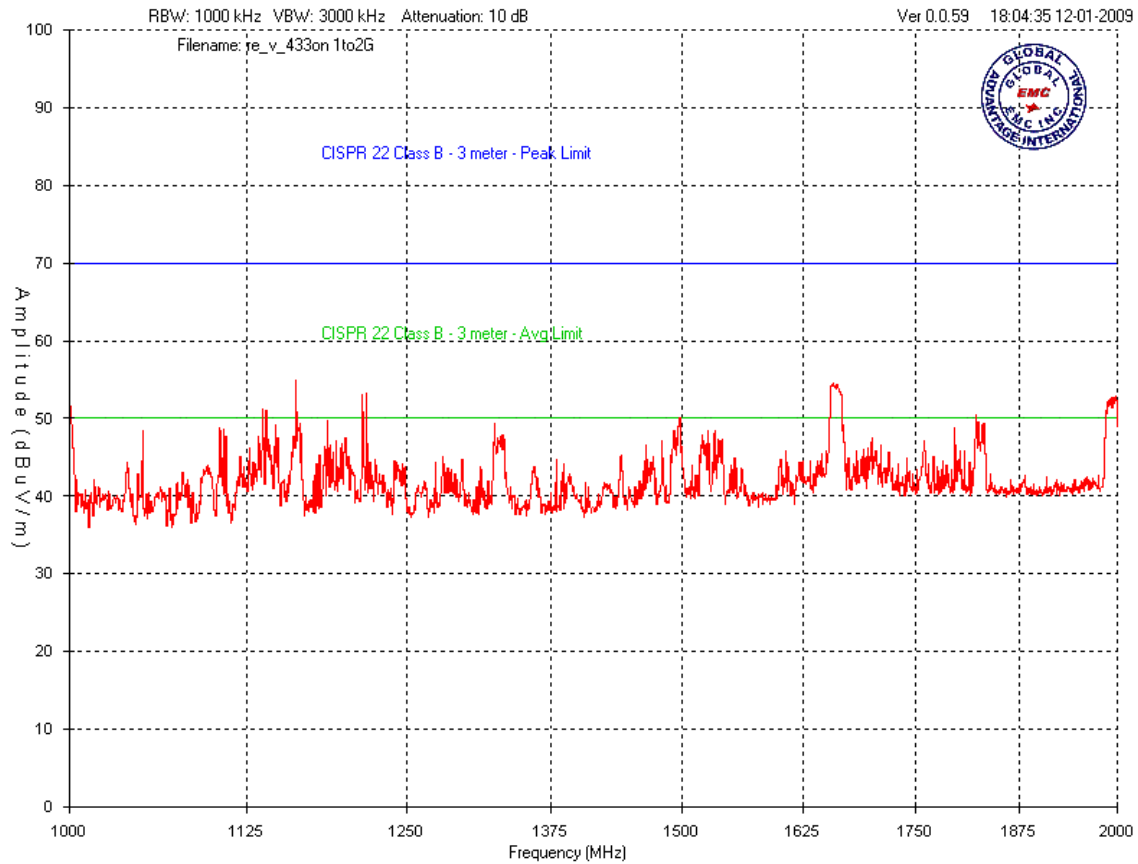



Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

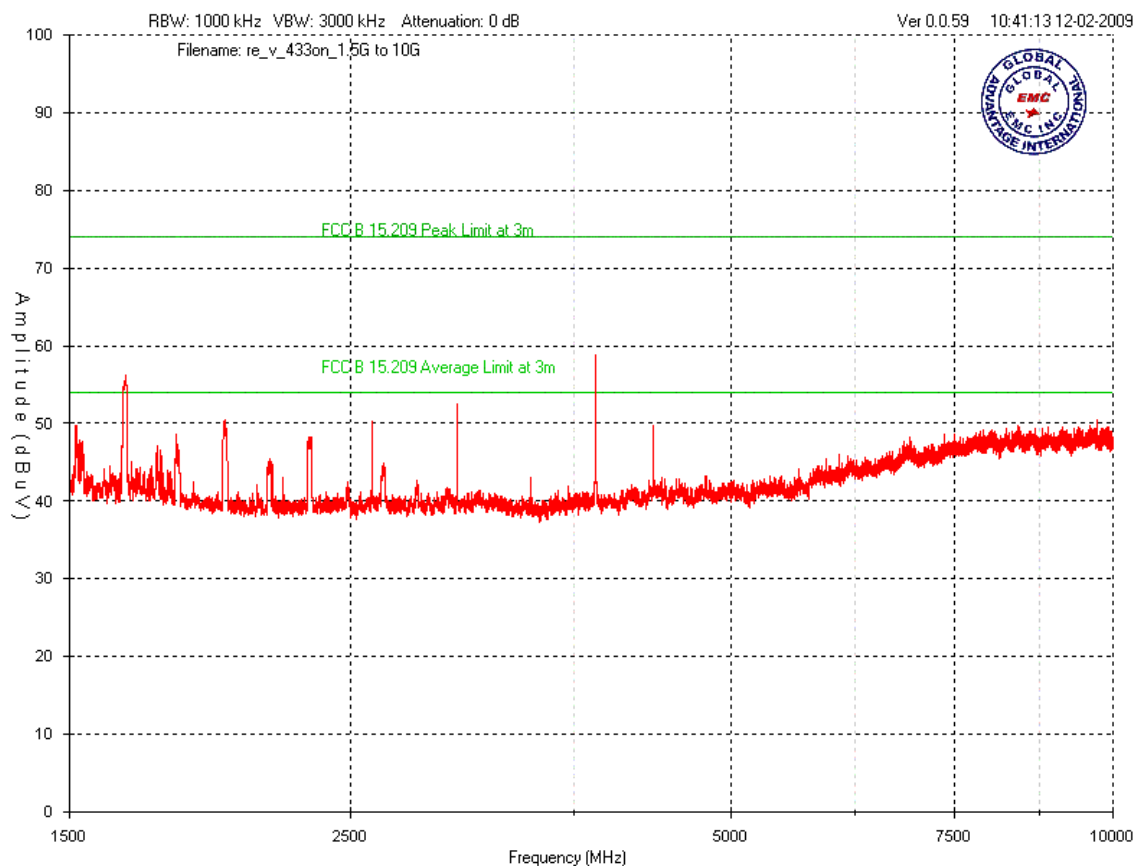


Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	


Horizontal – Peak Emissions Graph (125 kHz ON)

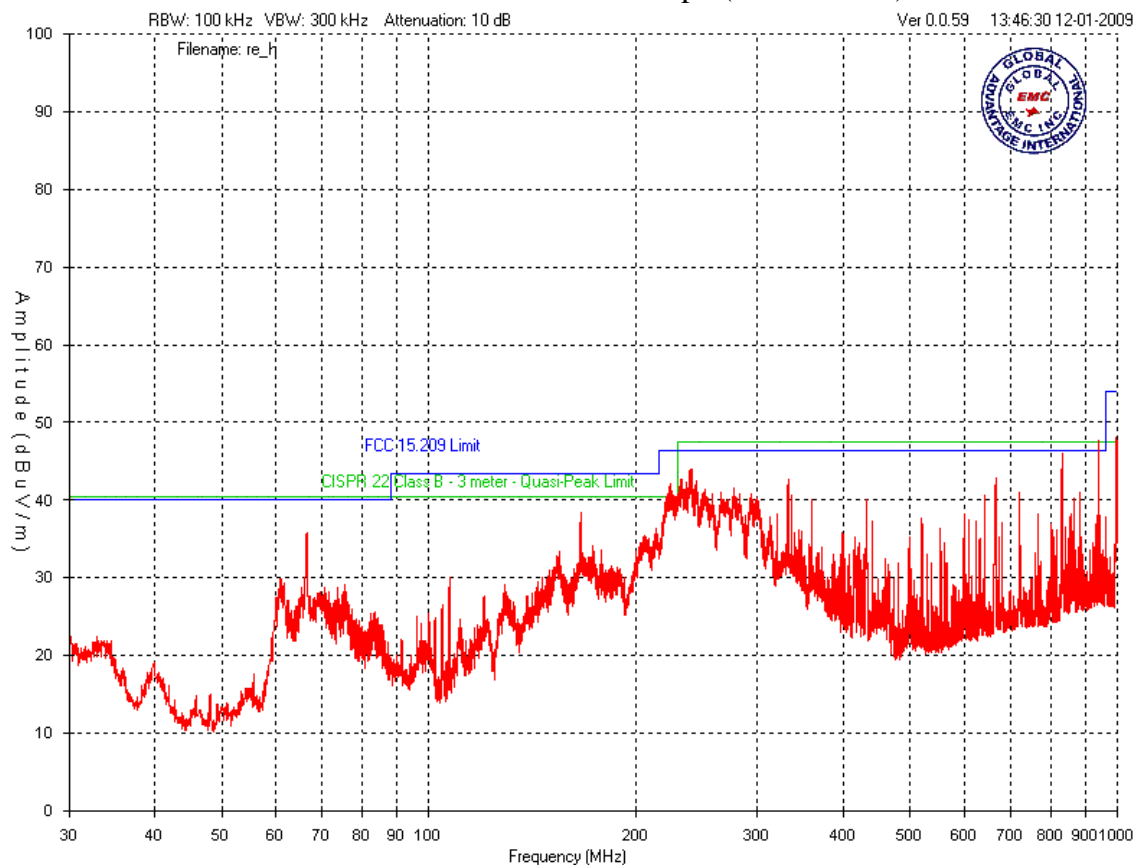


Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	


Horizontal – Peak Emissions Graph (433.92 MHz on)

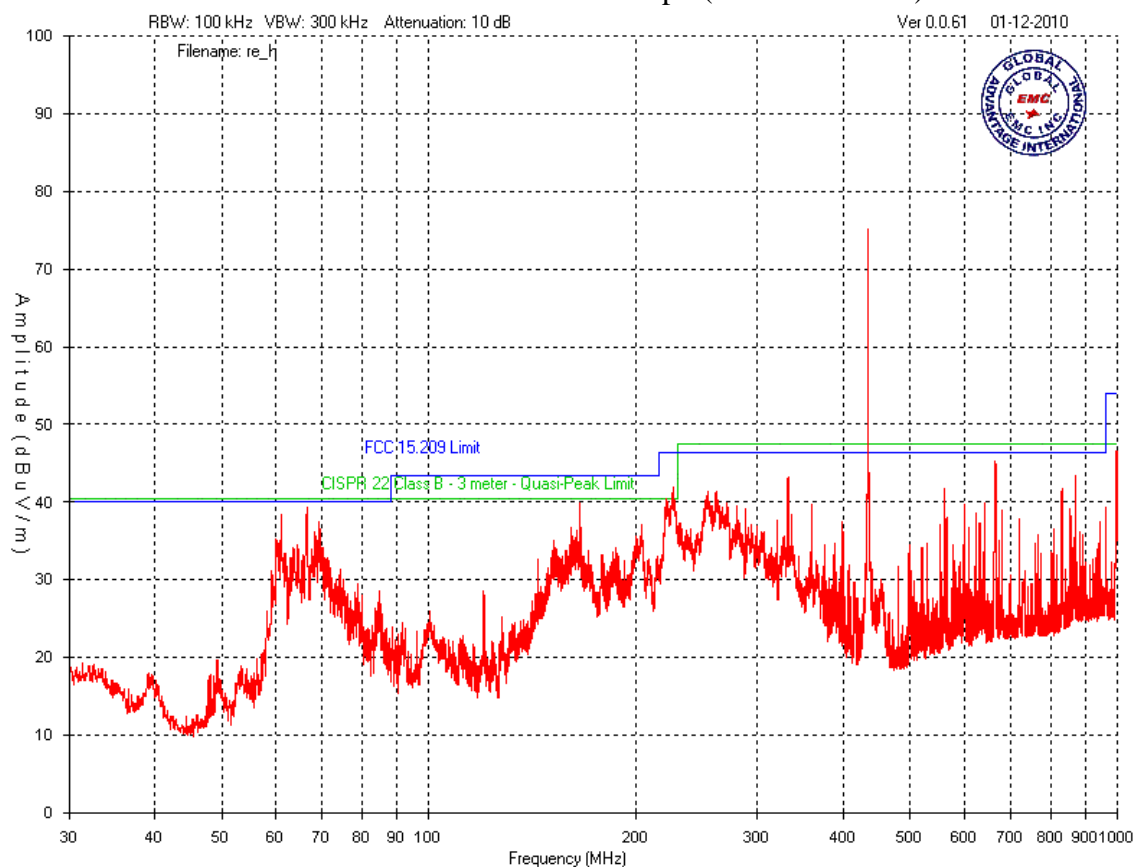



Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

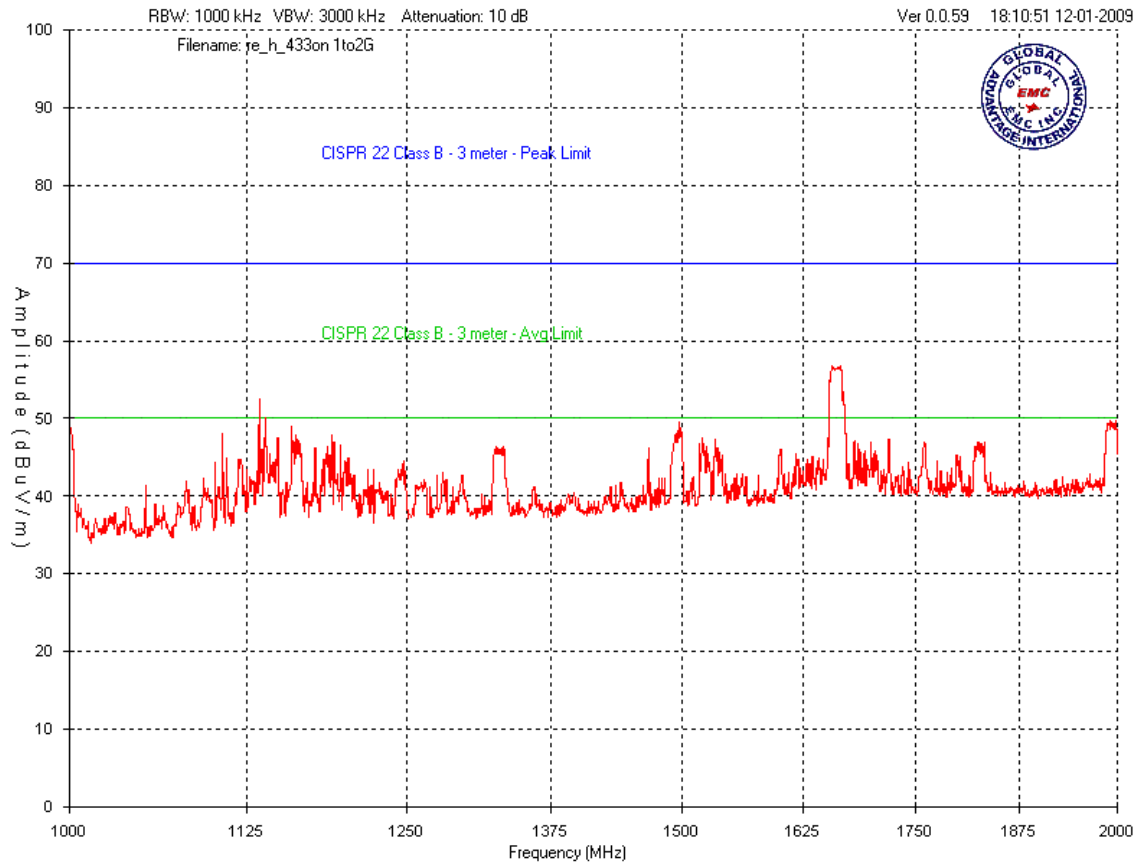

Note: In the above graph, the FCC limit is 54 dBuV/m.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

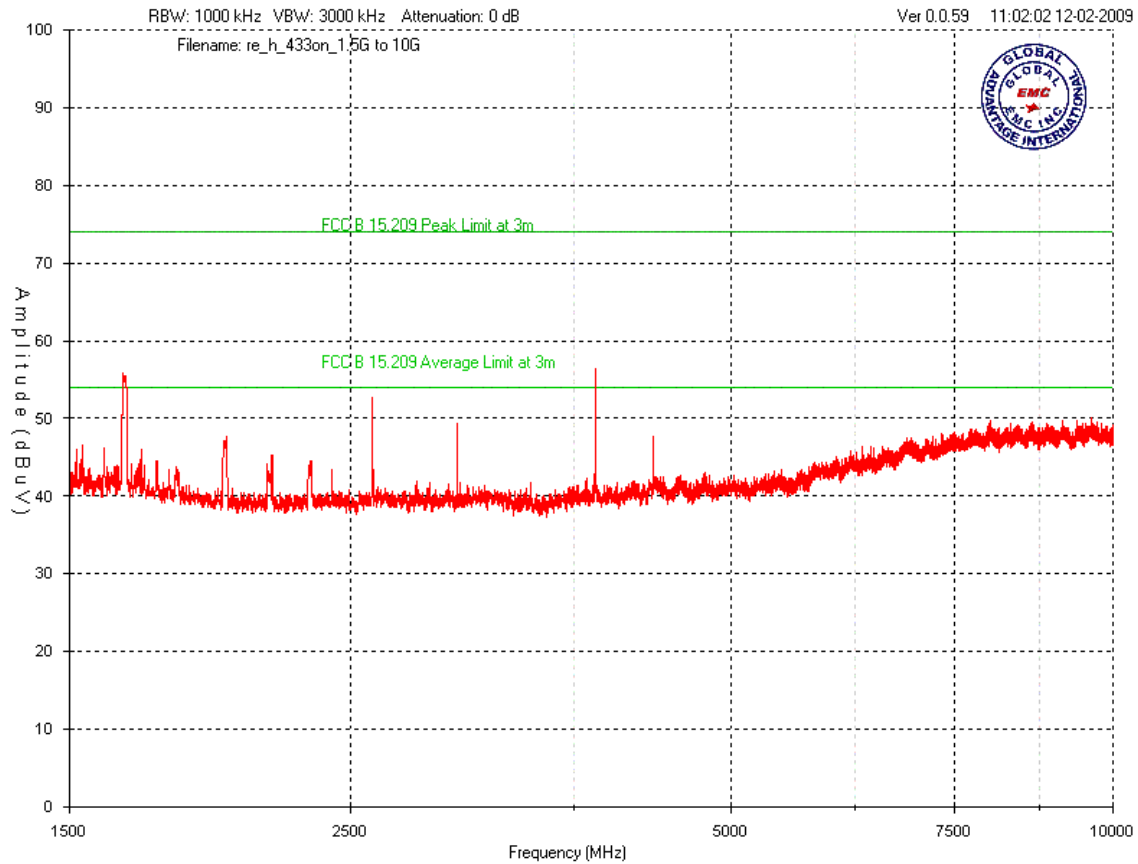

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Final Measurements


9 kHz to 30 MHz

125 kHz

Dist	Raw dBuV	Ant 30 Hz - 1MHz Loop CURRENT Factor	Ext. Atten	Current to Voltage Factor	Preamp - Schaffner Factor	Level
3	98.8	3.9	10	51.5	-32	132.2
10	73.9	3.9	10	51.5	-32	107.3
30	58.3	3.9	10	51.5	-32	91.7
100	36.99	3.9	0	51.5	-32	60.39

Max @ 100 m	60.39
Max @ 30 m	91.7
Factor 100m to 30m	31.31
100/30	3.333333
Log(3.3333)	0.522879
Delta / Log(100/30)	59.86616
31.31 / 0.5229	dB/dec

At 300 meters, the limit is 25.66 dBuV/m. The extrapolation factor shown above for 10 meter measurements is $59.9 \log(300\text{m}/10\text{m})$ or 88.4 dB. The 10 meter limit is therefore 114.1 dBuV/m. The device complies at 125 kHz.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	


Vertical – 30 MHz to 1 GHz

Frequency (MHz)	Reading (dBuV)	Ant – Factor (dB/m)	Cable (dB)	Preamp – Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass / Fail
433.92	88.2	17.3	0.7	-31.2	75			
66.537	60.4	6.3	0.4	-32	35.1	40	4.9	Pass
69.123	60.6	6	0.4	-32	35	40	5	Pass
662.73	51.8	20.5	1	-30.7	42.6	46.4	3.8	Pass
62.721	57.7	6.9	0.4	-32	33	40	7	Pass
552.28	54	18.5	0.8	-30.9	42.4	46.4	4	Pass
882.92	48.4	22.3	1.3	-30.2	41.8	46.4	4.6	Pass
66.537	60.4	6.3	0.4	-32	35.1	40	4.9	Pass

Horizontal – 30 MHz to 1 GHz

Frequency (MHz)	Reading (dBuV)	Ant – Factor (dB/m)	Cable (dB)	Preamp – Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass / Fail
433.92	86.3	17.3	0.7	-31.2	73.1			
280.745	60.4	13.2	0.6	-31.5	42.7	46.4	3.7	Pass
332.995	58.3	14.8	0.6	-31.4	42.3	46.4	4.1	Pass
320.321	58.3	14.3	0.6	-31.4	41.8	46.4	4.6	Pass
830.993	48.7	21.8	1.2	-30.3	41.4	46.4	5	Pass
251.515	58.6	12.6	0.6	-31.6	40.2	46.4	6.2	Pass
205.602	56.9	10.6	0.6	-31.7	36.4	43.5	7.1	Pass
166.77	59	9.6	0.5	-31.8	37.3	43.5	6.2	Pass


Note: Quasi-peak measurements applied above were made with a quasi-peak or peak detector with the device continuously transmitting data. These measurements do not apply a duty cycle correction factor to the peak data to correct for the average measurement.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Vertical – 1 GHz to 10 GHz

Frequency (MHz)	Raw (dBuV)	Ant. (dB/m)	Cable (dB)	Amp (dB)	Level (dBuV/m)	Limit (dB)	Margin (dB)	Pass/Fail
1162.33	49.5	26.2	1.6	-37.1	40.2	54	13.8	Pass
1657.67	45.1	29.2	1.8	-36.6	39.5	54	14.5	Pass
1217.67	46.9	26.8	1.6	-37.1	38.2	54	15.8	Pass
1200	53.2	26.8	1.6	-37.1	44.5	54	9.5	Pass
2000	46.7	30.6	2	-36.2	43.1	54	10.9	Pass
1001	52.3	23.9	1.5	-37.3	40.4	54	13.6	Pass
1137	50.9	25.8	1.6	-37.1	41.2	54	12.8	Pass
1139.67	50.7	25.9	1.6	-37.1	41.1	54	12.9	Pass
1821.33	45.4	29.6	1.9	-36.4	40.5	54	13.5	Pass
1301	52.5	27.4	1.7	-36.9	44.7	54	9.3	Pass
3905.17	53.3	32.3	1.7	-35.8	51.5	54	2.5	Pass
3038.17	52.4	31.3	1.4	-36.3	48.8	54	5.2	Pass
2603.04	51.8	30.9	1.3	-36.3	47.7	54	6.3	Pass


Note: Average measurements applied above were made with an average or peak detector with the device continuously transmitting data. These measurements do not apply a duty cycle correction factor to the peak data to correct for the average measurement.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Horizontal – 1 GHz to 10 GHz

Frequency (MHz)	Raw (dBuV)	Ant. (dB/m)	Cable (dB)	Amp (dB)	Level (dBuV/m)	Limit (dB)	Margin (dB)	Pass/Fail
1656.33	52.4	29.2	1.8	-36.6	46.8	54	7.2	Pass
1134.33	52.3	25.8	1.6	-37.2	42.5	54	11.5	Pass
1139	49.9	25.8	1.6	-37.1	40.2	54	13.8	Pass
2000	43.5	30.5	2	-36.2	39.8	54	14.2	Pass
1497	46.4	28.2	1.7	-36.8	39.5	54	14.5	Pass
3905.17	51.2	32.3	1.7	-35.8	49.4	54	4.6	Pass
2603.37	53.2	30.9	1.3	-36.3	49.1	54	4.9	Pass
3038.17	48.9	31.3	1.4	-36.3	45.3	54	8.7	Pass


Note: Average measurements applied above were made with an average or peak detector with the device continuously transmitting data. These measurements do not apply a duty cycle correction factor to the peak data to correct for the average measurement.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	8566B	HP	2008-02-28	2010-02-28	GEMC 6
Quasi Peak Adapter	85650A	HP	2008-02-28	2010-02-28	GEMC 7
BiLog Antenna	3142-C	ETS	2009-02-12	2011-02-12	GEMC 8
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Schaffner Preamp 9kHz - 2 GHz	CPA9231A	Schaffner	8/26/2008	8/26/2010	GEMC 116
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31
Q-Par 1.5-18 GHz Horn	6878/24	Q-par	8/25/2008	8/25/2010	GEMC 6365
Loop Antenna	EM 6871	Electro-Metrics	On file	2010-08-16	GEMC 70
Loop Antenna	EM 6872	Electro-Metrics	On file	2010-08-16	GEMC 71
HP Preamp	HP-8449B	HP	8/25/2008	8/25/2010	GEMC 6351

This report module is based on GEMC template "FCC - 15.209 - Radiated Emissions_Rev1.doc"

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Duty Cycle of Periodically Operated Transmitters


Purpose

The purpose of this test is to measure the duty cycle of the transmitter. This calculation allows a true peak to average correction factor to be obtained. An average measurement may not be possible, as the device may be set to continually transmitting. Also, an average measurement may not be correct if the device transmits more frequently or less frequently than every 100 mS.


This calculation of duty cycle correction is then applied to the radiated emissions peak reading to obtain the calculated average


Limits


No limit applies, however this calculation is applied to the peak reading to obtain the average reading which must be under the average limit.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	


Results

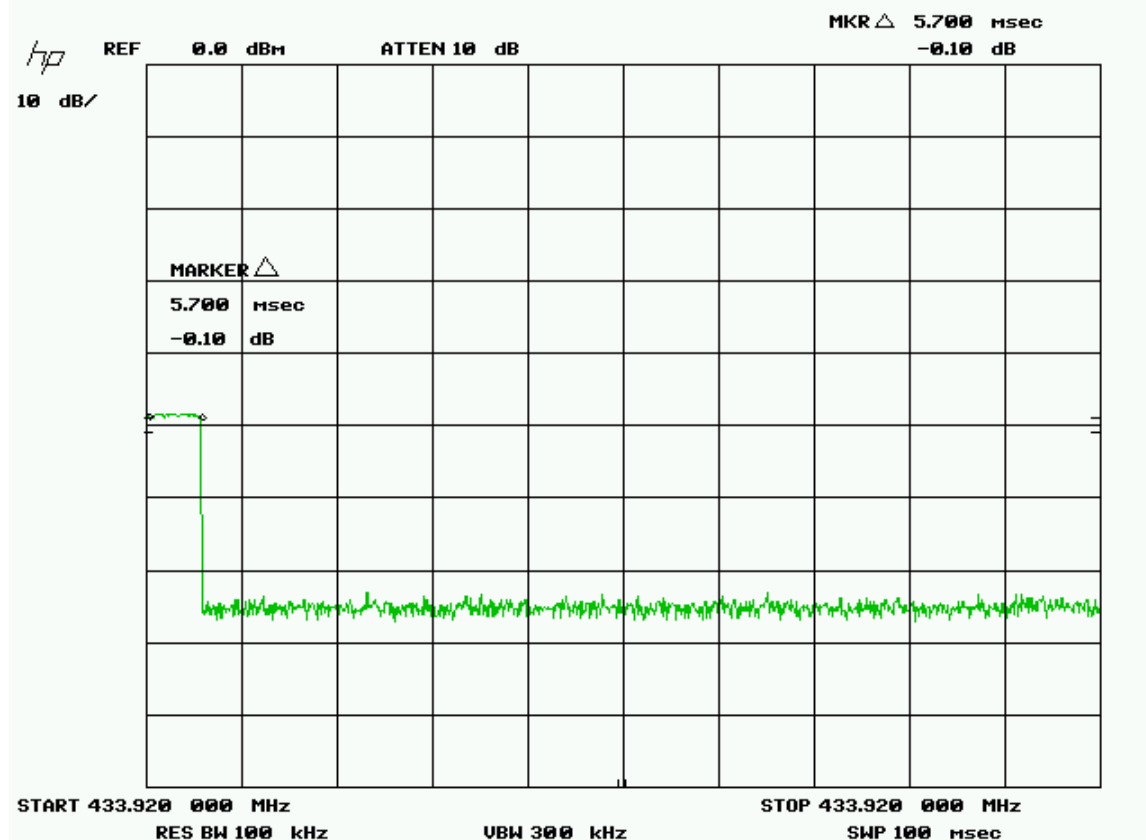

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

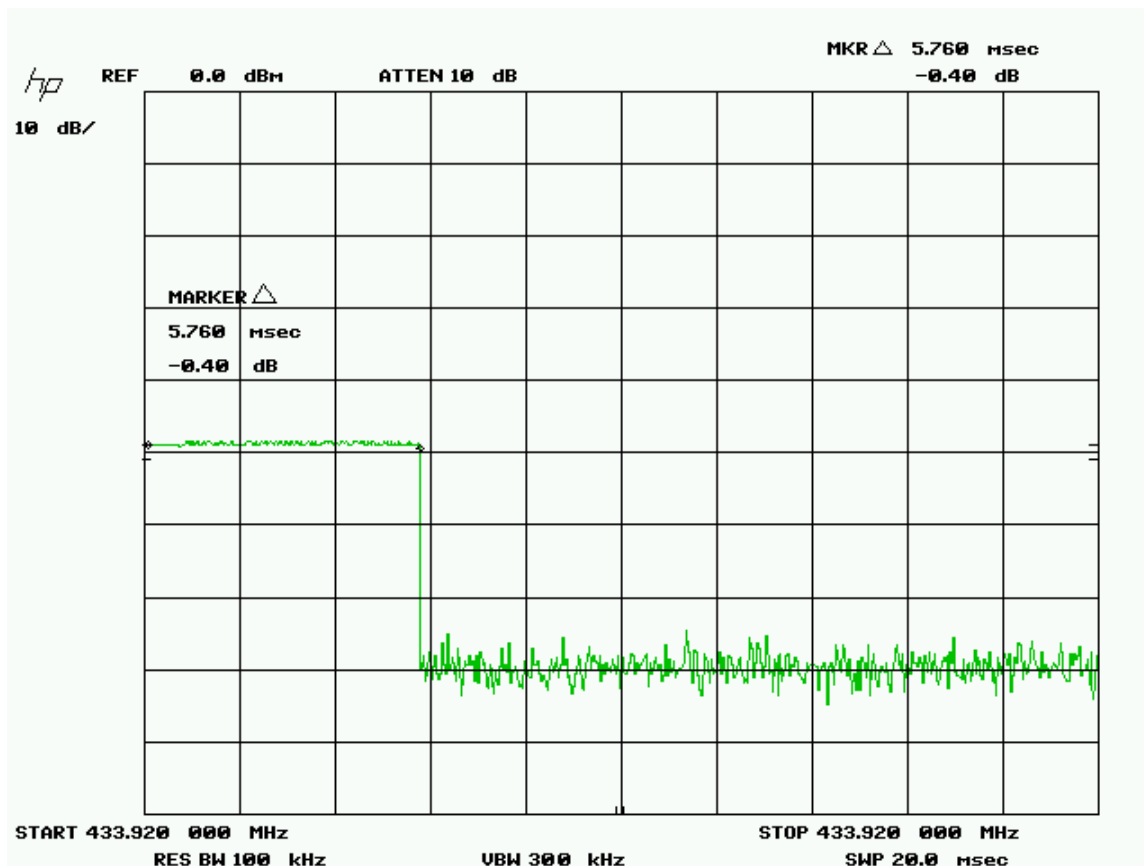


Time on = 5.76 mSec
Duty cycle = $20 \log(5.76 / 100)$
Duty cycle = -24.79 dB

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Attenuator 20 dB	FP-50-20	Trilithic	NCR	NCR	GEMC 43
Spectrum Analyzer	8566B	HP	2008-02-28	2010-02-28	GEMC 6
Quasi Peak Adapter	85650A	HP	2008-02-28	2010-02-28	GEMC 7
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
Power Attenuator 20 dB	25-A-FFN-20	Bird / Hutton	NCR	NCR	GEMC 49

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B_Rev1"

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Radiated Emissions of 433.92 MHz Fundamental

Purpose

The purpose of this test is to ensure that the RF energy intentionally emitted from the EUT does not exceed the limit listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect other periodic operating devices, and licensed broadcasting devices, and so on, from unwanted interference.

Limit(s) and Method


The method is as defined in ANSI C63.4:2003.

The limits are as defined in FCC Part 15, Section 15.231 (e), and is specific for the one frequency for the fundamental transmit frequency.


433.92 MHz – 72.8 dBuV/m¹ and 92.8 dBuV/m²

¹Based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector.

²Based on the peak value of the measured emissions


Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Typical Radiated Emissions Setup

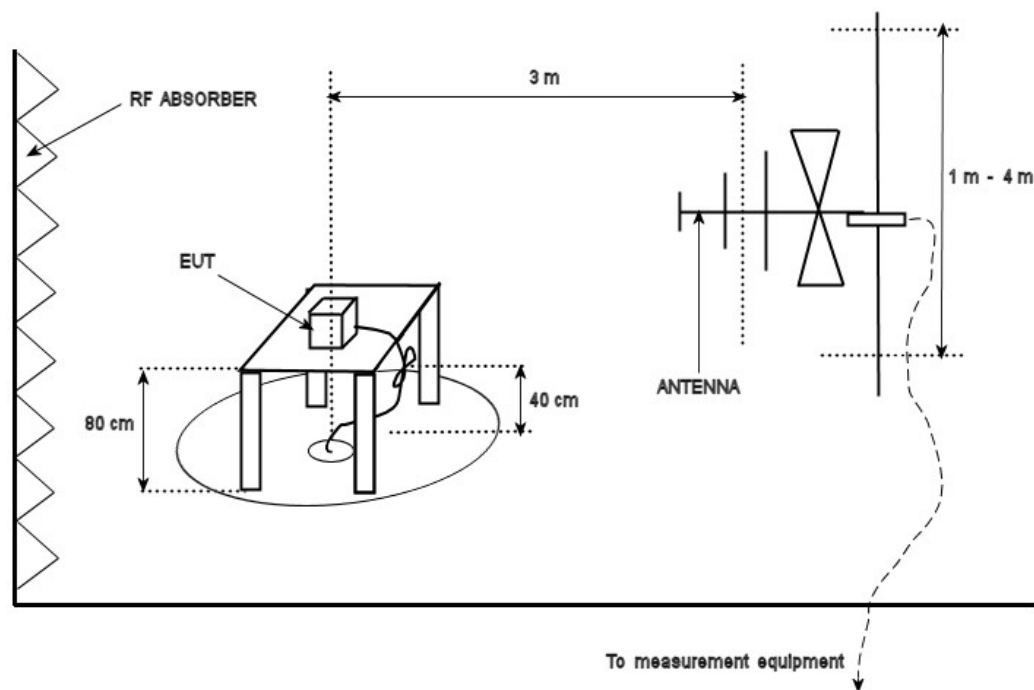



Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is ± 4.4 dB with a 'k=2' coverage factor and a 95% confidence level.


Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	


Vertical

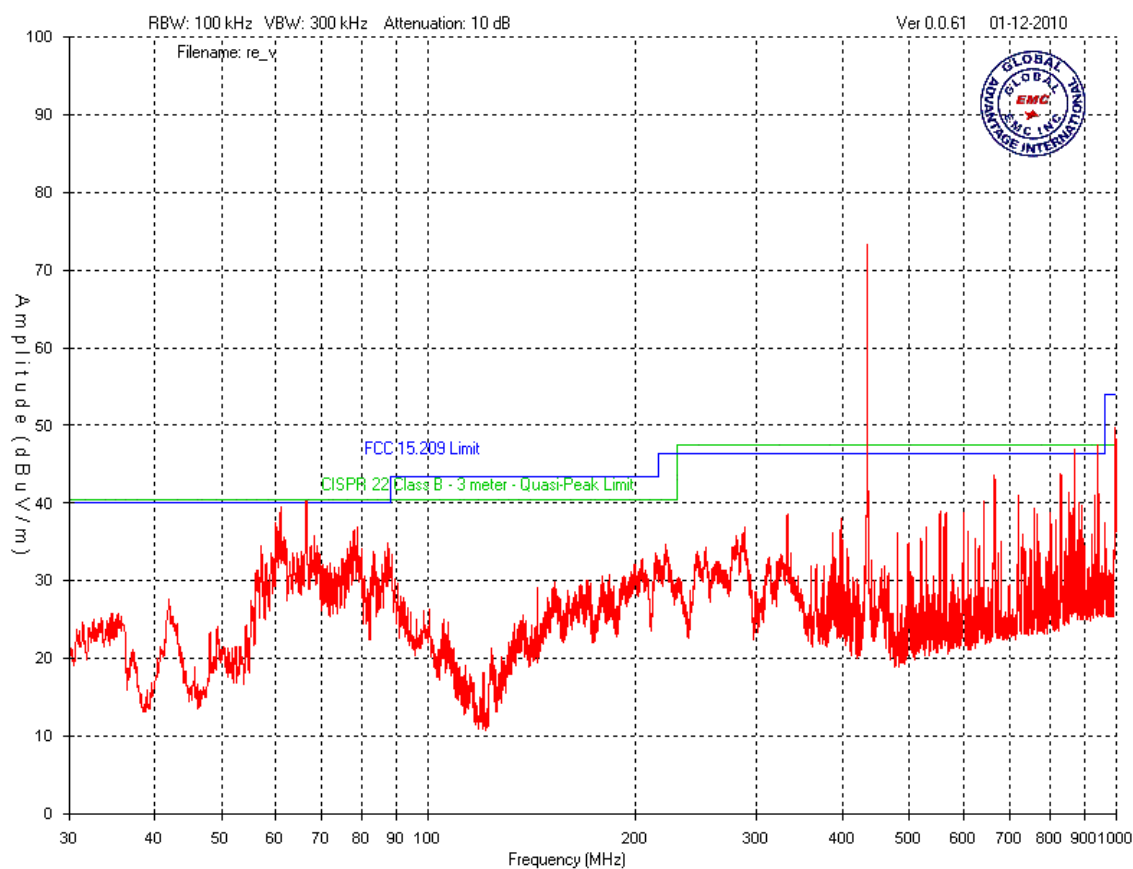

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Horizontal

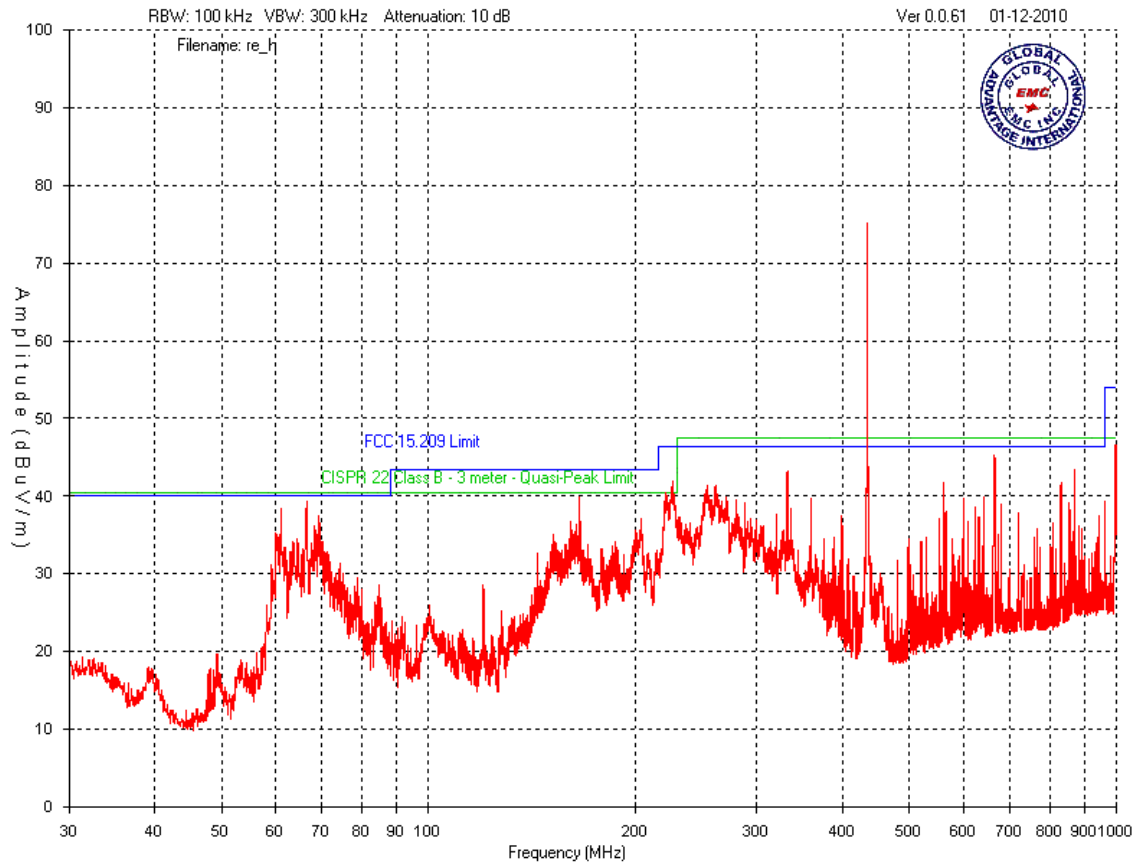

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Final Measurements

Note a duty cycle of -24.8 applies, as calculated in the duty cycle section of this report.


Frequency (MHz)	Reading (dBuV)	Det.	Pol.	Ant – Factor (dB/m)	Preamp – Factor (dB)	Cor.	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass / Fail
433.92	88.9	Pk	V	17.3	-31.2	NA	75	92.8	17.8	Pass
433.92	88.9	Av	V	17.3	-31.2	-24.8	50.2	72.8	22.6	Pass
433.92	87	Pk	H	17.3	-31.2	NA	73.1	92.8	19.7	Pass
433.92	87	Av	H	17.3	-31.2	-24.8	48.3	72.8	24.5	Pass

The device complies with the requirement. A worst case measurement of 75 dBuV/m at 3 meters was obtained using a peak detector at a center frequency of 433.92 MHz in the vertical polarity.

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	8566B	HP	2008-02-28	2010-02-28	GEMC 6
Quasi Peak Adapter	85650A	HP	2008-02-28	2010-02-28	GEMC 7
BiLog Antenna	3142-C	ETS	2009-02-12	2011-02-12	GEMC 8
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Schaffner Preamp 9kHz - 2 GHz	CPA9231A	Schaffner	8/26/2008	8/26/2010	GEMC 116
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC - 15.209 - Radiated Emissions_Rev1.doc"

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

20 dB Bandwidth of Periodically Operated Transmitters

Purpose

The purpose of this test is to ensure that the bandwidth occupied does not exceed a stated minimum. This helps ensure the utilization of the frequency allocation is sufficiently narrow and not occupying excessive spectrum. This also helps prevent accidentally interference of data by ensuring adequate data separation to distinguish the reception of the intended information by enabling the receiver to have a relatively narrow band response tuned to the transmitter's frequency.


Limits

The Limit is as specified in FCC Part 15 and RSS 210.

For periodic transmitters below 900 MHz, this should not exceed 0.25 % of the fundamental frequency. The limit for 433.92 MHz is 108.5 kHz. This should be measured with a RBW equal to approximately %1 (or greater) of the 20 dB bandwidth of the signal and a VBW > then the RBW.

Results

The EUT passed. The 20 dB bandwidth measured was 43.1 kHz and the requirement was that this be less than 108.5 kHz.


Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	


Graph(s)

The graphs shown below shows the channel spacing during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is approximately 1 % of the 20 dB BW during operation of the EUT. This measurement is a peak measurement. Max hold is performed for a duration of not less then 1 minute.




Transmitter with predetermined data pattern.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

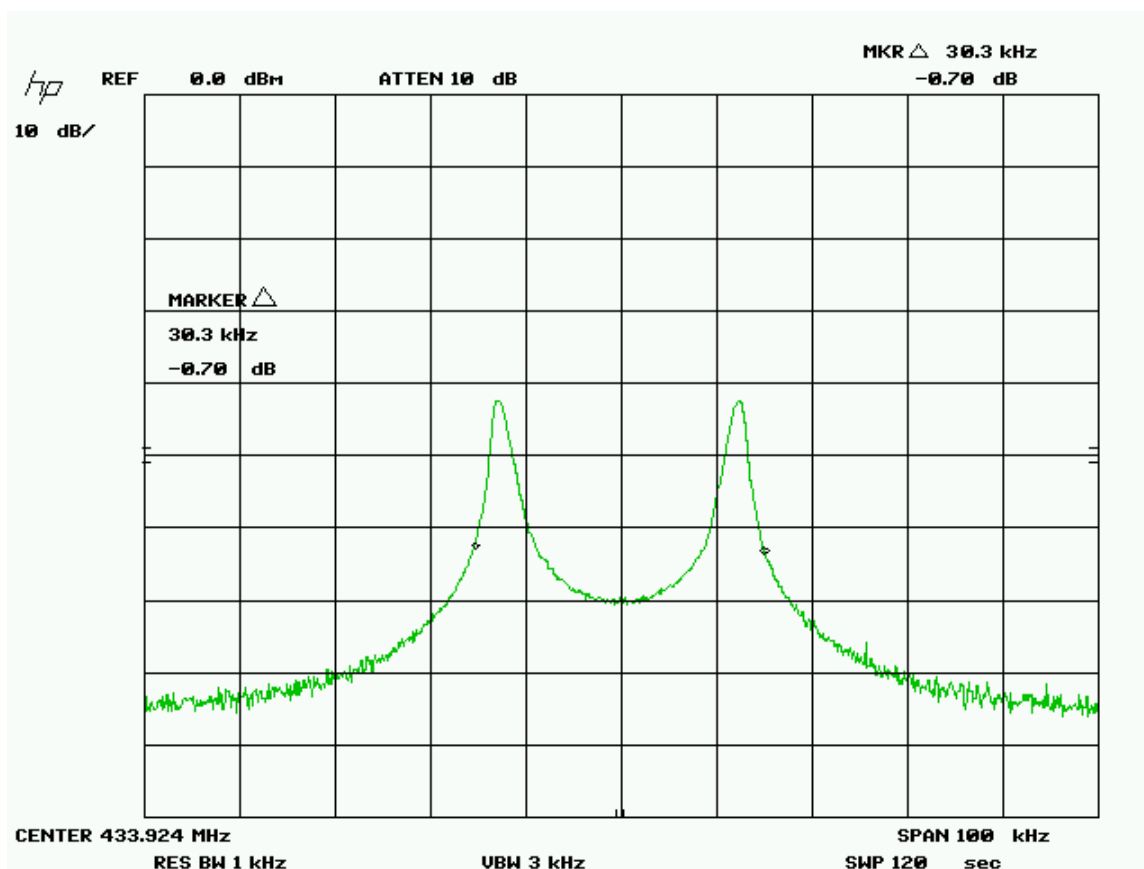

Transmitter with predetermined ON/OFF Pattern.


Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	


Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Attenuator 20 dB	FP-50-20	Trilithic	NCR	NCR	GEMC 43
Spectrum Analyzer	8566B	HP	2008-02-28	2010-02-28	GEMC 6
Quasi Peak Adapter	85650A	HP	2008-02-28	2010-02-28	GEMC 7
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
Power Attenuator 20 dB	25-A-FFN-20	Bird / Hutton	NCR	NCR	GEMC 49

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B_Rev1"

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Appendix A – EUT/Customer Summary


Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

For further details for filing purposes, refer to filing package.


General EUT Description

Manufacturer	Lyngsoe Systems
EUT Name	Combi RFID Master MC30RG
FCCID	PQG-MR30RG
IC #	4113A-MR30RG
Approximate Size (LxWxH)	140 cm x 50 cm x 30 cm
Equipment Category (Commercial / Residential / Medical)	Commercial
Input Voltage and Frequency	24 VDC
Rated Input Current	~ 1A
Table Top / Wall mount / Floor standing (choose table top if unsure)	Ceiling mount.
I/O Connectors available on EUT	Ethernet for network communications
Peripherals required for test	PC running test software
Minimum Separation distance from operator	20 cm.
Types and lengths of all I/O cables	Ethernet, up to 100 meters.

Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see 'Appendix B – EUT & Test Setup Photographs'.

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	


Appendix B – EUT and Test Setup Photographs

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	

Note: These photos are for information purposes only. Also refer to PDF files that are separate from this test report.




EUT

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	




EUT – Labels

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	




Radiated Emissions – 9 kHz to 30 MHz setup

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	



Radiated emissions – 30 MHz to 1 GHz

Client	Lyngsoe Systems	
Product	Combi RFID Master MC30RG	
Standard(s)	RSS 210 Issue 7:2007 / FCC Part 15 Subpart C 15:2008	



Radiated Emissions – 1 GHz to 10 GHz