


ENGINEERING TEST REPORT



Postal Tag
Model No.: PT40A

FCC ID: PQG-PT40A

Applicant:

Lyngsoe Systems Ltd.
5570 Kennedy Road, Unit B
Mississauga, Ontario
Canada L4Z 2A9

In Accordance With
Federal Communications Commission (FCC)
Part 15, Subpart C, Section 15.231
Low Power Transmitter & Momentarily Operation (433.92 MHz)

UltraTech's File No.: LYI-087F15C231

This Test report is Issued under the Authority of
Tri M. Luu
Vice President of Engineering
UltraTech Group of Labs

Date: January 25, 2012

Report Prepared by: Dan Huynh

Tested by: Hung Trinh, EMC/RFI Technician

Issued Date: January 25, 2012

Test Dates: Jan. 22-23, 2012

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4

Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com

FCC

91038



1309



46390-2049



NvLap Lab Code
200093-0



SL2-IN-E-1119R



Korea KCC-RRL
CA2049

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	2
1.1. SCOPE	2
1.2. RELATED SUBMITTAL(S)/GRANT(S)	2
1.3. NORMATIVE REFERENCES	2
EXHIBIT 2. PERFORMANCE ASSESSMENT	3
2.1. CLIENT INFORMATION	3
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION	3
2.3. EUT'S TECHNICAL SPECIFICATIONS.....	4
2.4. LIST OF EUT'S PORTS	4
2.5. ANCILLARY EQUIPMENT	4
2.6. TEST SETUP BLOCK DIAGRAM.....	5
EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS	6
3.1. CLIMATE TEST CONDITIONS	6
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS	6
EXHIBIT 4. SUMMARY OF TEST RESULTS.....	7
4.1. LOCATION OF TESTS.....	7
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS.....	7
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	7
EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	8
5.1. ANTENNA REQUIREMENTS [47 CFR § 15.203]	8
5.2. PROVISIONS FOR PERIODIC TRANSMITTERS [47 CFR 15.231(A)].....	9
5.3. TRANSMITTER RADIATED EMISSIONS [47 CFR §§ 15.231(B), 15.209 & 15.205]	10
5.4. 20 dB BANDWIDTH [47 CFR 15.231(C)]	15
EXHIBIT 6. TEST EQUIPMENT LIST	18
EXHIBIT 7. MEASUREMENT UNCERTAINTY	19
7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY	19

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Part 15, Subpart C, Section 15.231
Title:	Code of Federal Regulations (CFR), Title 47, Telecommunication - Part 15
Purpose of Test:	To gain FCC Equipment Certification for section 15.231 - Momentarily Operation at 433.92 MHz.
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	Commercial, industrial or business environment

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

1.3. NORMATIVE REFERENCES

Publication	Year	Title
47 CFR Parts 0-19	2010	Code of Federal Regulations (CFR), Title 47 – Telecommunication
ANSI C63.4	2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz
ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices
CISPR 22 & EN 55022	2008-09, Edition 6.0 2006	Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement
CISPR 16-1-1 +A1 +A2	2006 2006 2007	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NI)

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	Lyngsoe Systems Ltd.
Address:	5570 Kennedy Rd., Unit B Mississauga, Ontario, Canada L4Z 2A9
Contact Person:	Mr. Don Ferguson, President Phone #: 905-501-1533 Ext. 221 Fax #: 905-501-1538 Email Address: dfe@lyngsoesystems.com

MANUFACTURER	
Name:	Lyngsoe Systems Ltd.
Address:	5570 Kennedy Rd., Unit B Mississauga, Ontario, Canada L4Z 2A9
Contact Person:	Mr. Don Ferguson, President Phone #: 905-501-1533 Ext. 221 Fax #: 905-501-1538 Email Address: dfe@lyngsoesystems.com

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	Lyngsoe Systems Ltd.
Product Name:	Postal Tag
Model Name or Number:	PT40A
Serial Number:	Test sample
Type of Equipment:	Momentarily operated device
Input Power Supply Type:	Integral 3V Battery
Primary User Functions of EUT:	Used in the Automatic Mail Quality Measurements for International Post Corporation and for national posts including Canada Post.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NI)

2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Portable
Intended Operating Environment:	Commercial, industrial or business environment
Power Supply Requirement:	Integral 3V battery
RF Output Power Rating:	67.6 dB μ V/m average at 3m distance
Operating Frequency Range:	433.92 MHz
Duty Cycle:	14.73 %
20 dB Occupied Bandwidth:	36.7 kHz
Modulation Type:	FSK (36K7F1D)
Oscillator Frequency(ies):	13.560 MHz
Antenna Connector Type:	Integral
Antenna Description:	PCB trace on the PT40A board

RECEIVER	
Equipment Type:	Portable
Power Supply Requirement:	Integral 3V battery
Operating Frequency Range:	125 kHz
RF Output Impedance:	n/a
Intermediate Frequency(ies):	None
Oscillator Frequency(ies):	None

2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
No ports				

2.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

No ancillary equipment.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NI)

2.6. TEST SETUP BLOCK DIAGRAM

Intentional Radiated Emissions



Unintentional Radiated Emissions

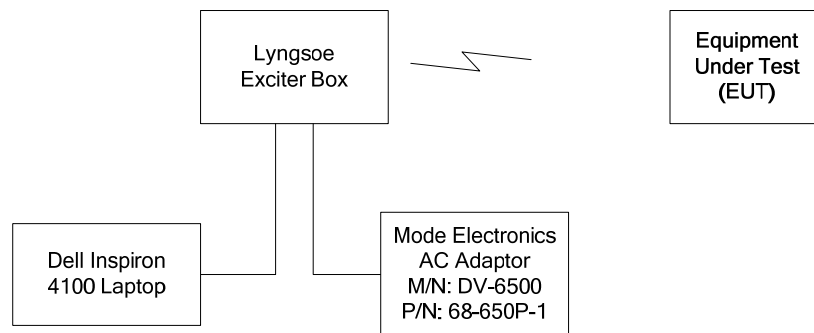


EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	3V battery

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

OPERATING MODES:	The EUT was configured for continuous transmission for the duration of transmitter tests, for receiver/unintentional radiators tests, it was put in a continuous cycle of excitation mode by subjecting it to a valid LF field generated by the Exciter Unit.
Special Test Software:	N/A
Special Hardware Used:	N/A
TRANSMITTER TEST ANTENNA:	The EUT is tested with the antenna fitted in a manner typical of normal intended use as integral antenna

Transmitter Test Signals	
FREQUENCY BAND(S):	433.92 MHz
Frequency(ies) Tested:	433.92 MHz
RF Power Output:	67.6 dBµV/m average at 3m distance
Normal Test Modulation:	FSK
Modulating Signal Source:	Internal

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NI)

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2014-04-04.

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Compliance (Yes/No)
15.203	Antenna Requirement	Yes
15.231(a)	Provisions of FCC 15.231	Yes
15.231(b) 15.109 15.209	Transmitter Radiated Emissions - Fundamental, Harmonic and Spurious Emissions	Yes
15.231(c)	20 dB Bandwidth	Yes
15.231(d)	Frequency Tolerance for Devices Operating within the Frequency Band 40.66-40.70 MHz	Not applicable
15.207(a)	AC Powerline Conducted Emissions	Not applicable for battery operated device.

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NI

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. ANTENNA REQUIREMENTS [47 CFR § 15.203]

5.1.1. Requirements

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Notes: This requirement does not apply to carrier current devices operated under the provisions of @ 15.211, 15.213, 15.217, 17.219 or 15.221.

5.1.2. Engineering Analysis

The antenna is an integral part of the EUT; it is soldered onto the radio printed circuit board and located inside the enclosure.

5.2. PROVISIONS FOR PERIODIC TRANSMITTERS [47 CFR 15.231(a)]

5.2.1. Engineering Analysis

FCC Rules	FCC Provisions	Analysis on Compliance
15.231(a)	The intentional radiator restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal.	The EUT transmission contains a fixed recognition code only, it does not transmit data.
15.231(a)(1)	A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.	N/A
15.231(a)(2)	A transmitter activated automatically shall cease transmission within 5 seconds after activation.	The length of transmission is limited to less than 5 seconds through internal software.
15.231(a)(3)	Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.	Transmission is activated when the EUT passes through a disturbance field generated at entry gates in Post Offices or facilities where statistical measurement of the flow of goods requires automatic measurement. Presentation of the EUT in the disturbance field is unpredictable. It varies with the processing flow of the mail and seeding. The EUT is seeded into the mail randomly to permit the statistical measurement of mail flow efficiency.
15.231(a)(4)	Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.	N/A
15.231(a)(5)	Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NI)

5.3. TRANSMITTER RADIATED EMISSIONS [47 CFR §§ 15.231(b), 15.209 & 15.205]

5.3.1. Limit(s)

47 CFR 15.231(b) Field Strength Limits

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70.	2,250	225
70-130	1,250	125
130-174	1,250 to 3,750 ¹	125 to 375 ¹
174-260	3,750	375
260-470	3,750 to 12,500 ¹	375 to 1,250 ¹
Above 470	12,500	1,250

¹ Linear interpolations with frequency F in MHz:

For 130-174 MHz: FS (microvolts/m) = (56.82 x F) - 6136

For 260-470 MHz: FS (microvolts/m) = (41.67 x F) - 7083.

- (1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.
- (2) Intentional radiators operating under the provisions of this Section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in Section 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of Section 15.205 shall be demonstrated using the measurement instrumentation specified in that section.

47 CFR 15.205(a) Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41.			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231

January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NI)

- (3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in Section 15.209, whichever limit permits a higher field strength.

47 CFR 15.209(a) General Field Strength Limits

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100 **	3
88–216	150 **	3
216–960	200 **	3
Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76– 88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		

5.3.2. Method of Measurements

Ultratech Test Procedures, File # ULTR P001-2004 and ANSI C63.4 for measurement methods.

5.3.3. Test Data

Remarks:

- The measuring receiver shall be tuned over the frequency range 30 MHz to 4.5 GHz.
- All spurious emissions that are in excess of 20 dB below the specified limit shall be recorded.
- For portable transmitter, EUT was placed in three different orthogonal positions for searching maximum field strength level.
- In the restricted band per FCC 15.205: § 15.209 (a) limits applied
- Outside the restricted band per FCC 15.205: § 15.231 (b) limits or § 15.209 (a) applied, whichever allows higher field strength emission.
- Section 15.231(b) field strength limit of the fundamental at 433.92 MHz = $20 \log [(41.67 \times 433.92) - 7083] = 80.8 \text{ dB}\mu\text{V/m}$
- Spurious emissions limit is 20 dB below fundamental limit.
- Duty Cycle: measured maximum duty cycle is 14.73%.
- The peak-average correction factor was obtained from the duty cycle calculation (see plots 5.6.3.1(i) & (ii) for detail).

$$\text{Duty cycle correction factor} = 20 \cdot \log (T_{\text{ON}}/100 \text{ ms}) = 20 \cdot \log (3 \cdot 4.91 \text{ ms}/100 \text{ ms}) = -16.64 \text{ dB}$$

Frequency (MHz)	Peak E-Field @ 3m (dBμV/m)	Average E-Field @ 3m (dBμV/m)	Antenna Plane (H/V)	§ 15.231(b) Limits @ 3m (dBμV/m)	§ 15.209 (a) Limits @ 3m (dBμV/m)	Margin (dB)	Pass/fail
433.92	81.75	65.11	V	80.83		-15.71	PASS
433.92	84.20	67.56	H	80.83		-13.26	PASS
867.84	58.48	41.84	V	60.83	46.00	-18.98	PASS
867.84	56.98	40.34	H	60.83	46.00	-20.48	PASS
1735.68	43.27	26.63	H	60.83	54.00	-34.19	PASS
2169.60	49.42	32.78	V	60.83	54.00	-28.04	PASS
2169.60	52.21	35.57	H	60.83	54.00	-25.25	PASS
2603.52	48.33	31.69	V	60.83	54.00	-29.13	PASS
2603.52	49.67	33.03	H	60.83	54.00	-27.79	PASS
3037.44	60.11	43.47	V	60.83	54.00	-17.35	PASS
3037.44	65.72	49.08	H	60.83	54.00	-11.74	PASS
3471.36	51.93	35.29	V	60.83	54.00	-25.53	PASS
3471.36	56.67	40.03	H	60.83	54.00	-20.79	PASS
3905.28	61.34	44.70	V	60.83	54.00	-9.30	*PASS
3905.28	60.98	44.34	H	60.83	54.00	-9.66	*PASS
4339.20	63.47	46.83	V	60.83	54.00	-7.17	*PASS
4339.20	60.91	44.27	H	60.83	54.00	-9.73	*PASS

* Emissions within the restricted bands.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

File No.:	LYI-087Q
Client:	Lyngsoe Systems
Product Description:	RFID PT40 433.92 MHz
Model(s):	
Test (specified rules):	FCC 15.231(a), RSS 210, Annex 1_ Duty Cycle
Date:	Jan 23, 2012
Tested by: Name	Wei
Deviation:	None
Comment(s):	433.92 MHz, FSK modulated with programmed messages

Plot 5.3.3.1 - Duty Cycle in 100 ms (pulse train)

Time on: 3 x 4.909819 ms= 14.73 ms

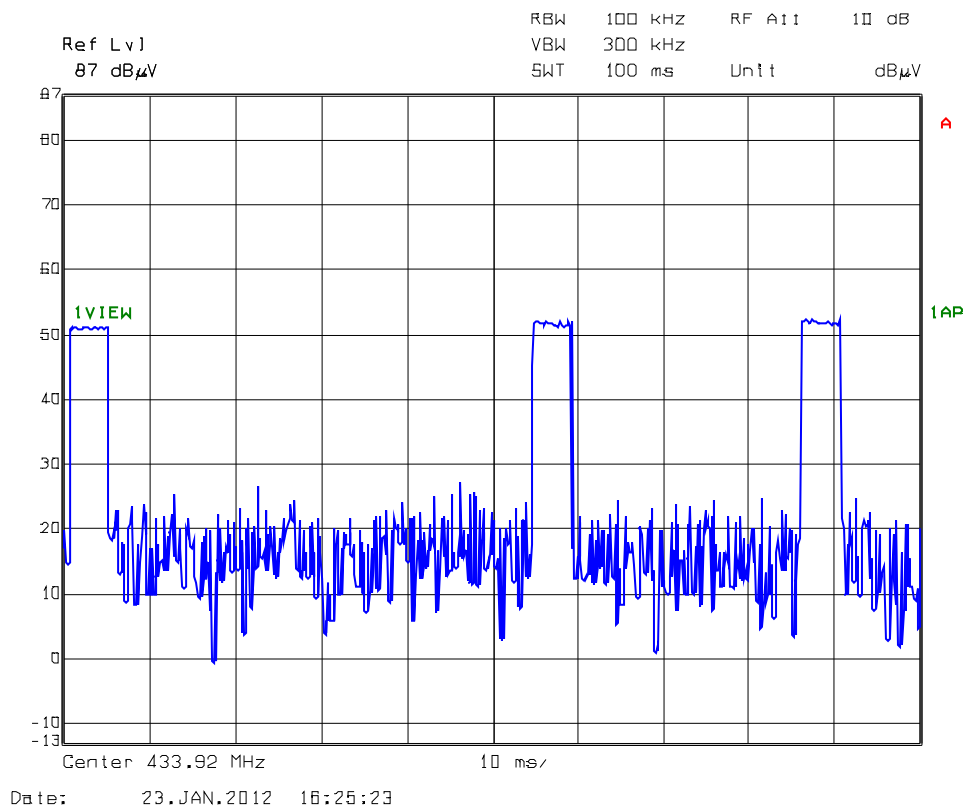

Duty Cycle factor: $14.73 \text{ ms} / 100 \text{ ms} = 0.1473 \Rightarrow 20 \cdot \log(0.1473) = -16.64 \text{ dB}$


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NI)

Plot 5.3.3.2 - Duty Cycle (pulse length is 4.90 ms)

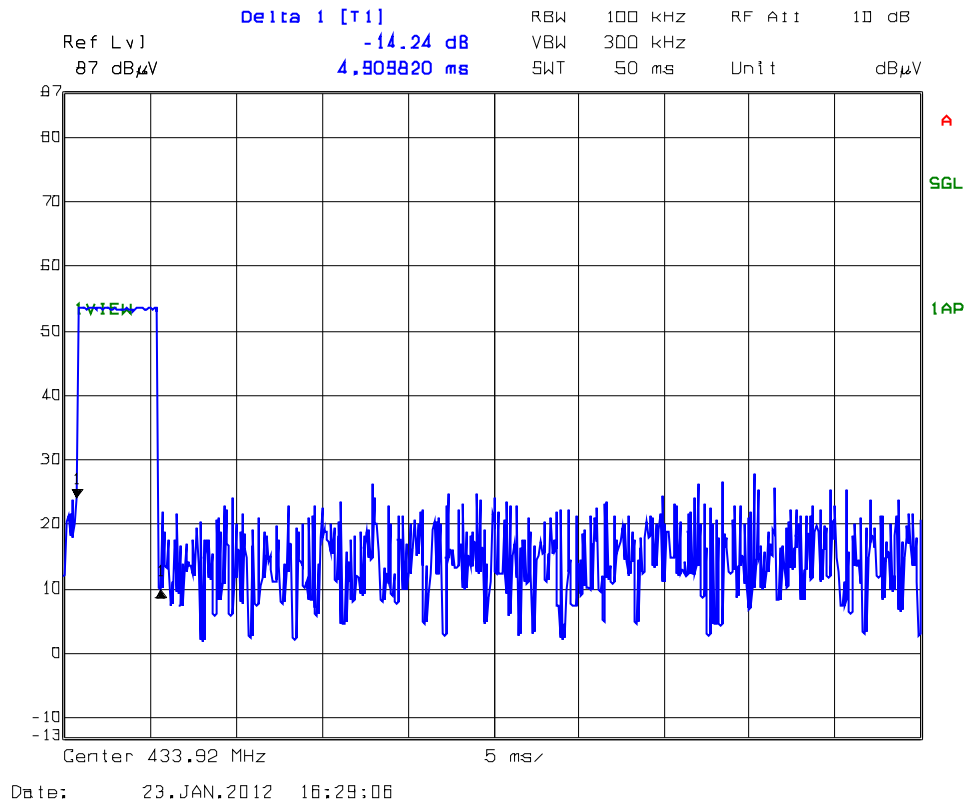

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.4. 20 dB BANDWIDTH [47 CFR 15.231(c)]

5.4.1. Limit(s)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

5.4.2. Method of Measurements

The measurements were performed in accordance with Ultratech Test Procedures, File # ULTR P001-2004 and ANSI C63.4:2003.

The transmitter output was loosely coupled to the spectrum analyzer through a receiving antenna. The bandwidth of the fundamental frequency was measured with the spectrum analyzer, with the resolution BW set to 1% to 3 % of the approximate emission width and video BW set to 3 times the resolution BW.

5.4.3. Test Data

Channel Frequency (MHz)	20 dB Occupied Bandwidth (kHz)	Maximum Bandwidth Limit (kHz)
433.92	36.7 kHz	1084.8

See the following plot for details.

File No.:	LYI-087Q
Client:	Lyngsoe Systems
Product Description:	RFID PT40 433.92 MHz
Model(s):	
Test (specified rules):	FCC 15.231(a), RSS 210, Annex 1_ 20dB Bandwidth
Date:	Jan 23, 2012
Tested by: Name	Wei
Deviation:	None
Comment(s):	433.92 MHz, FSK modulated

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NI)

Plot 5.4.3.1: 20 dB Occupied Bandwidth, Fc: 433.92 MHz



ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.4.3.2: 99% Occupied Bandwidth, Fc: 433.92 MHz



ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 6. TEST EQUIPMENT LIST

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK20/B4/B2	834157/005	9 kHz – 40 GHz	18 Jul 2012
RF Amplifier	AH System	PAM-0118	225	20 MHz – 18 GHz	15 Mar 2012
RF Amplifier	Com-Power	PA-103A	161243	10 MHz – 1 GHz	23 Feb. 2012
Horn Antenna	Emco	3115	6570	1 – 18 GHz	22 Feb 2012
Biconi-Log Antenna	Emco	3142C	00034792	26 – 3000 MHz	26 April 2012

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NI

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.15	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.30	± 5.2

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.39	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.78	± 5.2

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 1.87	Under consideration
U	Expanded uncertainty U: $U = 2u_c(y)$	± 3.75	Under consideration

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYI-087F15C231
January 25, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NI)