

**Intertek**

Valued Quality. Delivered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



**TEST REPORT**

**Report No.: 14101167HKG-001**

**Spin Master Toys Far East Ltd.**


Application  
For  
Certification  
(Original Grant)  
**(FCC ID: PQN44452TX2G4)**

Transceiver

Prepared and Checked by:

Approved by:

  
\_\_\_\_\_  
Wong Kwok Yeung, Kenneth  
Lead Engineer

  
\_\_\_\_\_  
Chan Chi Hung, Terry  
Supervisor  
Date: December 17, 2014

- Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.
- This report shall not be reproduced, except in full.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-etlsemko.com](http://www.hk.intertek-etlsemko.com)



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### GENERAL INFORMATION

|                           |  |
|---------------------------|--|
| Grantee:                  | Spin Master Toys Far East Ltd.   |
| Grantee Address:          | Room 1113, 11/F., Chinachem Golden Plaza,<br>77 Mody Road, Tsim Sha Tsui East,<br>Kowloon, Hong Kong.  |
| Contact Person:           | Andy Wong  |
| Tel:                      | (86)0769-81080068  |
| Fax:                      | (86)0769-82207100  |
| e-mail:                   | andyw@spinmaster.com   |
| Manufacturer:             | Spin Master Toys   |
| Manufacturer Address:     | Room 1113A, 11/F., Chinachem Golden Plaza,<br>77 Mody Road, Tsim Sha Tsui East,<br>Kowloon, Hong Kong. |
| Brand Name:               | N/A  |
| Model:                    | 44452  |
| Additional Model:         | 1031457, 1031458, 6019618, 6019657   |
| Type of EUT:              | Transceiver  |
| Description of EUT:       | ARH RDC Sky Stunt Ast  |
| Serial Number:            | N/A  |
| FCC ID:                   | PQN44452TX2G4  |
| Date of Sample Submitted: | October 31, 2014   |
| Date of Test:             | October 31, 2014 to November 21, 2014  |
| Report No.:               | 14101167HKG-001  |
| Report Date:              | December 17, 2014  |
| Environmental Conditions: | Temperature: +10 to 40°C<br>Humidity: 10 to 90%  |



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## SUMMARY OF TEST RESULT

| TEST SPECIFICATION                                     | REFERENCE | RESULTS |
|--|-----------|---------|
| Radiated Emission<br>Radiated Emission on the Bandedge | 15.249    | Pass    |
| Restricted bands of operation                          | 15.205    | Pass    |

The equipment under test is found to be complying with the following standards:  
FCC Part 15, October 1, 2013 Edition

- Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## Table of Contents

|     |  |    |
|-----|--|----|
| 1.0 | <b><u>General Description</u></b> .....          | 1  |
| 1.1 | Product Description .....                        | 1  |
| 1.2 | Related Submittal(s) Grants.....                 | 1  |
| 1.3 | Test Methodology .....                           | 1  |
| 1.4 | Test Facility .....                              | 2  |
| 2.0 | <b><u>System Test Configuration</u></b> .....    | 3  |
| 2.1 | Justification.....                               | 3  |
| 2.2 | EUT Exercising Software.....                     | 3  |
| 2.3 | Special Accessories .....                        | 3  |
| 2.4 | Measurement Uncertainty.....                     | 3  |
| 2.5 | Support Equipment List and Description.....      | 3  |
| 3.0 | <b><u>Emission Results</u></b> .....             | 4  |
| 3.1 | Field Strength Calculation.....                  | 4  |
| 3.2 | Radiated Emission Configuration Photograph ..... | 5  |
| 3.3 | Radiated Emission Data .....                     | 5  |
| 4.0 | <b><u>Equipment Photographs</u></b> .....        | 9  |
| 5.0 | <b><u>Product Labelling</u></b> .....            | 9  |
| 6.0 | <b><u>Technical Specifications</u></b> .....     | 9  |
| 7.0 | <b><u>Instruction Manual</u></b> .....           | 9  |
| 8.0 | <b><u>Miscellaneous Information</u></b> .....    | 10 |
| 8.1 | Radiated Emission on the Bandedge.....           | 10 |
| 8.2 | Discussion of Pulse Desensitization .....        | 13 |
| 8.3 | Calculation of Average Factor.....               | 13 |
| 8.4 | Emissions Test Procedures .....                  | 15 |
| 9.0 | <b><u>Equipment List</u></b> .....               | 17 |



Valued Quality. Delivered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## 1.0 General Description

### 1.1 Product Description

The Equipment Under Test (EUT) is a 2.4GHz transceiver (i.e. Controller) for a RC Plane. The EUT is powered by DC12.0V (8X1.5V AA batteries). The operating frequency is 2408MHz, 2424MHz, 2442MHz and 2460MHz. After pairing with plane, the plane can be controlled to fly forward, upward/downward, turn left/right directions and any motions. Also, the EUT has a charging circuitry, the corresponding plane can be charged by the EUT.

The Model: 1031457, 1031458, 6019618 and 6019657 are the same as the Model: 44452 in hardware aspect. The difference in model number serves as marketing strategy. The models are different in model number only.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transmitter.

The Certification procedure of transceiver (Plane) for this transmitter (with FCC ID: PQN44452RX2G4) is being processed as the same time of this application.

### 1.3 Test Methodology

Radiated emission measurements was performed according to the procedures in ANSI C63.4 (2009). All radiated measurements were performed in an Open Area Test Site. Preliminary scans were performed in the Open Area Test Site only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



#### 1.4 Test Facility

The open area test site facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## 2.0 **System Test Configuration**

### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The device was powered by new 8 X 1.5V AA batteries.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

### 2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

### 2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

### 2.5 Support Equipment List and Description

N/A.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### 3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where

- FS = Field Strength in dB $\mu$ V/m
- RR = RA - AG - AV in dB $\mu$ V
- LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

|                               |                      |
|-------------------------------|----------------------|
| RA = 52.0 dB $\mu$ V/m        |                      |
| AF = 7.4 dB                   | RR = 18.0 dB $\mu$ V |
| CF = 1.6 dB                   | LF = 9.0 dB          |
| AG = 29.0 dB                  |                      |
| AV = 5.0 dB                   |                      |
| FS = RR + LF                  |                      |
| FS = 18 + 9 = 27 dB $\mu$ V/m |                      |

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$





Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### 3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 2400 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 11.8 dB

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Applicant: Spin Master Toys Far East Ltd.  
Model: 44452  
Worst-Case Operating Mode: Transmitting

Date of Test: November 21, 2014

Table 1  
**Radiated Emissions**  
Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|--------------|
| H            | 2408.000         | 98.6           | 33                | 29.4                | 95.0                      | 26.4                | 68.6                      | 94.0                         | -25.4        |
| <b>H</b>     | <b>4816.000</b>  | <b>50.5</b>    | <b>33</b>         | <b>34.9</b>         | <b>52.4</b>               | <b>26.4</b>         | <b>26.0</b>               | <b>54.0</b>                  | <b>-28.0</b> |
| H            | 7224.000         | 48.4           | 33                | 37.9                | 53.3                      | 26.4                | 26.9                      | 54.0                         | -27.1        |
| H            | 9632.000         | 48.1           | 33                | 40.4                | 55.5                      | 26.4                | 29.1                      | 54.0                         | -24.9        |
| <b>H</b>     | <b>12040.000</b> | <b>49.2</b>    | <b>33</b>         | <b>40.5</b>         | <b>56.7</b>               | <b>26.4</b>         | <b>30.3</b>               | <b>54.0</b>                  | <b>-23.7</b> |
| H            | 14448.000        | 53.8           | 33                | 40.0                | 60.8                      | 26.4                | 34.4                      | 54.0                         | -19.6        |

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H            | 2408.000         | 98.6           | 33                | 29.4                | 95.0                      | 114.0                     | -19.0        |
| <b>H</b>     | <b>4816.000</b>  | <b>50.5</b>    | <b>33</b>         | <b>34.9</b>         | <b>52.4</b>               | <b>74.0</b>               | <b>-21.6</b> |
| H            | 7224.000         | 48.4           | 33                | 37.9                | 53.3                      | 74.0                      | -20.7        |
| H            | 9632.000         | 48.1           | 33                | 40.4                | 55.5                      | 74.0                      | -18.5        |
| <b>H</b>     | <b>12040.000</b> | <b>49.2</b>    | <b>33</b>         | <b>40.5</b>         | <b>56.7</b>               | <b>74.0</b>               | <b>-17.3</b> |
| H            | 14448.000        | 53.8           | 33                | 40.0                | 60.8                      | 74.0                      | -13.2        |

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.
6. 10MHz of RBW is used for radiated emission measurement.



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Applicant: Spin Master Toys Far East Ltd.  
Model: 44452  
Worst-Case Operating Mode: Transmitting

Date of Test: November 21, 2014

Table 2  
**Radiated Emissions**  
Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

| Polarization | Frequency (MHz)  | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBµV/m) | Average Factor (dB) | Calculated at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|--------------|
| H            | 2442.000         | 94.0           | 33                | 29.4                | 90.4                      | 26.4                | 64.0                      | 94.0                         | -30.0        |
| <b>H</b>     | <b>4884.000</b>  | <b>54.1</b>    | <b>33</b>         | <b>34.9</b>         | <b>56.0</b>               | <b>26.4</b>         | <b>29.6</b>               | <b>54.0</b>                  | <b>-24.4</b> |
| <b>H</b>     | <b>7326.000</b>  | <b>48.6</b>    | <b>33</b>         | <b>37.9</b>         | <b>53.5</b>               | <b>26.4</b>         | <b>27.1</b>               | <b>54.0</b>                  | <b>-26.9</b> |
| H            | 9768.000         | 48.0           | 33                | 40.4                | 55.4                      | 26.4                | 29.0                      | 54.0                         | -25.0        |
| <b>H</b>     | <b>12210.000</b> | <b>49.1</b>    | <b>33</b>         | <b>40.5</b>         | <b>56.6</b>               | <b>26.4</b>         | <b>30.2</b>               | <b>54.0</b>                  | <b>-23.8</b> |
| H            | 14652.000        | 54.9           | 33                | 38.4                | 60.3                      | 26.4                | 33.9                      | 54.0                         | -20.1        |

| Polarization | Frequency (MHz)  | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H            | 2442.000         | 94.0           | 33                | 29.4                | 90.4                      | 114.0                     | -23.6        |
| <b>H</b>     | <b>4884.000</b>  | <b>54.1</b>    | <b>33</b>         | <b>34.9</b>         | <b>56.0</b>               | <b>74.0</b>               | <b>-18.0</b> |
| <b>H</b>     | <b>7326.000</b>  | <b>48.6</b>    | <b>33</b>         | <b>37.9</b>         | <b>53.5</b>               | <b>74.0</b>               | <b>-20.5</b> |
| H            | 9768.000         | 48.0           | 33                | 40.4                | 55.4                      | 74.0                      | -18.6        |
| <b>H</b>     | <b>12210.000</b> | <b>49.1</b>    | <b>33</b>         | <b>40.5</b>         | <b>56.6</b>               | <b>74.0</b>               | <b>-17.4</b> |
| H            | 14652.000        | 54.9           | 33                | 38.4                | 60.3                      | 74.0                      | -13.7        |

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.
6. 10MHz of RBW is used for radiated emission measurement.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Applicant: Spin Master Toys Far East Ltd.  
Model: 44452  
Worst-Case Operating Mode: Transmitting

Date of Test: November 21, 2014

Table 3  
**Radiated Emissions**  
Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|--------------|
| H            | 2460.000         | 95.3           | 33                | 29.4                | 91.7                      | 26.4                | 65.3                      | 94.0                         | -28.7        |
| <b>H</b>     | <b>4920.000</b>  | <b>56.5</b>    | <b>33</b>         | <b>34.9</b>         | <b>58.4</b>               | <b>26.4</b>         | <b>32.0</b>               | <b>54.0</b>                  | <b>-22.0</b> |
| <b>H</b>     | <b>7380.000</b>  | <b>48.5</b>    | <b>33</b>         | <b>37.9</b>         | <b>53.4</b>               | <b>26.4</b>         | <b>27.0</b>               | <b>54.0</b>                  | <b>-27.0</b> |
| H            | 9840.000         | 48.5           | 33                | 40.4                | 55.9                      | 26.4                | 29.5                      | 54.0                         | -24.5        |
| <b>H</b>     | <b>12300.000</b> | <b>48.8</b>    | <b>33</b>         | <b>40.5</b>         | <b>56.3</b>               | <b>26.4</b>         | <b>29.9</b>               | <b>54.0</b>                  | <b>-24.1</b> |
| H            | 14760.000        | 55.2           | 33                | 38.4                | 60.6                      | 26.4                | 34.2                      | 54.0                         | -19.8        |

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H            | 2460.000         | 95.3           | 33                | 29.4                | 91.7                      | 114.0                     | -22.3        |
| <b>H</b>     | <b>4920.000</b>  | <b>56.5</b>    | <b>33</b>         | <b>34.9</b>         | <b>58.4</b>               | <b>74.0</b>               | <b>-15.6</b> |
| <b>H</b>     | <b>7380.000</b>  | <b>48.5</b>    | <b>33</b>         | <b>37.9</b>         | <b>53.4</b>               | <b>74.0</b>               | <b>-20.6</b> |
| H            | 9840.000         | 48.5           | 33                | 40.4                | 55.9                      | 74.0                      | -18.1        |
| <b>H</b>     | <b>12300.000</b> | <b>48.8</b>    | <b>33</b>         | <b>40.5</b>         | <b>56.3</b>               | <b>74.0</b>               | <b>-17.7</b> |
| H            | 14760.000        | 55.2           | 33                | 38.4                | 60.6                      | 74.0                      | -13.4        |

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.
6. 10MHz of RBW is used for radiated emission measurement.



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



#### 4.0 **Equipment Photographs**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

#### 5.0 **Product Labelling**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

#### 6.0 **Technical Specifications**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

#### 7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## 8.0 **Miscellaneous Information**

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).

### 8.1 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.4 (2009) for frequency being measured.



Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

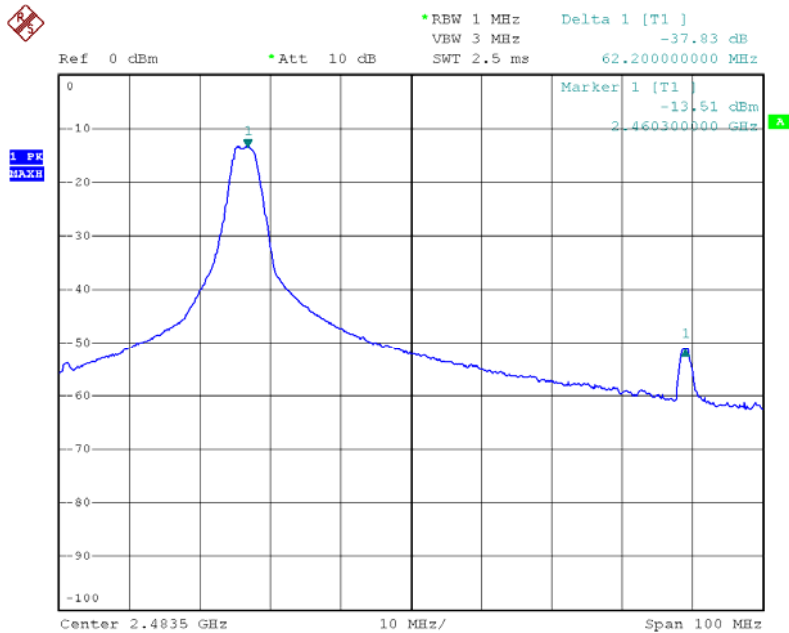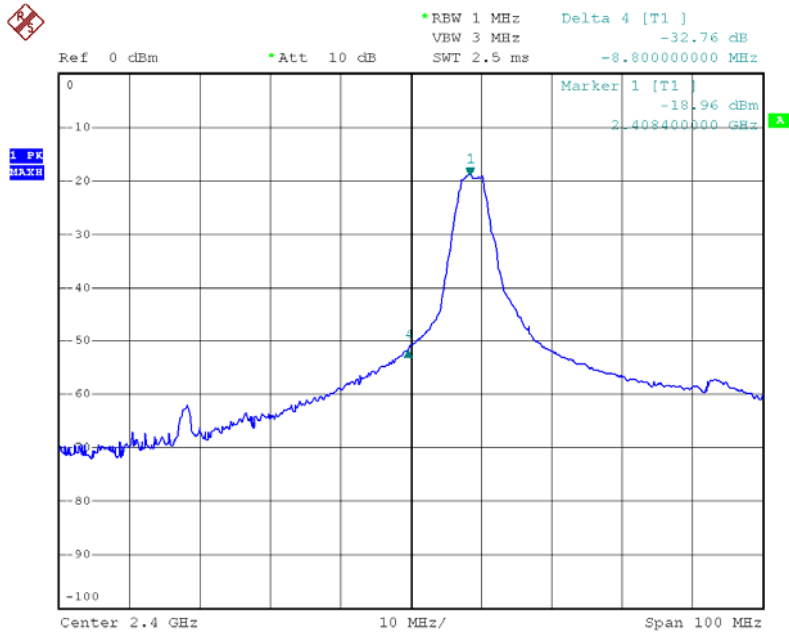

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=95.0 dB $\mu$ V/m – 32.8 dB  
=62.2 dB $\mu$ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=68.6 dB $\mu$ V/m – 32.8 dB  
=35.8 dB $\mu$ V/m

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=91.7 dB $\mu$ V/m – 37.8 dB  
=53.9 dB $\mu$ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=65.3 dB $\mu$ V/m – 37.8 dB  
=27.5 dB $\mu$ V/m

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB $\mu$ V/m (Peak Limit) and 54 dB $\mu$ V/m (Average Limit).





Valued Quality. Delivered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 0.28ms for a digital “1” bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

## 8.3 Calculation of Average Factor

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 100 ms

Effective period of the cycle =  $17 \times 0.28 = 4.76\text{ms}$

DC =  $4.76/100 = 0.0476$



Therefore, the averaging factor is found by  $20\log 0.0476 = -26.4\text{dB}$ .



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

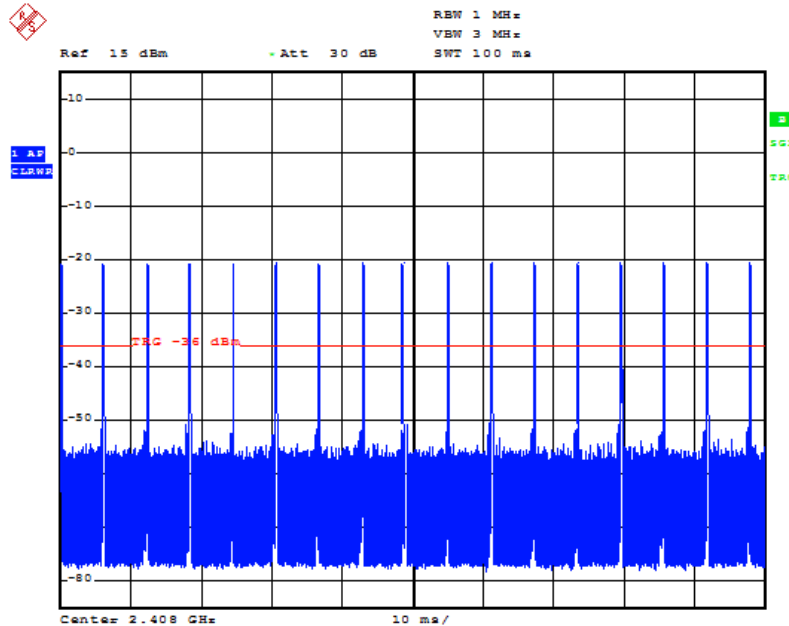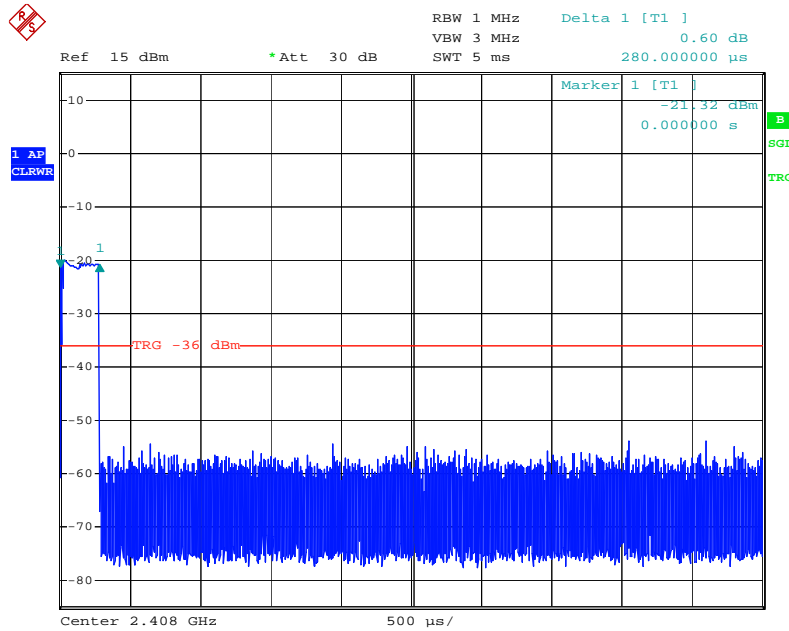



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



#### 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.



Valued Quality. Delivered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



#### 8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.4 (2009).

The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitization is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 10 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## 9.0 Equipment List

### 1) Radiated Emissions Test

| Equipment            | EMI Test Receiver | Spectrum Analyzer |
|----------------------|-------------------|-------------------|
| Registration No.     | EW-2666           | EW-2253           |
| Manufacturer         | R&S               | R&S               |
| Model No.            | ESCI7             | FSP40             |
| Calibration Date     | Jun. 20, 2013     | May 08, 2014      |
| Calibration Due Date | Dec. 20, 2014     | May 08, 2015      |

| Equipment            | Double Ridged Guide Antenna | BiConiLog Antenna - 26MHz to 6000MHz |
|----------------------|-----------------------------|--------------------------------------|
| Registration No.     | EW-1133                     | EW-3061                              |
| Manufacturer         | EMCO                        | EMCO                                 |
| Model No.            | 3115                        | 3412E                                |
| Calibration Date     | Apr. 30, 2014               | Jul. 17, 2014                        |
| Calibration Due Date | Oct. 30, 2015               | Jul. 17, 2015                        |

### 2) Bandedge and Average factor Measurement

| Equipment            | Spectrum Analyzer |
|----------------------|-------------------|
| Registration No.     | EW-2329           |
| Manufacturer         | R&S               |
| Model No.            | FSP3              |
| Calibration Date     | Jun. 19, 2014     |
| Calibration Due Date | Jun. 19, 2015     |

END OF TEST REPORT