



## Test Report

Product Name : Video Sender  
Model No. : VR2RSP, VS1000, VS2000, VS3000  
FCC ID.: PQP-VR2RSP

Applicant : PRIME ELECTRONICS & SATELLITICS INC.  
Address : 69, Tung-Yuan Rd., Chung-Li Industrial Park,  
Chung-Li City, Taoyuan, Taiwan.

Date of Receipt : March 30, 2001  
Date of Test : June 26, 2001  
Report No. : 014H008-1FI

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

## Test Report Certification

Test Date : June 26, 2001

Report No. : 014H008-1FI



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200347-0

Product Name : Video Sender

Applicant : PRIME ELECTRONICS & SATELLITICS INC.

Address : 69, Tung-Yuan Rd., Chung-Li Industrial Park,  
Chung-Li City, Taoyuan, Taiwan.

Manufacturer : PRIME ELECTRONICS & SATELLITICS INC.

Model No. : VR2RSP, VS1000, VS2000, VS3000

FCC ID. : PQP-VR2RSP

Rated Voltage : AC 120V/60Hz

Trade Name : PRIME, PBI

Measurement Standard : FCC Part 15 Intentional Radiators for Subpart C  
Paragraph 15.231

Measurement Procedure : ANSI C63.4:1992

Test Result : Complied

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By :

  
( Zoe Lee )

Tested By :

  
( Kuo Feng Fang )

Approved By :

  
( Kevin Wang )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1. EUT Description.....	4
1.2. Operation Description.....	4
1.3. Tested System Details .....	5
1.4. Configuration of tested System.....	5
1.5. EUT Exercise Software.....	5
1.6. Test Facility .....	6
<b>2. Conducted Emission.....</b>	<b>7</b>
2.1. Test Equipment List.....	7
2.2. Test Setup .....	7
2.3. Limits .....	7
2.4. Test Procedure.....	8
2.5. Test Result of Conducted Emission .....	9
<b>3. Radiated Emission.....</b>	<b>10</b>
3.1. Test Equipment.....	10
3.2. Test Setup .....	10
3.3. Limits .....	11
3.4. Test Procedure.....	12
3.5. Test Result of Radiated Emission .....	13
<b>4. Occupied Bandwidth of Raidated Emission.....</b>	<b>15</b>
4.1. Test Equipment.....	15
4.2. Test Setup .....	15
4.3. Test Condition.....	15
4.4. Limits .....	15
4.5. Test Procedure.....	15
4.6. Test Result of Occupied Bandwidth of Raidated Emission .....	16
<b>5. Duty Cycle Measurement.....</b>	<b>17</b>
5.1. Test Equipment.....	17
5.2. Test Setup .....	17
5.3. Test Condition.....	17
5.4. Test Proceudre.....	17
5.5. Test Result of Duty Cycle Measurement.....	18
<b>6. EMI Reduction Method During Compliance Testing .....</b>	<b>19</b>
<b>7. Attachment.....</b>	<b>20</b>

**Attachment 1: EUT Test Photographs**

**Attachment 2: EUT Detailed Photographs**

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	: Video Sender
Trade Name	: PRIME, PBI
FCC ID.	: PQP-VR2RSP
Model No.	: VR2RSP, VS1000, VS2000, VS3000
Working Frequency	: 433.92MHz
Channel Number	: 1
Type of Modulation	: ASK
Operator Selection of	: Manual Switch
Operating Frequency	
Power Adapter	: AHEAD
	Cable Out: Non-Shielded, 1.8m

Note:

1. This device is a 433.9MHz Video Sender with an Infrared Remote function.
2. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.231.
3. This device is a composite device in accordance with Part 15 regulations. The function for the receiver was, measured and made a test report that the report number is 016H004F, certified under verification.

### 1.2. Operation Description

The EUT is a 433.92MHz transmitter. The infrared remote control signal can be transferred to 433.92MHz radio frequency in ASK modulation. The transmission antenna is soldered on the PCB directly.

The super generations type receiver was used. An external excitation was used when the test of receiver was performed.


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards ) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
(1)	Television	SONY	PWM-14M2U	2018559	Non-shielded, 1.8m
(2)	DVD	SONY	DVP-K800D	960E411	Non-shielded,1.8m

	Signal Cable Type	Signal Cable Description
A.	S Video Cable	Non-shielded, 1.8m

### 1.4. Configuration of tested System

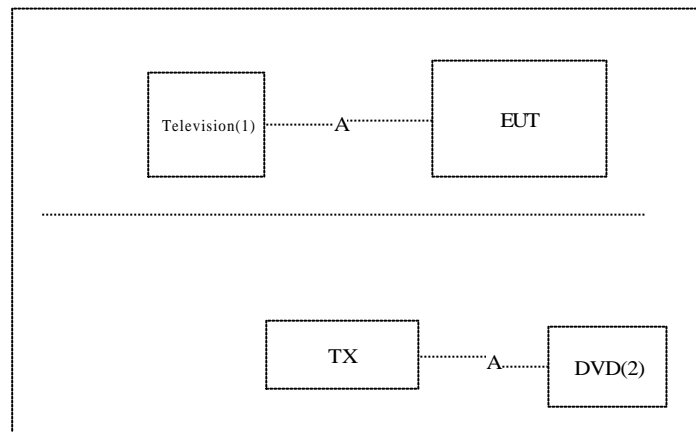

### 1.5. EUT Exercise Software

- 1.4.4 Repeat the above procedure 1.4.2 to 1.4.3
- 1.4.1 Setup the EUT and simulators as shown on 1.3.
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 Audio/Video Data will emit the fundamental frequency with Audio/Video data to Receiver.
- 1.4.4 Repeat the above procedure 1.4.2 to 1.4.3

## 1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on  
Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046  
Reference 31040/SIT1300F2  
September 30, 1998 Accreditation on NVLAP  
NVLAP Lab Code: 200347-0



Site Name: Quietek Corporation

Site Address: N0.75-1, Wang-Yeh Valley, Yung-Hsing,  
Chiung-Lin, Hsin-Chu County,  
Taiwa, R.O.C.

## 2. Conducted Emission


### 2.1. Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2001	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2001	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2001	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	N0.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

### 2.2. Test Setup

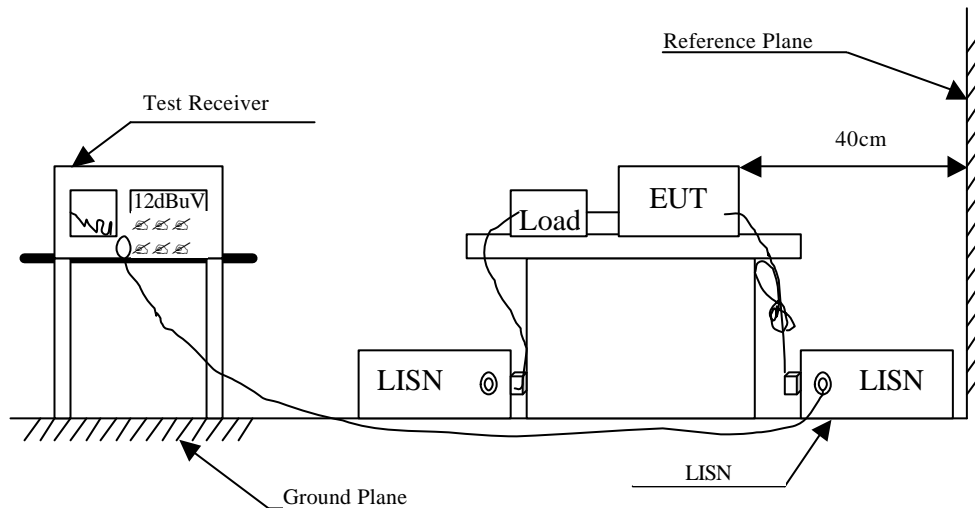

### 2.3. Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency MHz	Limits	
	uV	dBuV
0.45 - 30	250	48.0

## 2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:1992 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.45MHz to 30MHz using a receiver bandwidth of 9kHz.



## 2.5. Test Result of Conducted Emission

Product : Video Sender  
 Test Item : Conducted Emission Test  
 Test Mode : Normal Operation

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
	Loss	Factor			
MHz	dB	dB	dBuV	dBuV	dBuV

=====

### Line 1

#### Quasi-Peak:

*	0.497	0.06	0.10	33.69	33.85	48.00
	0.563	0.07	0.10	32.62	32.79	48.00
	0.692	0.08	0.10	28.97	29.15	48.00
	0.794	0.09	0.10	24.51	24.70	48.00
	1.059	0.10	0.10	19.42	19.63	48.00
	23.966	0.38	0.52	14.01	14.91	48.00

### Line 2

#### Quasi-Peak:

*	0.466	0.06	0.10	33.73	33.89	48.00
	0.512	0.06	0.10	32.76	32.92	48.00
	0.552	0.07	0.10	31.63	31.80	48.00
	0.634	0.08	0.10	29.47	29.65	48.00
	0.688	0.08	0.10	26.85	27.03	48.00
	0.825	0.09	0.10	20.52	20.71	48.00

Remarks :

1. “ \* ” means that this data is the worst emission level.
2. The average measurement was not performed when the peak measured data under the limit of average detection.

### 3. Radiated Emission


#### 3.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 2001
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2001
		Pre-Amplifier	HP	8447D/3307A01812	May, 2001
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 2000
	X	Horn Antenna	EM	EM6917 / 103325	May, 2001
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 2001
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 2001
		Pre-Amplifier	HP	8447D/3307A01814	May, 2001
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2000
	X	Horn Antenna	EM	EM6917 / 103325	May, 2001

- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
  2. Mark "X" test instruments are used to measure the final test results.

#### 3.2. Test Setup

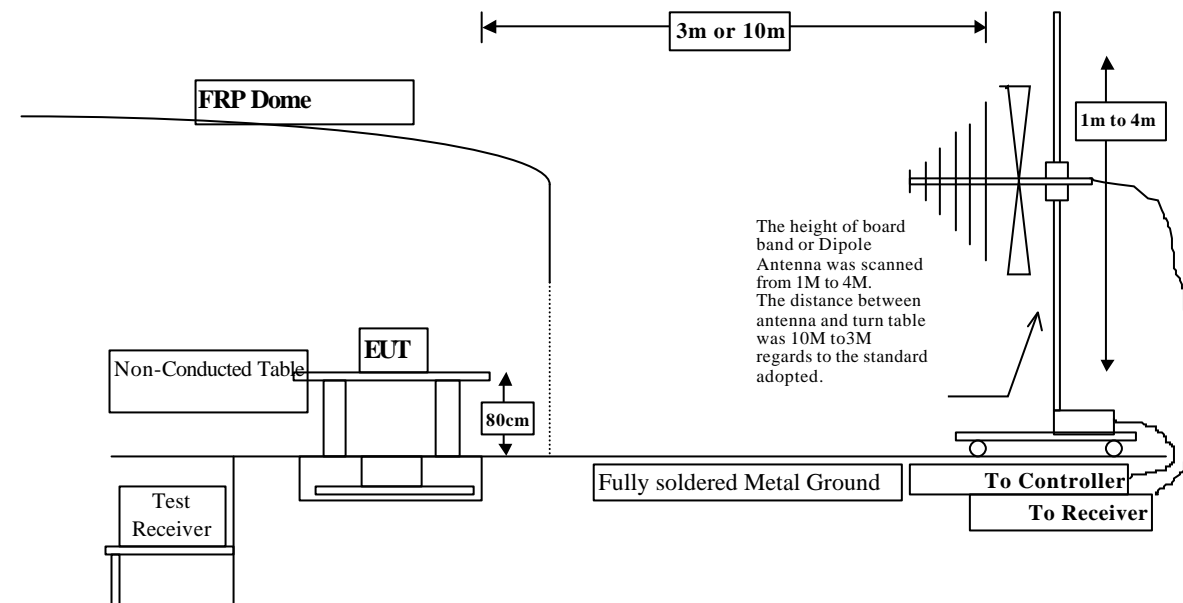

### 3.3. Limits

✍ FCC Part 15 Subpart C Paragraph 15.231 Limit

Fundamental Frequency MHz	Field strength of fundamental		Field Strength of spurious emissions	
	uV/m	dBuV/m	uV/m	dBuV/m
40.66-40.70	2250	67.0	225	47.0
70-130	1250	61.9	125	41.9
130-174	1250-3750 <sup>1</sup>	61.9 – 71.5	125-375 <sup>1</sup>	41.9 – 51.5
174-260	3750	71.5	375	51.5
260-470	3750-12500 <sup>1</sup>	71.5 – 81.9	375-1250 <sup>1</sup>	51.5 – 61.9
above 470	12500	81.9	1250	61.9

Remarks : 1. RF Line Voltage (dBuV) = 20 log RF Line Voltage (uV)  
 2. In the Above Table, the tighter limit applies at the band edges.  
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

✍ Frequencies in restricted band are complied to limits on Paragraph 15.209.

Frequency MHz	15.209 Limits (dBuV/m @3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remarks : 1. RF Line Voltage (dBuV) = 20 log RF Line Voltage (uV)  
 2. In the Above Table, the tighter limit applies at the band edges.  
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### **3.4. Test Procedure**

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz and above 1GHz is 1MHz.

### 3.5. Test Result of Radiated Emission

Product : Video Sender  
 Test Item : Fundamental Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Normal Operation

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
	Loss	Factor		Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

#### Horizontal: Peak Detector

433.930 3.08 17.34 26.74 83.03 76.71 23.87 100.58

PEAK= 76.71dBuV/m; Duty Cycle= 20 LOG (0.758)

Average= Peak +Duty Cycle=74.30 dBuV/m < 80.58

#### Vertical: Peak Detector

433.920 3.08 16.65 26.74 82.37 75.36 25.22 100.58

PEAK=75.36dBuV/m; Duty Cycle= 20 LOG (0.758)

Average= Peak +Duty Cycle= 72.95 dBuV/m < 80.58

#### Note:

1. For Average Detect: Probe Factor = Antenna Factor + Duty cycle Factor. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ \* ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Video Sender  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.1 OATS  
 Test Mode : Normal Operation

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
	Loss	Factor		Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal:  
Average Detector**

* 867.809	5.32	22.74	26.06	38.91	40.91	19.67	60.58
1301.760	2.48	25.70	35.47	31.37	24.08	29.92	54.00
1735.577	3.03	27.23	35.06	30.70	25.91	34.57	60.58
2169.643	3.57	28.64	34.90	28.70	26.02	34.52	60.58
2603.968	4.05	29.75	34.92	28.00	26.87	33.67	60.58

**Vertical:  
Average Detector**

* 867.823	5.32	20.63	26.06	37.54	37.43	23.15	60.58
1301.760	2.48	25.70	35.47	29.37	22.08	31.92	54.00
1735.577	3.03	27.23	35.06	28.75	23.96	31.83	60.58
2169.643	3.57	28.64	34.90	26.72	24.04	34.16	60.58
2603.968	4.05	29.75	34.92	26.02	24.89	34.66	60.58

Note:

1. For Average Detect: Probe Factor = Antenna Factor+Duty cycle Factor. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ \* ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss
4. The average measurement was not performed when the peak measured data under the limit of average detection.

#### 4. Occupied Bandwidth of Raidated Emission


##### 4.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2001
X	Horn Antenna	EM	EM6917 / 103325	May, 2001

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.  
2. Mark "X" test instruments are used to measure the final test results.

##### 4.2. Test Setup

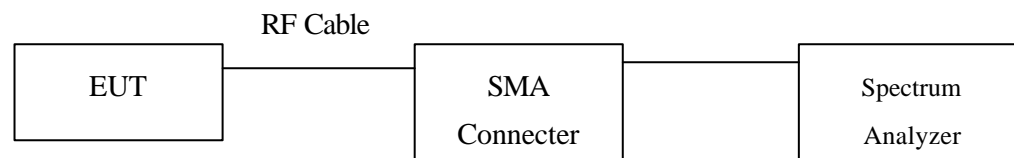

##### 4.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

##### 4.4. Limits

- (1) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.
- (2) The bandwidth of the emission shall be no wider than 0.5% of the center frequency for devices operating above 900MHz.

##### 4.5. Test Procedure


The EUT on a non-conducted table was positioned such that the distance from antenna to the EUT was 15cm.

The bandwidth of radiated emission is measured under the EUT condition produced the generated carrier signal.

#### 4.6. Test Result of Occupied Bandwidth of Raidated Emission

Product : Video Sender  
 Test Item : Occupied Bandwidth of Raidated Emission  
 Test Site : No.1 OATS  
 Test Mode : Normal Operation

Center Frequency	433.89	MHz
Allowable Bandwidth ( 70-900 MHz:0.25%, Above 900MHz: 0.5%)	1082.5	kHz
Bandwidth at 20dB down (Max)	443.9	kHz
Result	Complied with regulation	

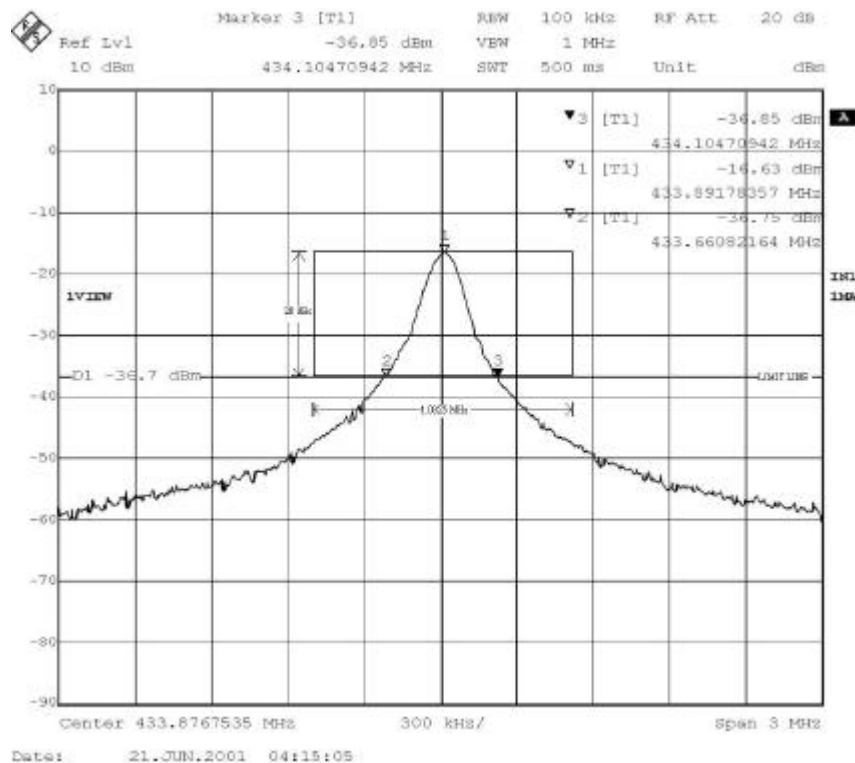



## 5. Duty Cycle Measurement


### 5.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2001
X	Horn Antenna	EM	EM6917 / 103325	May, 2001

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.  
2. Mark "X" test instruments are used to measure the final test results.

### 5.2. Test Setup

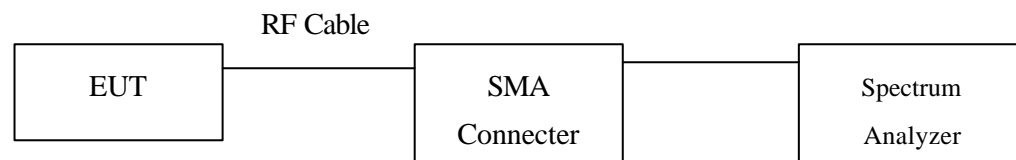

### 5.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage


### 5.4. Test Procedure

The EUT on a non-conducted table was positioned such that the distance from antenna to the EUT was 15cm.

The bandwidth of radiated emission is measured under the EUT condition produced the generated carrier signal.

## 5.5. Test Result of Duty Cycle Measurement

Product : Video Sender  
 Test Item : Duty Cycle Measurement  
 Test Site : No.1 OATS  
 Test Mode : Normal Operation

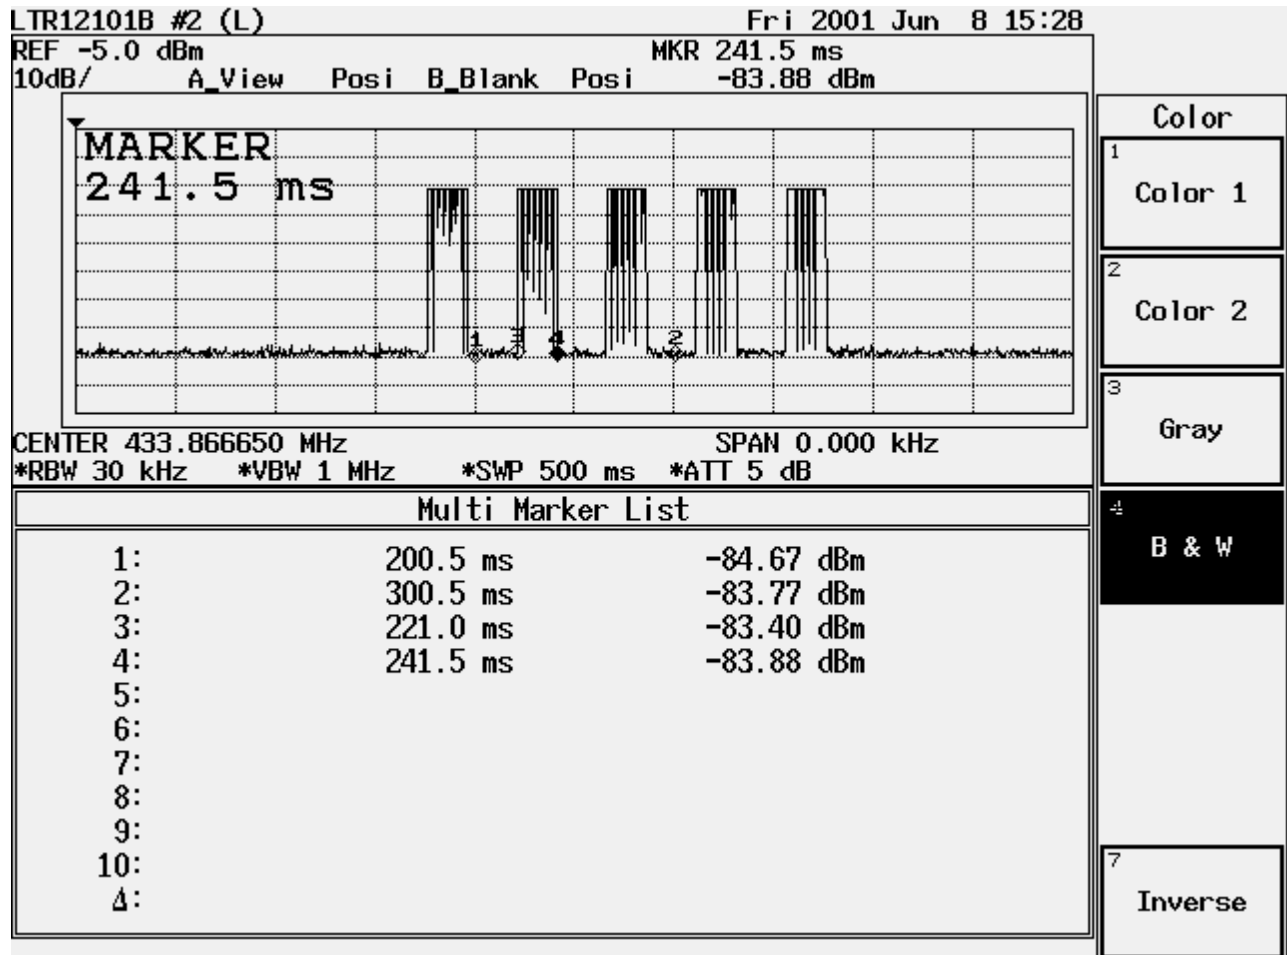

Duty Cycle:  $216.43 - 184.37 = 32.06\text{ms}$

$32.06 \times 5 = 160.3\text{ms}$

$160.3 / 211.42 = 0.758$

$20 \log 0.758 = -2.41 \text{ dB}$

Duty Cycle = -2.41 dB

## **6. EMI Reduction Method During Compliance Testing**

No modification was made during testing.

## 7. Attachment

Attachment 1: EUT Test Photographs      Number of Pages :    3

Attachment 2: EUT Detailed Photographs      Number of Pages :    7

## Attachment 1 : EUT Test Photographs

## Attachment 2 : EUT Detailed Photographs