



# Retlif Testing Laboratories

3131 Detwiler Road, Harleysville, PA 19438  
215-256-4133 - Fax: 215-256-4130

CORPORATE OFFICE  
795 Marconi Avenue  
Ronkonkoma, NY 11779  
631-737-1500 Fax 631-737-1497  
(A NY Corporation)

BRANCH LABORATORIES  
101 New Boston Road  
Goffstown, NH 03045  
603-497-4600 Fax 603-497-5281

WASHINGTON  
REGULATORY OFFICE  
703-533-1614 Fax 703-533-1612



FCC Part 15, Subpart C, Section 15.231  
Industry Canada, RSS-210 and RSS-GEN  
Test Report

On

315 MHz Keyfob Transmitter  
FCC ID: PQTDORM07  
IC: 10735A-DORM07

**Customer Name:** Dorman Products, Inc.

**Customer P.O.:** PCN2619

**Date of Report:** August 15, 2013

**Test Report No.:** R-1984P-1

**Test Start Date:** June 17, 2013

**Test Finish Date:** June 18, 2013

**Test Technician:** M. Seamans

**Approved By:** R.J. Reitz

**Report Prepared By:** C. Reitz

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.

## Technical Information

**Report Number:** R-1984P-1

**Customer:** Dorman Products, Inc.

**Address:** 3400 East Walnut Street  
Colmar, PA 18915

**Manufacturer:** Global Technical Software Services  
3705 Quakerbridge Road  
**Manufacturer Address:** Hamilton, New Jersey 08619

**Test Sample:** 315 MHz Keyfob Transmitter

**Model Numbers:** 99134, 99135, 99136, 99140, 99142, 99143

**FCC ID:** PQTDORM07

**IC:** 10735A-DORM07

**Type:** Security / Remote Control Transmitter

**Power Requirements:** 3 VDC Derived from a CR2032 Battery

**Frequency of Operation:** 315 MHz

**Equipment Class:** DSC

**Equipment Use:** Portable < 2.5 cm

### Test Specification:

FCC Rules and Regulations Part 15, Subpart C, Section 15.231  
Radio Standards Specification, RSS-210, Issue 8, December, 2010

### Test Procedure:

ANSI C63.4:2003  
RSS-GEN, Issue 3, December 2010

### Test Facility:

Retlif Testing Laboratories  
101 New Boston Road  
Goffstown, NH 03045



**Retlif Testing Laboratories**

Report No. R-1984P-1

## Tests Performed

The test methods performed on the 315 MHz Keyfob Transmitter are shown below:

<b>FCC Part 15, Subpart C</b>	<b>Industry Canada RSS-210</b>	<b>Industry Canada RSS-GEN</b>	<b>Test Method</b>
15.231(b)	A1.1.2(1)	N/A	Field Strength of Emissions
15.231(b)(2)	A1.1.2(2)	4.5	Duty Cycle Determination
15.231(b)(3)	A1.1.2(3)	N/A	Field Strength of Spurious Emissions
15.231(c)	A1.1.3	N/A	Bandwidth of Emission

## General Test Requirements

1. The measurement procedures of ANSI C63.4:2003 were utilized as specified in FCC Part 15, Subpart C, Section 15.31(a)(3) and IC RSS-GEN Section 4.1.
2. All radiated emissions measurements were performed on an Open Area Test Site (OATS), listed with the FCC and IC, in accordance with FCC Section 15.31(d) and IC Section 4.2.
3. The level of the fundamental field strength was recorded with a new battery installed in the EUT, in accordance with FCC Section 15.231(e) and IC Section 4.3(e).
4. All measurements were performed at the specified 3 meter test distance as required by FCC Section 15.31(f) and IC Section 7.25.
5. The EUT was rotated throughout 360 degrees for all radiated emissions measurements as specified in FCC Section 15.31(f)(5) and IC Section 4.3(h).
6. All readily accessible EUT controls were adjusted in such a manner as to maximize the level of emissions in accordance with FCC Section 15.31(g) and IC Section 4.3(h).
7. Appropriate accessories were attached to all EUT ports during the performance of radiated emissions measurements as required by FCC Section 15.31(i) and IC Section 4.3(d).
8. The EUT operated at a discrete frequency of 315 MHz.
9. The frequency spectrum was investigated from the lowest frequency generated in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency in accordance with FCC Section 15.33(a)(1) and IC Section 4.9.
10. All measurements were taken with a peak detector function as specified in FCC Section 15.35(a) and IC Section 4.4. The duty cycle, calculated in accordance with FCC Section 15.35(c) and IC Section 4.5, was applied to the peak readings in order to obtain the average value of emissions. The peak value of emissions was verified to meet the 20 dB requirement of FCC Section 15.35(b) and IC Section 7.2.1.




**Retlif Testing Laboratories**


Report No. R-1984P-1

## Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



Dean Landers  
EMC Test Engineer



Richard J. Reitz  
Corporate Laboratory Manager  
iNARTE Certified Engineer ATL-0036-E

### Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

### Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



**Retlif Testing Laboratories**

Report No. R-1984P-1

## **Requirements and Test Results**

### **Requirement:**

#### **FCC Section 15.231(a) - Periodic operation in the band 40.66 - 40.7 MHz and above 70 MHz**

The provisions of this Section are restricted to periodic operation within the band 40.66-40.7 MHz and above 70 MHz. Except as shown in Paragraph (e) of this Section, the intentional radiator is restricted to the transmissions of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal.

#### **IC RSS-210, A1.1 - Momentarily Operated Devices**

The frequency bands and field strength limits in Tables 4 and 5 are only for the transmission of a control signal such as that used with alarm systems, door openers, remote switches, etc. Radio control of toys or model aircrafts, and continuous transmissions such as voice or video are not permitted except as provided in A1.1.5. Data is permitted to be sent with a control signal.

- Results:  
The device was operated at a frequency of 315 MHz and is for the transmission of a control signal used for remote keyless vehicle entry.

### **Requirement:**

#### **FCC Sections 15.231(a)(1)-(5)**

#### **Periodic operation in the band 40.66 - 40.7 MHz and above 70 MHz**

The following conditions were met in order to comply with the provisions for momentary operation:

#### **IC RSS-210, A1.1.1(a)-(d) - Types of Momentary Signals**

The following conditions were met in order to comply with the provisions for momentary operation:

FCC 15.231(a)(1): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

IC A1.1.1(a): A manually operated transmitter shall employ a push-to-operate switch and be under manual control at all transmission times. When released, the transmitter shall cease transmission (holdover time of up to 5 seconds of operation).

- Results:  
The device is a manually operated, push to operate transmitter under manual control. The device ceased transmission within 5 seconds of deactivation.



**Retlif Testing Laboratories**

Report No. R-1984P-1

## Requirements and Test Results (con't)

FCC 15.231(a)(2): A transmitter activated automatically shall cease transmission within 5 seconds after activation.

IC A1.1.1(b): A transmitter activated automatically shall cease transmission with 5 seconds after activation, (i.e. maximum 5 seconds of operation).

- Results:  
Transmission is not automatically activated.

FCC 15.231(a)(3): Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

IC A1.1.1(c): Periodic transmissions at regular predetermined intervals are not permitted, except as provided in A1.1.5. However, polling or supervision transmissions, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed 2 seconds per hour for each transmitter.

- Results:  
The transmitter does not perform periodic transmissions.

FCC 15.231(a)(4): Intentional radiators which are employed for radio control purposes during emergencies involving fire, security and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

IC A1.1.1(d): Intentional radiators employed for radio control purposes during emergencies involving fire, security of goods (e.g. burglar alarms), and safety-of-life, when activated to signal an alarm, may operate during the interval of the alarm condition.

- Results:  
This device is not employed for radio control purposes during emergencies involving fire, security and safety for life.

FCC 15.231(a)(5): Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

- Results:  
The device is not employed for security systems.



**Retlif Testing Laboratories**

Report No. R-1984P-1

**Requirements and Test Results (con't)**

**Requirement:**

**FCC Section 15.231(b) - Field Strength of Emissions**

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the limits specified in Table 1.

**IC RSS-210, A1.1.2(1) - Field Strengths and Frequency Bands**

The field strength of emissions from momentarily operated intentional radiators shall not exceed the limits specified in Table 1:

Table 1 - Test Limits, Field Strength of Emissions

Fundamental Frequency (MHz)	Field Strength of Fundamental microvolts/meter @ 3 meters (watts, e.i.r.p.) Quasi Peak or Average	Field Strength of Spurious Emissions microvolts/meter @ 3 meters Quasi Peak or Average
260 to 470	3,750 to 12,500**	375 to 1,250**

\*\*Linear Interpolations

For 260-470 MHz: FS (microvolts/m) = (41.67 x F) - 7,083

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

The Fundamental and Harmonic Emissions limits for a device operating at 315 MHz are listed in Table 2.

Table 2 - Fundamental and Harmonic Limits

Frequency of Operation (MHz)	Fundamental (µV/m)		Harmonics (µV/m)	
	Average	Peak	Average	Peak
315	6042	60416	605	6042

- Results:

The Fundamental and Harmonics field strengths did not exceed the limits specified in Table 2 at a test distance of 3 meters, taken with an Average Detector. See Table 3 for the Fundamental and Harmonic emissions test results.

Table 3 - Fundamental and Harmonics Test Results

Fundamental Frequency (MHz)	Maximum Fundamental (µV/m)	Maximum Harmonics (µV/m)
315	2747.894	243.2204



**Retlif Testing Laboratories**

Report No. R-1984P-1

## Requirements and Test Results (con't)

### Requirement:

#### FCC Section 15.231(b)(2) - Duty Cycle Determination-Pulsed Operation

Intentional radiators operating under the provisions of the Section shall demonstrate compliance with the limits on the field strength emissions, as shown in Table 1, based on the average value of the measured emissions. As an alternative, compliance with the limits in the Table 1 may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in Section 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of Section 15.205 shall be demonstrated using the measurement instrumentation specified in that Section.

#### IC RSS-GEN, Paragraph 4.5, Pulsed Operation

When the field strength (or envelope power) is not constant or when it is in pulses, and an average detector is specified to be used, the value of field strength or power shall be determined by averaging over one complete pulse train, including blanking intervals within the pulse train, as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 seconds, the average value (of field strength or output power) shall be determined during a 0.1 second interval during which the field strength or power is at its maximum value.

The unit's RF output was directly coupled to the input of the spectrum analyzer. The analyzer was set for a frequency span of 0 Hz. The sweep time was then adjusted in order to display one full pulse train. The transmitter on time was then summed and compared to the time for one full cycle in order to obtain the duty cycle. (See plots for additional information).

- Results:

The emissions did not exceed the limits specified in Table 1. See below for the exact method of calculating the average field strength.

$$\begin{aligned}\text{Transmitter On Time} &= \underline{11.78} \text{ milliseconds (maximum per cycle)} \\ \text{Transmitter Cycle Time} &= \underline{100} \text{ milliseconds (100 ms maximum)} \\ \text{Transmitter Duty Cycle} &= \underline{0.12} \text{ \%}\end{aligned}$$

#### CALCULATION

$$\begin{aligned}84 \text{ pulses of } 104.28 \text{ } \mu\text{sec} &= \underline{11.78} \text{ milliseconds} \\ \text{Duty Cycle } (11.78/100) &= \underline{0.12} \text{ \%} \\ \text{Correction Factor} = 20 \log (0.12) &= \underline{-18.42} \text{ dB}\end{aligned}$$



Retlif Testing Laboratories

Report No. R-1984P-1



## Requirements and Test Results (con't)

### Requirement:

#### **FCC Section 15.231(b)(3) - Field Strength of Spurious Emissions**

The limits on the field strength of the spurious emissions specified in Table 1 are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in Table 1 or to the general limits shown in Section 15.209, whichever limit permits a higher field strength.

#### **IC RSS-210, A1.1.2(3) - Field Strength of Unwanted Emissions**

The limits on the field strength of unwanted emissions in Table 4 of RSS-210 are based on the fundamental frequency of the intentional radiator. Unwanted emissions shall be attenuated to the limits shown in Table 2 of RSS-210 or to the limits shown in Table 4 of RSS-210, whichever is less stringent.

- Results:  
No spurious emissions were observed within 20 dB of the specified limit.

### Requirement:

#### **FCC Section 15.231(c) - Bandwidth of Emissions**

The bandwidth of the emissions shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

#### **IC RSS-210, A1.1.3 - Bandwidth of Momentary Signals**

For the purpose of Section A1.1, the 99% bandwidth shall be no wider than 0.25% of the center frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

- Results:  
The 20 dB bandwidth was measured and found to be 102.204 kHz.



**Retlif Testing Laboratories**

Report No. R-1984P-1

## General Requirements FCC and IC

### **Spectrum Analyzer Desensitization Considerations**

Due to the nature of the emissions being measured, care was taken to ensure that the resolution bandwidth of the spectrum analyzer was adequate to provide accurate measurements. The following formula was utilized:

$$\text{minimum bandwidth} = 1/\{\text{minimum pulse width (in seconds)} \times 1.5\} = \text{Hz}$$

Setting pulse desensitization equal to zero and utilizing the minimum observed pulse width of 104.28  $\mu\text{s}$  yields a minimum required bandwidth of 6393 Hz. FCC specified bandwidths of 100 kHz and 1 MHz were utilized below and above 1 GHz, respectively.



**Retlif Testing Laboratories**

Report No. R-1984P-1

## Equipment Lists

### FCC Section 15.231(b) - Field Strength of Emissions IC RSS-210, A1.1.2(1) - Field Strength and Frequency Bands

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
1232	AGILENT / HP	PRE-AMPLIFIER	1 - 26.5GHz	8449B	5/30/2012	6/31/2013
3258	EMCO ANTENNA	DOUBLE RIDGED GUIDE	1 GHZ - 18GHZ	3115	2/24/2012	8/31/2013
4029	RETLIF	OPEN AREA TEST SITE	3 / 10 Meters	RNH	7/24/2012	7/24/2015
5053	EMCO	BICONILOG ANTENNA	26 MHz - 3 GHz	3142C	11/14/2011	6/30/2013
5070	ROHDE & SCHWARZ	EMI TEST RECEIVER	20 Hz - 40 GHz	ESIB40	11/6/2012	11/30/2013

### FCC Section 15.231(b)(2) - Duty Cycle Determination - Pulsed Operation IC RSS-210, A1.1.2(2), RSS-GEN, 4.5 - Pulsed Operation

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5070	ROHDE & SCHWARZ	EMI TEST RECEIVER	20 Hz - 40 GHz	ESIB40	11/6/2012	11/30/2013
5133	NARDA	10DB ATTENUATOR	DC - 12.4 GHz	757C-10	10/16/2012	10/31/2013

### FCC Section 15.231(b)(3) - Field Strength of Spurious Emissions IC RSS-210, A1.1.2(3) - Field Strength of Unwanted Emissions

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
1232	AGILENT / HP	PRE-AMPLIFIER	1 - 26.5GHz	8449B	5/30/2012	6/31/2013
3207	EMCO	ACTIVE LOOP	10 KHZ - 30 MHZ	6502	9/17/2012	9/30/2013
3258	EMCO ANTENNA	DOUBLE RIDGED GUIDE	1 GHZ - 18GHZ	3115	2/24/2012	8/31/2013
4029	RETLIF	OPEN AREA TEST SITE	3 / 10 Meters	RNH	7/24/2012	7/24/2015
5053	EMCO	BICONILOG ANTENNA	26 MHz - 3 GHz	3142C	11/14/2011	6/30/2013
R444	AGILENT / HP	SPECTRUM ANALYZER	100 Hz - 26.5 GHz	E7405A;A	7/6/2012	7/6/2013

### FCC Section 15.231(c) - Bandwidth of Emission IC RSS-210, A1.1.3 - Bandwidth of Momentary Signals

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5070	ROHDE & SCHWARZ	EMI TEST RECEIVER	20 Hz - 40 GHz	ESIB40	11/6/2012	11/30/2013
5133	NARDA	10DB ATTENUATOR	DC - 12.4 GHz	757C-10	10/16/2012	10/31/2013



**Retlif Testing Laboratories**

Report No. R-1984P-1

**FCC Section 15.231(b) - Field Strength of Emissions  
IC RSS-210, A1.1.2(1) - Field Strength and Frequency Bands**

**Test Data**



**Retlif Testing Laboratories**

Report No. R-1984P-1

<b>Test Method:</b>		FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)					
		IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands					
<b>Customer:</b>		Dorman Products			<b>Job No.:</b>		R-1984P-1
<b>Test Sample:</b>		315 MHz Remote Keyless Transmitter					
<b>Model No.:</b>		99143					
<b>Operating Mode:</b>		Continuously transmitting a RF signal at 315 MHz					
<b>Technician:</b>		M. Seamans			<b>Date:</b>		June 18, 2013
<b>Notes:</b>		Detector: Peak, Unless otherwise specified			Test Distance: 3 Meters		
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)/Meters	X / Y / Z	dBµV	dB	dBµV/m	µV/m	µV/m
315	V / 1.9	X	66.88	17.3	84.18	16180.80	60416
315	V / 1.8	Y	67.20	17.3	84.50	16788.04	
315	V / 1.7	Z	58.60	17.3	75.90	6237.35	
315	H / 2.5	X	64.17	17.3	81.47	11844.04	
315	H / 1.7	Y	63.90	17.3	81.20	11481.54	
315	H / 1.0	Z	69.90	17.3	87.20	22908.68	60416
630	V / 1.6	X	37.69	24.66	62.35	1310.69	6042
630	V / 1.6	Y	41.48	24.66	66.14	2027.68	
630	V / 1.2	Z	40.00	24.66	64.66	1710.02	
630	H / 1.4	X	40.01	24.66	64.67	1711.99	
630	H / 1.6	Y	43.32	24.66	67.98	2506.11	
630	H / 1.2	Z	39.75	24.66	64.41	1661.50	6042
945	V / 1.0	X	23.23	31.00	54.23	514.64	6042
945	V / 1.0	Y	21.84	31.00	52.84	438.53	
945	V / 1.0	Z	22.41	31.00	53.41	468.27	
945	H / 1.0	X	22.37	31.00	53.37	466.12	
945	H / 1.0	Y	21.27	31.00	52.27	410.68	
945	H / 1.0	Z	21.49	31.00	52.49	421.21	6042
1260.00	V / 1.5	X	57.47	-2.90	54.57	535.18	6042
1260.00	V / 1.0	Y	66.22	-2.90	63.32	1465.55	
1260.00	V / 1.0	Z	59.58	-2.90	56.68	682.34	
1260.00	H / 1.0	X	60.13	-2.90	57.23	726.94	
1260.00	H / 1.0	Y	54.67	-2.90	51.77	387.70	
1260.00	H / 1.0	Z	60.81	-2.90	57.91	786.14	6042
1575.00	V / 1.0	X	49.45	-2.00	47.45	235.78	5000
1575.00	V / 1.0	Y	58.11	-2.00	56.11	639.00	
1575.00	V / 1.0	Z	62.84	-2.00	60.84	1101.54	
1575.00	H / 1.0	X	55.15	-2.00	53.15	454.46	
1575.00	H / 1.0	Y	52.75	-2.00	50.75	344.75	
1575.00	H / 1.0	Z	55.66	-2.00	53.66	481.95	5000



**Retlif Testing Laboratories**

Report No. R-1984P-1

<b>Test Method:</b>	FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)						
	IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands						
<b>Customer:</b>	Dorman Products	<b>Job No.:</b>	R-1984P-1				
<b>Test Sample:</b>	315 MHz Remote Keyless Transmitter						
<b>Model No.:</b>	99143						
<b>Operating Mode:</b>	Continuously transmitting a RF signal at 315 MHz						
<b>Technician:</b>	M. Seamans	<b>Date:</b>	June 18, 2013				
<b>Notes:</b>	Detector: Peak, unless otherwise specified			Test Distance: 3 Meters			
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)-Meters	X / Y / Z	dBµV	dB	dBµV/m	uV/m	uV/m
1890.00	V / 1.0	X	47.42	-0.30	47.12	226.99	6042
1890.00	V / 1.0	Y	48.38	-0.30	48.08	253.51	
1890.00	V / 1.0	Z	46.32	-0.30	46.02	199.99	
1890.00	H / 1.0	X	47.01	-0.30	46.71	216.52	
1890.00	H / 1.0	Y	48.92	-0.30	48.62	269.77	
1890.00	H / 1.0	Z	48.14	-0.30	47.84	246.60	6042
2205.00	V / 1.0	X	53.50	0.90	54.40	524.81	5000
2205.00	V / 1.0	Y	50.64	0.90	51.54	377.57	
2205.00	V / 1.0	Z	55.23	0.90	56.13	640.47	
2205.00	H / 1.0	X	48.99	0.90	49.89	312.25	
2205.00	H / 1.0	Y	62.24	0.90	63.14	1435.49	
2205.00	H / 1.0	Z	57.94	0.90	58.84	874.98	5000
2520.00	V / 1.0	X	56.01	2.20	58.21	813.77	6042
2520.00	V / 1.0	Y	49.21	2.20	51.41	371.96	
2520.00	V / 1.0	Z	48.08	2.20	50.28	326.59	
2520.00	H / 1.0	X	46.36	2.20	48.56	267.92	
2520.00	H / 1.0	Y	60.00	2.20	62.20	1288.25	
2520.00	H / 1.0	Z	56.21	2.20	58.41	832.72	6042
2835.00	V / 1.0	X	45.07	5.10	50.17	322.48	5000
2835.00	V / 1.0	Y	51.58	5.10	56.68	682.34	
2835.00	V / 1.0	Z	45.81	5.10	50.91	351.16	
2835.00	H / 1.0	X	50.59	5.10	55.69	608.84	
2835.00	H / 1.0	Y	48.10	5.10	53.20	457.09	
2835.00	H / 1.0	Z	45.64	5.10	50.74	344.35	5000
3150.00	V / 1.0	X	48.49	6.00	54.49	530.27	6042
3150.00	V / 1.0	Y	49.48	6.00	55.48	594.29	
3150.00	V / 1.0	Z	47.13	6.00	53.13	453.42	
3150.00	H / 1.0	X	45.70	6.00	51.70	384.59	
3150.00	H / 1.0	Y	50.17	6.00	56.17	643.43	
3150.00	H / 1.0	Z	45.83	6.00	51.83	390.39	6042
The frequency range was scanned from 30 MHz to 3.2 GHz. All emissions not recorded were more than 20 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.							



**Retlif Testing Laboratories**

Report No. R-1984P-1

<b>Test Method:</b>	FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)						
	IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands						
<b>Customer:</b>	Dorman Products	<b>Job No.:</b>		R-1984P-1			
<b>Test Sample:</b>	315 MHz Remote Keyless Transmitter						
<b>Model No.:</b>	99143						
<b>Operating Mode:</b>	Continuously transmitting a RF signal at 315 MHz						
<b>Technician:</b>	M. Seamans			<b>Date:</b>	June 18, 2013		
<b>Notes:</b>	Average values calculated from Peak readings		Duty Cycle: 12 %		Correction: -18.42 dB		
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Duty Cycle Correction	Corrected Reading	Converted Reading	Avg. Limit
MHz	(V/H)-Meters	X / Y / Z	dB $\mu$ V/m	dB	dB $\mu$ V/m	$\mu$ V/m	$\mu$ V/m
315	V / 1.9	X	84.18	-18.42	65.76	1940.886	6042
315	V / 1.8	Y	84.50	-18.42	66.08	2013.724	
315	V / 1.7	Z	75.90	-18.42	57.48	748.1695	
315	H / 2.5	X	81.47	-18.42	63.05	1420.692	
315	H / 1.7	Y	81.20	-18.42	62.78	1377.209	
315	H / 1.0	Z	87.20	-18.42	68.78	2747.894	6042
630	V / 1.0	X	49.01	-18.42	43.93	157.2172	605
630	V / 1.8	Y	53.52	-18.42	47.72	243.2204	
630	V / 1.0	Z	45.59	-18.42	46.24	205.1162	
630	H / 1.0	X	49.10	-18.42	46.25	205.3525	
630	H / 1.0	Y	46.88	-18.42	49.56	300.6076	
630	H / 1.0	Z	47.92	-18.42	45.99	199.2967	605
945	V / 1.0	X	63.39	-18.42	35.81	61.73053	605
945	V / 1.0	Y	63.86	-18.42	34.42	52.60173	
945	V / 1.0	Z	61.61	-18.42	34.99	56.16943	
945	H / 1.0	X	60.33	-18.42	34.95	55.91135	
945	H / 1.0	Y	63.17	-18.42	33.85	49.26063	
945	H / 1.0	Z	62.20	-18.42	34.07	50.52426	605
1260	V / 1.5	X	54.57	-18.42	36.15	64.19	605
1260	V / 1.0	Y	63.32	-18.42	44.9	175.79	
1260	V / 1.0	Z	56.68	-18.42	38.26	81.85	
1260	H / 1.0	X	57.23	-18.42	38.81	87.20	
1260	H / 1.0	Y	51.77	-18.42	33.35	46.51	
1260	H / 1.0	Z	57.91	-18.42	39.49	94.30	605
1575	V / 1.0	X	47.45	-18.42	29.03	28.28	500
1575	V / 1.0	Y	56.11	-18.42	37.69	76.65	
1575	V / 1.0	Z	60.84	-18.42	42.42	132.13	
1575	H / 1.0	X	53.15	-18.42	34.73	54.51	
1575	H / 1.0	Y	50.75	-18.42	32.33	41.35	
1575	H / 1.0	Z	53.66	-18.42	35.24	57.81	500



**Retlif Testing Laboratories**

Report No. R-1984P-1

<b>Test Method:</b>	FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)						
	IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands						
<b>Customer:</b>	Dorman Products			<b>Job No.:</b>	R-1984P-1		
<b>Test Sample:</b>	315 MHz Remote Keyless Transmitter						
<b>Model No.:</b>	99143						
<b>Operating Mode:</b>	Continuously transmitting a RF signal at 315 MHz						
<b>Technician:</b>	M. Seamans			<b>Date:</b>	June 18, 2013		
<b>Notes:</b>	Average values calculated from Peak readings		Duty Cycle: 12 %		Correction: -18.42 dB		
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Duty Cycle Correction	Corrected Reading	Converted Reading	Avg. Limit
MHz	(V/H)-Meters	X / Y / Z	dBµV/m	dB	dBµV/m	µV/m	µV/m
1890.00	V / 1.0	X	47.12	-18.42	28.7	27.23	605
1890.00	V / 1.0	Y	48.08	-18.42	29.66	30.41	
1890.00	V / 1.0	Z	46.02	-18.42	27.6	23.99	
1890.00	H / 1.0	X	46.71	-18.42	28.29	25.97	
1890.00	H / 1.0	Y	48.62	-18.42	30.2	32.36	
1890.00	H / 1.0	Z	47.84	-18.42	29.42	29.58	605
2205.00	V / 1.0	X	54.40	-18.42	35.98	62.95	500
2205.00	V / 1.0	Y	51.54	-18.42	33.12	45.29	
2205.00	V / 1.0	Z	56.13	-18.42	37.71	76.82	
2205.00	H / 1.0	X	49.89	-18.42	31.47	37.45	
2205.00	H / 1.0	Y	63.14	-18.42	44.72	172.19	
2205.00	H / 1.0	Z	58.84	-18.42	40.42	104.95	500
2520.00	V / 1.0	X	58.21	-18.42	39.79	97.61	605
2520.00	V / 1.0	Y	51.41	-18.42	32.99	44.62	
2520.00	V / 1.0	Z	50.28	-18.42	31.86	39.17	
2520.00	H / 1.0	X	48.56	-18.42	30.14	32.14	
2520.00	H / 1.0	Y	62.20	-18.42	43.78	154.53	
2520.00	H / 1.0	Z	58.41	-18.42	39.99	99.88	605
2835.00	V / 1.0	X	50.17	-18.42	31.75	38.68	500
2835.00	V / 1.0	Y	56.68	-18.42	38.26	81.85	
2835.00	V / 1.0	Z	50.91	-18.42	32.49	42.12	
2835.00	H / 1.0	X	55.69	-18.42	37.27	73.03	
2835.00	H / 1.0	Y	53.20	-18.42	34.78	54.83	
2835.00	H / 1.0	Z	50.74	-18.42	32.32	41.30	500
3150.00	V / 1.0	X	54.49	-18.42	36.07	63.61	605
3150.00	V / 1.0	Y	55.48	-18.42	37.06	71.29	
3150.00	V / 1.0	Z	53.13	-18.42	34.71	54.39	
3150.00	H / 1.0	X	51.70	-18.42	33.28	46.13	
3150.00	H / 1.0	Y	56.17	-18.42	37.75	77.18	
3150.00	H / 1.0	Z	51.83	-18.42	33.41	46.83	605



**Retlif Testing Laboratories**

Report No. R-1984P-1



**FCC Section 15.231(b)(2) - Duty Cycle Determination - Pulsed Operation  
IC RSS-210, A1.1.2(2), RSS-GEN, 4.5 - Pulsed Operation**

**Test Data**




**Retlif Testing Laboratories**

Report No. R-1984P-1




Delta 1 [T1] RBW 10 kHz RF Att 20 dB  
 Ref Lvl 116 dBµV -6.61 dB VBW 30 kHz  
 291.783567 ms SWT 350 ms Unit dBµV

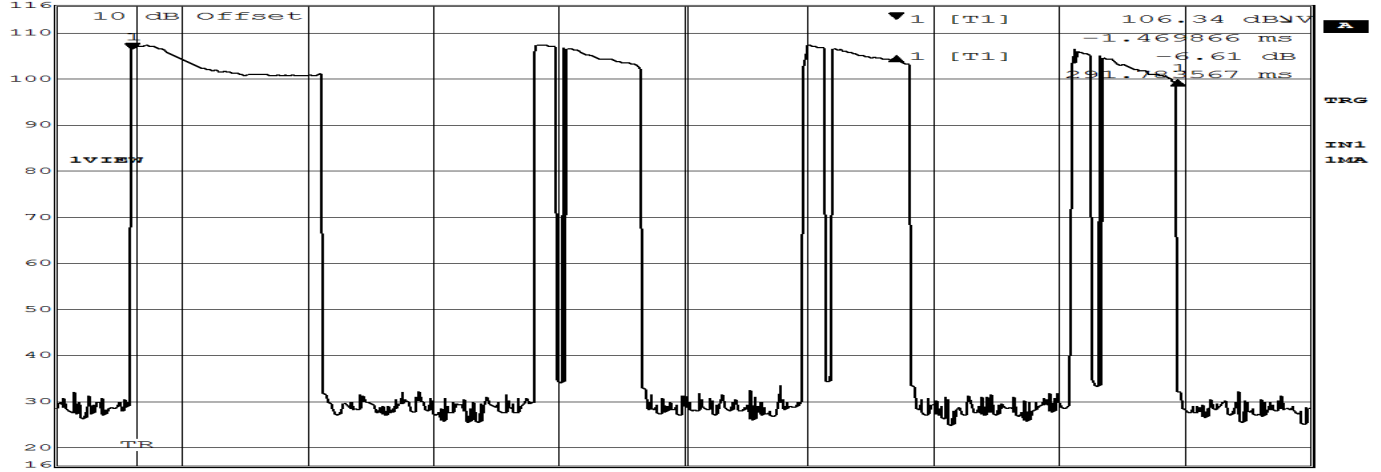

Date: 17.JUN.2013 10:24:20



Delta 1 [T1] RBW 10 kHz RF Att 20 dB  
 Ref Lvl 116 dBµV -0.19 dB VBW 30 kHz  
 53.106212 ms SWT 100 ms Unit dBµV

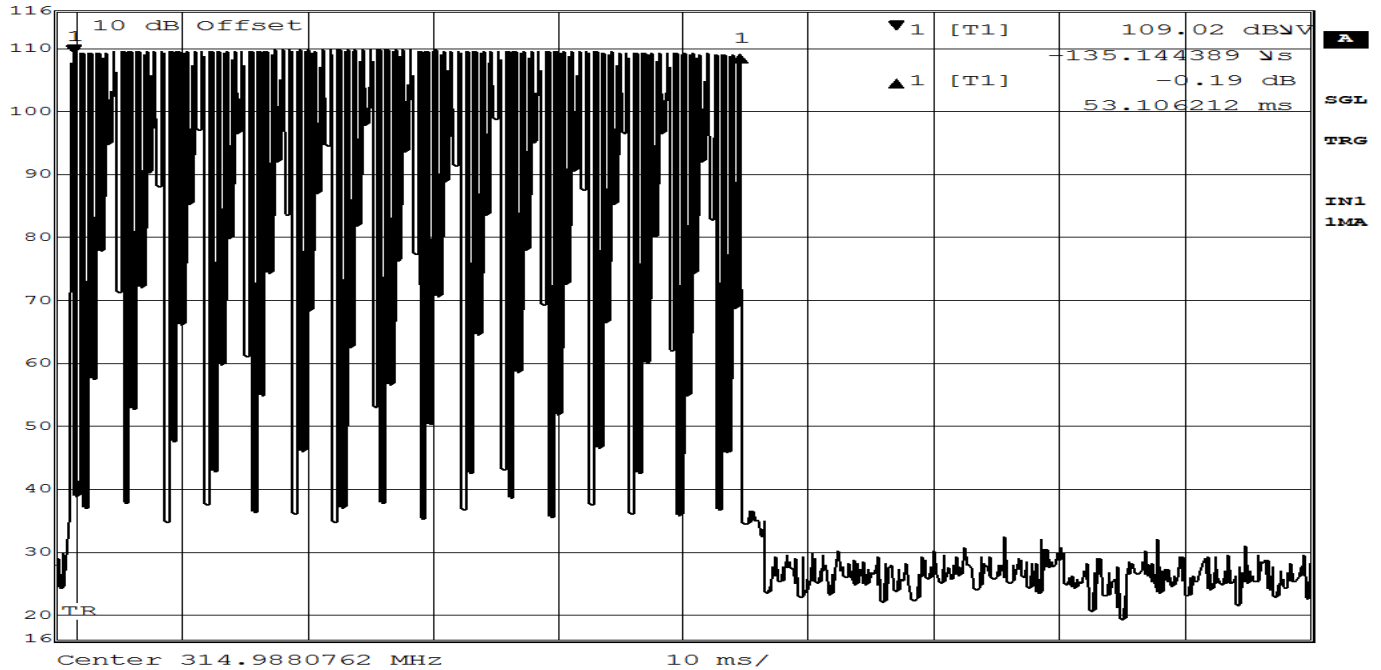

Date: 17.JUN.2013 10:29:54

Test Method: FCC Part 15.231(b), Duty Cycle Determination IC RSS-210 A1.1.2(2) Pulsed Operation

Notes: Measurement of cycle time = 100.00mSec.




Retlif Testing Laboratories

Report No. R-1984P-1



Delta 1 [T1] RBW 10 kHz RF Att 20 dB  
 Ref Lvl -0.32 dB VBW 30 kHz  
 116 dBμV 140.280561 μs SWT 10 ms Unit dBμV

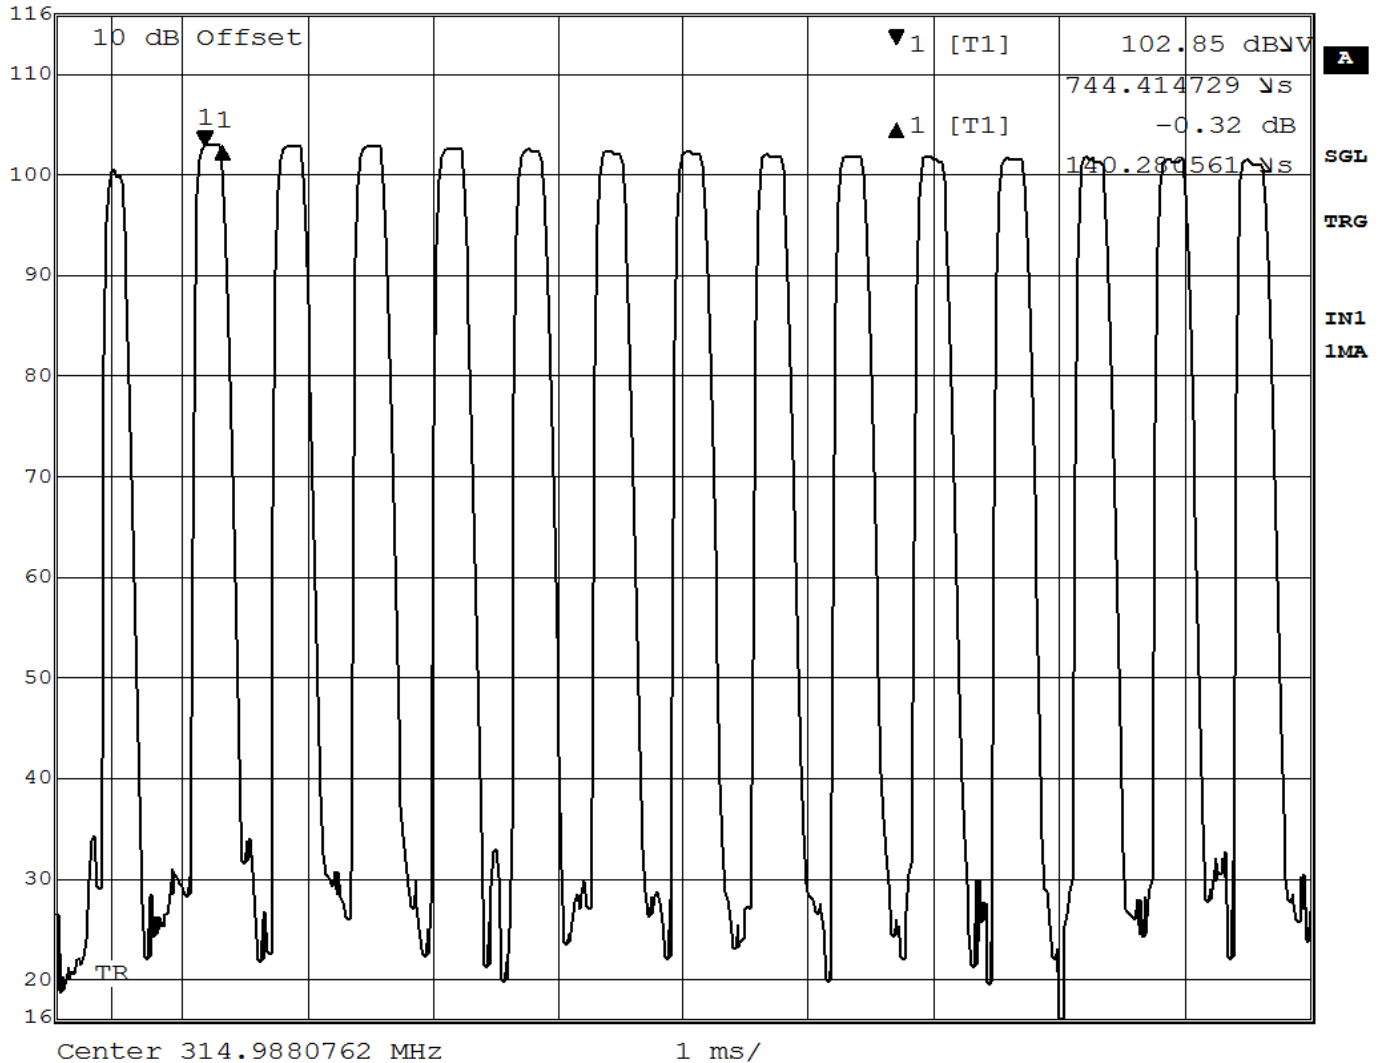

Date: 17.JUN.2013 10:36:36

Test Method: FCC Part 15.231(b), Duty Cycle Determination IC RSS-210 A1.1.2(2) Pulsed Operation

Notes: Pulse width 1 = 140.28us; 84 pulses



Retlif Testing Laboratories

Report No. R-1984P-1

**FCC Section 15.231(b)(3) - Field Strength of Spurious Emissions  
IC RSS-210, A1.1.2(3) - Field Strength of Unwanted Emissions**

**Test Data**



**Retlif Testing Laboratories**

Report No. R-1984P-1

<b>Test Method:</b>	<b>FCC Part 15 Subpart C, Field Strength of Spurious Emissions, Section 15.231(b).</b>						
	<b>IC RSS-210, A1.1.2 (3) Field Strength of Unwanted Emissions</b>						
<b>Customer:</b>	Dorman Products				<b>Job No.:</b>	R-1984P-1	
<b>Test Sample:</b>	315 MHz Remote Keyless Transmitter						
<b>Model No.:</b>	99143						
<b>Operating Mode:</b>	Continuously transmitting a RF signal at 315.MHz						
<b>Technician:</b>	M. Seamans				<b>Date:</b>	June 17, 2013	
<b>Notes:</b>	Test Distance: 3 Meters Detector: Quasi-Peak from 30 MHz to 1 GHz, Average above 1 GHz						
<b>Transmit Frequency</b>	<b>Test Frequency</b>	<b>Antenna/ EUT Orientation</b>	<b>Meter Reading</b>	<b>Correction Factor</b>	<b>Corrected Reading</b>	<b>Converted Reading</b>	<b>Limit At 300 Meters</b>
MHz	MHz	Polarization/	dBuV	dB	dBuV/m	uV/m	uV/m
315.00	0.009	-	-	-	-	-	2400/F(kHz)
		-	-	-	-	-	
315.00	0.490	-	-	-	-	-	2400/F(kHz)
<b>Transmit Frequency</b>	<b>Test Frequency</b>	<b>Antenna/ EUT Orientation</b>	<b>Meter Reading</b>	<b>Correction Factor</b>	<b>Corrected Reading</b>	<b>Converted Reading</b>	<b>Limit At 30 Meters</b>
MHz	MHz	Polarization/ Axis	dBuV	dB	dBuV/m	uV/m	uV/m
315.00	0.490	-	-	-	-	-	24000/F(kHz)
		-	-	-	-	-	
	1.705	-	-	-	-	-	24000/F(kHz)
	1.705	-	-	-	-	-	30.00
		-	-	-	-	-	
315.00	30.00	-	-	-	-	-	30.00
<b>Transmit Frequency</b>	<b>Test Frequency</b>	<b>Antenna/ EUT Orientation</b>	<b>Meter Reading</b>	<b>Correction Factor</b>	<b>Corrected Reading</b>	<b>Converted Reading</b>	<b>Limit At 3 Meters</b>
MHz	MHz	Polarization/	dBuV	dB	dBuV/m	uV/m	uV/m
315.00	30.00	-	-	-	-	-	100.00
		-	-	-	-	-	
	*35.00	H	6.36	16.24	22.6	13.50	
		-	-	-	-	-	
	88.00	-	-	-	-	-	100.00
	88.00	-	-	-	-	-	150.00
		-	-	-	-	-	
	*110.00	V	7.97	10.03	18.00	7.90	
	*195.00	H	7.60	12.40	20.00	10.00	
	*205.00	H	8.08	12.32	20.40	10.50	
		-	-	-	-	-	
	216.00	-	-	-	-	-	150.00
	216.00	-	-	-	-	-	200.00
		-	-	-	-	-	
	*600.00	H	7.82	24.18	32.00	39.80	
	*995.00	H	9.45	29.15	38.60	85.10	
		-	-	-	-	-	
	960.00	-	-	-	-	-	200.00
	960.00	-	-	-	-	-	500.00
		-	-	-	-	-	
315.00	3200.00	-	-	-	-	-	500.00



**Retlif Testing Laboratories**

Report No. R-1984P-1

**FCC Section 15.231(c) - Bandwidth of Emission  
IC RSS-210, A1.1.3 - Bandwidth of Momentary Signals**

**Test Data**




**Retlif Testing Laboratories**

Report No. R-1984P-1

Retlif Testing Laboratories, R-1984P-1

FCC Section 15.231(c) Bandwidth of Emission

Customer: Dorman Products  
 Test Sample: 315MHz Remote Keyless Transmitter  
 Model Number: 99143  
 Test Specification: FCC Part 15, Subpart C, Section 15.231  
 Mode of Operation: Continuously transmitting a RF signal at 315 MHz  
 Technician/Date: M. Seamans / June 17<sup>th</sup>, 2013

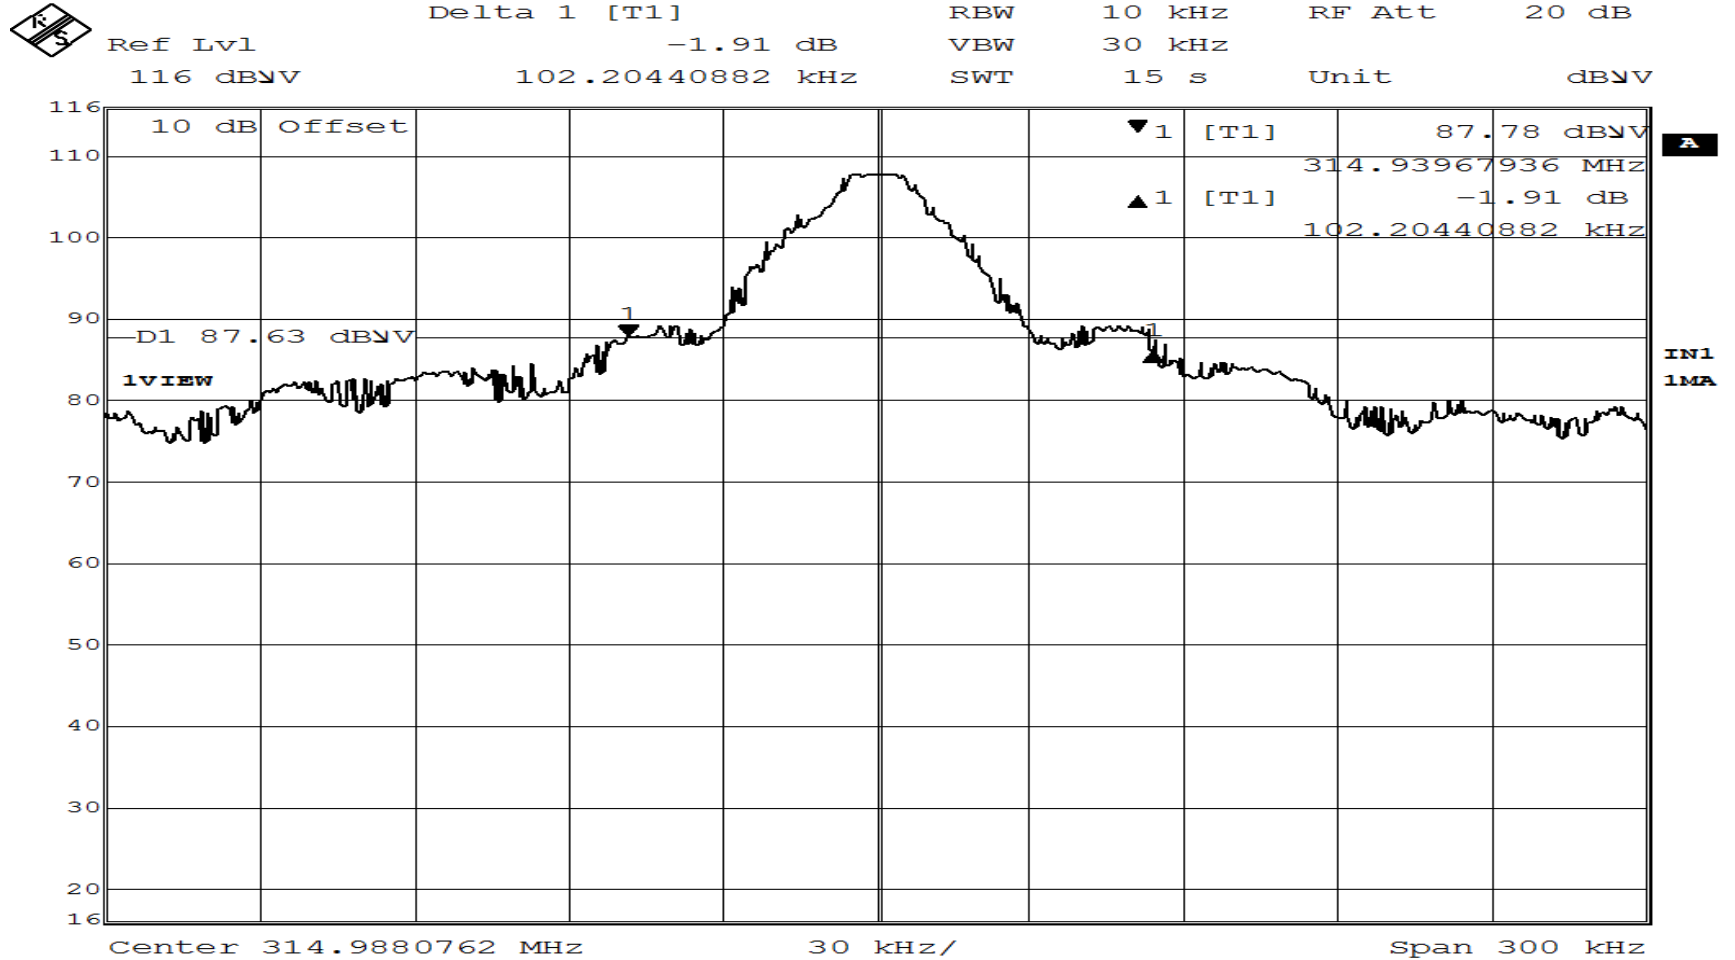


Date: 17.JUN.2013 09:26:55

Retlif Testing Laboratories, R-1984P-1

IC RSS-210 A1.1.3 Bandwidth of Momentary Signals

Customer: Dorman Products  
 Test Sample: 315MHz Remote Keyless Transmitter  
 Model Number: 99143  
 Test Specification: IC RSS-210 A1.1.3  
 Mode of Operation: Continuously transmitting a RF signal at 315 MHz  
 Technician/Date: M. Seamans/ June 17<sup>th</sup>, 2013

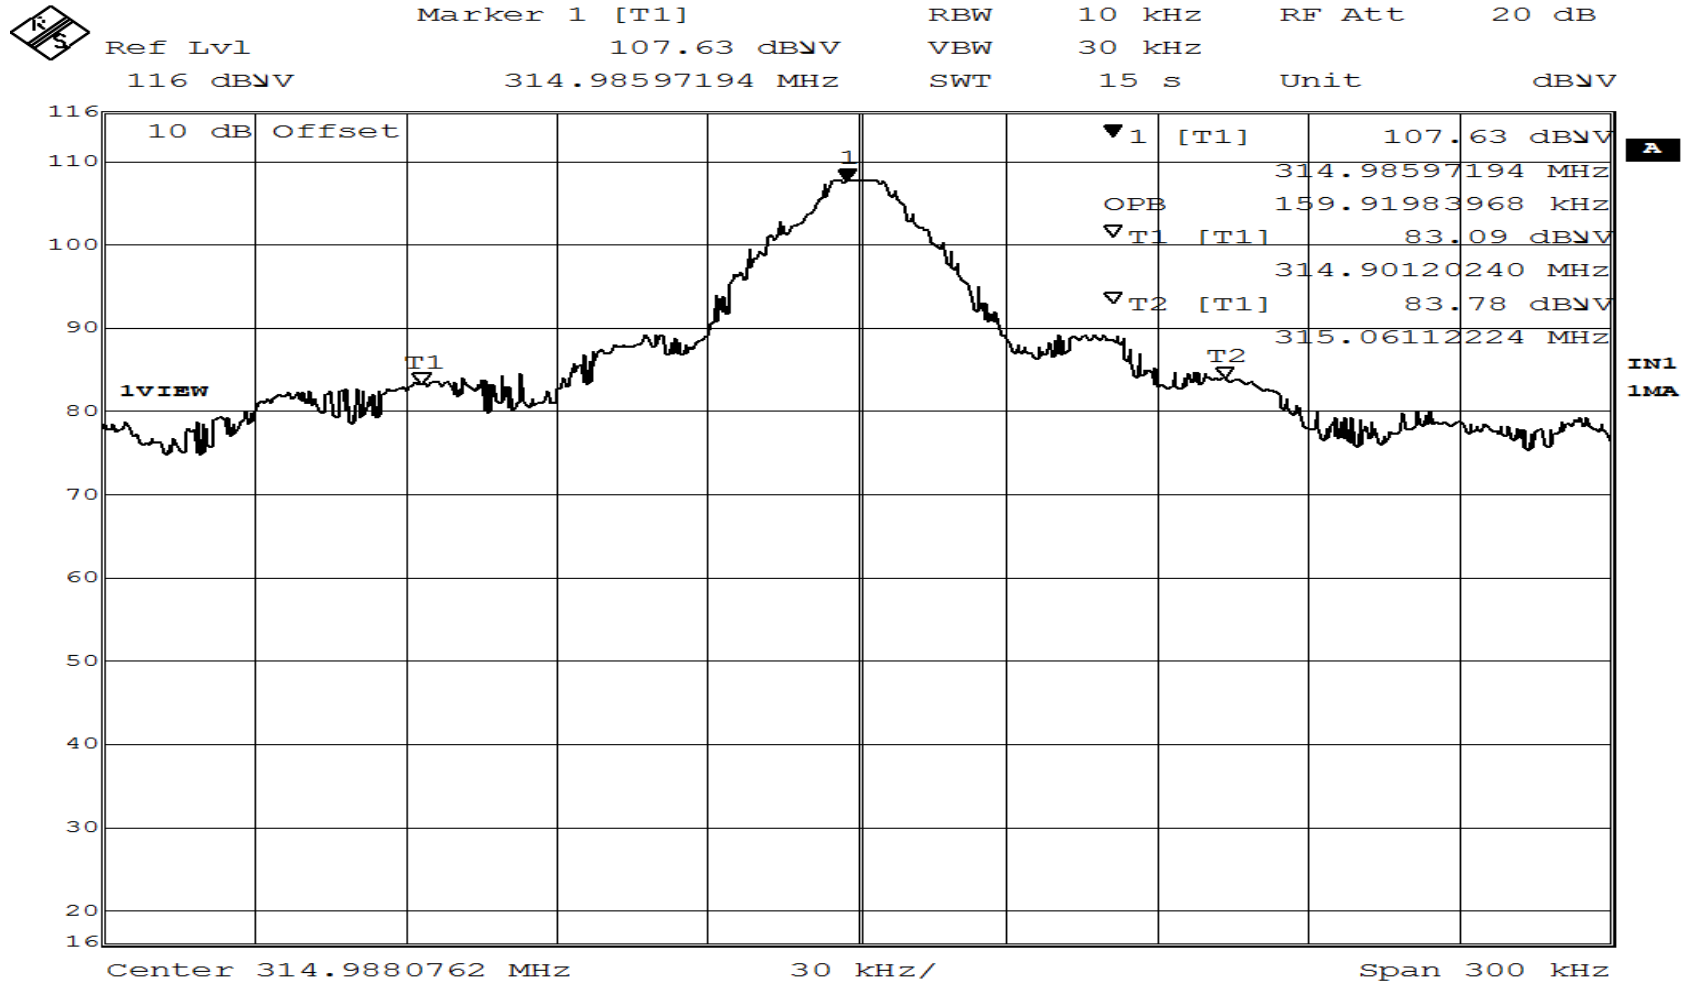

Date: 17.JUN.2013 09:25:11