

TEST REPORT

Reference No..... : WTX21X02013098W
FCC ID : PRDHS04
Applicant : Acrox Technologies Co., Ltd.
Address..... : 4F., No.89, Minshan St., Neihu Dist., Taipei City 114, Taiwan
Product Name : Wireless gaming headset
Test Model. : 100025012/NHT
Standards : FCC Part 15.249
Date of Receipt sample : Feb. 21, 2021
Date of Test..... : Feb. 21, 2021 to Mar. 15, 2021
Date of Issue : Mar. 15, 2021
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308


Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:


Mike Shi / Project Engineer

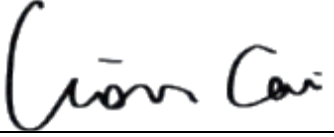
Lion Cai / RF Manager


Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	8
2. SUMMARY OF TEST RESULTS	10
3. ANTENNA REQUIREMENTS	11
3.1 STANDARD APPLICABLE.....	11
3.2 TEST RESULT.....	11
4. RADIATED EMISSIONS	12
4.1 STANDARD APPLICABLE.....	12
4.2 TEST PROCEDURE.....	12
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	15
5. OUT OF BAND EMISSIONS	32
5.1 STANDARD APPLICABLE.....	32
5.2 TEST PROCEDURE.....	32
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	32
6. EMISSION BANDWIDTH	41
6.1 STANDARD APPLICABLE.....	41
6.2 TEST PROCEDURE.....	41
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	41
7. CONDUCTED EMISSIONS	44
7.1 TEST PROCEDURE.....	44
7.2 BASIC TEST SETUP BLOCK DIAGRAM.....	44
7.3 TEST RECEIVER SETUP.....	44
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	44
APPENDIX PHOTOGRAPHS	47

Report version

Version No.	Date of issue	Description
Rev.00	Mar. 15, 2021	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Acrox Technologies Co., Ltd.
 Address of applicant: 4F., No.89, Minshan St., Neihu Dist., Taipei City 114, Taiwan

Manufacturer: Acrox Technologies Co., Ltd
 Address of manufacturer: Hsinmin Industria, Changan Town, Dongguan City, Guangdong China

General Description of EUT	
Product Name:	Wireless gaming headset
Trade Name:	onn./ACROX
Model No.:	100025012/NHT
Adding Model(s):	/
Rated Voltage:	Charging Port:DC5V Battery:DC3.7V
Battery Capacity	600mAh
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	2406MHz-2478MHz
Max. Field Strength:	94.31dBuV/m
Modulation:	GFSK
Antenna Type:	ANT 1: PCB Antenna ANT 2: FPC Antenna
Antenna Gain:	ANT 1:0dBi ANT 2: 0dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2406MHz
TM2	Middle Channel	2439MHz
TM3	High Channel	2478MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Type-C cable	1.0	Shielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	/	K-T5B0502000E1	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215(c)	Emission Bandwidth	Compliant

3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a PCB antenna and FPC antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

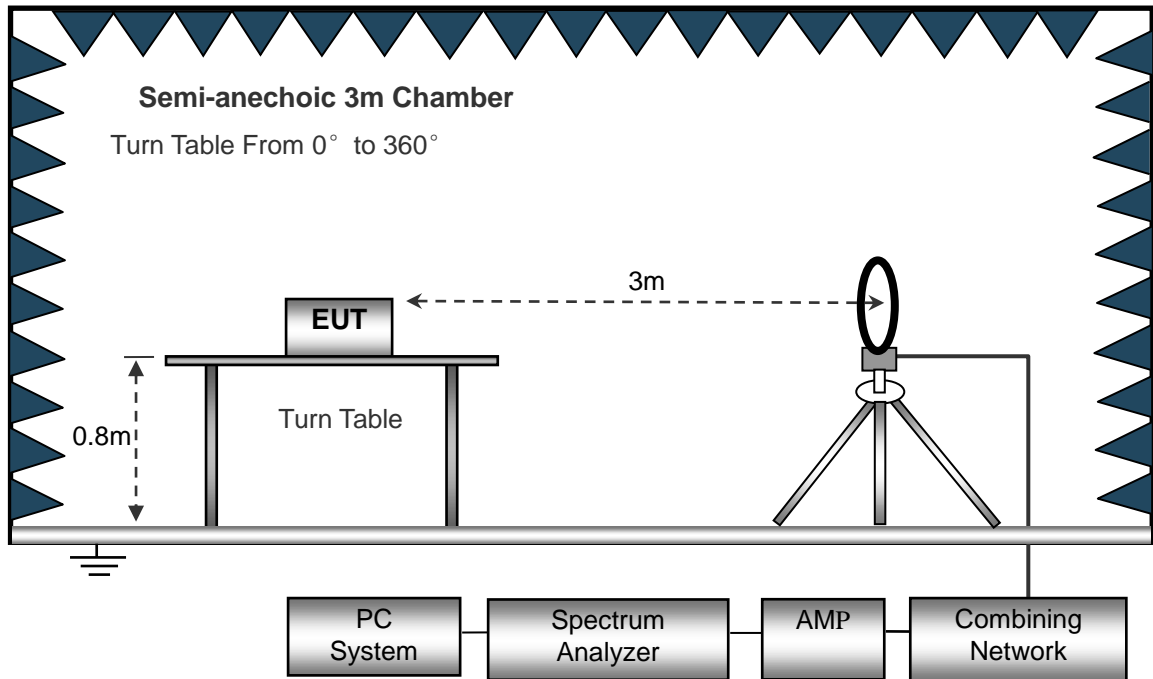

The test setup for emission measurement from 30 MHz to 1 GHz..

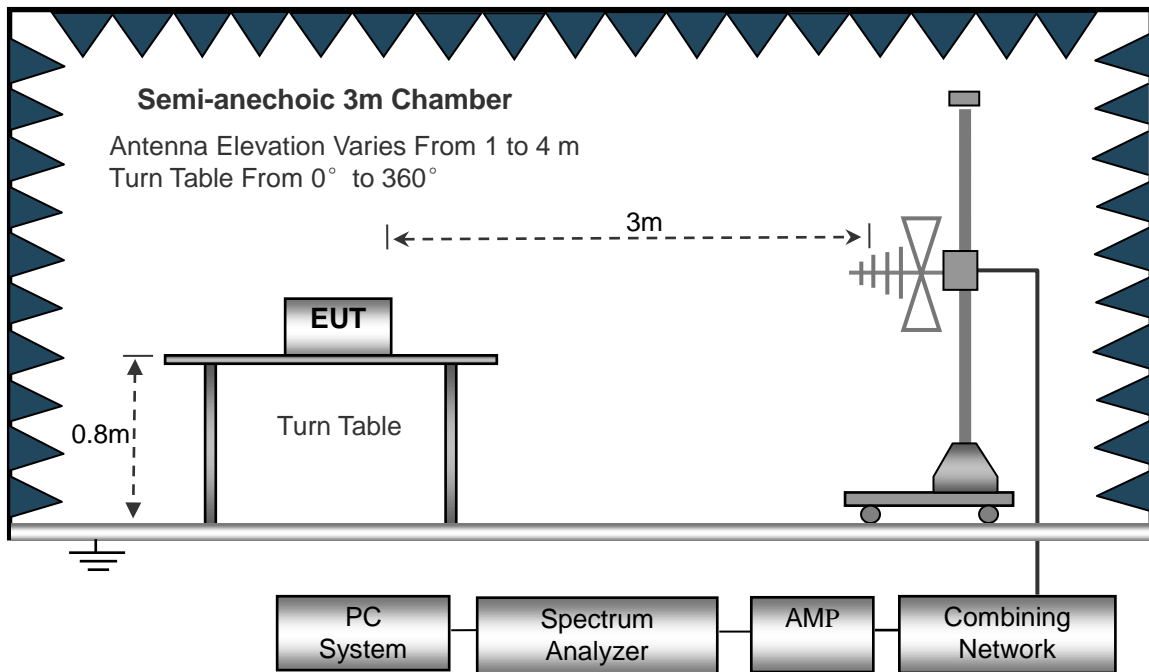

The test setup for emission measurement above 1 GHz..

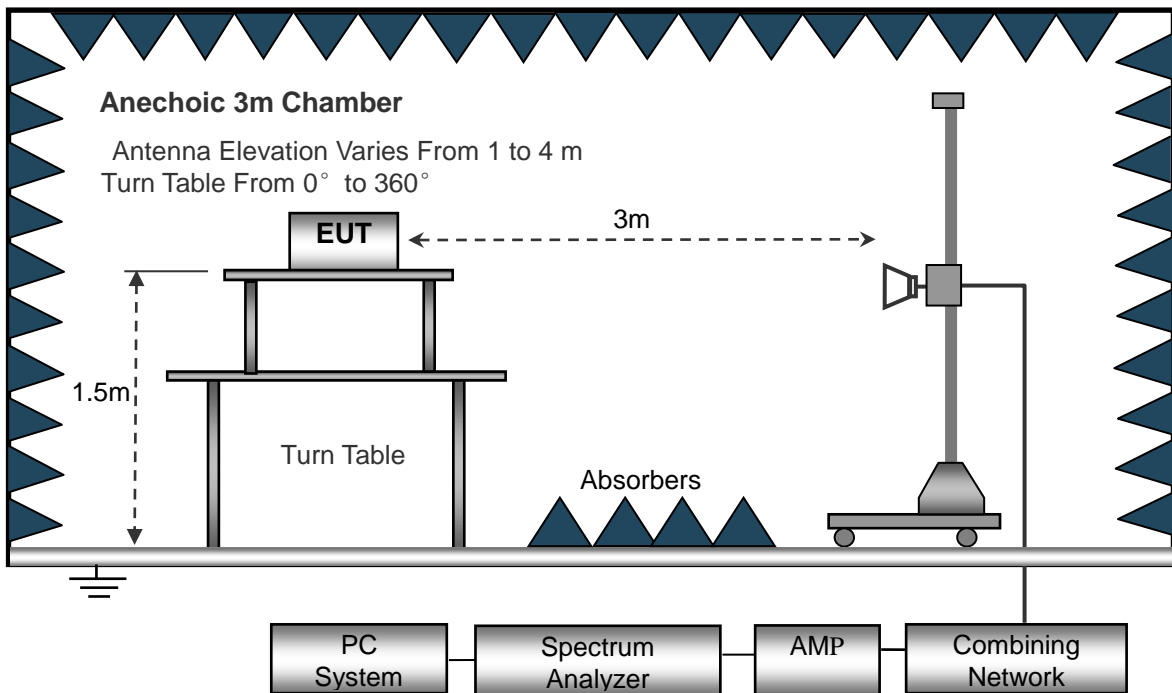

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emissions Below 1GHz
- ANT 1

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

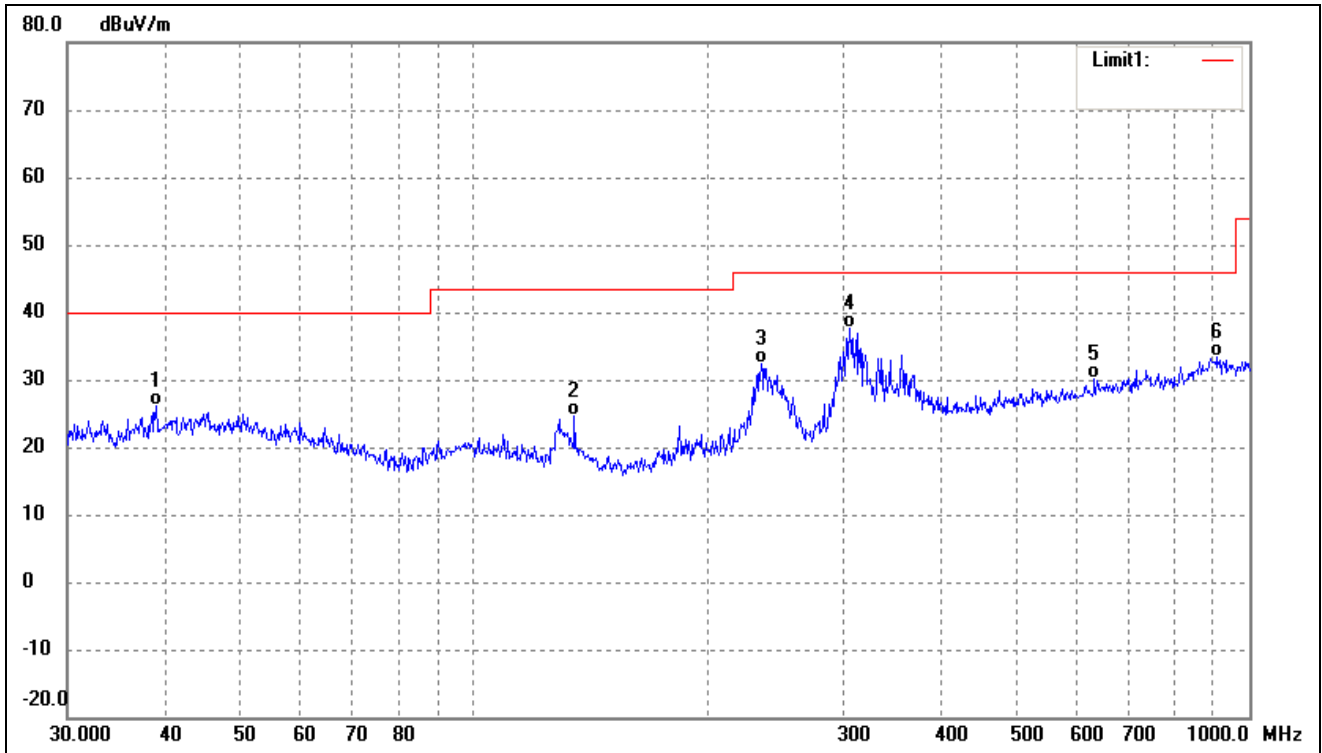


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.0245	38.41	-12.35	26.06	40.00	-13.94	-	-	QP
2	135.0319	41.23	-16.60	24.63	43.50	-18.87	-	-	QP
3	234.9909	44.13	-11.66	32.47	46.00	-13.53	-	-	QP
4	305.6800	46.60	-8.93	37.67	46.00	-8.33	-	-	QP
5	631.6884	32.27	-2.21	30.06	46.00	-15.94	-	-	QP
6	909.6667	31.78	1.67	33.45	46.00	-12.55	-	-	QP

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

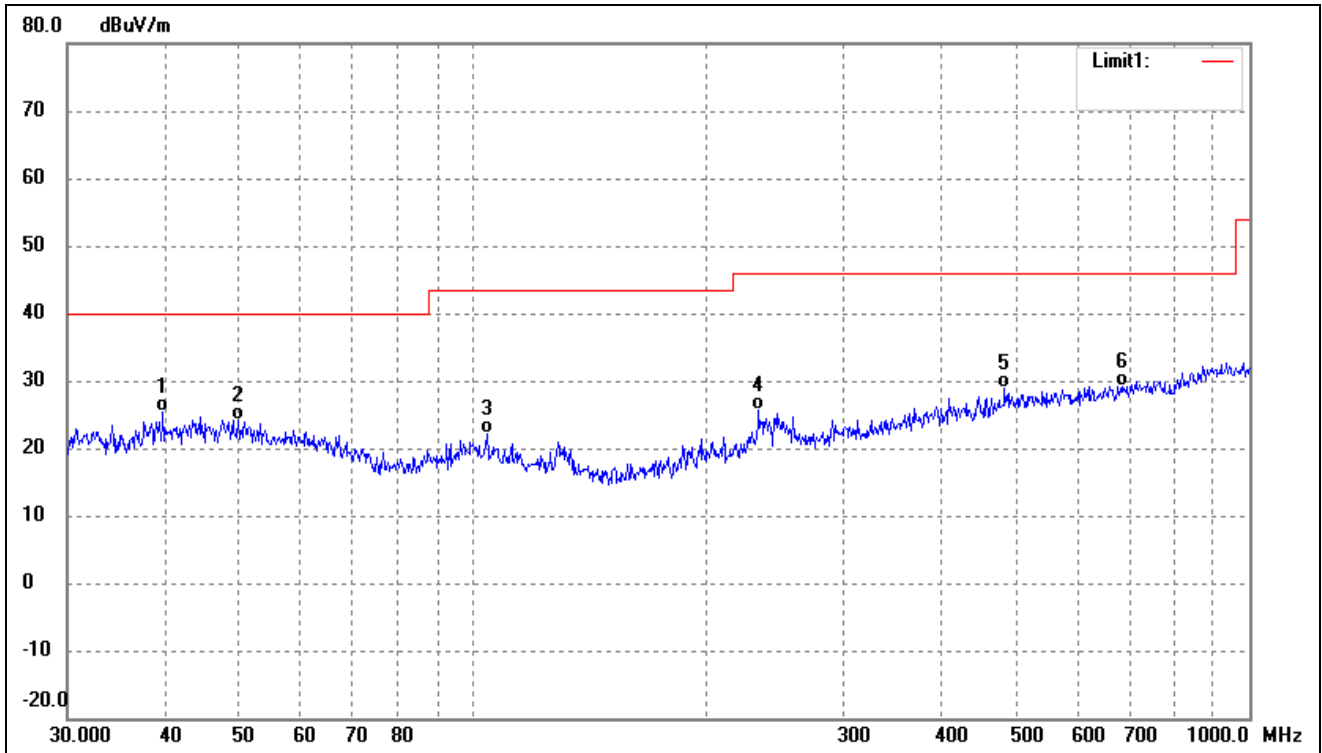


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.8542	37.37	-12.03	25.34	40.00	-14.66	-	-	QP
2	49.7068	35.76	-11.55	24.21	40.00	-15.79	-	-	QP
3	104.1701	35.52	-13.31	22.21	43.50	-21.29	-	-	QP
4	233.3487	37.38	-11.73	25.65	46.00	-20.35	-	-	QP
5	483.9094	33.48	-4.53	28.95	46.00	-17.05	-	-	QP
6	684.7454	31.04	-1.86	29.18	46.00	-16.82	-	-	QP

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

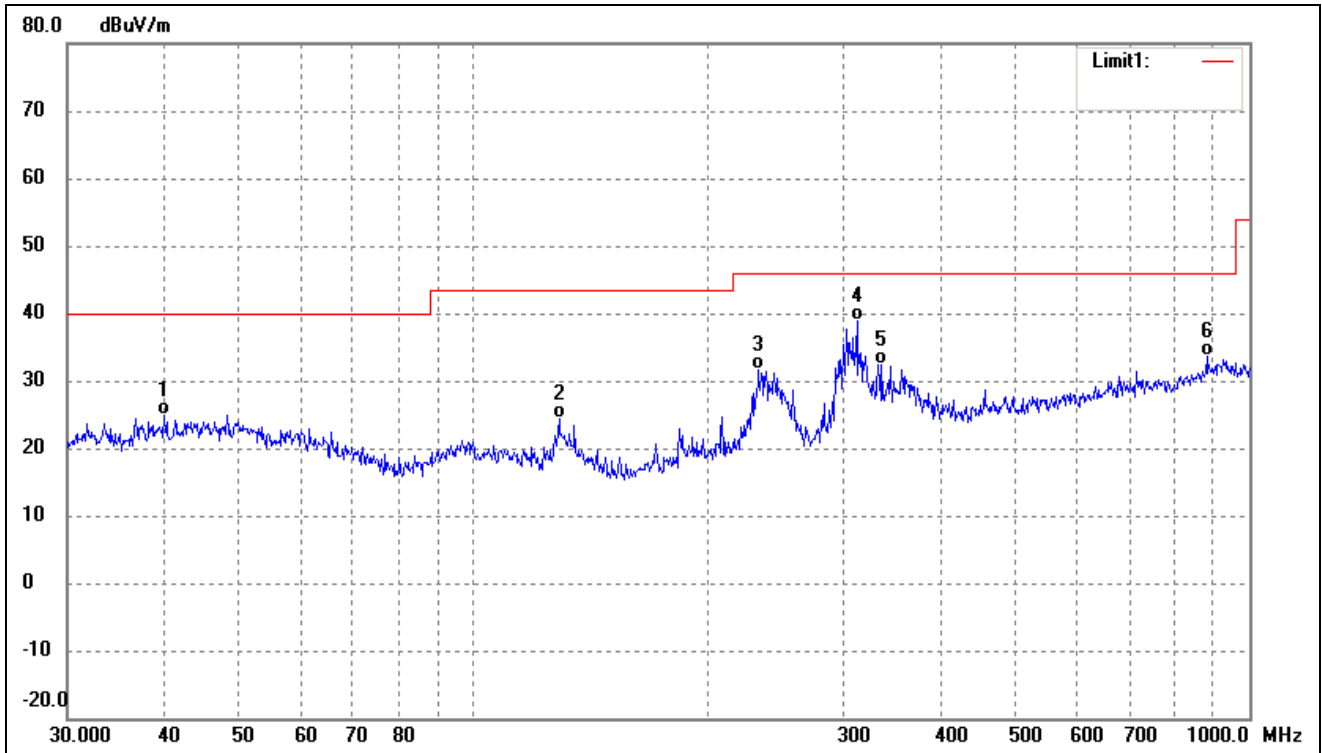


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.9942	36.96	-11.98	24.98	40.00	-15.02	-	-	QP
2	129.0146	41.09	-16.70	24.39	43.50	-19.11	-	-	QP
3	233.3487	43.30	-11.73	31.57	46.00	-14.43	-	-	QP
4	312.1794	47.86	-8.95	38.91	46.00	-7.09	-	-	QP
5	336.0352	40.58	-8.28	32.30	46.00	-13.70	-	-	QP
6	881.4067	32.72	0.79	33.51	46.00	-12.49	-	-	QP

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

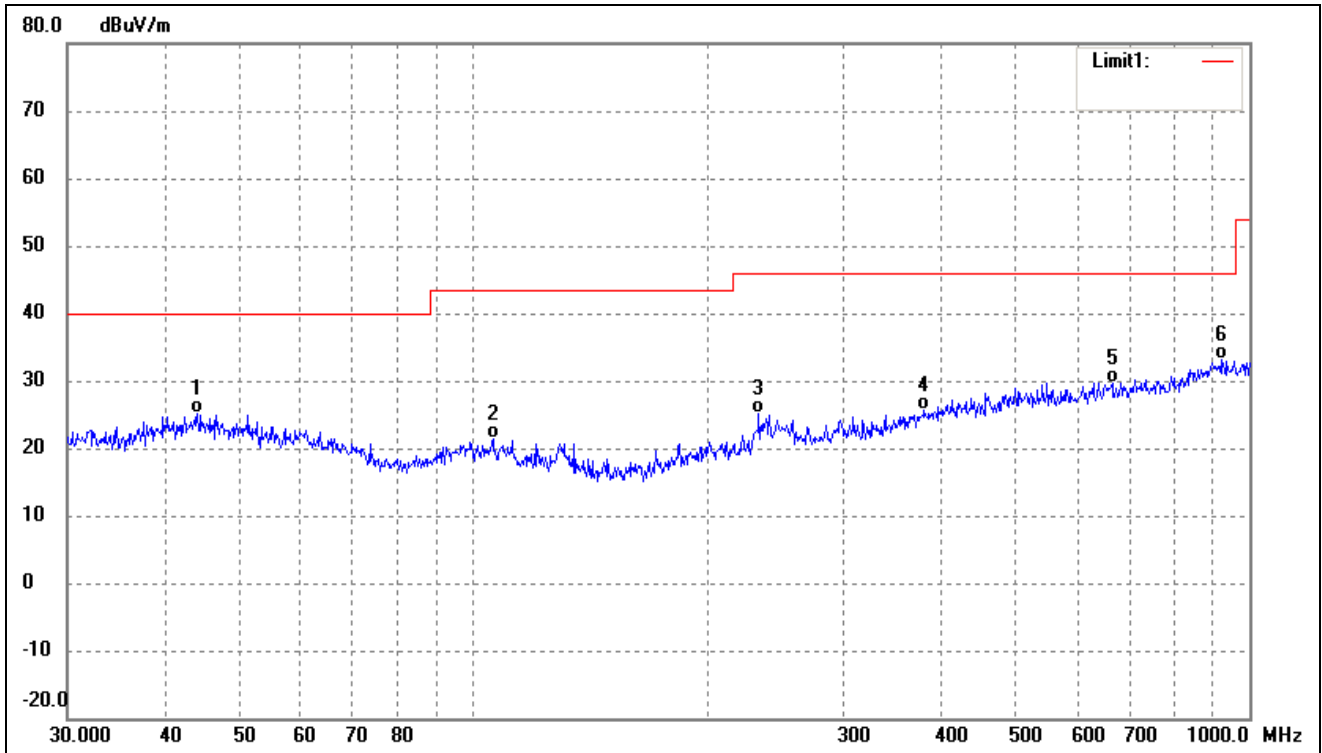


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.1202	37.02	-11.84	25.18	40.00	-14.82	-	-	QP
2	106.0126	34.61	-13.31	21.30	43.50	-22.20	-	-	QP
3	233.3487	36.75	-11.73	25.02	46.00	-20.98	-	-	QP
4	381.2487	32.67	-7.01	25.66	46.00	-20.34	-	-	QP
5	665.8035	31.72	-2.05	29.67	46.00	-16.33	-	-	QP
6	919.2866	31.37	1.78	33.15	46.00	-12.85	-	-	QP

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

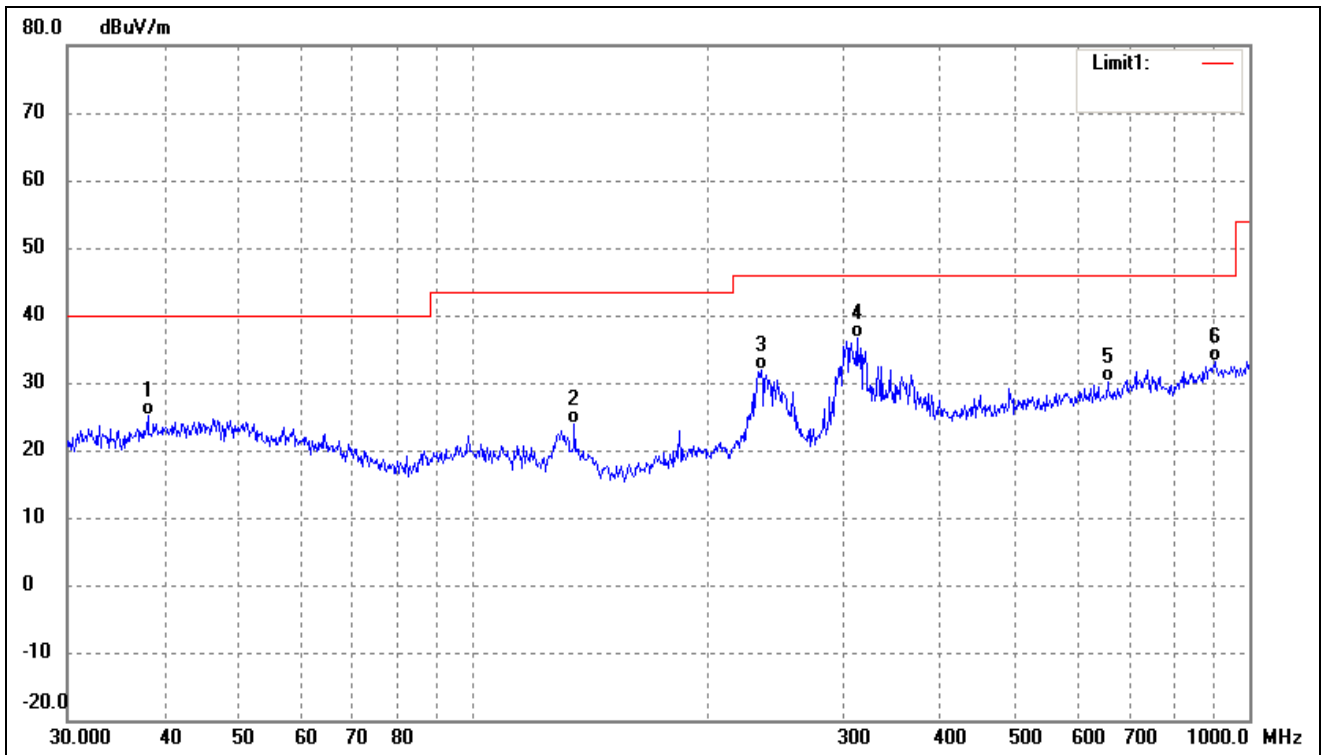

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.0783	37.91	-12.71	25.20	40.00	-14.80	-	-	QP
2	135.0319	40.38	-16.60	23.78	43.50	-19.72	-	-	QP
3	234.9909	43.57	-11.66	31.91	46.00	-14.09	-	-	QP
4	312.1794	45.57	-8.95	36.62	46.00	-9.38	-	-	QP
5	656.5300	32.35	-2.24	30.11	46.00	-15.89	-	-	QP
6	903.3094	31.64	1.60	33.24	46.00	-12.76	-	-	QP


Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

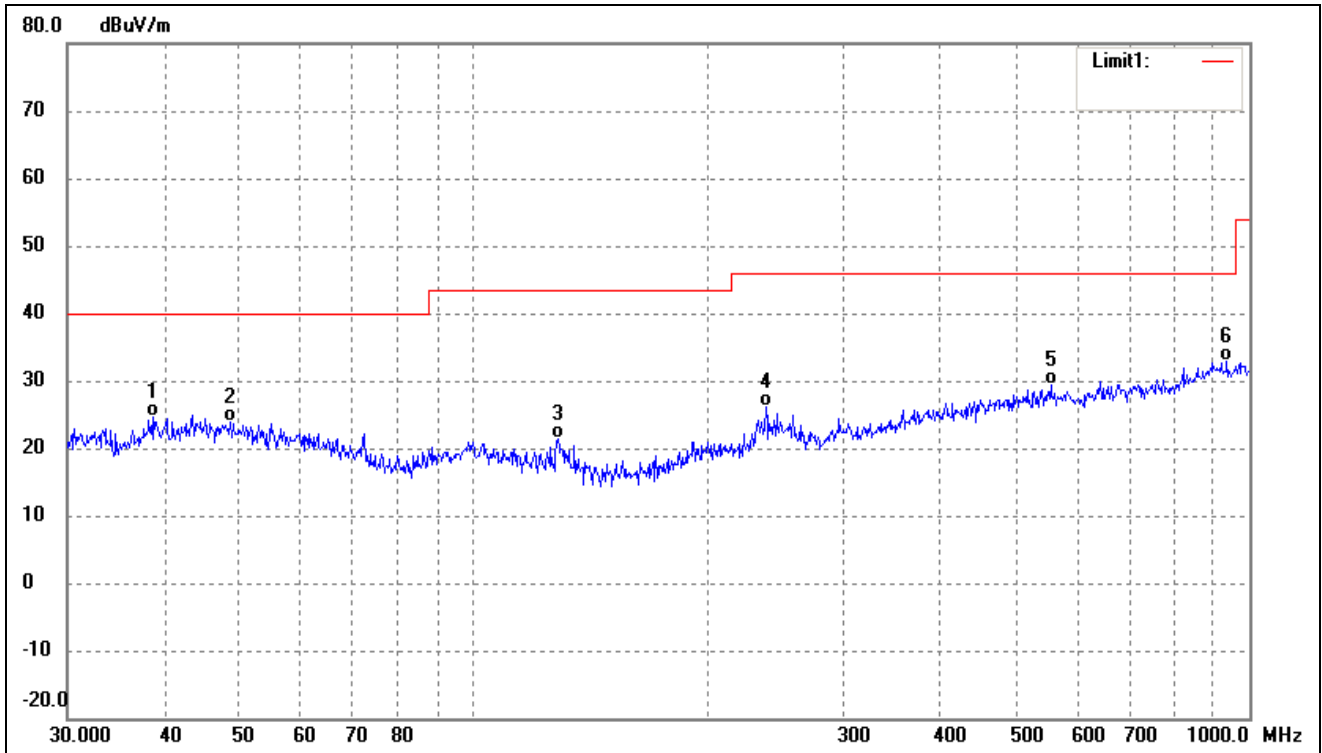

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.6161	37.08	-12.51	24.57	40.00	-15.43	-	-	QP
2	48.6719	35.38	-11.60	23.78	40.00	-16.22	-	-	QP
3	128.5630	37.84	-16.58	21.26	43.50	-22.24	-	-	QP
4	238.3102	37.70	-11.50	26.20	46.00	-19.80	-	-	QP
5	554.8254	32.94	-3.56	29.38	46.00	-16.62	-	-	QP
6	935.5463	31.13	1.65	32.78	46.00	-13.22	-	-	QP


➤ ANT 2

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

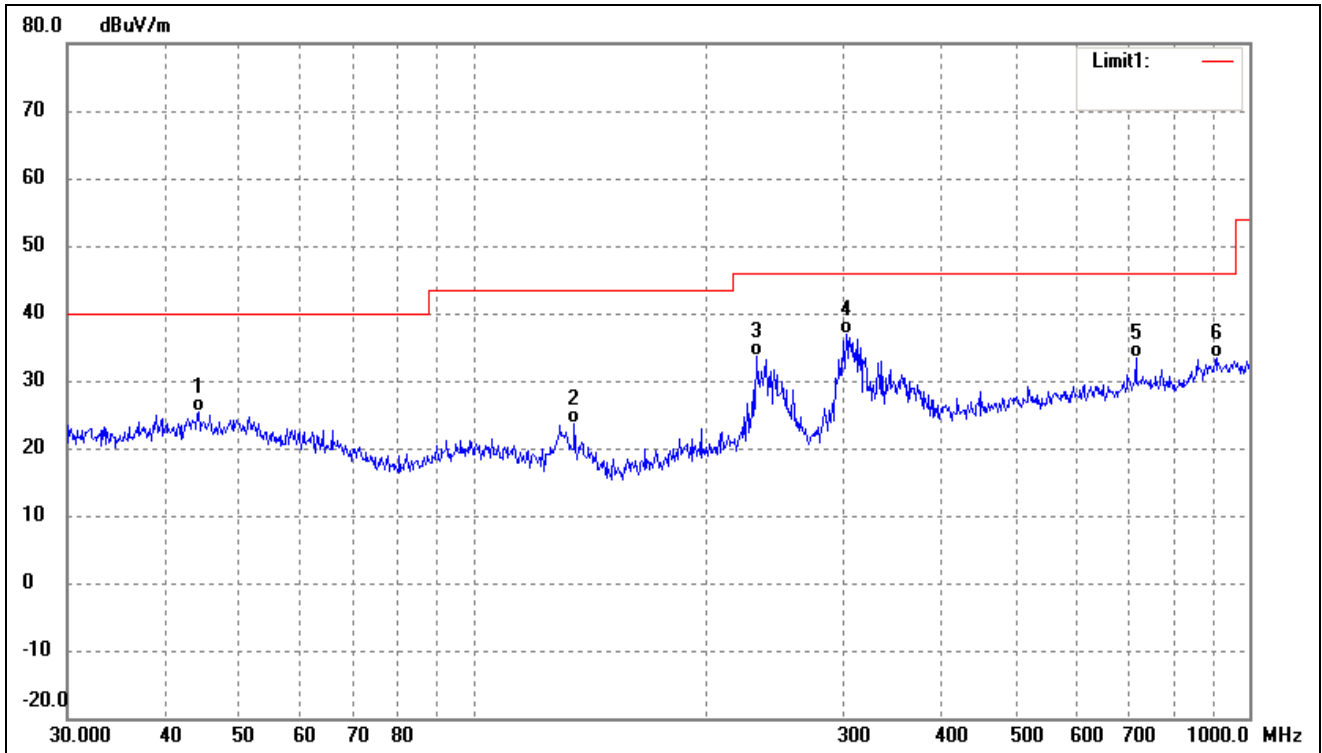


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.2752	37.16	-11.83	25.33	40.00	-14.67	-	-	QP
2	135.0319	40.14	-16.60	23.54	43.50	-19.96	-	-	QP
3	231.7179	45.34	-11.81	33.53	46.00	-12.47	-	-	QP
4	302.4812	45.91	-8.93	36.98	46.00	-9.02	-	-	QP
5	714.1734	34.73	-1.36	33.37	46.00	-12.63	-	-	QP
6	906.4824	31.65	1.62	33.27	46.00	-12.73	-	-	QP

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

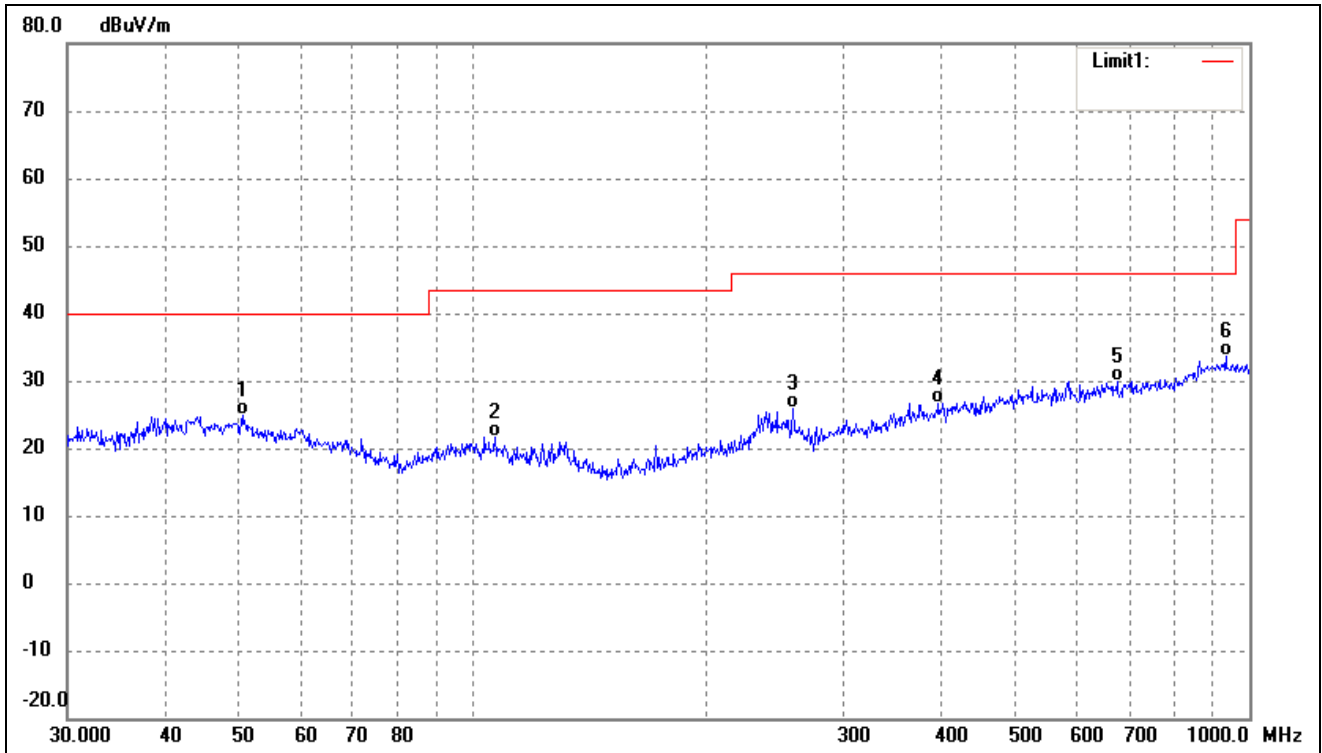


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.4089	36.45	-11.65	24.80	40.00	-15.20	-	-	QP
2	106.7587	34.92	-13.32	21.60	43.50	-21.90	-	-	QP
3	258.3264	36.76	-10.85	25.91	46.00	-20.09	-	-	QP
4	397.6334	33.20	-6.53	26.67	46.00	-19.33	-	-	QP
5	675.2080	31.82	-1.87	29.95	46.00	-16.05	-	-	QP
6	932.2715	31.89	1.71	33.60	46.00	-12.40	-	-	QP

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

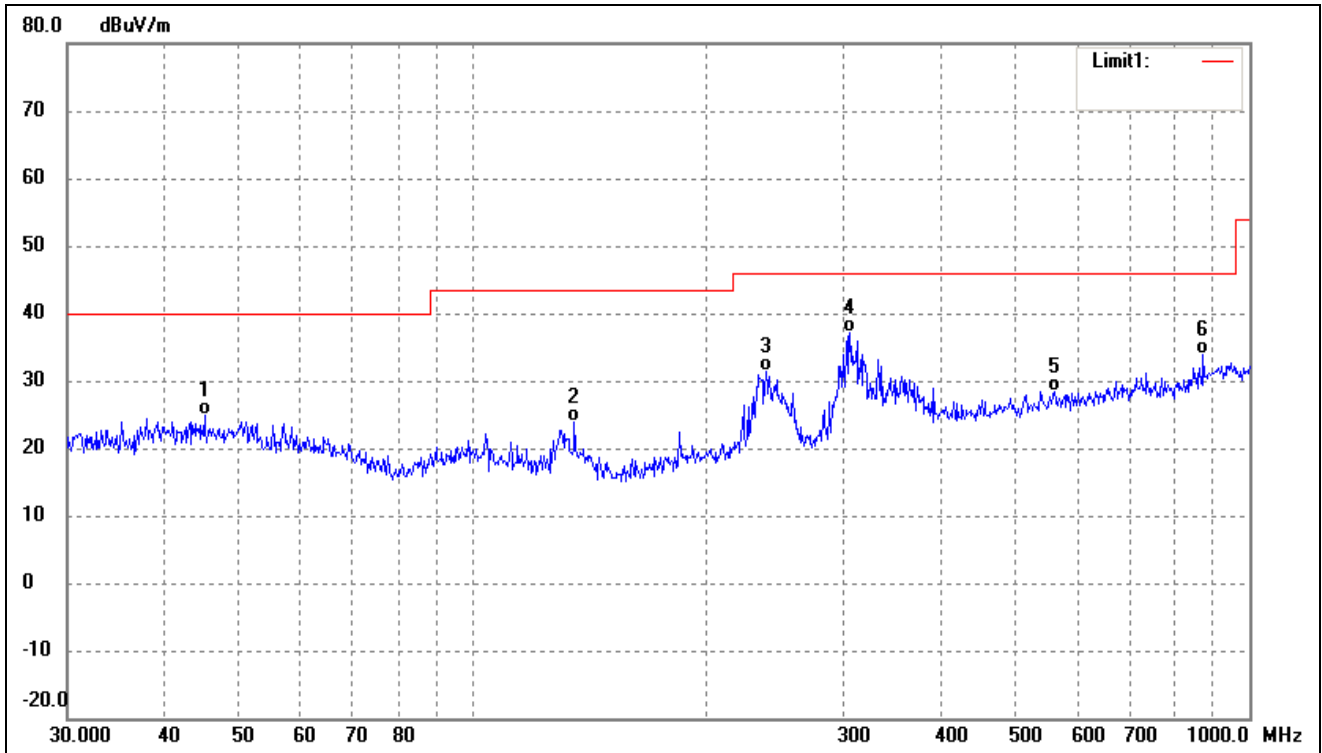


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.0583	36.68	-11.80	24.88	40.00	-15.12	-	-	QP
2	135.0319	40.47	-16.60	23.87	43.50	-19.63	-	-	QP
3	238.3102	42.78	-11.50	31.28	46.00	-14.72	-	-	QP
4	305.6800	45.96	-8.93	37.03	46.00	-8.97	-	-	QP
5	560.6928	31.75	-3.27	28.48	46.00	-17.52	-	-	QP
6	872.1832	33.42	0.51	33.93	46.00	-12.07	-	-	QP

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

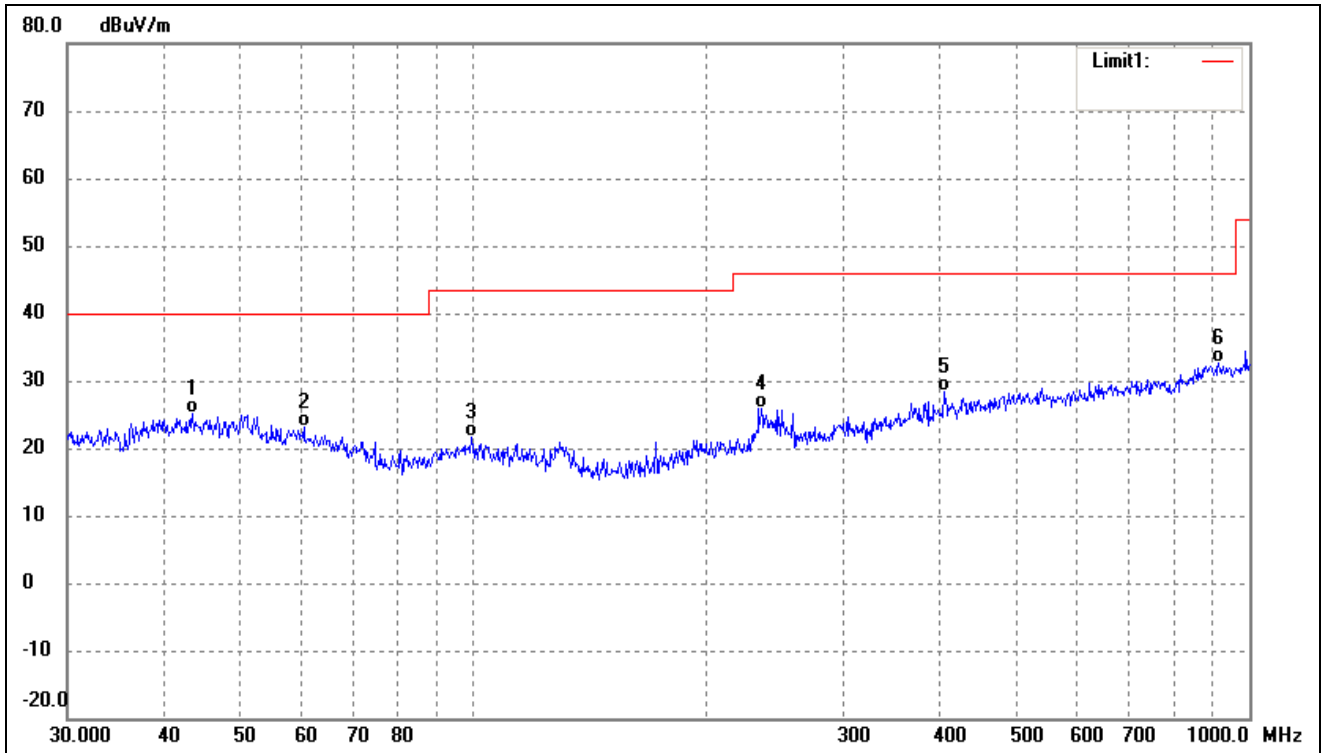


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.5057	36.94	-11.85	25.09	40.00	-14.91	-	-	QP
2	60.4919	36.18	-13.08	23.10	40.00	-16.90	-	-	QP
3	99.5281	34.96	-13.39	21.57	43.50	-21.93	-	-	QP
4	234.9909	37.61	-11.66	25.95	46.00	-20.05	-	-	QP
5	404.6665	34.77	-6.36	28.41	46.00	-17.59	-	-	QP
6	912.8620	31.01	1.71	32.72	46.00	-13.28	-	-	QP

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

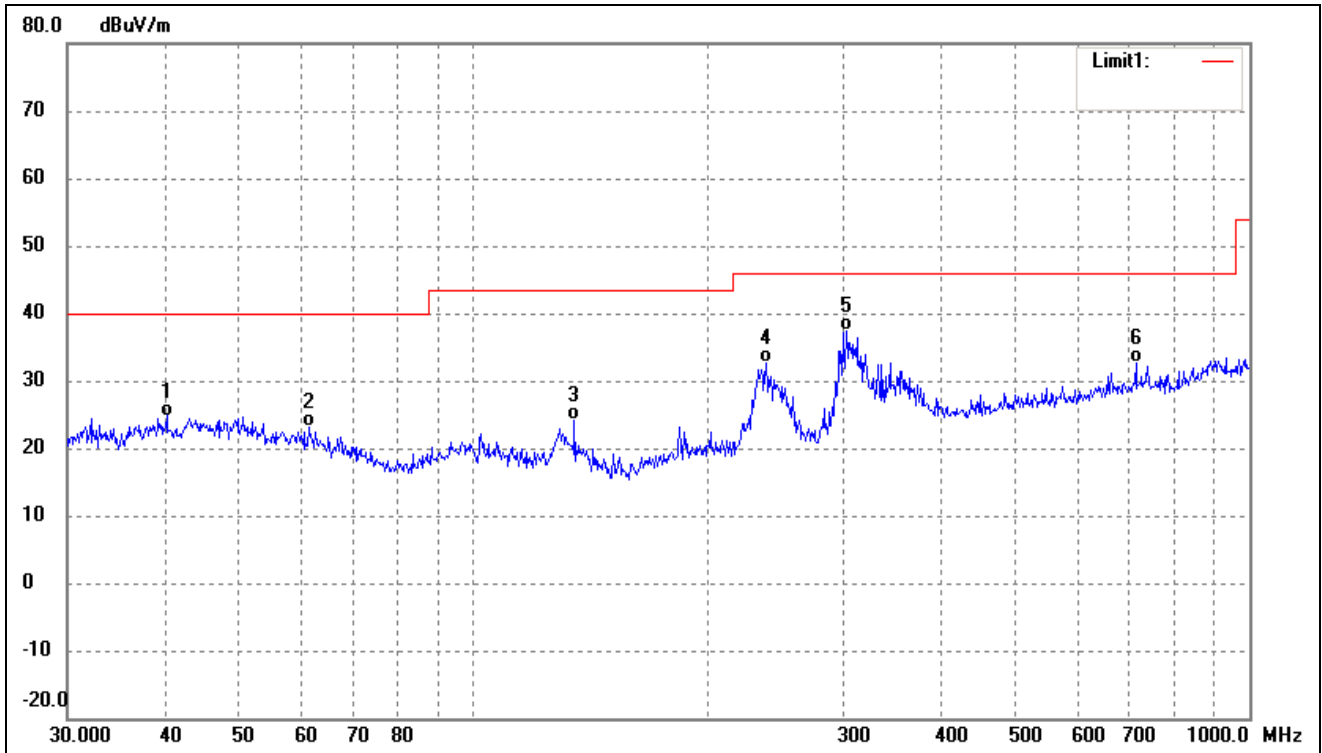

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2757	36.73	-11.98	24.75	40.00	-15.25	-	-	QP
2	61.3463	36.42	-13.24	23.18	40.00	-16.82	-	-	QP
3	135.0319	40.68	-16.60	24.08	43.50	-19.42	-	-	QP
4	238.3102	44.19	-11.50	32.69	46.00	-13.31	-	-	QP
5	302.4812	46.20	-8.93	37.27	46.00	-8.73	-	-	QP
6	714.1734	34.02	-1.36	32.66	46.00	-13.34	-	-	QP

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

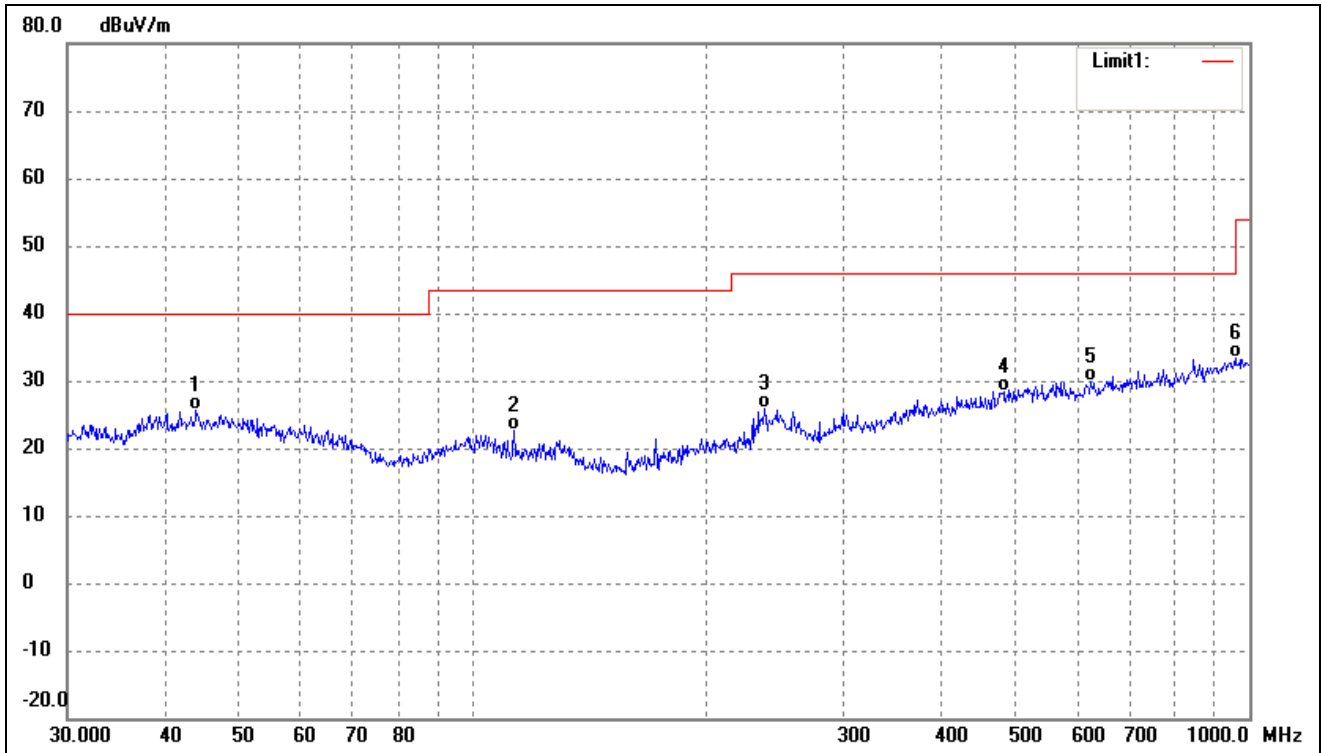

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.9658	37.41	-11.83	25.58	40.00	-14.42	-	-	QP
2	112.9196	36.24	-13.60	22.64	43.50	-20.86	-	-	QP
3	237.4760	37.35	-11.54	25.81	46.00	-20.19	-	-	QP
4	482.2156	33.00	-4.59	28.41	46.00	-17.59	-	-	QP
5	625.0780	32.07	-2.15	29.92	46.00	-16.08	-	-	QP
6	958.7943	31.91	1.40	33.31	46.00	-12.69	-	-	QP

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

Spurious Emissions Above 1GHz

➤ ANT 1

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2406MHz							
2406	102.96	-12.72	90.24	114	-23.76	H	PK
2406	99.33	-12.72	86.61	94	-7.39	H	AV
4812	53.83	-4.51	49.32	74	-24.68	H	PK
4812	51.49	-4.51	46.98	54	-7.02	H	AV
7218	50.96	-2.20	48.76	74	-25.24	H	PK
7218	39.78	-2.20	37.58	54	-16.42	H	AV
2406	105.95	-12.72	93.23	114	-20.77	V	PK
2406	102.76	-12.72	90.04	94	-3.96	V	AV
4812	56.64	-4.47	52.17	74	-21.83	V	PK
4812	52.70	-4.47	48.23	54	-5.77	V	AV
7218	46.29	-0.54	45.75	74	-28.25	V	PK
7218	40.65	-0.54	40.11	54	-13.89	V	AV
Middle Channel-2439MHz							
2439	104.14	-12.60	91.54	114	-22.46	H	PK
2439	98.10	-12.60	85.50	94	-8.50	H	AV
4878	54.58	-4.47	50.11	74	-23.89	H	PK
4878	50.10	-4.47	45.63	54	-8.37	H	AV
7317	49.81	-2.17	47.64	74	-26.36	H	PK
7317	39.40	-2.17	37.23	54	-16.77	H	AV
2439	105.29	-12.60	92.69	114	-21.31	V	PK
2439	103.19	-12.60	90.59	94	-3.41	V	AV
4878	55.65	-4.47	51.18	74	-22.82	V	PK
4878	52.98	-4.47	48.51	54	-5.49	V	AV
7317	46.47	-2.17	44.30	74	-29.70	V	PK
7317	42.13	-2.17	39.96	54	-14.04	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
High Channel-2478MHz							
2478	101.13	-12.51	88.62	114	-25.38	H	PK
2478	99.10	-12.51	86.59	94	-7.41	H	AV
4956	52.35	-4.47	47.88	74	-26.12	H	PK
4956	49.90	-4.47	45.43	54	-8.57	H	AV
7434	53.06	-0.54	52.52	74	-21.48	H	PK
7434	41.28	-0.54	40.74	54	-13.26	H	AV
2478	104.36	-12.51	91.85	114	-22.15	V	PK
2478	102.65	-12.51	90.13	94	-3.86	V	AV
4956	55.46	-4.47	50.99	74	-23.01	V	PK
4956	53.87	-4.47	49.40	54	-4.60	V	AV
7434	46.72	-0.54	46.18	74	-27.82	V	PK
7434	43.91	-0.54	43.37	54	-10.63	V	AV

➤ ANT 2

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2406MHz							
2406	102.27	-12.72	89.55	114	-24.45	H	PK
2406	98.20	-12.72	85.48	94	-8.52	H	AV
4812	54.90	-4.51	50.39	74	-23.61	H	PK
4812	51.01	-4.51	46.50	54	-7.50	H	AV
7218	52.15	-2.20	49.95	74	-24.05	H	PK
7218	38.98	-2.20	36.78	54	-17.22	H	AV
2406	106.35	-12.72	93.63	114	-20.37	V	PK
2406	104.08	-12.72	91.36	94	-2.64	V	AV
4812	56.50	-4.47	52.03	74	-21.97	V	PK
4812	52.65	-4.47	48.18	54	-5.82	V	AV
7218	46.54	-0.54	46.00	74	-28.00	V	PK
7218	102.27	-12.72	89.55	114	-24.45	V	AV
Middle Channel-2439MHz							
2439	102.82	-12.51	90.31	114	-23.69	H	PK
2439	97.22	-12.51	84.71	94	-9.29	H	AV
4878	53.03	-4.47	48.56	74	-25.44	H	PK
4878	49.55	-4.47	45.08	54	-8.92	H	AV
7317	51.57	-0.54	51.03	74	-22.97	H	PK
7317	40.00	-0.54	39.46	54	-14.54	H	AV
2439	104.64	-12.51	92.13	114	-21.87	V	PK
2439	103.79	-12.51	91.28	94	-2.72	V	AV
4878	55.47	-4.47	51.00	74	-23.00	V	PK
4878	53.43	-4.47	48.96	54	-5.04	V	AV
7317	45.90	-0.54	45.36	74	-28.64	V	PK
7317	42.32	-0.54	41.78	54	-12.22	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
High Channel-2478MHz							
2478	100.51	-12.51	88.00	114	-26.00	H	PK
2478	99.73	-12.51	87.22	94	-6.78	H	AV
4956	51.33	-4.47	46.86	74	-27.14	H	PK
4956	49.12	-4.47	44.65	54	-9.35	H	AV
7434	53.13	-0.54	52.59	74	-21.41	H	PK
7434	41.69	-0.54	41.15	54	-12.85	H	AV
2478	106.82	-12.51	94.31	114	-19.69	V	PK
2478	104.37	-12.51	91.84	94	-2.16	V	AV
4956	56.50	-4.47	52.03	74	-21.97	V	PK
4956	52.63	-4.47	48.16	54	-5.84	V	AV
7434	46.85	-0.54	46.31	74	-27.69	V	PK
7434	42.86	-0.54	42.32	54	-11.68	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz..

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

5.3 Summary of Test Results/Plots


Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.

Please refer to the test plots as below.


➤ ANT 1

Test Channel	Low	Polarity:	Vertical (worst case)
--------------	-----	-----------	-----------------------

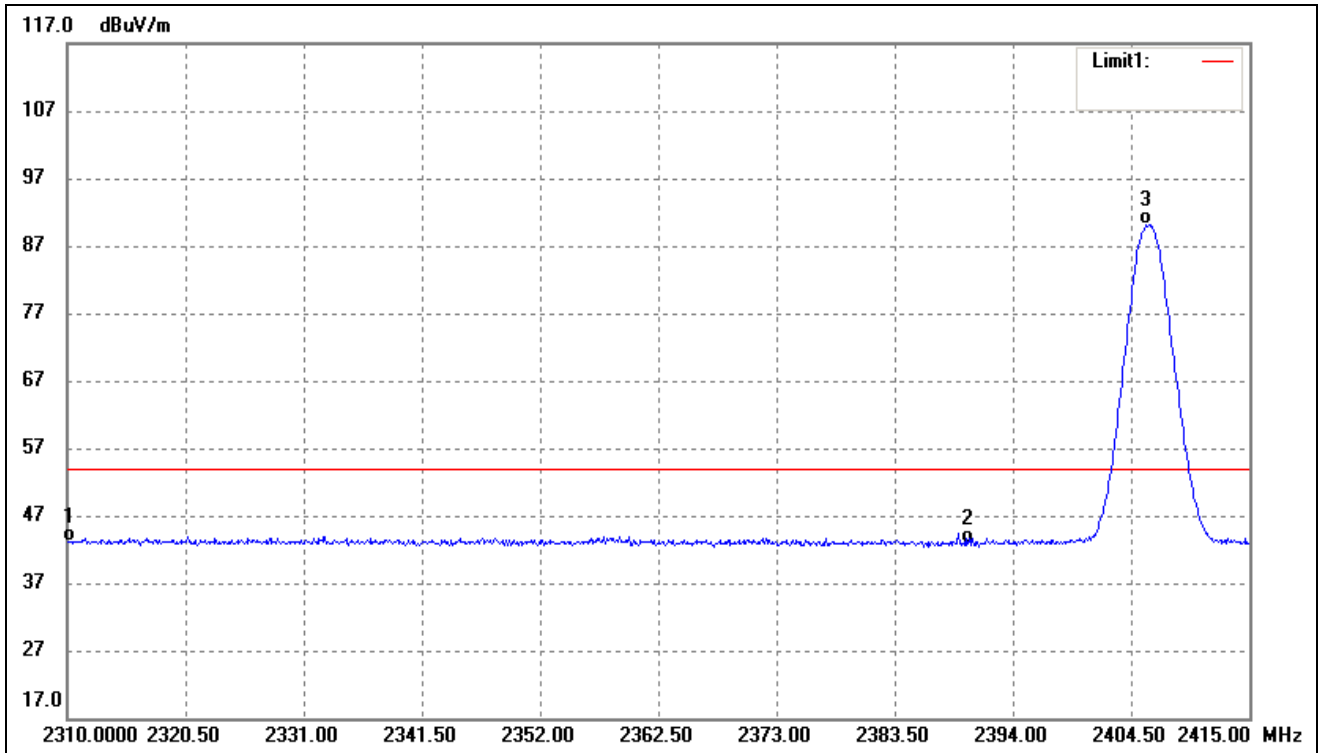

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	56.17	-13.00	43.17	54.00	-10.83	Ave Detector
	2310.000	66.85	-13.00	53.85	74.00	-20.15	Peak Detector
2	2390.000	55.65	-12.77	42.88	54.00	-11.12	Ave Detector
	2390.000	66.24	-12.77	53.47	74.00	-20.53	Peak Detector
3	2405.865	102.76	-12.72	90.04	94.00	-3.96	Ave Detector
	2406.285	105.95	-12.72	93.23	114.00	-20.77	Peak Detector


Test Channel	High	Polarity:	Vertical (worst case)
--------------	------	-----------	-----------------------

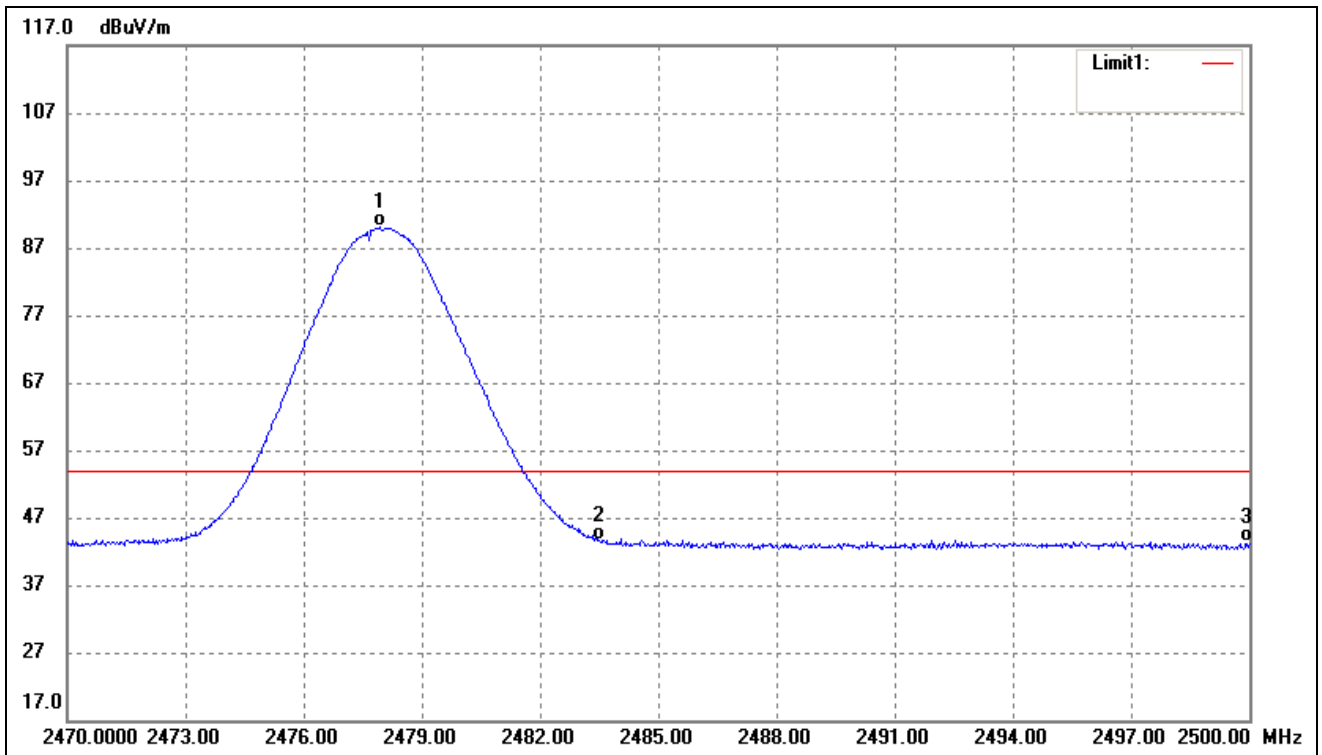

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2477.950	102.65	-12.52	90.13	94.00	-3.87	Ave Detector
	2479.450	104.36	-12.51	91.85	114.00	-22.15	Peak Detector
2	2483.500	56.22	-12.49	43.73	54.00	-10.27	Ave Detector
	2483.500	65.87	-12.49	53.38	74.00	-20.62	Peak Detector
3	2500.000	55.87	-12.45	43.42	54.00	-10.58	Ave Detector
	2500.000	65.35	-12.45	52.90	74.00	-21.10	Peak Detector


Band edge

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

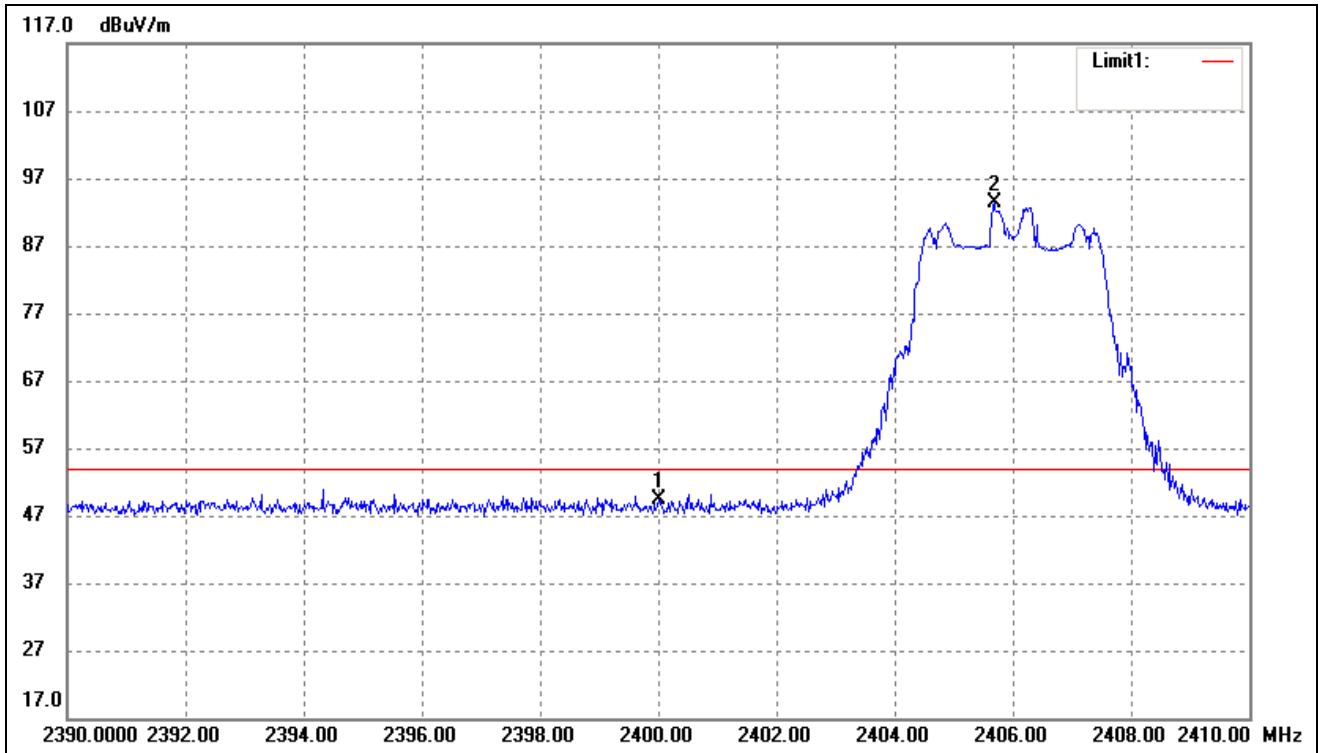

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	62.12	-12.74	49.38	54.00	-4.62	Peak Detector
2	2405.680	106.01	-12.73	93.28	/	/	Peak Detector


Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

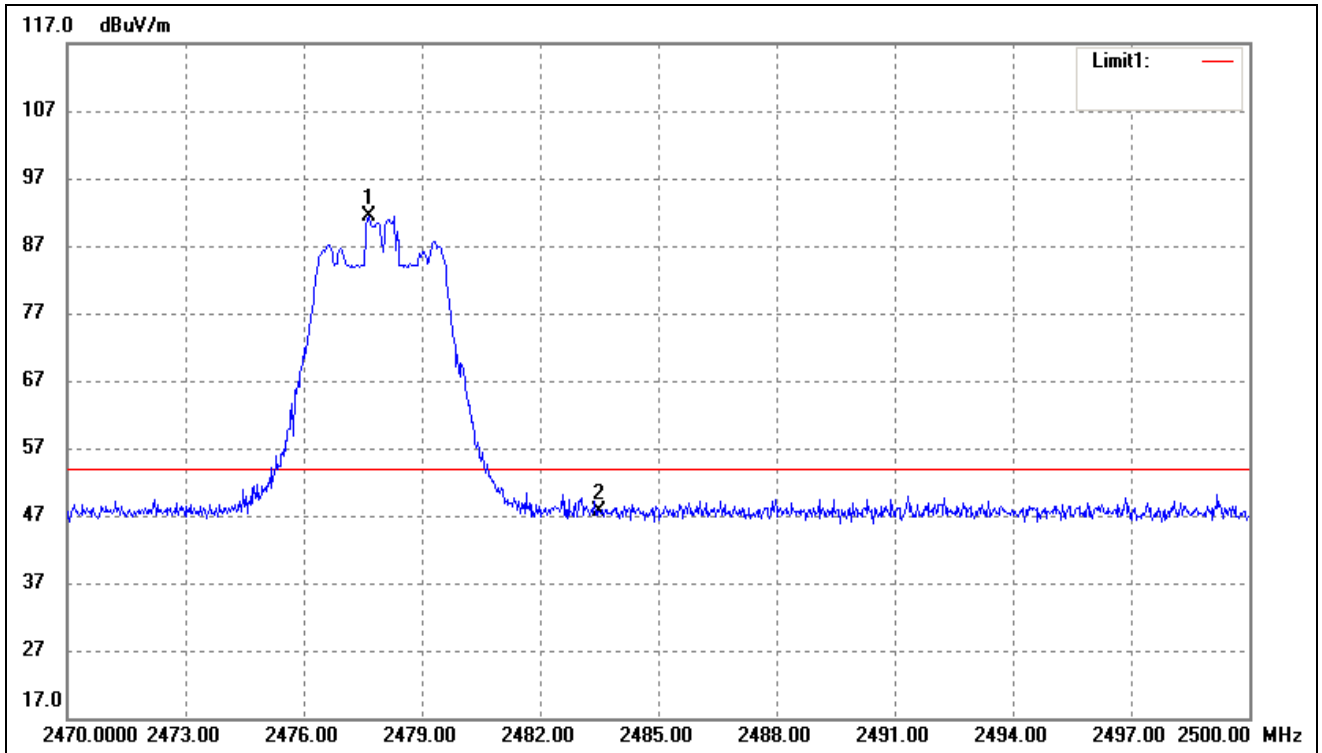

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2477.650	103.80	-12.52	91.28	/	/	Peak Detector
2	2483.500	60.16	-12.49	47.67	54.00	-6.33	Peak Detector


➤ ANT 2

Test Channel	Low	Polarity:	Vertical (worst case)
--------------	-----	-----------	-----------------------

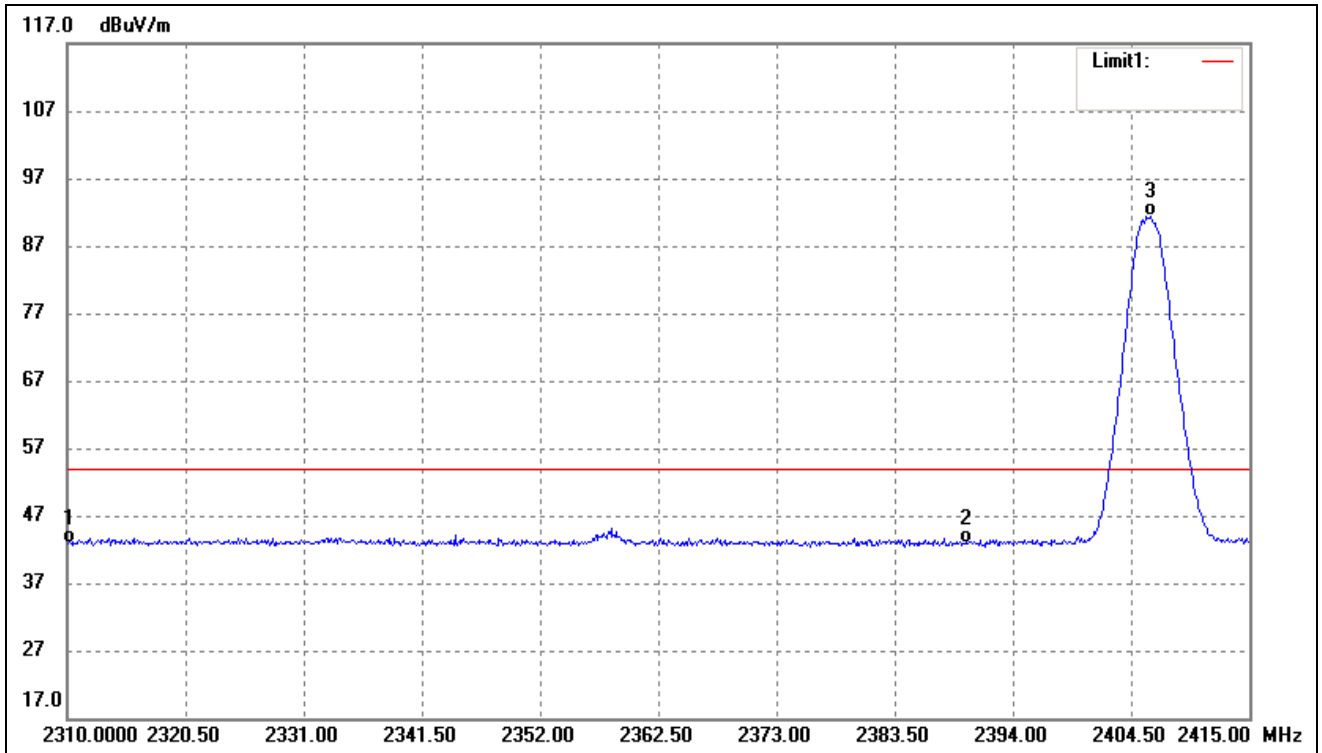

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	55.90	-13.00	42.90	54.00	-11.10	Ave Detector
	2310.000	66.69	-13.00	53.69	74.00	-20.31	Peak Detector
2	2390.000	55.60	-12.77	42.83	54.00	-11.17	Ave Detector
	2390.000	66.32	-12.77	53.55	74.00	-20.45	Peak Detector
3	2406.180	104.08	-12.72	91.36	/	/	Ave Detector
	2404.815	106.35	-12.73	93.62	/	/	Peak Detector


Test Channel	High	Polarity:	Vertical (worst case)
--------------	------	-----------	-----------------------

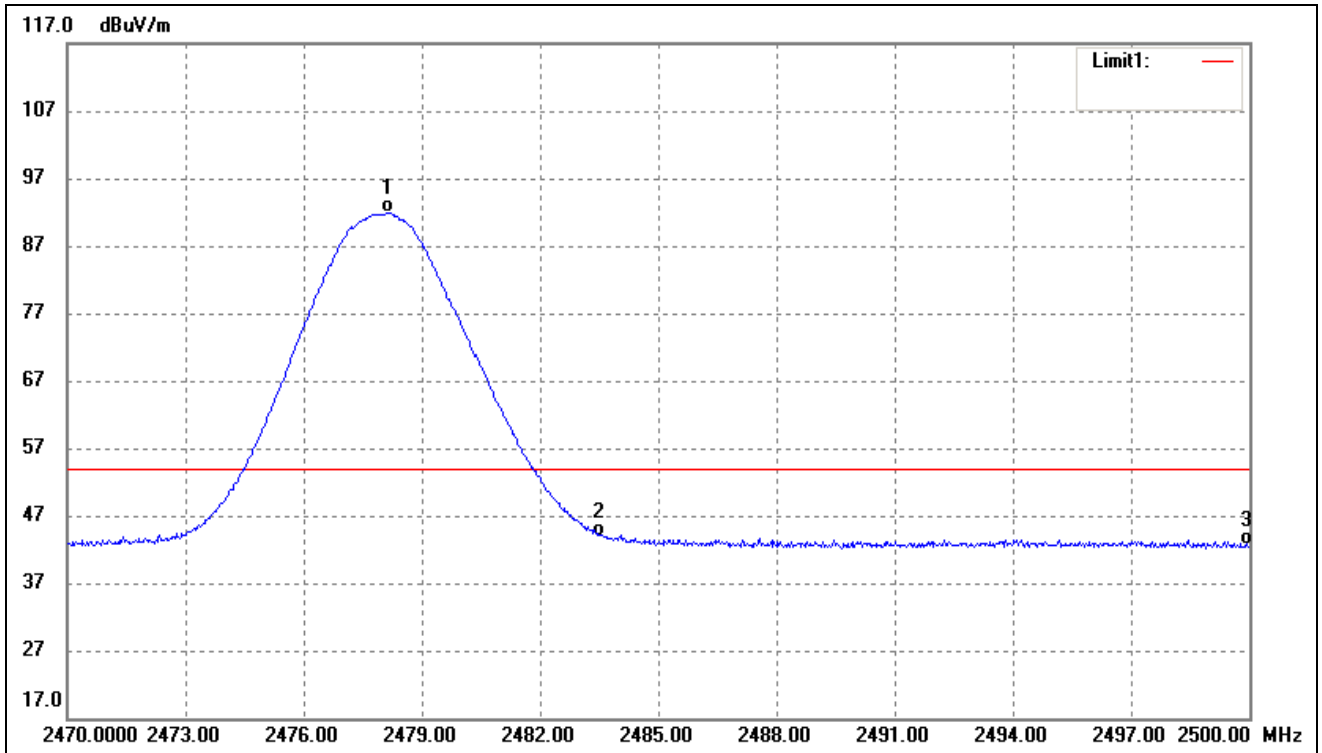

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2478.130	104.37	-12.52	91.85	/	/	Ave Detector
	2479.570	106.82	-12.51	94.31	/	/	Peak Detector
2	2483.500	56.49	-12.49	44.00	54.00	-10.00	Ave Detector
	2483.500	67.05	-12.49	54.56	74.00	-19.44	Peak Detector
3	2500.000	54.97	-12.45	42.52	54.00	-11.48	Ave Detector
	2500.000	66.03	-12.45	53.58	74.00	-20.42	Peak Detector


Band edge

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

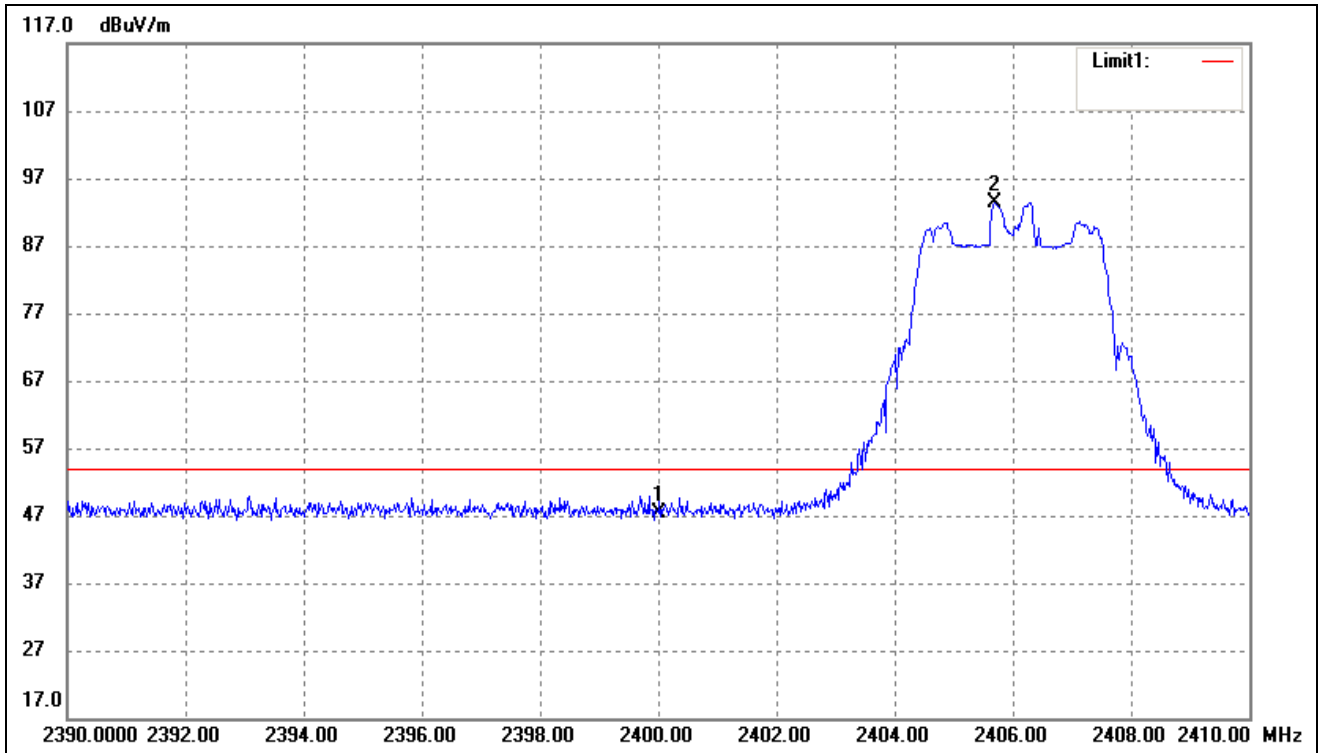

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	60.01	-12.74	47.27	54.00	-6.73	Peak Detector
2	2405.700	106.18	-12.73	93.45	/	/	Peak Detector

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

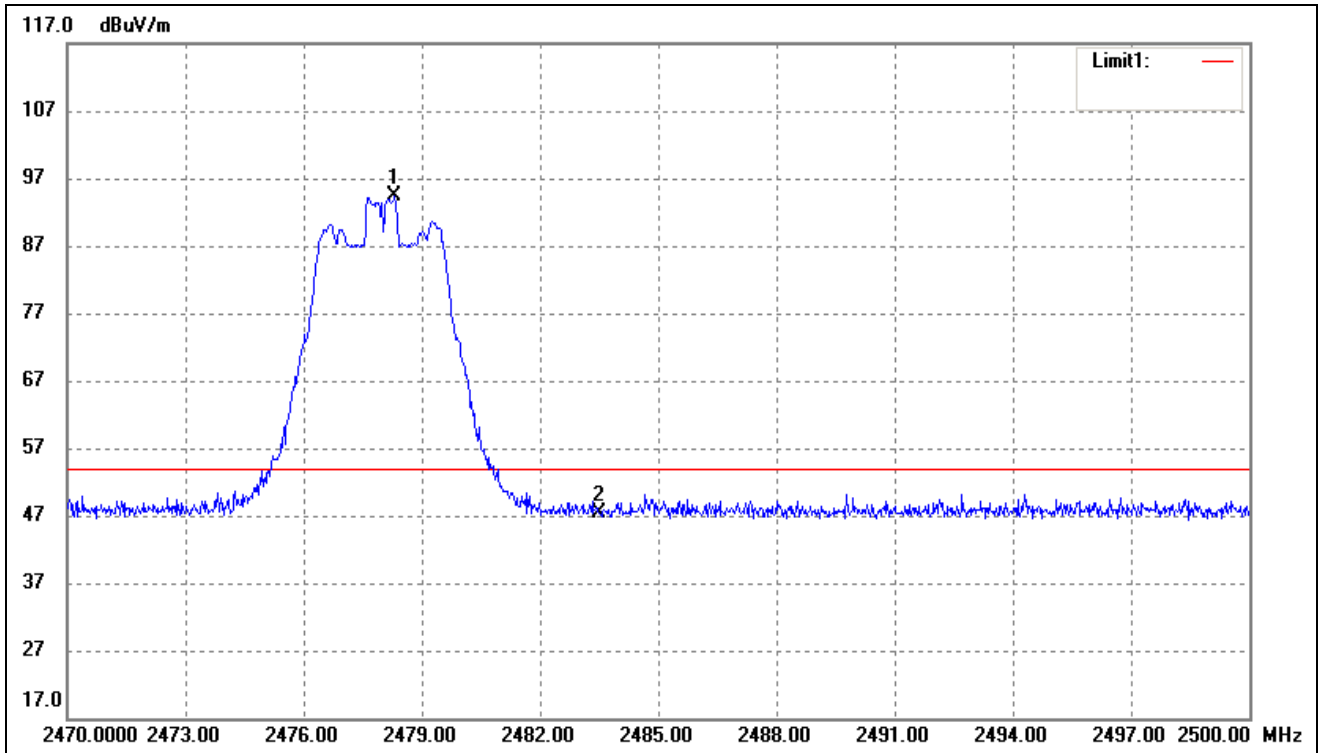

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2478.310	106.79	-12.52	94.27	/	/	Peak Detector
2	2483.500	59.90	-12.49	47.41	54.00	-6.59	Peak Detector

6. Emission Bandwidth

6.1 Standard Applicable

According to 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW \geq 1% 20dB Bandwidth, VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold




All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.3 Summary of Test Results/Plots




Channel	Frequency MHz	20dB Bandwidth MHz	
		ANT 1	ANT 2
Low Channel	2406	3.48	3.46
Middle Channel	2439	3.76	3.82
High Channel	2478	3.74	3.76

Please refer to the following test plots

➤ ANT 1
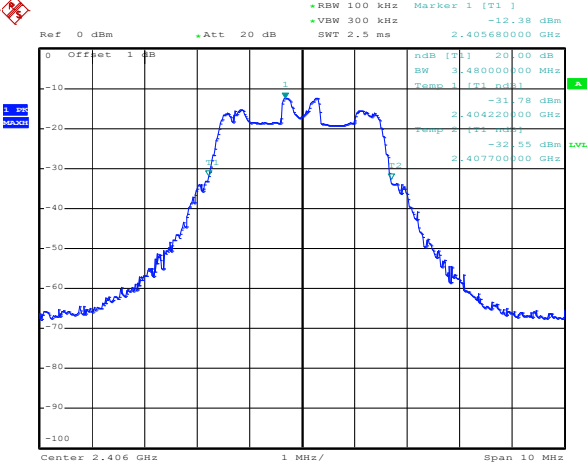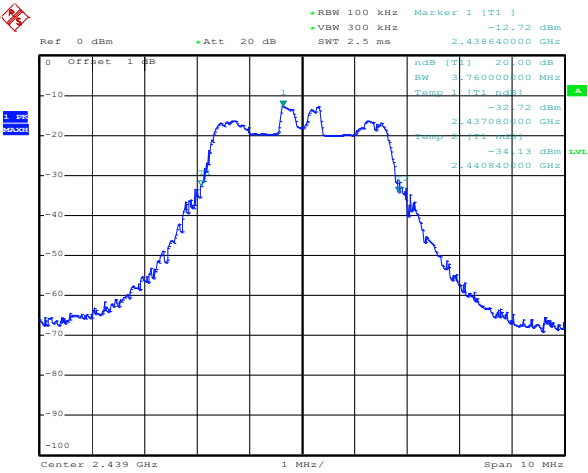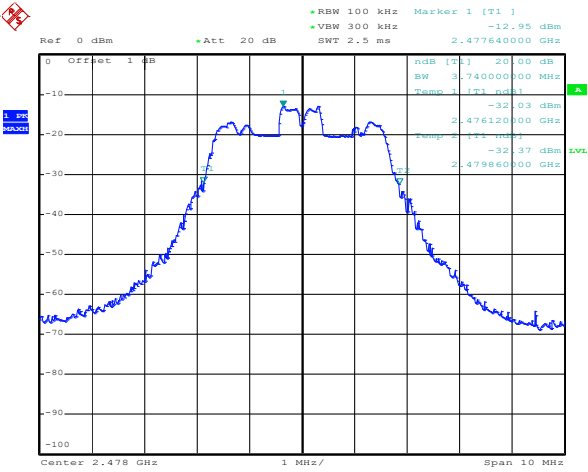
<p>Low Channel</p>	 <p>Date: 12.MAR.2021 14:14:20</p>
<p>Middle Channel</p>	 <p>Date: 12.MAR.2021 14:15:36</p>
<p>High Channel</p>	 <p>Date: 12.MAR.2021 14:16:37</p>

➤ ANT 2
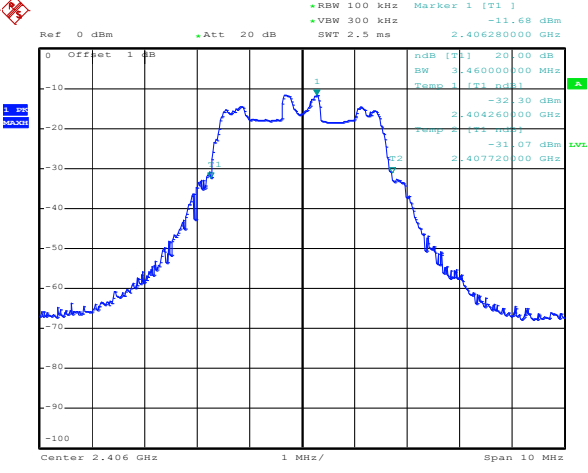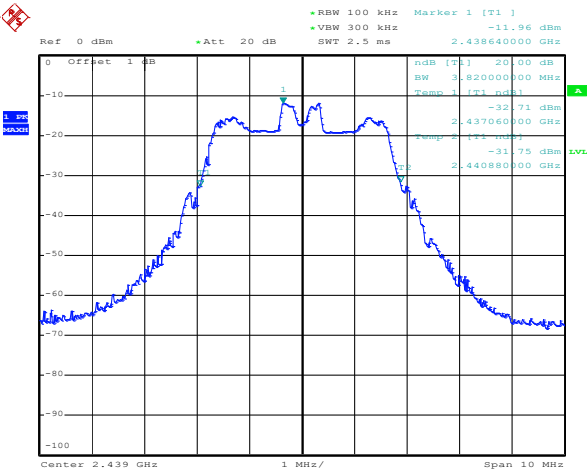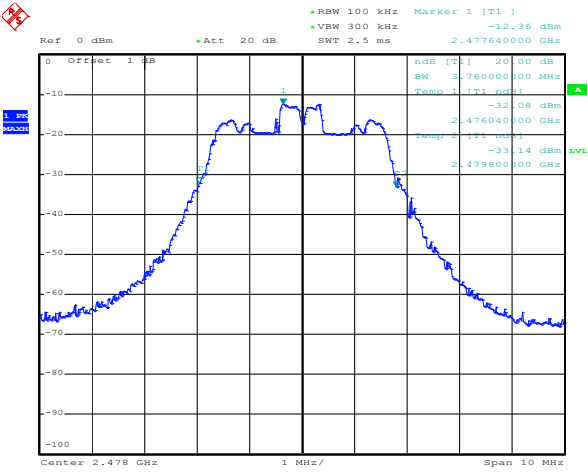
<p>Low Channel</p>	 <p>Ref 0 dBm *Att 20 dB RBW 100 kHz Marker 1 [T1] -11.68 dBm VBW 300 kHz 2.406280000 GHz</p> <p>dB [T1] 20.00 dB BW 3.460000000 MHz Temp 1 [T1] ndB1 -32.30 dBm 2.404260000 GHz Temp 2 [T2] ndB1 -31.07 dBm 2.407720000 GHz</p> <p>Center 2.406 GHz 1 MHz/ Span 10 MHz</p> <p>Date: 12.MAR.2021 14:21:07</p>
<p>Middle Channel</p>	 <p>Ref 0 dBm *Att 20 dB RBW 100 kHz Marker 1 [T1] -11.96 dBm VBW 300 kHz 2.438640000 GHz</p> <p>dB [T1] 20.00 dB BW 3.820000000 MHz Temp 1 [T1] ndB1 -32.71 dBm 2.437060000 GHz Temp 2 [T2] ndB1 -31.75 dBm 2.440880000 GHz</p> <p>Center 2.439 GHz 1 MHz/ Span 10 MHz</p> <p>Date: 12.MAR.2021 14:20:18</p>
<p>High Channel</p>	 <p>Ref 0 dBm *Att 20 dB RBW 100 kHz Marker 1 [T1] -12.36 dBm VBW 300 kHz 2.477640000 GHz</p> <p>dB [T1] 20.00 dB BW 3.760000000 MHz Temp 1 [T1] ndB1 -32.08 dBm 2.476040000 GHz Temp 2 [T2] ndB1 -33.14 dBm 2.479800000 GHz</p> <p>Center 2.478 GHz 1 MHz/ Span 10 MHz</p> <p>Date: 12.MAR.2021 14:19:00</p>

7. Conducted Emissions


7.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

7.2 Basic Test Setup Block Diagram

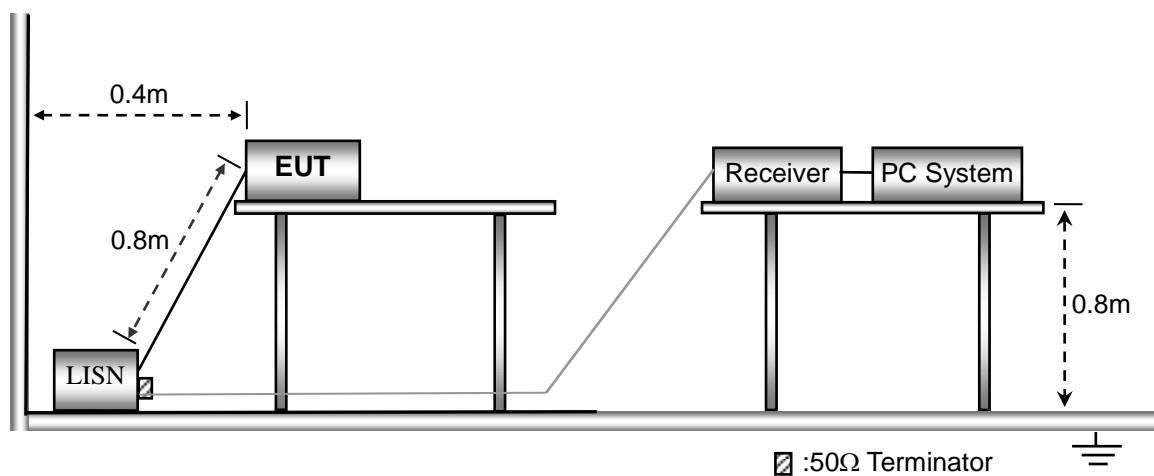


7.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


7.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

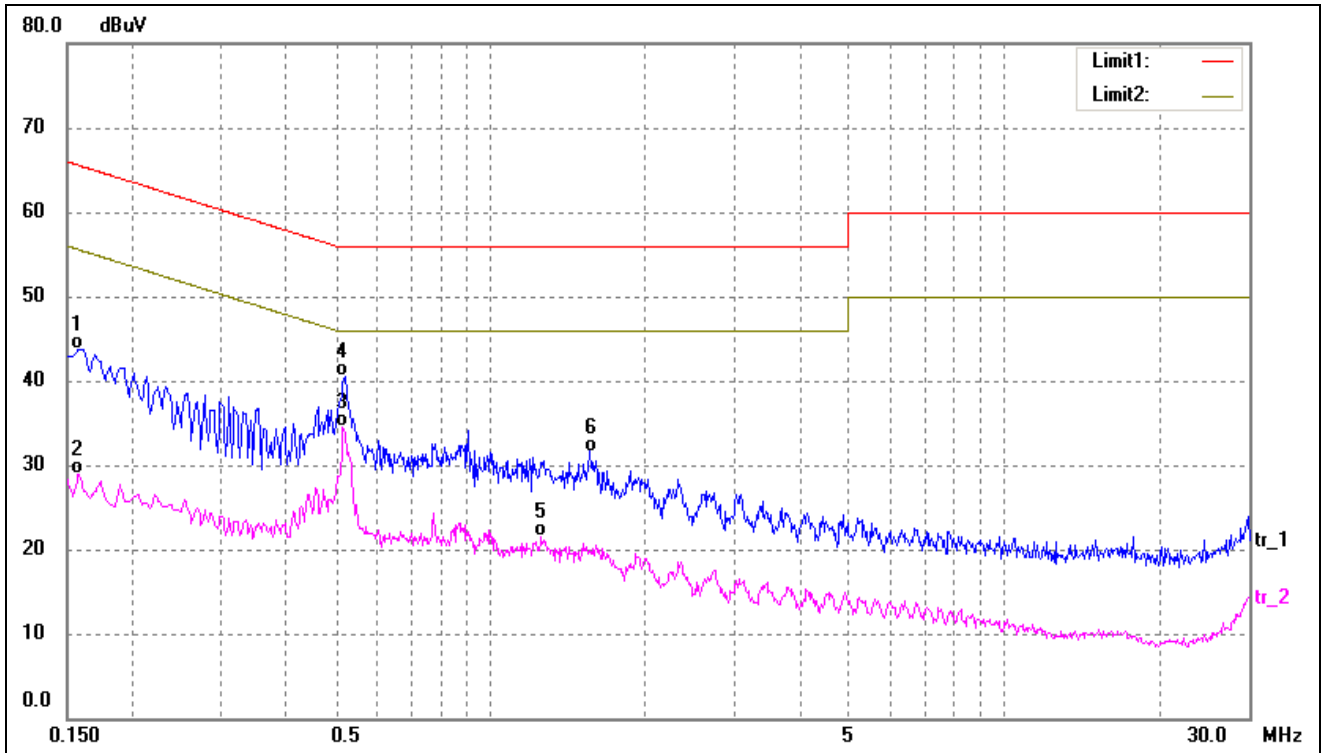

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	33.52	10.25	43.77	65.57	-21.80	QP
2	0.1580	18.75	10.25	29.00	55.57	-26.57	AVG
3	0.5180	24.19	10.22	34.41	46.00	-11.59	AVG
4	0.5220	30.21	10.22	40.43	56.00	-15.57	QP
5	1.2580	11.22	10.21	21.43	46.00	-24.57	AVG
6	1.5620	21.36	10.24	31.60	56.00	-24.40	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

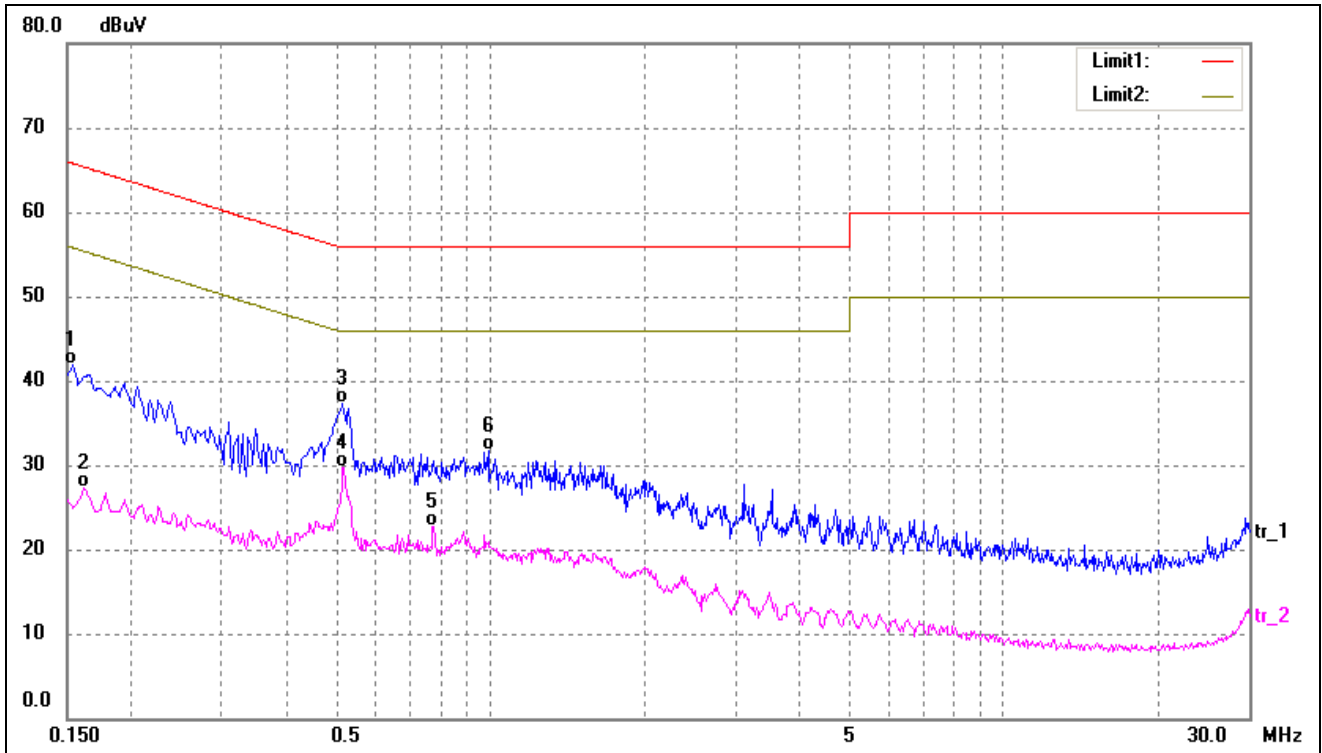

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	31.59	10.25	41.84	65.78	-23.94	QP
2	0.1620	16.95	10.26	27.21	55.36	-28.15	AVG
3	0.5180	27.09	10.22	37.31	56.00	-18.69	QP
4	0.5180	19.55	10.22	29.77	46.00	-16.23	AVG
5	0.7740	12.62	10.17	22.79	46.00	-23.21	AVG
6	0.9940	21.42	10.20	31.62	56.00	-24.38	QP

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******