

FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT

FOR

Acrox Technologies Co., Ltd.

Bluetooth Mini Keyboard

Model No.: KBM

Prepared for : Acrox Technologies Co., Ltd.
Address : 4F, No. 89, Minshan St., NeiHu Dist. Taipei, Taiwan

Prepared by : SHENZHEN LCS CERTIFICATION SERVICES INC.
Address : Xingyuan Industrial Park, Tongda Road, Bao'an Blvd,
Bao'an District, Shenzhen, Guangdong, China

Report Number : LCS1107181544F
Date of Test : July 18, 2011 – July 26, 2011
Date of Report : July 26, 2011

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	3
2. GENERAL INFORMATION	4
2.1 Description of Device (EUT).....	4
2.2 Test Facility	4
2.3 Measurement Uncertainty	4
3. TEST METHODOLOGY	5
3.1 EUT Configuration	5
3.2 EUT Exercise.....	5
3.3 General Test Procedures	5
3.4 Description Of Test Modes.....	5
4. CONNECTION DIAGRAM OF TEST SYSTEM.....	6
5. FCC PART 15.247 REQUIREMENTS.....	7
5.1 Peak Power	7
5.2 Band Edges Measurement.....	8
5.3 Frequency Separation	12
5.4 Number of Hopping Frequency	16
5.5 Time of Occupancy (Dwell Time).....	18
5.6 Spurious Emissions.....	21
6. RADIATED EMISSION MEASUREMENT	25
6.1 Test Equipment.....	25
6.2 Block Diagram of Test Setup.....	25
6.3 Radiated Emission Limit.....	26
6.4 Test Results.....	26
7. POWER LINE CONDUCTED EMISSIONS.....	29
7.1 Test Equipment.....	29
7.2 Block Diagram of Test Setup.....	29
7.3 Conducted Emission Limit	29
7.4 Test Results.....	29
8. ANTENNA REQUIREMENT	30
8.1 Standard Applicable.....	30
8.2 Antenna Connected Construction	30
9. RADIO FREQUENCY EXPOSURE	31
9.1 Limit	31
9.2 EUT Specification.....	31
9.3 Test Results.....	31

1. SUMMARY OF STANDARDS AND RESULTS

Applicant	Acrox Technologies Co., Ltd. 4F, No. 89, Minshan St., NeiHu Dist. Taipei, Taiwan
Manufacturer	Acrox Technologies Co., Ltd. 4F, No. 89, Minshan St., NeiHu Dist. Taipei, Taiwan
EUT	Bluetooth Mini Keyboard
Trade Mark	N/A
Model No.	KBM
Serial No.	Prototype
Power Supply	DC 3.3V
Date of Test	July 18, 2011 – July 26, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

SHENZHEN LCS CERTIFICATION SERVICES INC. as requested by the applicant to evaluate the EMC performance of the product Sample received on July 18, 2011 would like to declare that the tested sample has been evaluated And found to be in compliance with the tested rule parts. The data recorded as well as the test Configuration specified is true and accurate for showing the sample's EMC nature.

Compiled by:

Bobo Li

Bobo Li/ File administrators

Supervised by:

Vito Cao

Vito Cao/ Technique
principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

2. GENERAL INFORMATION

2.1 Description of Device (EUT)

EUT	Bluetooth Mini Keyboard
Model Number	KBM
Power Supply	DC 3.3V
Frequency Range	2402 ~ 2480 MHz
Transmit Power	1.92dBm
Modulation Technique	FHSS
Transmit Data Rate	GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps), 8-DPSK(3Mbps)
Number of Channels	79 Channels
Antenna Gain	1.5 dBi

2.2 Test Facility

EMC Lab. : Accredited by CNAS, June 04, 2010
The Certificate Registration Number. is L4595.

Accredited by FCC, July 14, 2011
The Certificate Registration Number. is 899208.

Accredited by Industry Canada, May. 02, 2011
The Certificate Registration Number. is 9642A-1

Name of Firm : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Site Location : Xingyuan Industrial Park, Tongda Road, Bao'an Blvd,
Bao'an District, Shenzhen, Guangdong, China

2.3 Measurement Uncertainty

Radiation Uncertainty (30M~1GHz) : Ur = ± 4.26 dB
 Radiation Uncertainty (1G~3GHz) : Ur = ± 2.66 dB
 Radiation Uncertainty (3G~18GHz) : Ur = ± 2.83 dB
 Conduction Uncertainty : Uc = ± 2.61 dB

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 General Test Procedures

3.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

3.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4

3.4 Description Of Test Modes


The EUT has been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

Then, the worst case is GFSK(1M) Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz), these were chosen for full testing.

Note: After the preliminary scan GFSK, $\pi/4$ -DQPSK, 8-DPSK. we found the modulation at GFSK producing the highest emission level, so evaluated we chosen the above modes (worst case) as a representative.

4. CONNECTION DIAGRAM OF TEST SYSTEM

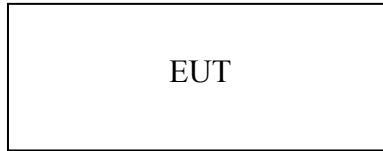

(EUT: Bluetooth Mini Keyboard)


5. FCC PART 15.247 REQUIREMENTS

5.1 Peak Power

5.1.1 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Spectrum Analyzer	Agilent	E4407B	MY41440292	2011-06	1 Year
Power Sensor	Agilent	E9327A	US40441788	2011-06	1 Year
Power Meter	Agilent	E4416A	QB41292714	2011-06	1 Year
DC Filter	MPE	23872C	N/A	2011-06	1 Year

5.1.2 Block Diagram of Test Setup

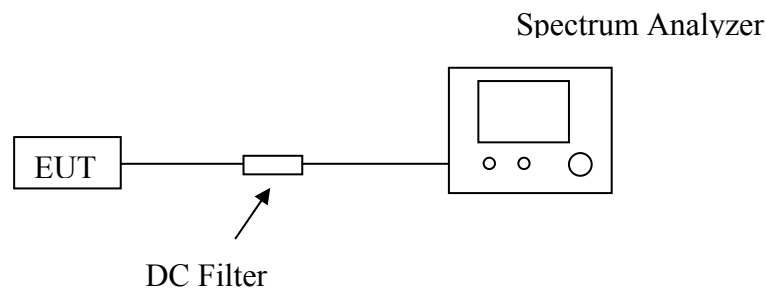

5.1.3 Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

5.1.4 Test Procedure

The transmitter output is connected to the Power Meter or spectrum analyzer.

5.1.5 Test Results

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	1.43	0.00139	1	Pass
Mid	2441	1.92	0.00156	1	Pass
High	2480	1.54	0.00143	1	Pass

5.2 Band Edges Measurement


5.2.1 Limit

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

5.2.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Spectrum Analyzer	Anritsu	MS2661C	6200140915	2011-06	1 Year
Test Receiver	Rohde&Schwarz	ESCS30	828985/018	2011-06	1 Year
Antenna	Schwarzbeck	VULB9163	142	2011-06	1 Year
Horn-antenna	Schwarzbeck	BBHA9120D	D:266	2011-06	1 Year
DC Filter	MPE	23872C	N/A	2011-06	1 Year

5.2.3 Block Diagram of Test Setup

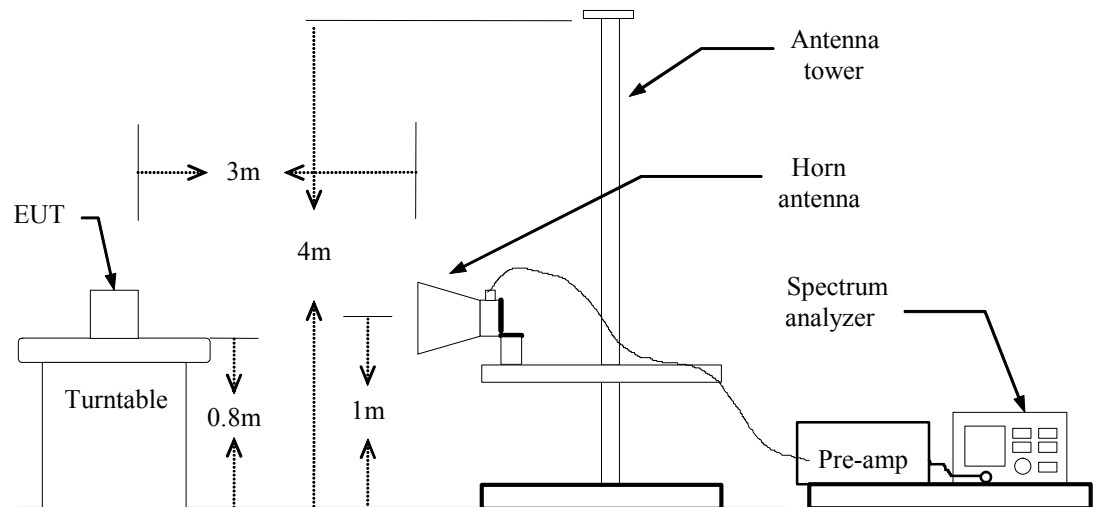

5.2.4 Test Procedure

The EUT is placed on a turntable, which is 0.8m above the ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

Peak: RBW=VBW=1MHz / Sweep=AUTO

Repeat the procedures until the peak versus polarization are measured.

5.2.5 Test Results

CH Low

Frequency (MHz)	Ant. Pol H/V	PK Value (dBuV)	Ave Value (dBuV)	PK Limit (dBuV)	Ave Limit (dBuV)	PK Margin (dB)	Ave Margin (dB)
2390.00	V	43.19	32.30	74.00	54.00	30.81	21.70
2390.00	H	43.22	32.02	74.00	54.00	30.78	21.98

CH High

Frequency (MHz)	Ant. Pol H/V	PK Value (dBuV)	Ave Value (dBuV)	PK Limit (dBuV)	Ave Limit (dBuV)	PK Margin (dB)	Ave Margin (dB)
2483.50	V	42.38	32.75	74.00	54.00	31.62	21.25
2483.50	H	43.15	32.38	74.00	54.00	30.85	21.62


* The test data graph please refer to the following page.

Note : The attenuate 20 below fundamental level is less then FCC 15.209 limit, the attenuate 20 below fundamental level is marked in the test data graph.

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

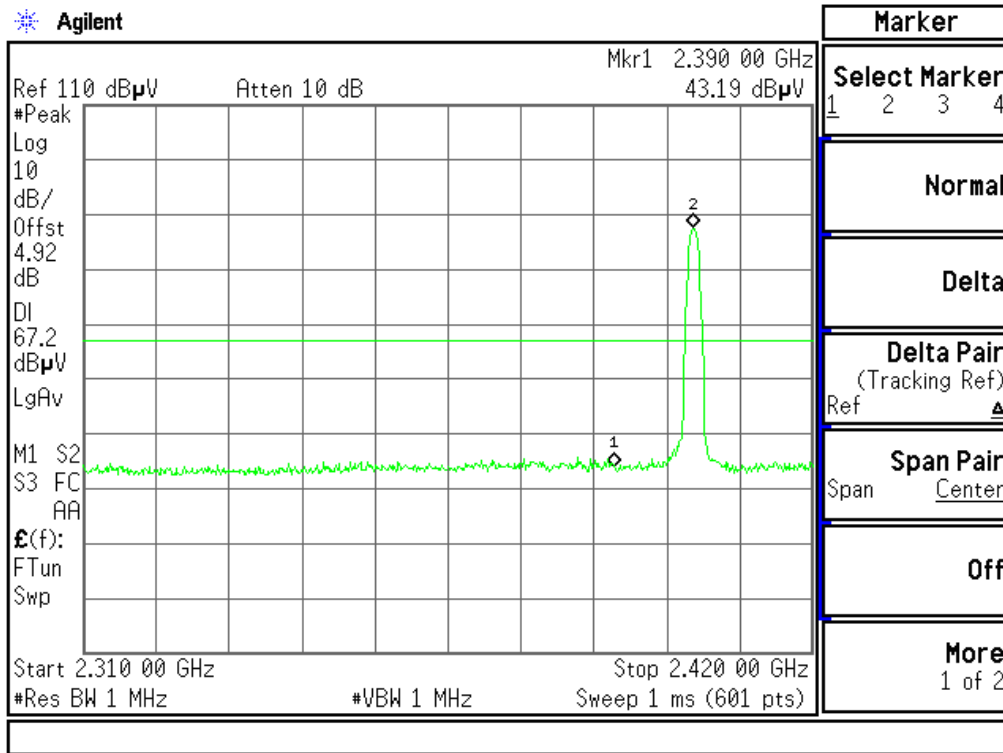

Detector mode: Peak


Polarity: Horizontal

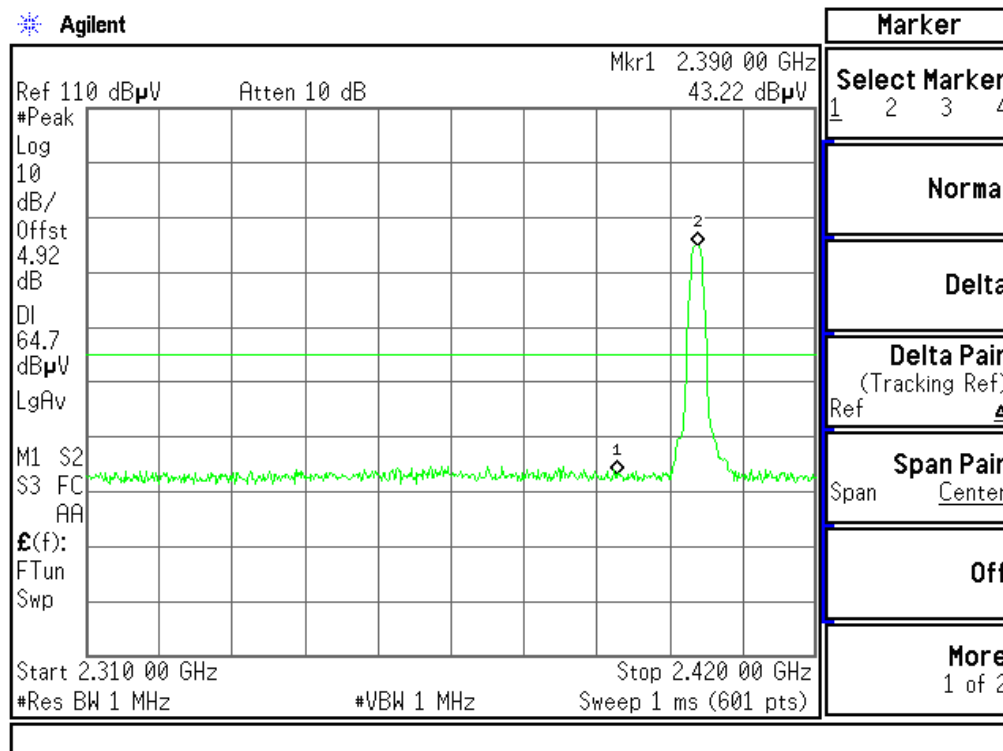

Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

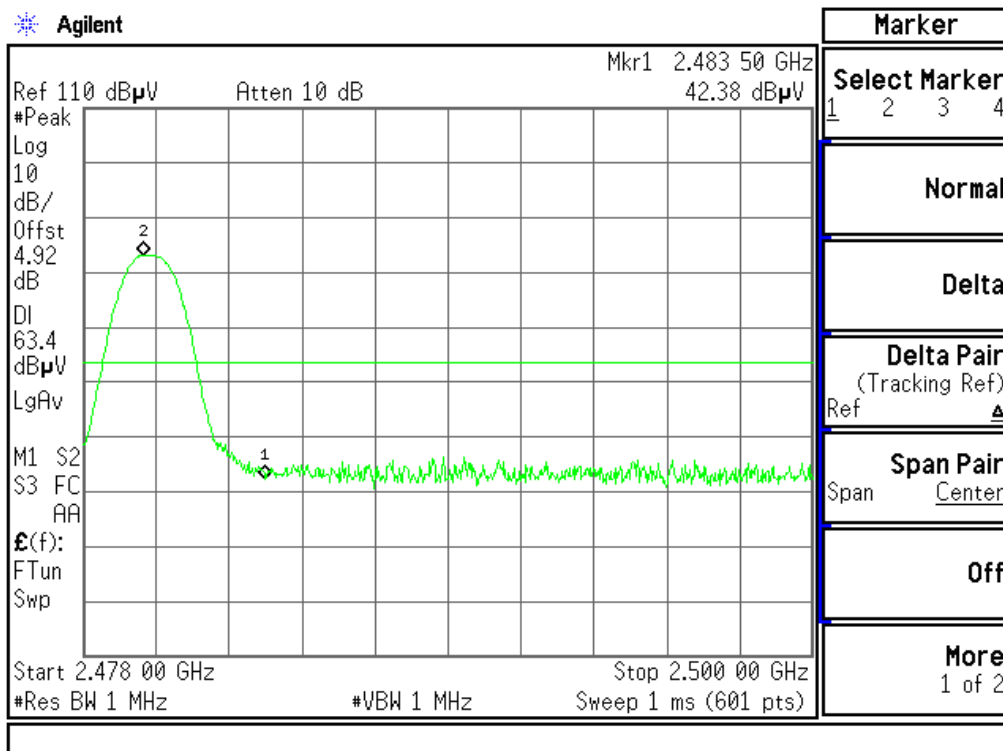

Detector mode: Peak

Polarity: Horizontal

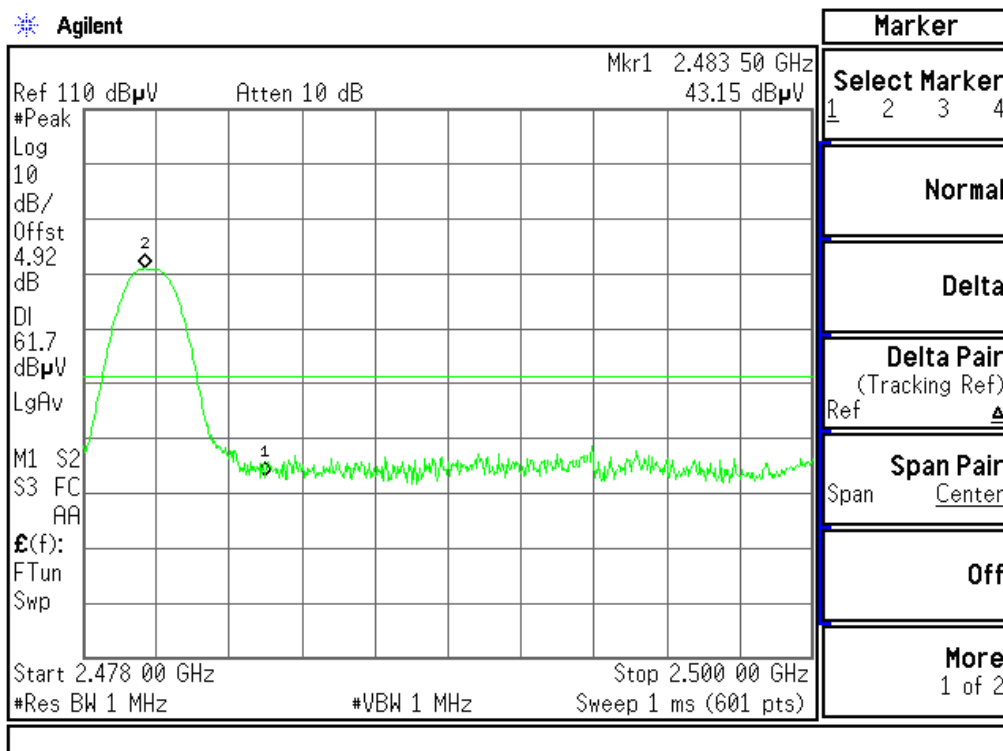

5.3 Frequency Separation


5.3.1 Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.3.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Spectrum Analyzer	Agilent	E4407B	MY41440292	2011-06	1 Year
RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2011-06	1 Year
DC Filter	MPE	23872C	N/A	2011-06	1 Year

5.3.3 Block Diagram of Test Setup

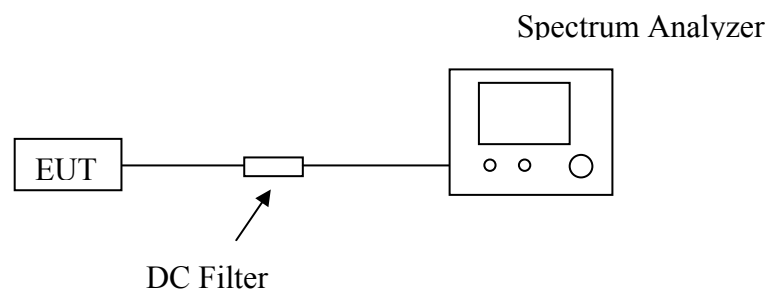

5.3.4 Test Procedure



- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set center frequency of spectrum analyzer = middle of hopping channel.
- Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
- Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.


5.3.5 Test Results

Channel Separation (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
1.000	942.569	>628.38	Pass


The test data graph please refer to the following page.



Measurement of Channel Separation

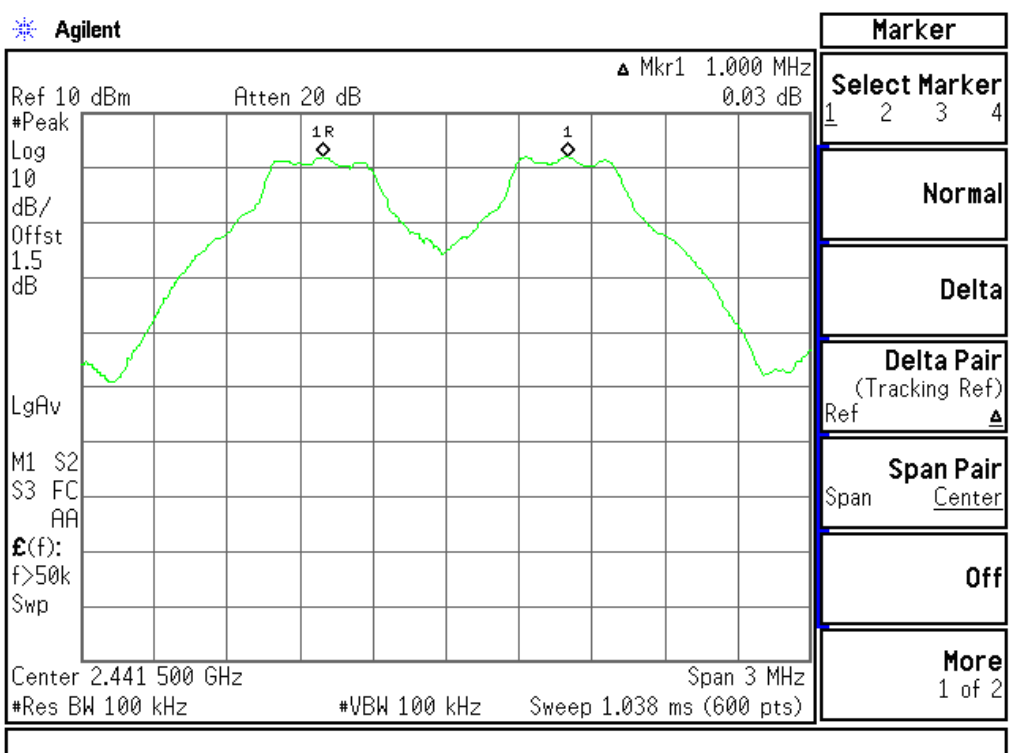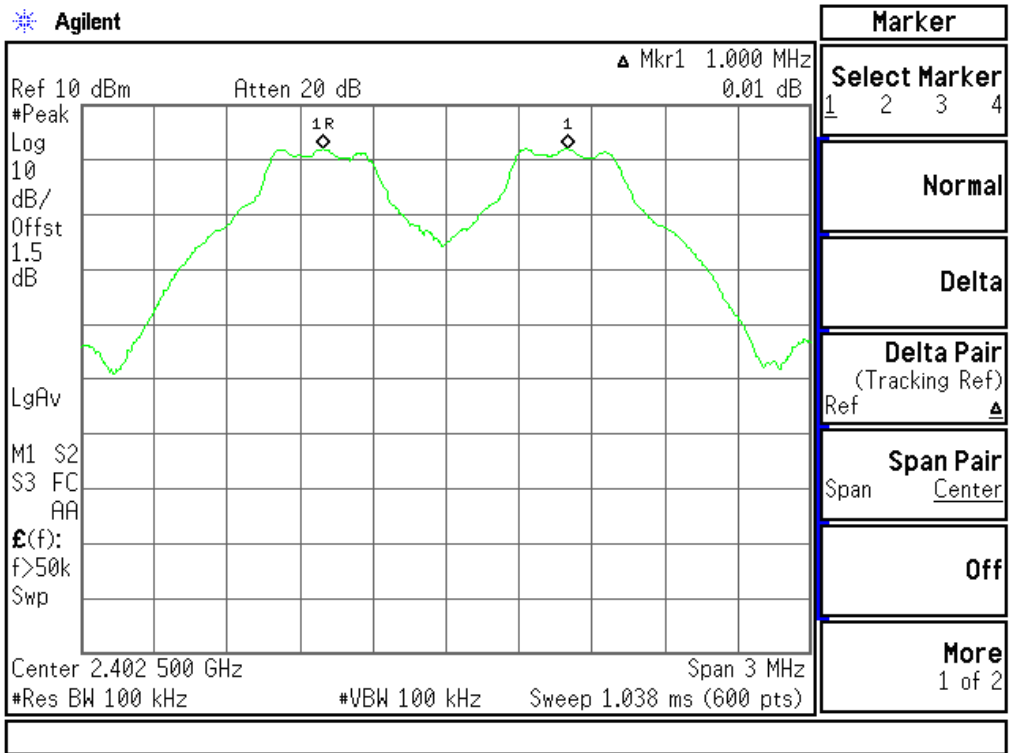

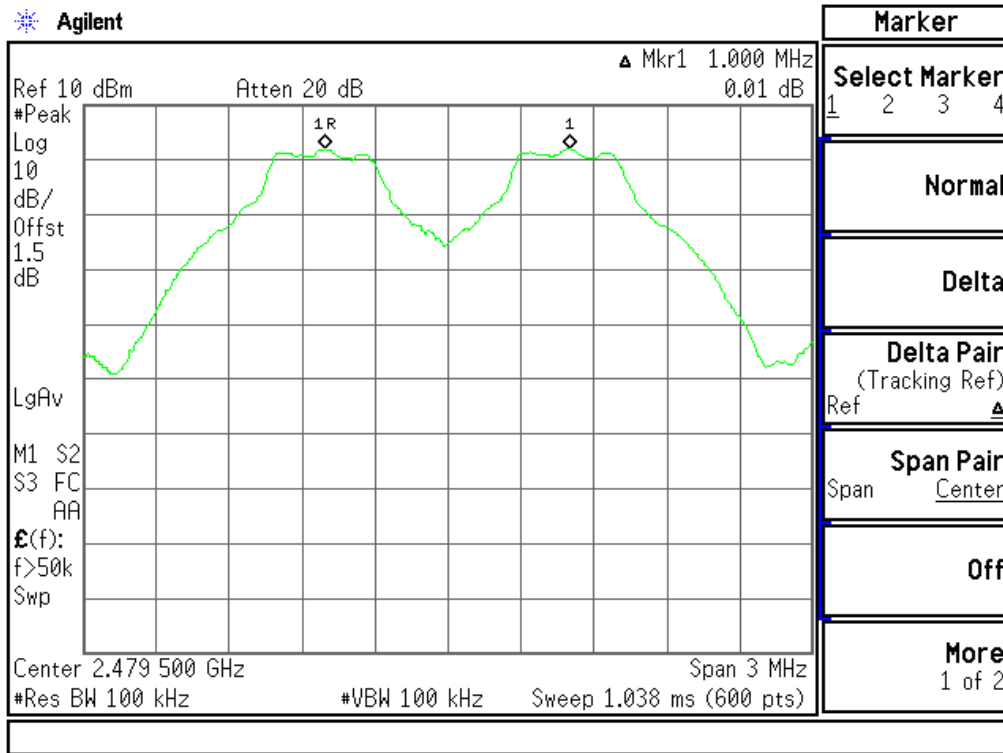

Measurement of 20dB Bandwidth

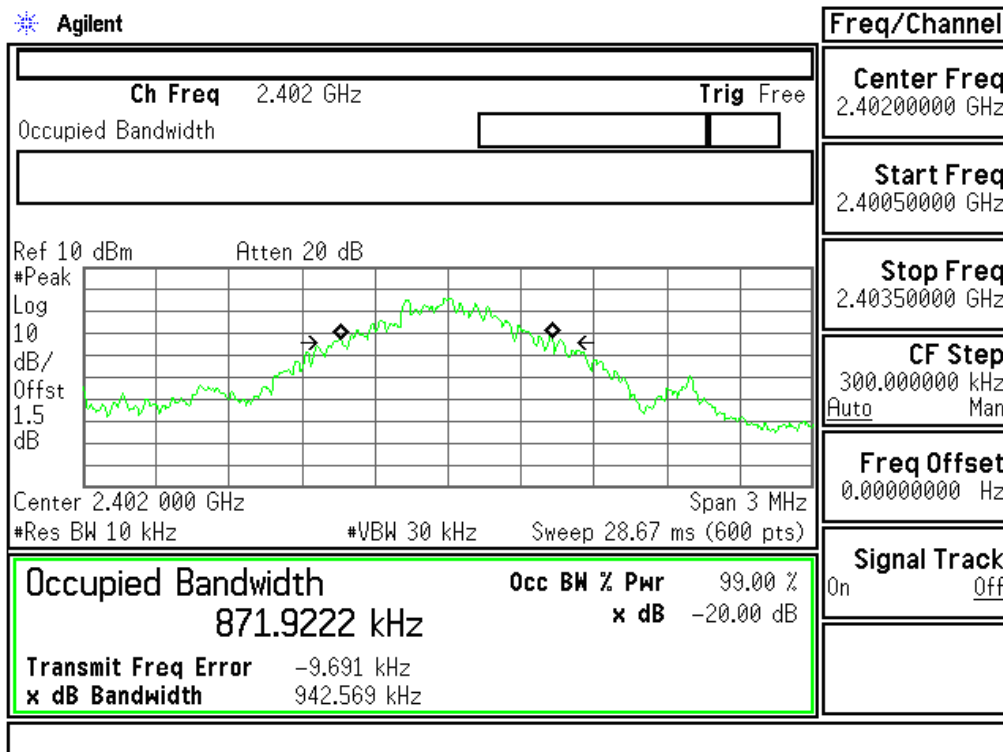

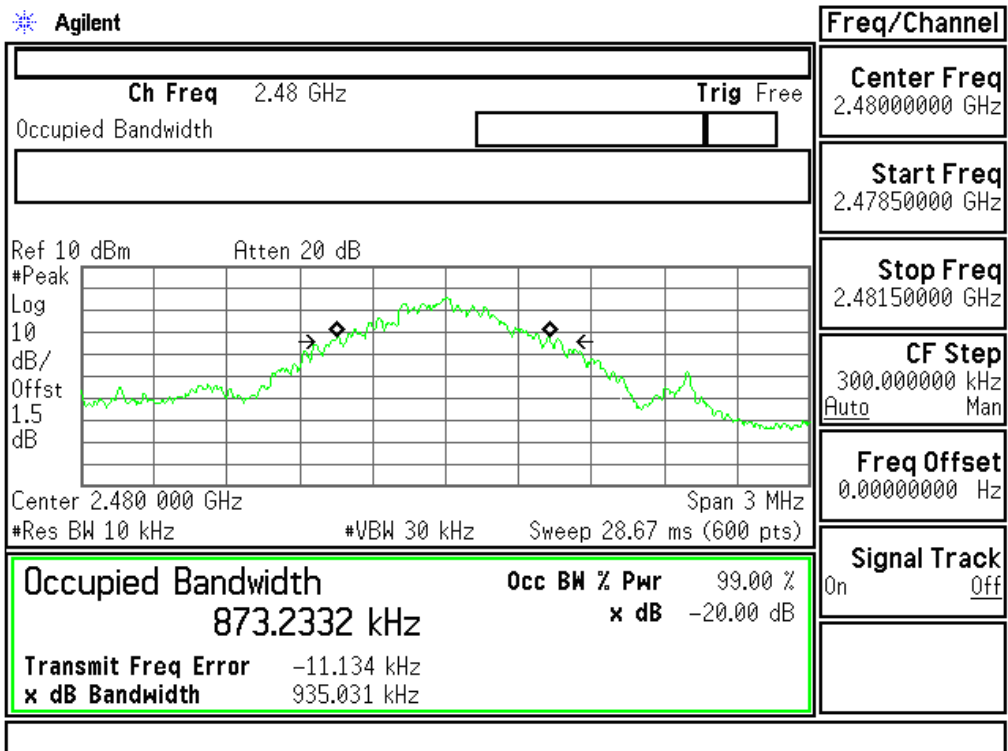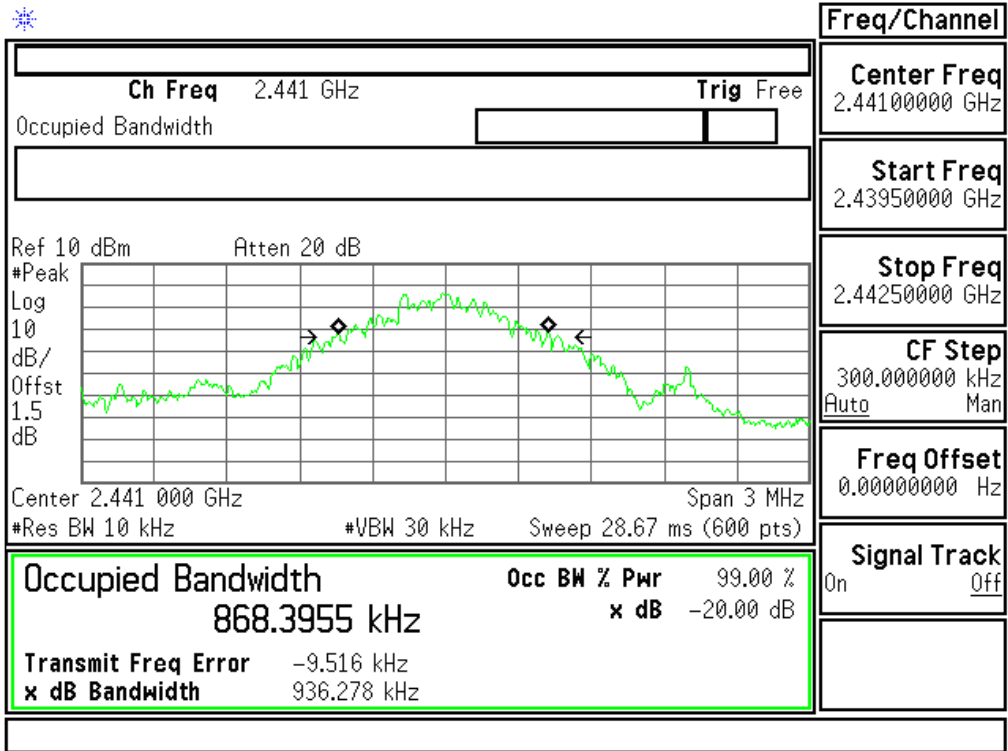

5.4 Number of Hopping Frequency


5.4.1 Limit

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

5.4.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Spectrum Analyzer	Agilent	E4407B	MY41440292	2011-06	1 Year
RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2011-06	1 Year
DC Filter	MPE	23872C	N/A	2011-06	1 Year

5.4.3 Block Diagram of Test Setup

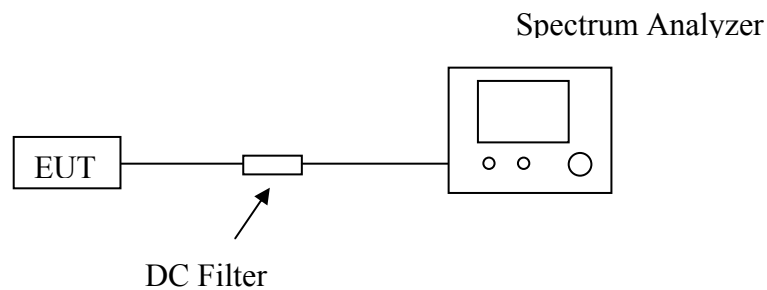

5.4.4 Test Procedure

- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
- Set the spectrum analyzer as RBW, VBW=100kHz.
- Max hold, view and count how many channel in the band.

5.4.5 Test Results


Result (No. of CH)	Limit (No. of CH)	Result
79	>75	PASS

The test data graph please refer to the following page.


Test Plot

Channel Number

2.4 GHz – 2.4415 GHz

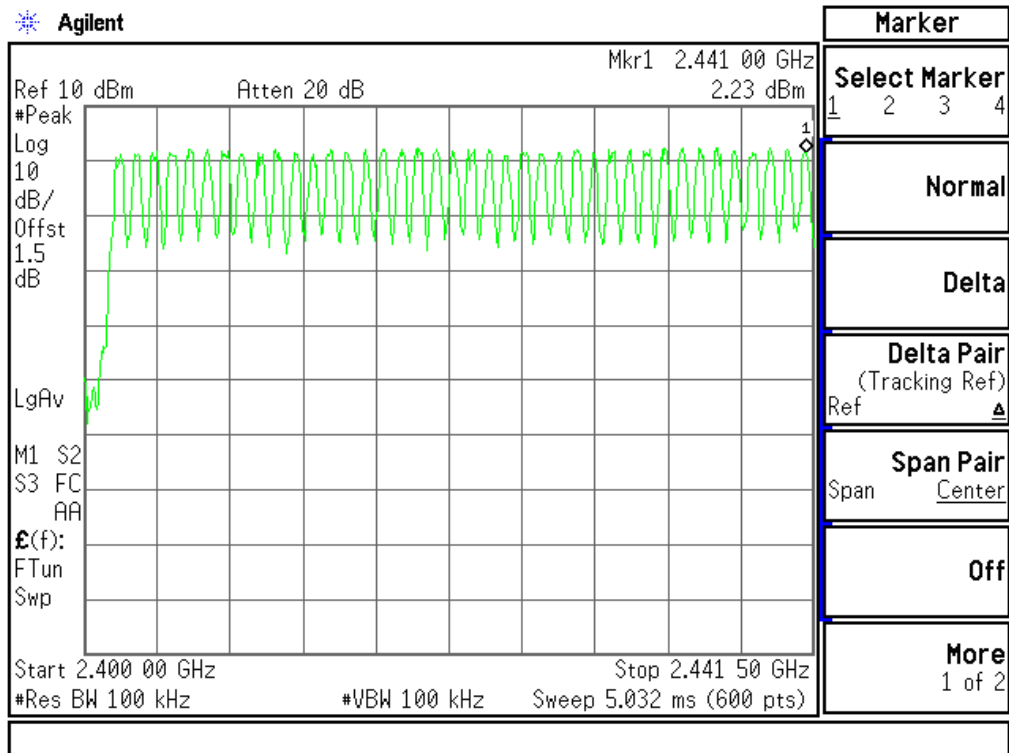

2.4415 GHz – 2.4835 GHz

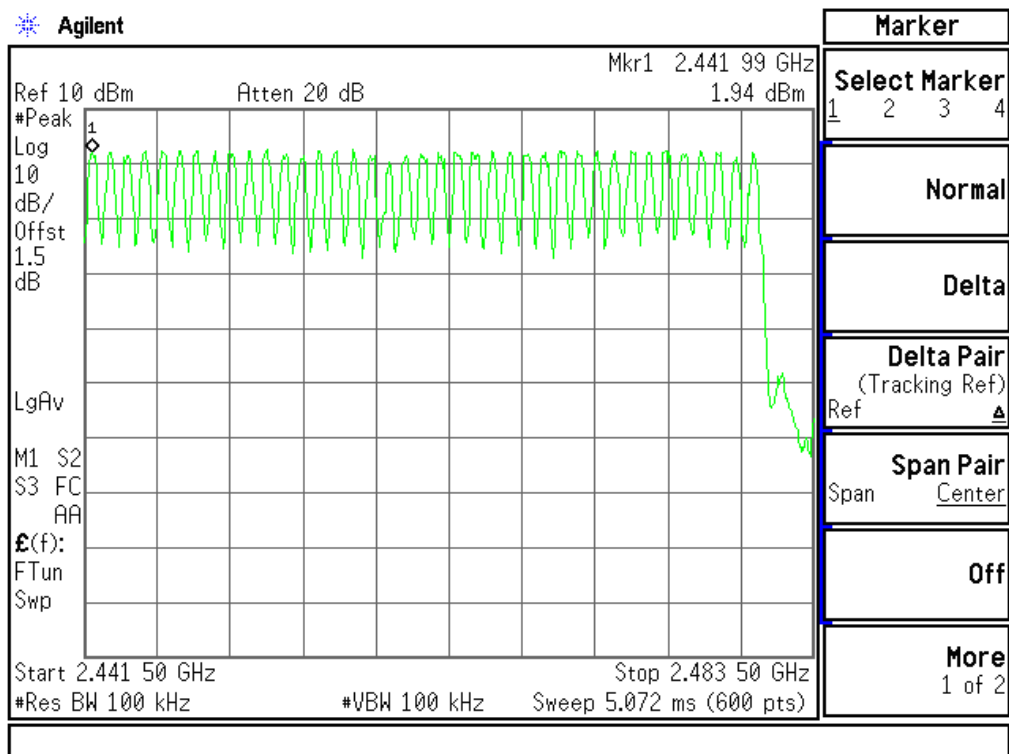

5.5 Time of Occupancy (Dwell Time)


5.5.1 Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

5.5.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Spectrum Analyzer	Agilent	E4407B	MY41440292	2011-06	1 Year
RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2011-06	1 Year
DC Filter	MPE	23872C	N/A	2011-06	1 Year

5.5.3 Block Diagram of Test Setup

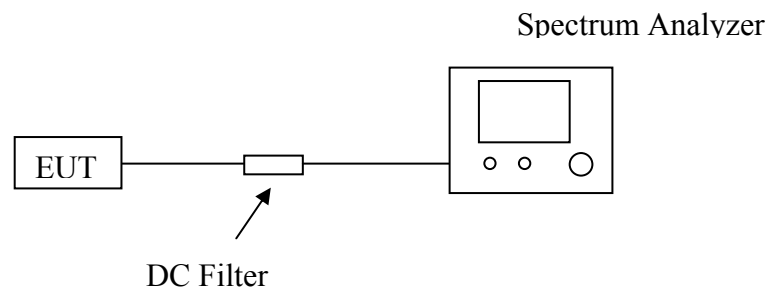

5.5.4 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- C. Set center frequency of spectrum analyzer = operating frequency.
- D. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- E. Repeat above procedures until all frequency measured were complete.

5.5.5 Test Results

DH 1

$$0.400 * (1600/2)/79 * 31.6 = 128.00 \text{ (ms)}$$

DH 3

$$1.64 * (1600/4)/79 * 31.6 = 262.40 \text{ (ms)}$$


DH 5

$$2.932 * (1600/6)/79 * 31.6 = 312.77 \text{ (ms)}$$


The test data graph please refer to the following page.

Test Plot


DH 1

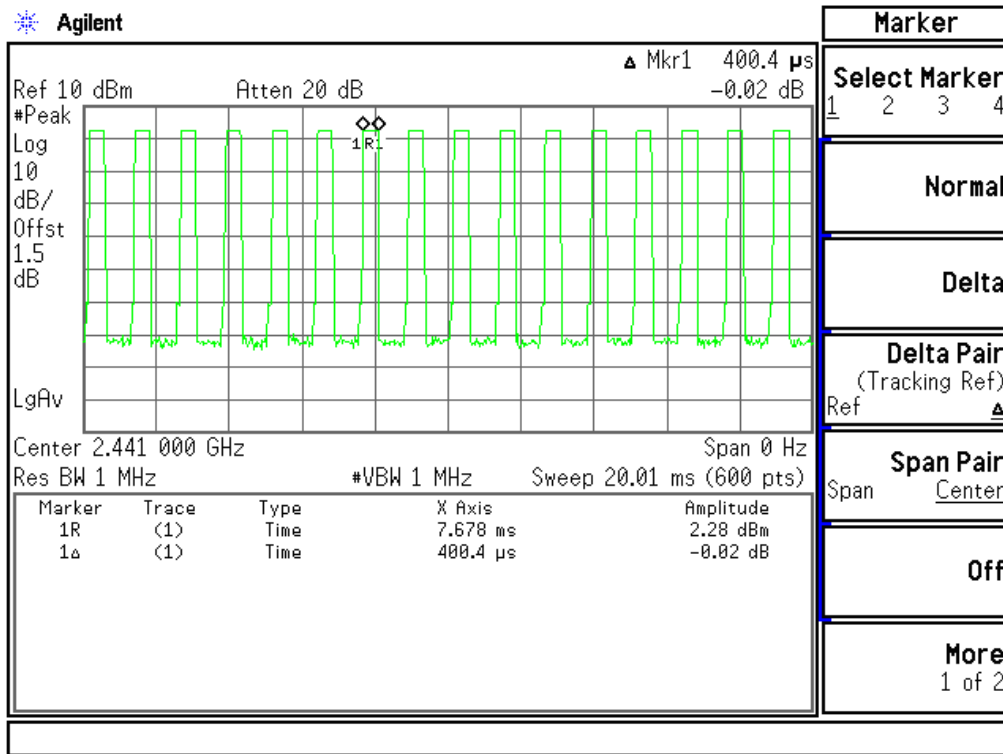

DH 3

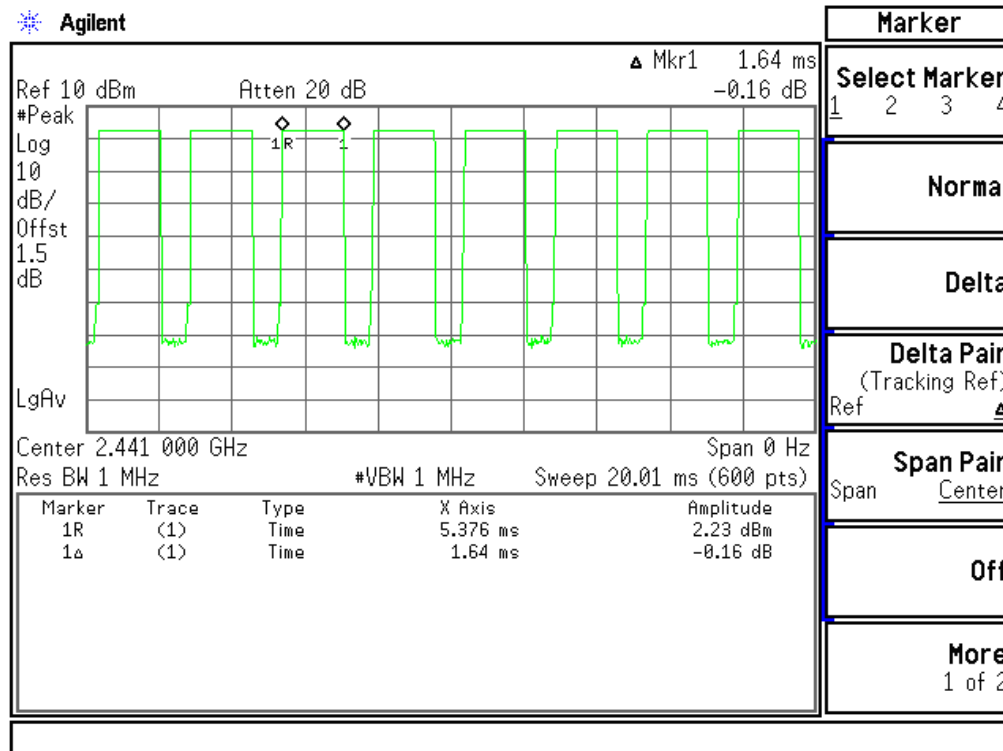

DH 5

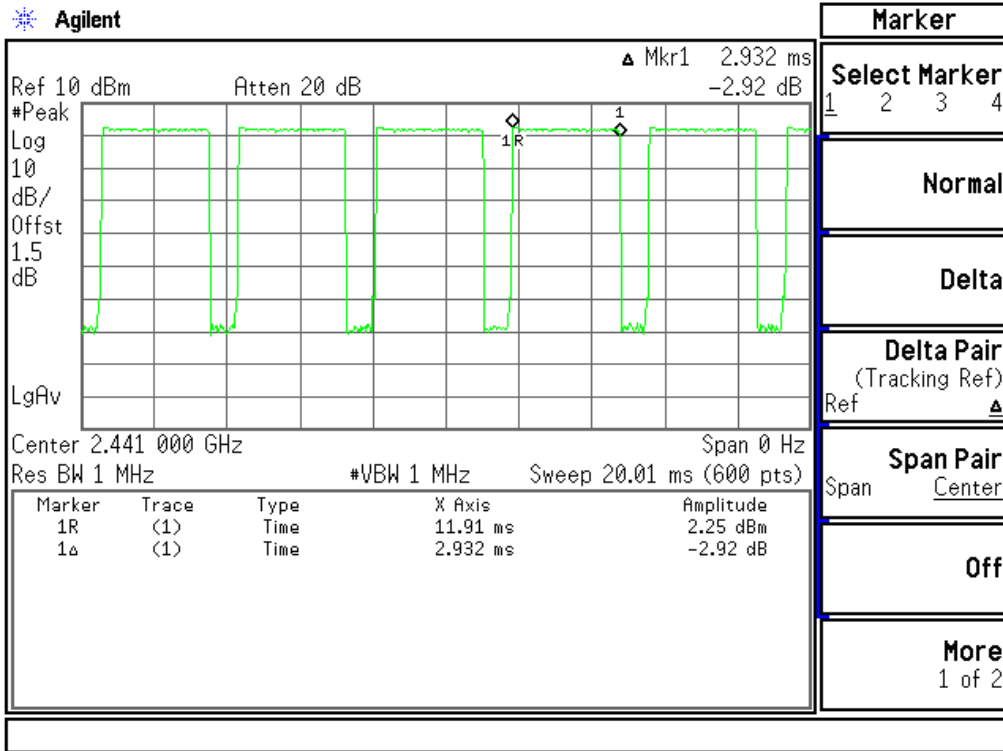

5.6 Spurious Emissions


5.6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.6.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Spectrum Analyzer	Agilent	E4407B	MY41440292	2011-06	1 Year
RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2011-06	1 Year
DC Filter	MPE	23872C	N/A	2011-06	1 Year

5.6.3 Block Diagram of Test Setup

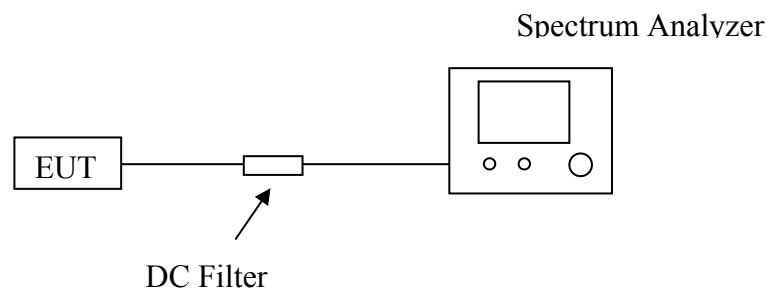

5.6.4 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

5.6.5 Test Results


No non-compliance noted

The test data graph please refer to the following page.


Test Plot

CH Low

30MHz ~ 2.9GHz

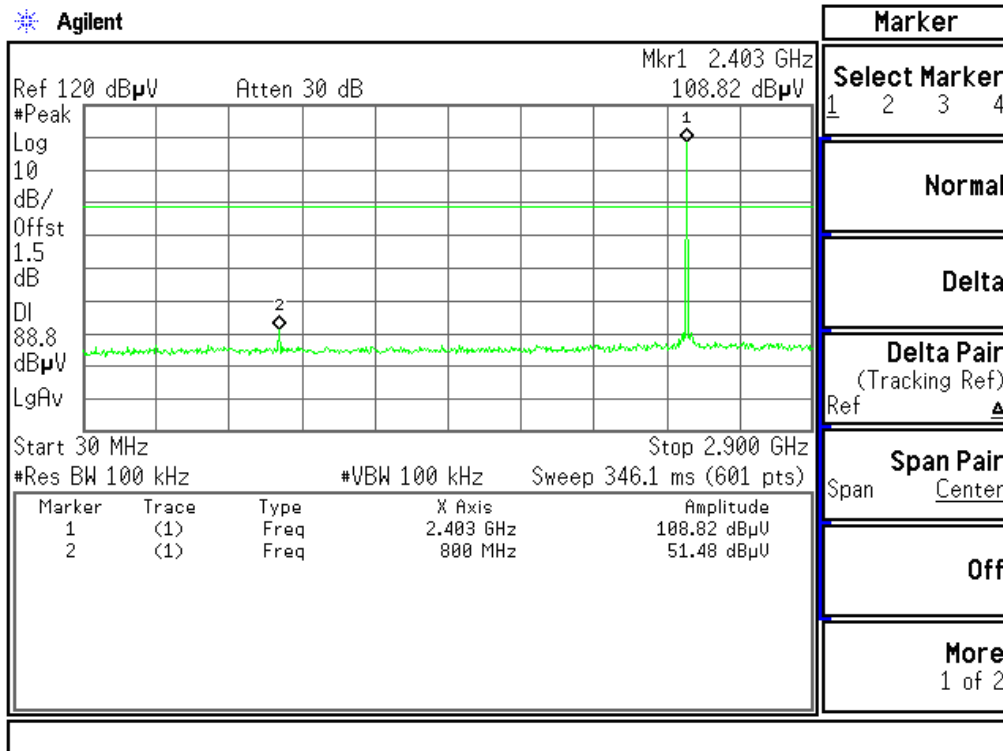


2.9GHz ~ 26.5GHz

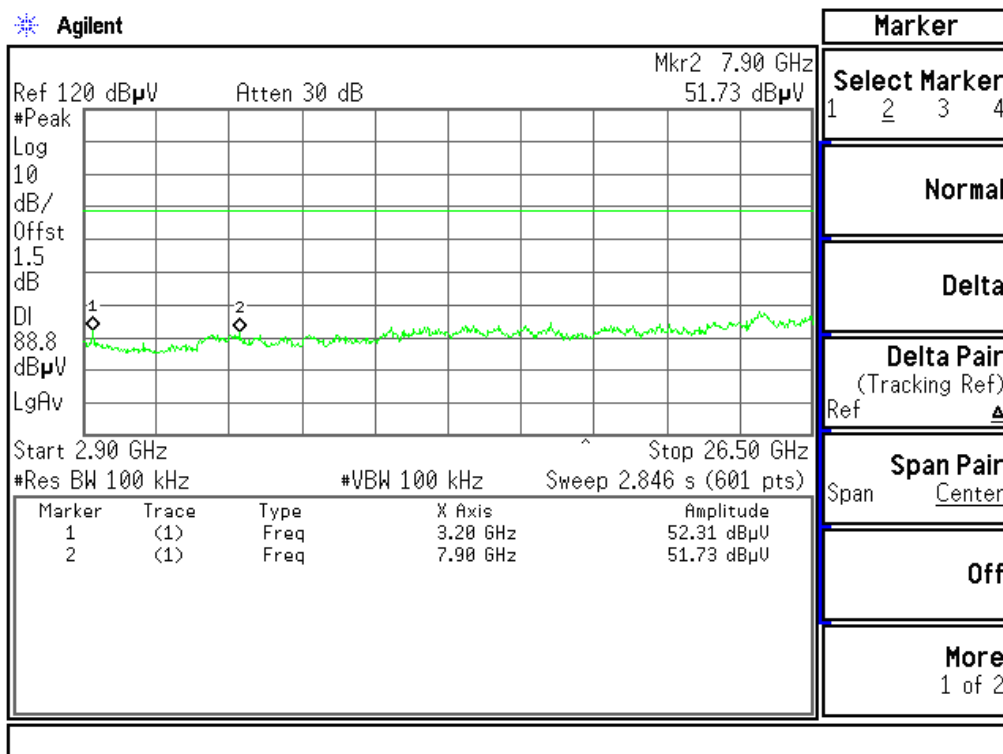


CH Mid

30MHz ~ 2.9GHz

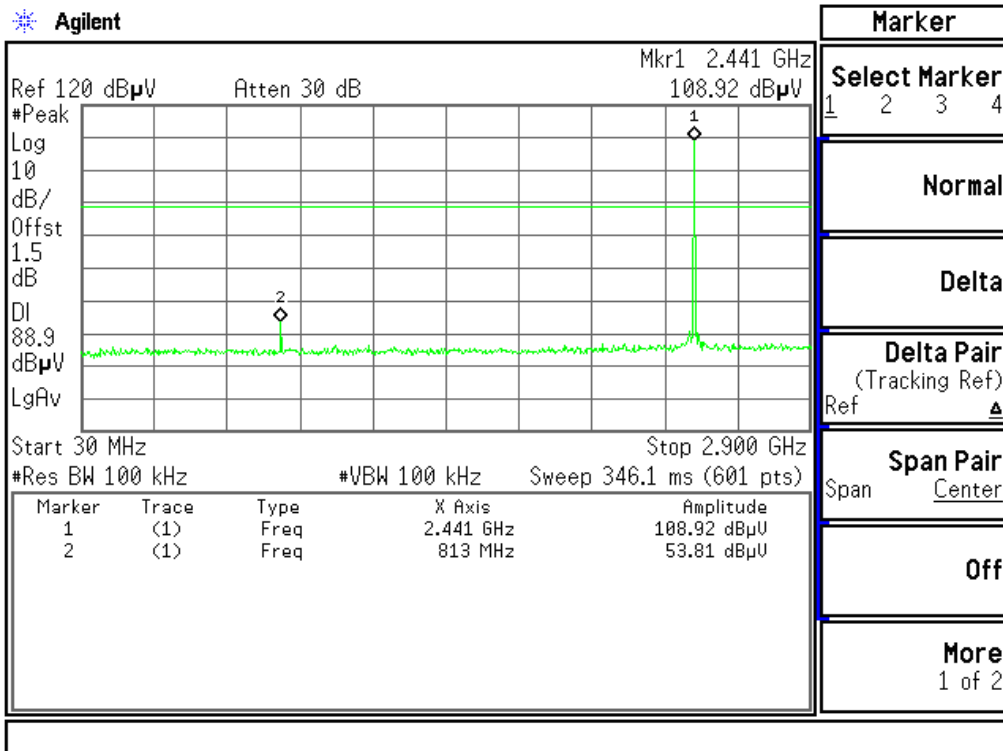


2.9GHz ~ 26.5GHz

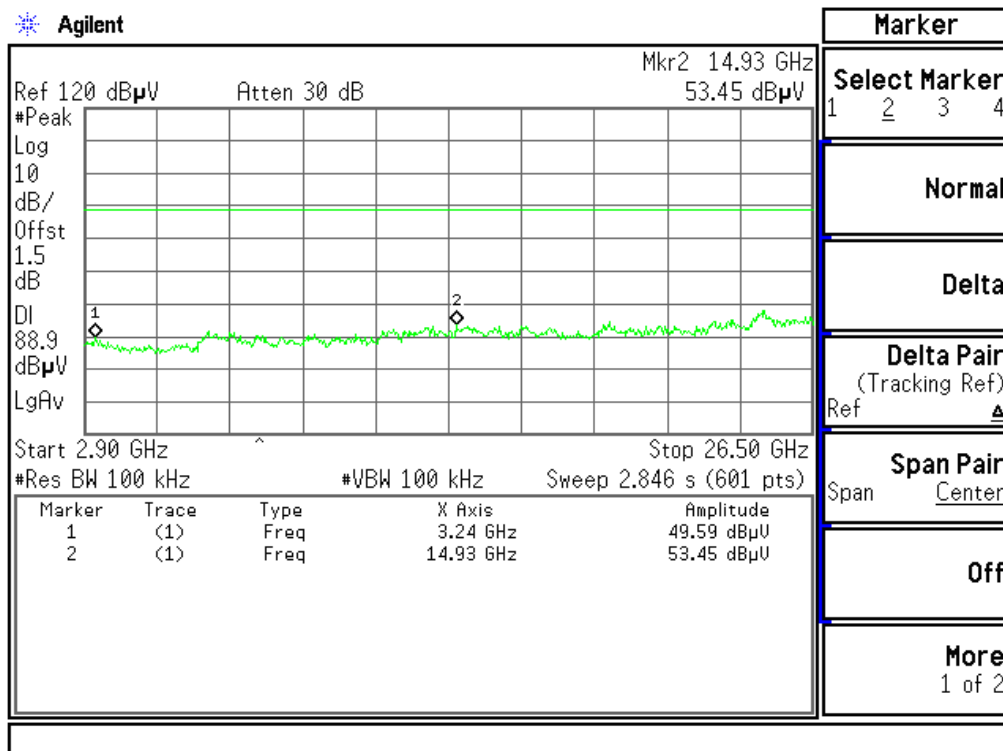


CH High

30MHz ~ 2.9GHz

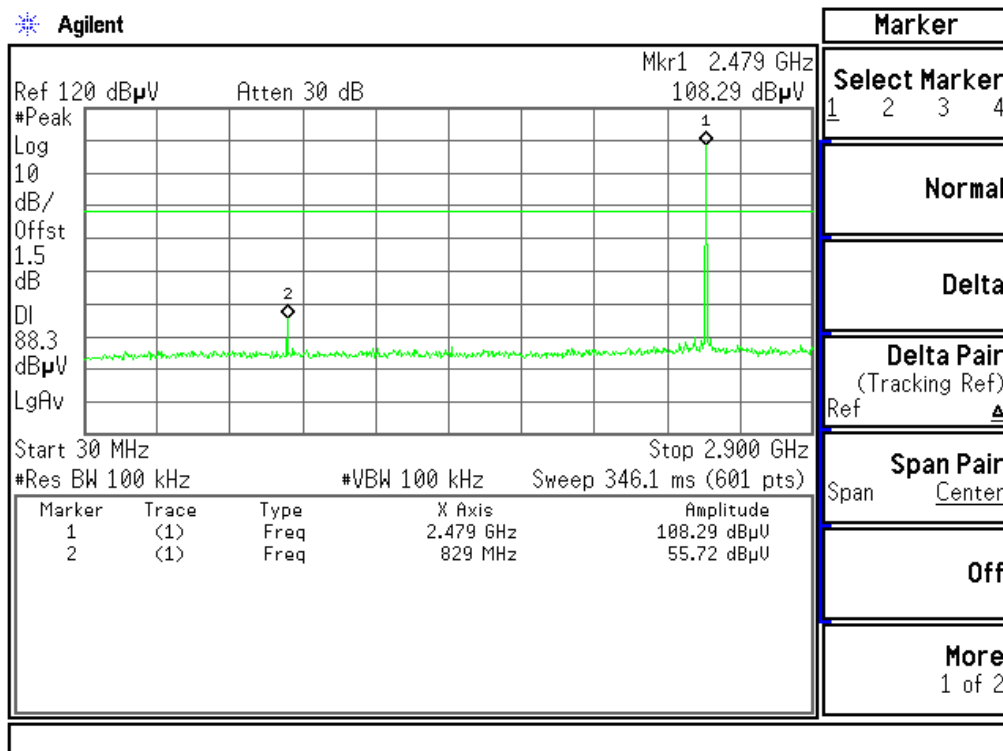

2.9GHz ~ 26.5GHz

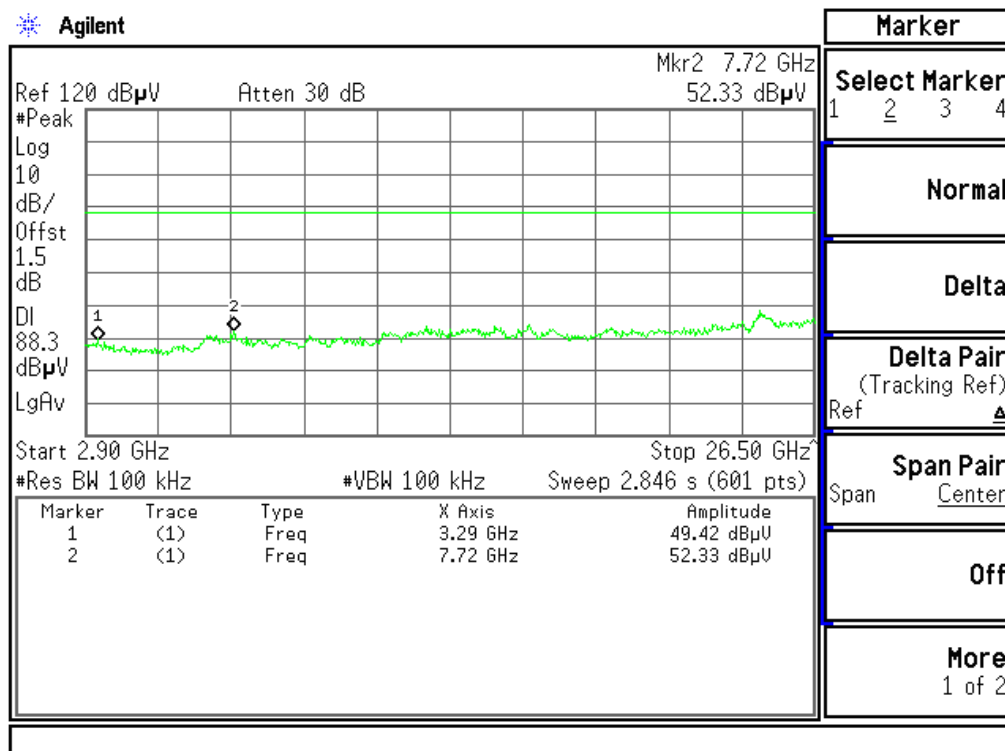


6. RADIATED EMISSION MEASUREMENT


6.1 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	ANRITSU	MS2661C	6200140915	2011-06	1 Year
2	Test Receiver	Rohde & Schwarz	ESCS30	828985/018	2011-06	1 Year
3	Antenna	Schwarzbeck	VULB9163	142	2011-06	1 Year
6.2	Horn-antenna	SCHWARZBEC K	BBHA9120D	D:266	2011-06	1 Year

Block Diagram of Test Setup

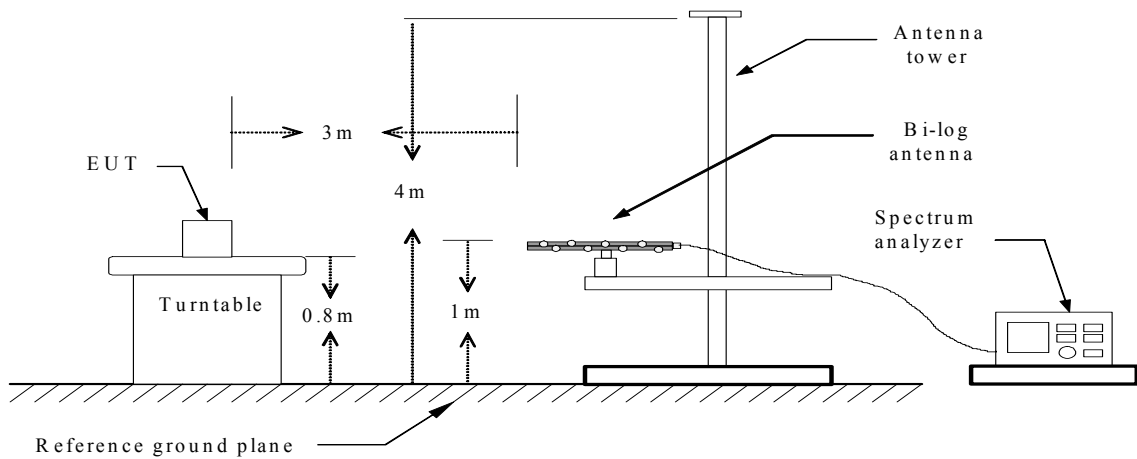

Below 1 GHz

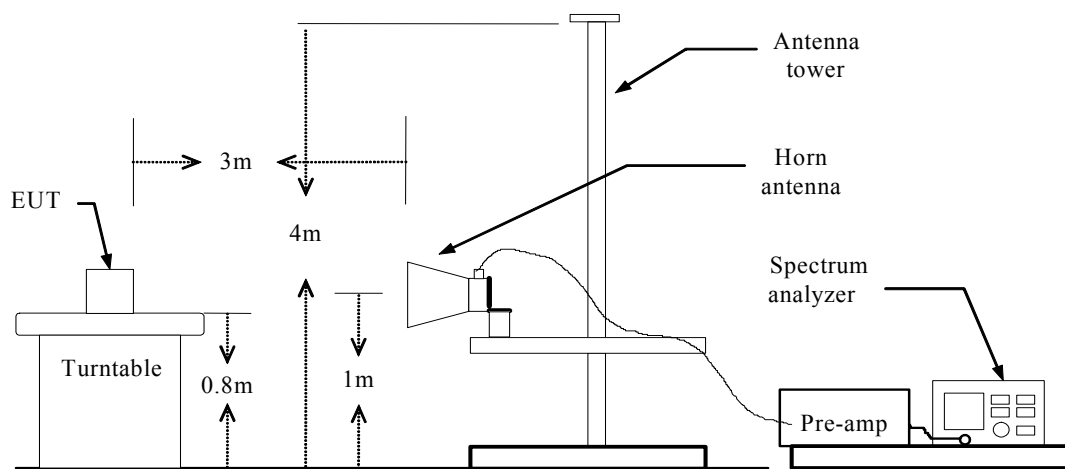

Above 1 GHz

6.3 Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

Part 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector.

Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Part 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

6.4 Test Results

PASS.

The test data please refer to following page.

Below 1GHz**Operation Mode:** Normal link**Test Date:** July 23, 2011**Temperature:** 23°C**Humidity:** 50 % RH

Freq. (MHz)	Ant.Pol. H/V	Detector Mode	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit (dBuV/m)	Margin (dB)
53.32	V	Peak	17.4	13.54	30.94	43.5	-12.56
127.31	V	Peak	18.39	7.59	25.98	43.5	-17.52
168.34	V	Peak	19.93	9.78	29.71	43.5	-13.79
300.48	V	Peak	17.46	13.88	31.34	46.0	-14.66
371.98	V	Peak	18.73	16.13	34.86	46.0	-11.14
844.12	V	Peak	16.34	20.31	36.65	46.0	-9.35
144.58	H	Peak	21.03	9.01	30.04	43.5	-13.46
215.24	H	Peak	16.08	10.81	26.89	43.5	-16.61
270.53	H	Peak	18.94	13.10	32.04	46.0	-13.96
298.90	H	Peak	18.56	13.89	32.45	46.0	-13.55
369.89	H	Peak	17.01	16.08	33.09	46.0	-12.91
883.51	H	Peak	14.37	22.37	36.74	46.0	-9.26

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz, No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

Above 1GHz

Operation Mode: TX/ CH Low**Test Date:** July 23, 2011**Temperature:** 23°C**Humidity:** 50 % RH

错误! 不能通过编辑域代码创建对象。

Operation Mode: TX/ CH Mid**Test Date:** July 23, 2011**Temperature:** 23°C**Humidity:** 50% RH

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
4883.10	V	40.69	28.88	10.98	51.67	39.86	74	54	-14.14	Avg
7324.33	V	32.89	21.58	18.54	51.43	40.12	74	54	-13.88	Avg
4883.67	H	39.46	28.83	10.98	50.44	39.81	74	54	-14.19	Avg
7324.25	H	33.19	20.52	18.53	51.72	39.05	74	54	-14.95	Avg

Operation Mode: TX/ CH High**Test Date:** July 23, 2011**Temperature:** 23°C**Humidity:** 50 % RH


Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
4961.00	V	40.04	28.83	10.98	51.02	39.81	74	54	-14.19	Avg
7441.69	V	31.59	21.33	18.54	50.13	39.87	74	54	-14.13	Avg
4960.25	H	38.25	27.53	10.98	49.23	38.51	74	54	-15.49	Avg
7440.00	H	31.59	20.24	18.53	50.12	38.77	74	54	-15.23	Avg

7. POWER LINE CONDUCTED EMISSIONS

7.1 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	2011-06	1 Year
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	2011-06	1 Year
50 Coaxial Switch	Anritsu	MP59B	M20531	2011-06	1 Year

7.2 Block Diagram of Test Setup

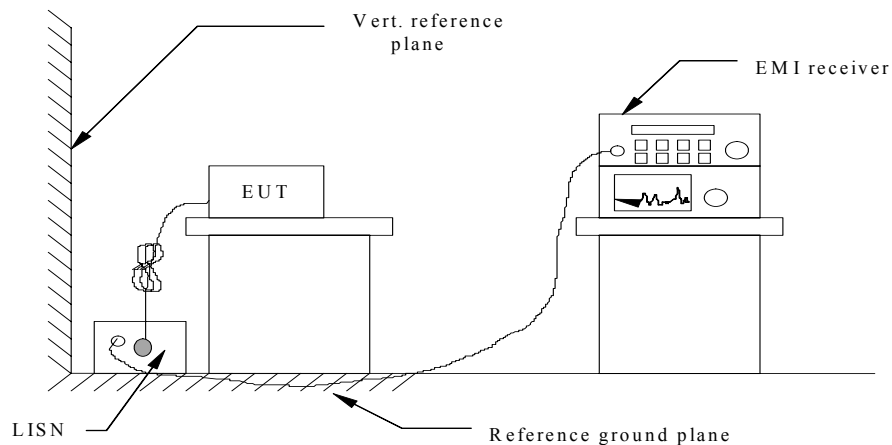

7.3 Conducted Emission Limit

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

7.4 Test Results

PASS.

According to Paragraph (f) of FCC Part 15 section 15.247, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

8. ANTENNA REQUIREMENT

8.1 Standard Applicable

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the re-sponsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Antenna Connected Construction

The directional gains of antenna used for transmitting is 1.5dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see EUT photo for details.