




FCC Part 15C Measurement and Test Report

For

Acrox Technologies Co., Ltd.

4F., No.89, Minshan St., Neihu Dist., Taipei City 114, Taiwan, R.O.C

FCC ID: PRDKB26

FCC Rule(s):	<u>FCC Part 15.249</u>
Product Description:	<u>Wireless Touchpad Keyboard</u>
Tested Model:	<u>K2R</u>
Report No.:	<u>STR16098120I</u>
Tested Date:	<u>2016-09-12 to 2016-09-20</u>
Issued Date:	<u>2016-09-20</u>
Tested By:	<u>Tink Zeng / Engineer</u> 
Reviewed By:	<u>Silin Chen / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> 
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
2. SUMMARY OF TEST RESULTS.....	7
3. ANTENNA REQUIREMENTS.....	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. RADIATED EMISSIONS.....	9
4.1 STANDARD APPLICABLE.....	9
4.2 TEST PROCEDURE.....	9
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.4 ENVIRONMENTAL CONDITIONS.....	11
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	11
5. OUT OF BAND EMISSIONS.....	20
5.1 STANDARD APPLICABLE.....	20
5.2 TEST PROCEDURE.....	20
5.3 ENVIRONMENTAL CONDITIONS.....	20
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	20
6. EMISSION BANDWIDTH.....	23
6.1 STANDARD APPLICABLE.....	23
6.2 TEST PROCEDURE.....	23
6.3 ENVIRONMENTAL CONDITIONS.....	23
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	23

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Acrox Technologies Co., Ltd.
Address of applicant: 4F., No.89, Minshan St., Neihu Dist., Taipei City 114,
Taiwan, R.O.C
Manufacturer: Acrox Technologies Co., Ltd.
Address of manufacturer: Hsinmin Industria, Changan Town, Dongguan City,
Guangdong, China

General Description of EUT	
Product Name:	Wireless Touchpad Keyboard
Trade Name:	ACROX/Blackweb
Model No.:	K2R
Adding Model(s):	BWA15HO107
Rated Voltage:	Battery DC3.0V
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model K2R, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	2408-2474MHz
Max. Field Strength:	95.13dBuV/m(at 3m)
Data Rate:	/
Modulation:	FSK
Quantity of Channels:	34
Channel Separation:	2MHz
Antenna Type:	PCB Antenna
Antenna Gain:	-5dBi
Lowest Internal Frequency of EUT:	12MHz

1.2 Test Standards

The following report is prepared on behalf of the Acrox Technologies Co., Ltd. in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107,15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2408MHz
TM2	Middle Channel	2440MHz
TM3	High Channel	2474MHz

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	ETS	3116B	00088203	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	N/A
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215 (c)	Emission Bandwidth	Compliant

3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a PCB antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500



(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

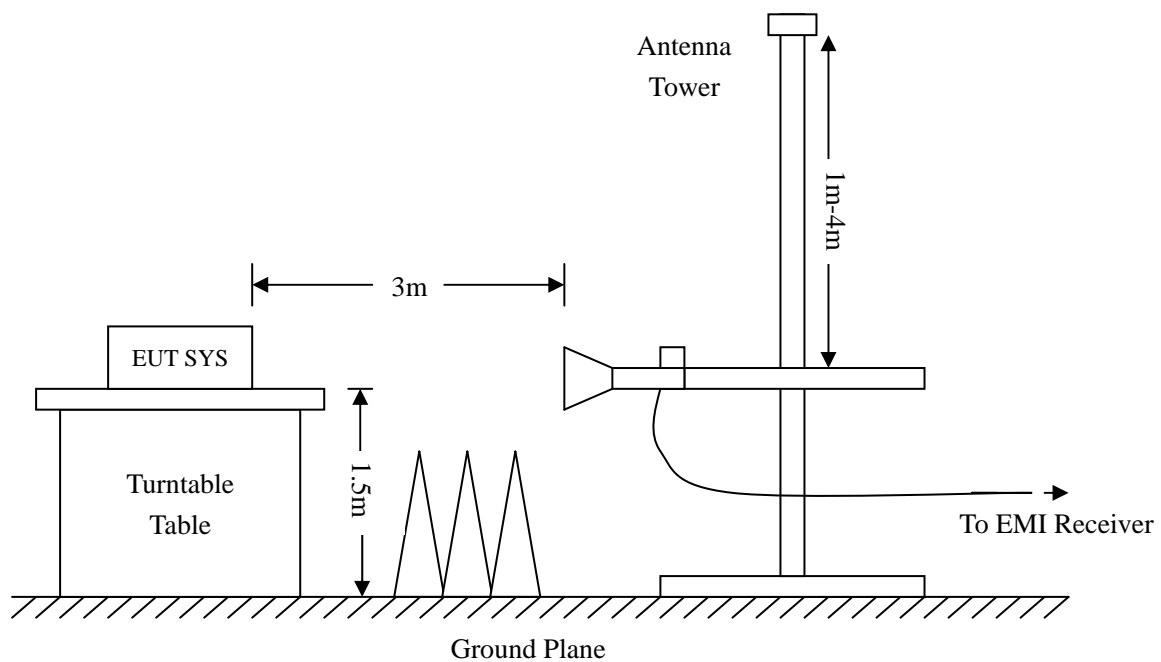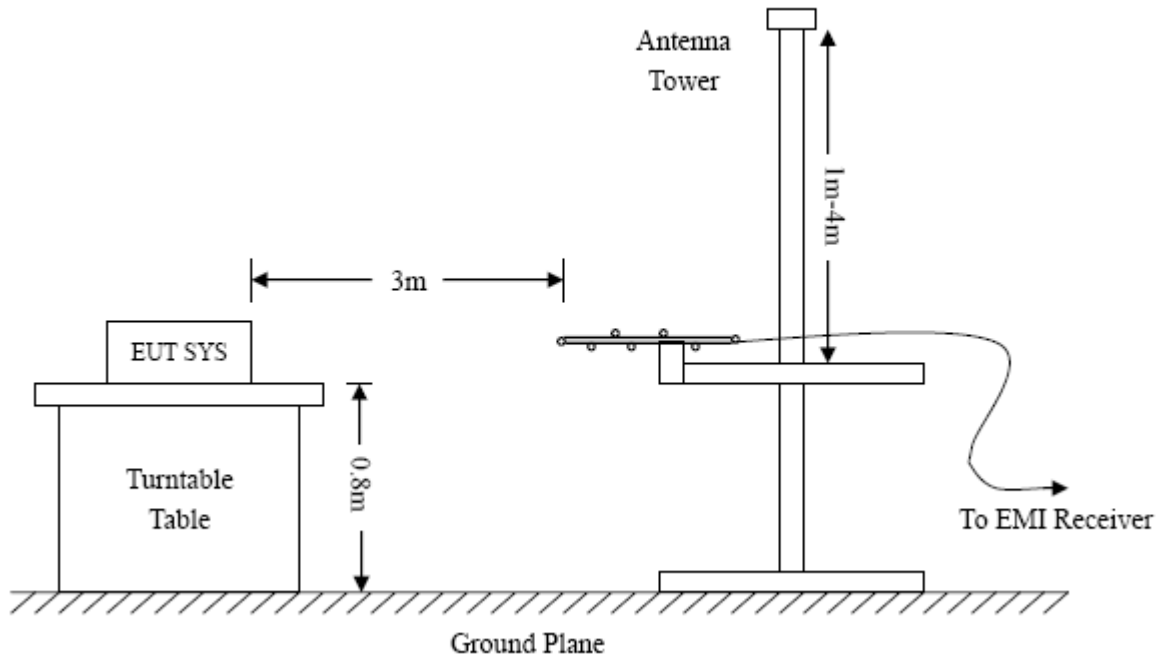

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

4.5 Summary of Test Results/Plots

According to the data below, the [FCC Part 15.205](#), [15.209](#) and [15.249](#) standards, and had the worst margin of:


-10.03 dB at 2474.9230 MHz in the Vertical polarization, Average, High Channel, 9 kHz to 25 GHz, 3Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: *Wireless Touchpad Keyboard*
 Tested Model: *K2R*
 Operating Condition: *Transmitting Low Channel (2408MHz)*
 Comment: *DC 3V*

Test Specification: *Horizontal*

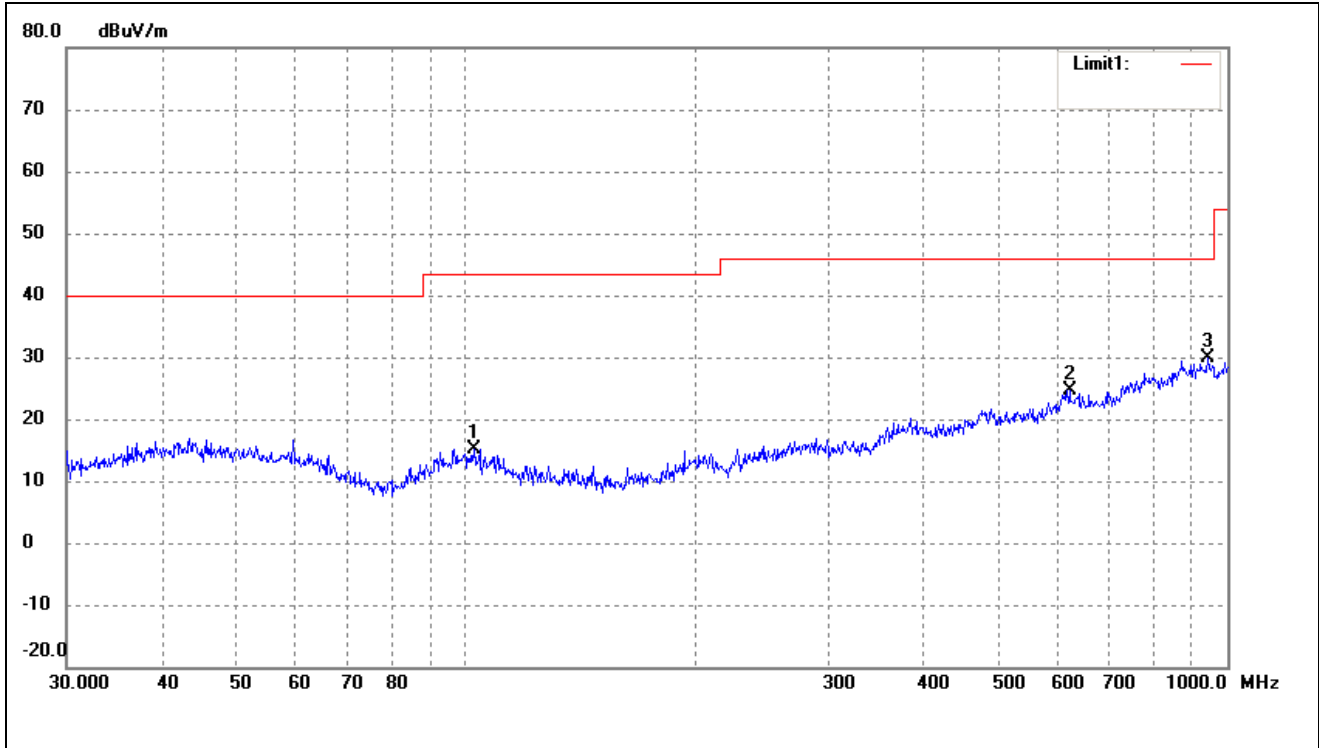

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	102.7192	26.95	-11.71	15.24	43.50	-28.26	264	100	peak
2	620.7096	27.42	-2.82	24.60	46.00	-21.40	113	200	peak
3	942.1305	27.57	2.21	29.78	46.00	-16.22	287	100	peak

Test Specification: Vertical

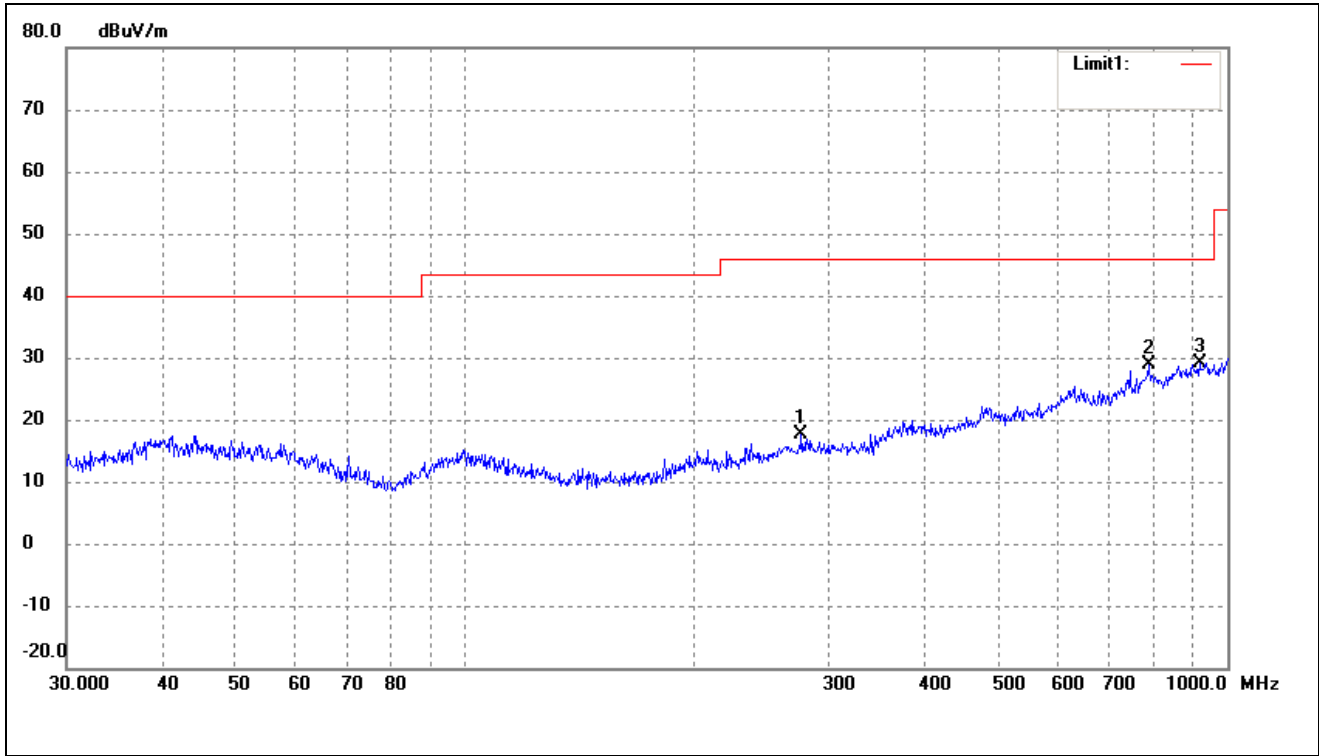


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	276.1236	27.37	-9.62	17.75	46.00	-28.25	234	100	peak
2	787.8513	28.53	0.32	28.85	46.00	-17.15	118	100	peak
3	919.2866	27.41	1.74	29.15	46.00	-16.85	164	100	peak

Operating Condition: *Transmitting Middle Channel (2440MHz)*


Comment: *DC3V*

Test Specification: *Horizontal*

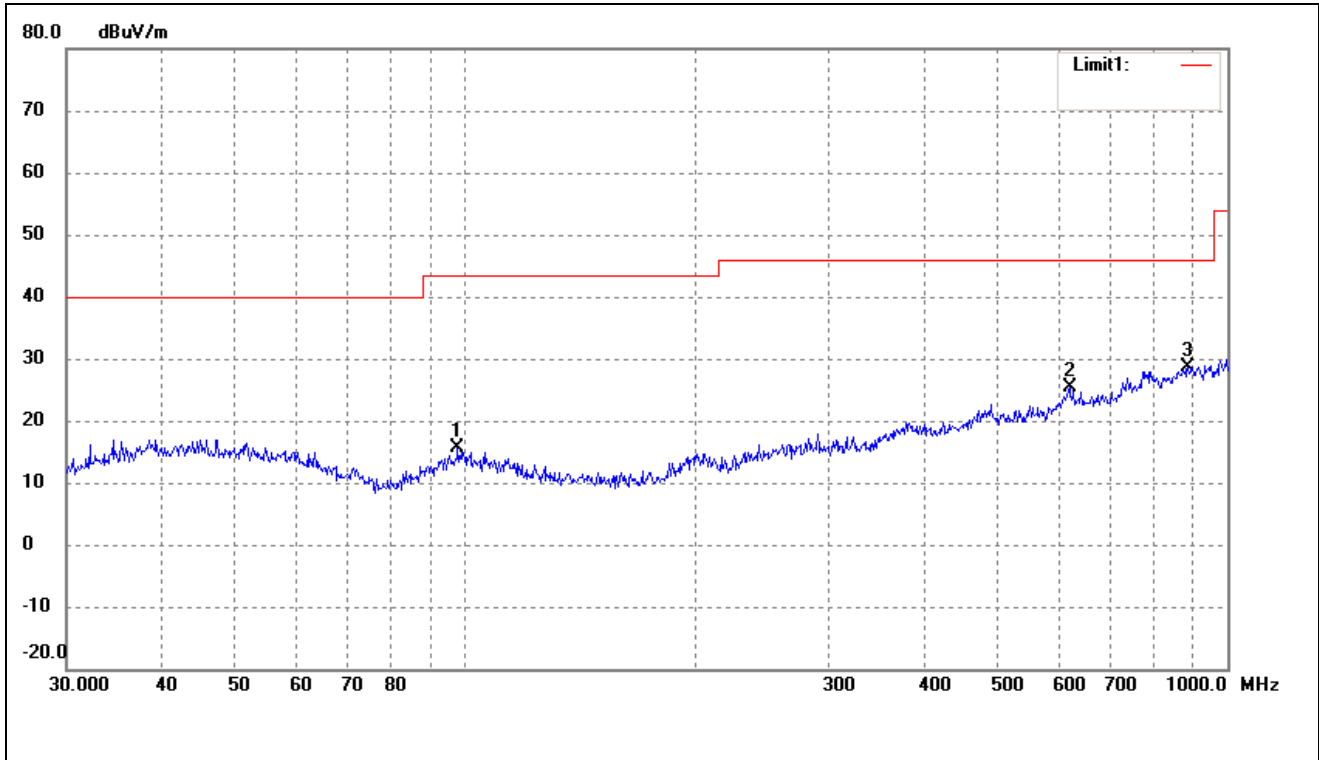

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	97.7983	27.58	-11.88	15.70	43.50	-27.80	162	100	peak
2	620.7096	28.08	-2.82	25.26	46.00	-20.74	200	100	peak
3	887.6099	27.22	1.45	28.67	46.00	-17.33	108	100	peak

Test Specification: Vertical

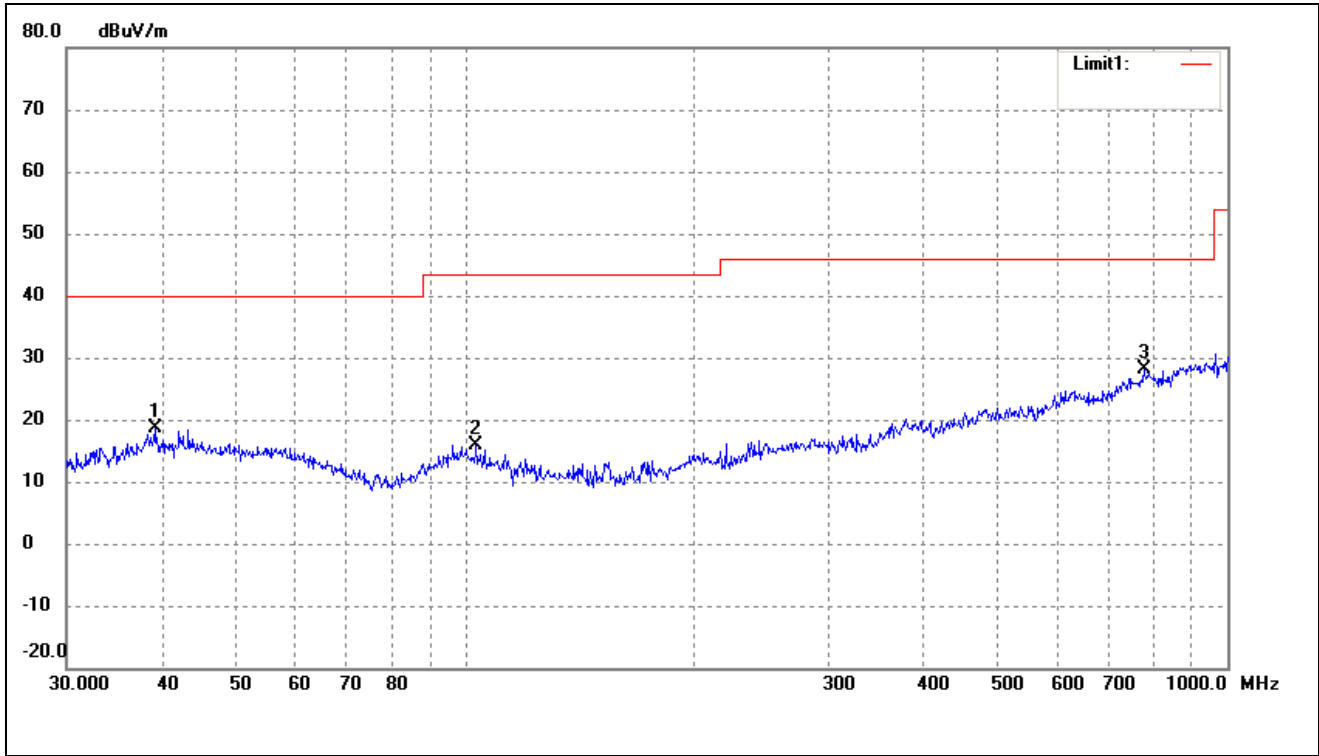


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.1616	31.84	-13.25	18.59	40.00	-21.41	301	100	peak
2	103.4421	27.78	-11.80	15.98	43.50	-27.52	187	100	peak
3	776.8778	27.88	0.30	28.18	46.00	-17.82	24	100	peak

Operating Condition: Transmitting High Channel (2474MHz)


Comment: DC3V

Test Specification: Horizontal

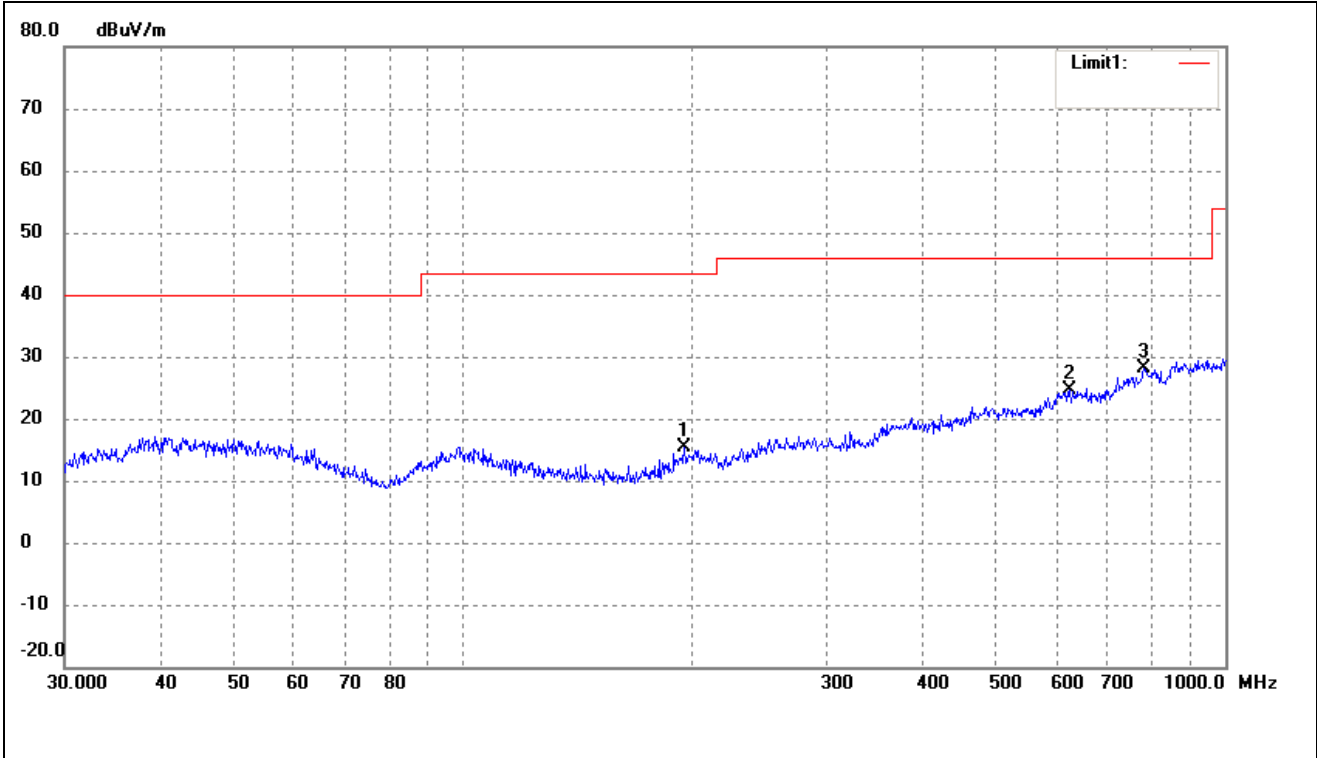

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	195.1365	27.74	-12.24	15.50	43.50	-28.00	247	100	peak
2	625.0780	27.60	-2.90	24.70	46.00	-21.30	314	100	peak
3	782.3453	27.61	0.50	28.11	46.00	-17.89	348	100	peak

Test Specification: Vertical

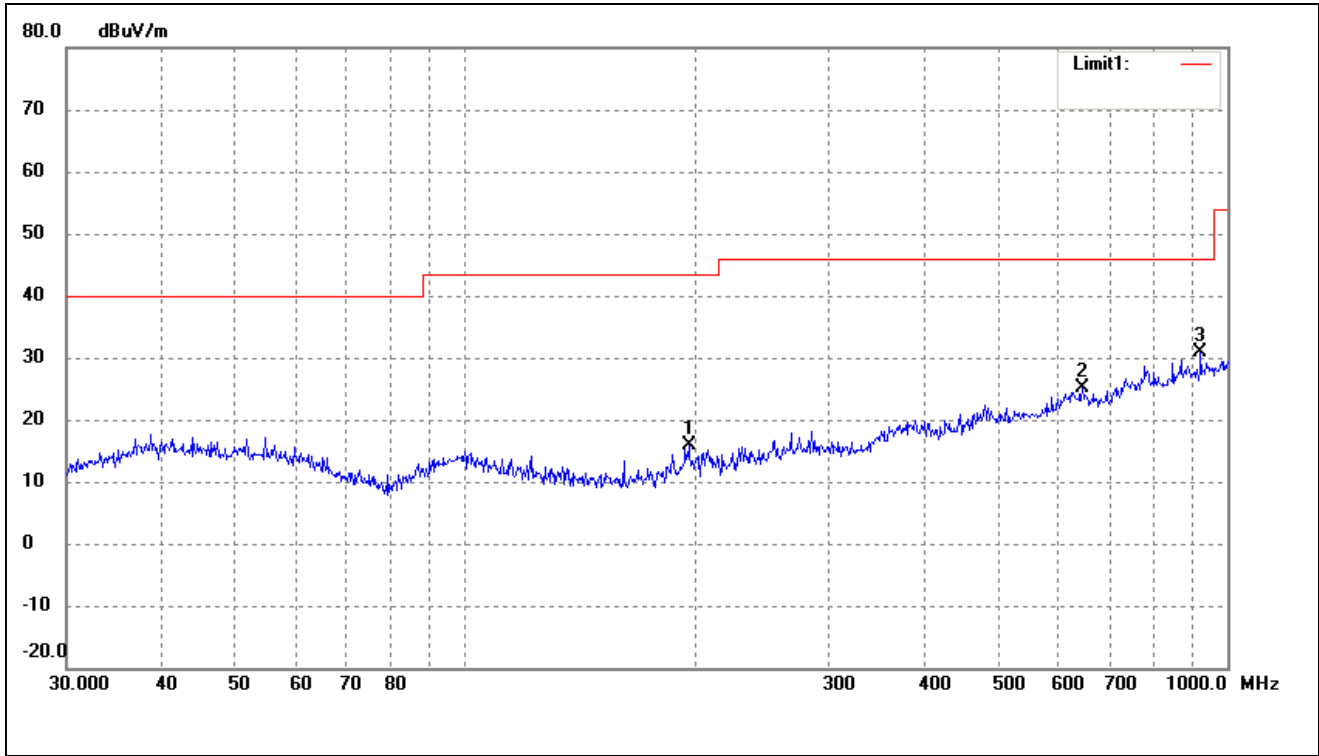

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	196.5098	28.05	-12.05	16.00	43.50	-27.50	240	100	peak
2	645.1195	28.51	-3.32	25.19	46.00	-20.81	187	100	peak
3	922.5157	29.02	1.82	30.84	46.00	-15.16	220	100	peak

Spurious Emissions Above 1GHz

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2408MHz							
2408	99.54	-4.45	85.09	114	-28.91	H	PK
2408	88.00	-4.45	73.55	94	-20.45	H	AV
4816	47.38	-0.94	46.44	74	-27.56	H	PK
4816	35.45	-0.94	34.51	54	-19.49	H	AV
7224	51.85	1.34	53.19	74	-20.81	H	PK
7224	38.95	1.34	40.29	54	-13.71	H	AV
2408	99.56	-4.45	95.11	114	-18.89	V	PK
2408	88.02	-4.45	83.57	94	-10.43	V	AV
4816	50.66	-0.94	49.72	74	-24.28	V	PK
4816	38.13	-0.94	37.19	54	-16.81	V	AV
7224	55.05	1.34	56.39	74	-17.61	V	PK
7224	41.76	1.34	43.10	54	-10.90	V	AV
Middle Channel-2440MHz							
2440	99.56	-4.45	85.11	114	-28.89	H	PK
2440	88.02	-4.45	73.57	94	-20.43	H	AV
4880	48.82	-0.94	47.88	74	-26.12	H	PK
4880	36.81	-0.94	35.87	54	-18.13	H	AV
7320	52.96	1.34	54.30	74	-19.70	H	PK
7320	39.08	1.34	40.42	54	-13.58	H	AV
2440	99.55	-4.45	95.10	114	-18.90	V	PK
2440	88.05	-4.45	83.60	94	-10.40	V	AV
4880	50.25	-0.94	49.31	74	-24.69	V	PK
4880	37.57	-0.94	36.63	54	-17.37	V	AV
7320	54.84	1.34	56.18	74	-17.82	V	PK
7320	40.56	1.34	41.90	54	-12.10	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2474MHz							
2474	99.57	-4.45	85.12	114	-28.88	H	PK
2474	88.00	-4.45	73.55	94	-20.45	H	AV
4948	47.34	-0.94	46.40	74	-27.60	H	PK
4948	35.61	-0.94	34.67	54	-19.33	H	AV
7422	52.35	1.34	53.69	74	-20.31	H	PK
7422	38.88	1.34	40.22	54	-13.78	H	AV
2474	99.58	-4.45	95.13	114	-18.87	V	PK
2474	88.42	-4.45	83.97	94	-10.03	V	AV
4948	51.24	-0.94	50.30	74	-23.70	V	PK
4948	37.01	-0.94	36.07	54	-17.93	V	AV
7422	54.79	1.34	56.13	74	-17.87	V	PK
7422	39.69	1.34	41.03	54	-12.97	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 4th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

5.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar


5.4 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.


Please refer to the test plots as below.

Lowest Bandedge
Vertical (Worst case)

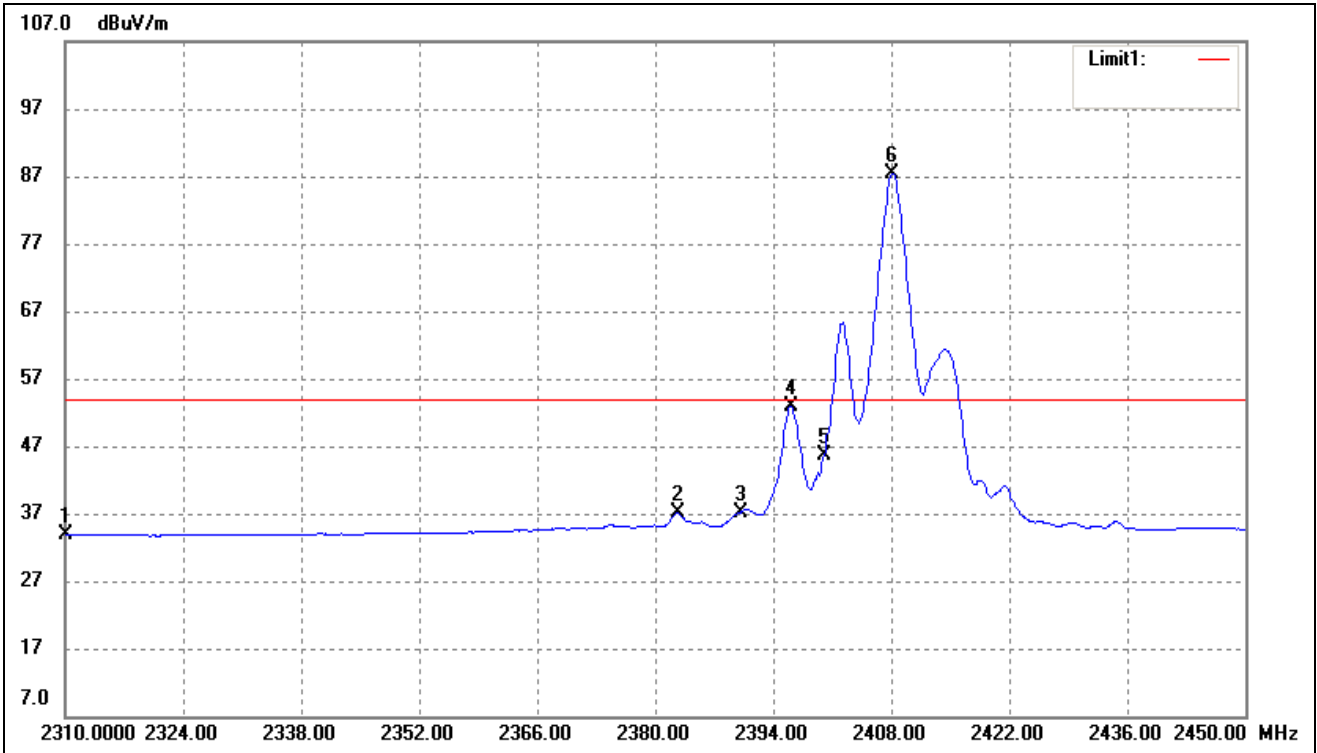

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	35.26	-1.30	33.96	54.00	-20.04	Ave Detector
	2310.000	47.93	-1.30	46.63	74.00	-27.37	Peak Detector
2	2382.660	37.60	-0.57	37.03	54.00	-16.97	Ave Detector
	2384.060	57.44	-0.56	56.88	74.00	-17.12	Peak Detector
3	2390.000	37.72	-0.50	37.22	54.00	-16.78	Ave Detector
	2390.000	53.97	-0.50	53.47	74.00	-20.53	Peak Detector
4	2396.100	53.31	-0.44	52.87	54.00	-1.13	Ave Detector
	2396.100	66.52	-0.44	66.08	74.00	-7.92	Peak Detector
5	2400.000	45.96	-0.40	45.56	54.00	-8.44	Ave Detector
	2400.000	60.74	-0.40	60.34	74.00	-13.66	Peak Detector
6	2408.140	87.84	-0.37	87.47	/	/	Ave Detector
	2407.440	94.70	-0.37	94.33	/	/	Peak Detector

Highest Bandedge
Vertical (Worst case)

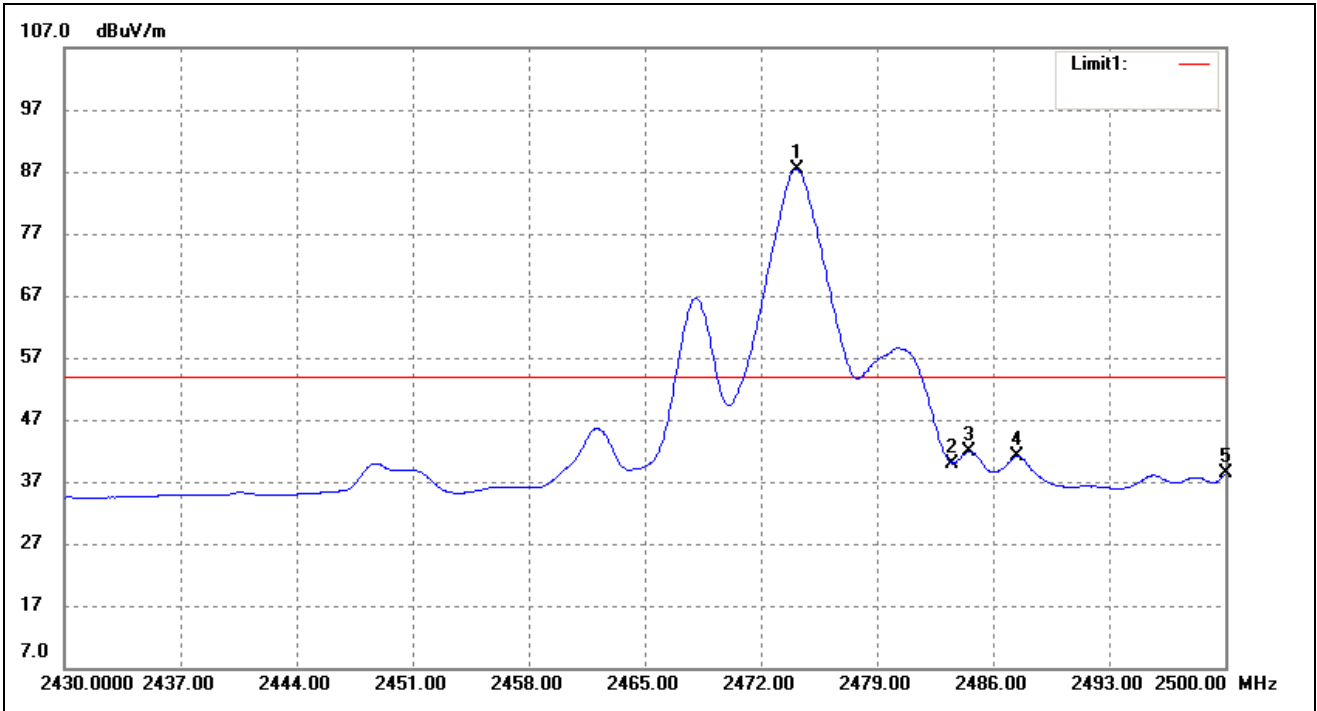

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2474.170	87.62	-0.14	87.48	/	/	Ave Detector
	2473.540	94.15	-0.14	94.01	/	/	Peak Detector
2	2483.500	40.10	-0.11	39.99	54.00	-14.01	Ave Detector
	2483.500	56.43	-0.11	56.32	74.00	-17.68	Peak Detector
3	2484.530	41.94	-0.10	41.84	54.00	-12.16	Ave Detector
	2484.810	57.02	-0.10	56.92	74.00	-17.08	Peak Detector
4	2487.470	41.17	-0.09	41.08	54.00	-12.92	Ave Detector
	2487.470	56.52	-0.09	56.43	74.00	-17.57	Peak Detector
5	2500.000	38.41	-0.05	38.36	54.00	-15.64	Ave Detector
	2500.000	50.49	-0.05	50.44	74.00	-23.56	Peak Detector

6. Emission Bandwidth

6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW \geq 1% 20dB Bandwidth, VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.3 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots


Channel	Frequency MHz	20dB Bandwidth MHz	99% Bandwidth MHz
Low Channel	2404	2.235	2.1480
Middle Channel	2440	2.238	2.1442
High Channel	2474	2.247	2.1461

Please refer to the following test plots


Low Channel:

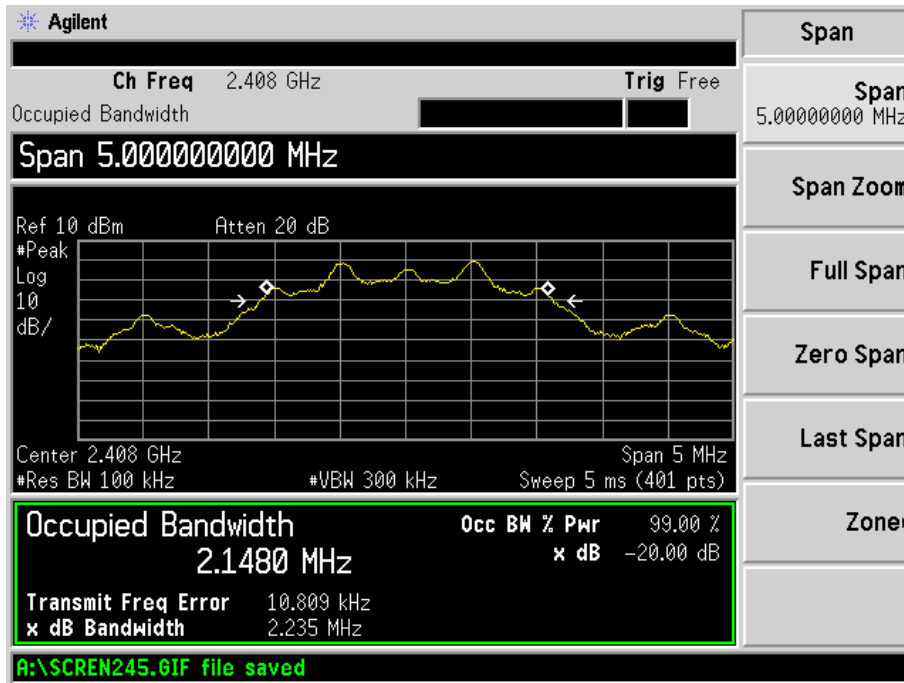

Middle Channel:

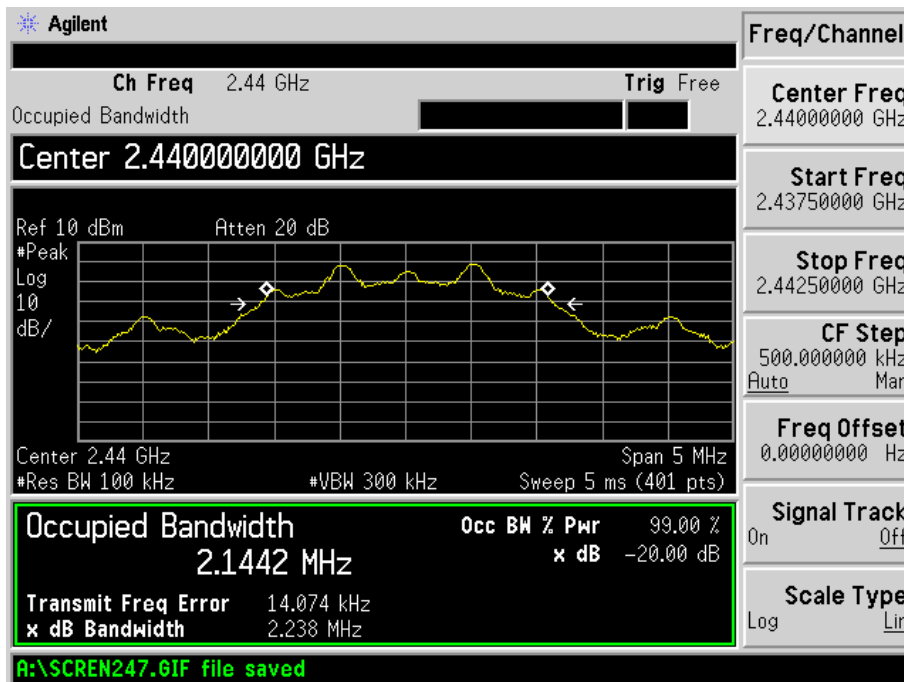

High Channel:

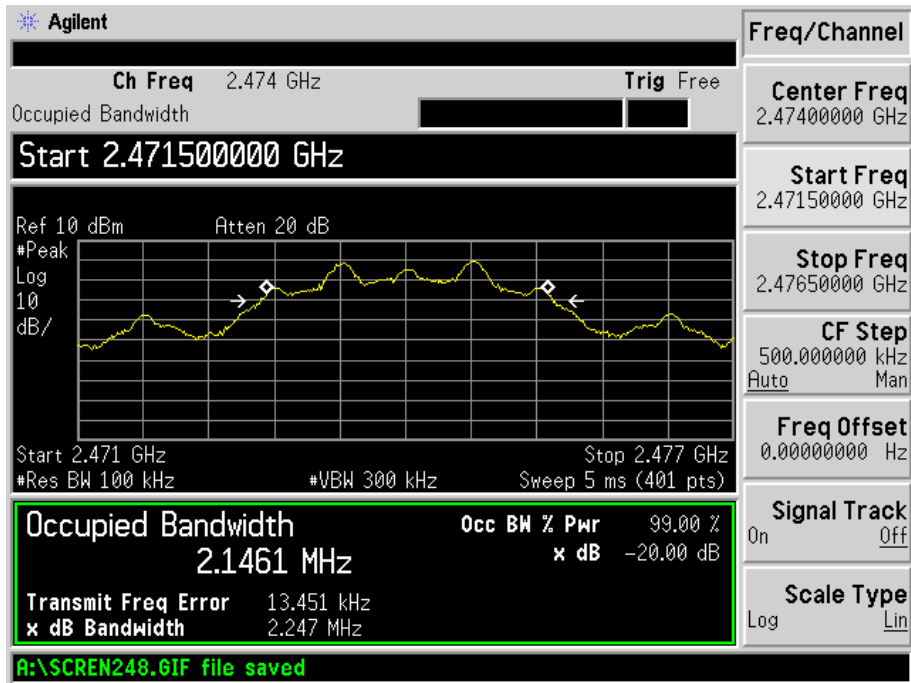

***** END OF REPORT *****