

# Test Report No.10045003 001

## Appendix D: Radiated and Mains Spurious Emission Data

(File: 10045003AppendixD)


### Contents

Radiated Emissions, Fundamental and Band Edges .....	2
Spurious Emissions, TX Mode, 1-18G.....	12
Spurious Emissions, TX Mode, 18-26G.....	18
Spurious Emissions, TX Mode, 30M-1G .....	24

# Radiated Emissions, Fundamental and Band Edges




**TUV Taiwan**  
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105  
 Tel:+886-2172-7000 fax:+886-2528-0018

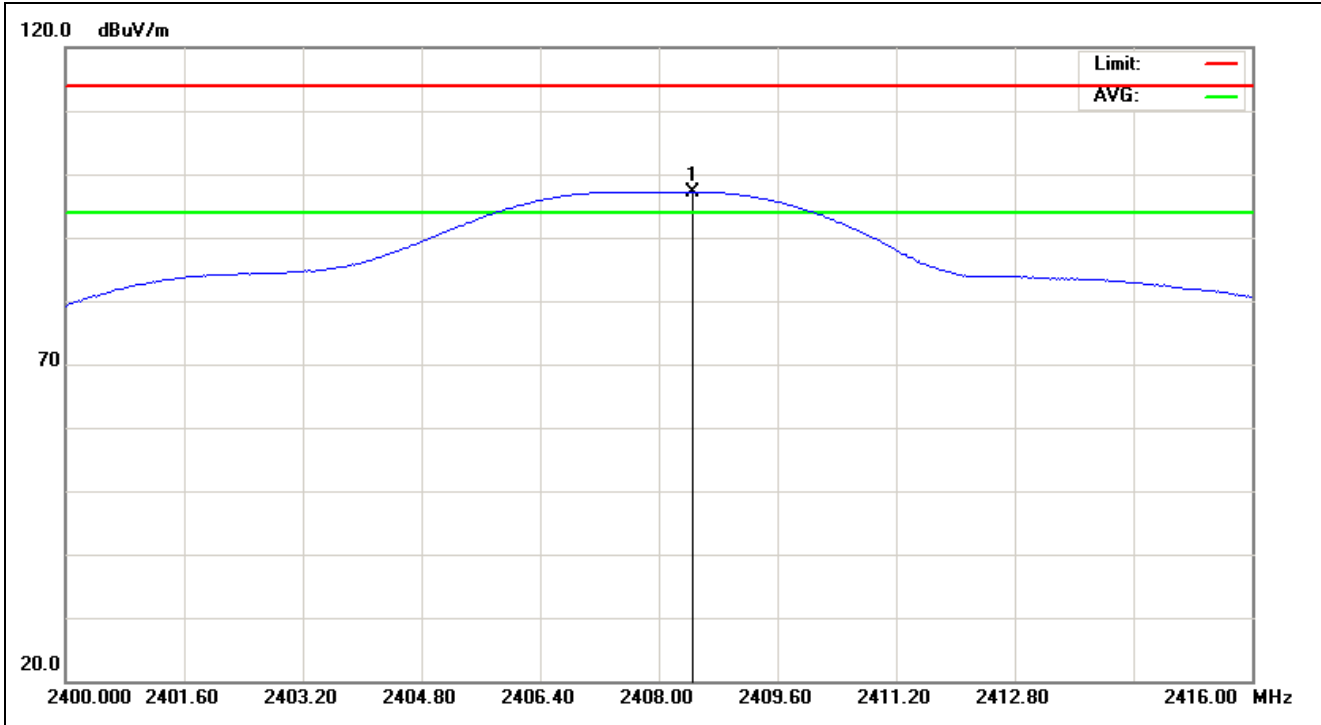


<b>Service No.:</b>	114017241-RF	<b>Test Distance:</b>	3m
<b>Test Standard:</b>	FCC 15.249_2.4-2.5G_3m PK	<b>Ant. Polarization:</b>	Horizontal
<b>Test item:</b>	Radiation Emission	<b>Test Time:</b>	2013/12/27 11:48:33
<b>Applicant:</b>	Acrox	<b>Test Rating:</b>	DC 1.5V
<b>Product:</b>	2.4GHz Mouse	<b>Temp.(°C)/Hum.(%):</b>	18(°C)/61%
<b>Model No.:</b>	NS-PNM5003-SV	<b>Test Engineer:</b>	Hugo Chang
<b>Test Mode:</b>	CH2408		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2408.462	-7.96	105.15	97.19	114.00	-16.81	peak	100	0	

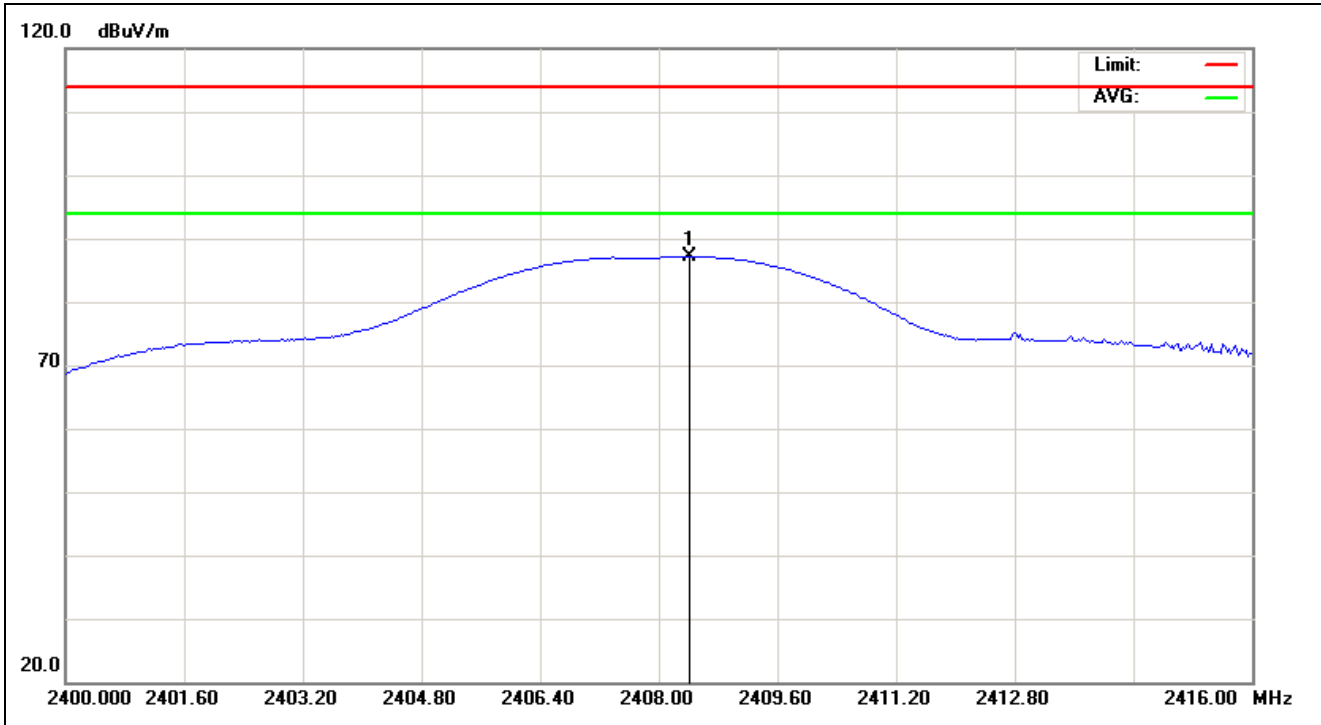


<b>Service No.:</b>	114017241-RF	<b>Test Distance:</b>	3m
<b>Test Standard:</b>	FCC 15.249_2.4-2.5G_3m PK	<b>Ant. Polarization:</b>	Vertical
<b>Test item:</b>	Radiation Emission	<b>Test Time:</b>	2013/12/30 15:57:13
<b>Applicant:</b>	Acrox	<b>Test Rating:</b>	DC 1.5V
<b>Product:</b>	2.4GHz Mouse	<b>Temp.(°C)/Hum.(%):</b>	18(°C)/61%
<b>Model No.:</b>	NS-PNM5003-SV	<b>Test Engineer:</b>	Hugo Chang
<b>Test Mode:</b>	CH2408		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2408.410	-7.96	95.07	87.11	114.00	-26.89	peak			

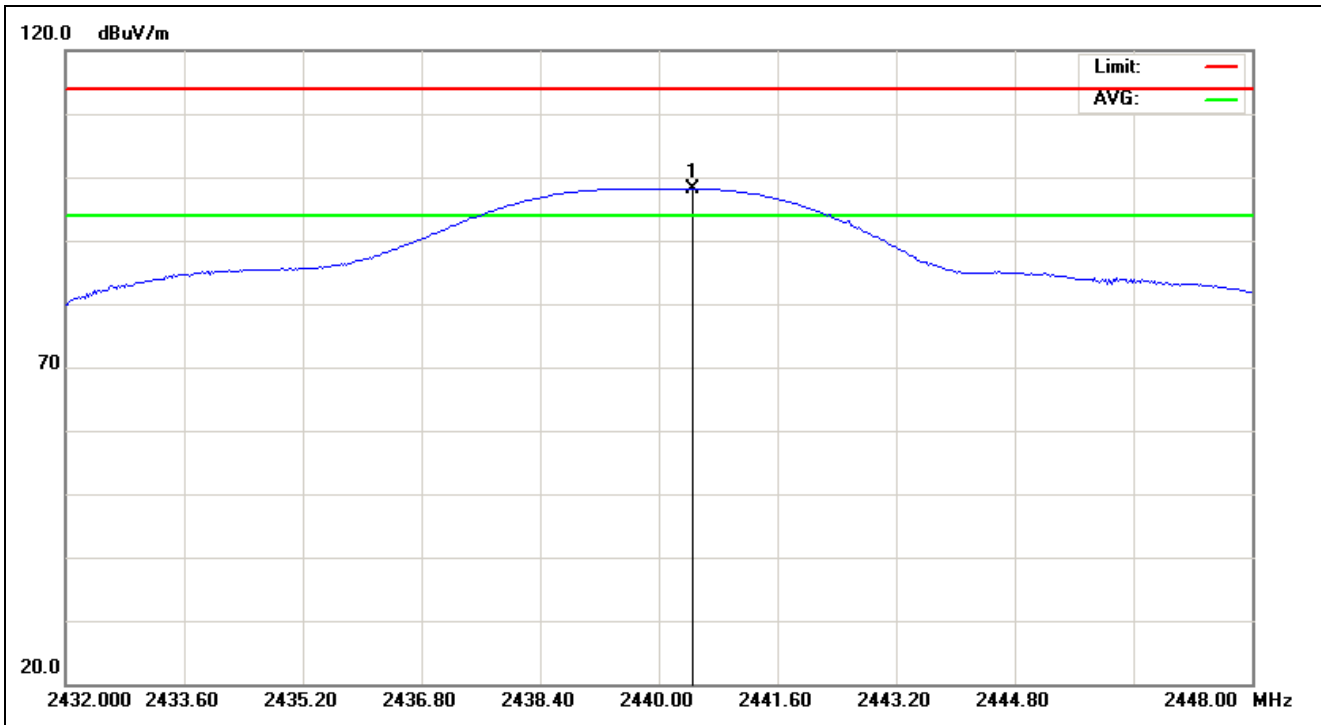


<b>Service No.:</b>	<b>114017241-RF</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC 15.249_2.4-2.5G_3m PK</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2013/12/30 15:43:50</b>
<b>Applicant:</b>	<b>Acrox</b>	<b>Test Rating:</b>	<b>DC 1.5V</b>
<b>Product:</b>	<b>2.4GHz Mouse</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>18(°C)/61%</b>
<b>Model No.:</b>	<b>NS-PNM5003-SV</b>	<b>Test Engineer:</b>	<b>Hugo Chang</b>
<b>Test Mode:</b>	<b>CH2440</b>		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2440.462	-7.92	106.11	98.19	114.00	-15.81	peak			

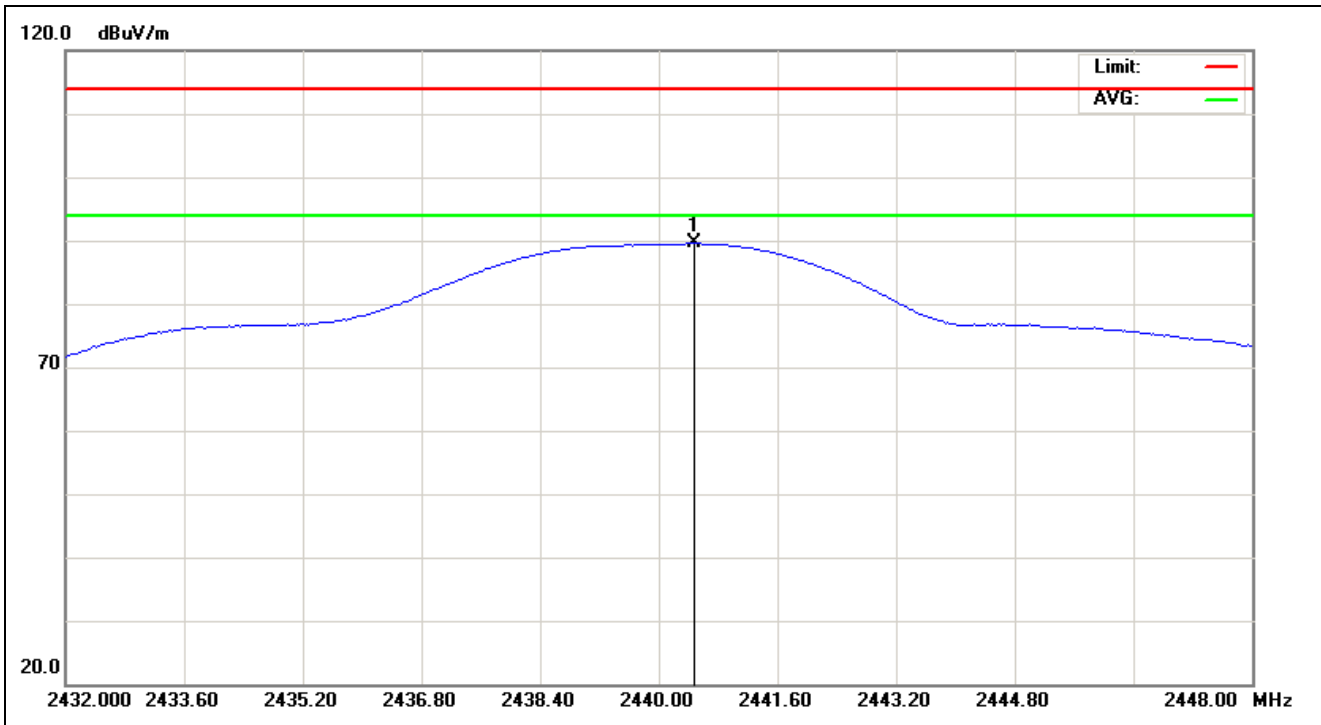


<b>Service No.:</b>	<b>114017241-RF</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC 15.249_2.4-2.5G_3m PK</b>	<b>Ant. Polarization:</b>	<b>Vertical</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2013/12/30 15:47:06</b>
<b>Applicant:</b>	<b>Acrox</b>	<b>Test Rating:</b>	<b>DC 1.5V</b>
<b>Product:</b>	<b>2.4GHz Mouse</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>18(°C)/61%</b>
<b>Model No.:</b>	<b>NS-PNM5003-SV</b>	<b>Test Engineer:</b>	<b>Hugo Chang</b>
<b>Test Mode:</b>	<b>CH2440</b>		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2440.487	-7.92	97.45	89.53	114.00	-24.47	peak			

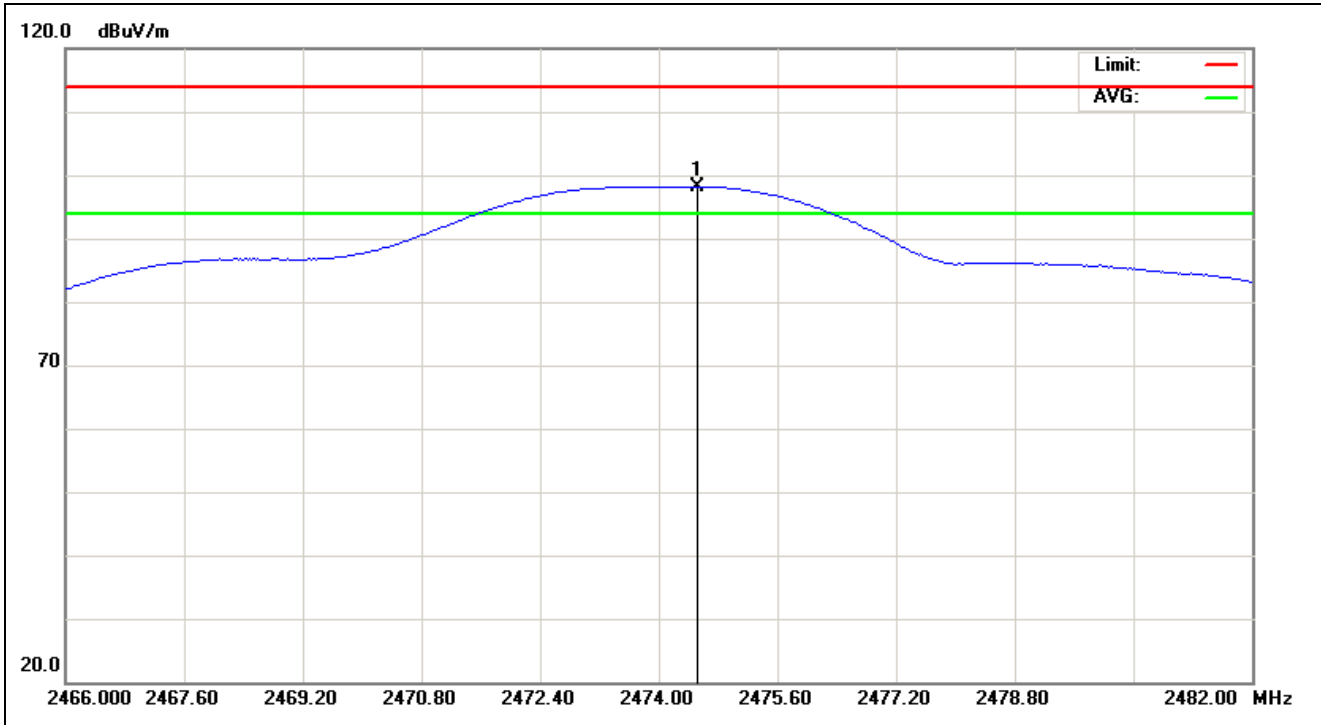

<b>Service No.:</b>	<b>114017241-RF</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC 15.249_2.4-2.5G_3m PK</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2013/12/30 15:53:10</b>
<b>Applicant:</b>	<b>Acrox</b>	<b>Test Rating:</b>	<b>DC 1.5V</b>
<b>Product:</b>	<b>2.4GHz Mouse</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>18(°C)/61%</b>
<b>Model No.:</b>	<b>NS-PNM5003-SV</b>	<b>Test Engineer:</b>	<b>Hugo Chang</b>
<b>Test Mode:</b>	<b>CH2474</b>		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2474.513	-7.90	106.10	98.20	114.00	-15.80	peak			

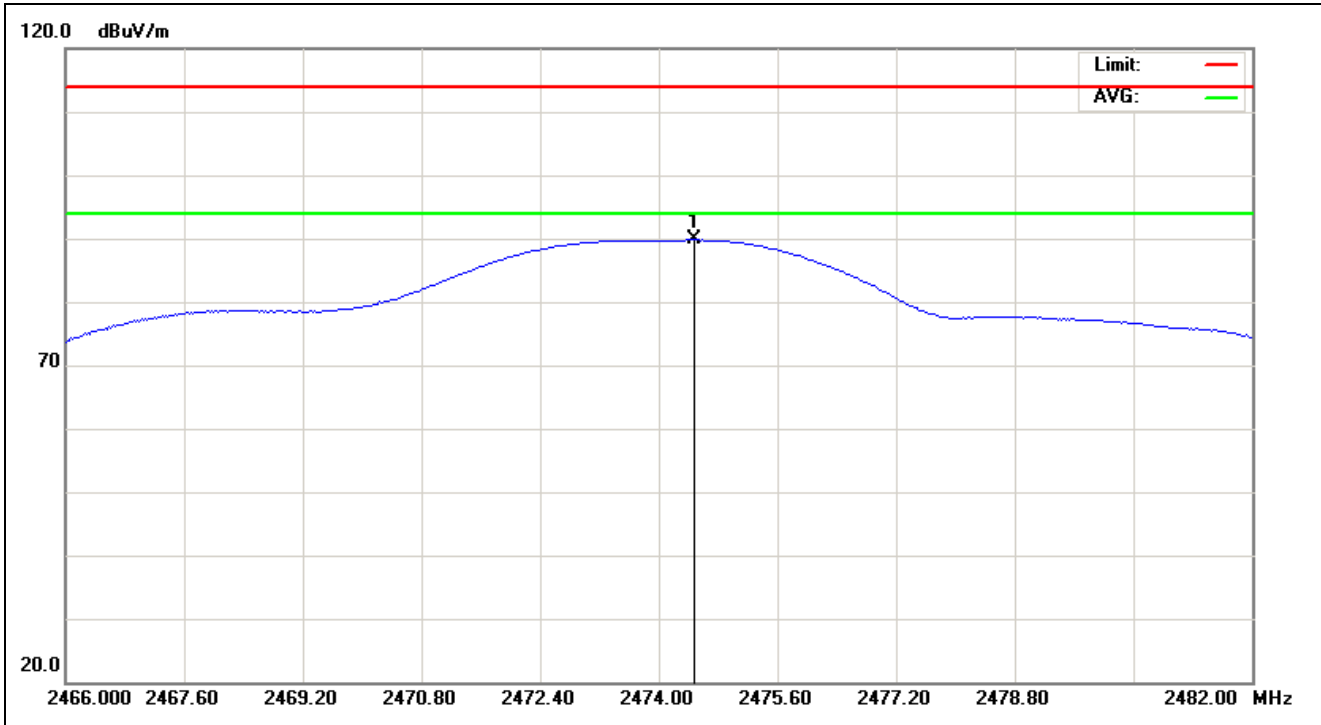


<b>Service No.:</b>	114017241-RF	<b>Test Distance:</b>	3m
<b>Test Standard:</b>	FCC 15.249_2.4-2.5G_3m PK	<b>Ant. Polarization:</b>	Vertical
<b>Test item:</b>	Radiation Emission	<b>Test Time:</b>	2013/12/30 15:54:50
<b>Applicant:</b>	Acrox	<b>Test Rating:</b>	DC 1.5V
<b>Product:</b>	2.4GHz Mouse	<b>Temp.(°C)/Hum.(%):</b>	18(°C)/61%
<b>Model No.:</b>	NS-PNM5003-SV	<b>Test Engineer:</b>	Hugo Chang
<b>Test Mode:</b>	CH2474		
<b>Remark:</b>			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2474.487	-7.90	97.66	89.76	114.00	-24.24	peak			

# Radiated Bandedge

## Low Channel (Hor)

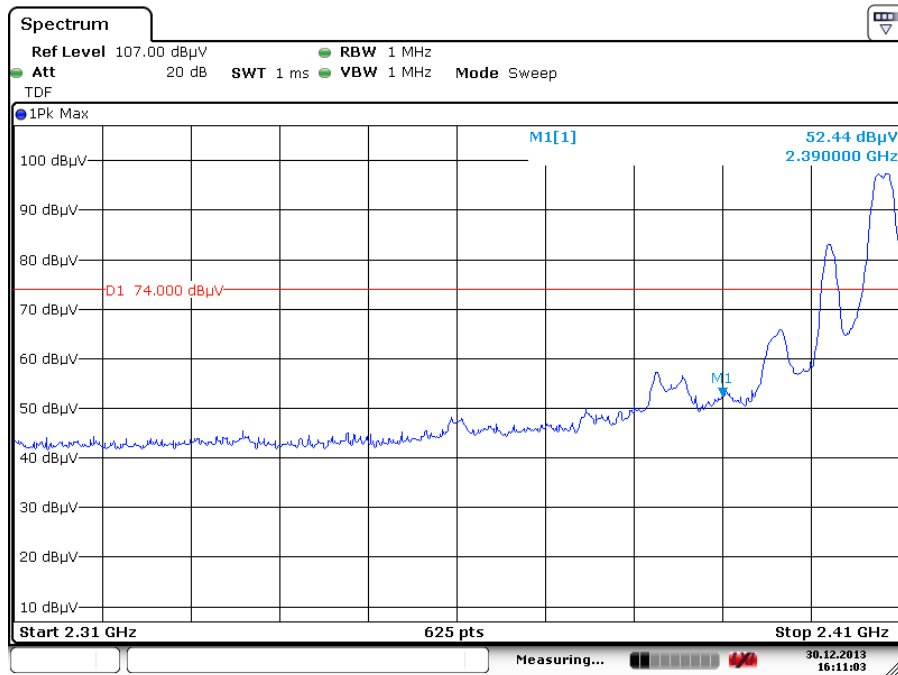


Date: 30.DEC.2013 16:11:03

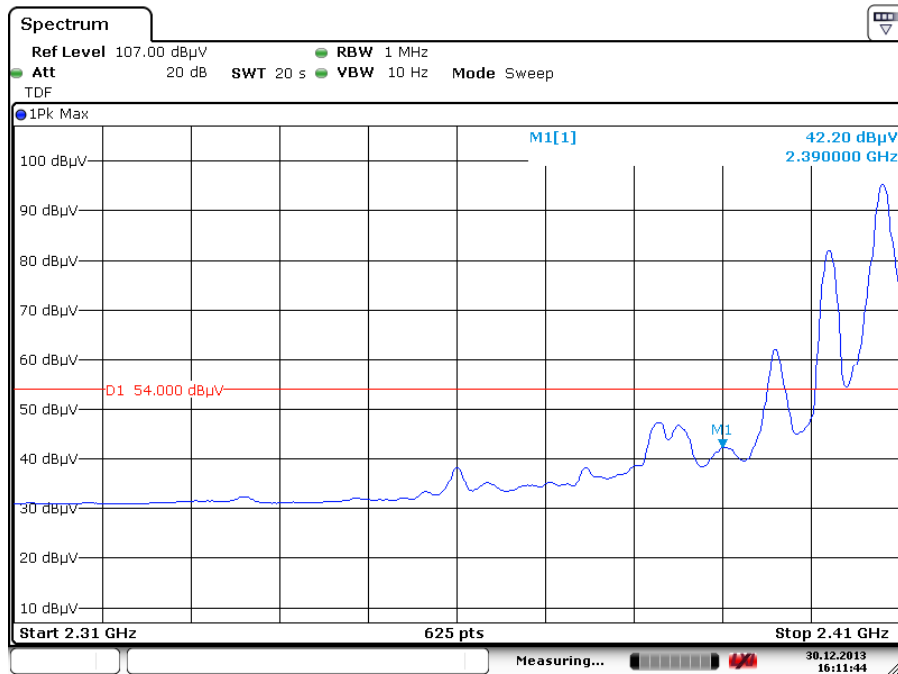


Date: 30.DEC.2013 16:11:44



# Low Channel (Ver)

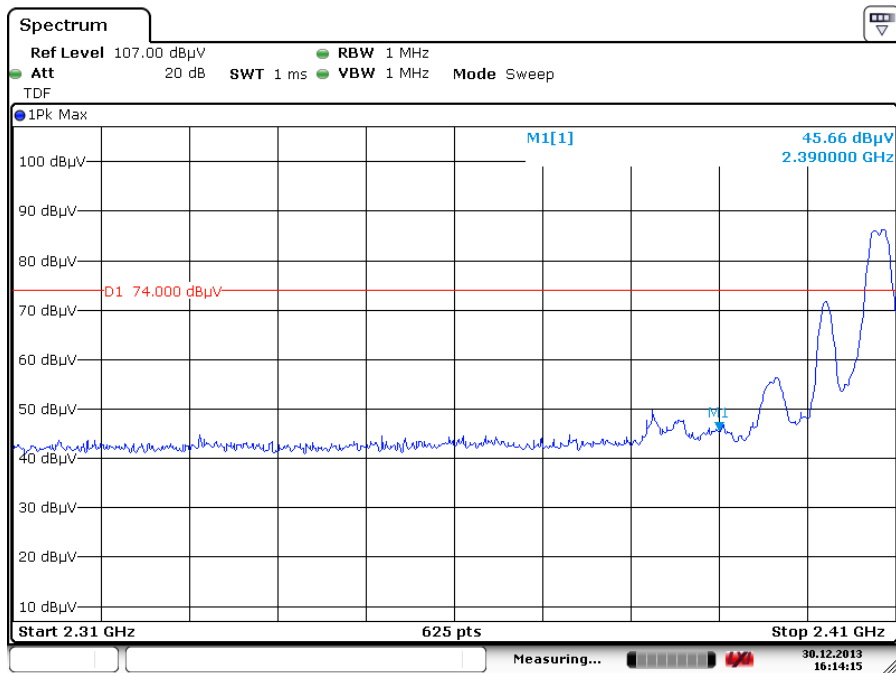


Date: 30.DEC.2013 16:14:15

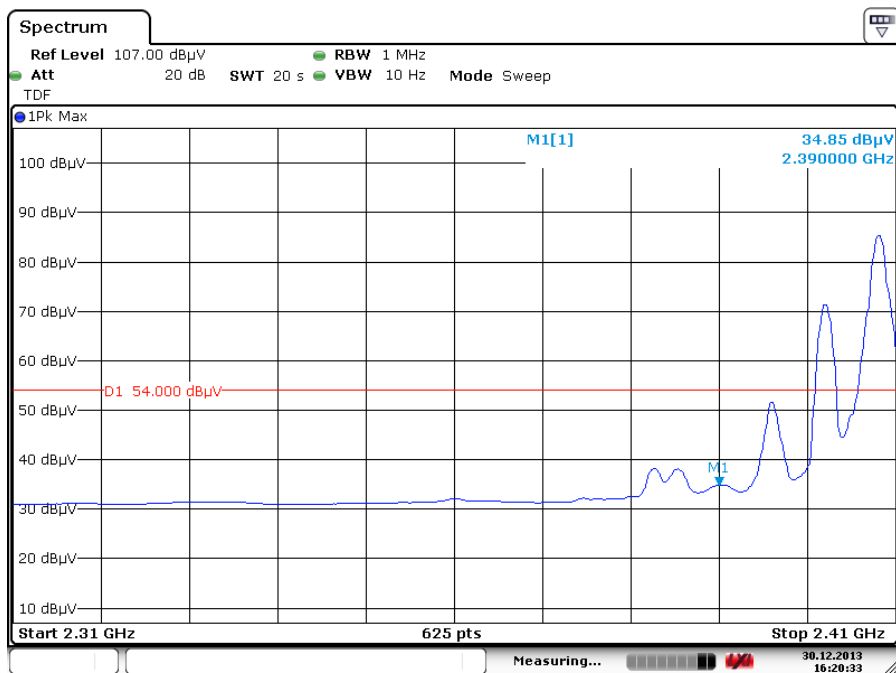


Date: 30.DEC.2013 16:20:32

## High Channel (Hor)

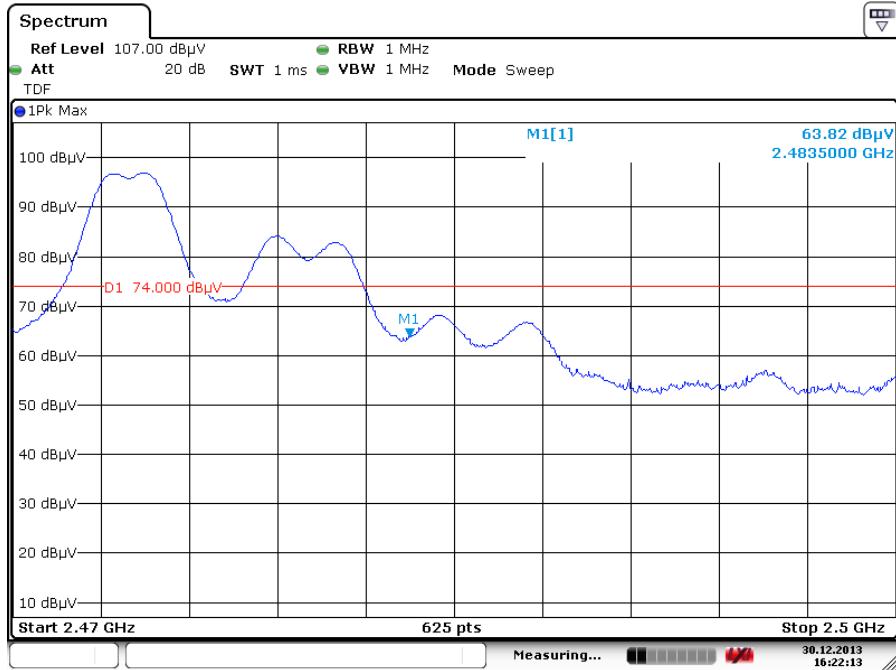


Date: 30.DEC.2013 16:22:13

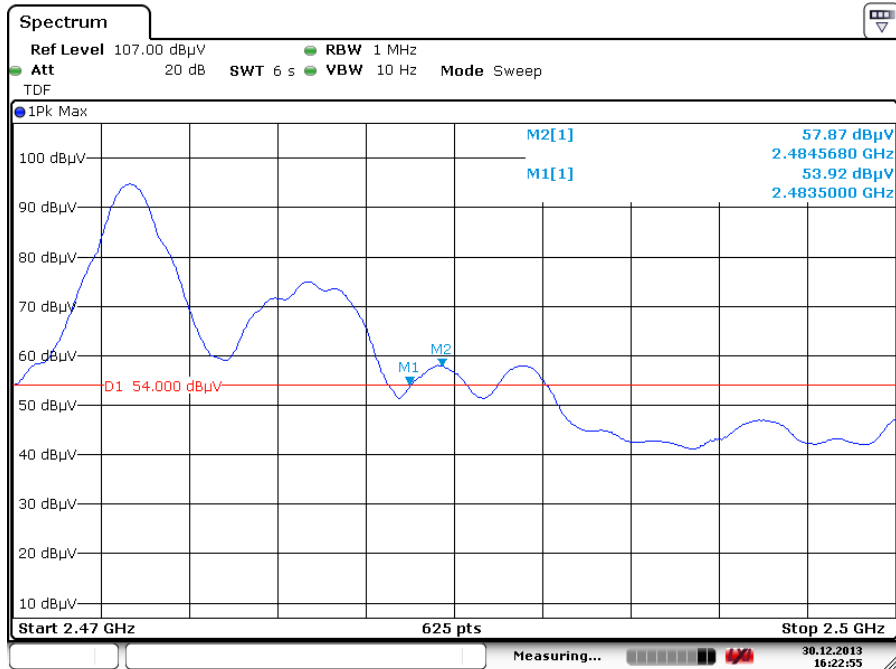


Date: 30.DEC.2013 16:22:55

# High Channel (Ver)

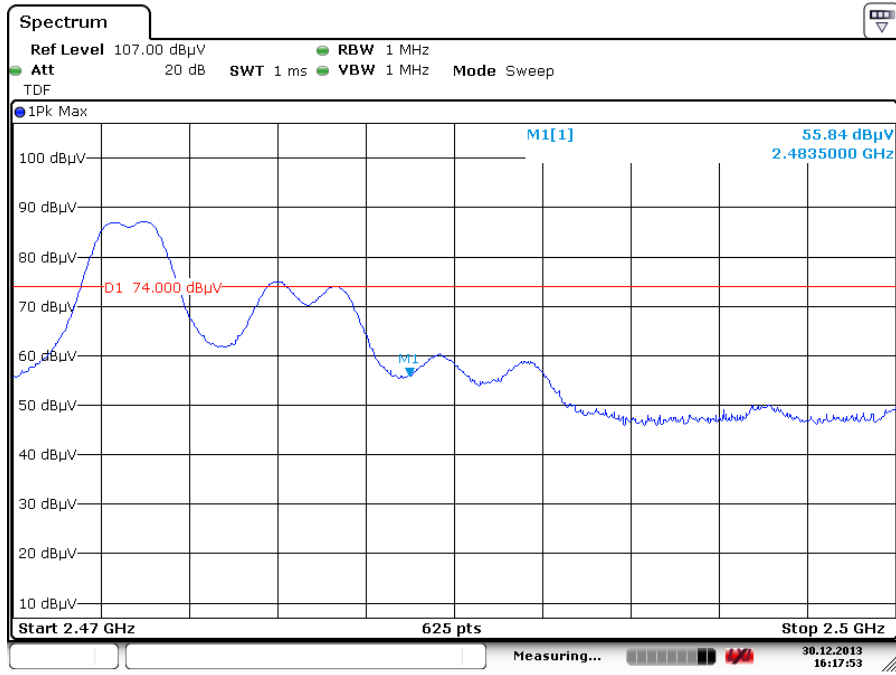

Date: 30.DEC.2013 16:17:52

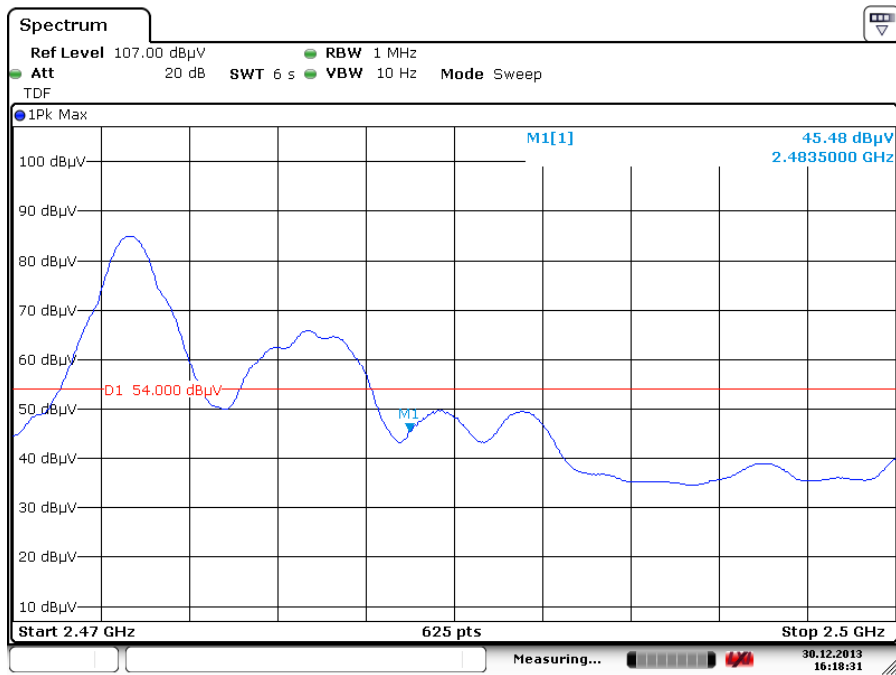


Date: 30.DEC.2013 16:18:31

# Spurious Emissions, TX Mode, 1-18G




**TUV Taiwan**  
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105  
 Tel:+886-2172-7000 fax:+886-2528-0018

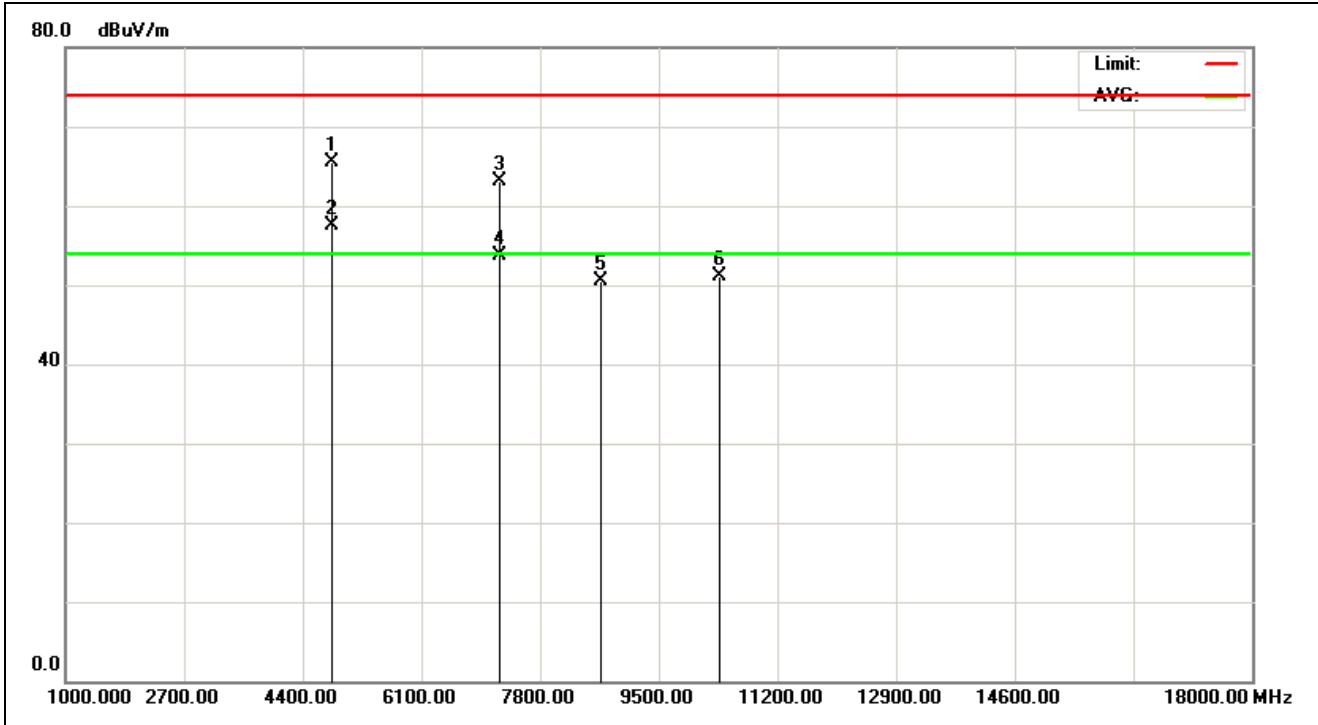


<b>Service No.:</b>	114017241-RF	<b>Test Distance:</b>	3m
<b>Test Standard:</b>	FCC Above 1G PEAK	<b>Ant. Polarization:</b>	Horizontal
<b>Test item:</b>	Radiation Emission	<b>Test Time:</b>	2013/12/30 18:20:55
<b>Applicant:</b>	Acrox	<b>Test Rating:</b>	DC 1.5V
<b>Product:</b>	2.4GHz Mouse	<b>Temp.(°C)/Hum.(%):</b>	18(°C)/61%
<b>Model No.:</b>	NS-PNM5003-SV	<b>Test Engineer:</b>	Hugo Chang
<b>Test Mode:</b>	CH2408		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4814.102	-2.56	68.15	65.59	74.00	-8.41	peak	100	349	
2	4814.102	-2.56	60.05	57.49	54.00	3.49	AVG	100	349	
3	7211.538	5.46	57.61	63.07	74.00	-10.93	peak	100	171	
4	7211.538	5.46	48.33	53.79	54.00	-0.21	AVG	100	171	
5	8682.692	6.60	43.91	50.51	74.00	-23.49	peak	100	197	
6	10371.795	5.11	46.08	51.19	74.00	-22.81	peak	100	157	

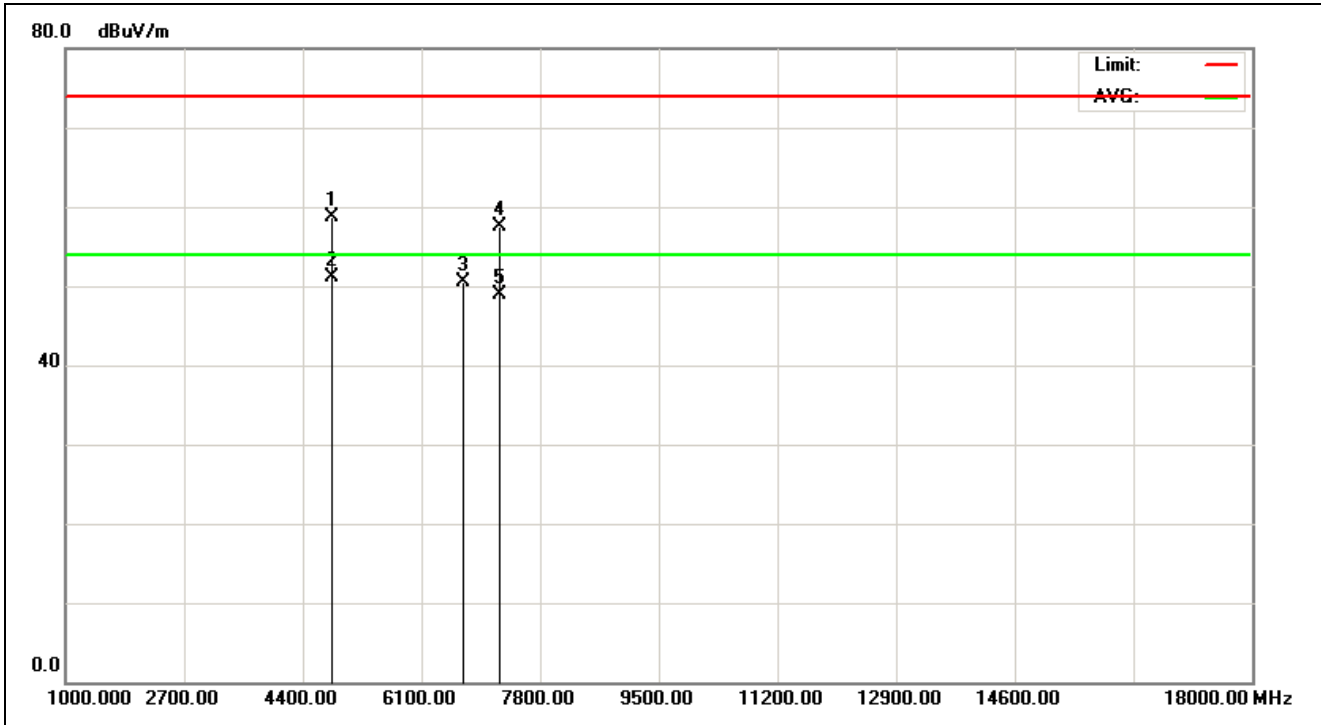


Service No.:	114017241-RF	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/12/30 18:21:57
Applicant:	Acrox	Test Rating:	DC 1.5V
Product:	2.4GHz Mouse	Temp.(°C)/Hum.(%):	18(°C)/61%
Model No.:	NS-PNM5003-SV	Test Engineer:	Hugo Chang
Test Mode:	CH2408		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4814.103	-2.56	61.33	58.77	74.00	-15.23	peak	100	85	
2	4814.103	-2.56	53.61	51.05	54.00	-2.95	AVG	100	85	
3	6693.910	5.24	45.21	50.45	74.00	-23.55	peak	100	356	
4	7211.538	5.46	52.07	57.53	74.00	-16.47	peak	100	173	
5	7211.538	5.46	43.48	48.94	54.00	-5.06	AVG	100	173	

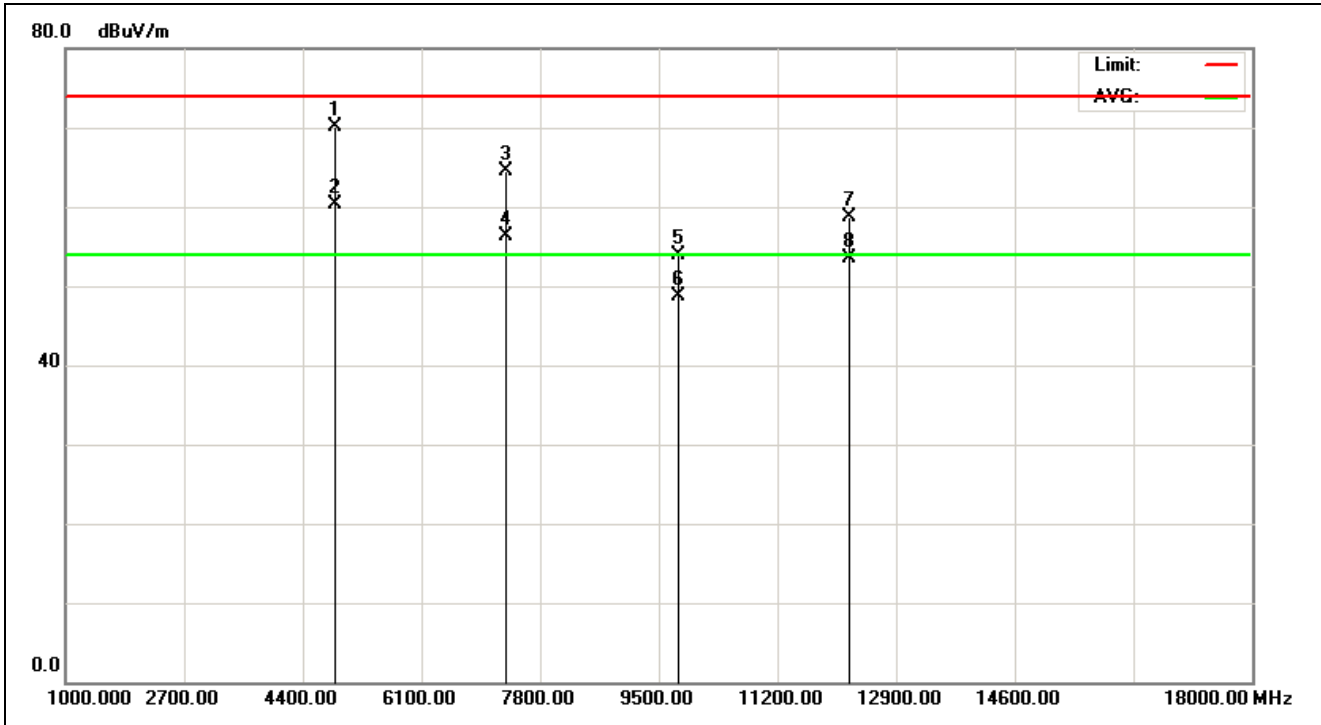


Service No.:	114017241-RF	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/12/30 17:04:49
Applicant:	Acrox	Test Rating:	DC 1.5V
Product:	2.4GHz Mouse	Temp.(°C)/Hum.(%):	18(°C)/61%
Model No.:	NS-PNM5003-SV	Test Engineer:	Hugo Chang
Test Mode:	CH2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4868.590	-2.42	72.50	70.08	74.00	-3.92	peak			
2	4868.590	-2.42	62.76	60.34	54.00	6.34	AVG			
3	7320.513	5.76	58.79	64.55	74.00	-9.45	peak			
4	7320.513	5.76	50.52	56.28	54.00	2.28	AVG			
5	9772.436	5.93	47.93	53.86	74.00	-20.14	peak			
6	9772.436	5.93	42.80	48.73	54.00	-5.27	AVG			
7	12224.359	7.85	50.85	58.70	74.00	-15.30	peak			
8	12224.359	7.85	45.59	53.44	54.00	-0.56	AVG			

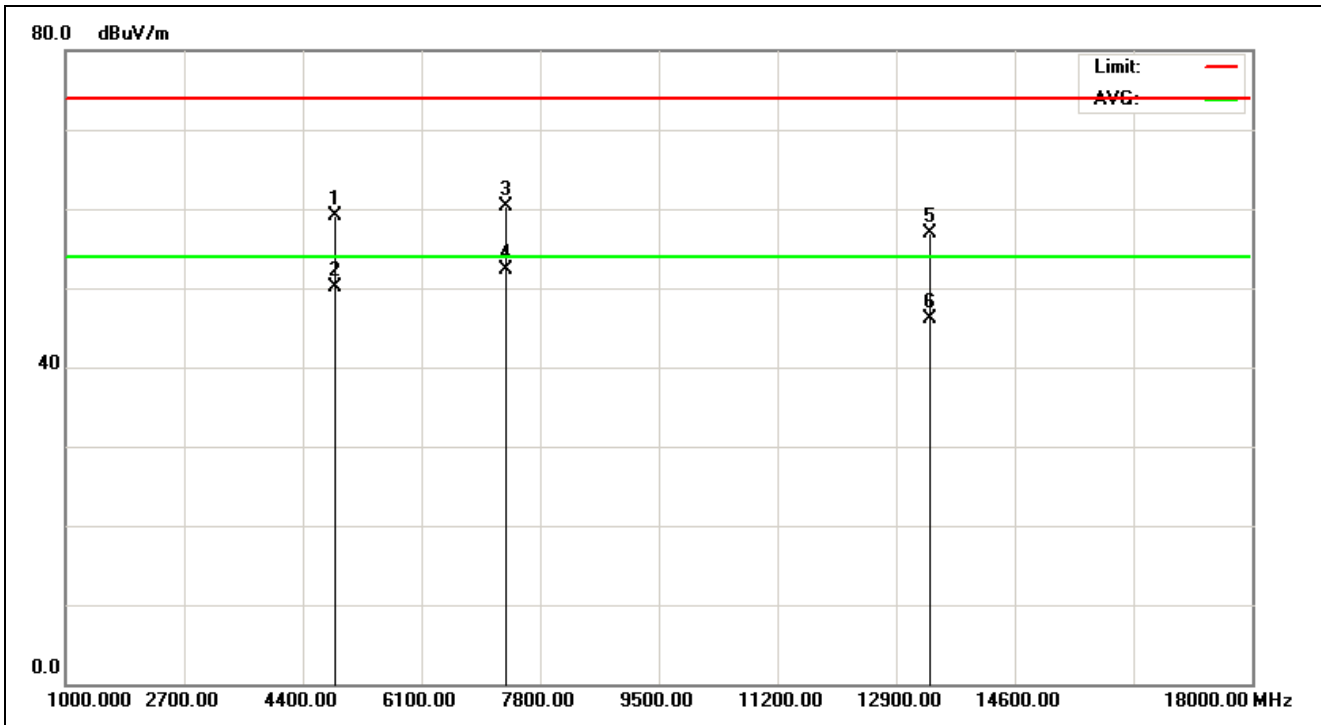

Service No.:	114017241-RF	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/12/30 17:17:06
Applicant:	Acrox	Test Rating:	DC 1.5V
Product:	2.4GHz Mouse	Temp.(°C)/Hum.(%):	18(°C)/61%
Model No.:	NS-PNM5003-SV	Test Engineer:	Hugo Chang
Test Mode:	CH2440		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4868.590	-2.42	61.58	59.16	74.00	-14.84	peak			
2	4868.590	-2.42	52.51	50.09	54.00	-3.91	AVG			
3	7320.513	5.76	54.59	60.35	74.00	-13.65	peak			
4	7320.513	5.76	46.55	52.31	54.00	-1.69	AVG			
5	13395.833	10.52	46.30	56.82	74.00	-17.18	peak			
6	13395.833	10.52	35.65	46.17	54.00	-7.83	AVG			

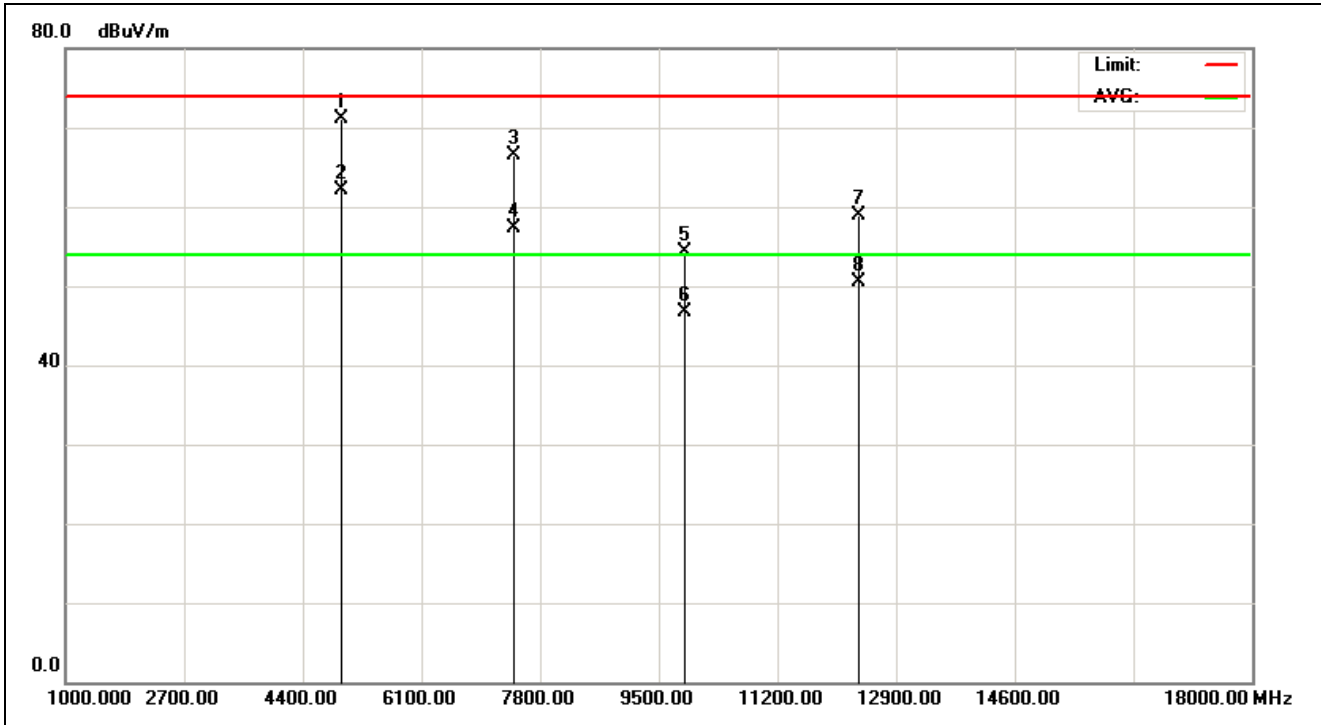

Service No.:	114017241-RF	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/12/30 18:05:39
Applicant:	Acrox	Test Rating:	DC 1.5V
Product:	2.4GHz Mouse	Temp.(°C)/Hum.(%):	18(°C)/61%
Model No.:	NS-PNM5003-SV	Test Engineer:	Hugo Chang
Test Mode:	CH2474		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4950.320	-2.21	73.37	71.16	74.00	-2.84	peak	100	179	
2	4950.320	-2.21	64.30	62.09	54.00	8.09	AVG	100	179	
3	7429.487	6.06	60.46	66.52	74.00	-7.48	peak	100	72	
4	7429.487	6.06	51.20	57.26	54.00	3.26	AVG	100	72	
5	9881.410	5.71	48.62	54.33	74.00	-19.67	peak	100	208	
6	9881.410	5.71	41.04	46.75	54.00	-7.25	AVG	100	208	
7	12360.577	8.56	50.38	58.94	74.00	-15.06	peak	100	19	
8	12360.577	8.56	41.86	50.42	54.00	-3.58	AVG	100	19	



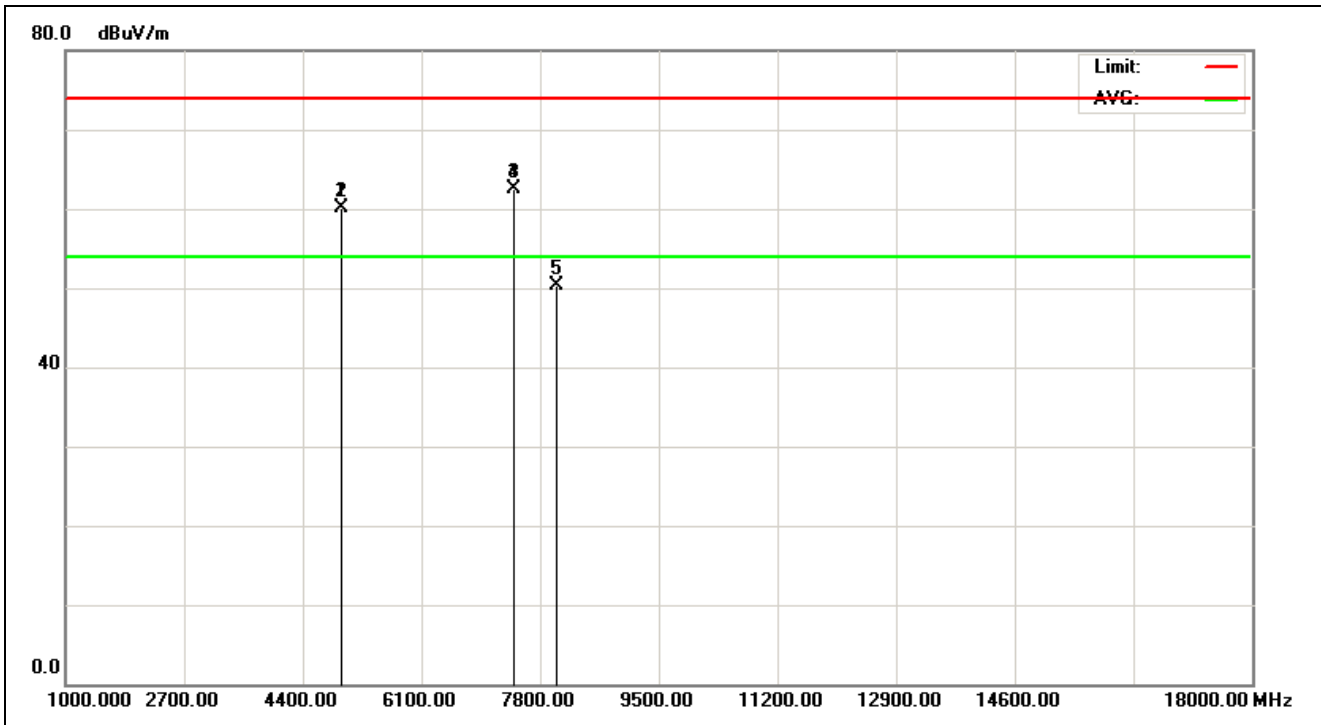


Service No.:	114017241-RF	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/12/30 18:06:42
Applicant:	Acrox	Test Rating:	DC 1.5V
Product:	2.4GHz Mouse	Temp.(°C)/Hum.(%):	18(°C)/61%
Model No.:	NS-PNM5003-SV	Test Engineer:	Hugo Chang
Test Mode:	CH2474		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4950.320	-2.21	62.39	60.18	74.00	-13.82	peak	100	341	
2	4950.320	-2.21	62.39	60.18	74.00	-13.82	peak	100	341	
3	7429.487	6.06	56.41	62.47	74.00	-11.53	peak	100	237	
4	7429.487	6.06	56.41	62.47	74.00	-11.53	peak	100	237	
5	8028.846	6.04	44.32	50.36	74.00	-23.64	peak	100	75	

Spurious Emissions, TX Mode, 18-26G




**TUV Taiwan**  
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105  
 Tel:+886-2172-7000 fax:+886-2528-0018

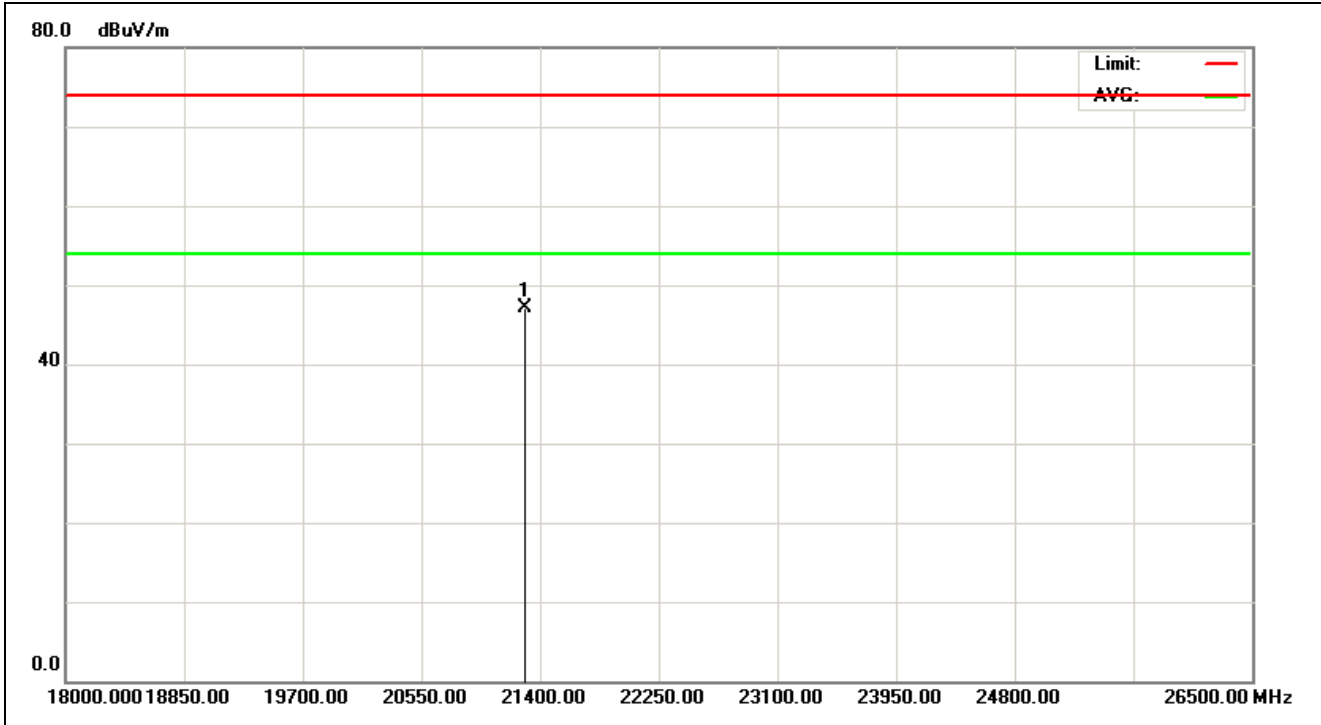


<b>Service No.:</b>	114017241-RF	<b>Test Distance:</b>	3m
<b>Test Standard:</b>	FCC Above 1G PEAK	<b>Ant. Polarization:</b>	Horizontal
<b>Test item:</b>	Radiation Emission	<b>Test Time:</b>	2013/12/30 18:34:55
<b>Applicant:</b>	Acrox	<b>Test Rating:</b>	DC 1.5V
<b>Product:</b>	2.4GHz Mouse	<b>Temp.(°C)/Hum.(%):</b>	18(°C)/61%
<b>Model No.:</b>	NS-PNM5003-SV	<b>Test Engineer:</b>	Hugo Chang
<b>Test Mode:</b>	CH2408		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21296.474	29.49	17.63	47.12	74.00	-26.88	peak			

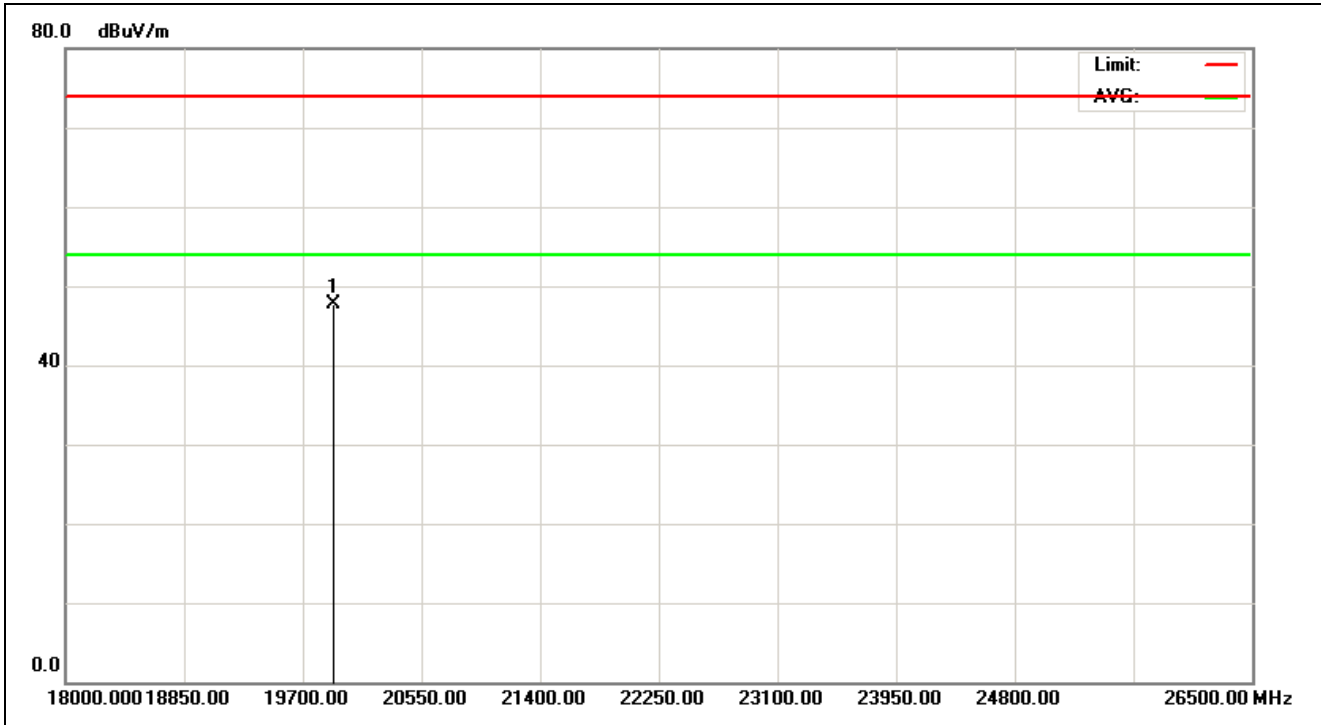


<b>Service No.:</b>	114017241-RF	<b>Test Distance:</b>	3m
<b>Test Standard:</b>	FCC Above 1G PEAK	<b>Ant. Polarization:</b>	Vertical
<b>Test item:</b>	Radiation Emission	<b>Test Time:</b>	2013/12/30 18:35:30
<b>Applicant:</b>	Acrox	<b>Test Rating:</b>	DC 1.5V
<b>Product:</b>	2.4GHz Mouse	<b>Temp.(°C)/Hum.(%):</b>	18(°C)/61%
<b>Model No.:</b>	NS-PNM5003-SV	<b>Test Engineer:</b>	Hugo Chang
<b>Test Mode:</b>	CH2408		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19920.673	29.24	18.46	47.70	74.00	-26.30	peak			

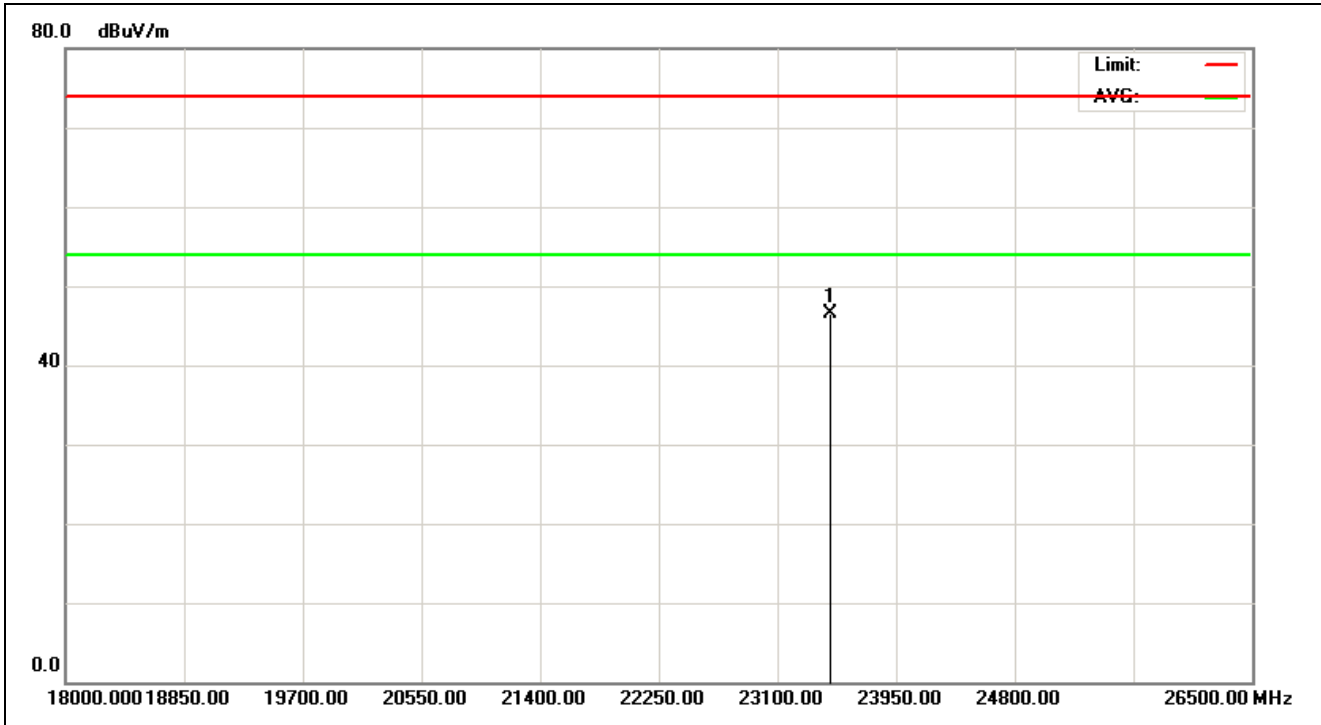


<b>Service No.:</b>	<b>114017241-RF</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC Above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2013/12/30 18:36:12</b>
<b>Applicant:</b>	<b>Acrox</b>	<b>Test Rating:</b>	<b>DC 1.5V</b>
<b>Product:</b>	<b>2.4GHz Mouse</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>18(°C)/61%</b>
<b>Model No.:</b>	<b>NS-PNM5003-SV</b>	<b>Test Engineer:</b>	<b>Hugo Chang</b>
<b>Test Mode:</b>	<b>CH2440</b>		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23475.962	30.12	16.33	46.45	74.00	-27.55	peak			

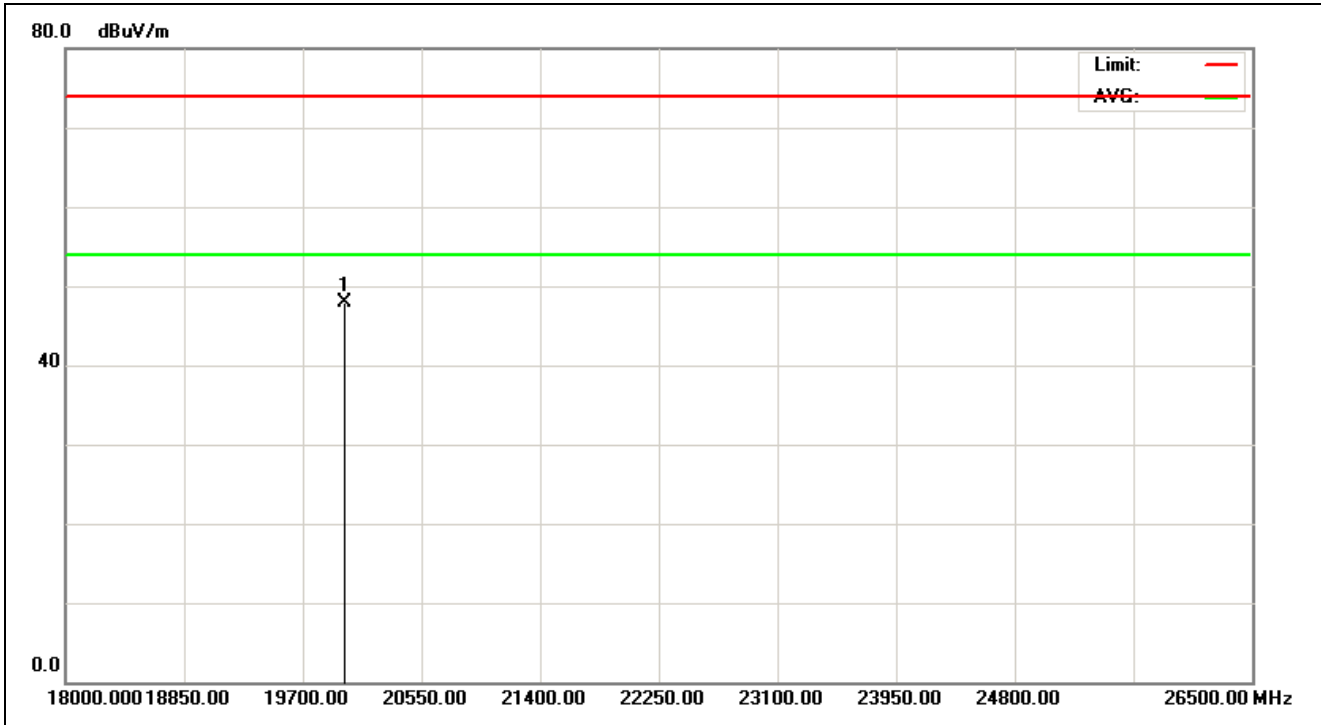


<b>Service No.:</b>	<b>114017241-RF</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC Above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Vertical</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2013/12/30 18:36:39</b>
<b>Applicant:</b>	<b>Acrox</b>	<b>Test Rating:</b>	<b>DC 1.5V</b>
<b>Product:</b>	<b>2.4GHz Mouse</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>18(°C)/61%</b>
<b>Model No.:</b>	<b>NS-PNM5003-SV</b>	<b>Test Engineer:</b>	<b>Hugo Chang</b>
<b>Test Mode:</b>	<b>CH2440</b>		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20002.404	29.32	18.65	47.97	74.00	-26.03	peak			

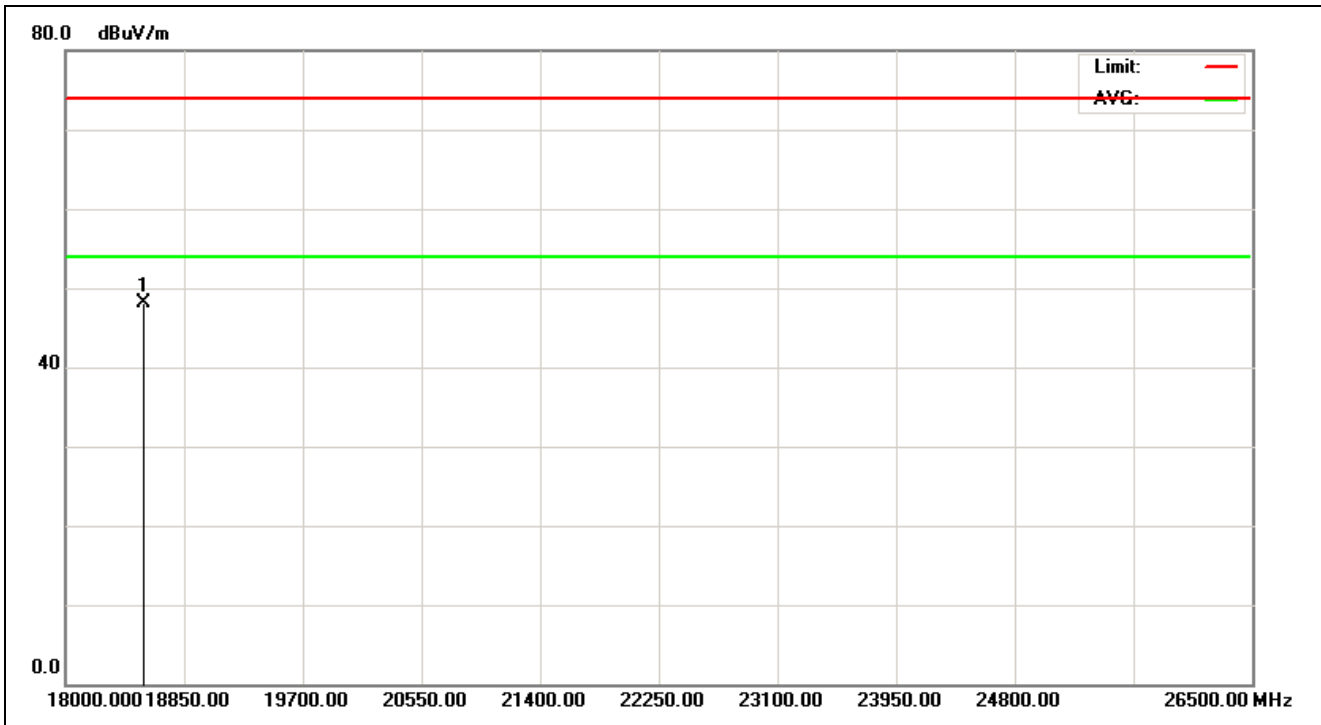

<b>Service No.:</b>	<b>114017241-RF</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC Above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2013/12/30 18:37:07</b>
<b>Applicant:</b>	<b>Acrox</b>	<b>Test Rating:</b>	<b>DC 1.5V</b>
<b>Product:</b>	<b>2.4GHz Mouse</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>18(°C)/61%</b>
<b>Model No.:</b>	<b>NS-PNM5003-SV</b>	<b>Test Engineer:</b>	<b>Hugo Chang</b>
<b>Test Mode:</b>	<b>CH2474</b>		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18558.494	28.62	19.52	48.14	74.00	-25.86	peak			

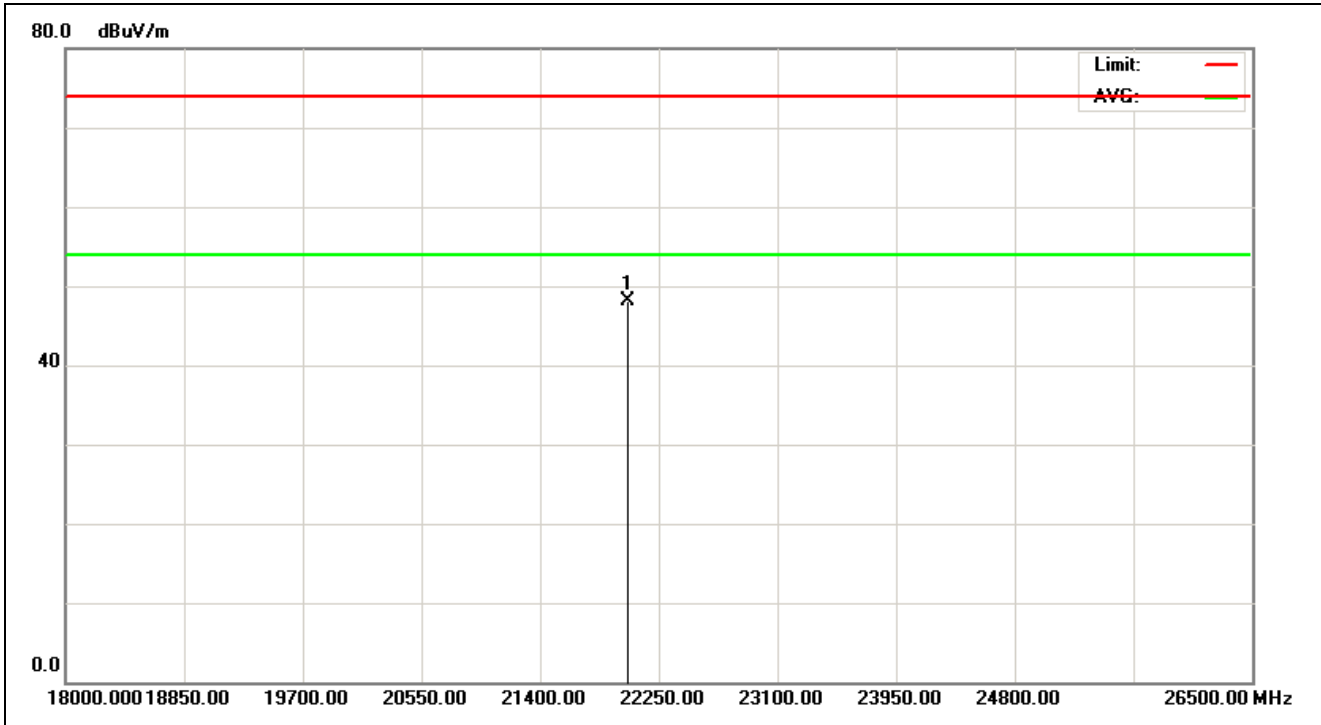


<b>Service No.:</b>	<b>114017241-RF</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC Above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Vertical</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2013/12/30 18:37:36</b>
<b>Applicant:</b>	<b>Acrox</b>	<b>Test Rating:</b>	<b>DC 1.5V</b>
<b>Product:</b>	<b>2.4GHz Mouse</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>18(°C)/61%</b>
<b>Model No.:</b>	<b>NS-PNM5003-SV</b>	<b>Test Engineer:</b>	<b>Hugo Chang</b>
<b>Test Mode:</b>	<b>CH2474</b>		
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22032.051	29.37	18.69	48.06	74.00	-25.94	peak			

# Spurious Emissions, TX Mode, 30M-1G




**TUV Taiwan**  
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105  
 Tel:+886-2172-7000 fax:+886-2528-0018

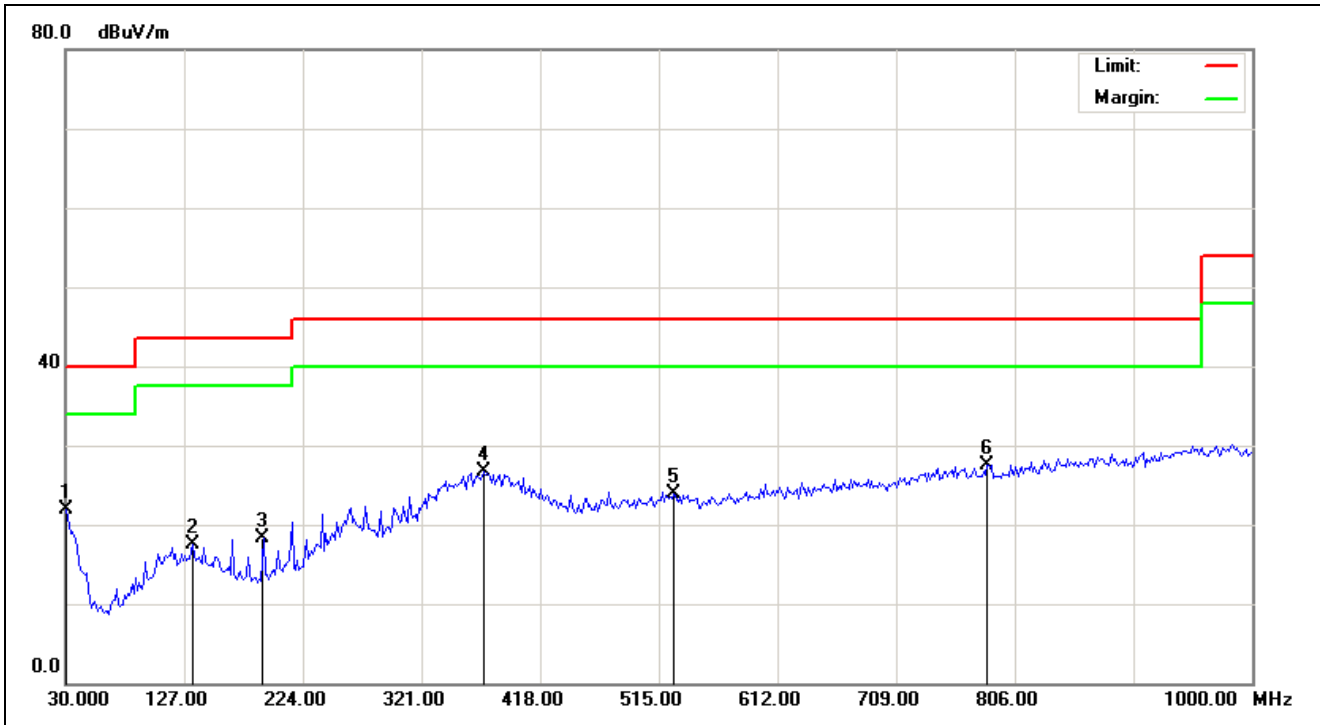

<b>Service No.:</b>	<b>114017241-RF</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC Class B 3M Radiation</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2013/12/27 11:09:36</b>
<b>Applicant:</b>	<b>Acrox</b>	<b>Test Rating:</b>	<b>DC 1.5V</b>
<b>Product:</b>	<b>2.4GHz Mouse</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>18(°C)/61%</b>
<b>Model No.:</b>	<b>NS-PNM5003-SV</b>	<b>Test Engineer:</b>	<b>Hugo Chang</b>
<b>Test Mode:</b>			
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-6.06	27.91	21.85	40.00	-18.15	QP	100	9	
2	134.1506	-12.85	30.38	17.53	43.50	-25.97	QP	100	171	
3	191.6666	-15.48	33.76	18.28	43.50	-25.22	QP	100	113	
4	371.9871	-9.11	35.89	26.78	46.00	-19.22	QP	100	342	
5	527.4358	-7.07	30.88	23.81	46.00	-22.19	QP	100	163	
6	783.9262	-3.74	31.28	27.54	46.00	-18.46	QP	100	75	



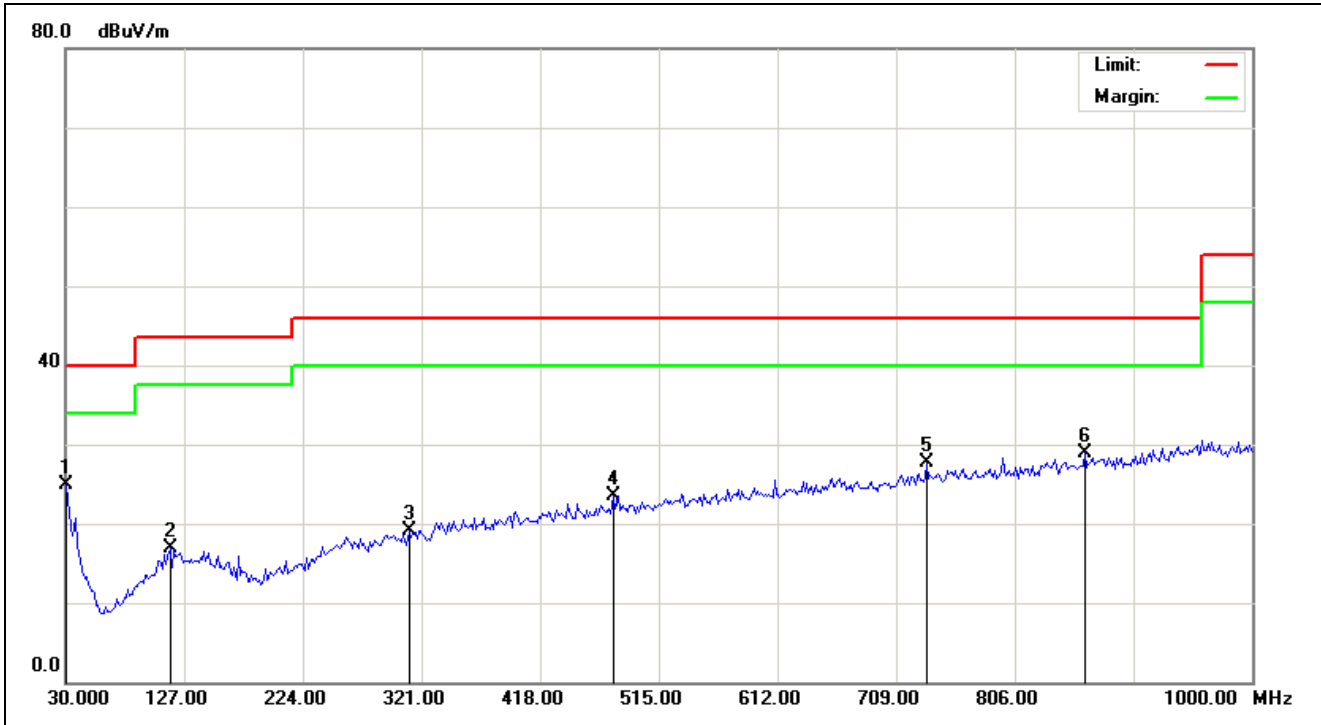

<b>Service No.:</b>	<b>114017241-RF</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC Class B 3M Radiation</b>	<b>Ant. Polarization:</b>	<b>Vertical</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2013/12/27 11:10:38</b>
<b>Applicant:</b>	<b>Acrox</b>	<b>Test Rating:</b>	<b>DC 1.5V</b>
<b>Product:</b>	<b>2.4GHz Mouse</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>18(°C)/61%</b>
<b>Model No.:</b>	<b>NS-PNM5003-SV</b>	<b>Test Engineer:</b>	<b>Hugo Chang</b>
<b>Test Mode:</b>			
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-6.06	30.98	24.92	40.00	-15.08	QP	100	59	
2	115.4968	-13.65	30.64	16.99	43.50	-26.51	QP	100	24	
3	311.3622	-10.19	29.28	19.09	46.00	-26.91	QP	100	88	
4	477.6923	-7.59	31.16	23.57	46.00	-22.43	QP	100	194	
5	734.1827	-4.34	31.97	27.63	46.00	-18.37	QP	100	234	
6	863.2051	-2.38	31.19	28.81	46.00	-17.19	QP	100	299	