

Test Report No.50081357 001

Appendix D: Radiated and Mains Spurious Emission Data

(File: 50081357AppendixD)


Contents

Spurious Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 1-18G.....	6
Spurious Emissions, TX Mode, 18-26G.....	12
Spurious Emissions, TX Mode, 30M-1G	18
Spurious Emissions, TX Mode, 9K-30M	20
Spurious Emissions, RX Mode, 1-18G	22
Spurious Emissions, RX Mode, 18-26G	24
Spurious Emissions, RX Mode, 30M-1G.....	26
Spurious Emissions, RX Mode, 9K-30M.....	28


Spurious Emissions, Band Edges, 2.35-2.5G

Radiated Bandedge (GFSK)

Low Channel (Hor)

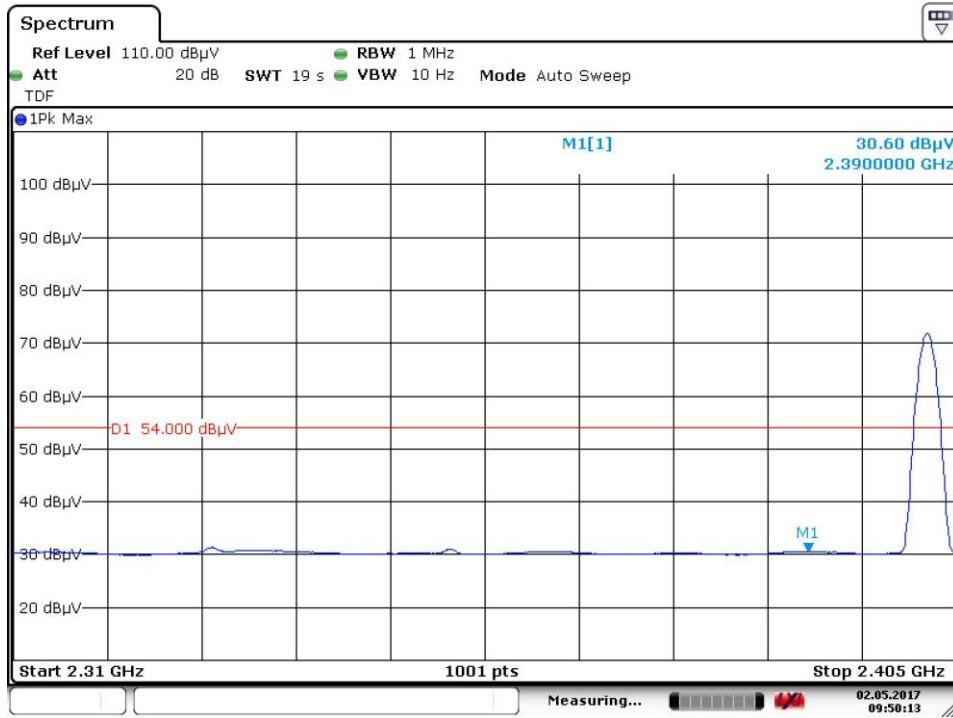


Date: 2.MAY.2017 09:50:13

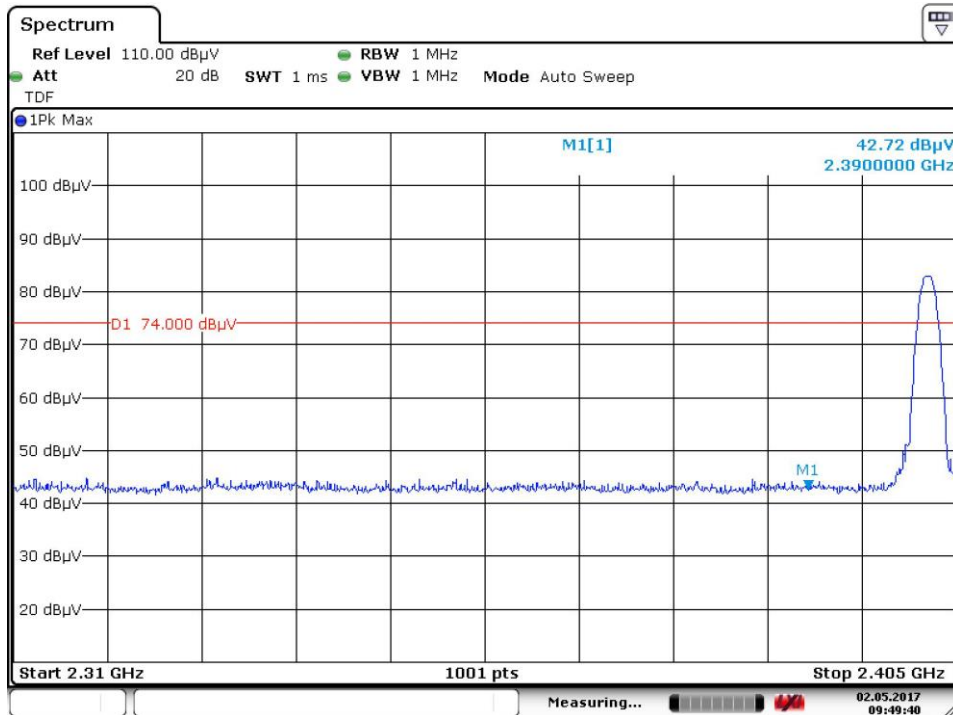


Date: 2.MAY.2017 09:49:40

Low Channel (Ver)

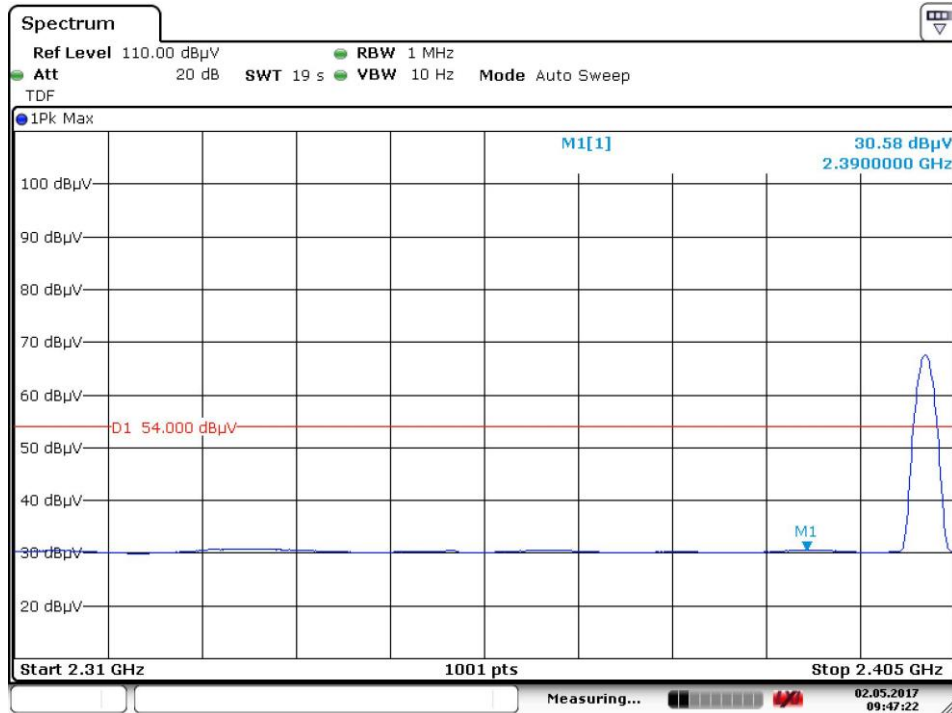


Date: 2.MAY.2017 09:47:22

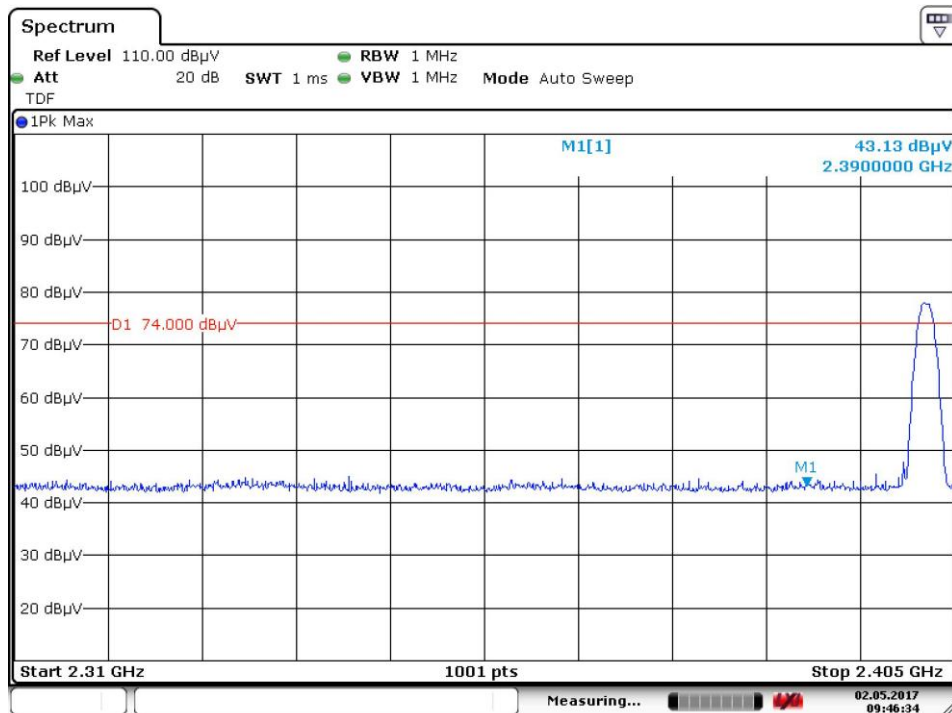


Date: 2.MAY.2017 09:46:35

Radiated Bandedge (GFSK)

High Channel (Hor)

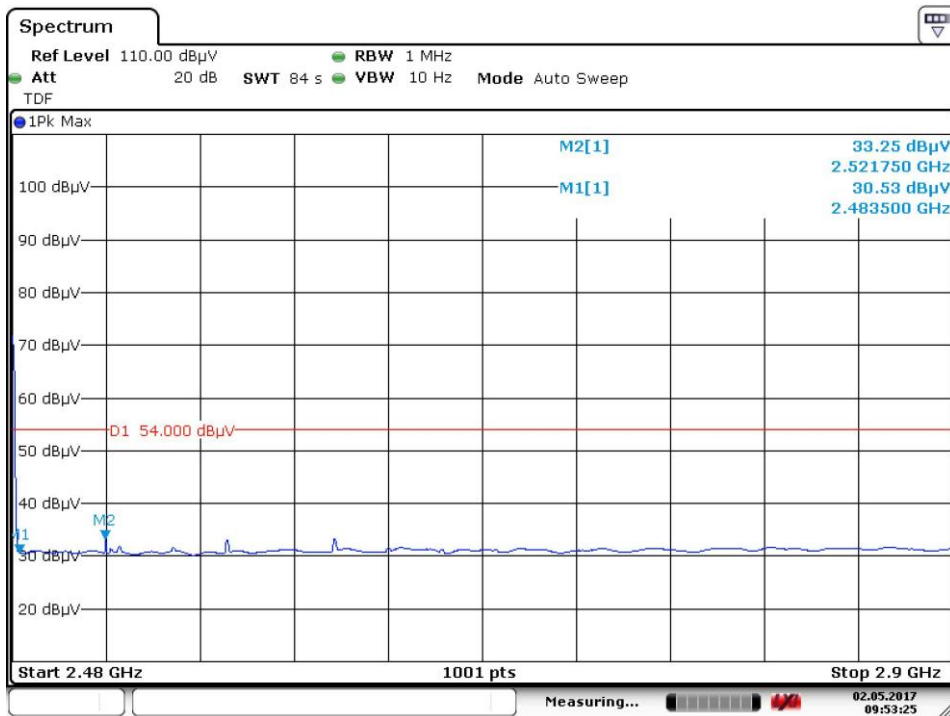


Date: 2.MAY.2017 09:53:25

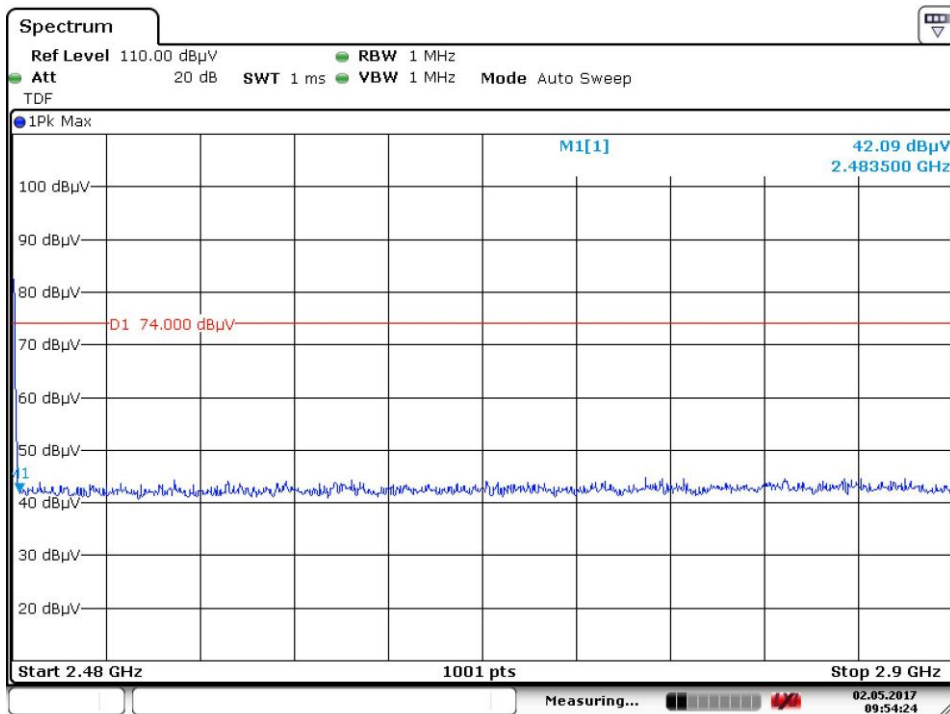


Date: 2.MAY.2017 09:54:24

High Channel (Ver)

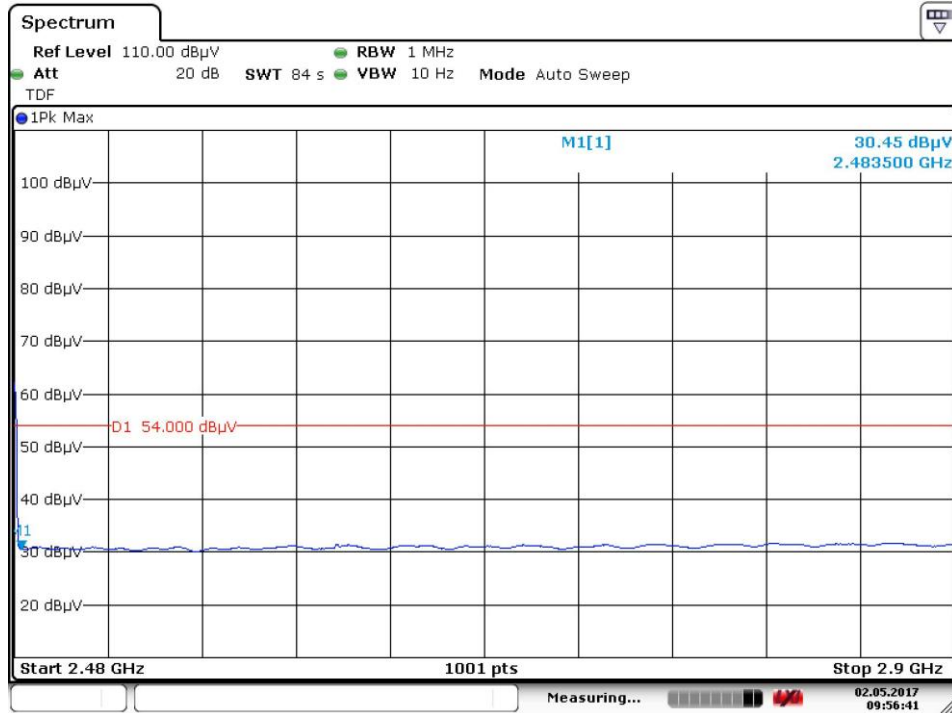

Date: 2.MAY.2017 09:56:40

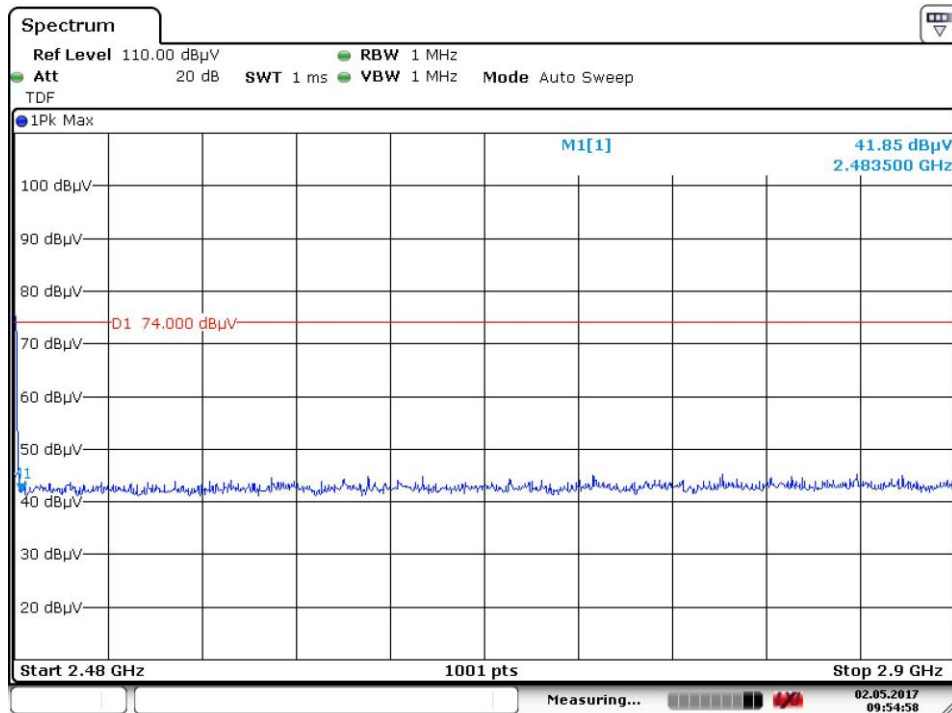

Date: 2.MAY.2017 09:54:59


Spurious Emissions, TX Mode, 1-18G



TUV Taiwan


11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

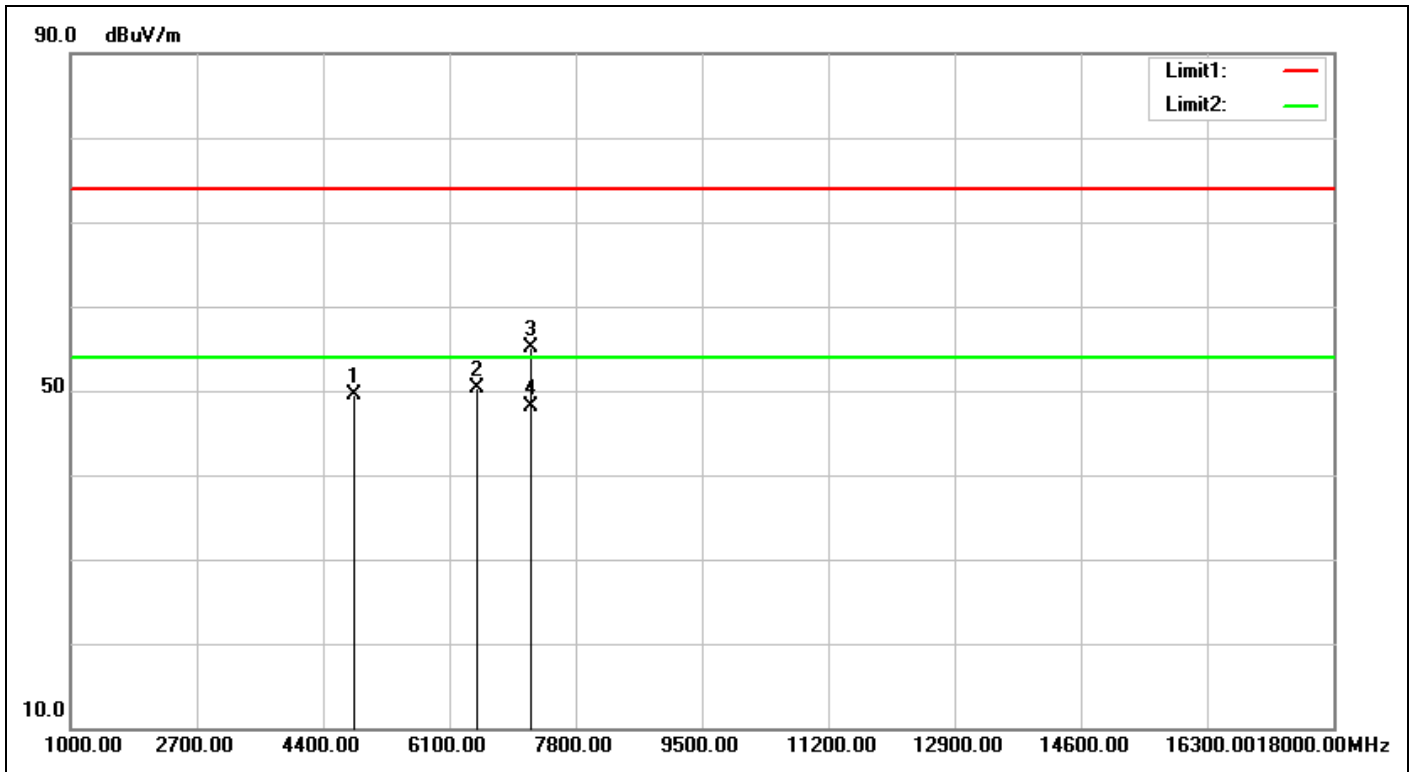


Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/5/2 09:42:34
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	21.6(°C)/51%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2402-TX		
Remark:	add 1.8p CAP		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.66	52.07	49.41	74.00	-24.59	peak	100	251	
2	6474.000	5.46	44.81	50.27	74.00	-23.73	peak	100	194	
3	7206.000	5.58	49.59	55.17	74.00	-18.83	peak	100	122	
4	7206.000	5.58	42.55	48.13	54.00	-5.87	AVG	100	122	

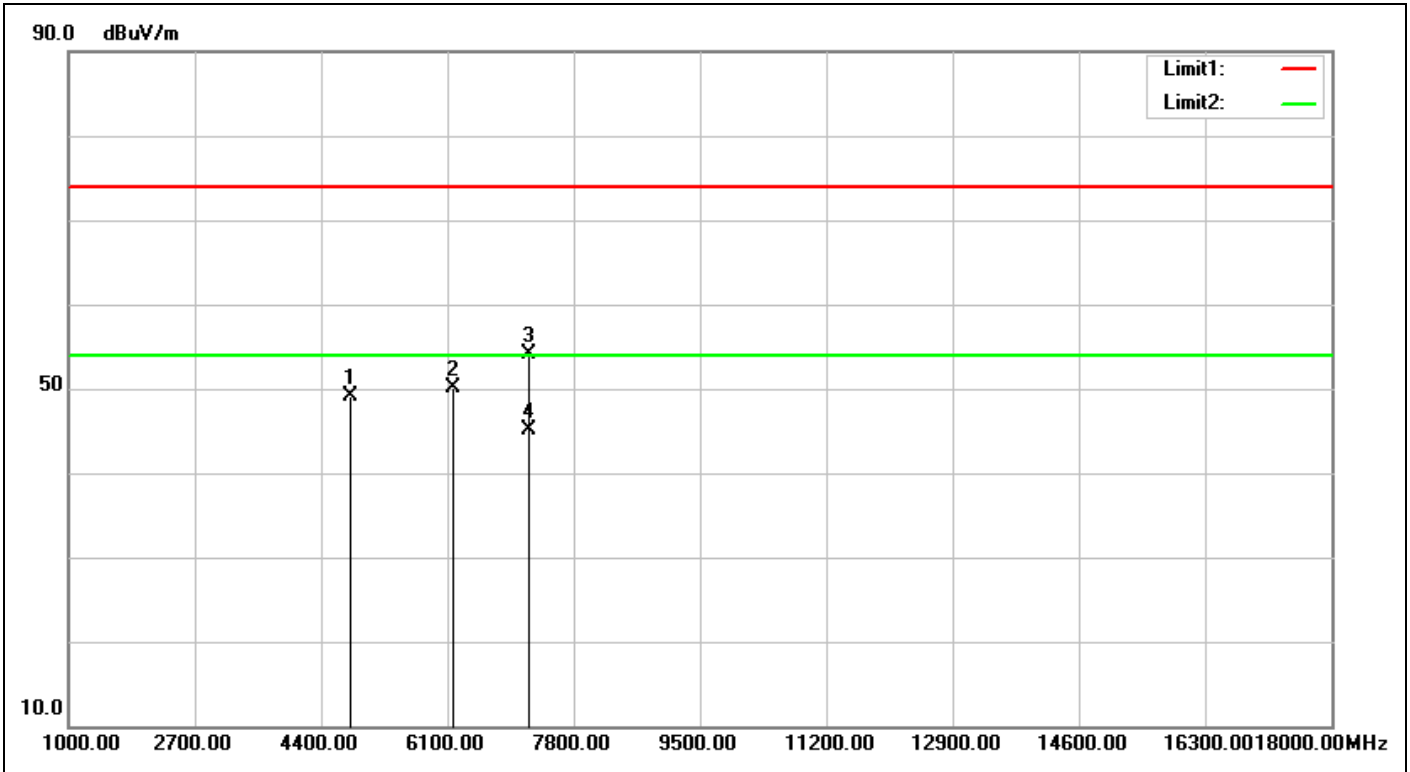


Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/5/2 09:43:36
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	21.6(°C)/51%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2402-TX		
Remark:	add 1.8p CAP		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.66	51.83	49.17	74.00	-24.83	peak	100	84	
2	6168.000	4.45	45.56	50.01	74.00	-23.99	peak	100	156	
3	7206.000	5.58	48.44	54.02	74.00	-19.98	peak	100	78	
4	7206.000	5.58	39.61	45.19	54.00	-8.81	AVG	100	78	

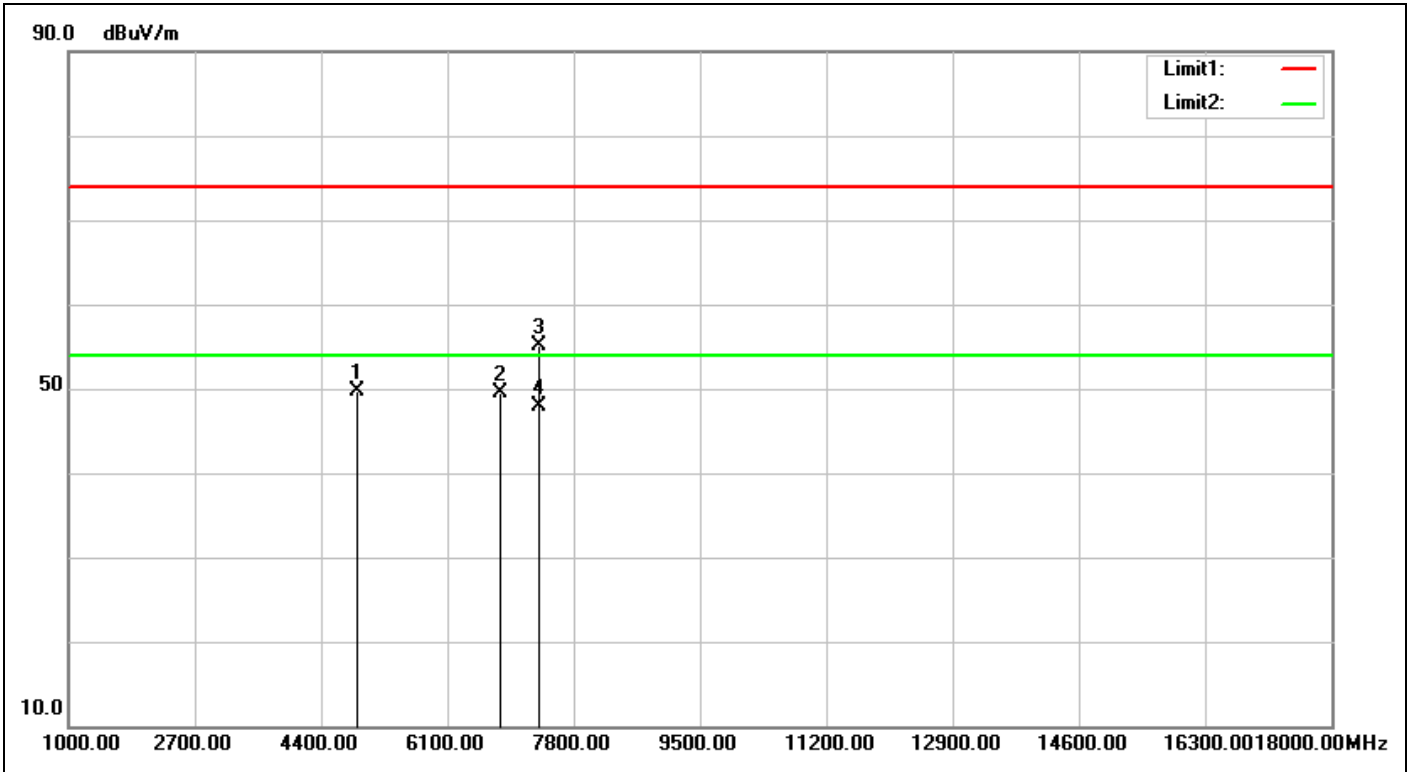


Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/5/2 09:31:12
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	21.6(°C)/51%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:	add 1.8p CAP		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4882.000	-2.48	52.12	49.64	74.00	-24.36	peak	100	244	
2	6814.000	5.19	44.39	49.58	74.00	-24.42	peak	100	283	
3	7323.000	5.93	49.10	55.03	74.00	-18.97	peak	100	122	
4	7323.000	5.93	42.05	47.98	54.00	-6.02	AVG	100	122	

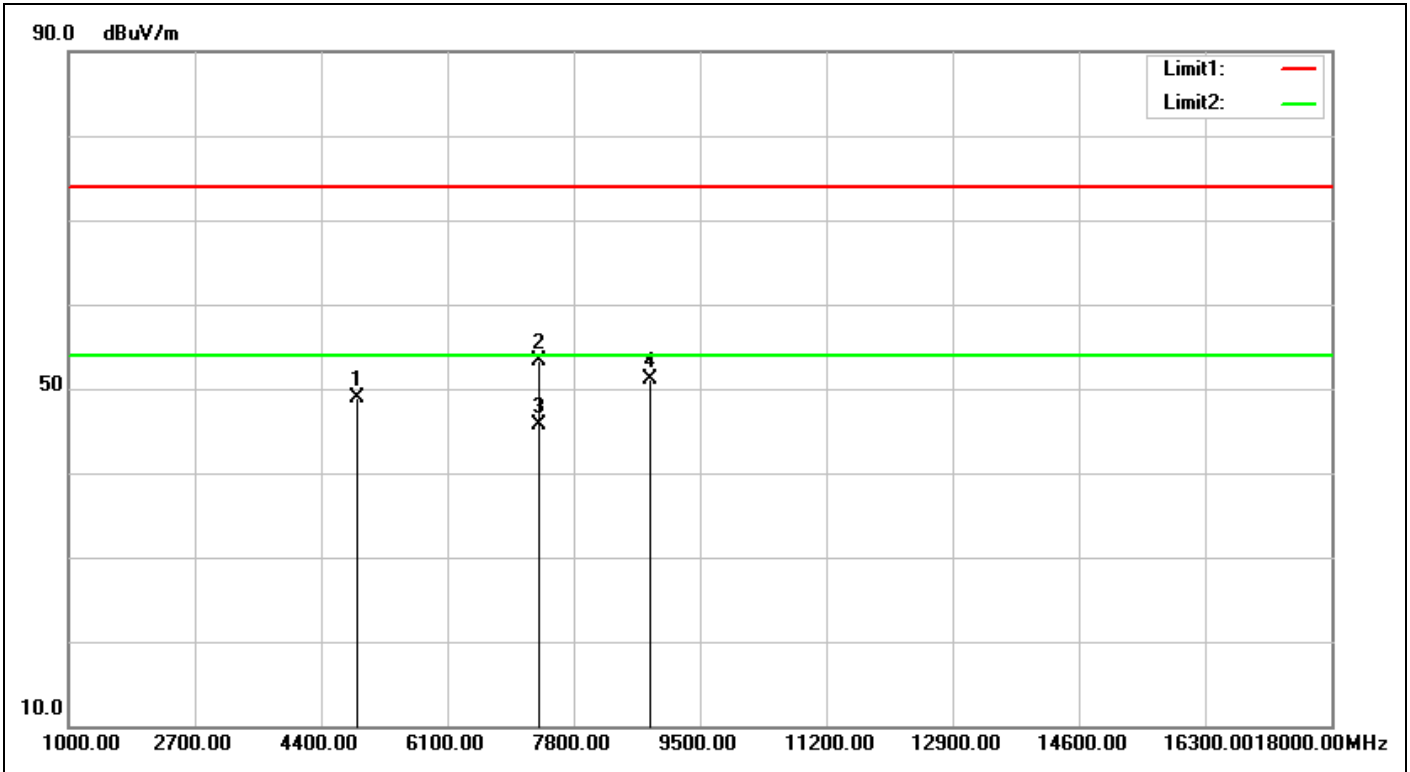


Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/5/2 09:32:15
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	21.6(°C)/51%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:	add 1.8p CAP		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4882.000	-2.48	51.46	48.98	74.00	-25.02	peak	100	152	
2	7323.000	5.93	47.42	53.35	74.00	-20.65	peak	100	38	
3	7323.000	5.93	39.76	45.69	54.00	-8.31	AVG	100	38	
4	8820.000	6.81	44.28	51.09	74.00	-22.91	peak	100	154	

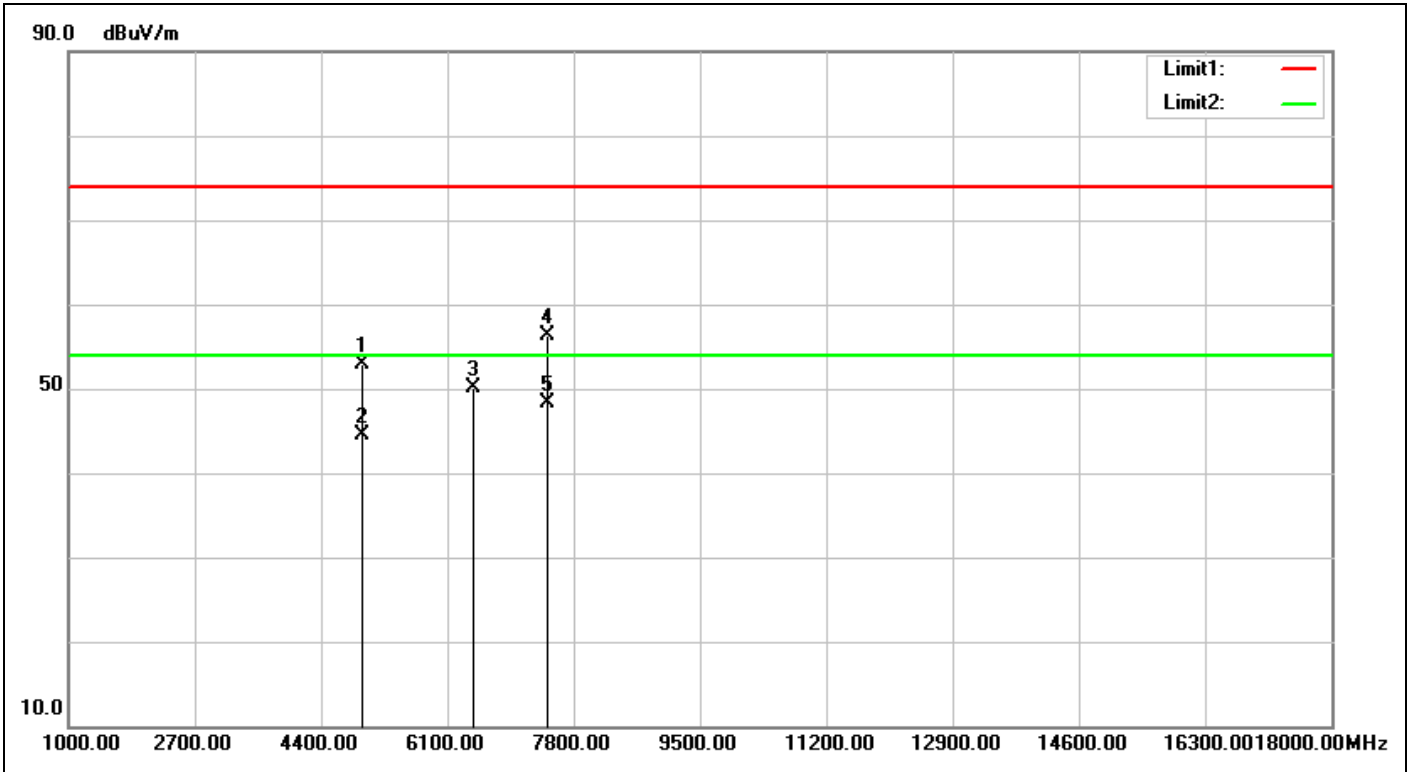

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/5/2 09:22:55
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	21.6(°C)/51%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2480-TX		
Remark:	add 1.8p CAP		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-2.31	55.18	52.87	74.00	-21.13	peak	100	69	
2	4960.000	-2.31	46.90	44.59	54.00	-9.41	AVG	100	69	
3	6440.000	5.35	44.73	50.08	74.00	-23.92	peak	100	168	
4	7440.000	6.28	50.10	56.38	74.00	-17.62	peak	100	129	
5	7440.000	6.28	41.95	48.23	54.00	-5.77	AVG	100	129	

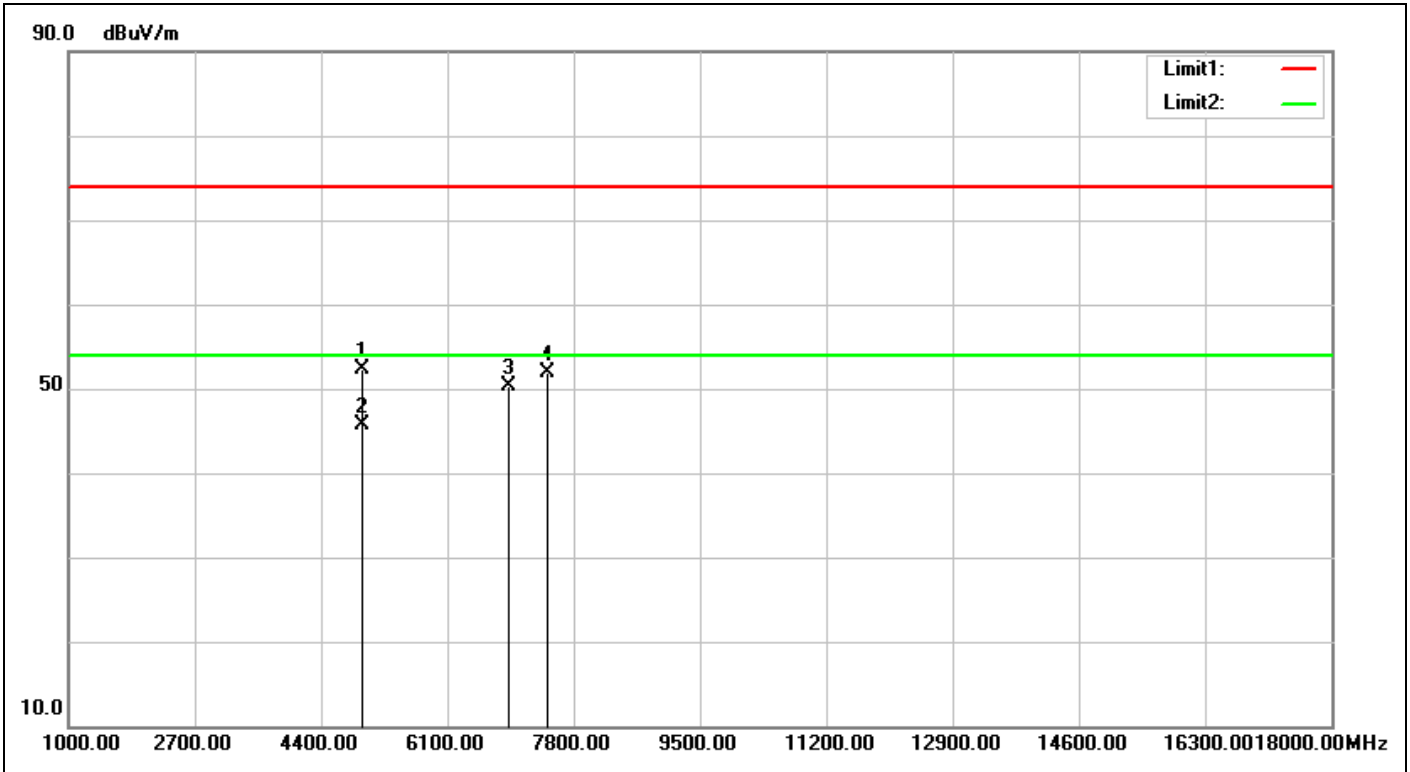

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/5/2 09:23:58
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	21.6(°C)/51%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2480-TX		
Remark:	add 1.8p CAP		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-2.31	54.58	52.27	74.00	-21.73	peak	100	328	
2	4960.000	-2.31	47.96	45.65	54.00	-8.35	AVG	100	328	
3	6933.000	5.05	45.33	50.38	74.00	-23.62	peak	100	6	
4	7440.000	6.28	45.72	52.00	74.00	-22.00	peak	100	29	


Spurious Emissions, TX Mode, 18-26G



TUV Taiwan


11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

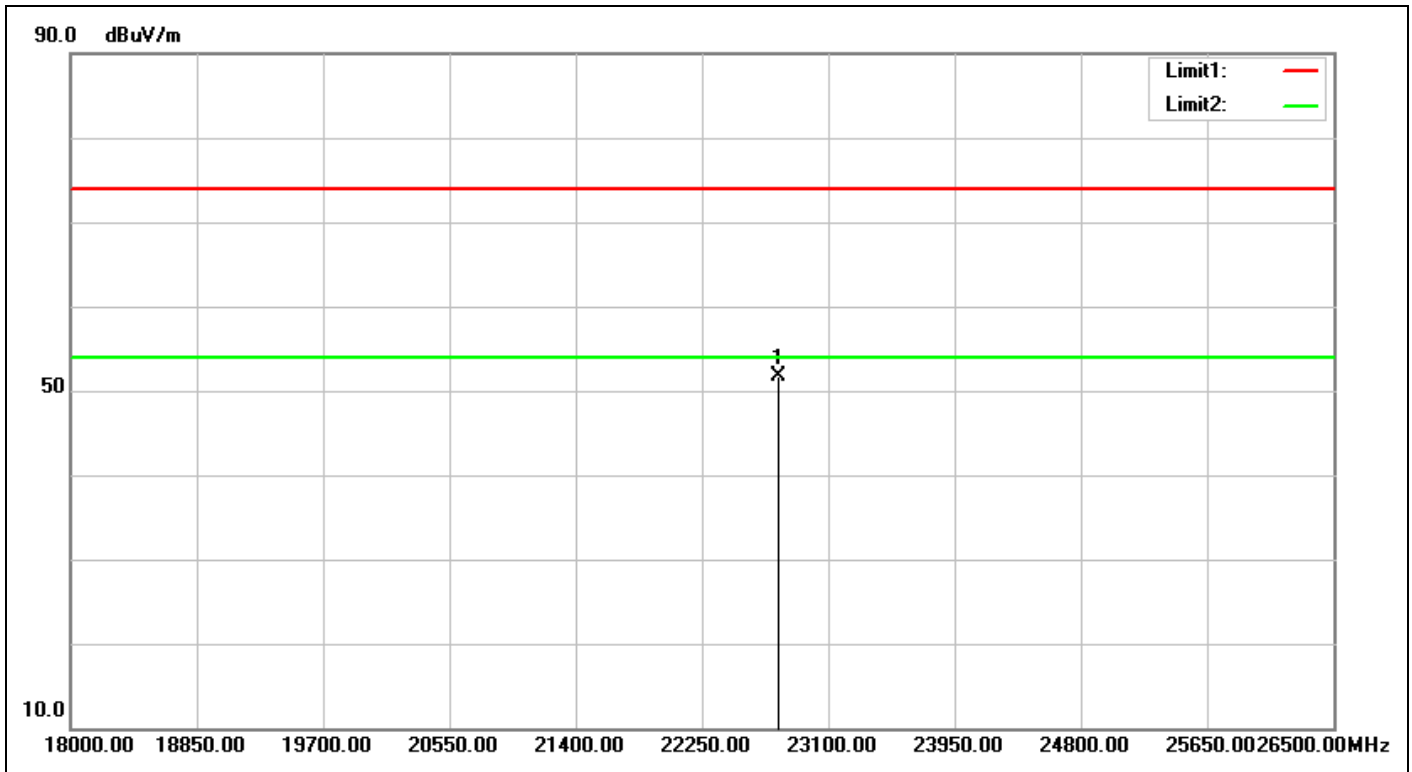


Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/4/26 16:46:08
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22760.000	32.68	18.97	51.65	74.00	-22.35	peak	100	309	

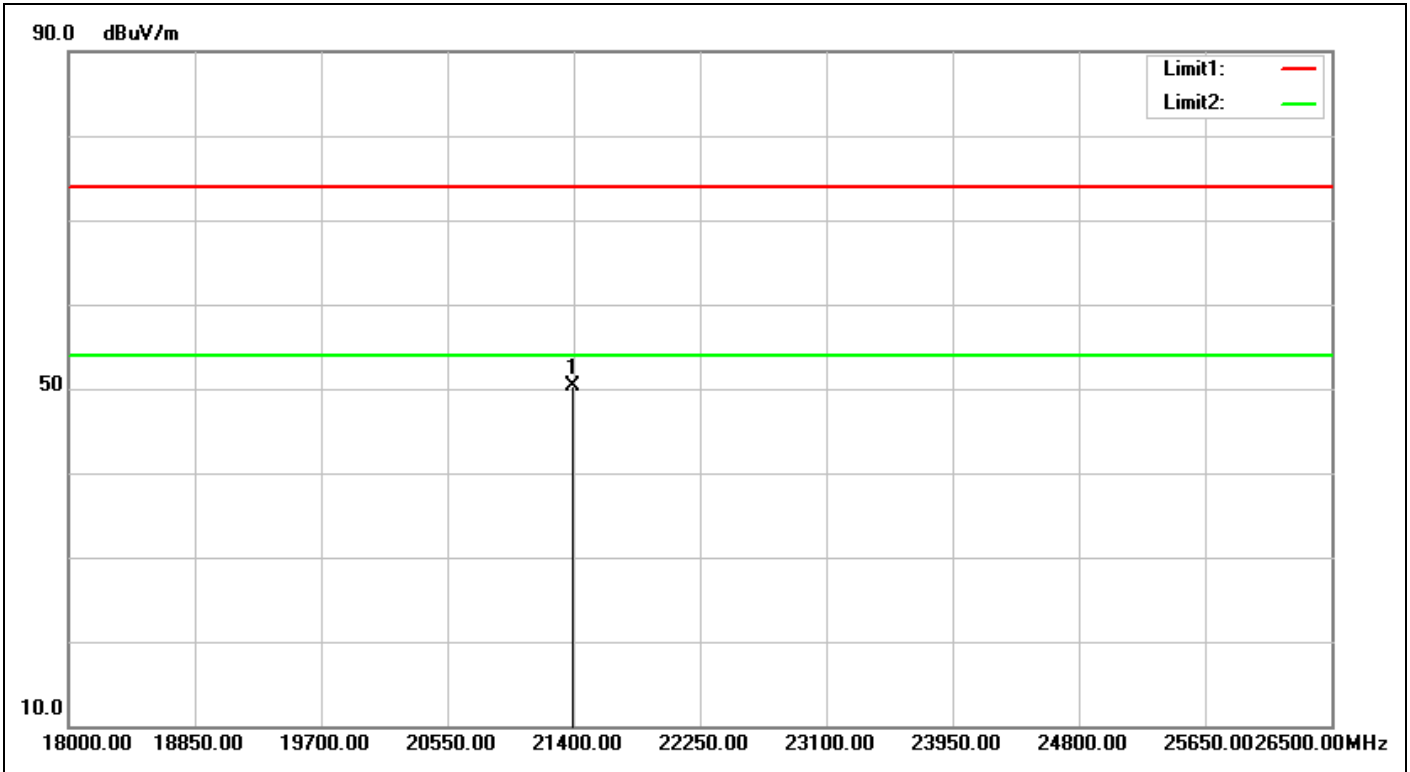


Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/4/26 16:46:19
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21391.500	32.48	17.86	50.34	74.00	-23.66	peak	100	304	

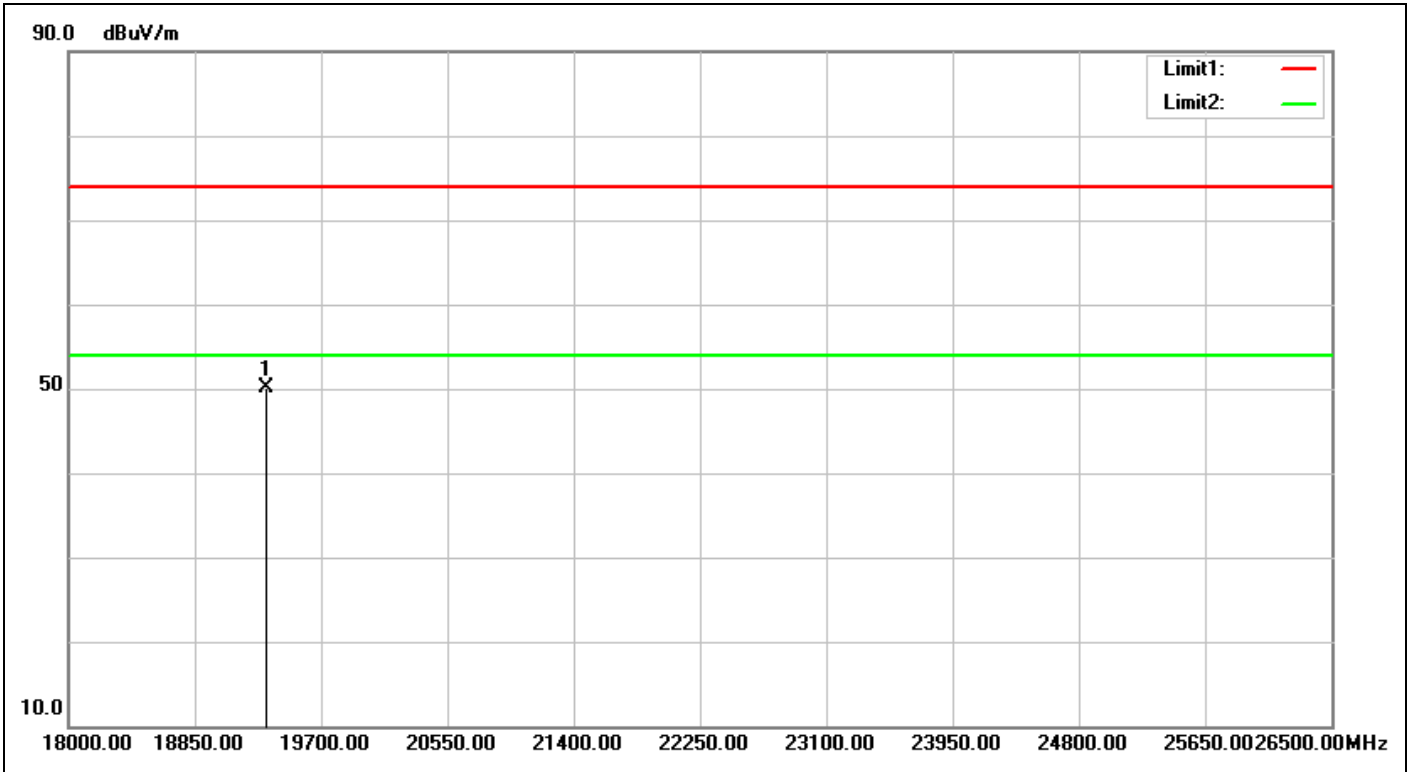


Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/4/26 16:46:35
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19334.500	30.99	19.16	50.15	74.00	-23.85	peak			

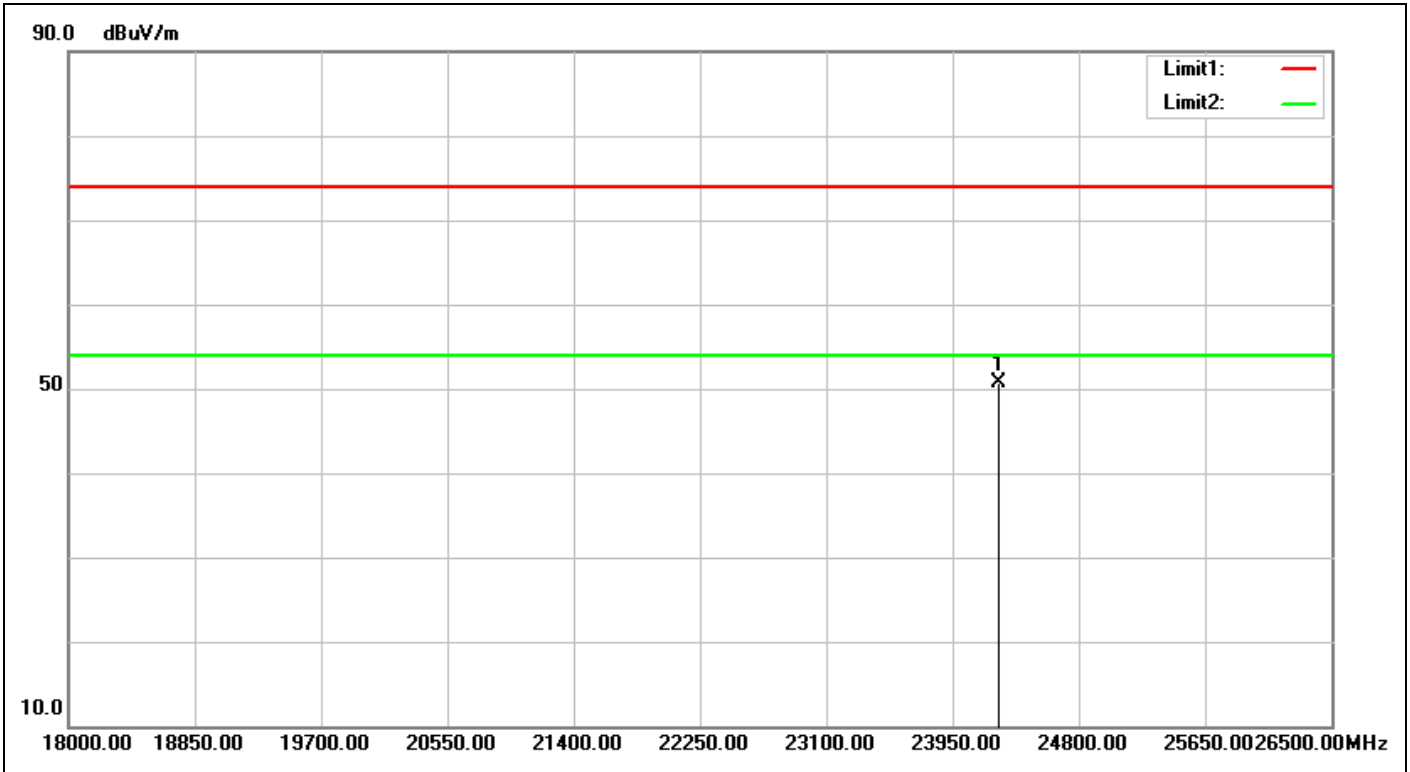


Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/4/26 16:46:45
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	24256.000	32.39	18.31	50.70	74.00	-23.30	peak			

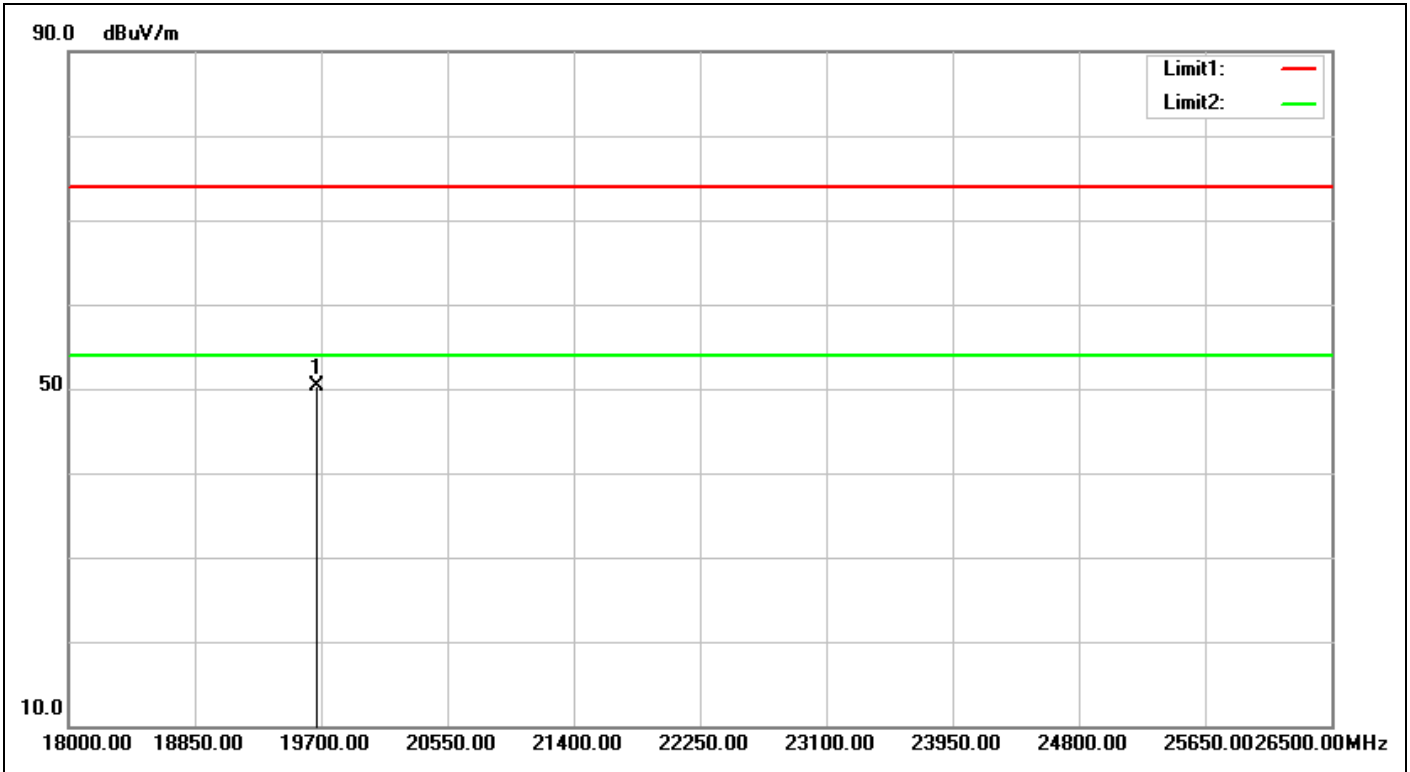

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/4/26 16:47:01
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19666.000	31.31	18.97	50.28	74.00	-23.72	peak			

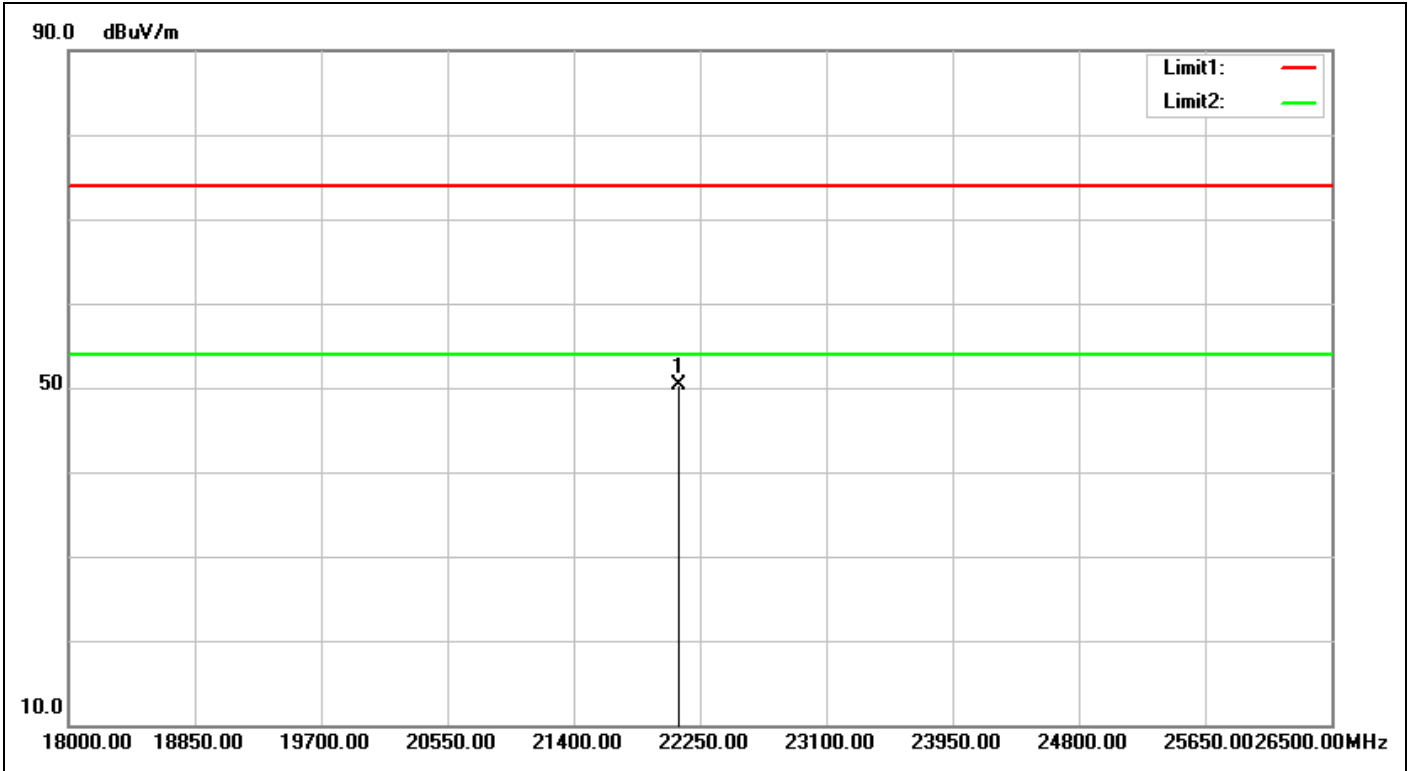

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/4/26 16:47:10
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22105.500	33.06	17.32	50.38	74.00	-23.62	peak			


Spurious Emissions, TX Mode, 30M-1G



TUV Taiwan


11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

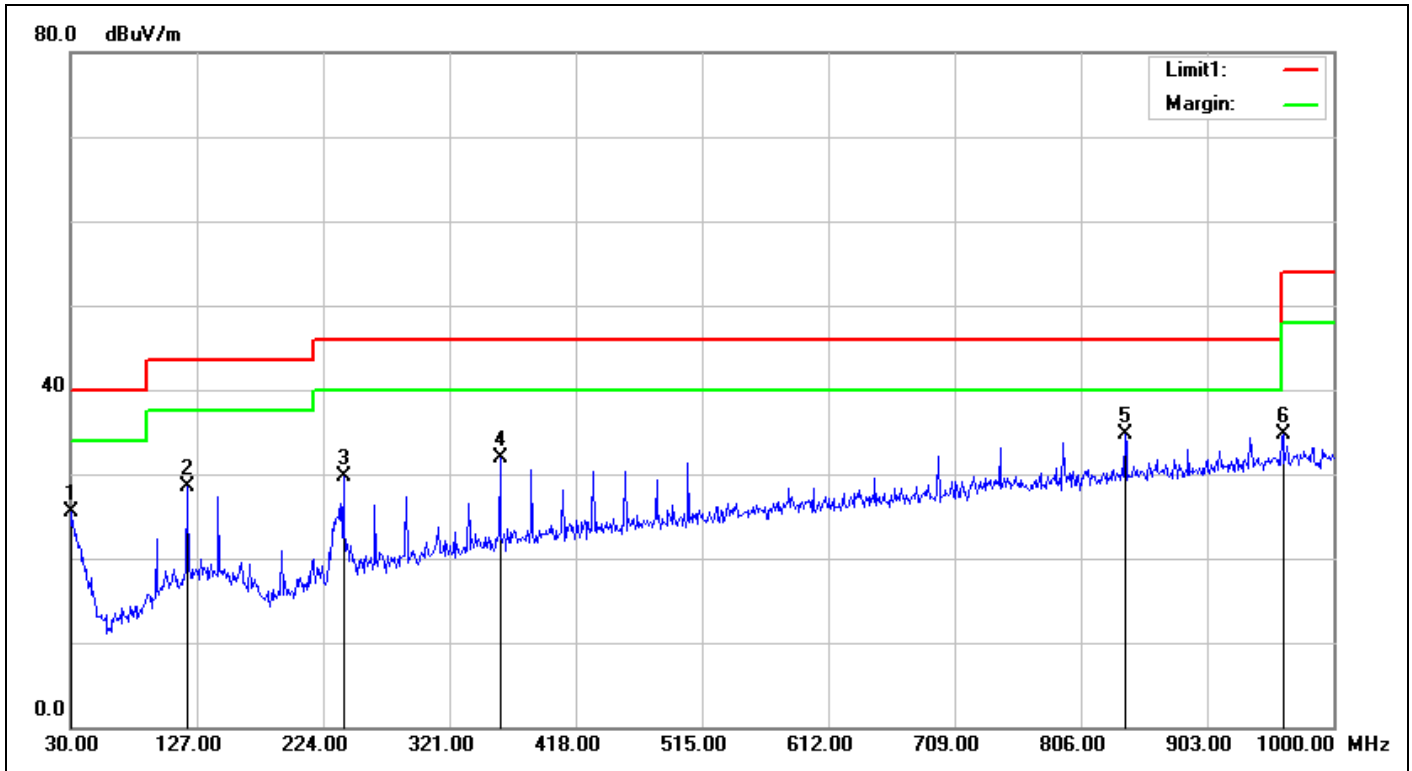

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/4/26 17:17:35
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.07	25.56	25.49	40.00	-14.51	QP	100	258	
2	119.2400	-7.40	35.86	28.46	43.50	-15.04	QP	100	258	
3	239.5200	-6.73	36.41	29.68	46.00	-16.32	QP	100	216	
4	359.8000	-3.30	35.25	31.95	46.00	-14.05	QP	100	43	
5	839.9500	3.51	31.13	34.64	46.00	-11.36	QP	100	242	
6	961.2000	5.48	29.27	34.75	54.00	-19.25	QP	100	101	

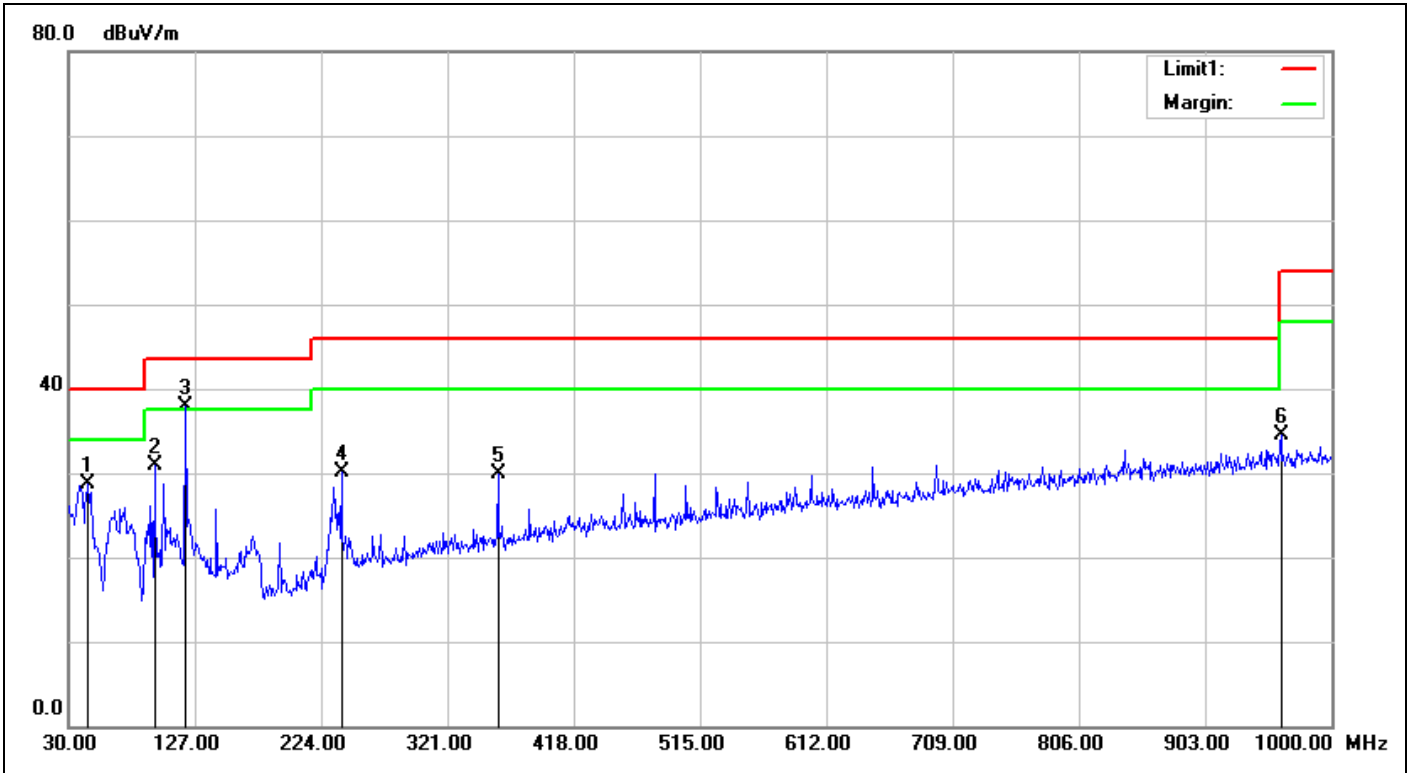

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/4/26 17:18:39
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	44.5500	-8.40	37.20	28.80	40.00	-11.20	QP	100	120	
2	95.9600	-10.03	41.01	30.98	43.50	-12.52	QP	100	57	
3	119.2400	-7.40	45.35	37.95	43.50	-5.55	QP	100	174	
4	239.5200	-6.73	36.88	30.15	46.00	-15.85	QP	100	174	
5	359.8000	-3.30	33.12	29.82	46.00	-16.18	QP	100	240	
6	961.2000	5.48	29.06	34.54	54.00	-19.46	QP	100	94	


Spurious Emissions, TX Mode, 9K-30M



TUV Taiwan


11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

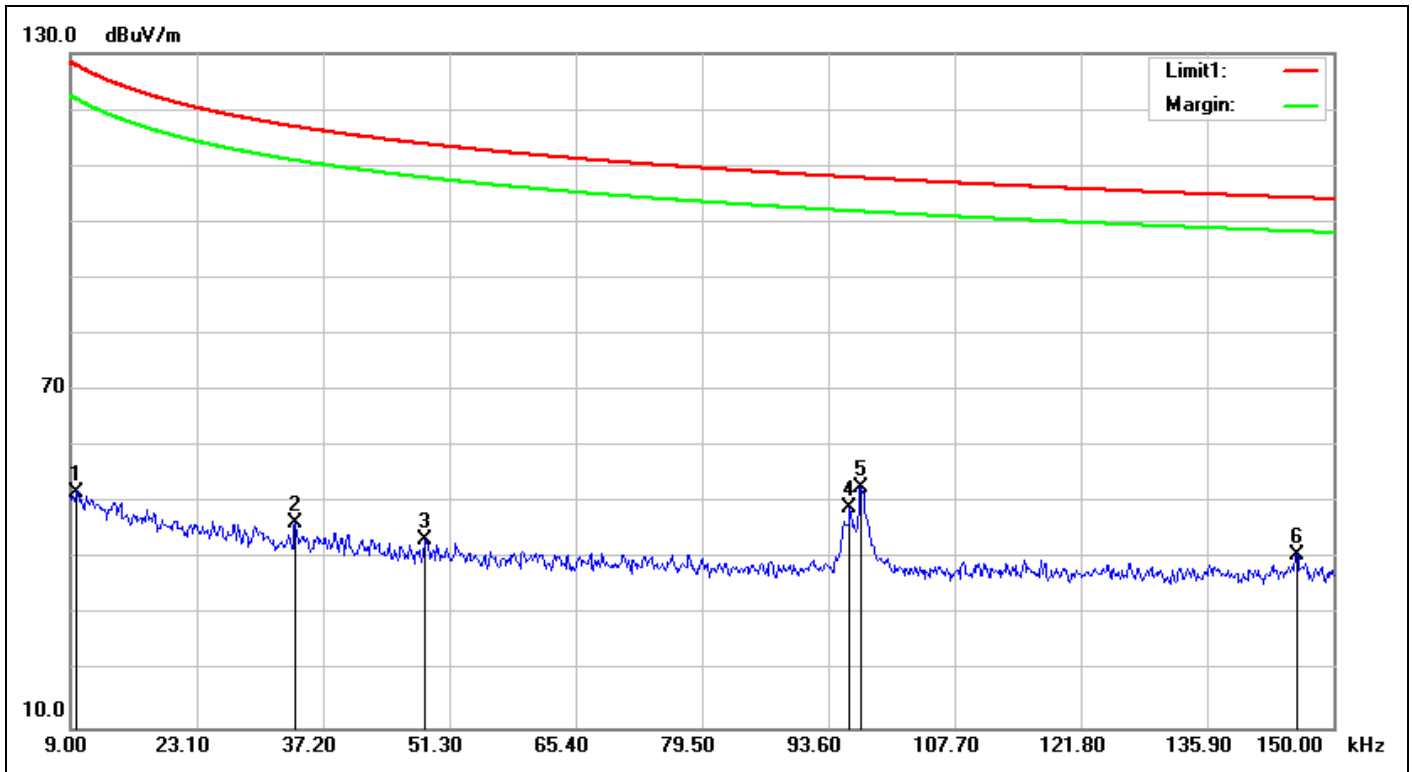

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2017/4/26 17:05:53
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0097	20.09	31.91	52.00	127.85	-75.85	QP	100	147	
2	0.0341	20.02	26.42	46.44	116.94	-70.50	QP	100	102	
3	0.0486	19.29	24.04	43.33	113.86	-70.53	QP	100	144	
4	0.0960	18.87	30.33	49.20	107.95	-58.75	QP	100	123	
5	0.0973	18.86	33.80	52.66	107.83	-55.17	QP	100	131	
6	0.1459	18.80	21.95	40.75	104.32	-63.57	QP	100	235	

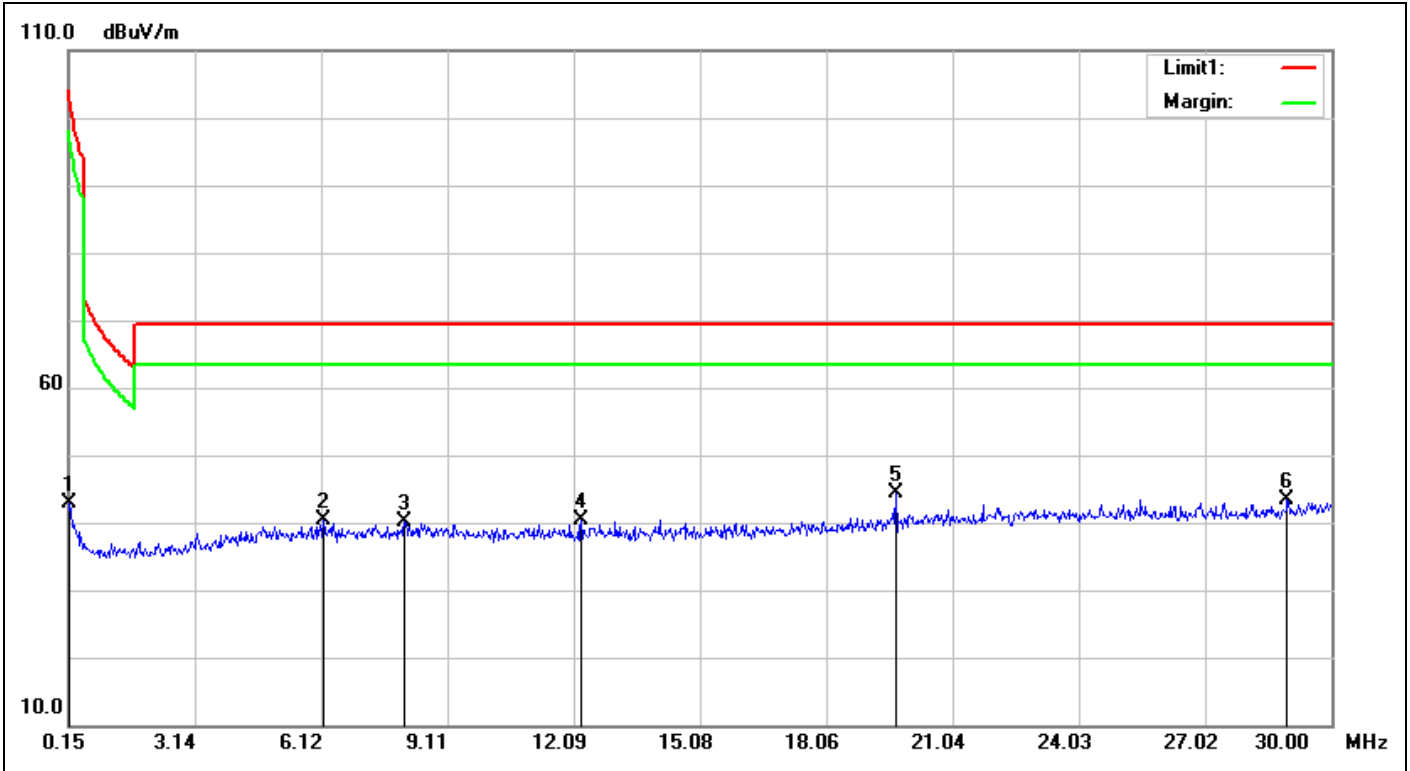

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2017/4/26 17:07:34
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1799	18.77	24.19	42.96	102.50	-59.54	QP	100	40	
2	6.1797	19.79	20.56	40.35	69.50	-29.15	QP	100	258	
3	8.0901	20.08	20.08	40.16	69.50	-29.34	QP	100	179	
4	12.2691	20.65	19.77	40.42	69.50	-29.08	QP	100	245	
5	19.7018	21.52	22.75	44.27	69.50	-25.23	QP	100	33	
6	28.9553	22.21	21.06	43.27	69.50	-26.23	QP	100	139	


Spurious Emissions, RX Mode, 1-18G



TUV Taiwan


11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

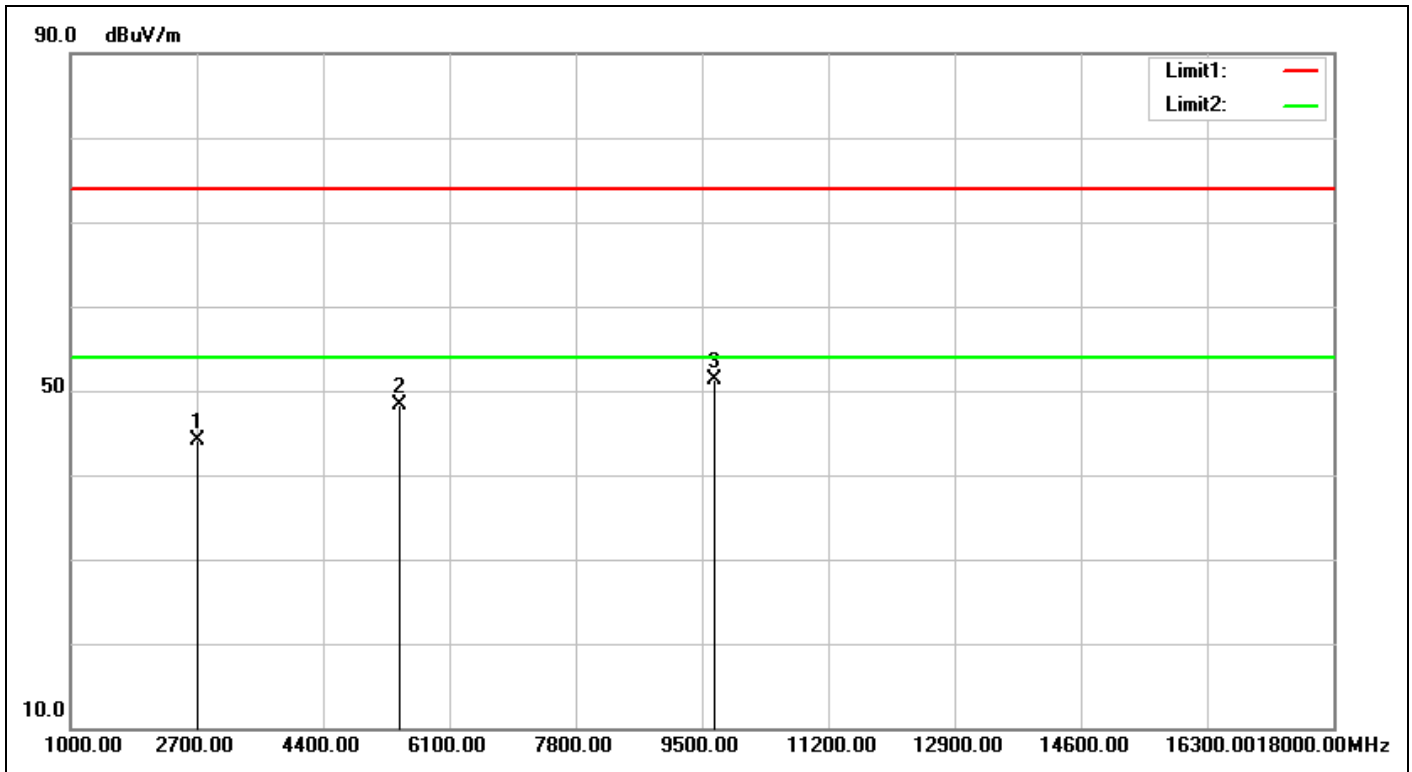

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/4/26 16:55:06
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2700.000	-7.62	51.76	44.14	74.00	-29.86	peak	100	183	
2	5437.000	-0.93	49.24	48.31	74.00	-25.69	peak	100	211	
3	9670.000	5.16	46.16	51.32	74.00	-22.68	peak	100	271	

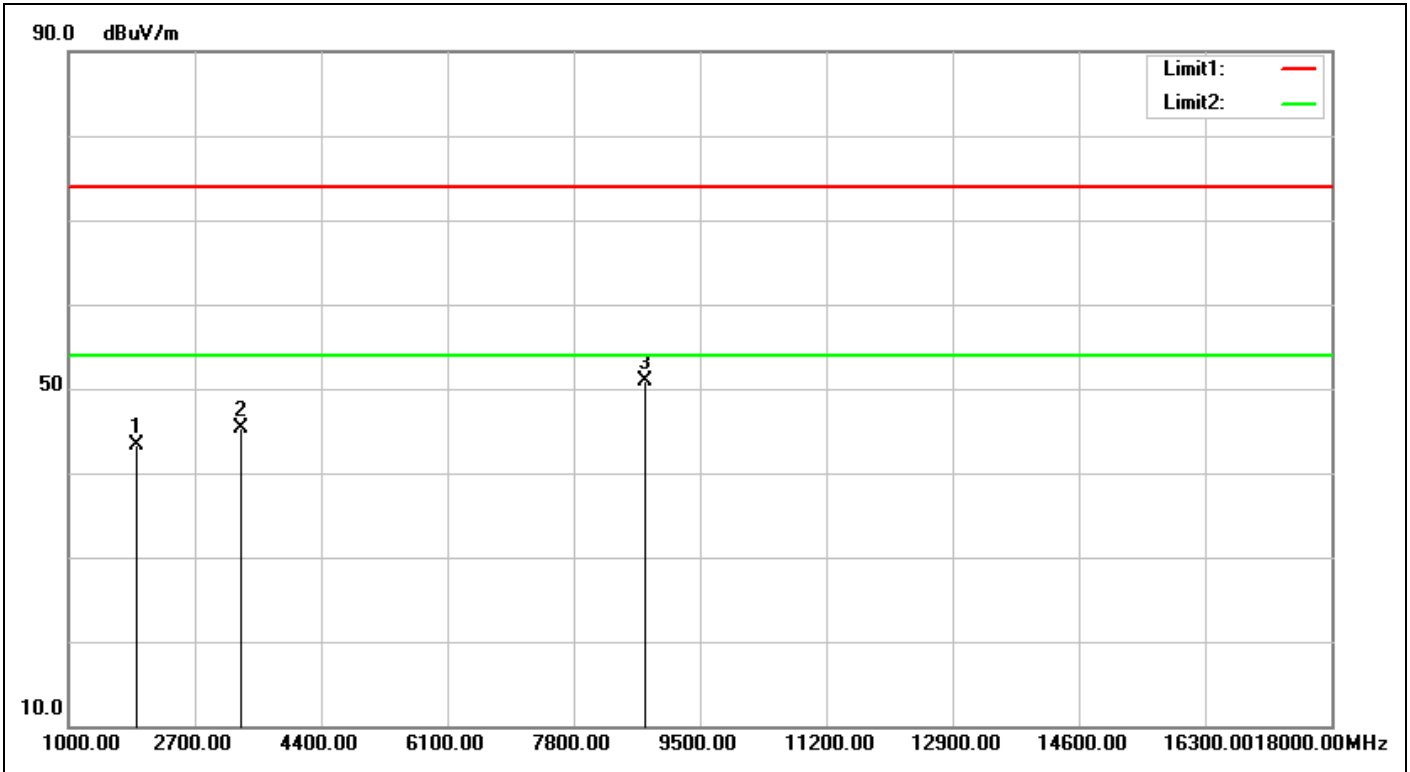

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/4/26 16:56:09
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1918.000	-8.63	51.84	43.21	74.00	-30.79	peak	100	213	
2	3329.000	-6.77	52.07	45.30	74.00	-28.70	peak	100	102	
3	8769.000	5.75	45.06	50.81	74.00	-23.19	peak	100	169	


Spurious Emissions, RX Mode, 18-26G



TUV Taiwan


11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

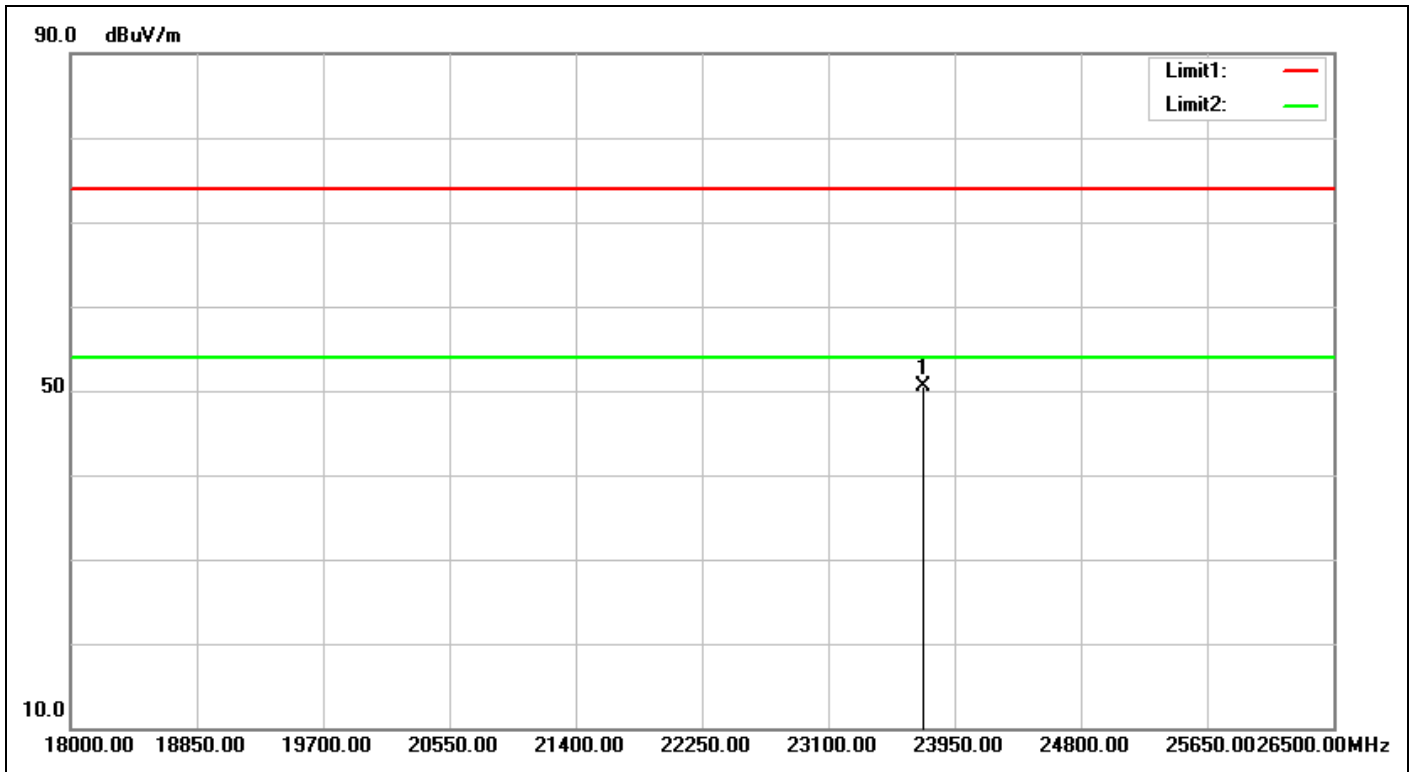

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/4/26 16:47:26
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23737.500	32.39	18.18	50.57	74.00	-23.43	peak			

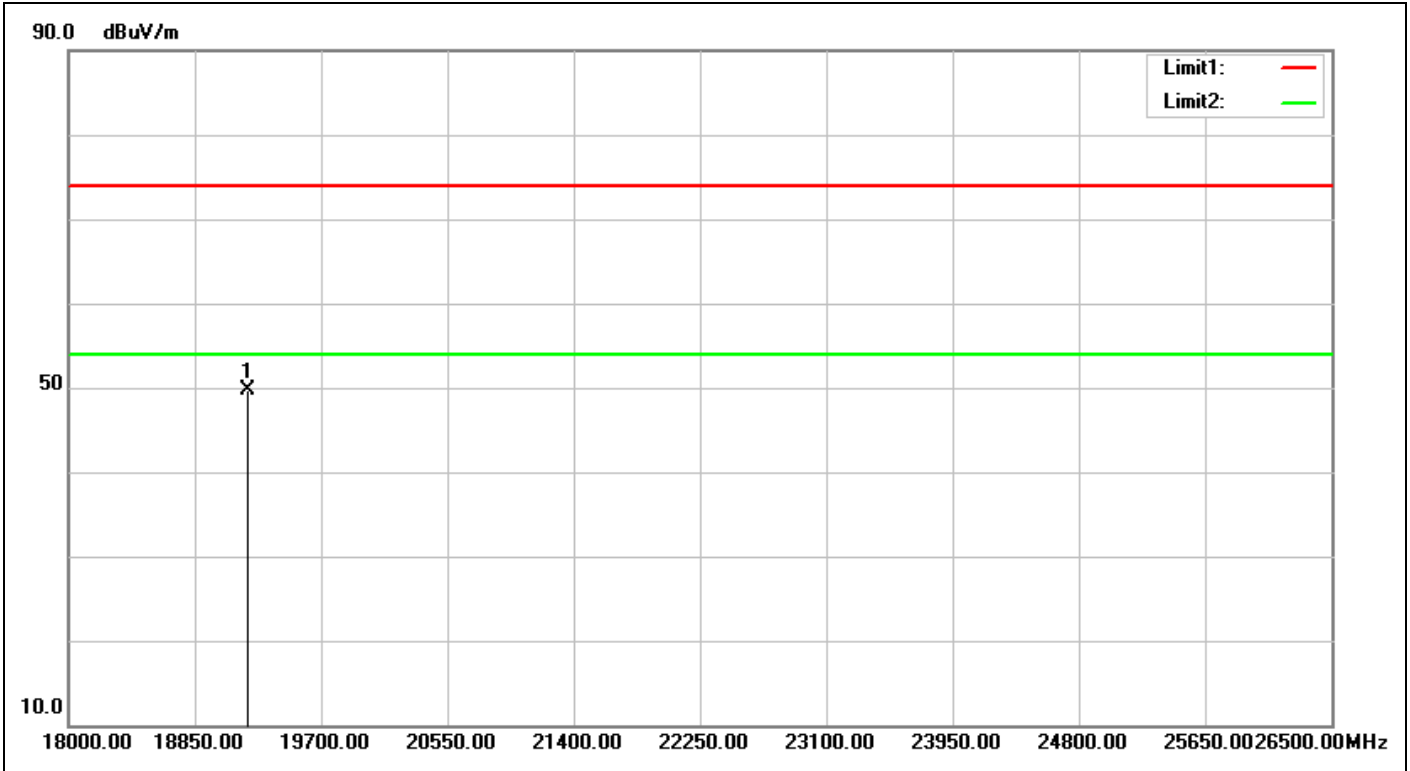

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/4/26 16:47:36
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19207.000	30.79	18.85	49.64	74.00	-24.36	peak			


Spurious Emissions, RX Mode, 30M-1G



TUV Taiwan


11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

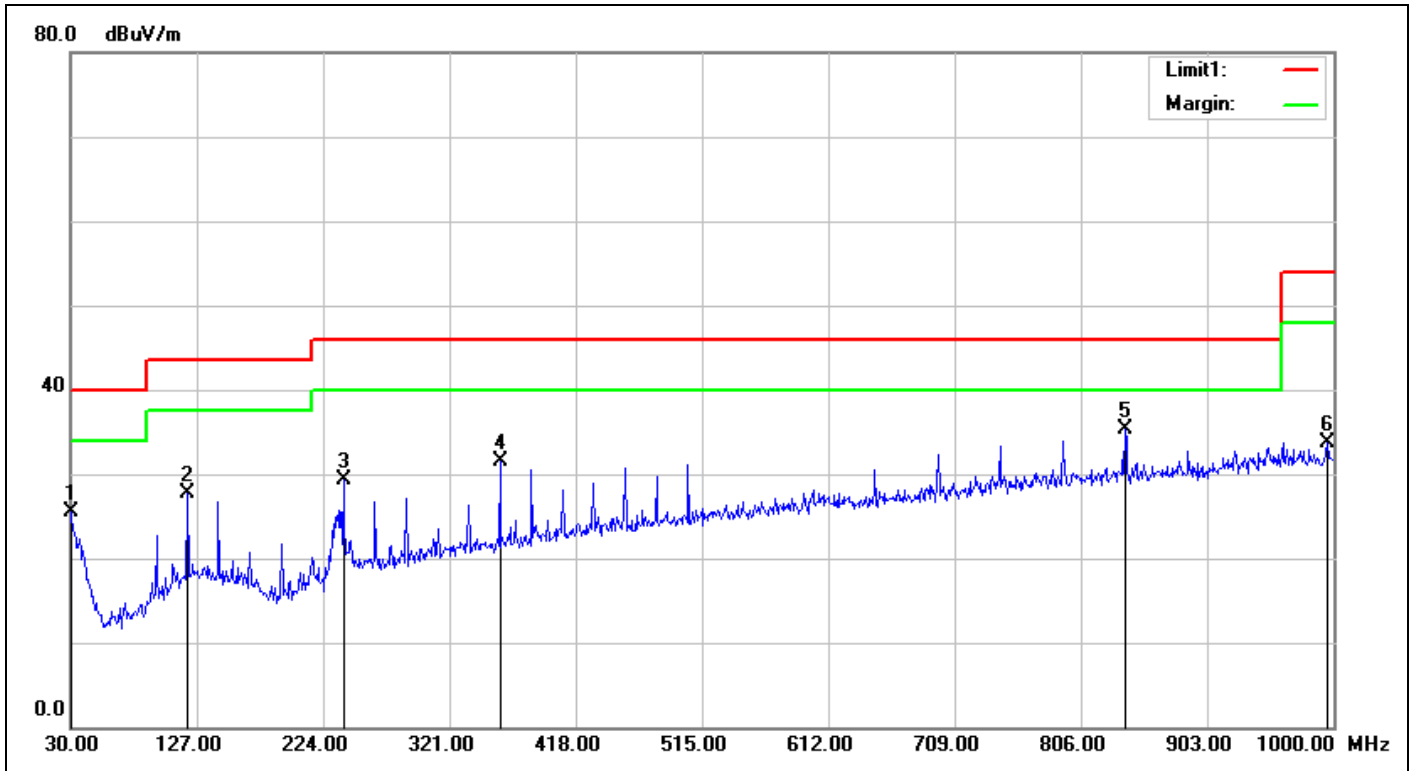

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/4/26 17:20:57
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.07	25.63	25.56	40.00	-14.44	QP	100	9	
2	120.2100	-7.31	35.01	27.70	43.50	-15.80	QP	100	258	
3	239.5200	-6.73	36.08	29.35	46.00	-16.65	QP	100	216	
4	359.8000	-3.30	34.73	31.43	46.00	-14.57	QP	100	33	
5	839.9500	3.51	31.78	35.29	46.00	-10.71	QP	100	358	
6	995.1500	5.79	27.84	33.63	54.00	-20.37	QP	100	163	

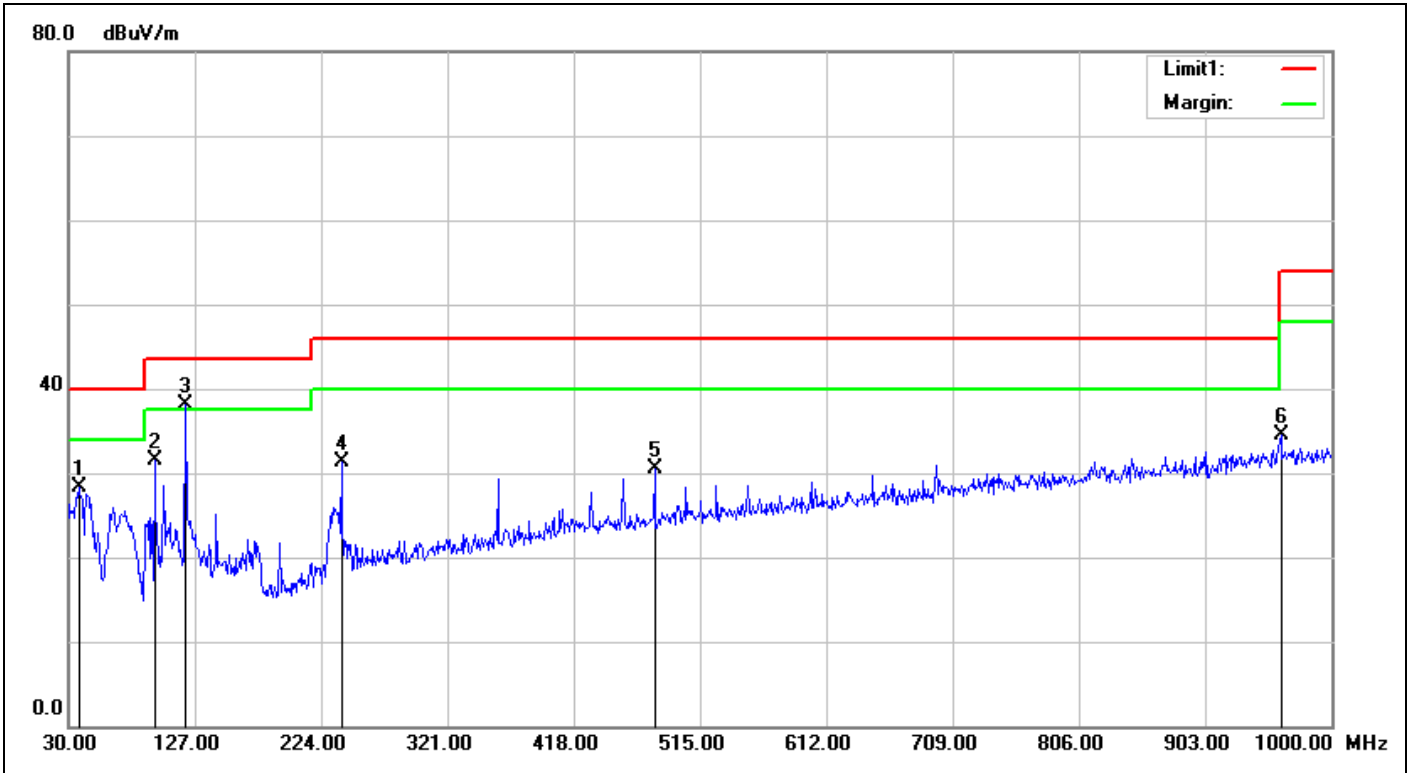

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/4/26 17:22:00
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	37.7600	-4.51	32.78	28.27	40.00	-11.73	QP	100	128	
2	95.9600	-10.03	41.44	31.41	43.50	-12.09	QP	100	54	
3	120.2100	-7.31	45.32	38.01	43.50	-5.49	QP	100	174	
4	239.5200	-6.73	38.03	31.30	46.00	-14.70	QP	100	200	
5	480.0800	-1.62	32.19	30.57	46.00	-15.43	QP	100	14	
6	961.2000	5.48	29.08	34.56	54.00	-19.44	QP	100	96	


Spurious Emissions, RX Mode, 9K-30M



TUV Taiwan


11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

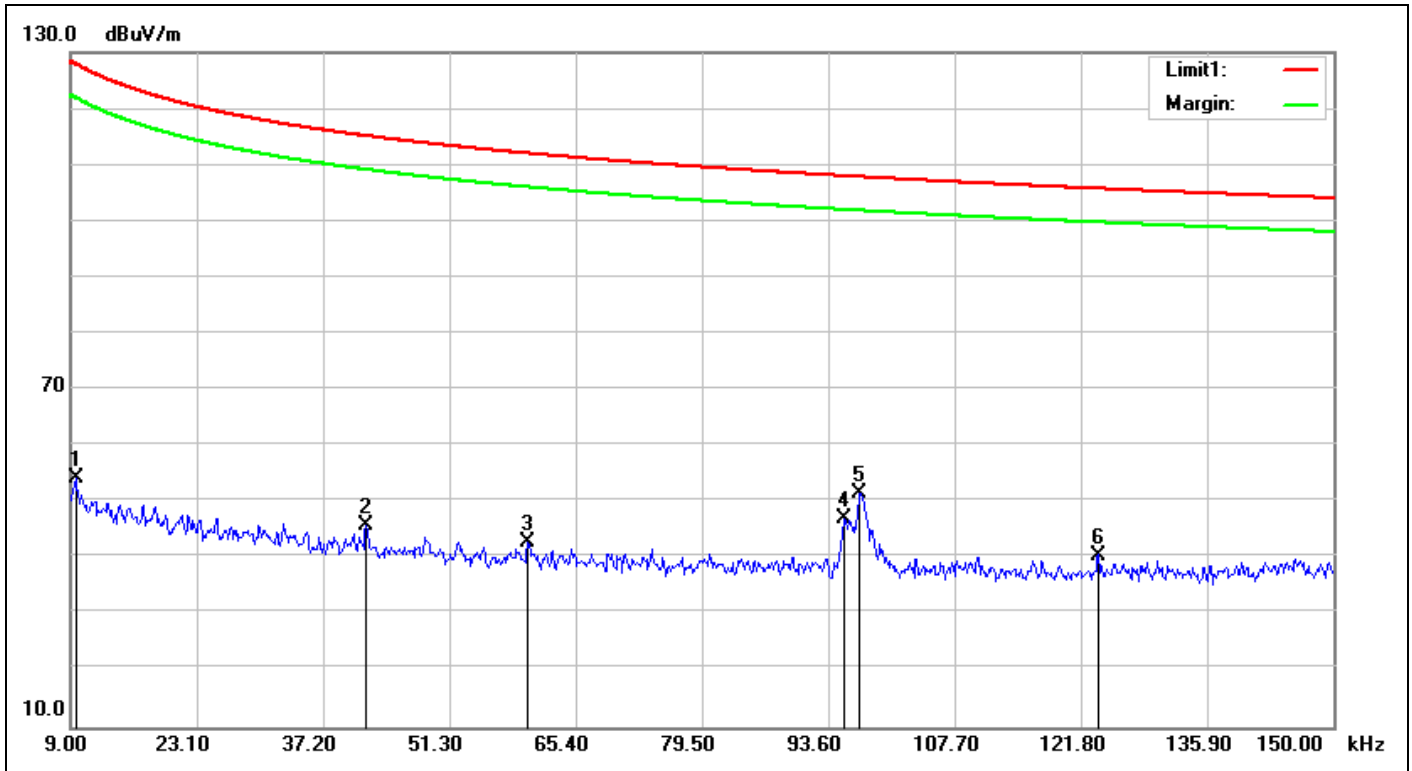

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2017/4/26 17:04:24
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0096	20.01	34.11	54.12	127.94	-73.82	QP	100	270	
2	0.0420	19.62	26.30	45.92	115.13	-69.21	QP	100	0	
3	0.0600	19.14	23.59	42.73	112.03	-69.30	QP	100	286	
4	0.0954	18.88	28.08	46.96	108.01	-61.05	QP	100	267	
5	0.0971	18.86	32.71	51.57	107.85	-56.28	QP	100	211	
6	0.1238	18.82	21.78	40.60	105.74	-65.14	QP	100	169	

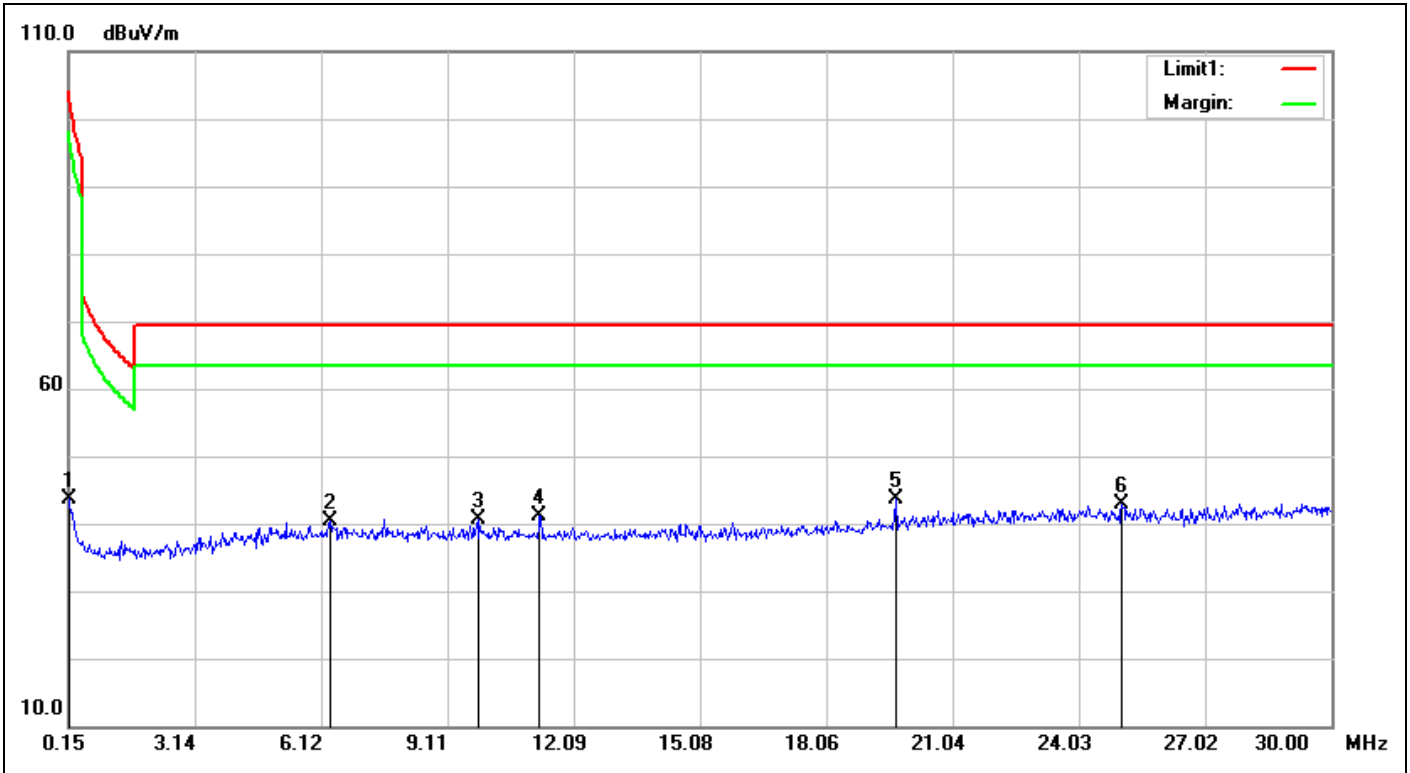

Service No.:	114063799(BL1)-FCC	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2017/4/26 17:09:46
Applicant:	Acrox	Test Rating:	DC 5V
Product:	Platinum Bluetooth Mouse	Temp.(°C)/Hum.(%):	22.2(°C)/54%
Model No.:	BL1	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1500	18.80	24.93	43.73	104.08	-60.35	QP	100	259	
2	6.3290	19.81	20.67	40.48	69.50	-29.02	QP	100	123	
3	9.8214	20.36	20.19	40.55	69.50	-28.95	QP	100	1	
4	11.2841	20.54	20.58	41.12	69.50	-28.38	QP	100	298	
5	19.7018	21.52	21.99	43.51	69.50	-25.99	QP	100	213	
6	25.0449	21.92	20.91	42.83	69.50	-26.67	QP	100	356	