

# FCC TEST REPORT

**REPORT NO. :** RF970318L12

**MODEL NO. :** PR1 (refer to item 3.1 for more details)

**RECEIVED :** Mar. 27, 2008

**TESTED :** Mar. 31, ~ Apr. 21, 2008

**ISSUED :** Apr. 25, 2008

**APPLICANT :** Acrox Technologies Co., Ltd

**ADDRESS :** 8F, No. 437, Rui Guang RD., Nei Hu Dist., Taipei  
114, Taiwan, R.O.C.

**ISSUED BY :** Advance Data Technology Corporation

**LAB ADDRESS :** No. 47, 14<sup>th</sup> Ling, Chia Pau Tsuen, Lin Kou  
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

**TEST LOCATION :** No. 19, Hwa Ya 2<sup>nd</sup> Rd., Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 23 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.





## Table of Contents

1.	CERTIFICATION .....	3
2.	SUMMARY OF TEST RESULTS .....	4
2.1	MEASUREMENT UNCERTAINTY .....	4
3.	GENERAL INFORMATION.....	5
3.1	GENERAL DESCRIPTION OF EUT .....	5
3.2	DESCRIPTION OF TEST MODES.....	6
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	6
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	8
3.4	DESCRIPTION OF SUPPORT UNITS .....	8
4.	TEST TYPES AND RESULTS .....	9
4.1	RADIATED EMISSION MEASUREMENT .....	9
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	9
4.1.2	TEST INSTRUMENTS .....	10
4.1.3	TEST PROCEDURES .....	11
4.1.4	DEVIATION FROM TEST STANDARD .....	11
4.1.5	TEST SETUP .....	12
4.1.6	EUT OPERATING CONDITIONS.....	12
4.1.7	TEST RESULTS .....	13
4.2	CONDUCTED EMISSION MEASUREMENT .....	18
4.3	BAND EDGES MEASUREMENT .....	18
4.3.1	LIMITS OF BAND EDGES MEASUREMENT .....	18
4.3.2	TEST INSTRUMENTS .....	18
4.3.3	TEST PROCEDURE .....	18
4.3.4	DEVIATION FROM TEST STANDARD .....	18
4.3.5	EUT OPERATING CONDITION .....	18
4.3.6	TEST RESULTS .....	19
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	21
6.	INFORMATION ON THE TESTING LABORATORIES .....	22
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	23



# 1. CERTIFICATION

**PRODUCT:** Wireless Stopwatch Presenter with Laser Pointer  
(refer to item 3.1 for more details)

**MODEL:** PR1 (refer to item 3.1 for more details)

**BRAND:** ACROX


**APPLICANT:** Acrox Technologies Co., Ltd

**TESTED:** Mar. 31, ~ Apr. 21, 2008


**TEST SAMPLE:** ENGINEERING SAMPLE

**STANDARDS:** **FCC Part 15, Subpart C (Section 15.249)**  
ANSI C63.4-2003

The above equipment (model: PR1, PR2) have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** :  , **DATE:** Apr. 25, 2008  
Joanna Wang / Senior Specialist

**TECHNICAL ACCEPTANCE** :  , **DATE:** Apr. 25, 2008  
Responsible for RF Long Chen / Senior Engineer

**APPROVED BY** :  , **DATE:** Apr. 25, 2008  
Gary Chang / Assistant Manager

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.249)			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	NA	Power supply is 3Vdc from battery
15.209 15.249 15.249 (d)	Radiated Emission Test Band Edge Measurement Limit: 50dB less than the peak value of fundamental frequency or meet radiated emission limit in section 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.33dB at 2447.000MHz.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	Wireless Stopwatch Presenter with Laser Pointer (refer to NOTE 1 for more details)
<b>MODEL NO.</b>	PR1 (refer to NOTE 1 for more details)
<b>FCC ID</b>	PRDPRINTER001
<b>POWER SUPPLY</b>	3Vdc form battery (1.5Vdc x 2)
<b>MODULATION TYPE</b>	QFSK
<b>FREQUENCY RANGE</b>	2405 ~ 2477 MHz
<b>NUMBER OF CHANNEL</b>	73
<b>ANTENNA TYPE</b>	Printed antenna with -3.53dBi
<b>DATA CABLE</b>	NA
<b>I/O PORT</b>	NA
<b>ACCESSORY DEVICES</b>	NA

**NOTE:**

1. A set of the EUT include transmitter and receiver, and has the following models for marketing differentiation:

MODEL NAME	PRODUCT NAME	REMARK
PR1	Wireless Stopwatch Presenter with Laser Pointer	With LCD display
VP4560		Base on model PR1
PR2	Wireless Presenter with Laser Pointer	Without LCD display
VP4550		Base on model PR2


2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

73 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2405.00	26	2430.00	51	2455.00
2	2406.00	27	2431.00	52	2456.00
3	2407.00	28	2432.00	53	2457.00
4	2408.00	29	2433.00	54	2458.00
5	2409.00	30	2434.00	55	2459.00
6	2410.00	31	2435.00	56	2460.00
7	2411.00	32	2436.00	57	2461.00
8	2412.00	33	2437.00	58	2462.00
9	2413.00	34	2438.00	59	2463.00
10	2414.00	35	2439.00	60	2464.00
11	2415.00	36	2440.00	61	2465.00
12	2416.00	37	2441.00	62	2466.00
13	2417.00	38	2442.00	63	2467.00
14	2418.00	39	2443.00	64	2468.00
15	2419.00	40	2444.00	65	2469.00
16	2420.00	41	2445.00	66	2470.00
17	2421.00	42	2446.00	67	2471.00
18	2422.00	43	2447.00	68	2472.00
19	2423.00	44	2448.00	69	2473.00
20	2424.00	45	2449.00	70	2474.00
21	2425.00	46	2450.00	71	2475.00
22	2426.00	47	2451.00	72	2476.00
23	2427.00	48	2452.00	73	2477.00
24	2428.00	49	2453.00		
25	2429.00	50	2454.00		

#### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

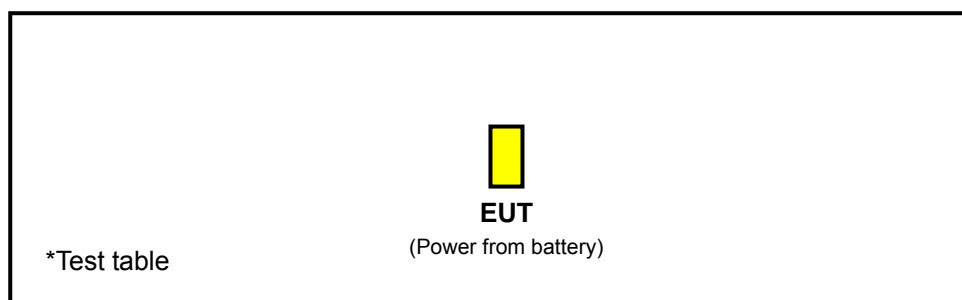



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	BM	
A	√	√	NOTE 1	√	Model: PR1
B	-	√	NOTE 1	-	Model: PR2

Where **PLC:** Power Line Conducted Emission                                    **RE<1G:** Radiated Emission below 1GHz  
**RE≥1G:** Radiated Emission above 1GHz                                    **BM:** Bandedge Measurement

**NOTE:** 1. No need to concern of Conducted Emission due to the EUT is powered by battery.  
2. "-" means no effect.

**RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGUR MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	AXIS
A	1 to 73	1, 43, 73	QFSK	X

**RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGUR MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	AXIS
A, B	1 to 73	43	QFSK	X

**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGUR MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
A	1 to 73	1, 73	QFSK



### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (Section 15.249)**

**ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### **3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit.



## 4. TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209, 15.249 as following:

15.209 Limit		
Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3
15.249 Limit		
Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~ 5875 MHz	50	500
24 ~ 24.25 GHz	250	2500

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Jul. 27, 2008
Spectrum Analyzer Agilent	E4446A	MY44360128	Dec. 06, 2008
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	May 31, 2008
HORN Antenna SCHWARZBECK	9120D	9120D-209	Jun. 28, 2008
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 24, 2008
Preamplifier Agilent	8447D	2944A10633	Oct. 28, 2008
Preamplifier Agilent	8449B	3008A01964	Oct. 23, 2008
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	283402/4	Dec. 06, 2008
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	251644/4	Dec. 06, 2008
Software ADT.	ADT_Radiated_V7.6	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 3.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 988962.
  5. The IC Site Registration No. is IC3789B-3.

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

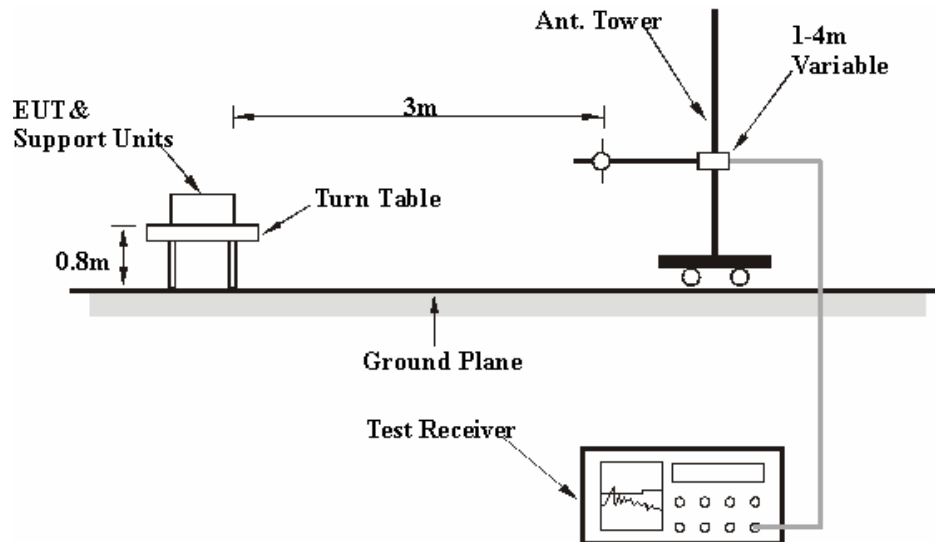

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 TEST RESULTS

##### ABOVE 1GHz WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	QFSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1016hPa	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	43.75 PK	74.00	-30.25	1.11 H	200	11.51	32.24
2	2390.00	30.38 AV	54.00	-23.62	1.11 H	200	-1.86	32.24
3	2399.50	36.14 PK	74.00	-37.86	1.11 H	200	3.86	32.28
4	2399.50	36.01 AV	54.00	-17.99	1.11 H	200	3.73	32.28
5	*2405.00	92.14 PK	114.00	-21.86	1.11 H	200	59.84	32.30
6	*2405.00	92.01 AV	94.00	-1.99	1.11 H	200	59.71	32.30
7	4810.00	51.79 PK	74.00	-22.21	1.06 H	313	13.71	38.08
8	4810.00	44.02 AV	54.00	-9.98	1.06 H	313	5.94	38.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	43.27 PK	74.00	-30.73	1.71 V	177	11.03	32.24
2	2390.00	29.98 AV	54.00	-24.02	1.71 V	177	-2.26	32.24
3	2399.50	29.39 PK	74.00	-44.61	1.71 V	177	-2.89	32.28
4	2399.50	29.18 AV	54.00	-24.82	1.71 V	177	-3.10	32.28
5	*2405.00	85.39 PK	114.00	-28.61	1.71 V	177	53.09	32.30
6	*2405.00	58.07 AV	94.00	-8.93	1.71 V	177	25.77	32.30
7	4810.00	51.17 PK	74.00	-22.83	1.13 V	31	13.09	38.08
8	4810.00	42.99 AV	54.00	-11.01	1.13 V	31	4.91	38.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 43	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	QFSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1016hPa	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2447.00	92.83 PK	114.00	-21.17	1.10 H	206	60.39	32.44
2	<b>*2447.00</b>	<b>92.67 AV</b>	<b>94.00</b>	<b>-1.33</b>	<b>1.10 H</b>	<b>206</b>	<b>60.23</b>	<b>32.44</b>
3	4894.00	52.46 PK	74.00	-21.54	1.20 H	275	14.06	38.40
4	4894.00	45.14 AV	54.00	-8.86	1.20 H	275	6.74	38.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2447.00	86.05 PK	114.00	-27.95	1.72 V	175	53.61	32.44
2	*2447.00	85.72 AV	94.00	-8.28	1.72 V	175	53.28	32.44
3	4894.00	51.79 PK	74.00	-22.21	1.07 V	156	13.39	38.40
4	4894.00	44.21 AV	54.00	-9.79	1.07 V	156	5.81	38.40

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 73	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	QFSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1016hPa	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2477.00	91.76 PK	114.00	-22.24	1.10 H	202	59.23	32.53
2	*2477.00	91.53 AV	94.00	-2.47	1.10 H	202	59.00	32.53
3	2483.50	35.26 PK	74.00	-38.74	1.10 H	202	2.70	32.56
4	2483.50	35.03 AV	54.00	-18.97	1.10 H	202	2.47	32.56
5	4954.00	51.27 PK	74.00	-22.73	1.04 H	179	12.76	38.51
6	4954.00	42.71 AV	54.00	-11.29	1.04 H	179	4.20	38.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2477.00	84.96 PK	114.00	-29.04	1.68 V	185	52.43	32.53
2	*2477.00	84.72 AV	94.00	-9.28	1.68 V	185	52.19	32.53
3	2483.50	34.68 PK	74.00	-39.32	1.68 V	185	2.12	32.56
4	2483.50	34.27 AV	54.00	-19.73	1.68 V	185	1.71	32.56
5	4954.00	50.76 PK	74.00	-23.24	1.06 V	224	12.25	38.51
6	4954.00	41.98 AV	54.00	-12.02	1.06 V	224	3.47	38.51

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency



**RADIATED WORST-CASE DATA: BELOW 1GHz**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 43	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	QFSK	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1016hPa	TEST MODE	A
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	103.78	18.47 QP	43.50	-25.03	2.00 H	22	7.81	10.65
2	243.77	16.96 QP	46.00	-29.04	1.50 H	106	3.75	13.21
3	375.98	25.15 QP	46.00	-20.85	1.00 H	265	8.07	17.08
4	648.18	23.37 QP	46.00	-22.63	1.00 H	46	-0.18	23.55
5	782.34	25.47 QP	46.00	-20.53	2.00 H	196	-0.33	25.80
6	955.38	28.66 QP	46.00	-17.34	1.50 H	40	0.31	28.36

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.89	21.56 QP	43.50	-21.94	1.50 V	340	11.38	10.18
2	206.83	22.07 QP	43.50	-21.43	1.50 V	199	10.50	11.56
3	235.99	21.59 QP	46.00	-24.41	1.50 V	217	8.72	12.87
4	570.41	20.92 QP	46.00	-25.08	1.50 V	163	-0.83	21.74
5	764.84	26.02 QP	46.00	-19.98	1.00 V	220	0.30	25.72
6	935.94	27.46 QP	46.00	-18.54	2.00 V	67	-0.66	28.12

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 43	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	QFSK	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1016hPa	TEST MODE	B
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.29	20.05 QP	40.00	-19.95	1.50 H	7	5.26	14.79
2	348.76	24.47 QP	46.00	-21.53	1.00 H	253	8.03	16.44
3	403.20	22.01 QP	46.00	-23.99	1.50 H	295	4.26	17.75
4	659.85	23.78 QP	46.00	-22.22	1.00 H	109	0.07	23.71
5	757.06	25.24 QP	46.00	-20.76	2.00 H	37	-0.44	25.68
6	967.05	28.57 QP	54.00	-25.43	1.00 H	334	0.13	28.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.89	21.89 QP	43.50	-21.61	1.50 V	304	11.71	10.18
2	199.05	20.45 QP	43.50	-23.05	1.50 V	187	9.11	11.34
3	230.16	21.54 QP	46.00	-24.46	1.50 V	10	8.94	12.61
4	350.71	18.09 QP	46.00	-27.91	1.00 V	202	1.60	16.49
5	523.75	20.55 QP	46.00	-25.45	1.00 V	304	-0.19	20.74
6	910.66	28.16 QP	46.00	-17.84	1.50 V	10	0.41	27.75

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



## 4.2 CONDUCTED EMISSION MEASUREMENT

NA

## 4.3 BAND EDGES MEASUREMENT

### 4.3.1 LIMITS OF BAND EDGES MEASUREMENT

Below  $-50\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots are attached on the following pages.

### 4.3.4 DEVIATION FROM TEST STANDARD



No deviation.



### 4.3.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 4.3.6 TEST RESULTS

The spectrum plots are attached on the following 4 images. D1 line indicates the highest level, and D2 line indicates the 50dB offset below D1. It shows compliance with the requirement in part 15.249 (d).

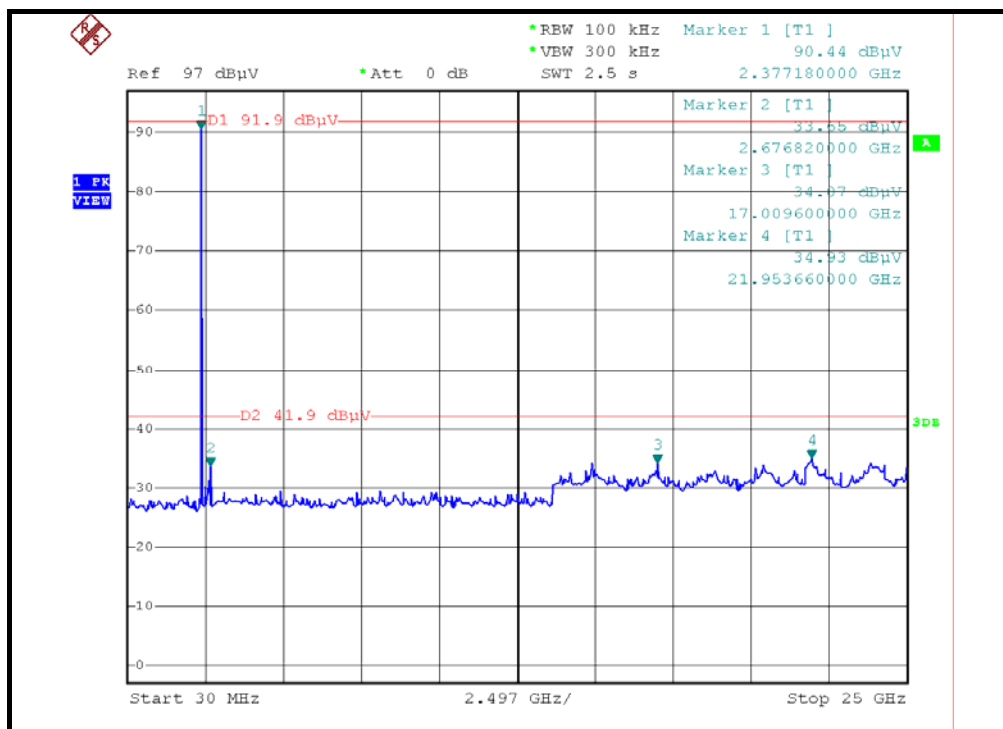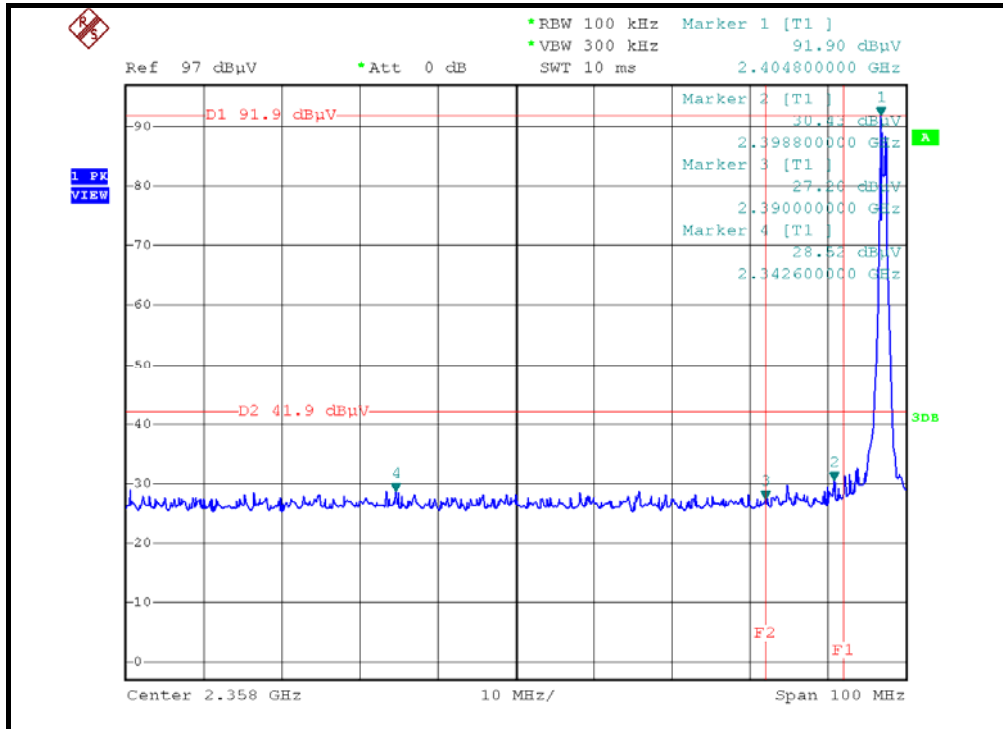

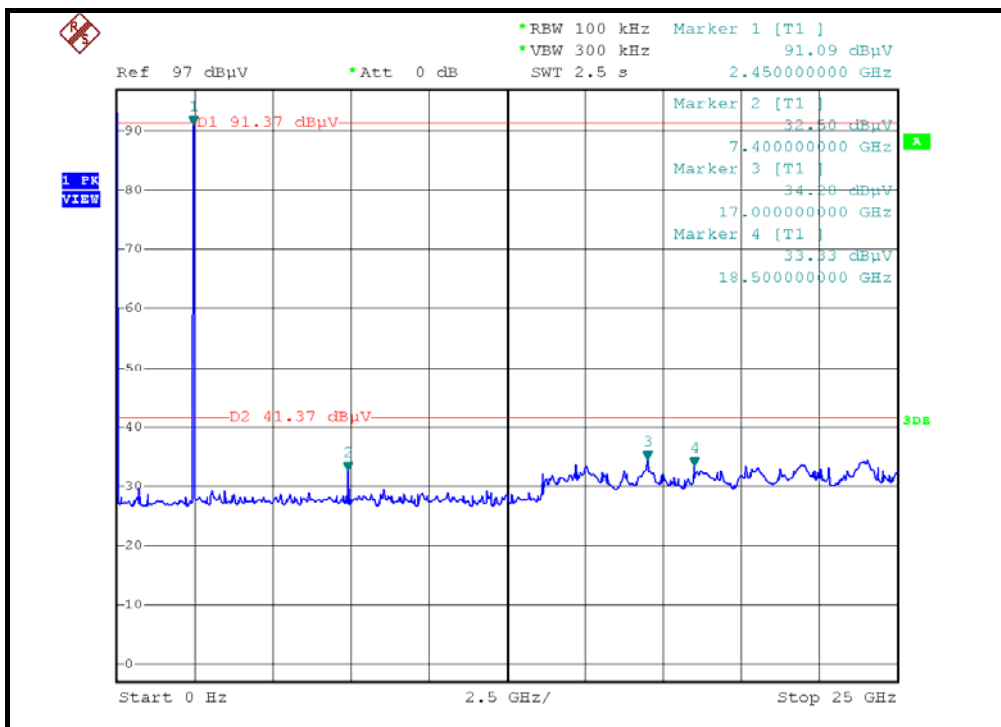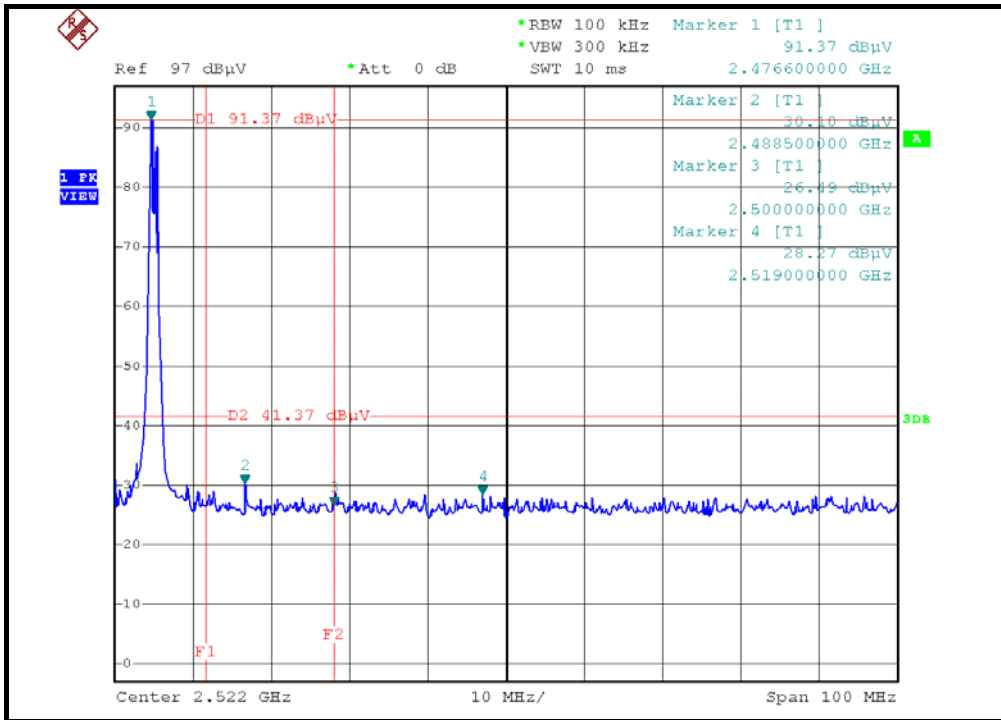



## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA, CSA
<b>R.O.C.</b>	TAF, BSMI, NCC
<b>Netherlands</b>	Telefication
<b>Singapore</b>	GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

### **Linko EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26051924

### **Hsin Chu EMC/RF Lab**

Tel: 886-3-5935343  
Fax: 886-3-5935342

### **Hwa Ya EMC/RF/Safety Telecom Lab**

Tel: 886-3-3183232  
Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also



## **7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.