



FCC 47 CFR PART 15 Subpart C

TEST REPORT

For

Presenter Pen

Model Number: PDC

Trade Name: PENPOWER

Issued to

**Acrox Technologies Co., Ltd.
8F, No. 437, Rui Guang Rd., Nei Hu Dist., Taipei 114, Taiwan, R.O.C.**

Issued by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang,
Taoyuan Shien, (338) Taiwan, R.O.C.**

**TEL: 886-3-324-0332
FAX: 886-3-324-5235
<http://www.ccsrf.com>
service@ccsrf.com**



Note: *This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.*



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	October 26, 2009	Initial Issue	ALL	Celine Chou



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY.....	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
3.5 DESCRIPTION OF TEST MODES.....	7
4. INSTRUMENT CALIBRATION	8
4.1 MEASURING INSTRUMENT CALIBRATION	8
4.2 MEASUREMENT EQUIPMENT USED	8
4.3 MEASUREMENT UNCERTAINTY	8
5. FACILITIES AND ACCREDITATIONS	10
5.1 FACILITIES	10
5.2 EQUIPMENT	10
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	11
6. SETUP OF EQUIPMENT UNDER TEST	12
6.1 SETUP CONFIGURATION OF EUT	12
6.2 SUPPORT EQUIPMENT	12
7. FCC PART 15.249 REQUIREMENTS	13
7.1 20dB BANDWIDTH	13
7.2 BAND EDGES MEASUREMENT	16
7.3 SPURIOUS EMISSION	21
7.4 POWERLINE CONDUCTED EMISSIONS	31
8. APPENDIX 1 PHOTOGRAPHS OF TEST SETUP.....	34



1. TEST RESULT CERTIFICATION

Applicant: Acrox Technologies Co., Ltd.
 8F, No. 437, Rui Guang Rd., Nei Hu Dist.,
 Taipei 114, Taiwan, R.O.C.

Equipment Under Test: Presenter Pen

Trade Name: PENPOWER

Model: PDC

Date of Test: October 14 ~ 26, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements emission limits of FCC Rules Part 15.207, 15.209 and 15.249. The test results of this report relate only to the tested sample identified in this report.

Approved by:

David Wang
Director

Reviewed by:

Ethan Huang
Section Manager



2. EUT DESCRIPTION

Product	Presenter Pen
Trade Name	PENPOWER
Model Number	PDC
Model Discrepancy	N/A
EUT Power Rating	1.5VDC from Battery (For Presenter Pen) VDC from PC (For USB Dongle)
Operating Frequency Range	2405 ~ 2477MHz
Output Power	100.76dBuV/m
Modulation Technique	GFSK
Number of Channels	73 Channel
Antenna Gain	1.672dBi
Antenna Designation	PCB Antenna

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This test report is intended for FCC ID: **PRDPRPENPOW01** to comply with Section 15.207, 15.209, 15.249 (FCC Part 15, Subpart C Rules.)
3. The Presenter PEN is TX; USB Dongle is only RX.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 (2003) and FCC CFR 47 Part 2, Part 15.207, 15.209 and 15.249.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2003).



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: PDC) had been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

Channel Low (2405MHz), Channel Mid (2436MHz) and Channel High (2477MHz) were chosen for the final testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Y axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	10/28/2009
Spectrum Analyzer	R&S	FSEB	825829/011	10/29/2009
USB Power Sensor	BOONTON	52012	2061194	06/08/2010

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	10/28/2009
Spectrum Analyzer	R&S	FSEB	825829/011	10/29/2009
Pre-Amplifier	HP	8447D	2944A06530	12/31/2009
Pre-Amplifier	HP	8449B	3008A01738	04/17/2010
EMI Test Receiver	SCHAFFNER	SCR 3501	436	01/21/2010
Loop Antenna	EMCO	6502	2356	05/28/2010
Bilog Antenna	SCHWAZBECK	VULB9160	3084	09/08/2010
Horn Antenna	EMCO	3115	00022250	05/08/2010
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Test S/W	LabVIEW 6.1 (Wugu Chamber EMI Test V1_4.5.3)			

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	845552/030	05/18/2010
LISN	R&S	ENV216	100074	12/09/2009
LISN	FCC	FCC-LISN-50/25 0-16-2-07	06013	10/13/2010
Test S/W	CCS-3A1-CE			



4.3 MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Powerline Conducted Emission	± 1.7806
3M Semi Anechoic Chamber / 30MHz ~ 1GHz	± 3.8856
3M Semi Anechoic Chamber / Above 1GHz	± 3.8721

Remark: *This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.*



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang, Taoyuan Shien, (338) Taiwan, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7 (1992), ANSI C63.4 (2003) and CISPR Publication 22.

5.2 EQUIPMENT





Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3	 ACCREDITED No. 0824-01
USA	FCC MRA	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 FC _{TW1026}
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-2882/2541/2798/725/1868 C-402/747/912 T-321/325
Taiwan	TAF	EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803	 TAF Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 2324C-3 IC 2324C-5

Note: No part of this report may be used to claim or imply product endorsement by A2LA, TAF or other government agency.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

For 30 ~ 1000 MHz and Powerline Conducted Emissions

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	DELL	D400	0932RY	E2K24GBRL	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	LCD Monitor	DELL	2408WFB	CN-0NN792-74261-84 9-15ES	FCC DoC	D-SUB Cable: Shielded, 1.8m with two cores	Unshielded, 1.8m
3.	Printer	EPSON	STYLUS C60	DR3K039632	FCC DoC	Unshielded, 1.8m	Unshielded, 1.8m

For Above 1GHz

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
	N/A						

****No any support equipment during the test.**

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.249 REQUIREMENTS

7.1 20dB BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted




TEST PLOT

20dB Bandwidth (CH Low)

Agilent 16:36:01 Oct 26, 2009

R T

Mkr1 1.080 MHz
0.80 dB

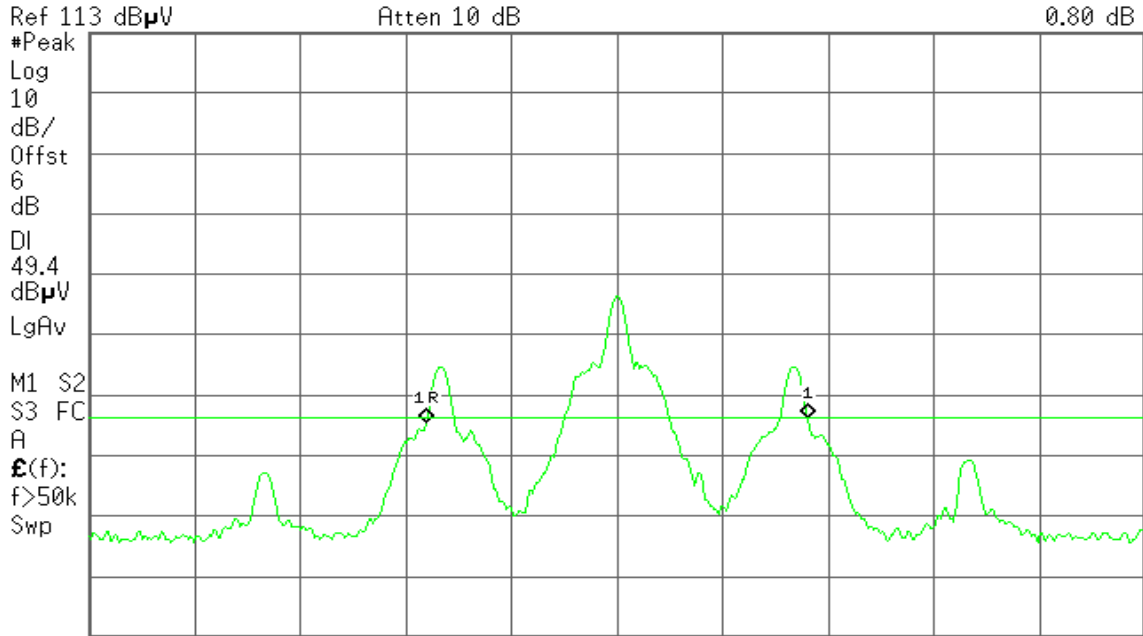


20dB Bandwidth (CH Mid)

Agilent 16:39:21 Oct 26, 2009

R T

Mkr1 1.155 MHz
0.94 dB

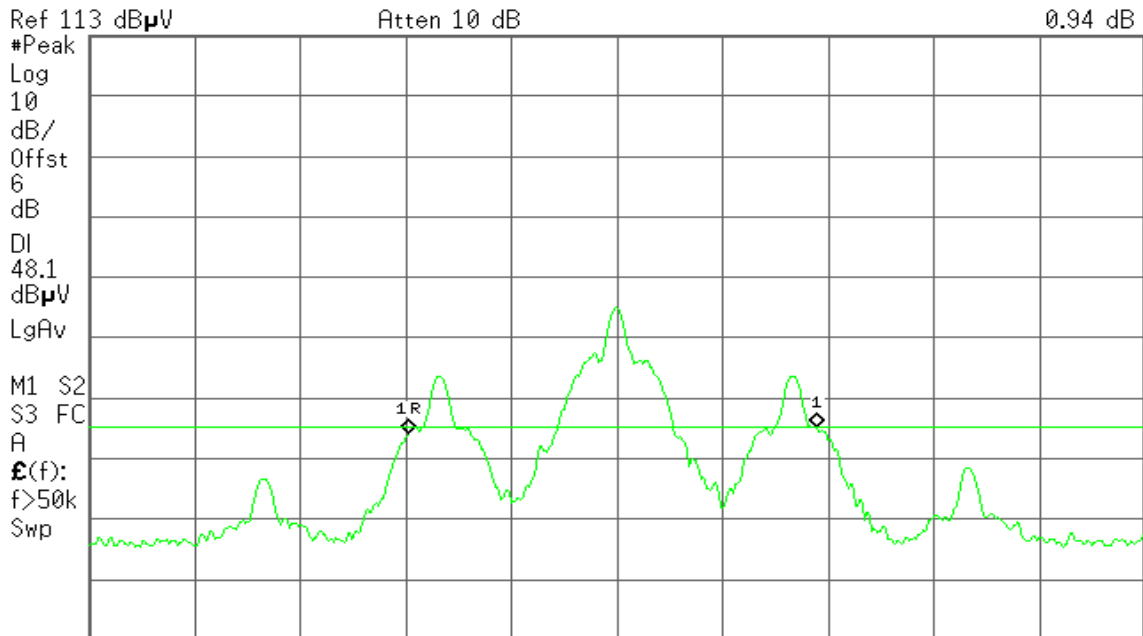



20dB Bandwidth (CH High)


Agilent 16:41:20 Oct 26, 2009

R T

Mkr1 1.145 MHz
0.10 dB

Ref 113 dBμV

Atten 10 dB

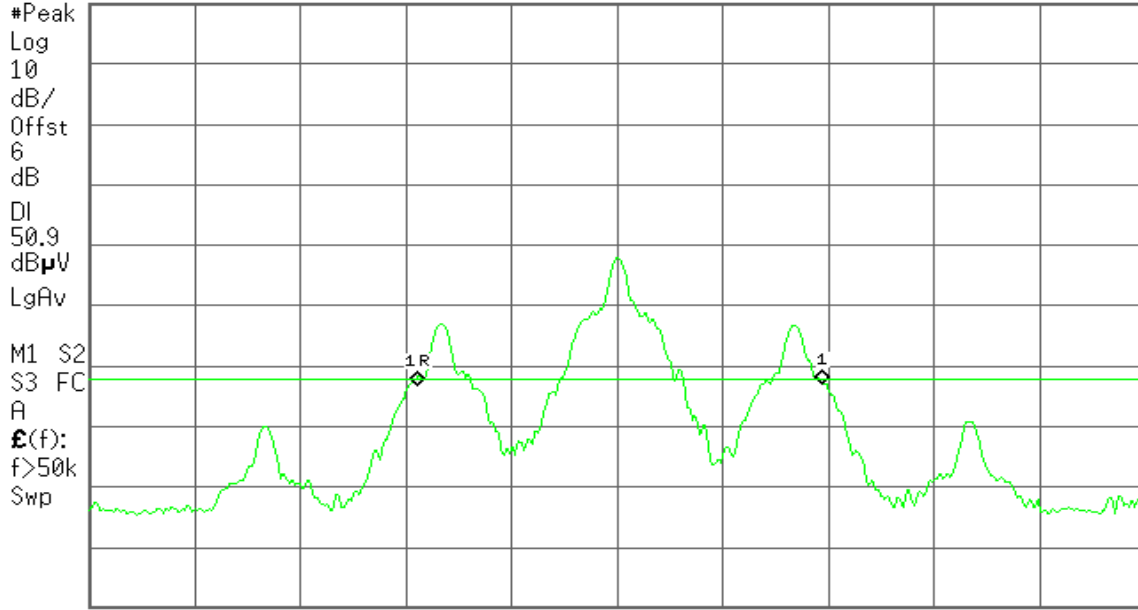

Center 2.477 025 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 100 kHz

Sweep 3.2 ms (601 pts)

7.2 BAND EDGES MEASUREMENT


LIMIT

- In the above emission table, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

TEST CONFIGURATION

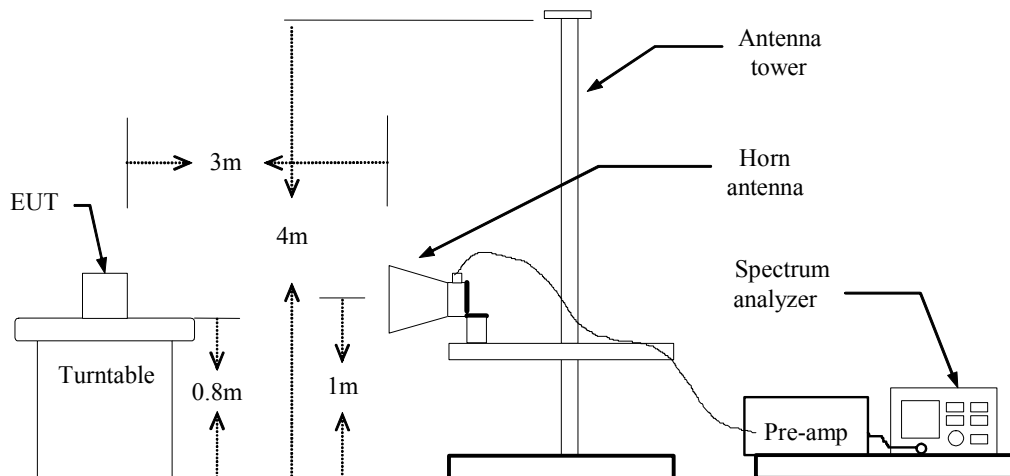

TEST PROCEDURE

- The EUT is placed on a turntable, which is 0.8m above the ground plane.
- The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
- Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



TEST PLOT

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 09:48:18 Oct 14, 2009

R T

Mkr1 2.390 00 GHz
45.08 dBμV

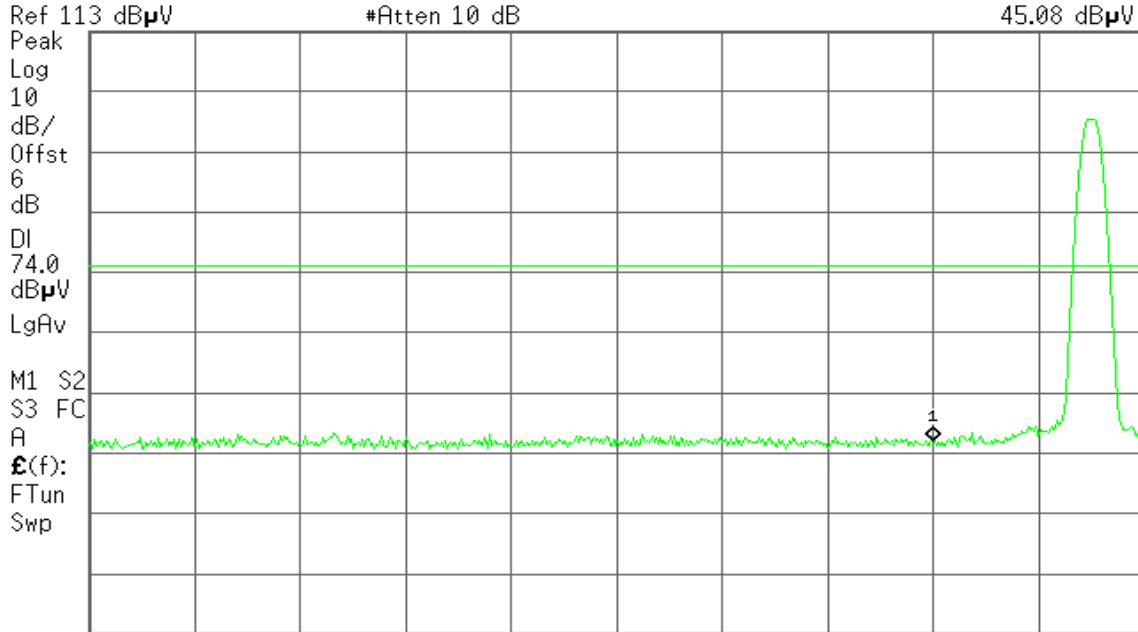

Start 2.310 00 GHz Stop 2.410 00 GHz
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 09:45:50 Oct 14, 2009

R T

Mkr2 2.332 83 GHz
34.34 dBμV

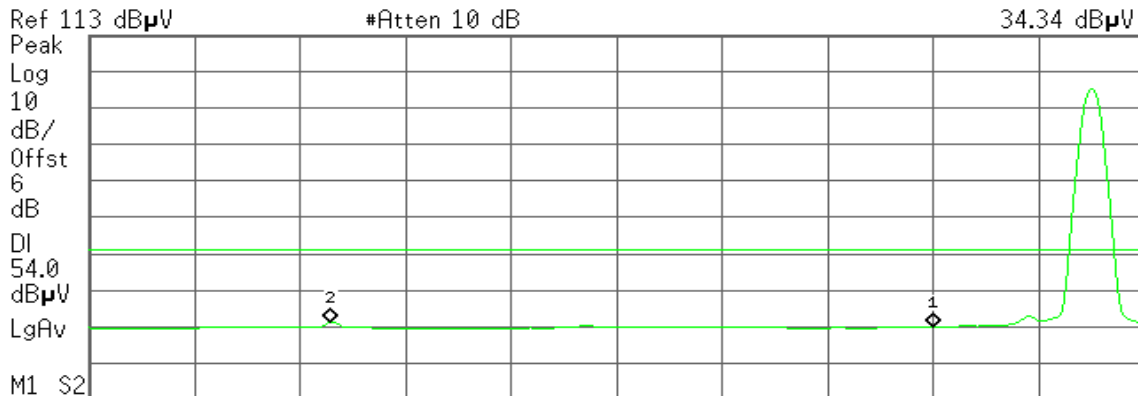

Start 2.310 00 GHz Stop 2.410 00 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 7.797 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 00 GHz	32.88 dBμU
2	(1)	Freq	2.332 83 GHz	34.34 dBμU




Detector mode: Peak

Polarity: Horizontal

Agilent 10:48:43 Oct 14, 2009

R T

Mkr1 2.390 00 GHz
45.55 dB μ V

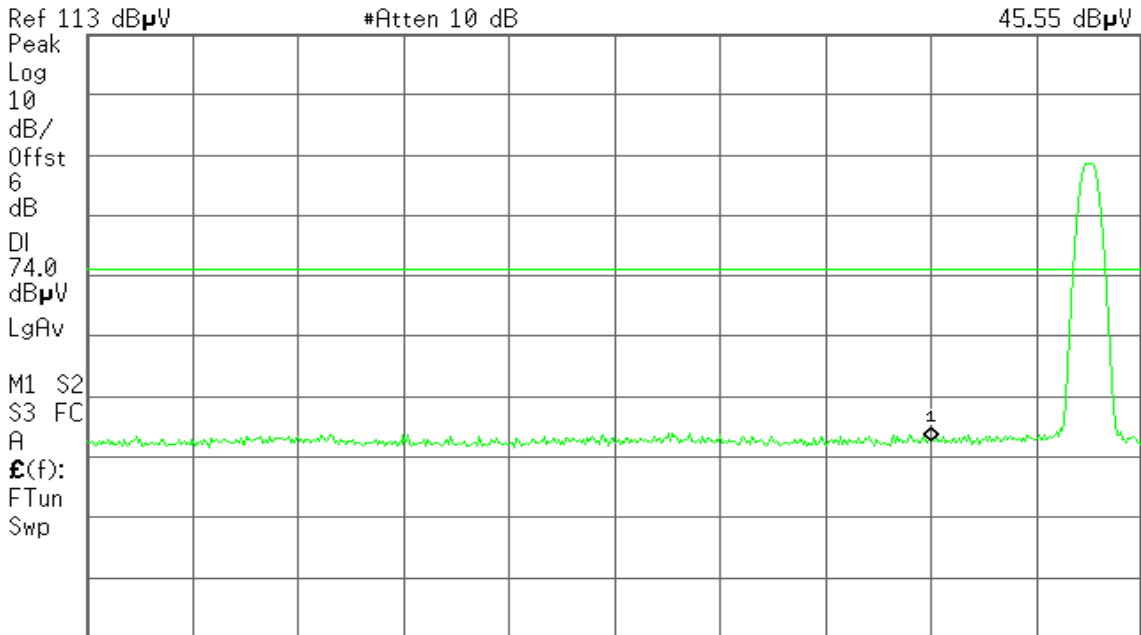

Start 2.310 00 GHz Stop 2.410 00 GHz
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Horizontal

Agilent 10:50:16 Oct 14, 2009

R T

Mkr1 2.390 00 GHz
32.74 dB μ V

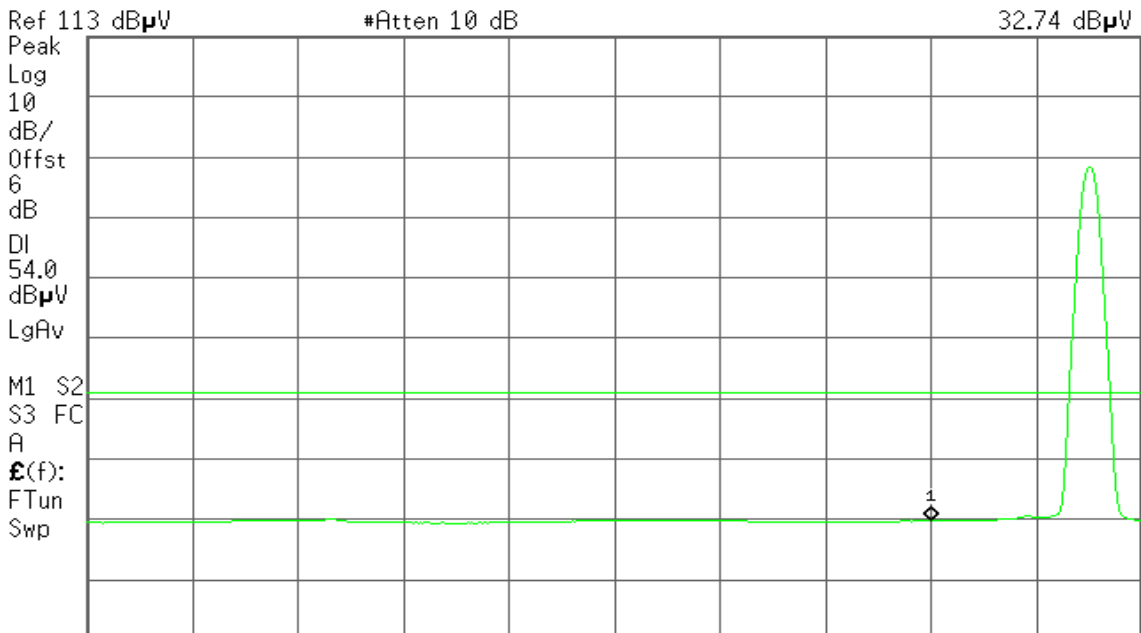

Start 2.310 00 GHz Stop 2.410 00 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 7.797 s (601 pts)



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 09:39:40 Oct 14, 2009

R T

Mkr1 2.483 50 GHz
45.68 dB μ V

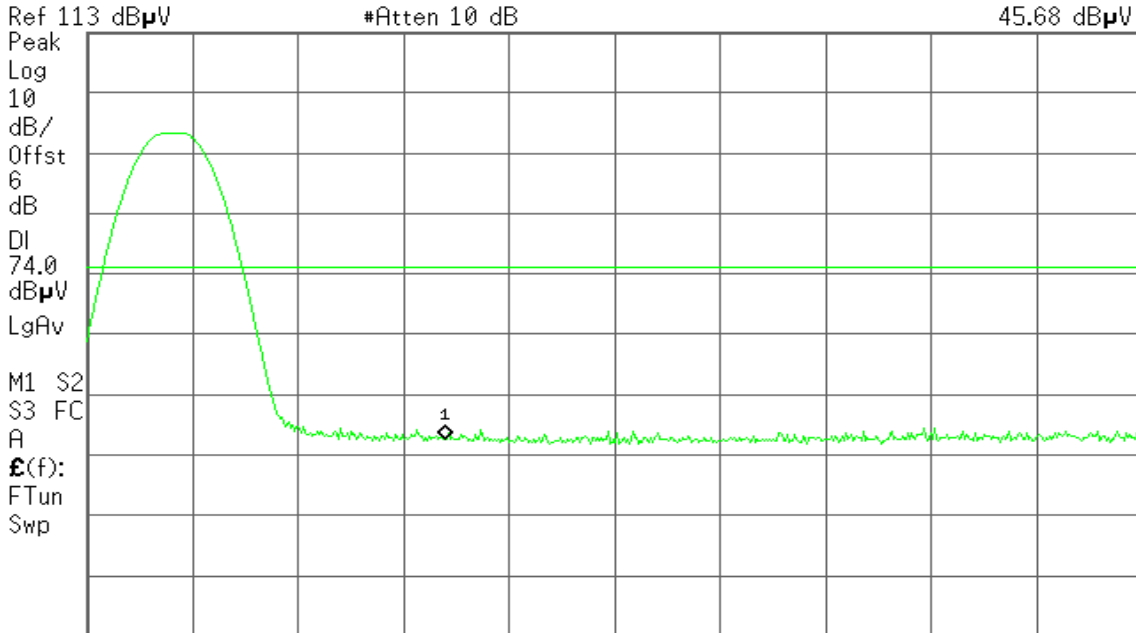

Start 2.475 00 GHz #Res BW 1 MHz #VBW 1 MHz Stop 2.500 00 GHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 09:40:07 Oct 14, 2009

R T

Mkr1 2.483 50 GHz
33.61 dB μ V

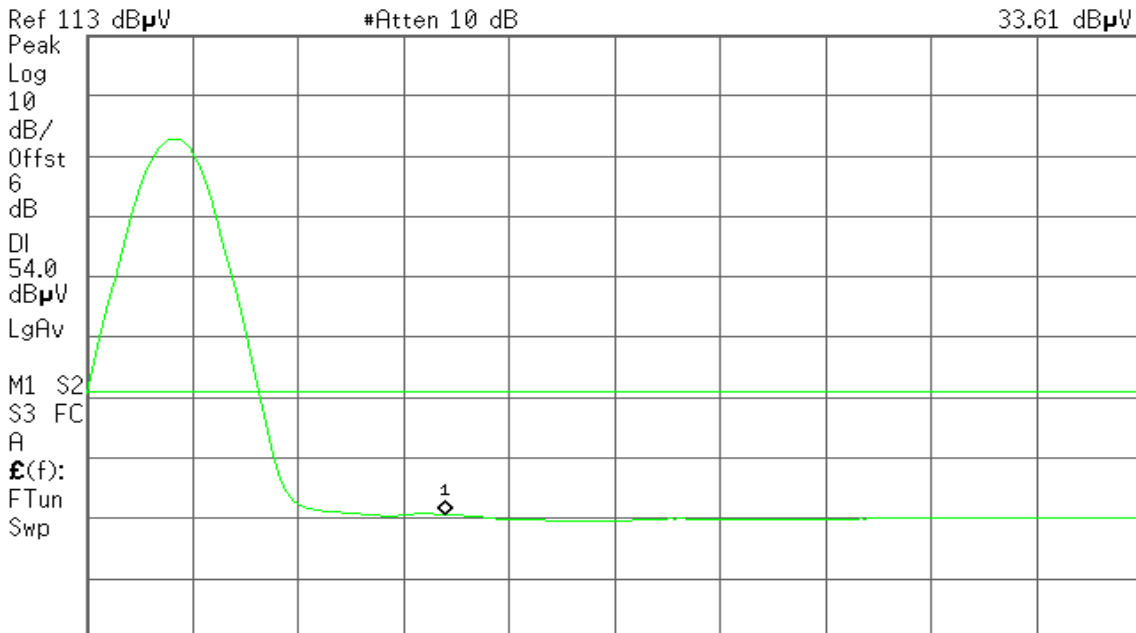

Start 2.475 00 GHz #Res BW 1 MHz #VBW 10 Hz Stop 2.500 00 GHz Sweep 1.949 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 09:35:52 Oct 14, 2009

R T

Mkr1 2.483 50 GHz
45.12 dBµV

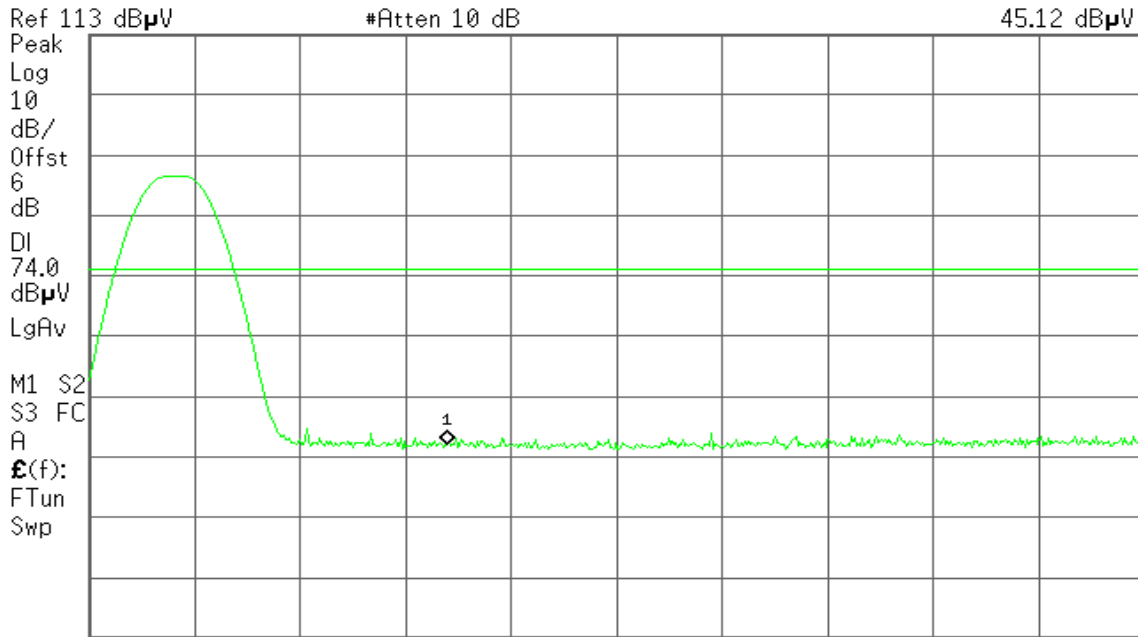

Start 2.475 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Horizontal

Agilent 09:36:34 Oct 14, 2009

R T

Mkr1 2.483 50 GHz
32.90 dBµV

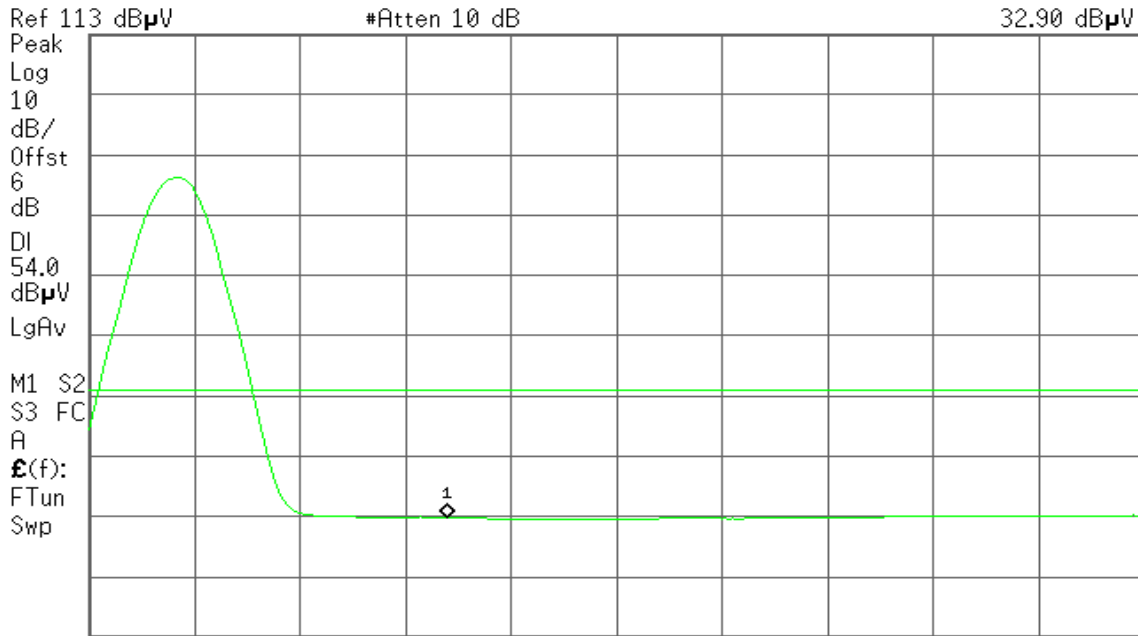

Start 2.475 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 1.949 s (601 pts)



7.3 SPURIOUS EMISSION

LIMIT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (µV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

TEST CONFIGURATION

Below 1 GHz

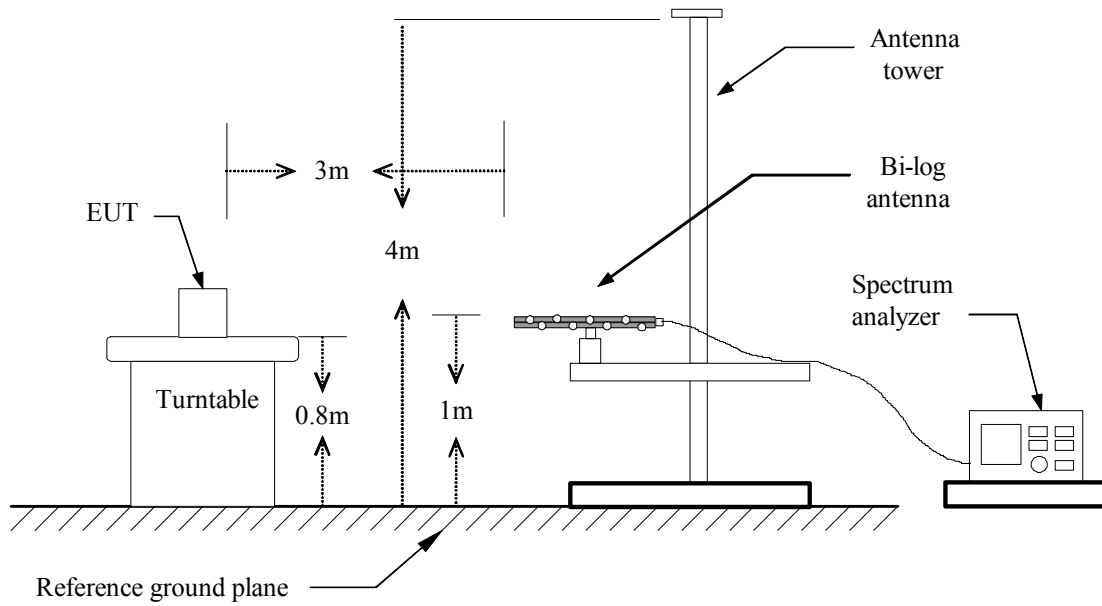

Above 1 GHz

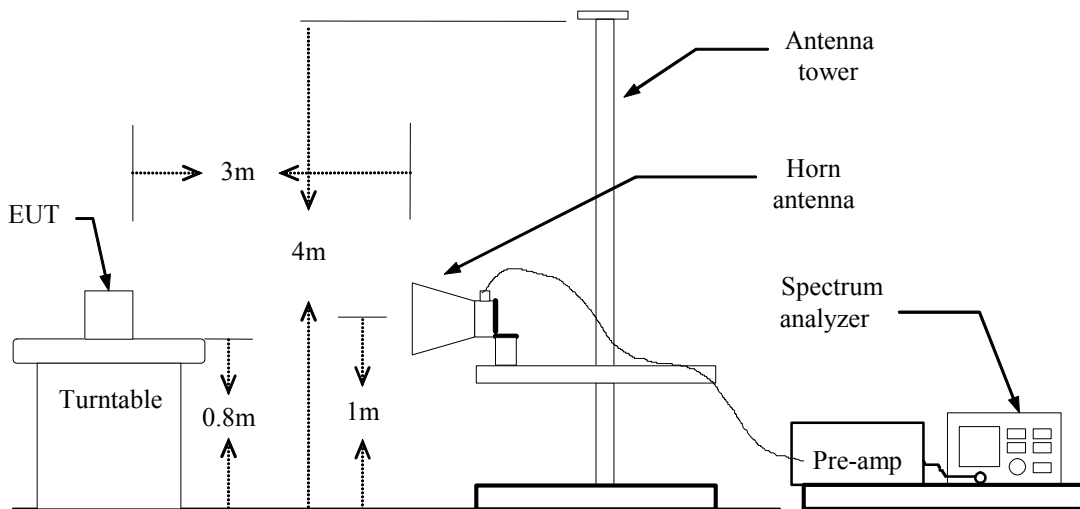



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
 RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
 (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

No non-compliance noted.



TEST DATA

Below 1 GHz

Operation Mode: Normal Link **Test Date:** October 24, 2009
Temperature: 18°C **Tested by:** Stan Lin
Humidity: 60% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
41.4942	V	42.13	-13.57	28.56	40.00	-11.44	QP
54.2500	V	40.42	-14.60	25.82	40.00	-14.18	QP
83.3500	V	44.85	-19.15	25.70	40.00	-14.30	QP
107.6000	V	44.75	-17.14	27.61	43.50	-15.89	QP
134.3235	V	47.80	-13.45	34.35	43.50	-9.15	QP
192.4750	V	46.11	-15.08	31.03	43.50	-12.47	QP
250.6750	V	37.25	-12.48	24.77	46.00	-21.23	QP
398.6000	V	42.91	-9.48	33.43	46.00	-12.57	QP
667.7750	V	41.08	-4.29	36.79	46.00	-9.21	QP
801.1500	V	36.41	-2.13	34.28	46.00	-11.72	QP
42.1250	H	33.81	-13.55	20.26	40.00	-19.74	QP
95.4750	H	37.91	-17.84	20.07	43.50	-23.43	QP
197.3250	H	41.12	-15.29	25.83	43.50	-17.67	QP
250.6750	H	37.87	-12.48	25.39	46.00	-20.61	QP
398.6000	H	46.44	-9.48	36.96	46.00	-9.04	QP
539.2500	H	34.10	-6.39	27.71	46.00	-18.29	QP
563.5000	H	35.41	-5.61	29.80	46.00	-16.20	QP
665.3500	H	36.73	-4.39	32.34	46.00	-13.66	QP
750.2250	H	36.52	-2.15	34.37	46.00	-11.63	QP
983.0250	H	33.38	1.98	35.36	53.90	-18.54	QP

Remark:

1. No emission found between lowest internal used / generated frequency to 30 MHz. (9kHz ~ 30MHz)
2. Measuring frequencies from 9 kHz to the 1GHz.
3. Radiated emissions measured in the measured frequency range were made with an instrument using peak detector or quasi-peak detector mode.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Above 1 GHz

Operation Mode: TX / CH Low

Test Date: October 21, 2009

Temperature: 20°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2404.88	V	87.83	87.40	-0.28	87.55	87.12	114.00	94.00	-6.88	AVG
1716.67	V	49.93	---	-2.06	47.87	---	74.00	54.00	-6.13	Peak
2210.00	V	49.66	---	0.51	50.17	---	74.00	54.00	-3.83	Peak
2523.33	V	48.50	---	0.78	49.27	---	74.00	54.00	-4.73	Peak
4808.33	V	48.14	45.73	7.65	55.79	53.38	74.00	54.00	-0.62	AVG
N/A										
2404.88	H	80.02	79.57	-1.12	78.90	78.45	114.00	94.00	-15.55	AVG
2080.00	H	49.21	---	-1.57	47.64	---	74.00	54.00	-6.36	Peak
2713.33	H	48.57	---	0.01	48.58	---	74.00	54.00	-5.42	Peak
4808.33	H	48.12	45.61	6.78	54.90	52.39	74.00	54.00	-1.61	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / CH Mid

Test Date: October 21, 2009

Temperature: 20°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2435.85	V	85.22	84.81	0.22	85.44	85.03	114.00	94.00	-8.97	AVG
1826.67	V	49.58	---	-1.94	47.64	---	74.00	54.00	-6.36	Peak
2226.67	V	49.32	---	0.38	49.70	---	74.00	54.00	-4.30	Peak
2493.33	V	48.82	---	1.14	49.96	---	74.00	54.00	-4.04	Peak
4875.00	V	48.03	45.01	7.95	55.99	52.96	74.00	54.00	-1.04	AVG
N/A										
2436.20	H	75.96	75.54	-0.94	75.02	74.60	114.00	94.00	-19.40	AVG
2096.67	H	49.79	---	-1.30	48.49	---	74.00	54.00	-5.51	Peak
2716.67	H	49.00	---	0.00	49.00	---	74.00	54.00	-5.00	Peak
4875.00	H	46.78	43.87	7.35	54.13	51.22	74.00	54.00	-2.78	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / CH High

Test Date: October 21, 2009

Temperature: 20°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2476.88	V	81.22	80.75	0.88	82.10	81.63	114.00	94.00	-12.37	AVG
2196.67	V	49.48	---	0.46	49.94	---	74.00	54.00	-4.06	Peak
2506.67	V	49.56	---	1.12	50.67	---	74.00	54.00	-3.33	Peak
4958.33	V	47.97	45.42	7.67	55.65	53.09	74.00	54.00	-0.91	AVG
N/A										
2476.88	H	75.32	74.83	-0.71	74.61	74.12	114.00	94.00	-19.88	AVG
2283.33	H	49.39	---	-1.83	47.55	---	74.00	54.00	-6.45	Peak
2886.67	H	49.94	---	0.69	50.63	---	74.00	54.00	-3.37	Peak
4950.00	H	45.87	42.78	7.85	53.73	50.63	74.00	54.00	-3.37	AVG
7433.33	H	39.79	---	11.41	51.20	---	74.00	54.00	-2.80	Peak
N/A										

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).




TEST PLOT

CH Low

Vertical

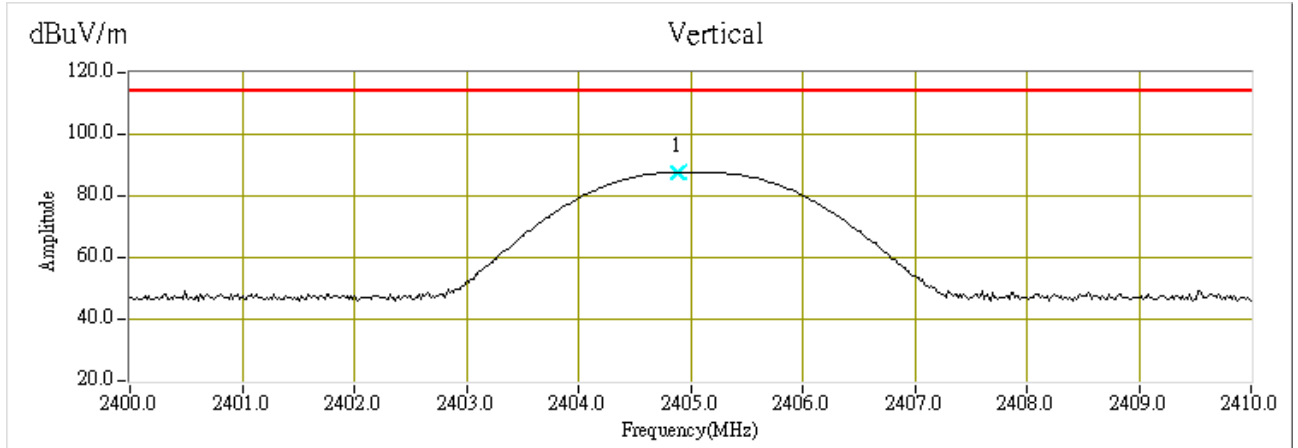


Horizontal

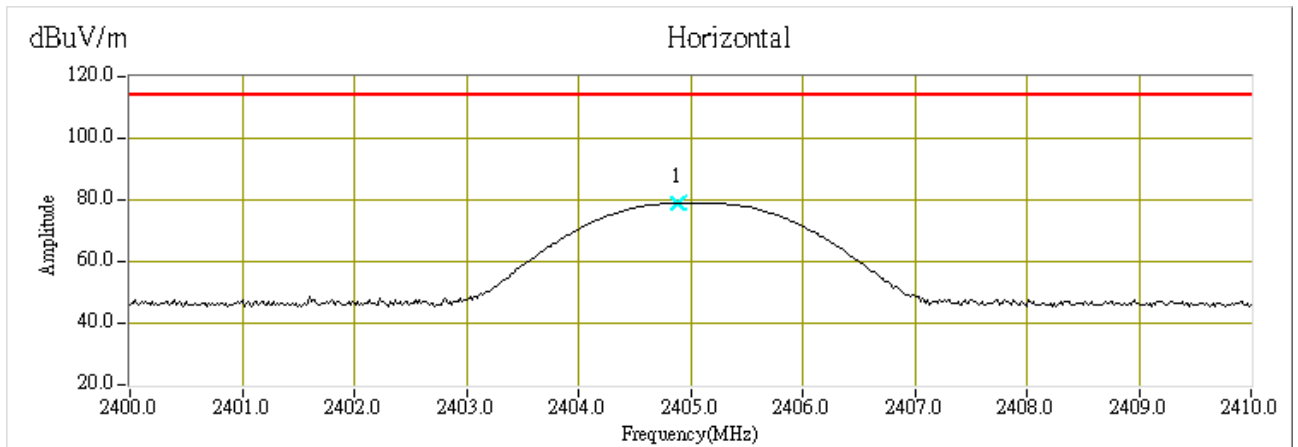




CH Mid

Vertical

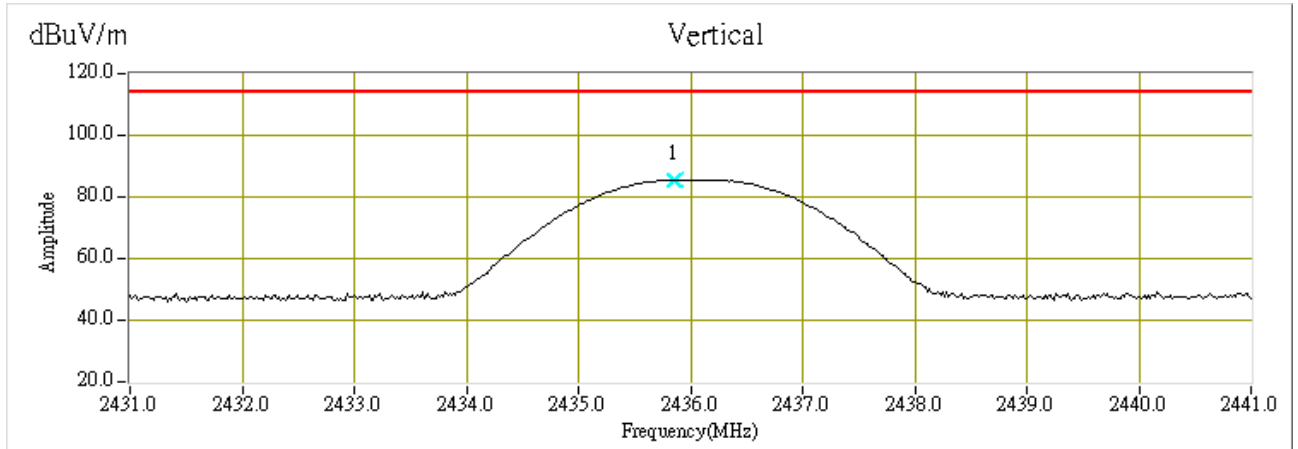


Horizontal

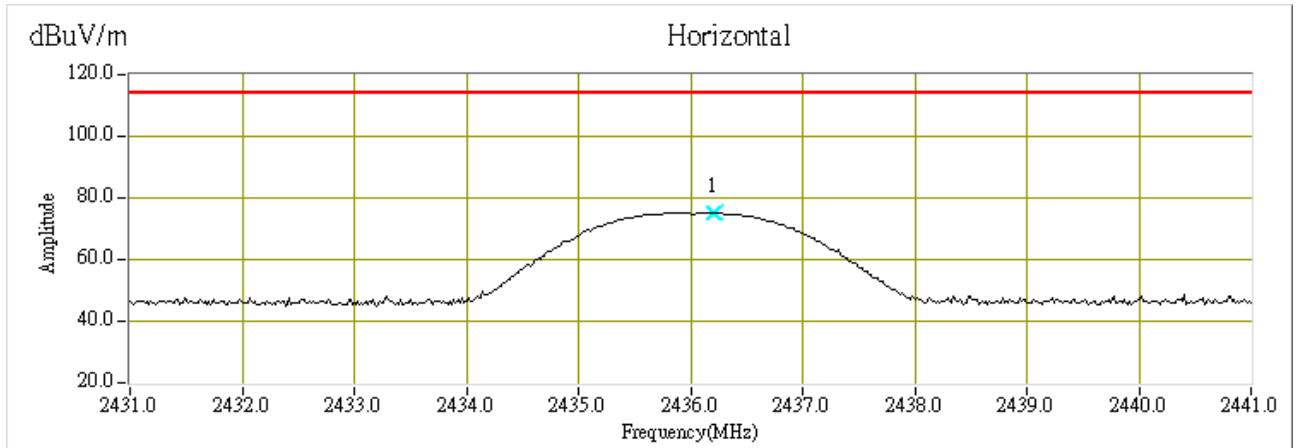




CH High
Vertical

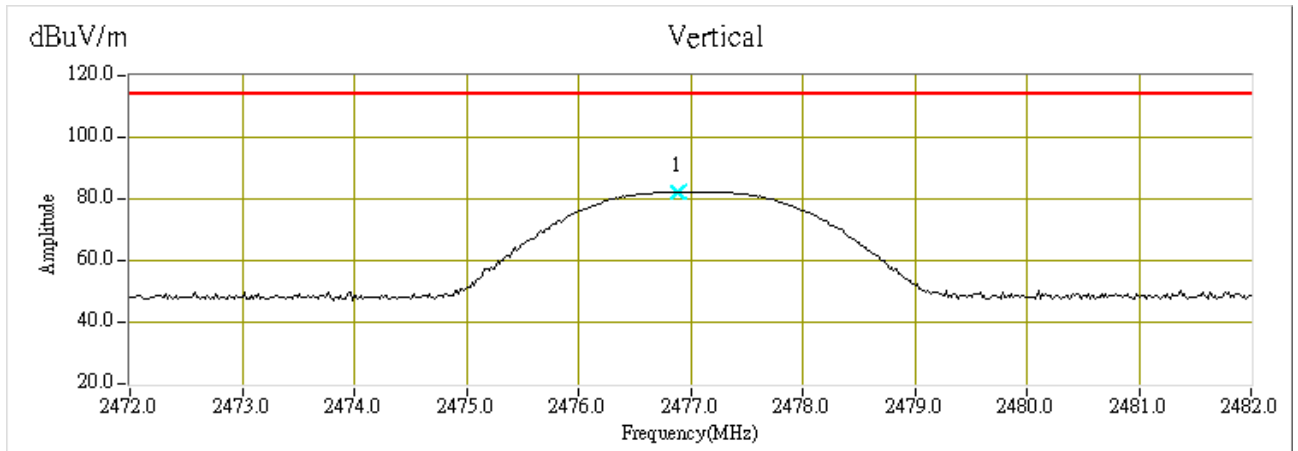

Horizontal

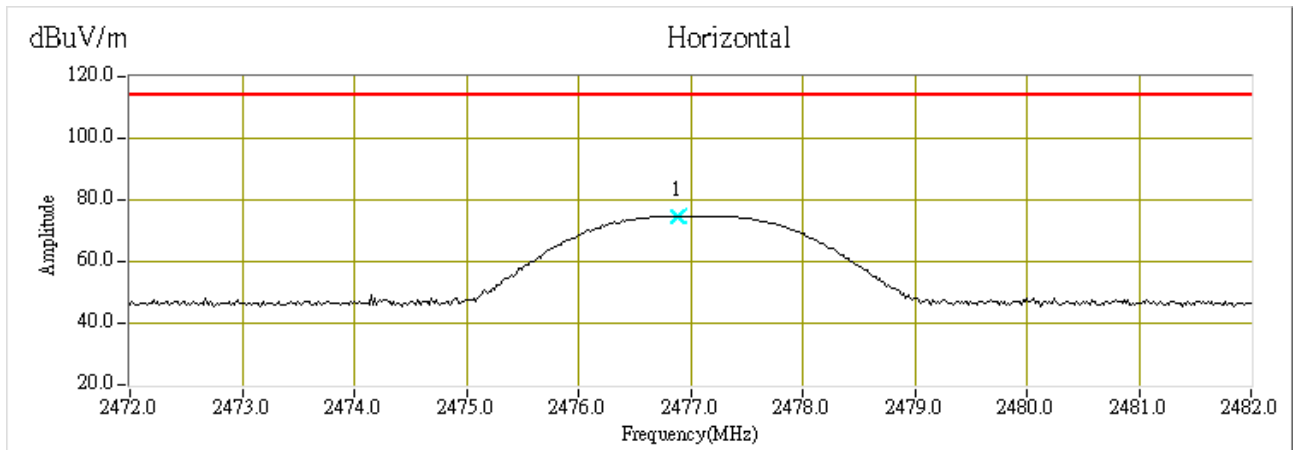



7.4 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



TEST DATA

Operation Mode: Normal Link

Test Date: October 24, 2009

Temperature: 25°C

Tested by: Stan Lin

Humidity: 57% RH

Freq. (MHz)	QP Reading	AV Reading	Corr. factor	QP Result	AV Result	QP Limit	AV Limit	QP Margin	AV Margin	Note
0.1734	38.72	28.82	9.68	48.40	38.50	64.80	54.80	-16.40	-16.30	L1
0.2320	32.02	21.42	9.68	41.70	31.10	62.38	52.38	-20.68	-21.28	L1
0.2906	26.92	18.32	9.68	36.60	28.00	60.51	50.51	-23.91	-22.51	L1
2.6812	21.70	19.40	9.70	31.40	29.10	56.00	46.00	-24.60	-16.90	L1
4.8961	27.29	16.99	9.81	37.10	26.80	56.00	46.00	-18.90	-19.20	L1
16.0328	30.70	27.40	10.30	41.00	37.70	60.00	50.00	-19.00	-12.30	L1
22.3844	28.62	24.32	10.48	39.10	34.80	60.00	50.00	-20.90	-15.20	L1
0.1734	39.21	29.31	9.69	48.90	39.00	64.80	54.80	-15.90	-15.80	L2
0.2320	32.21	22.21	9.69	41.90	31.90	62.38	52.38	-20.48	-20.48	L2
0.2906	26.61	18.61	9.69	36.30	28.30	60.51	50.51	-24.21	-22.21	L2
3.9039	30.18	17.88	9.72	39.90	27.60	56.00	46.00	-16.10	-18.40	L2
15.6227	30.93	27.73	10.37	41.30	38.10	60.00	50.00	-18.70	-11.90	L2
23.4937	29.06	24.46	10.64	39.70	35.10	60.00	50.00	-20.30	-14.90	L2


Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Test Plot

Conducted emissions (Line 1)

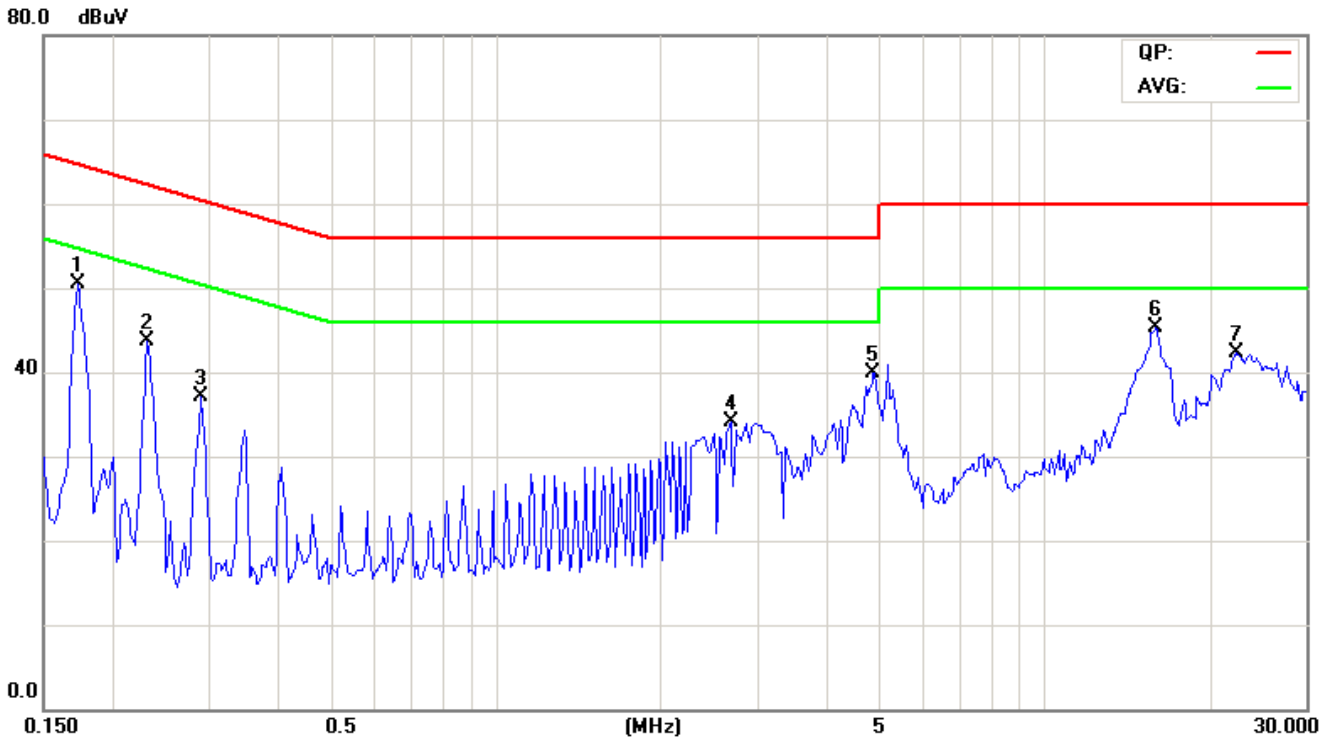

Conducted emissions (Line 2)

